




Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 98 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

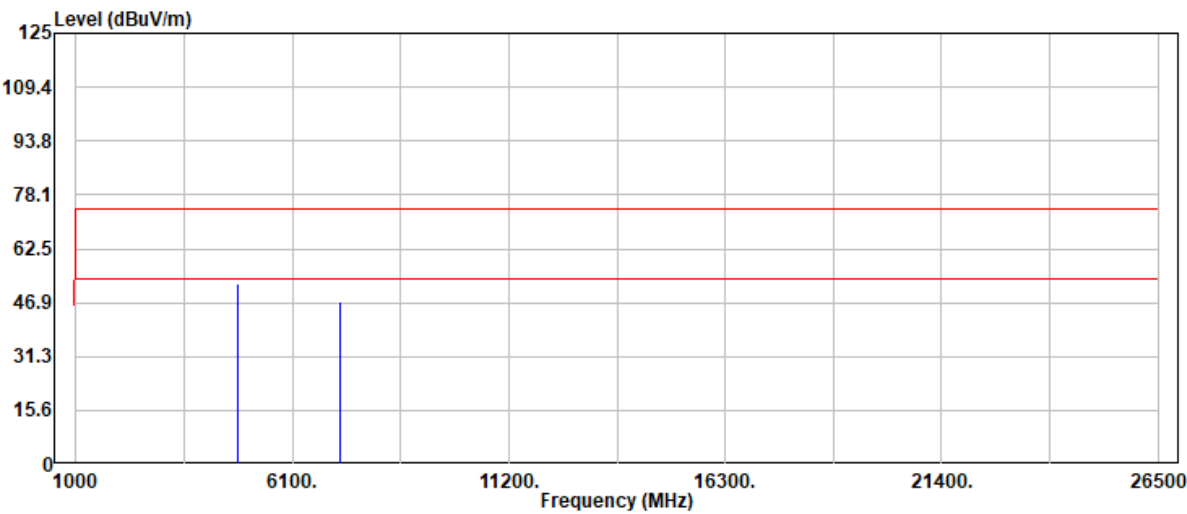


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	49.82	2.39	52.21	74.00	-21.79	Peak
4824.00	45.63	2.39	48.02	54.00	-5.98	Average
7236.00	38.10	9.13	47.23	74.00	-26.77	Peak
7236.00	30.32	9.13	39.45	54.00	-14.55	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 99 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

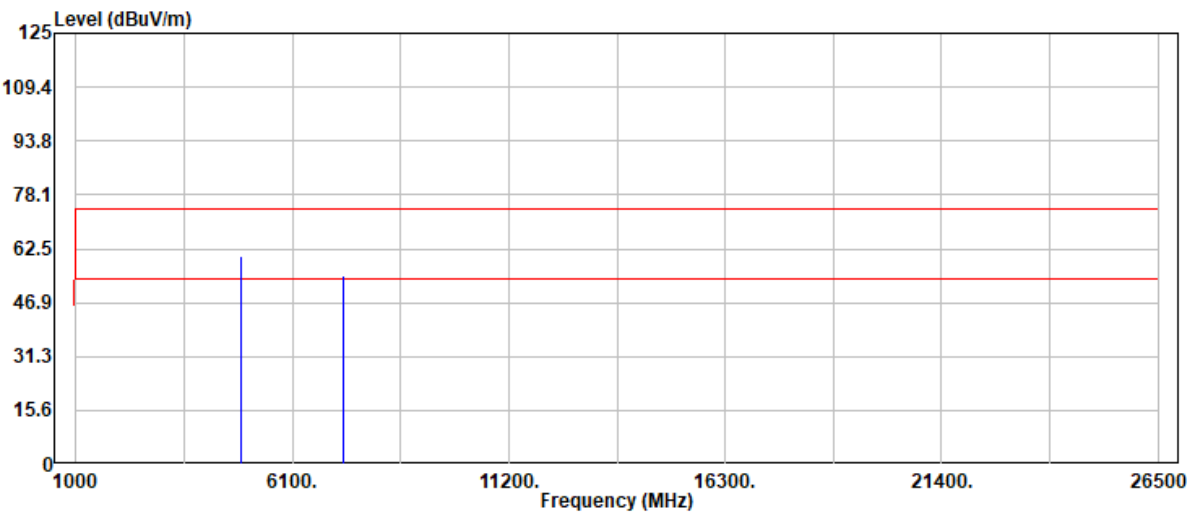


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	57.60	2.61	60.21	74.00	-13.79	Peak
4874.00	47.11	2.61	49.72	54.00	-4.28	Average
7311.00	45.25	9.31	54.56	74.00	-19.44	Peak
7311.00	33.11	9.31	42.42	54.00	-11.58	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 100 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

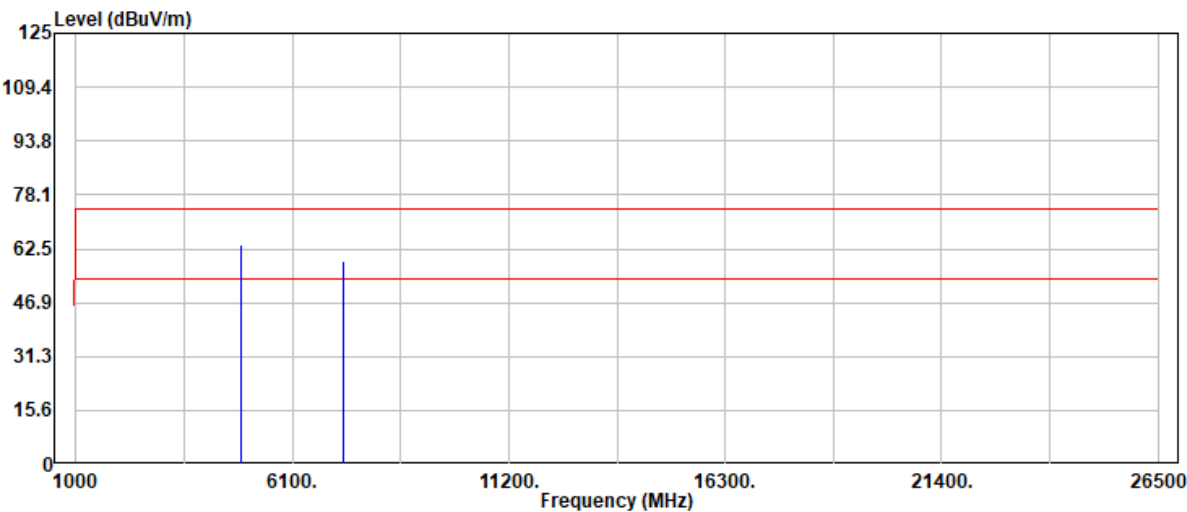


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	61.27	2.61	63.88	74.00	-10.12	Peak
4874.00	49.24	2.61	51.85	54.00	-2.15	Average
7311.00	49.54	9.31	58.85	74.00	-15.15	Peak
7311.00	38.41	9.31	47.72	54.00	-6.28	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 101 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14.5		

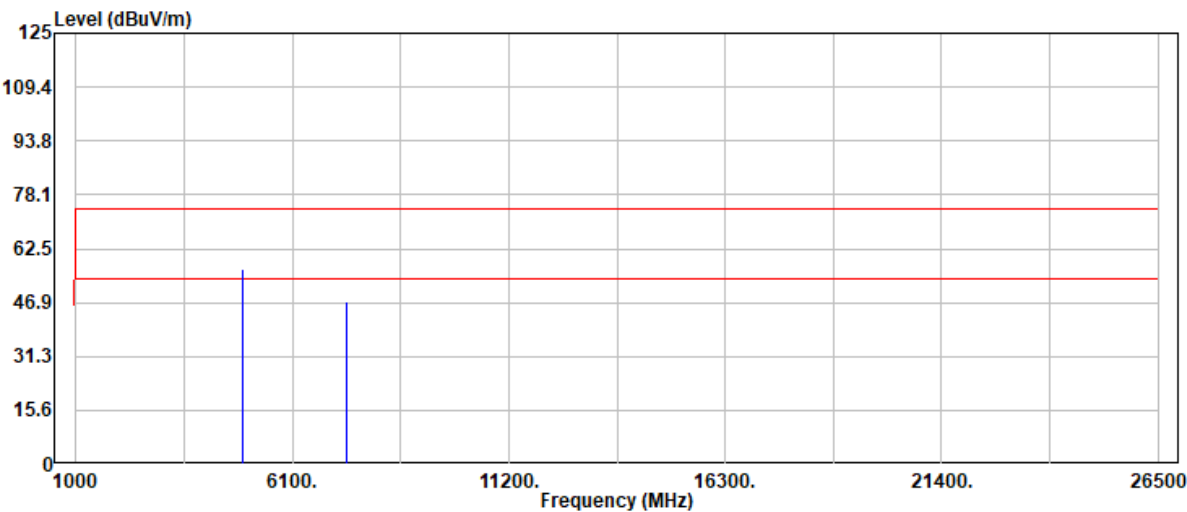


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	53.46	3.15	56.61	74.00	-17.39	Peak
4924.00	43.83	3.15	46.98	54.00	-7.02	Average
7386.00	37.85	9.53	47.38	74.00	-26.62	Peak
7386.00	31.83	9.53	41.36	54.00	-12.64	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 102 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14.5		

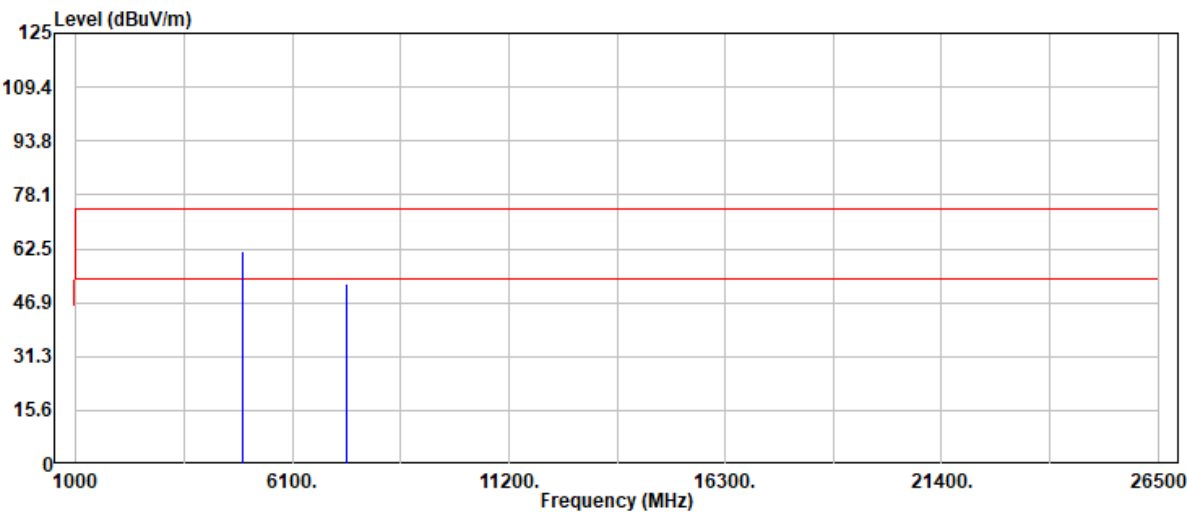


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	58.57	3.15	61.72	74.00	-12.28	Peak
4924.00	47.87	3.15	51.02	54.00	-2.98	Average
7386.00	42.64	9.53	52.17	74.00	-21.83	Peak
7386.00	32.79	9.53	42.32	54.00	-11.68	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 103 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2422 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

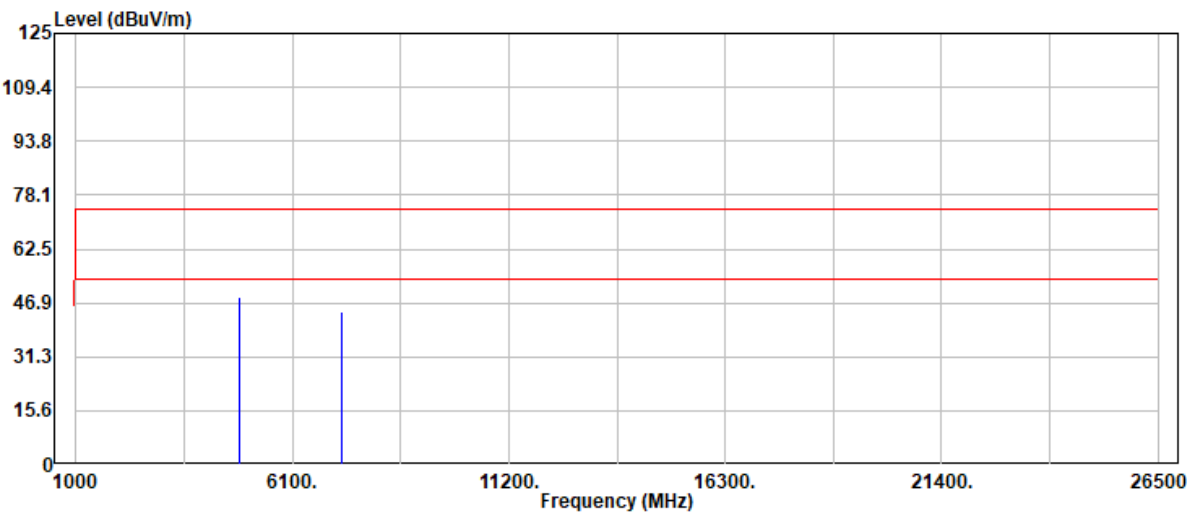


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	46.24	2.37	48.61	74.00	-25.39	Peak
4844.00	39.64	2.37	42.01	54.00	-11.99	Average
7266.00	35.17	9.22	44.39	74.00	-29.61	Peak
7266.00	28.55	9.22	37.77	54.00	-16.23	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 104 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2422 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

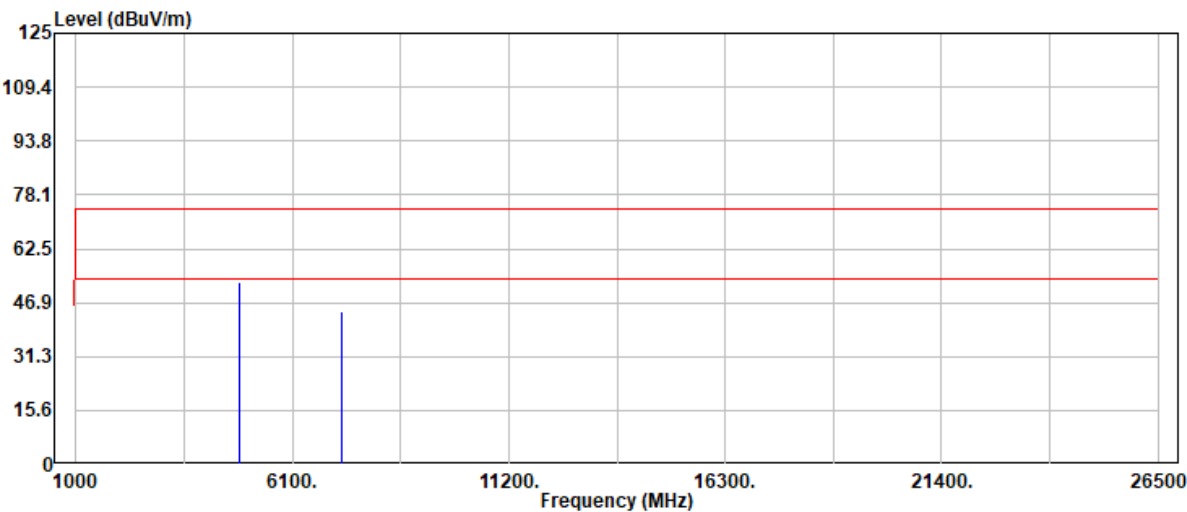


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	50.54	2.37	52.91	74.00	-21.09	Peak
4844.00	45.13	2.37	47.50	54.00	-6.50	Average
7266.00	35.15	9.22	44.37	74.00	-29.63	Peak
7266.00	27.52	9.22	36.74	54.00	-17.26	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 105 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

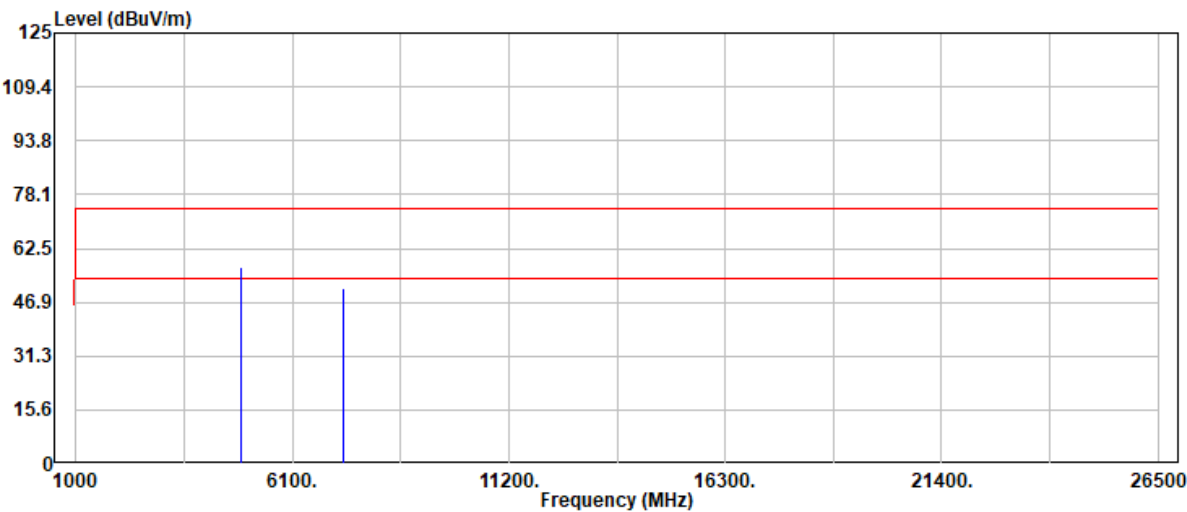


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	54.52	2.61	57.13	74.00	-16.87	Peak
4874.00	48.27	2.61	50.88	54.00	-3.12	Average
7311.00	41.77	9.31	51.08	74.00	-22.92	Peak
7311.00	33.20	9.31	42.51	54.00	-11.49	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 106 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

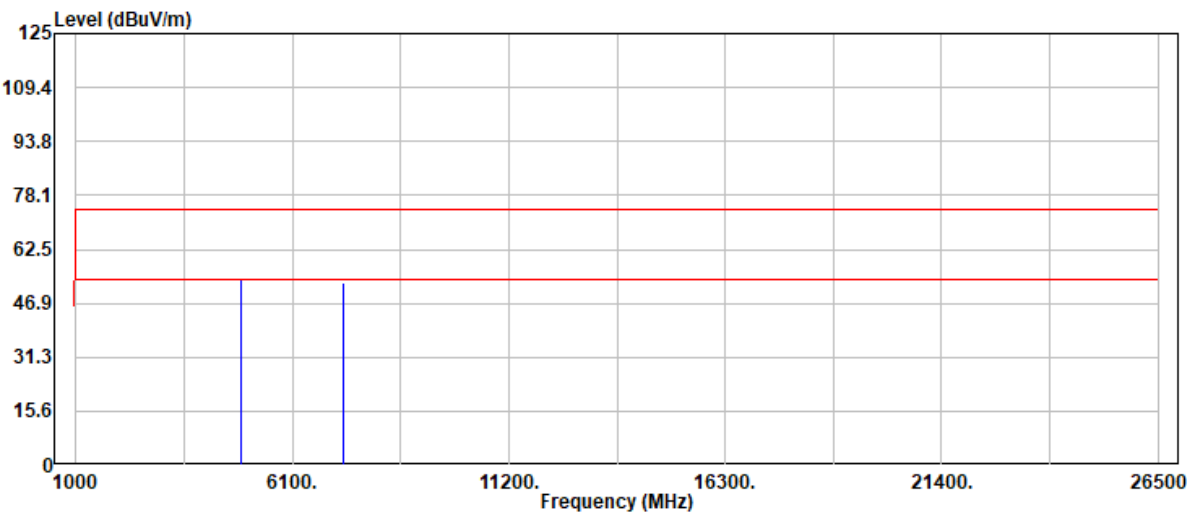


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	51.24	2.61	53.85	74.00	-20.15	Peak
4874.00	47.75	2.61	50.36	54.00	-3.64	Average
7311.00	43.43	9.31	52.74	74.00	-21.26	Peak
7311.00	34.72	9.31	44.03	54.00	-9.97	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 107 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2452 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

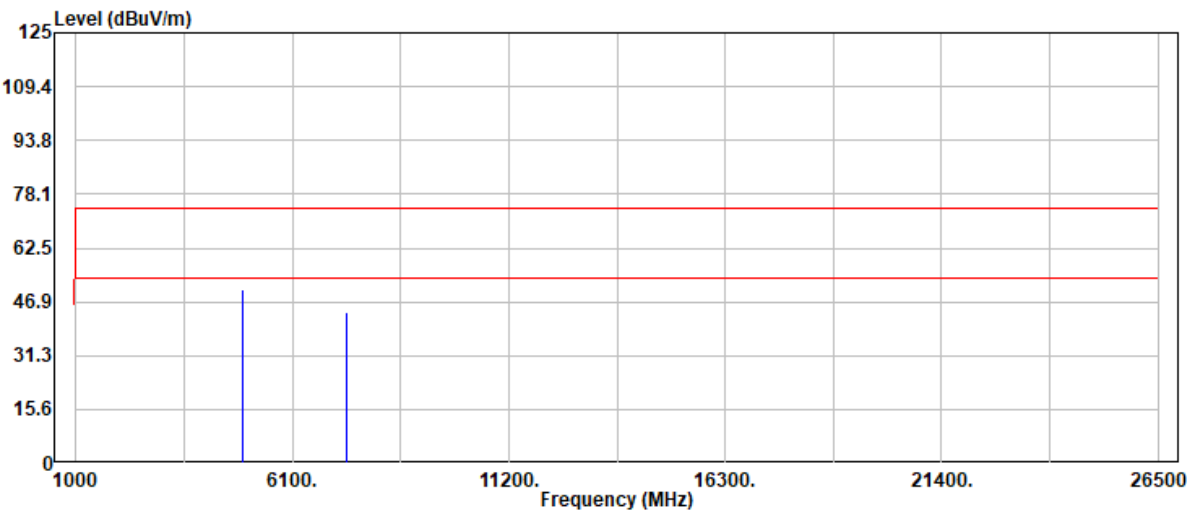


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	47.46	3.15	50.61	74.00	-23.39	Peak
4924.00	40.87	3.15	44.02	54.00	-9.98	Average
7386.00	34.25	9.53	43.78	74.00	-30.22	Peak
7386.00	27.48	9.53	37.01	54.00	-16.99	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 108 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2452 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

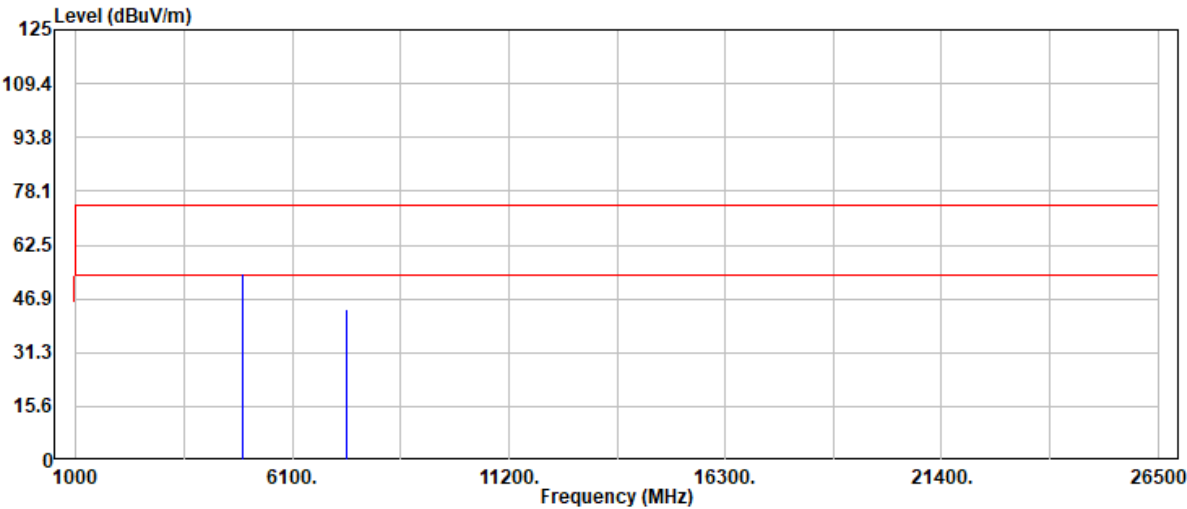

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	50.91	3.15	54.06	74.00	-19.94	Peak
4924.00	42.00	3.15	45.15	54.00	-8.85	Average
7386.00	34.13	9.53	43.66	74.00	-30.34	Peak
7386.00	26.69	9.53	36.22	54.00	-17.78	Average

- End of Test Report -