




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 46 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5240 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 13.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

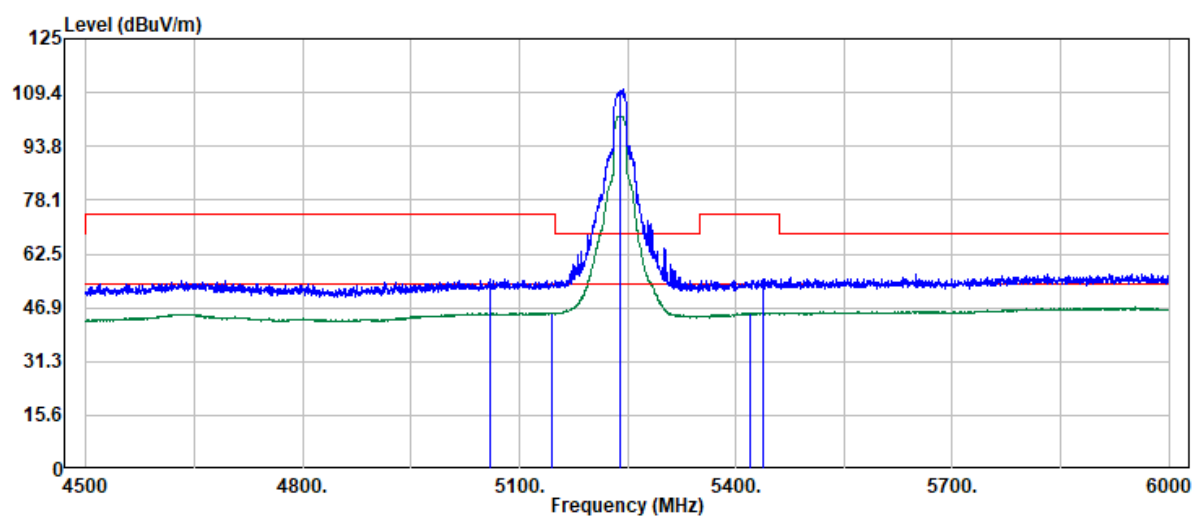

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5058.81	41.59	13.58	55.17	74.00	-18.83	Peak
5146.29	31.73	13.78	45.51	54.00	-8.49	Average
5240.00	96.25	13.91	110.16	--	--	Peak
5240.00	88.64	13.91	102.55	--	--	Average
5419.19	31.16	14.31	45.47	54.00	-8.53	Average
5437.19	40.90	14.41	55.31	74.00	-18.69	Peak




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 47 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 9.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

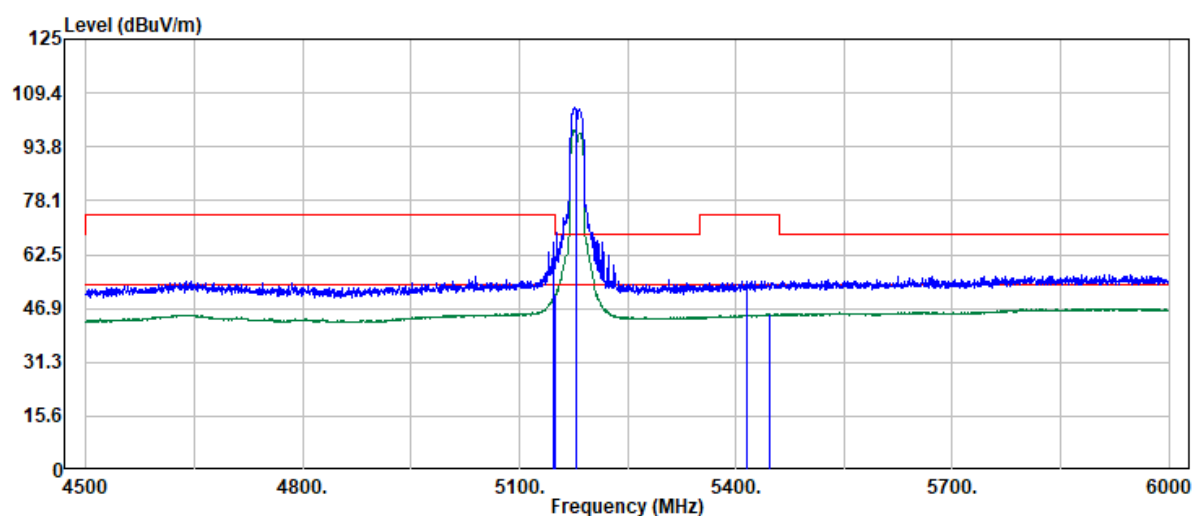

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5147.28	52.36	13.78	66.14	74.00	-7.86	Peak
5149.78	37.21	13.78	50.99	54.00	-3.01	Average
5180.00	91.18	13.93	105.11	--	--	Peak
5180.00	84.73	13.93	98.66	--	--	Average
5414.70	40.66	14.28	54.94	74.00	-19.06	Peak
5447.68	30.73	14.47	45.20	54.00	-8.80	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 48 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 9.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

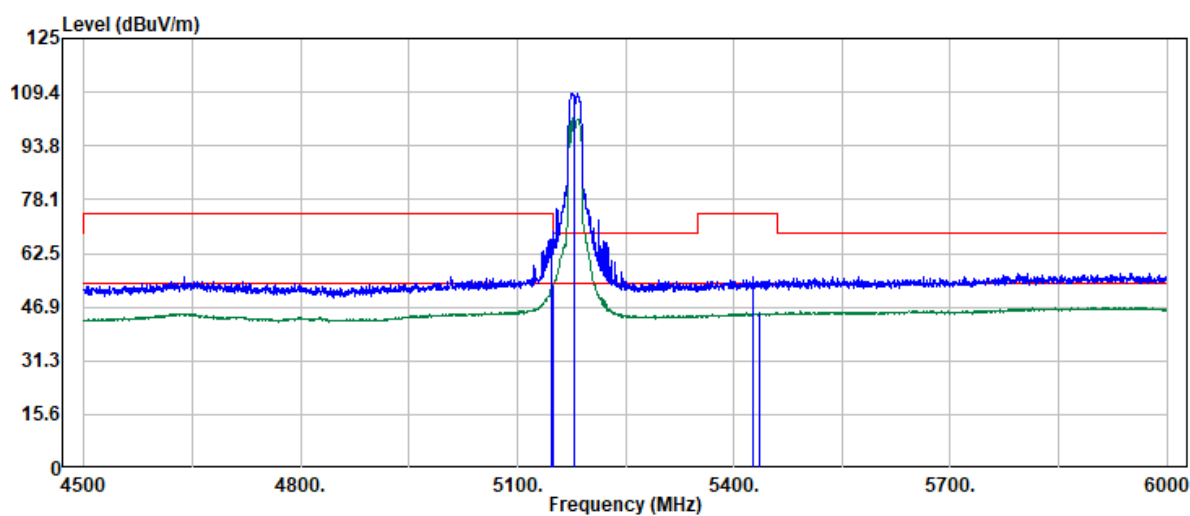

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5146.78	52.91	13.78	66.69	74.00	-7.31	Peak
5148.78	39.58	13.78	53.36	54.00	-0.64	Average
5180.00	95.13	13.93	109.06	--	--	Peak
5180.00	87.78	13.93	101.71	--	--	Average
5426.69	41.46	14.36	55.82	74.00	-18.18	Peak
5435.19	30.78	14.40	45.18	54.00	-8.82	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 49 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5200 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 15

Test Date : 2025-08-26
Temp./Humi. : 25.6/51
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

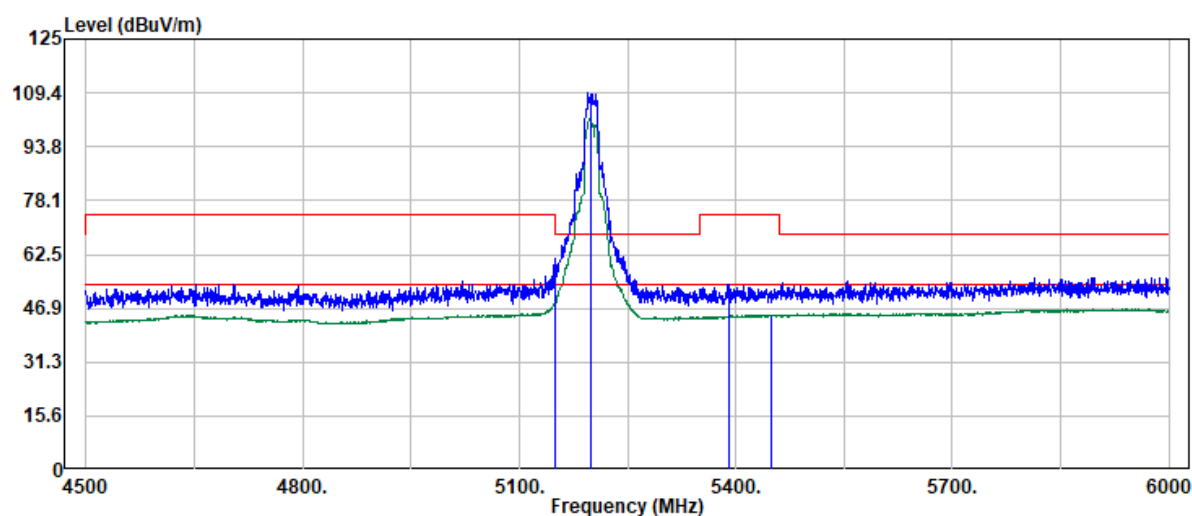

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5148.78	47.41	13.78	61.19	74.00	-12.81	Peak
5149.78	34.54	13.78	48.32	54.00	-5.68	Average
5200.00	95.28	14.01	109.29	--	--	Peak
5200.00	87.65	14.01	101.66	--	--	Average
5389.70	39.44	14.18	53.62	74.00	-20.38	Peak
5448.18	30.55	14.47	45.02	54.00	-8.98	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 50 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5200 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 15

Test Date : 2025-08-26
Temp./Humi. : 25.6/51
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

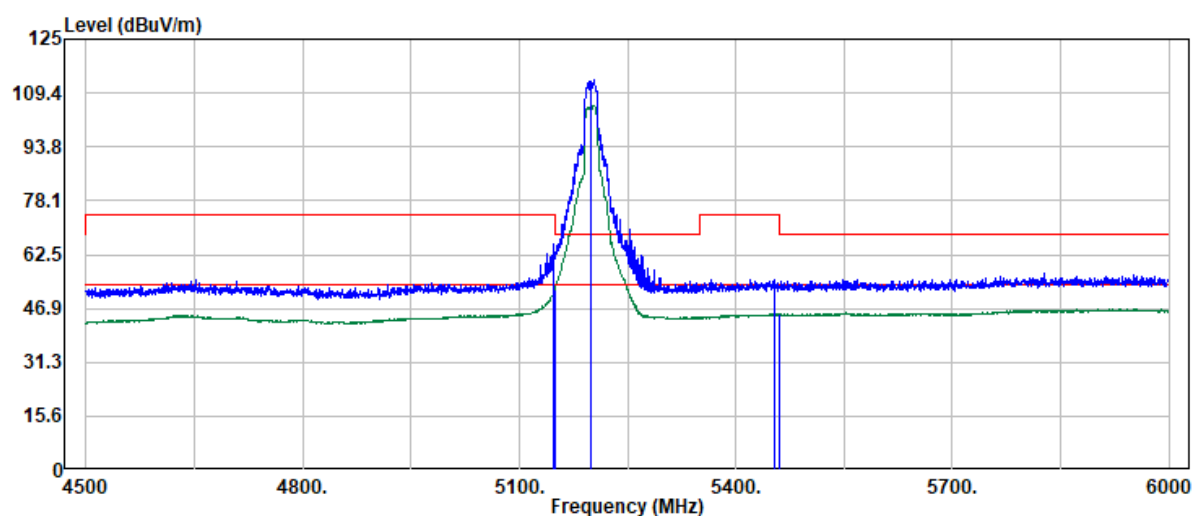

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5147.28	51.92	13.78	65.70	74.00	-8.30	Peak
5149.78	38.76	13.78	52.54	54.00	-1.46	Average
5200.00	99.03	14.01	113.04	--	--	Peak
5200.00	91.80	14.01	105.81	--	--	Average
5453.18	40.88	14.48	55.36	74.00	-18.64	Peak
5460.18	30.74	14.49	45.23	54.00	-8.77	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 51 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5240 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 12.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

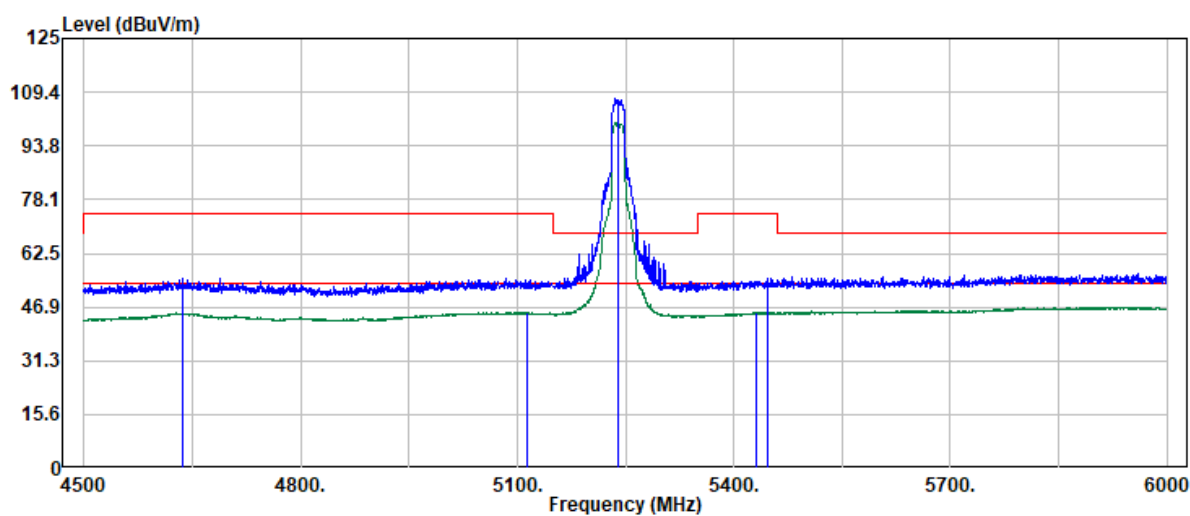

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4636.46	42.33	12.75	55.08	74.00	-18.92	Peak
5112.80	31.52	13.74	45.26	54.00	-8.74	Average
5240.00	93.58	13.91	107.49	--	--	Peak
5240.00	86.52	13.91	100.43	--	--	Average
5430.69	31.03	14.37	45.40	54.00	-8.60	Average
5447.18	40.91	14.47	55.38	74.00	-18.62	Peak




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 52 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5240 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 12.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

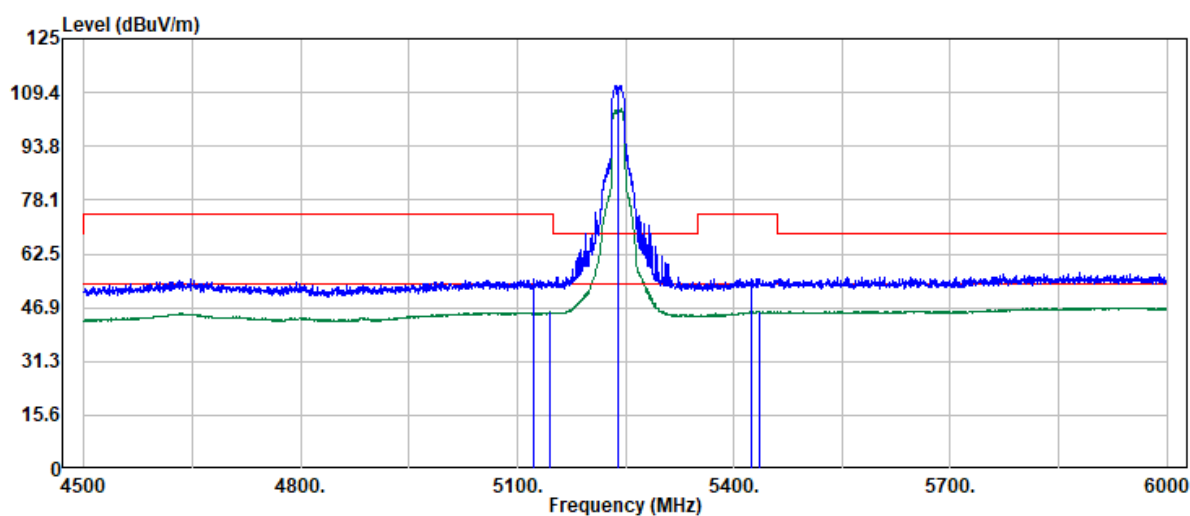

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5123.29	41.41	13.76	55.17	74.00	-18.83	Peak
5145.29	31.89	13.78	45.67	54.00	-8.33	Average
5240.00	97.52	13.91	111.43	--	--	Peak
5240.00	90.58	13.91	104.49	--	--	Average
5423.69	41.06	14.32	55.38	74.00	-18.62	Peak
5435.69	31.48	14.40	45.88	54.00	-8.12	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 53 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5190 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

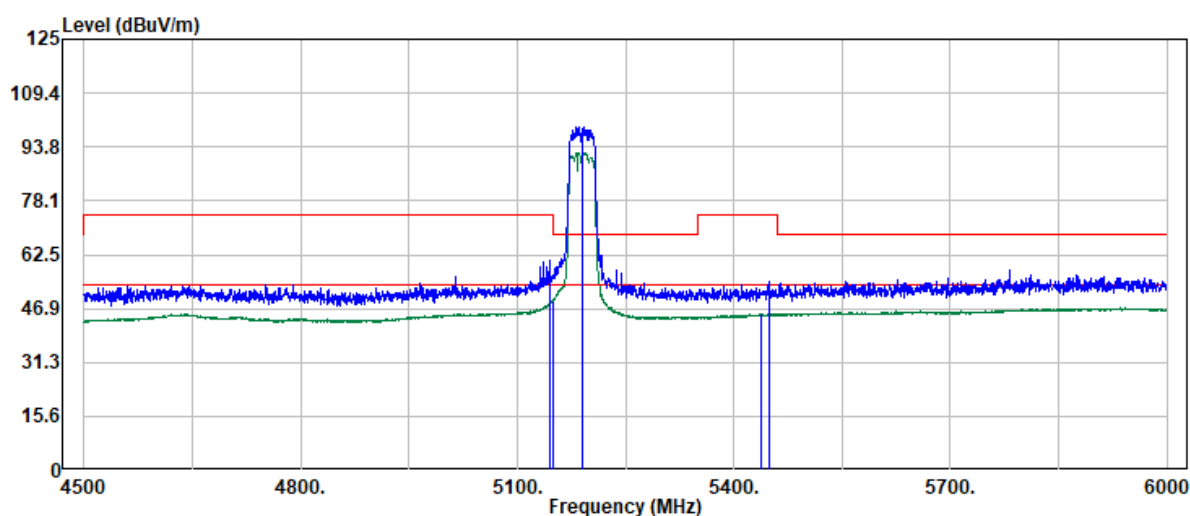

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5144.29	46.92	13.78	60.70	74.00	-13.30	Peak
5149.78	35.42	13.78	49.20	54.00	-4.80	Average
5190.00	85.71	13.97	99.68	--	--	Peak
5190.00	78.04	13.97	92.01	--	--	Average
5437.19	30.88	14.41	45.29	54.00	-8.71	Average
5448.18	40.42	14.47	54.89	74.00	-19.11	Peak




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 54 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5190 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

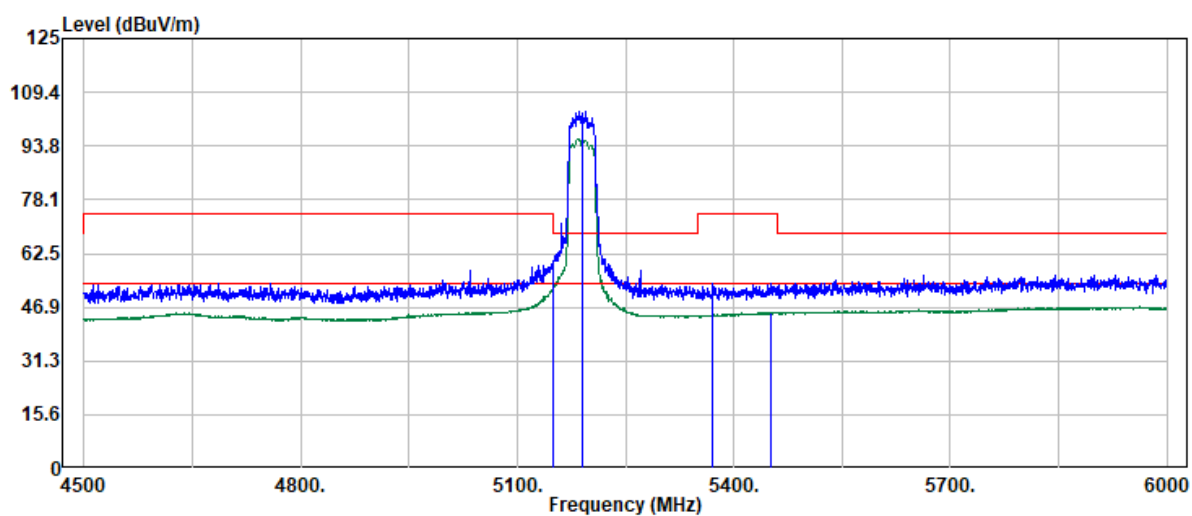

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5149.28	46.18	13.78	59.96	74.00	-14.04	Peak
5149.78	38.67	13.78	52.45	54.00	-1.55	Average
5190.00	89.85	13.97	103.82	--	--	Peak
5190.00	81.89	13.97	95.86	--	--	Average
5370.71	39.57	14.17	53.74	74.00	-20.26	Peak
5451.68	30.84	14.48	45.32	54.00	-8.68	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 55 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5230 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 11.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

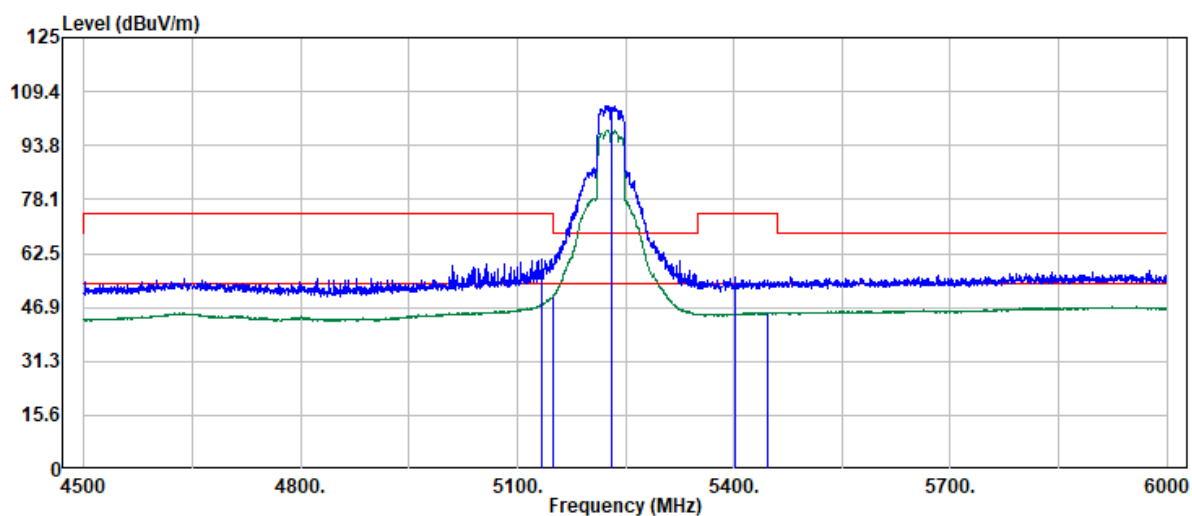

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	Level	-----	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5134.79	47.30	13.78	61.08	74.00	-12.92	Peak
5149.78	36.15	13.78	49.93	54.00	-4.07	Average
5230.00	91.32	13.93	105.25	--	--	Peak
5230.00	84.26	13.93	98.19	--	--	Average
5402.70	41.43	14.21	55.64	74.00	-18.36	Peak
5446.69	30.80	14.47	45.27	54.00	-8.73	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 56 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5230 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 11.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

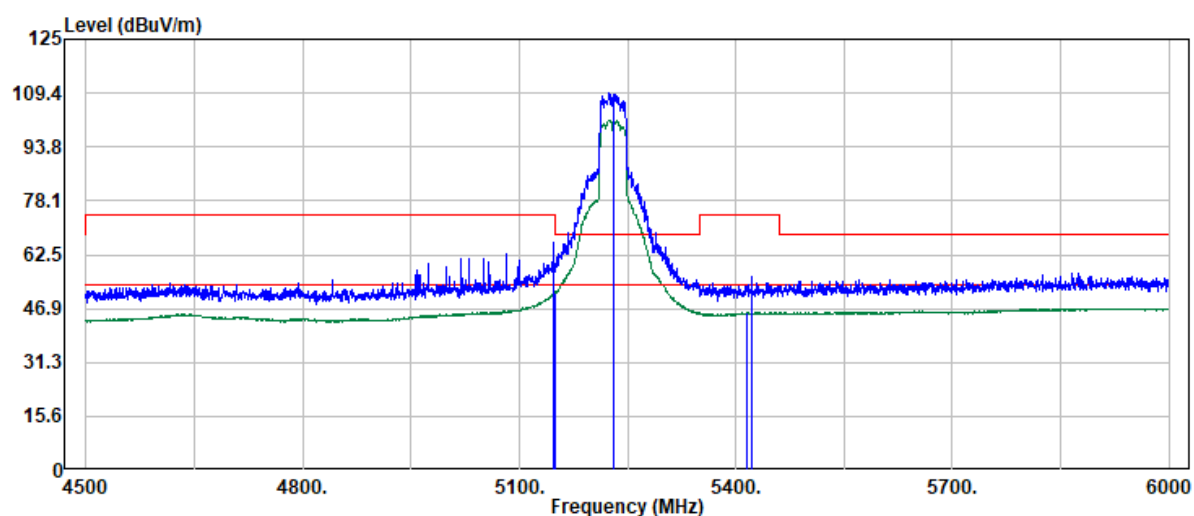

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5147.78	52.47	13.78	66.25	74.00	-7.75	Peak
5149.78	37.52	13.78	51.30	54.00	-2.70	Average
5230.00	95.53	13.93	109.46	--	--	Peak
5230.00	87.58	13.93	101.51	--	--	Average
5416.20	31.43	14.29	45.72	54.00	-8.28	Average
5422.19	41.93	14.32	56.25	74.00	-17.75	Peak




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 57 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : AC80_Band1
Frequency : 5210 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

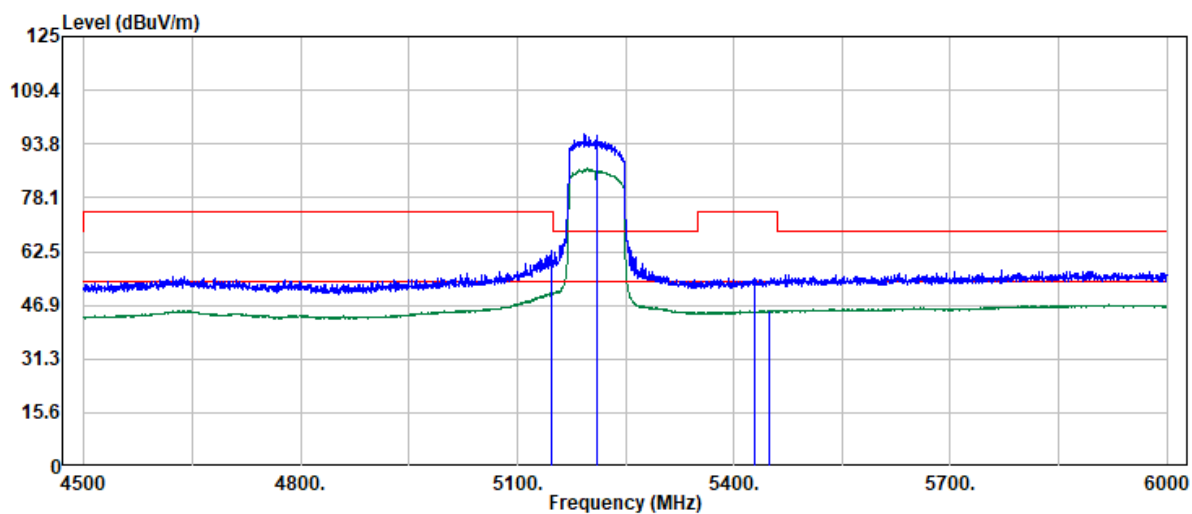

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5147.28	48.98	13.78	62.76	74.00	-11.24	Peak
5147.28	36.53	13.78	50.31	54.00	-3.69	Average
5210.00	82.48	13.99	96.47	--	--	Peak
5210.00	72.59	13.99	86.58	--	--	Average
5428.69	40.53	14.36	54.89	74.00	-19.11	Peak
5450.18	30.89	14.48	45.37	54.00	-8.63	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 58 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : AC80_Band1
Frequency : 5210 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

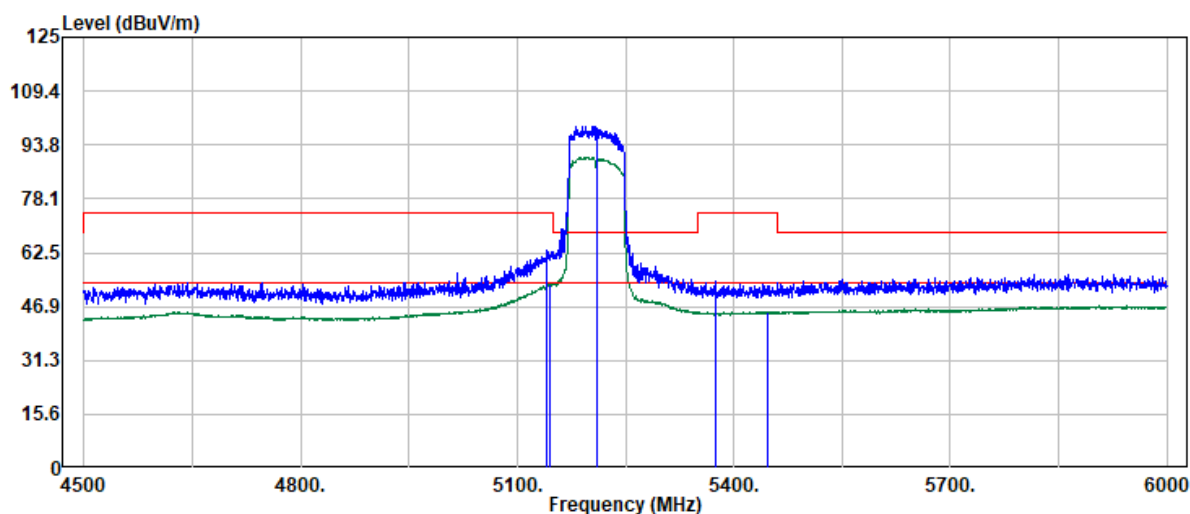

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5140.29	49.26	13.77	63.03	74.00	-10.97	Peak
5145.29	39.64	13.78	53.42	54.00	-0.58	Average
5210.00	85.27	13.99	99.26	--	--	Peak
5210.00	76.26	13.99	90.25	--	--	Average
5374.21	40.15	14.17	54.32	74.00	-19.68	Peak
5447.18	30.83	14.47	45.30	54.00	-8.70	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 59 / 78
Rev.: 01

TX Test Data

Project No : TM-2506000042P
Operation Band : AC80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

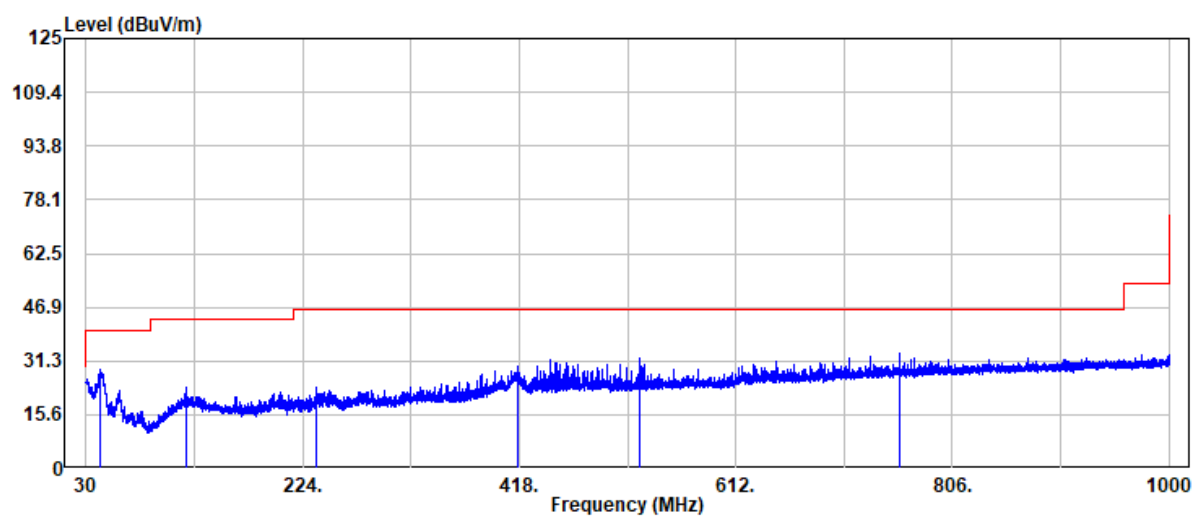

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
42.80	41.05	-12.10	28.95	40.00	-11.05	Peak
120.00	33.12	-9.67	23.45	43.50	-20.05	Peak
236.30	35.33	-11.58	23.75	46.00	-22.25	Peak
416.20	35.92	-6.30	29.62	46.00	-16.38	Peak
525.40	36.48	-4.20	32.28	46.00	-13.72	Peak
758.70	33.79	-0.23	33.56	46.00	-12.44	Peak




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 60 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : AC80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

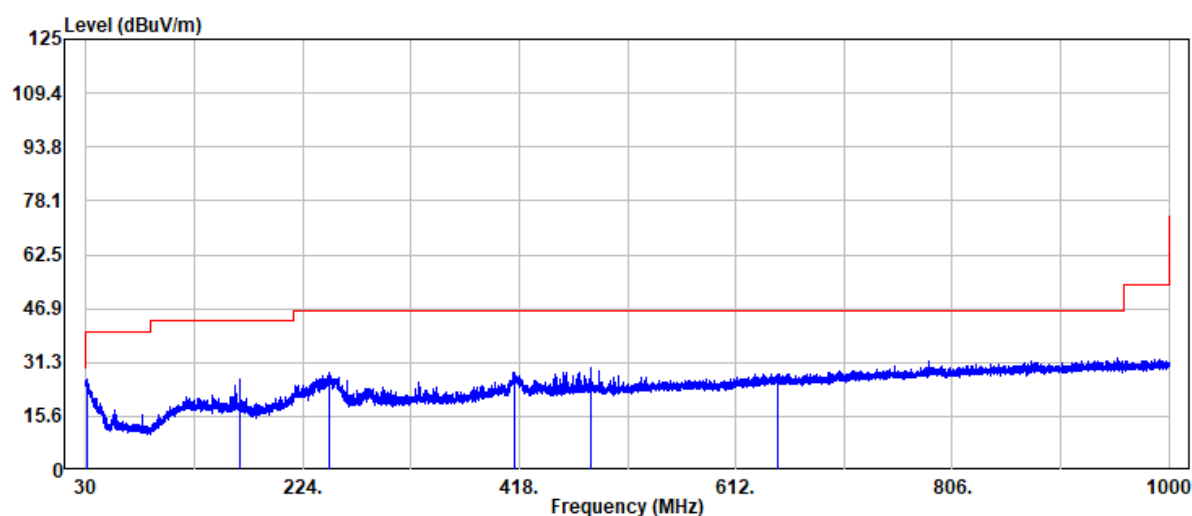

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
30.30	29.26	-2.98	26.28	40.00	-13.72	Peak
168.00	37.89	-11.51	26.38	43.50	-17.12	Peak
248.30	39.84	-11.41	28.43	46.00	-17.57	Peak
414.10	34.80	-6.35	28.45	46.00	-17.55	Peak
482.30	34.12	-4.47	29.65	46.00	-16.35	Peak
649.30	29.73	-1.67	28.06	46.00	-17.94	Peak




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 61 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 8.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

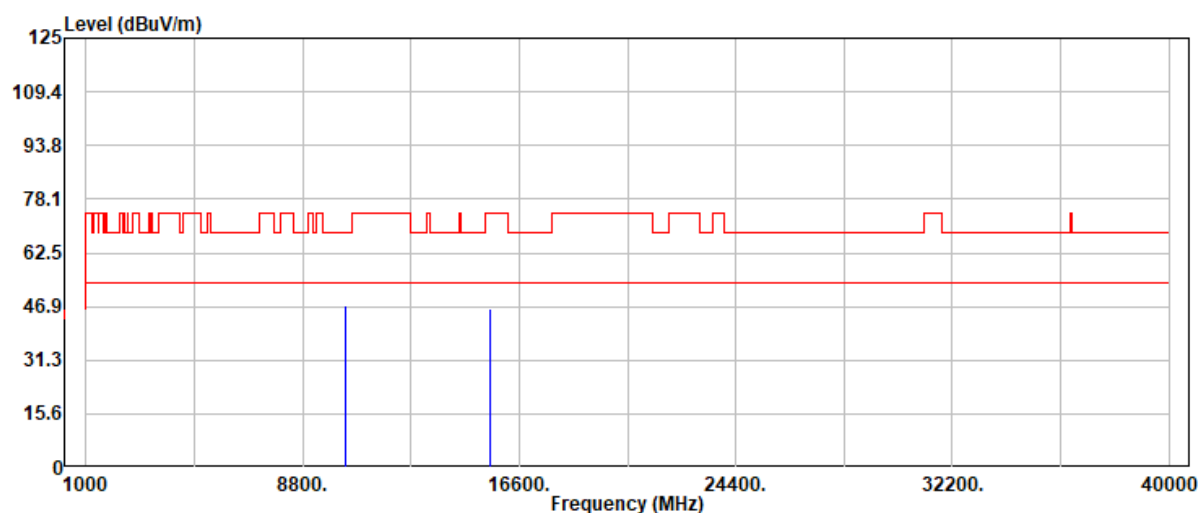

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	33.76	13.25	47.01	68.20	-21.19	Peak
15540.00	31.11	15.16	46.27	74.00	-27.73	Peak
15540.00	23.94	15.16	39.10	54.00	-14.90	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 62 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 8.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

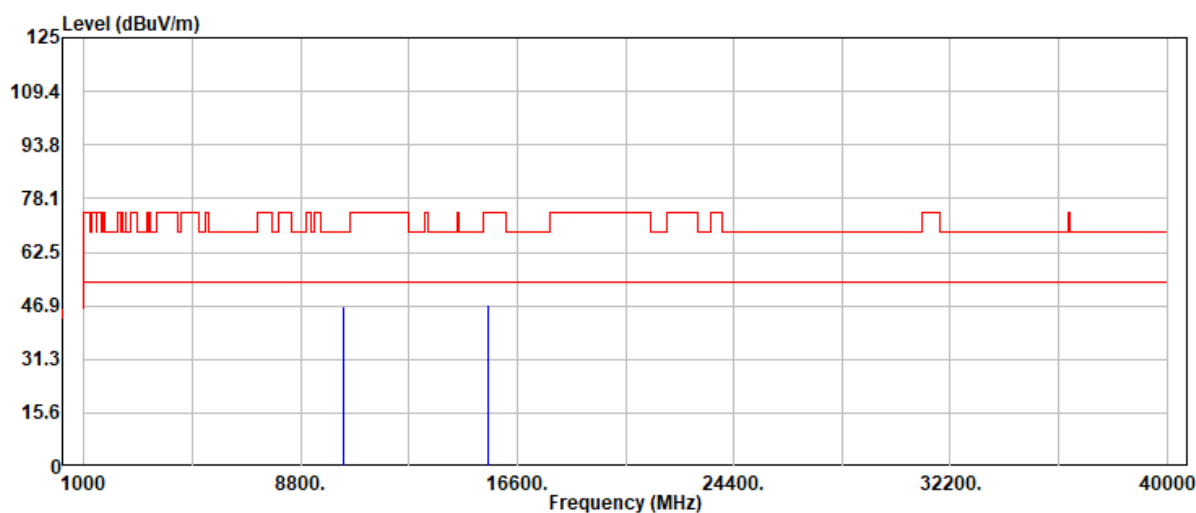

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	33.61	13.25	46.86	68.20	-21.34	Peak
15540.00	31.95	15.16	47.11	74.00	-26.89	Peak
15540.00	23.86	15.16	39.02	54.00	-14.98	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 63 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 14.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

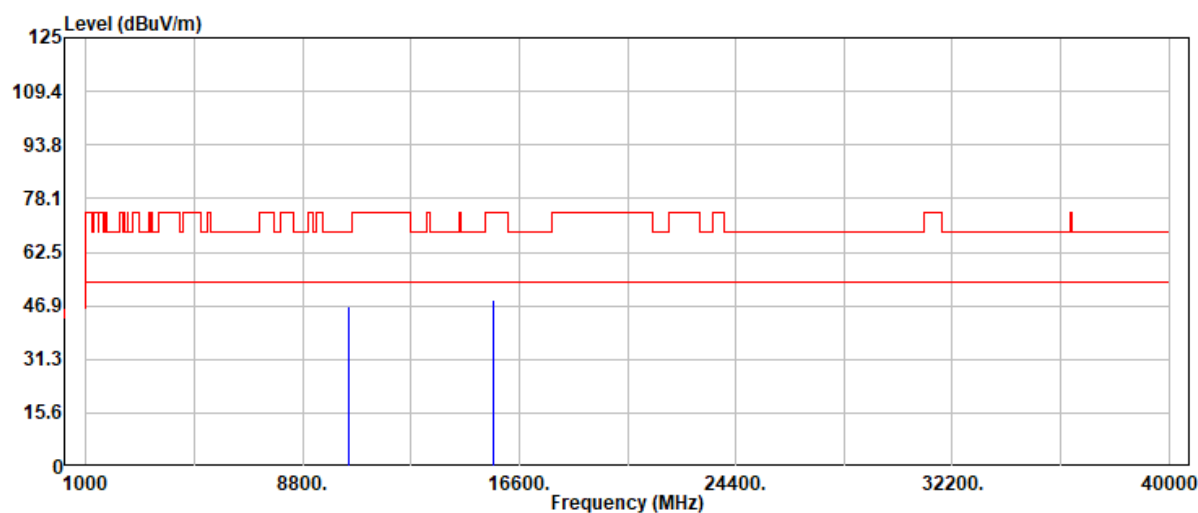

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	33.45	13.21	46.66	68.20	-21.54	Peak
15660.00	32.67	15.72	48.39	74.00	-25.61	Peak
15660.00	25.07	15.72	40.79	54.00	-13.21	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 64 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 14.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

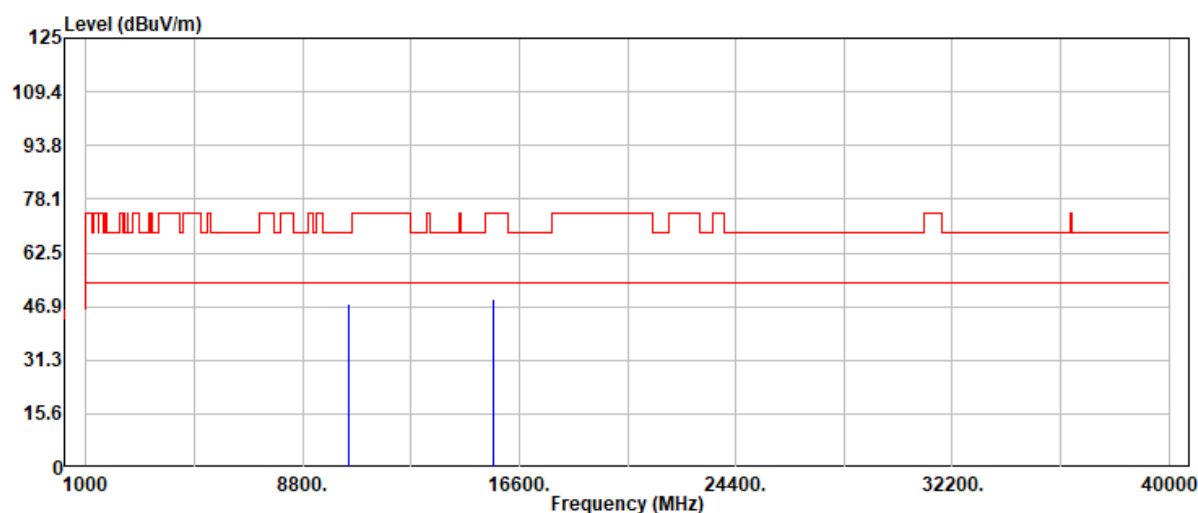

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.30	13.21	47.51	68.20	-20.69	Peak
15660.00	33.35	15.72	49.07	74.00	-24.93	Peak
15660.00	25.11	15.72	40.83	54.00	-13.17	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 65 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 13.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

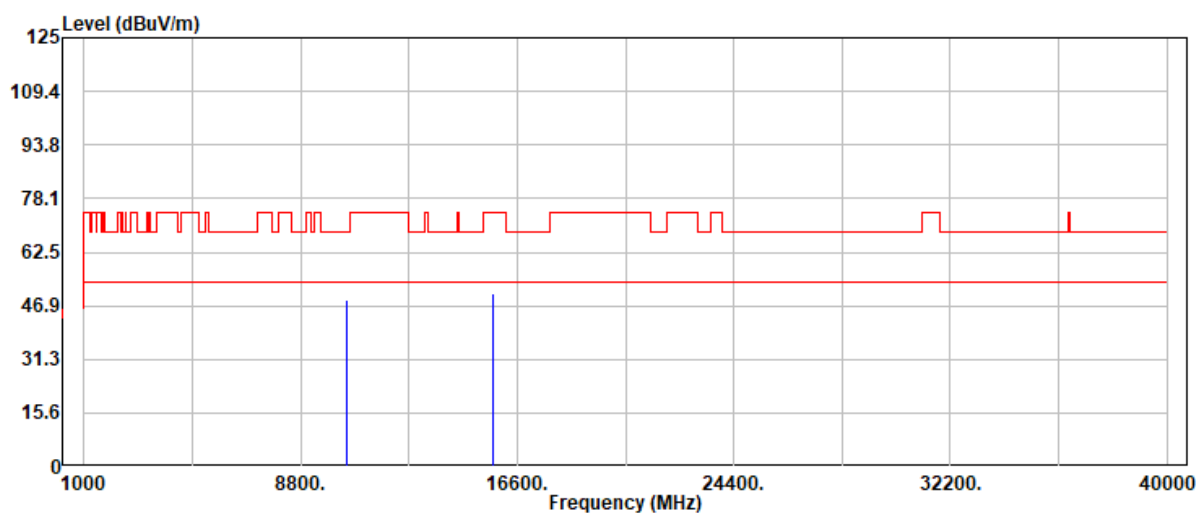

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	35.61	13.15	48.76	68.20	-19.44	Peak
15720.00	34.03	16.32	50.35	74.00	-23.65	Peak
15720.00	25.76	16.32	42.08	54.00	-11.92	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 66 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : A_CH0_Band1
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 13.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

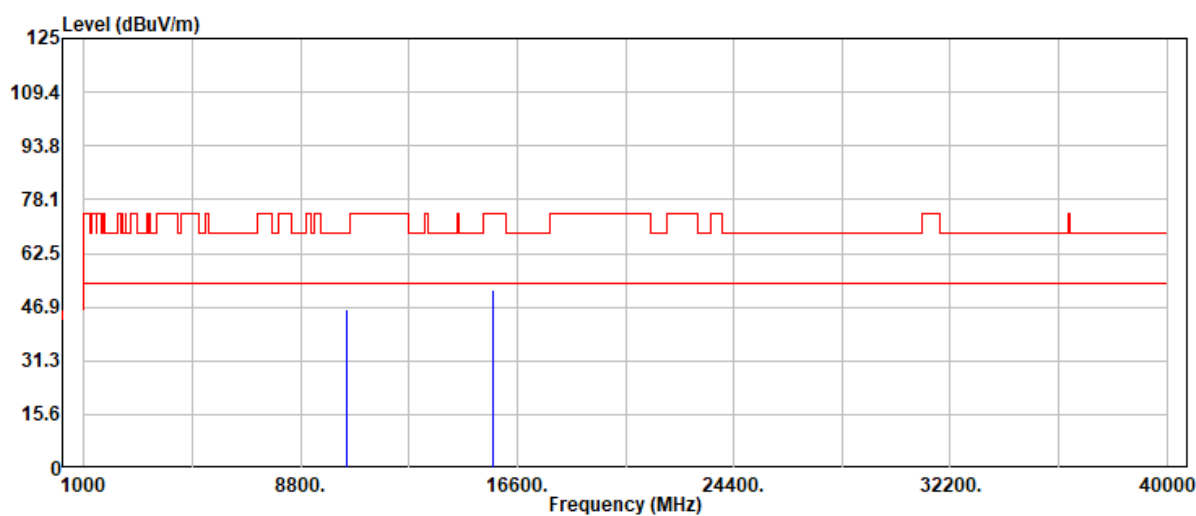

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	32.88	13.15	46.03	68.20	-22.17	Peak
15720.00	35.40	16.32	51.72	74.00	-22.28	Peak
15720.00	25.63	16.32	41.95	54.00	-12.05	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 67 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 9.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

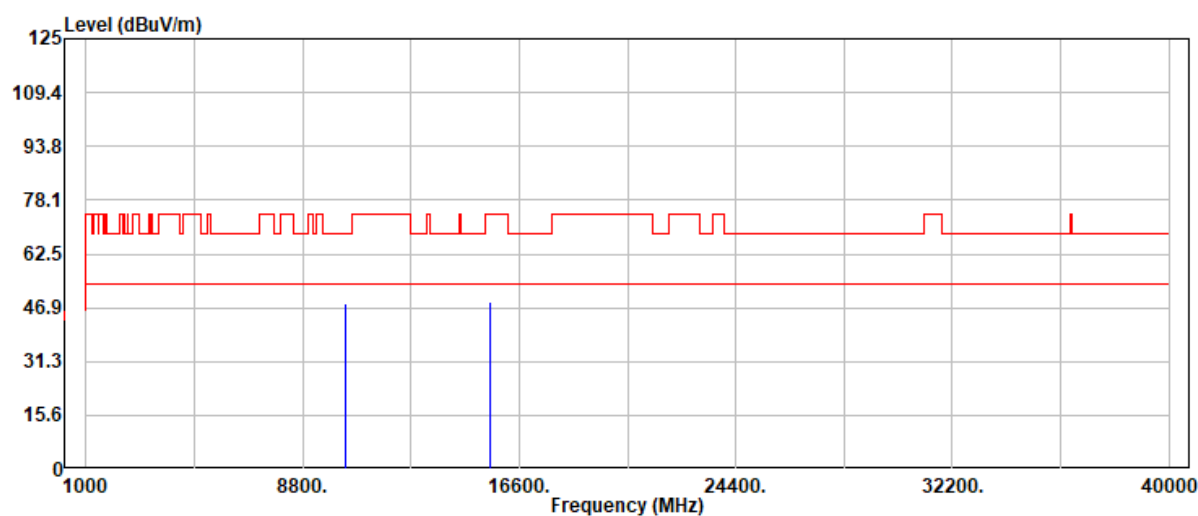

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.06	13.25	48.31	68.20	-19.89	Peak
15540.00	33.62	15.16	48.78	74.00	-25.22	Peak
15540.00	23.89	15.16	39.05	54.00	-14.95	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 68 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 9.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

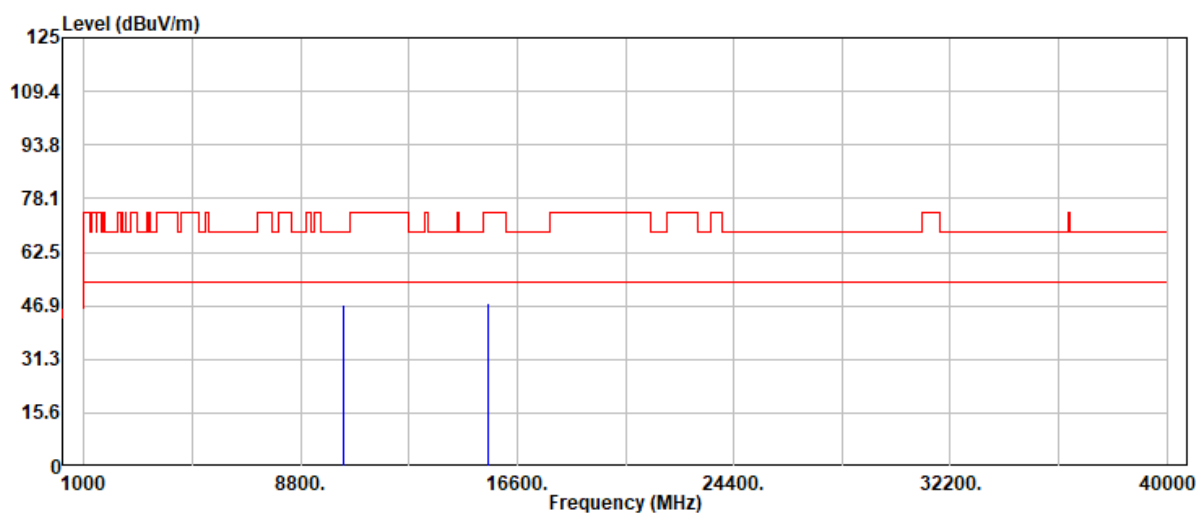

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	33.80	13.25	47.05	68.20	-21.15	Peak
15540.00	32.59	15.16	47.75	74.00	-26.25	Peak
15540.00	23.87	15.16	39.03	54.00	-14.97	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 69 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 17

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

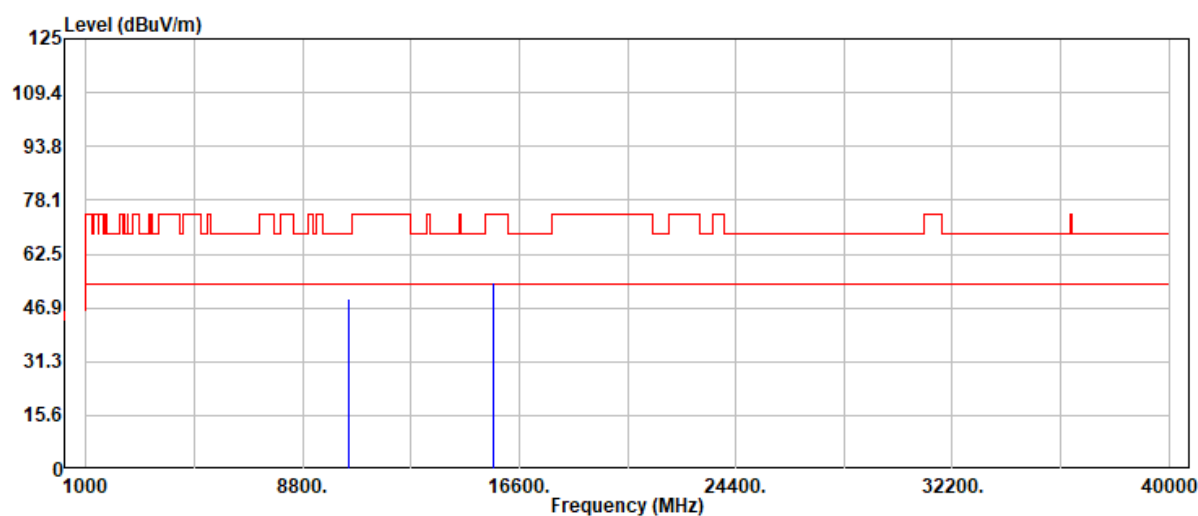

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	36.48	13.21	49.69	68.20	-18.51	Peak
15660.00	38.57	15.72	54.29	74.00	-19.71	Peak
15660.00	29.61	15.72	45.33	54.00	-8.67	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 70 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 17

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

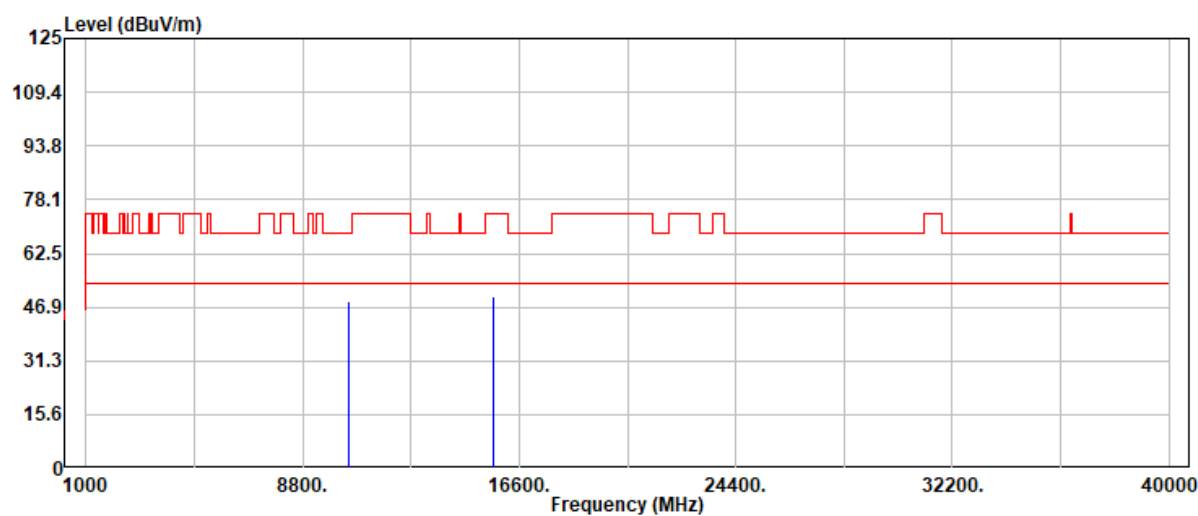

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	35.20	13.21	48.41	68.20	-19.79	Peak
15660.00	34.32	15.72	50.04	74.00	-23.96	Peak
15660.00	28.06	15.72	43.78	54.00	-10.22	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 71 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 12.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

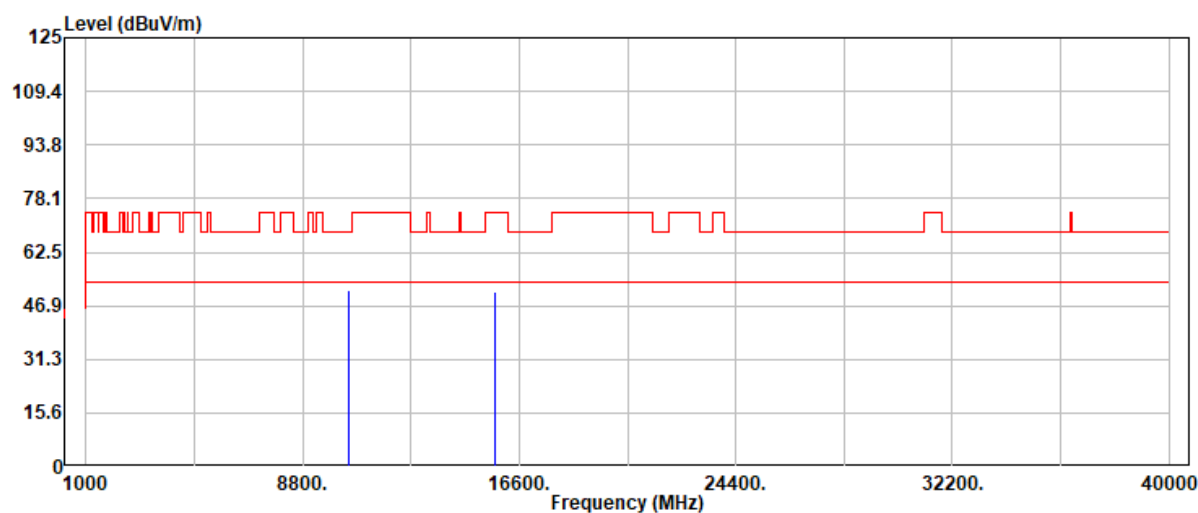

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	38.39	13.15	51.54	68.20	-16.66	Peak
15720.00	34.43	16.32	50.75	74.00	-23.25	Peak
15720.00	26.55	16.32	42.87	54.00	-11.13	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 72 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N20_Band1
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 12.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

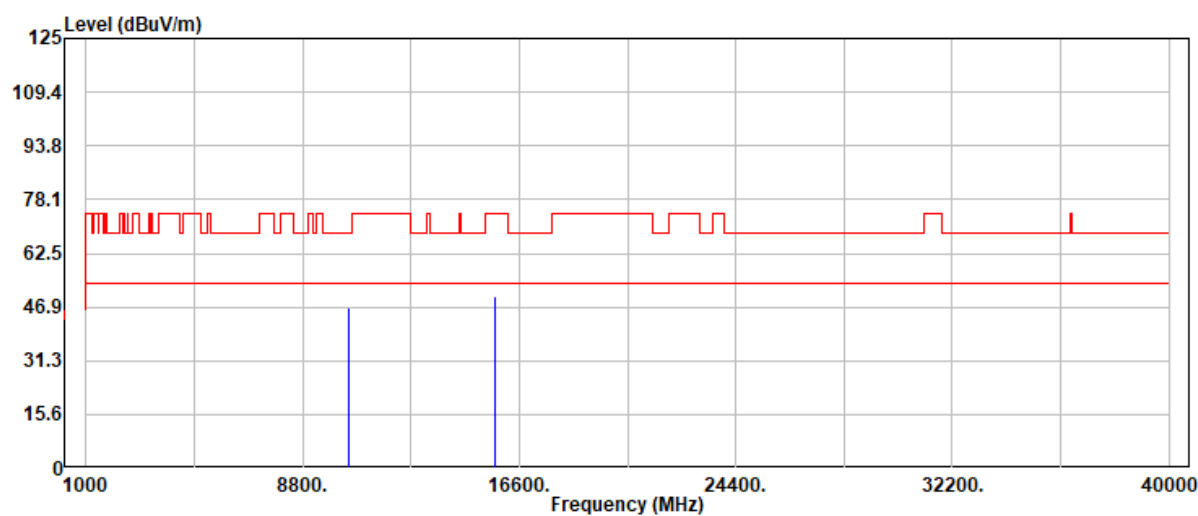

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	33.63	13.15	46.78	68.20	-21.42	Peak
15720.00	33.84	16.32	50.16	74.00	-23.84	Peak
15720.00	26.39	16.32	42.71	54.00	-11.29	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 73 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

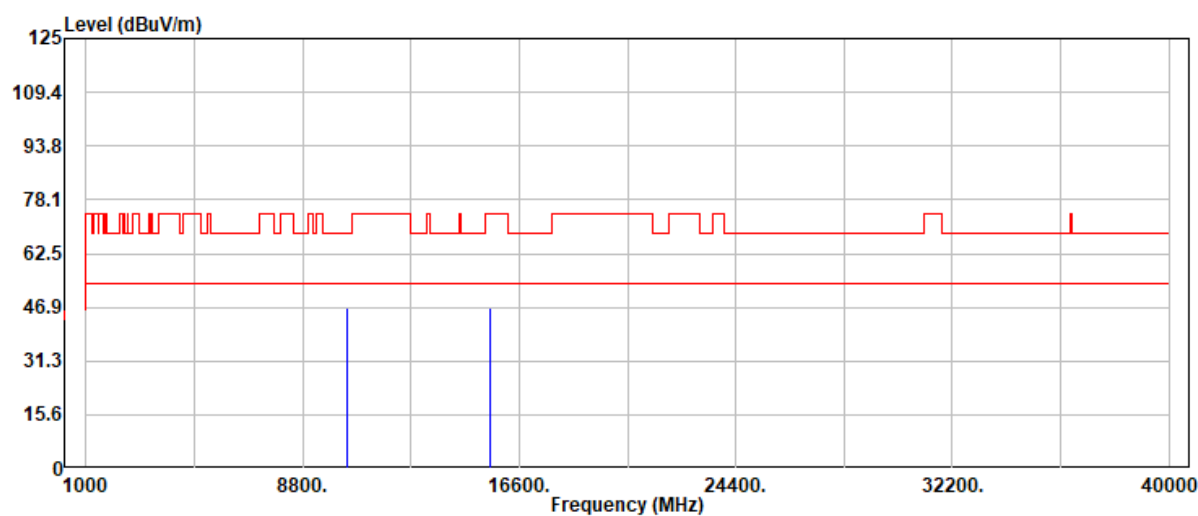

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	33.60	13.22	46.82	68.20	-21.38	Peak
15570.00	31.54	15.20	46.74	74.00	-27.26	Peak
15570.00	23.72	15.20	38.92	54.00	-15.08	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 74 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

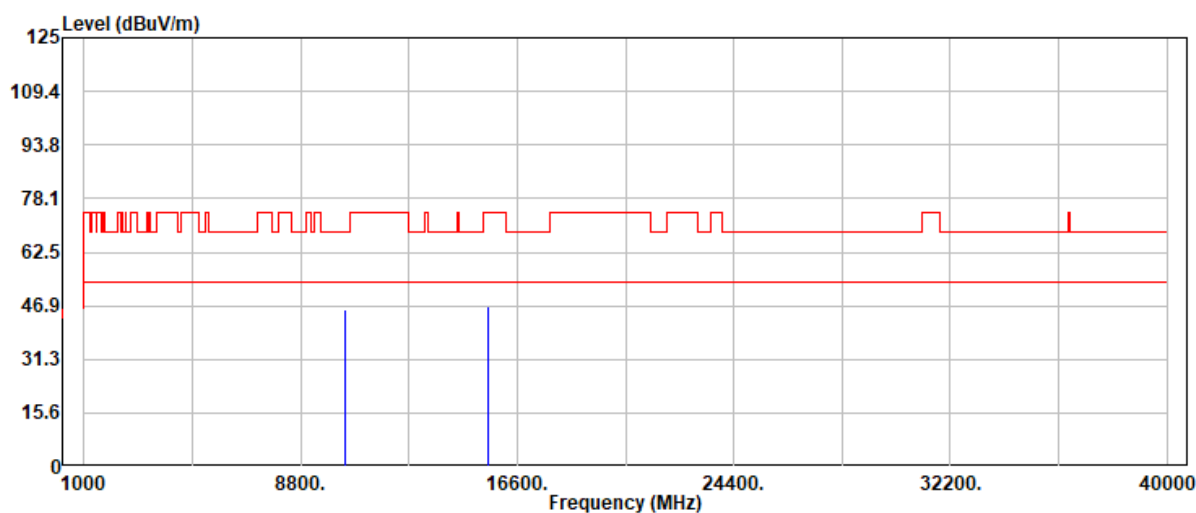

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	32.71	13.22	45.93	68.20	-22.27	Peak
15570.00	31.70	15.20	46.90	74.00	-27.10	Peak
15570.00	23.47	15.20	38.67	54.00	-15.33	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 75 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 11.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

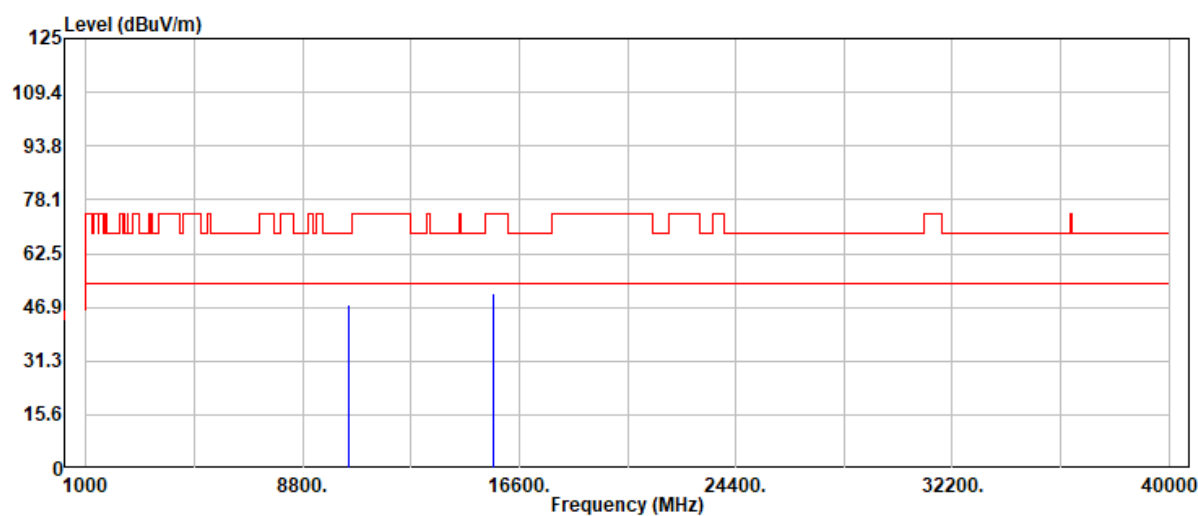

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	34.28	13.20	47.48	68.20	-20.72	Peak
15690.00	34.75	16.07	50.82	74.00	-23.18	Peak
15690.00	24.74	16.07	40.81	54.00	-13.19	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 76 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : N40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 11.5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

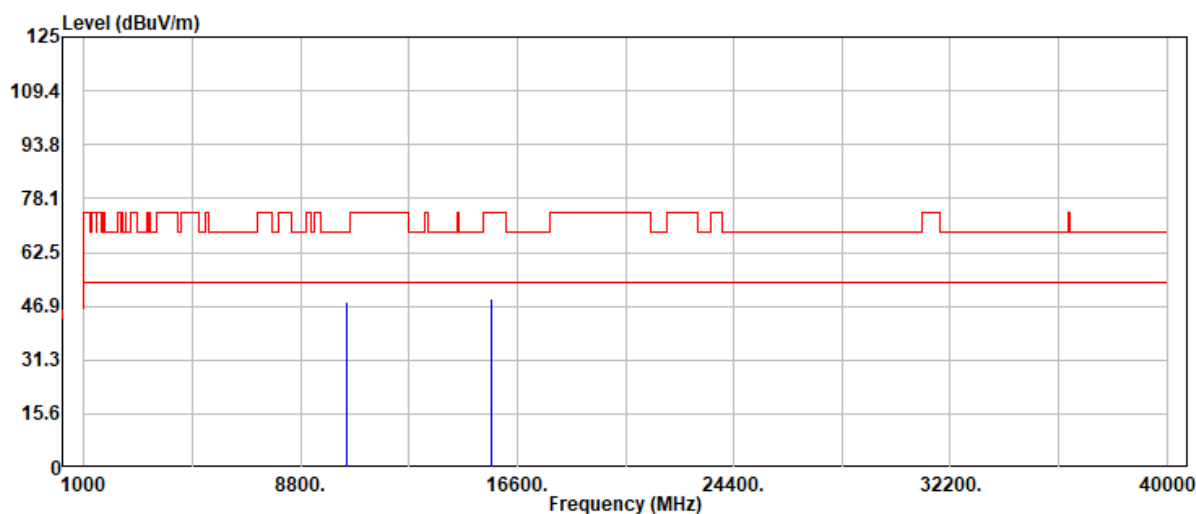

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	34.70	13.20	47.90	68.20	-20.30	Peak
15690.00	32.80	16.07	48.87	74.00	-25.13	Peak
15690.00	24.84	16.07	40.91	54.00	-13.09	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 77 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : AC80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

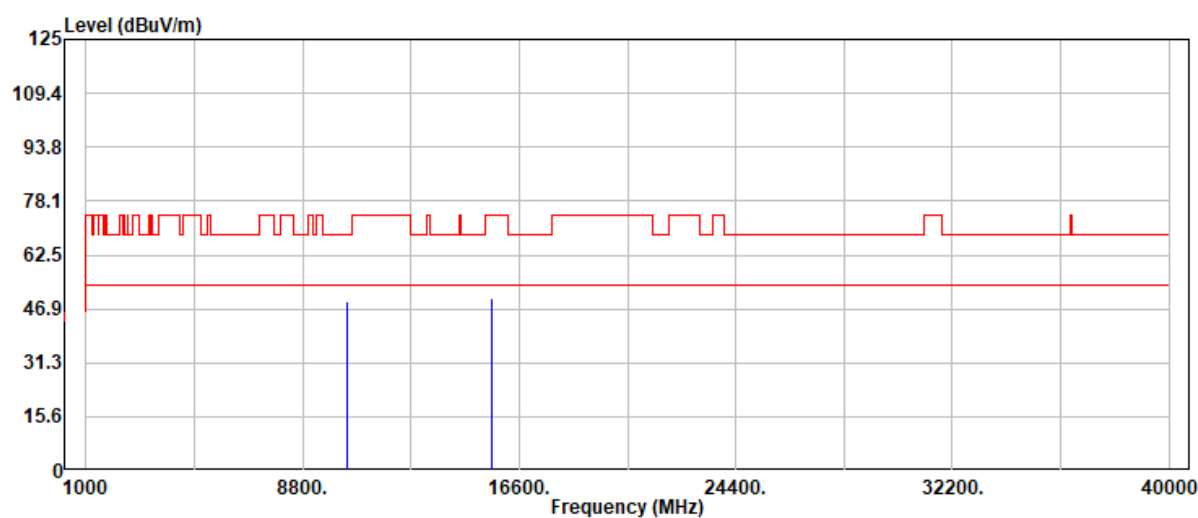

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	36.01	13.20	49.21	68.20	-18.99	Peak
15630.00	34.28	15.48	49.76	74.00	-24.24	Peak
15630.00	24.24	15.48	39.72	54.00	-14.28	Average




Project No.: TM-2506000042P
Report No.: TMWK2506002193KR

Page: 78 / 78
Rev.: 01

Project No : TM-2506000042P
Operation Band : AC80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 5

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

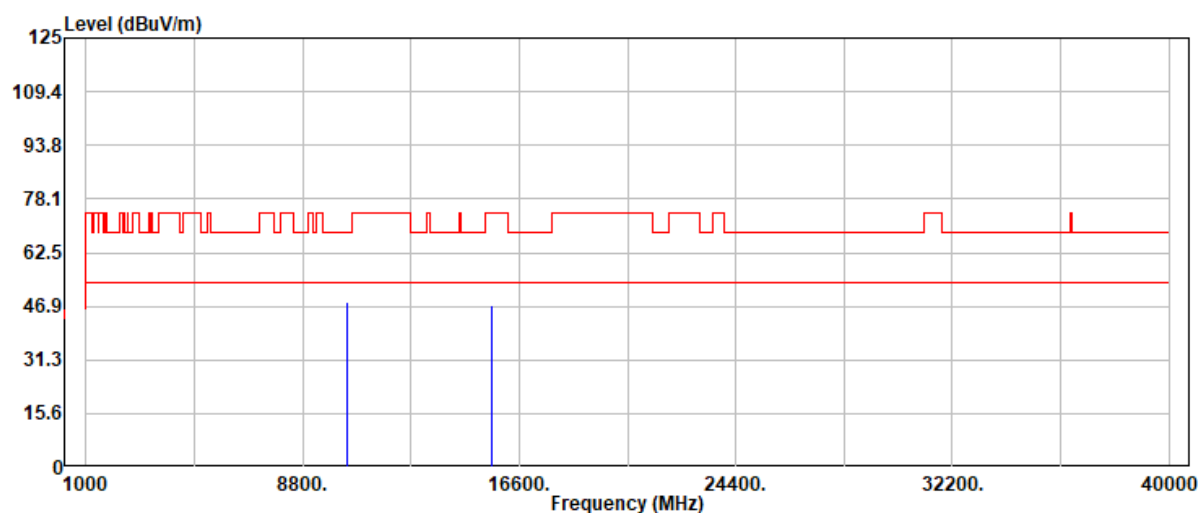

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	34.86	13.20	48.06	68.20	-20.14	Peak
15630.00	31.86	15.48	47.34	74.00	-26.66	Peak
15630.00	24.11	15.48	39.59	54.00	-14.41	Average

--End of Test Report--