



SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V06

Report Template Revision Date: 2026-01-30

TEST REPORT

Report No.: CQASZ20260300616E-02
Applicant: Shenzhen Interthings Technology Co., Ltd.
Address of Applicant: 701, Building 1, Lechuanghui Building, No. 1211 Guanguang Road, Longhua District, Shenzhen, China
Equipment Under Test (EUT):
Product: Smart solar outdoor camera
Model No.: IPC271, HUVIPC497
Test Model No.: IPC271
Brand Name: N/A
FCC ID: 2AQ7B-IPC271
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2020
Date of Receipt: 2026-05-09
Date of Test: 2026-05-09 to 2026-05-19
Date of Issue: 2026-6-26
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20260300616E-02	Rev.01	Initial report	2026-6-26

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	5
.....	6
4 GENERAL INFORMATION	7
4.1 CLIENT INFORMATION	7
4.2 GENERAL DESCRIPTION OF EUT	7
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
4.4 TEST ENVIRONMENT AND MODE	10
4.5 DESCRIPTION OF SUPPORT UNITS	14
4.6 TEST LOCATION	14
4.7 TEST FACILITY	14
4.8 TEST CONFIGURATION	14
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	15
4.10 DEVIATION FROM STANDARDS	15
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	15
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER	15
4.13 EQUIPMENT LIST	16
5 TEST RESULTS AND MEASUREMENT DATA	17
5.1 ANTENNA REQUIREMENT	17
5.2 CONDUCTED EMISSIONS	18
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	22
Test Result	23
Note: Duty cycle correction factor details please see section 4.4.	23
When Duty cycle >98%, D.C.F is not required.	23
Test Graphs	24
5.4 99% OCCUPIED BANDWIDTH	29
Test Result	30
Test Graphs	31
5.5 6dB OCCUPIED BANDWIDTH	36
Test Result	37
5.6 POWER SPECTRAL DENSITY	43
Test Result	44
Test Graphs	45
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	55
Test Result	56
5.8 RF CONDUCTED SPURIOUS EMISSIONS	61
Test Result	62
Test Graphs	64
5.9 RADIATED SPURIOUS EMISSIONS	79
5.9.1 Radiated emission below 1GHz	82
5.9.2 Transmitter emission above 1GHz	84
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	92
6 PHOTOGRAPHS - EUT TEST SETUP	98
6.1 RADIATED SPURIOUS EMISSION	98
6.2 CONDUCTED EMISSION	99
6.3 RF CONDUCTED MEASUREMENT	100

7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	101
--	-----

4 General Information

4.1 Client Information

Applicant:	Shenzhen Interthings Technology Co., Ltd.
Address of Applicant:	701, Building 1, Lechuanghui Building, No. 1211 Guanguang Road, Longhua District, Shenzhen, China
Manufacturer:	Shenzhen Interthings Technology Co., Ltd.
Address of Manufacturer:	701, Building 1, Lechuanghui Building, No. 1211 Guanguang Road, Longhua District, Shenzhen, China
Factory:	Shenzhen Interthings Technology Co., Ltd.
Address of Factory:	701, Building 1, Lechuanghui Building, No. 1211 Guanguang Road, Longhua District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Smart solar outdoor camera
Model No.:	IPC271, HUVIPC497
Test Model No.:	IPC271
Trade Mark:	N/A
Software Version:	V1.0
Hardware Version:	V1.0
Power Supply:	Li-ion battery DC 3.7V 4000mAh, Charge by DC 5V for adapter
EUT Supports Radios application:	BT: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) :

	13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location
Test Software of EUT:	SecureCRT
Antenna Type:	FPC Antenna
Antenna Gain:	1.67dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel		Frequency		Channel		Frequency	
3		2422MHz		6		2437MHz	
4		2427MHz		7		2442MHz	
5		2432MHz		8		2447MHz	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):


Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class0
Run Software:	

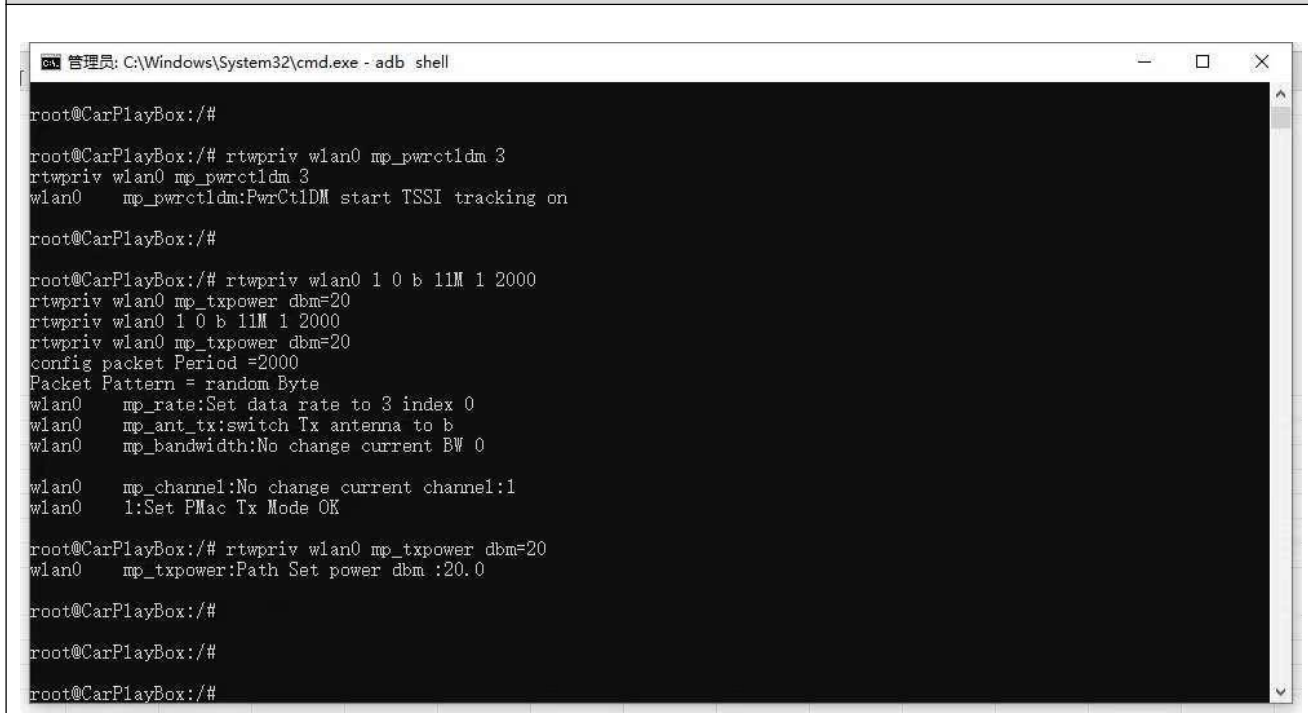

```

管理员: C:\Windows\System32\cmd.exe - adb shell

root@CarPlayBox:/#
root@CarPlayBox:/# rtwpriv wlan0 mp_pwrctlm 3
rtwpriv wlan0 mp_pwrctlm 3
wlan0 mp_pwrctlm:PwrCtlDM start TSSI tracking on

root@CarPlayBox:/#
root@CarPlayBox:/# rtwpriv wlan0 1 0 b 11M 1 2000
rtwpriv wlan0 mp_txpower dbm=20
rtwpriv wlan0 1 0 b 11M 1 2000
rtwpriv wlan0 mp_txpower dbm=20
config packet Period =2000
Packet Pattern = random Byte
wlan0 mp_rate:Set data rate to 3 index 0
wlan0 mp_ant_tx:switch Tx antenna to b
wlan0 mp_bandwidth:No change current BW 0

wlan0 mp_channel:No change current channel:1
wlan0 1:Set PMac Tx Mode OK

root@CarPlayBox:/# rtwpriv wlan0 mp_txpower dbm=20
wlan0 mp_txpower:Path Set power dbm :20.0

root@CarPlayBox:/#
root@CarPlayBox:/#
root@CarPlayBox:/#


```

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	0.99	1.00	99.00	0.04
IEEE802.11g	0.69	0.70	98.57	0.06
IEEE802.11n (HT20)	0.65	0.66	98.48	0.07
IEEE802.11n (HT40)	0.34	0.35	97.14	0.12

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_IEEE802.11b Duty Cycle:

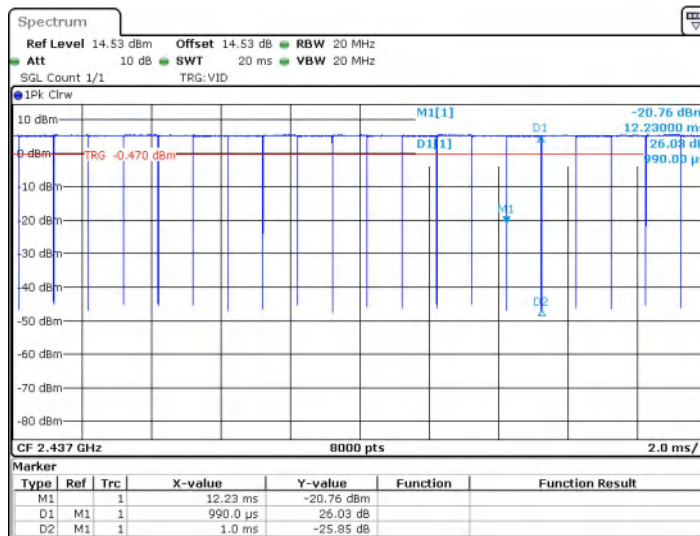


Date: 18.MAY.2026 21:59:12

Test Graph_IEEE802.11g Duty Cycle:

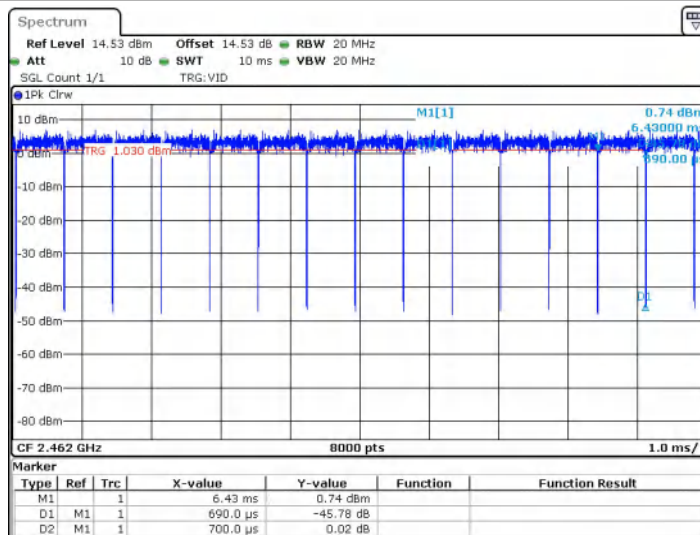


Date: 18.MAY.2026 22:08:51

Test Graph_IEEE802.11 n (HT20) Duty Cycle:

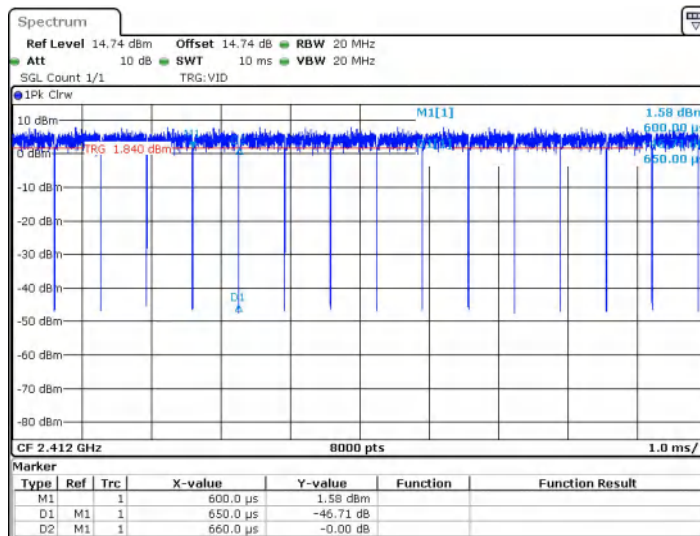

Date: 18.MAY.2026 22:11:13

Test Graph_IEEE802.11 n (HT40) Duty Cycle:

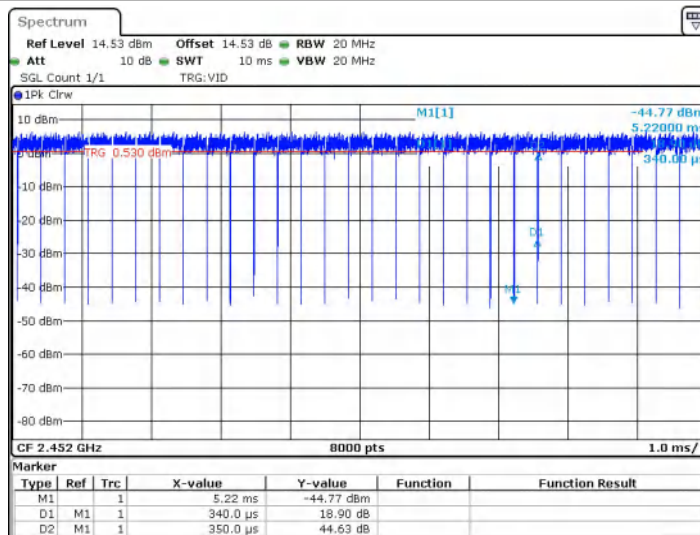

Date: 18.MAY.2026 22:19:39

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**


SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

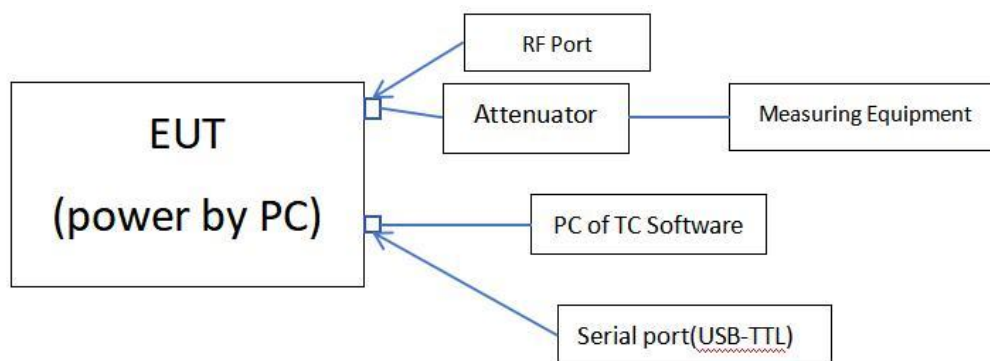

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling This is either permanently attachment or a unique coupling that satisfies the requirement.	


5.2 Conducted Emissions

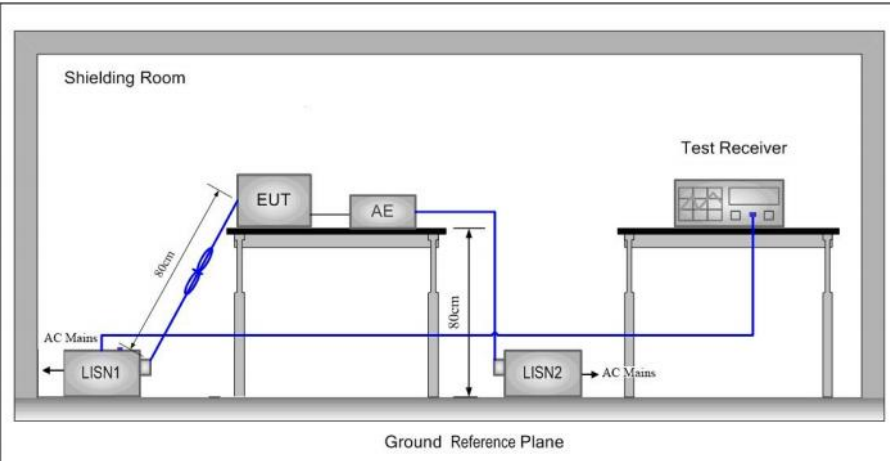Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.		
Test Setup:	 The diagram illustrates the test setup within a Shielding Room. The Equipment Under Test (EUT) and an Auxiliary Equipment (AE) are placed on a table that is 80cm high. The EUT is connected to the AC Mains via a Line Impedance Stabilization Network (LISN1). Another LISN (LISN2) is connected to the EUT and also to the AC Mains. A Test Receiver is connected to LISN2 to measure the emissions. The entire setup is on a Ground Reference Plane. The distance between the EUT and LISN1 is marked as 80cm. The distance between the EUT and LISN2 is also marked as 80cm. The Test Receiver is connected to LISN2 via a cable.		

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

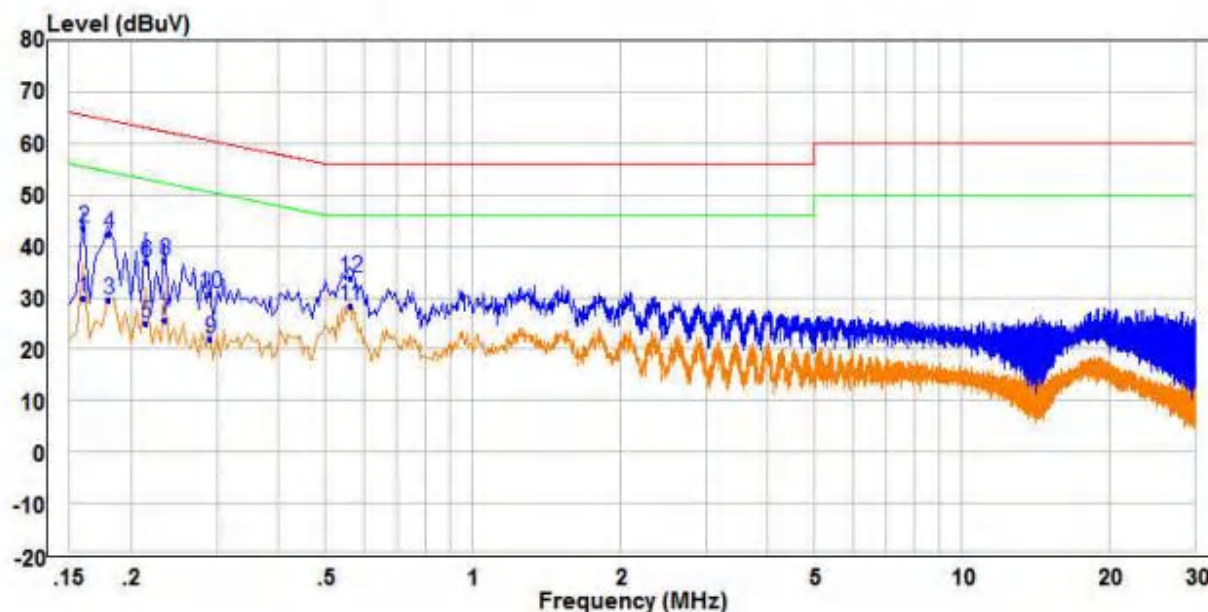


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	20.23	9.68	29.91	55.46	-25.55	Average	Line
2 QP	0.160	33.76	9.68	43.44	65.46	-22.02	QP	Line
3	0.180	19.87	9.64	29.51	54.49	-24.98	Average	Line
4	0.180	32.63	9.64	42.27	64.49	-22.22	QP	Line
5	0.215	15.49	9.59	25.08	53.01	-27.93	Average	Line
6	0.215	27.17	9.59	36.76	63.01	-26.25	QP	Line
7	0.235	16.18	9.56	25.74	52.27	-26.53	Average	Line
8	0.235	27.49	9.56	37.05	62.27	-25.22	QP	Line
9	0.290	12.40	9.50	21.90	50.52	-28.62	Average	Line
10	0.290	21.21	9.50	30.71	60.52	-29.81	QP	Line
11 PP	0.560	18.62	9.76	28.38	46.00	-17.62	Average	Line
12	0.560	23.96	9.76	33.72	56.00	-22.28	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

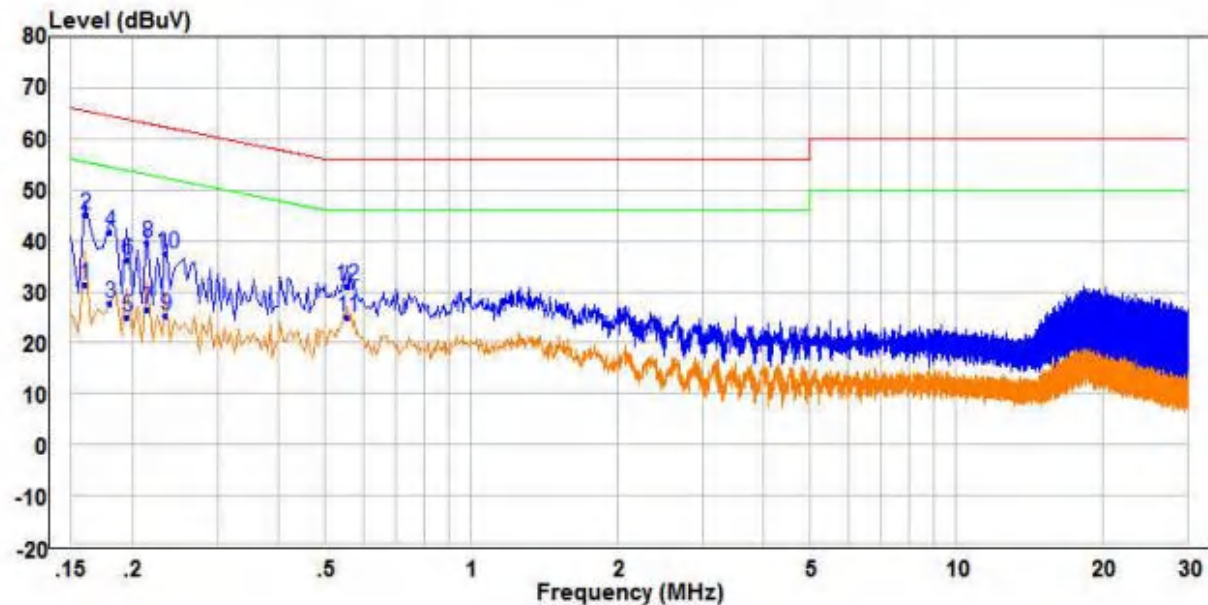


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	21.83	9.68	31.51	55.46	-23.95	Average	Neutral
2 PP	0.160	35.24	9.68	44.92	65.46	-20.54	QP	Neutral
3	0.180	18.21	9.64	27.85	54.49	-26.64	Average	Neutral
4	0.180	31.96	9.64	41.60	64.49	-22.89	QP	Neutral
5	0.195	15.37	9.62	24.99	53.82	-28.83	Average	Neutral
6	0.195	26.63	9.62	36.25	63.82	-27.57	QP	Neutral
7	0.215	17.07	9.59	26.66	53.01	-26.35	Average	Neutral
8	0.215	30.15	9.59	39.74	63.01	-23.27	QP	Neutral
9	0.235	15.74	9.56	25.30	52.27	-26.97	Average	Neutral
10	0.235	27.80	9.56	37.36	62.27	-24.91	QP	Neutral
11 AV	0.555	15.28	9.76	25.04	46.00	-20.96	Average	Neutral
12	0.555	21.26	9.76	31.02	56.00	-24.98	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Antenna	Frequency [MHz]	Measured Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	2.23	≤30	PASS
		2437	2.34	≤30	PASS
		2462	1.36	≤30	PASS
11G	Ant1	2412	-1.32	≤30	PASS
		2437	-1.29	≤30	PASS
		2462	-2.47	≤30	PASS
11N20SISO	Ant1	2412	-1.52	≤30	PASS
		2437	-1.60	≤30	PASS
		2462	-2.69	≤30	PASS
11N40SISO	Ant1	2422	-1.24	≤30	PASS
		2437	-1.72	≤30	PASS
		2452	-2.27	≤30	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs

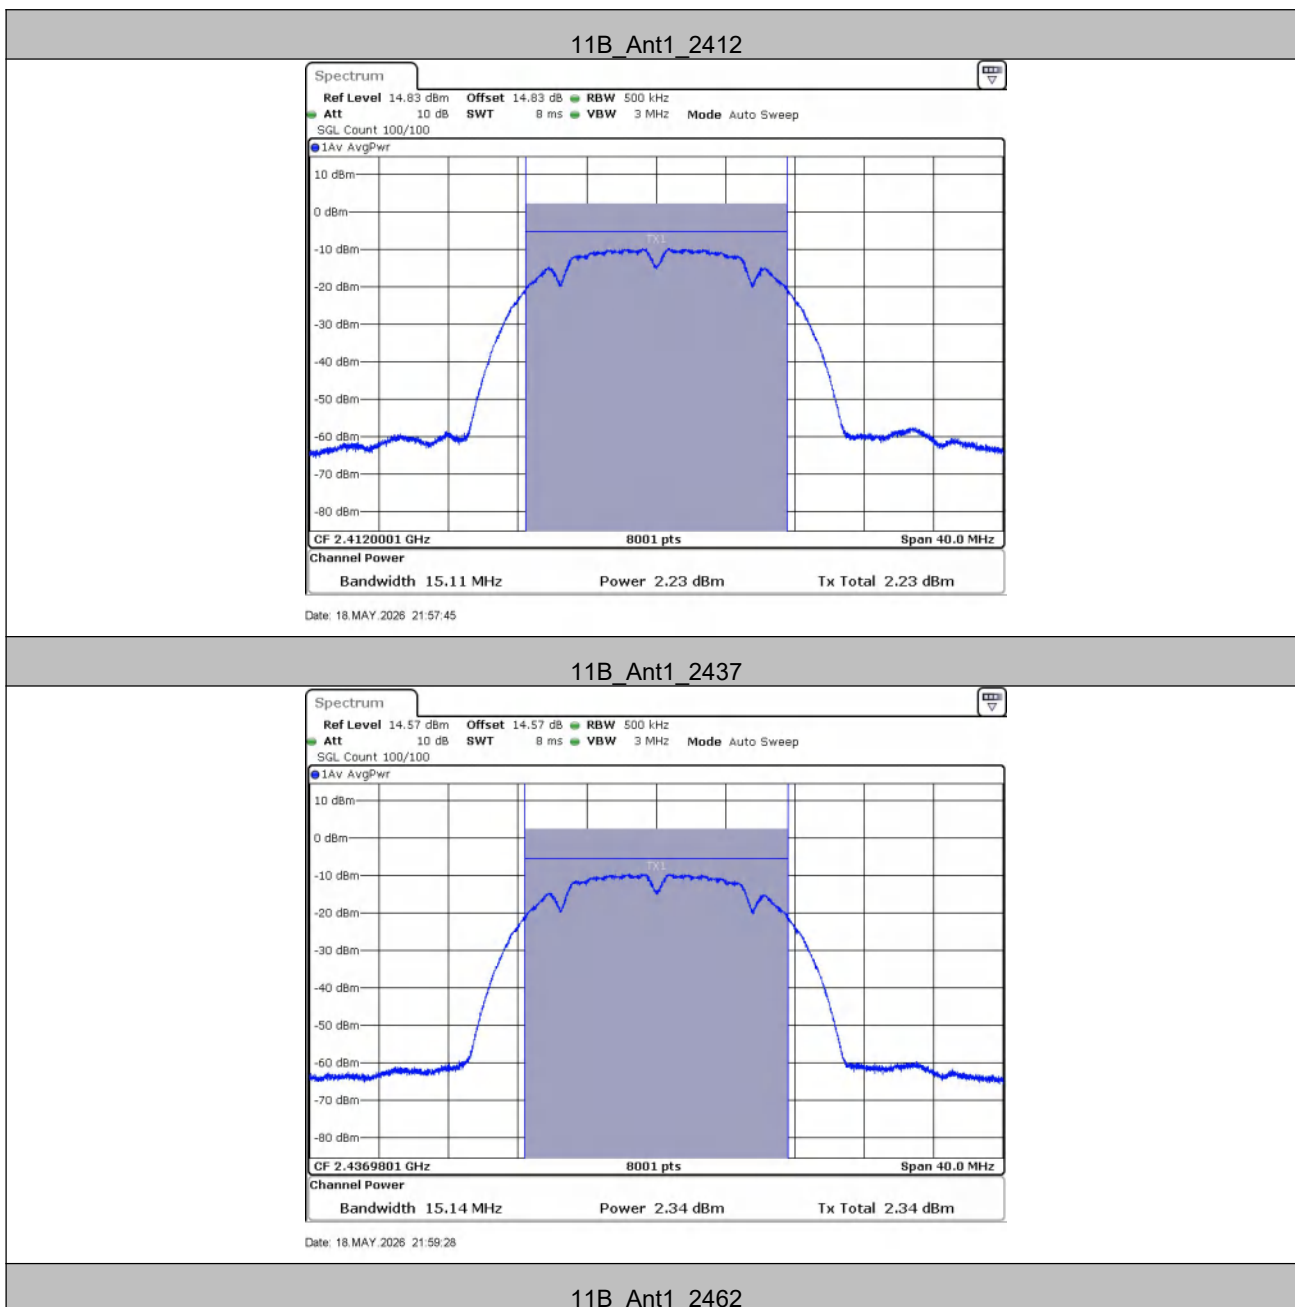


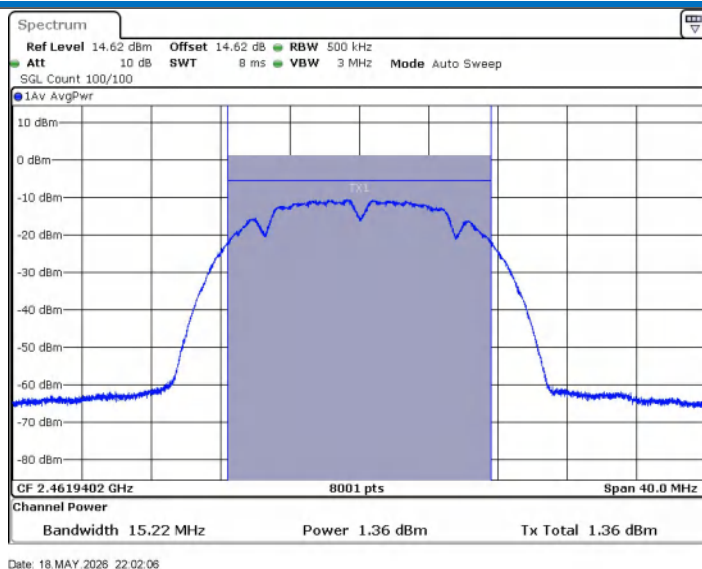


11G_Ant1_2412

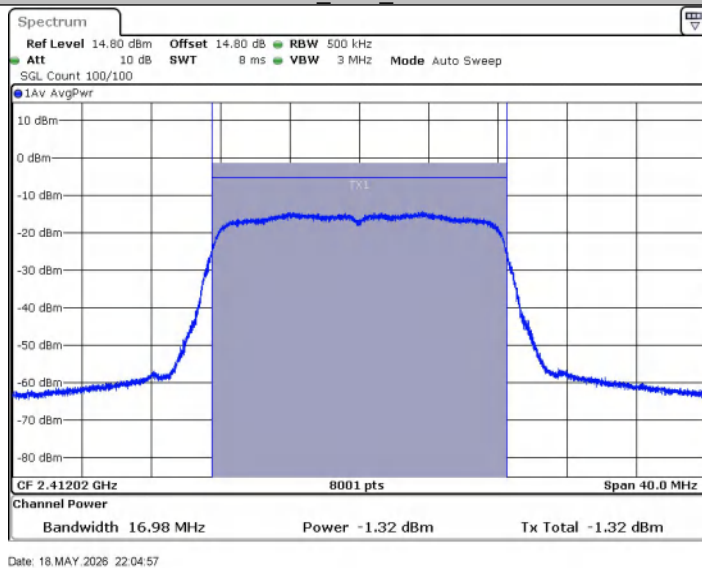

11G_Ant1_2437

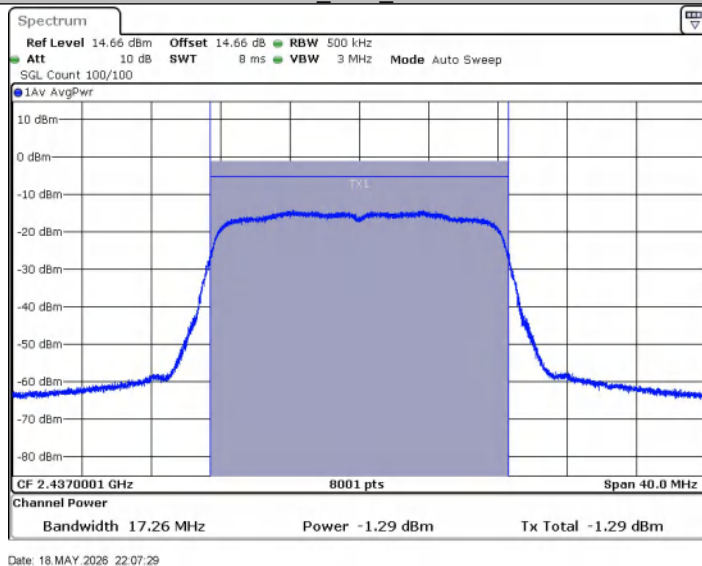


11G_Ant1_2462

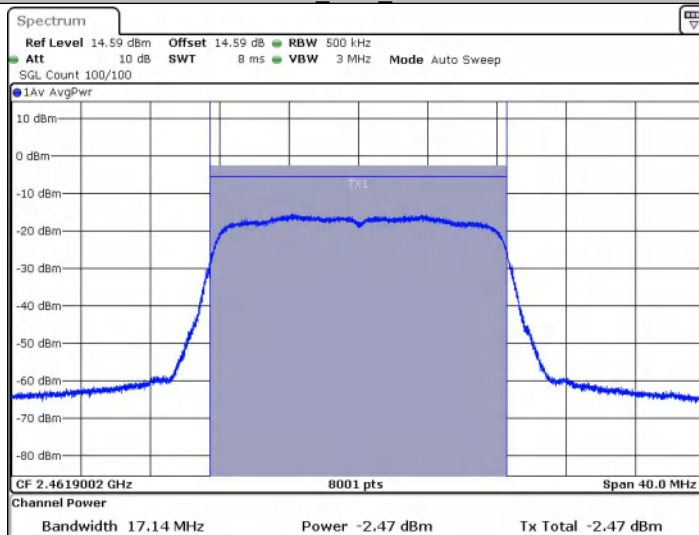


Date: 18 MAY 2026 22:09:07

11N20SISO_Ant1_2412

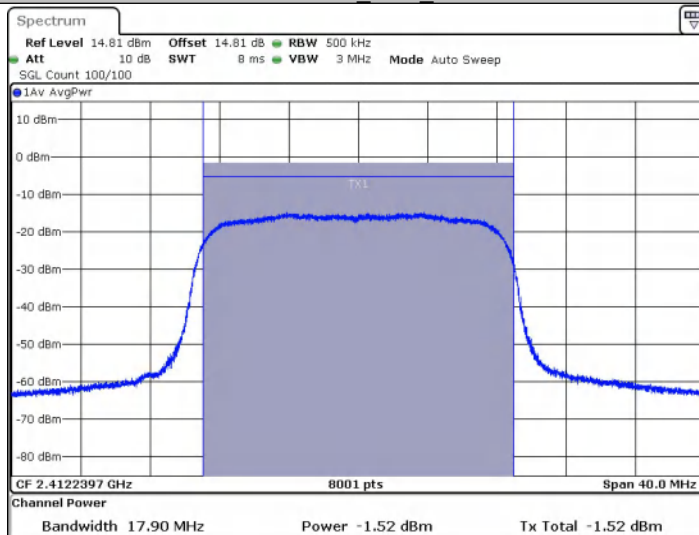


Date: 18 MAY 2026 22:11:29


11N20SISO_Ant1_2437

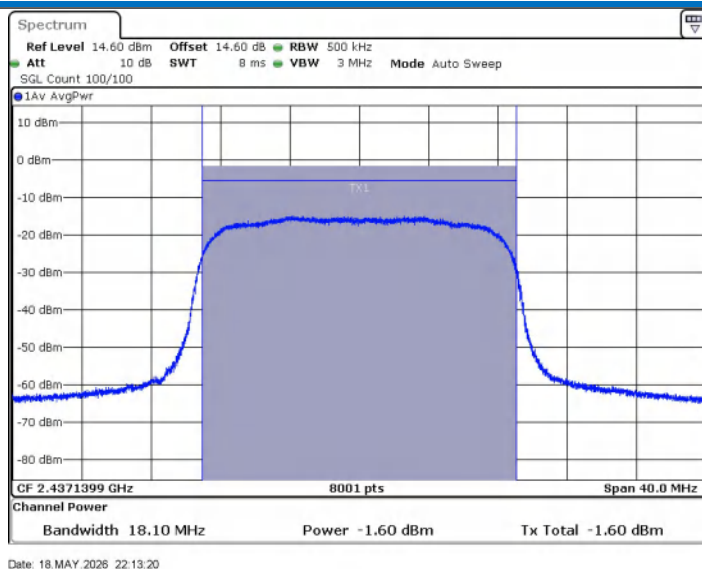


11N20SISO_Ant1_2462

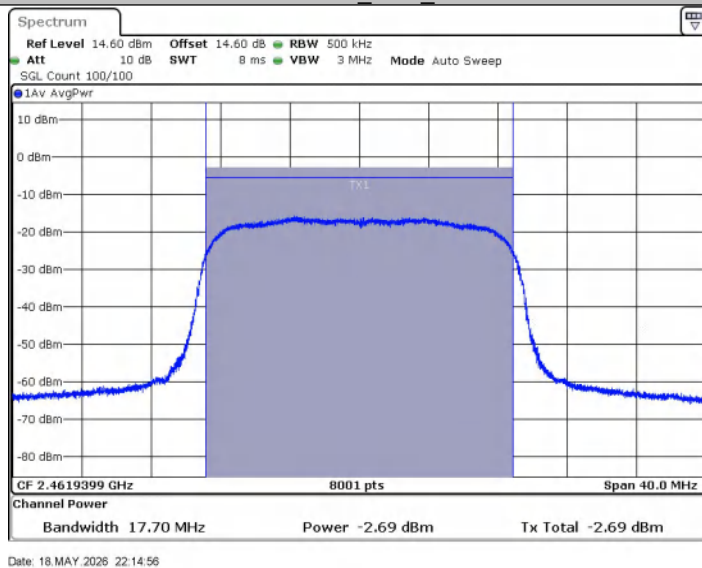

11N40SISO_Ant1_2422

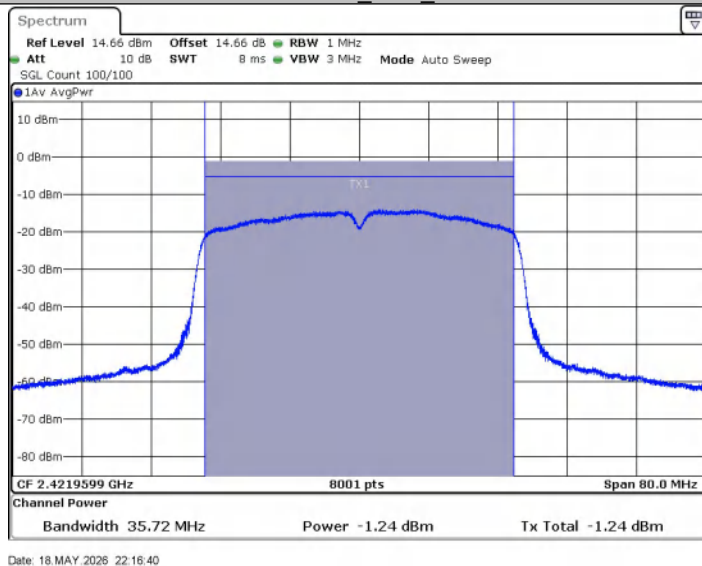


11N40SISO_Ant1_2437

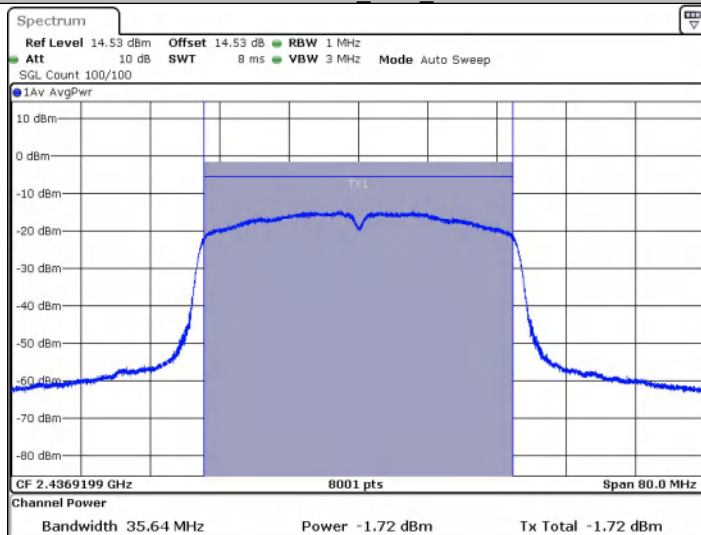


Date: 18 MAY 2026 22:18:45

11N40SISO_Ant1_2452

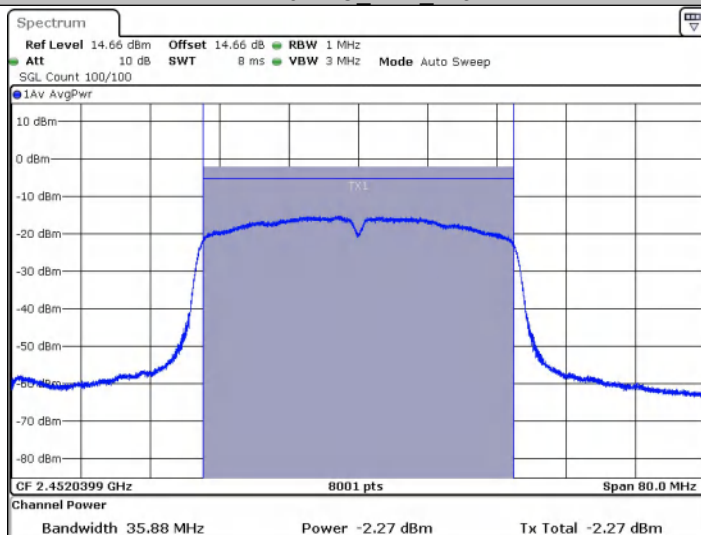

Date: 18 MAY 2026 22:19:56

5.4 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Test Result

TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	15.105	2404.4476	2419.5524
	2437	15.145	2429.4076	2444.5524
	2462	15.225	2454.3277	2469.5524
11G	2412	16.983	2403.5285	2420.5115
	2437	17.263	2428.3686	2445.6314
	2462	17.143	2453.3287	2470.4715
11N20SISO	2412	17.902	2403.2887	2421.1908
	2437	18.102	2428.0889	2446.1908
	2462	17.702	2453.0889	2470.7912


Test Graphs

11B_Ant1_2412

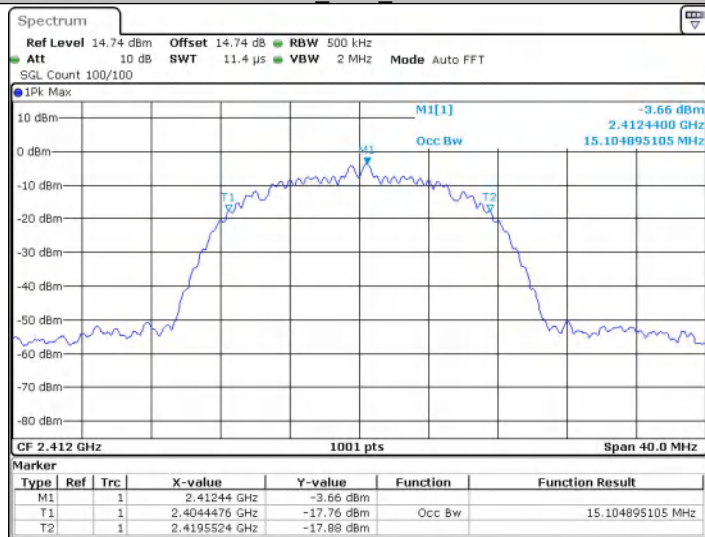


Date: 18 MAY 2026 21:57:39

11B_Ant1_2437

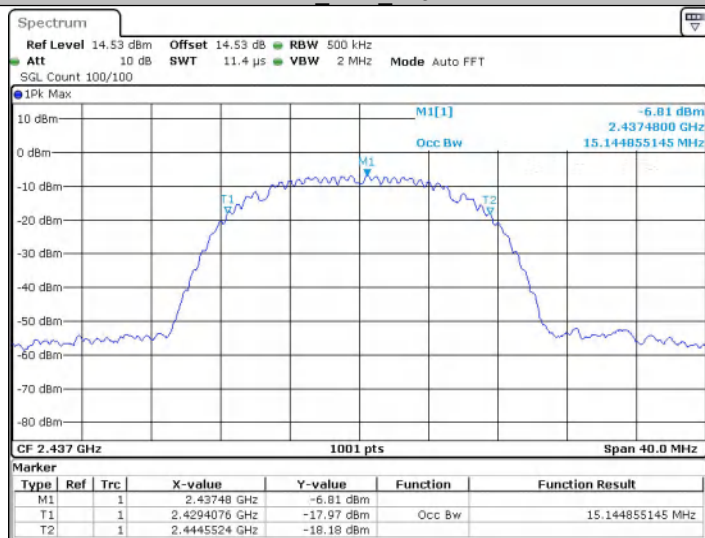


Date: 18 MAY 2026 21:59:22

11B_Ant1_2462

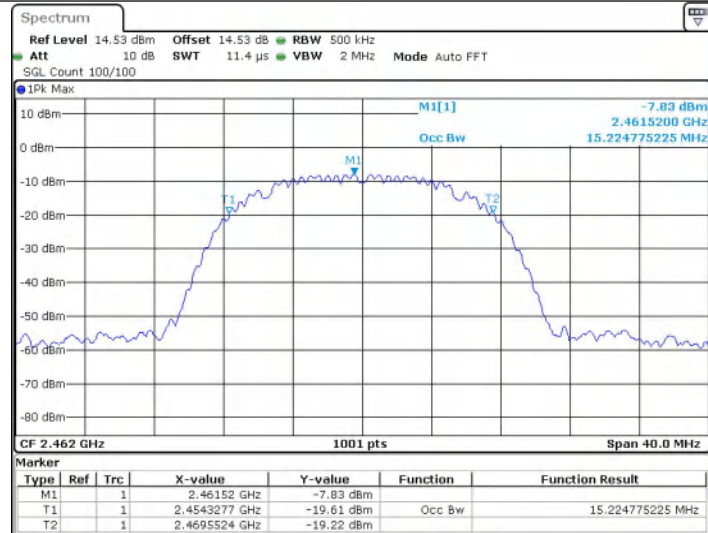


Date: 18 MAY 2026 22:02:01

11G_Ant1_2412

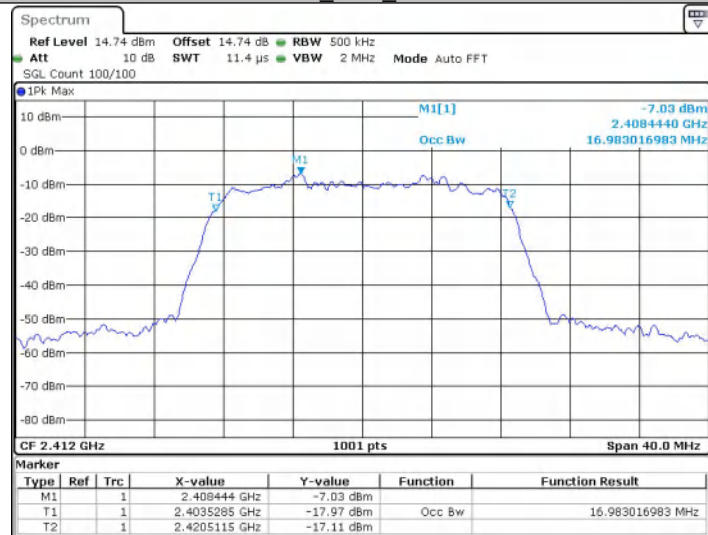


Date: 18 MAY 2026 22:04:52

11G_Ant1_2437

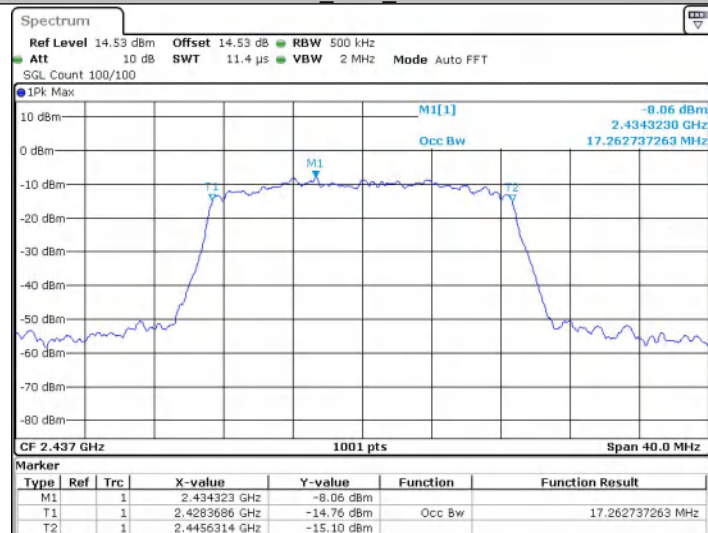


Date: 18 MAY 2026 22:07:24

11G_Ant1_2462

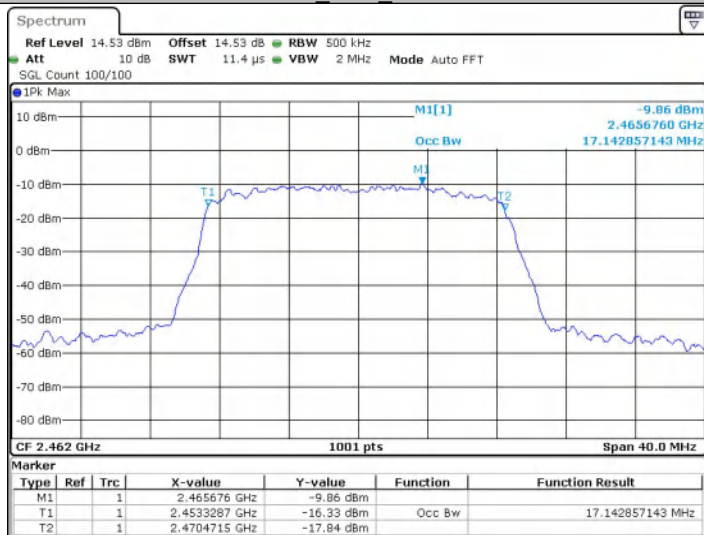


Date: 18 MAY 2026 22:09:01

11N20SISO_Ant1_2412

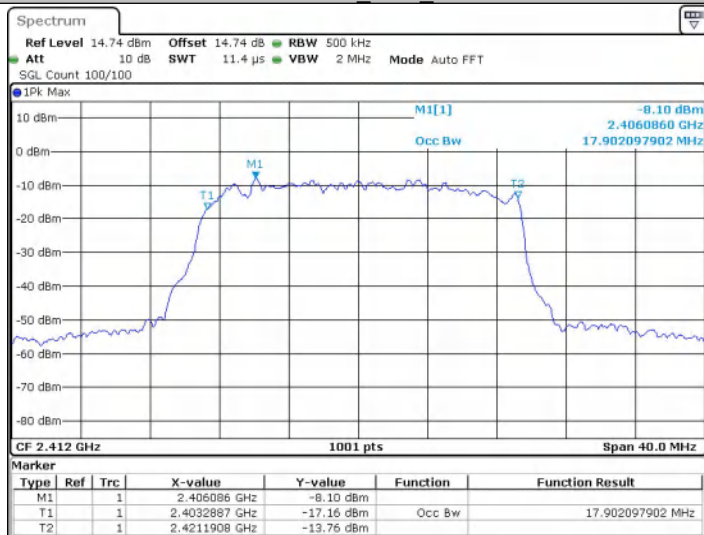


Date: 18 MAY 2026 22:11:23

11N20SISO_Ant1_2437

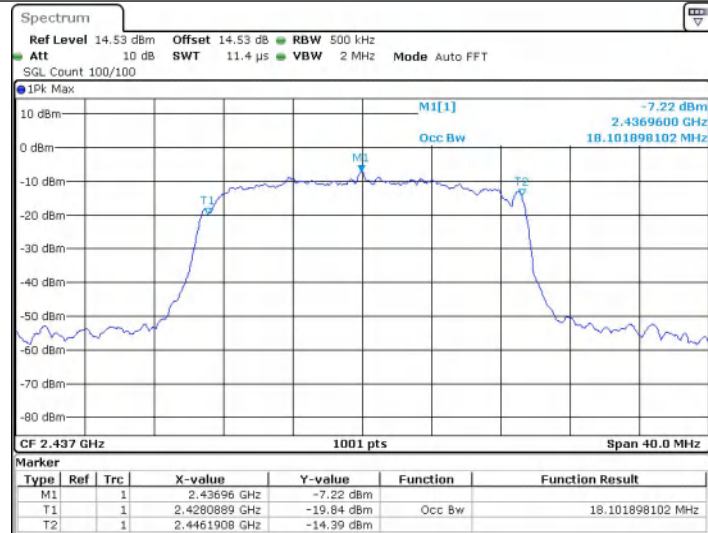


Date: 18 MAY 2026 22:13:14

11N20SISO_Ant1_2462

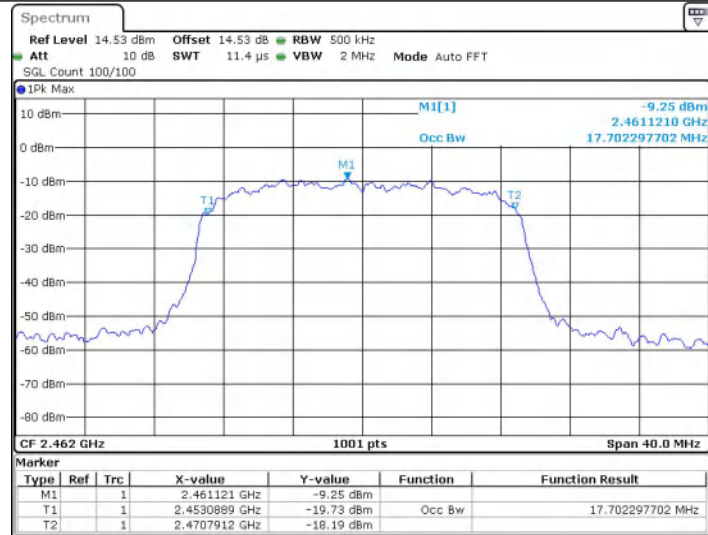


Date: 18 MAY 2026 22:14:50

11N40SISO_Ant1_2422

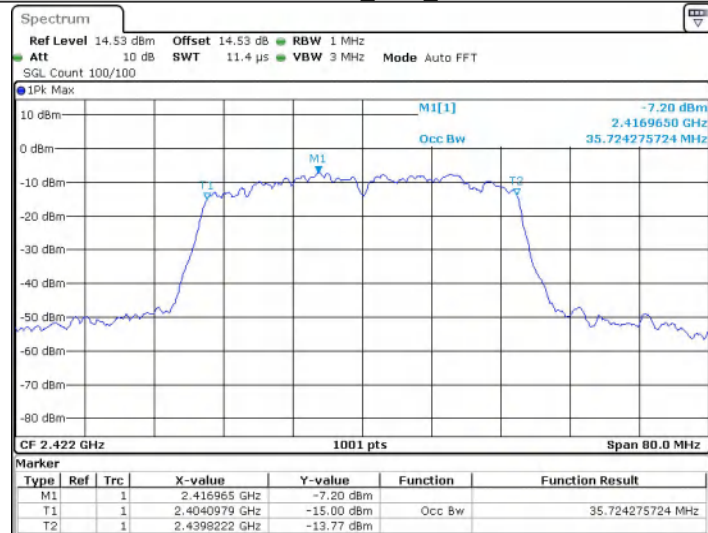


Date: 18 MAY 2026 22:16:34

11N40SISO_Ant1_2437

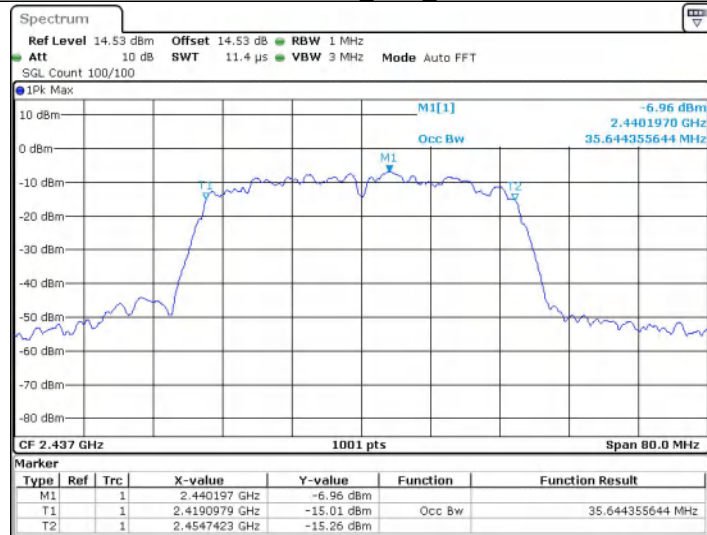


Date: 18 MAY 2026 22:18:39

11N40SISO_Ant1_2452

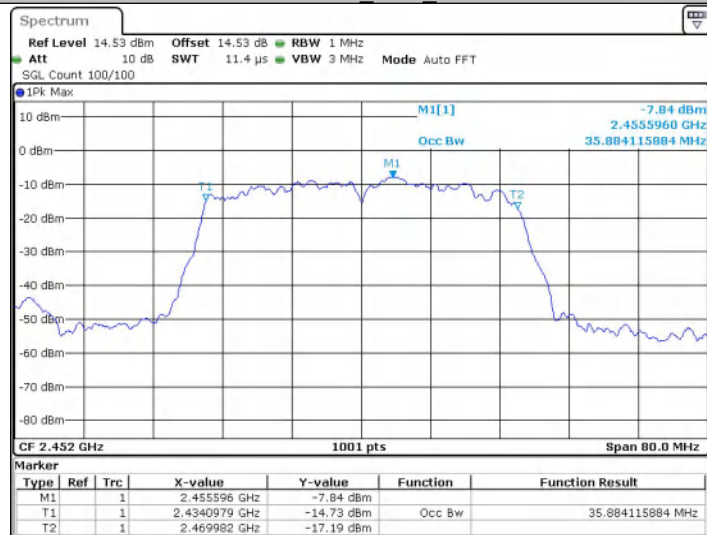

Date: 18 MAY 2026 22:19:50

5.5 6dB Occupied Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.28	0.5	PASS
		2437	12.24	0.5	PASS
		2462	12.24	0.5	PASS
11G	Ant1	2412	16.68	0.5	PASS
		2437	15.68	0.5	PASS
		2462	16.12	0.5	PASS
11N20SISO	Ant1	2412	15.76	0.5	PASS
		2437	15.20	0.5	PASS
		2462	15.72	0.5	PASS
11N40SISO	Ant1	2422	33.20	0.5	PASS
		2437	33.36	0.5	PASS
		2452	35.04	0.5	PASS


Test Graphs

11B_Ant1_2412

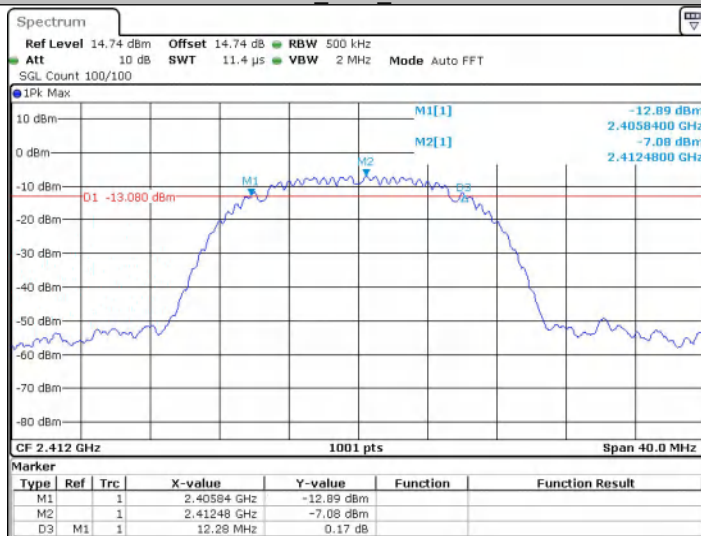


Date: 18 MAY 2026 21:57:36

11B_Ant1_2437

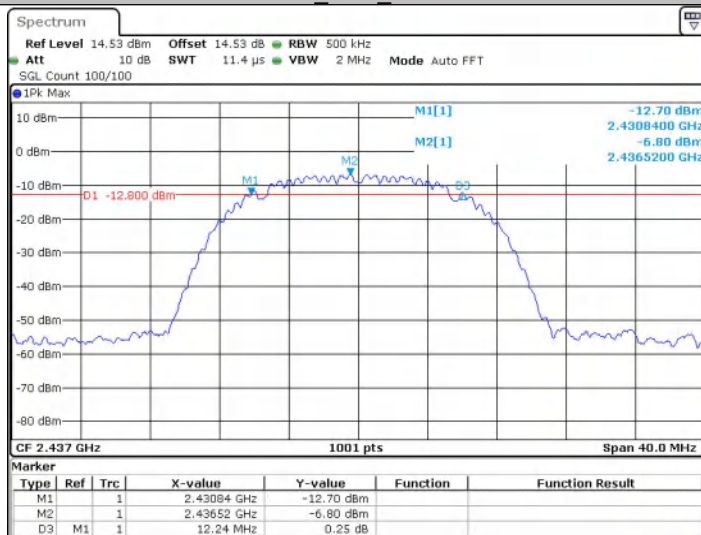


Date: 18 MAY 2026 21:59:18


11B_Ant1_2462

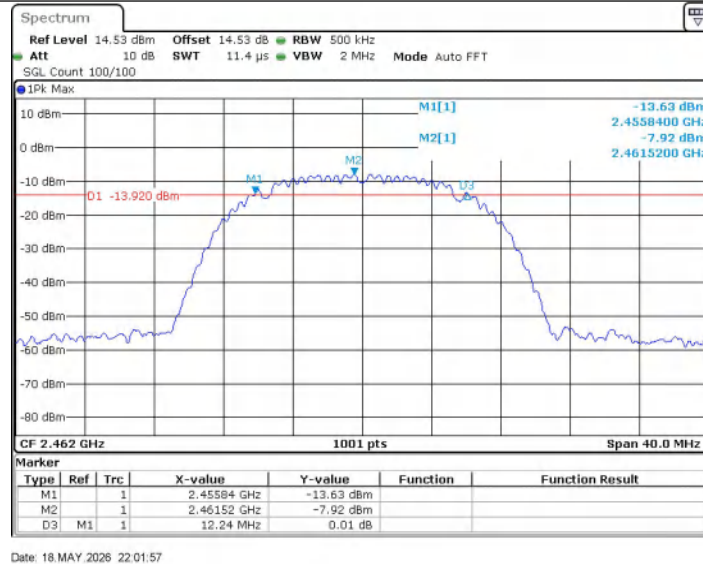


11G_Ant1_2412

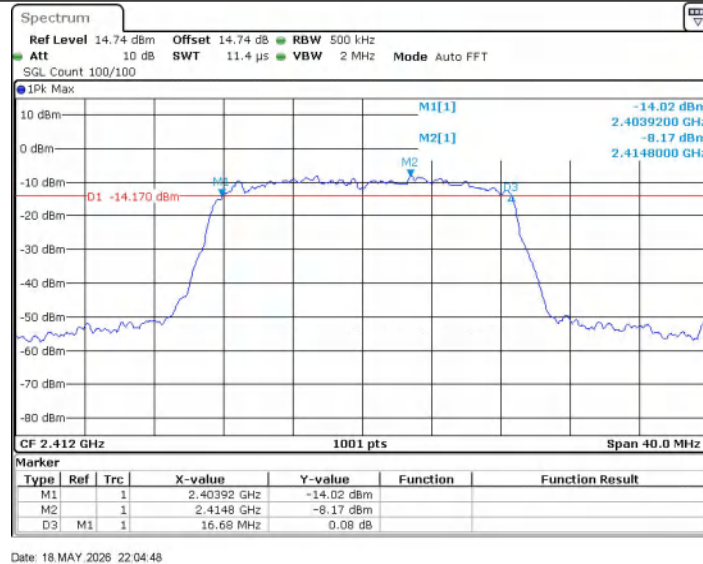

11G_Ant1_2437

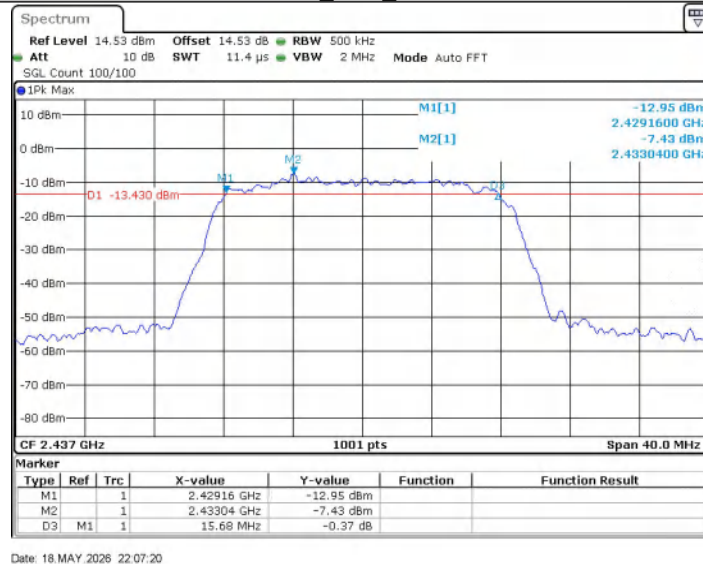


11G_Ant1_2462

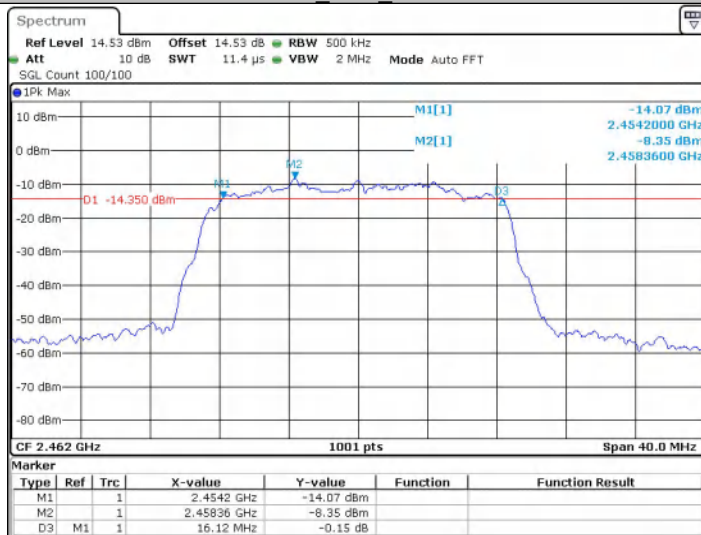


Date: 18 MAY 2026 22:08:57

11N20SISO_Ant1_2412

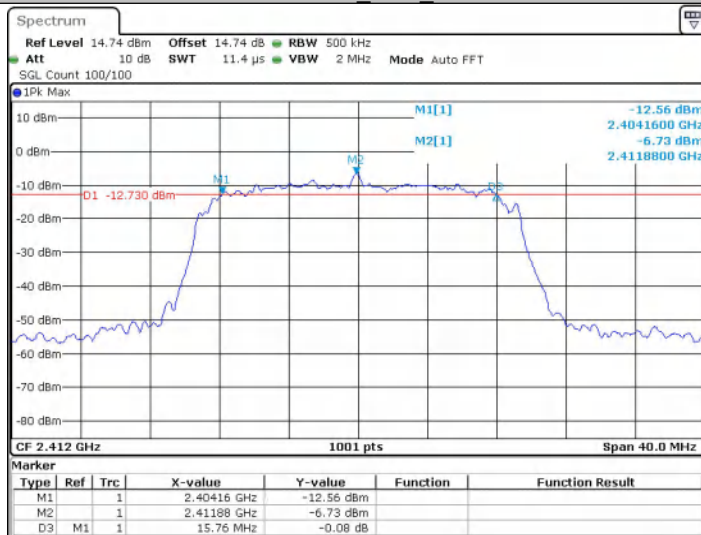


Date: 18 MAY 2026 22:11:20


11N20SISO_Ant1_2437

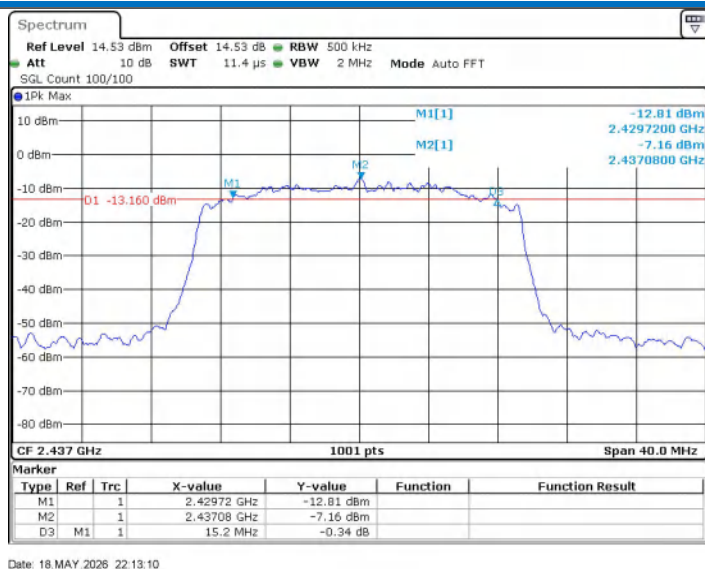


11N20SISO_Ant1_2462

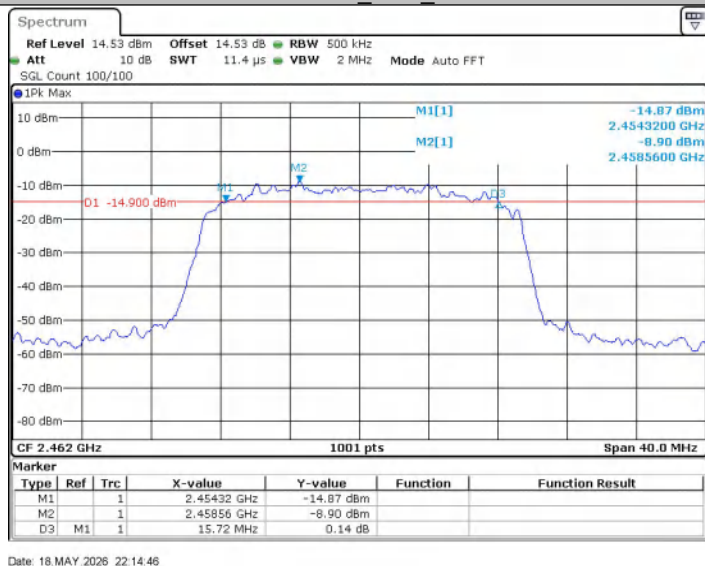

11N40SISO_Ant1_2422

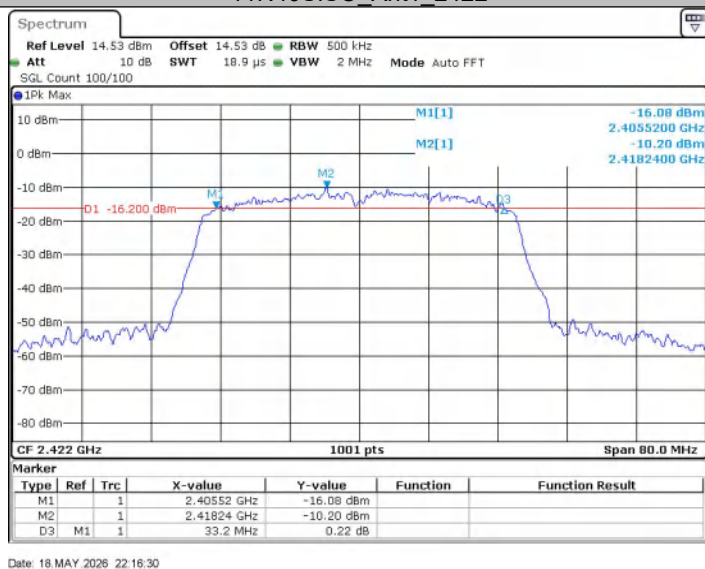


11N40SISO_Ant1_2437

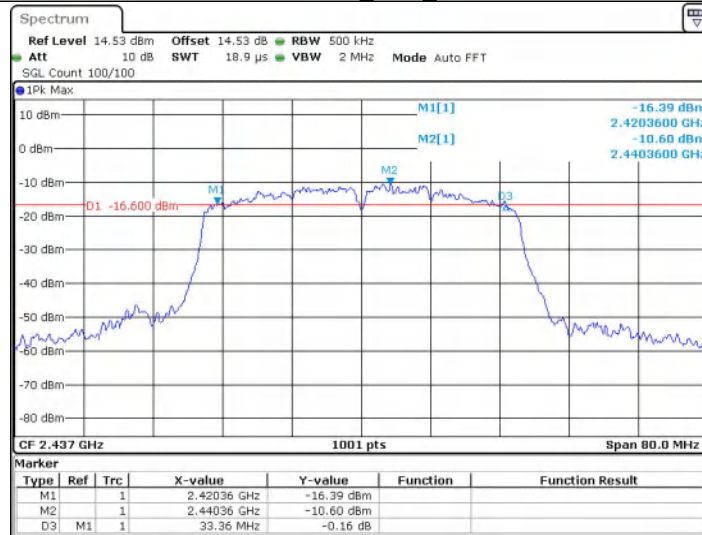


Date: 18 MAY 2026 22:18:35

11N40SISO_Ant1_2452

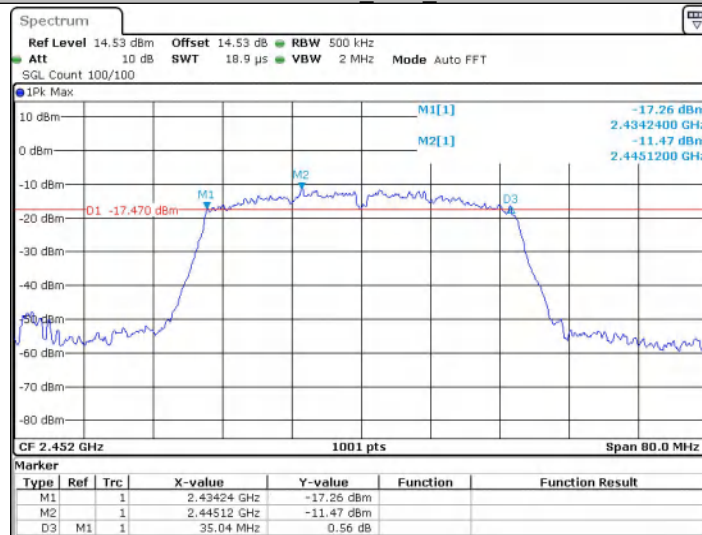

Date: 18 MAY 2026 22:19:46

5.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass


Test Result


Test Mode	Antenna	Frequency [MHz]	Measured Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-21.18	≤8	PASS
		2437	-20.83	≤8	PASS
		2462	-22.08	≤8	PASS
11G	Ant1	2412	-26.09	≤8	PASS
		2437	-25.56	≤8	PASS
		2462	-27.05	≤8	PASS
11N20SISO	Ant1	2412	-27.56	≤8	PASS
		2437	-28.14	≤8	PASS
		2462	-28.73	≤8	PASS
11N40SISO	Ant1	2422	-26.73	≤8	PASS
		2437	-26.47	≤8	PASS
		2452	-26.91	≤8	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs

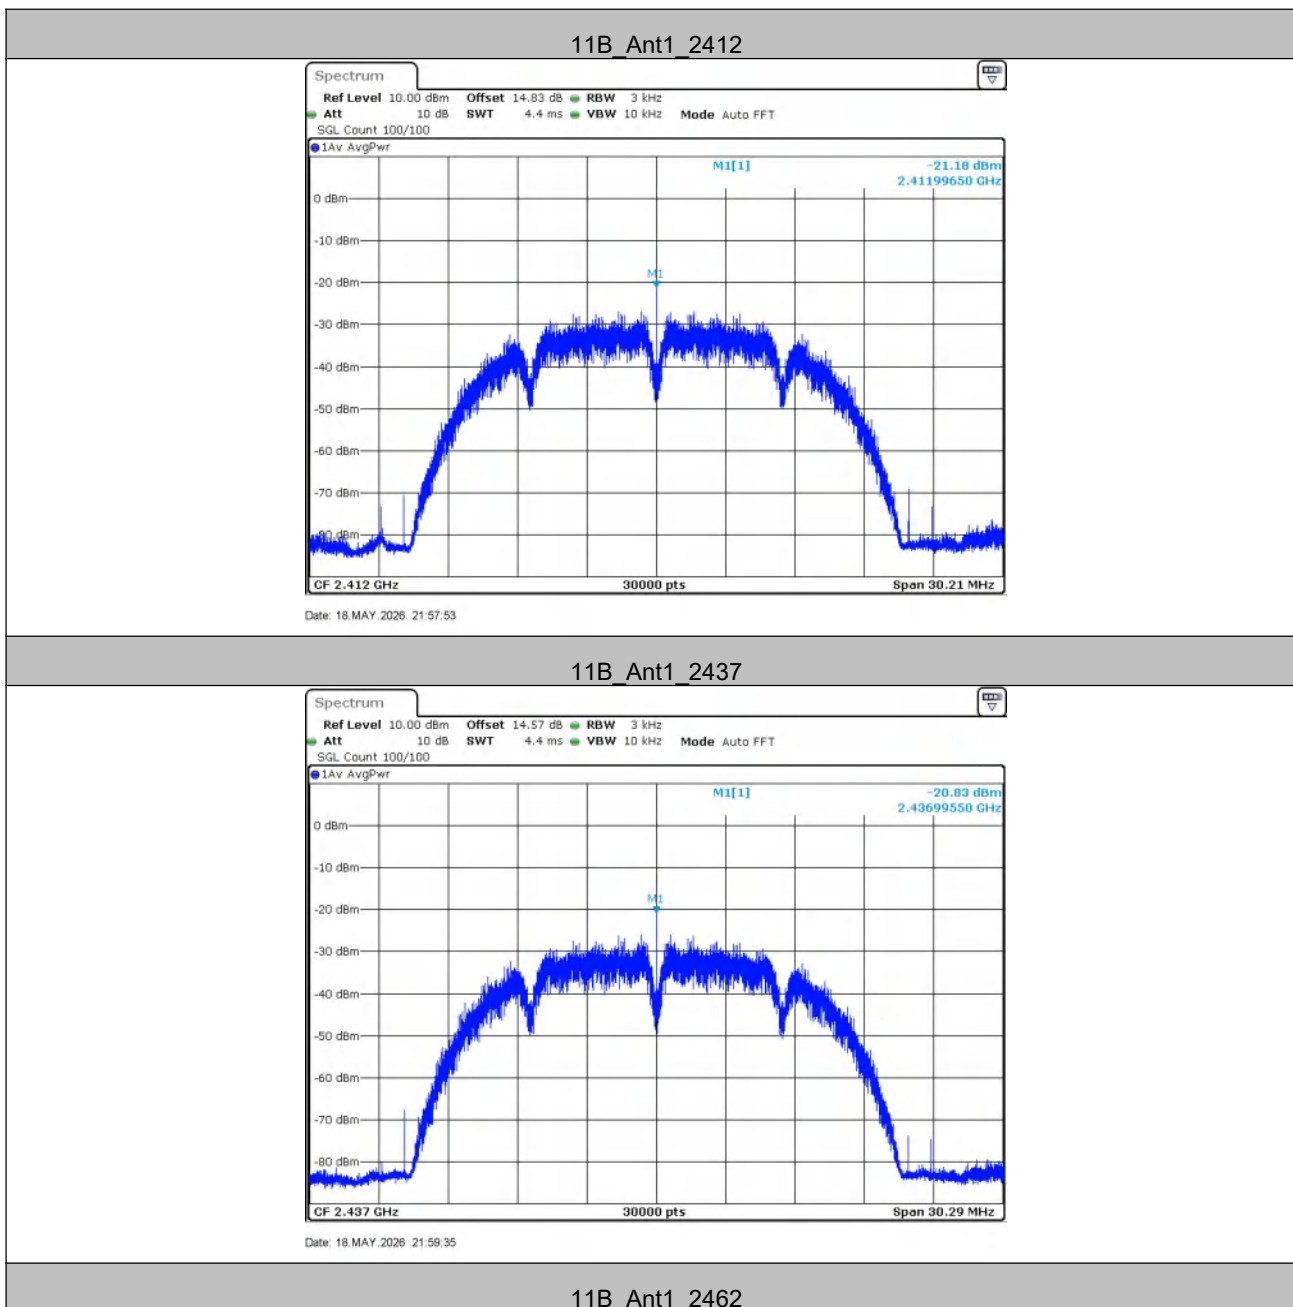


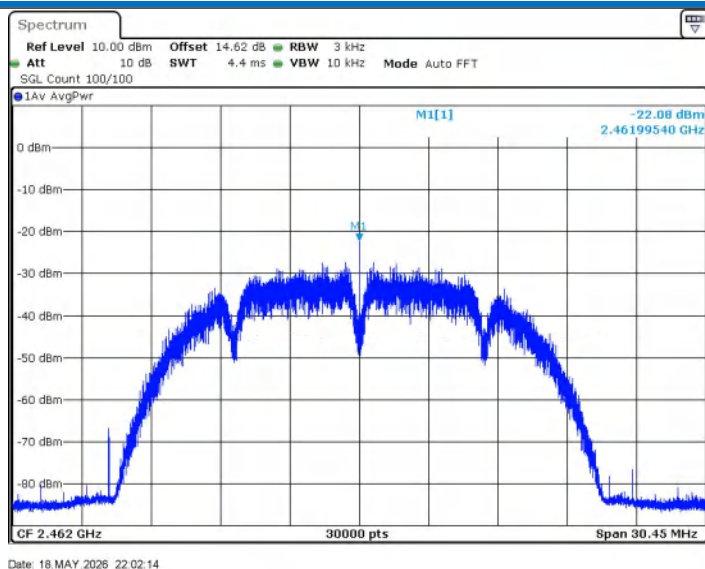


11G_Ant1_2412

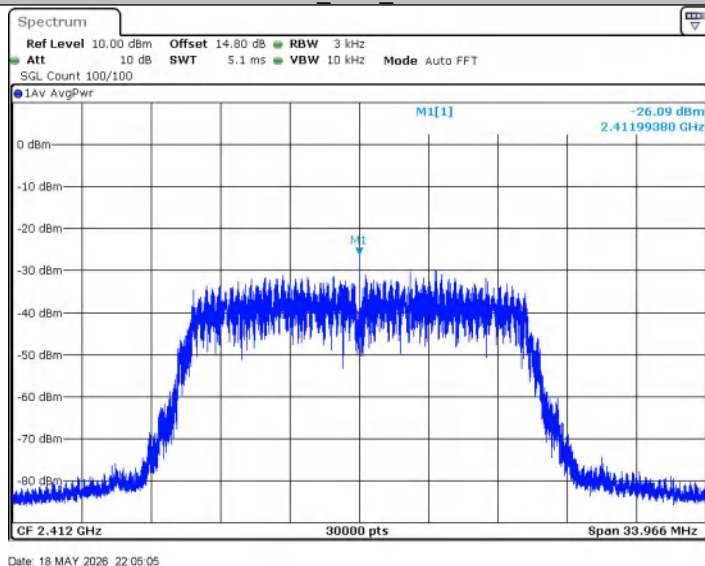

11G_Ant1_2437

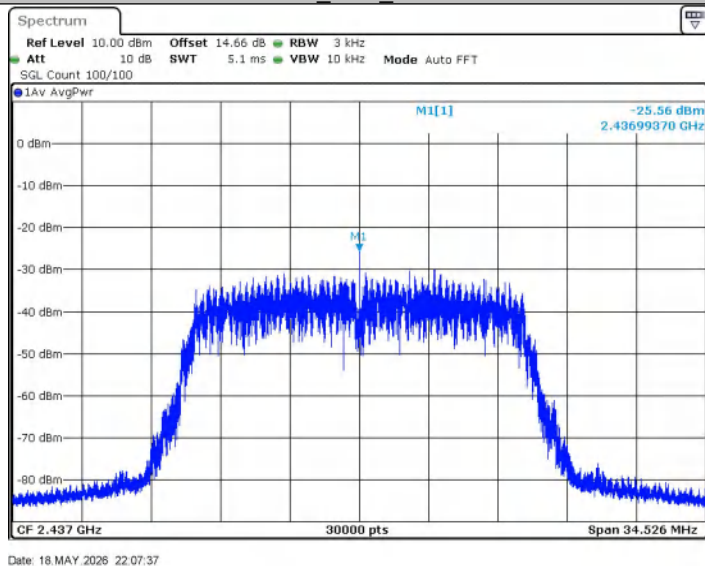


11G_Ant1_2462

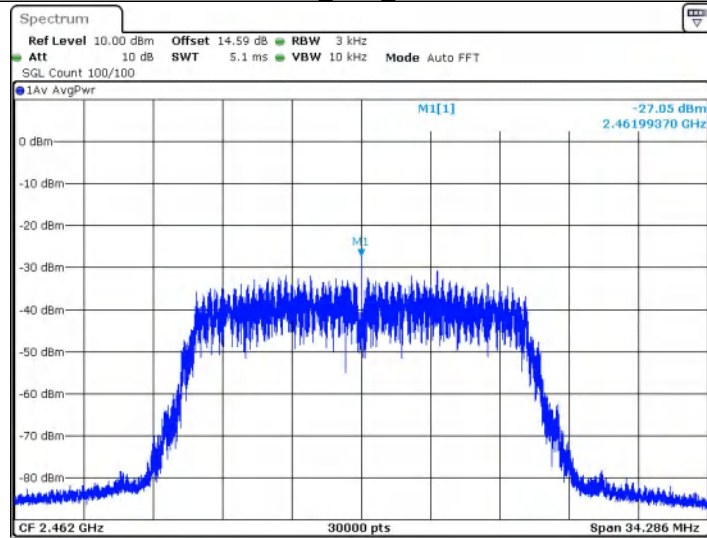


Date: 18 MAY 2026 22:09:14

11N20SISO_Ant1_2412

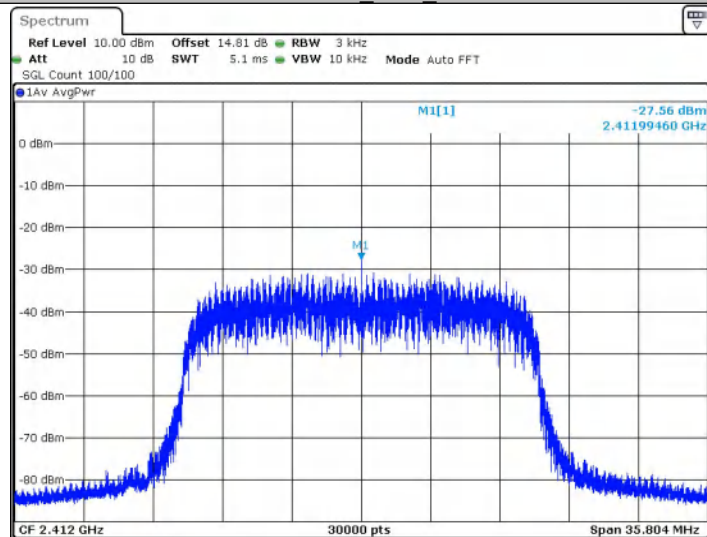


Date: 18 MAY 2026 22:11:37


11N20SISO_Ant1_2437

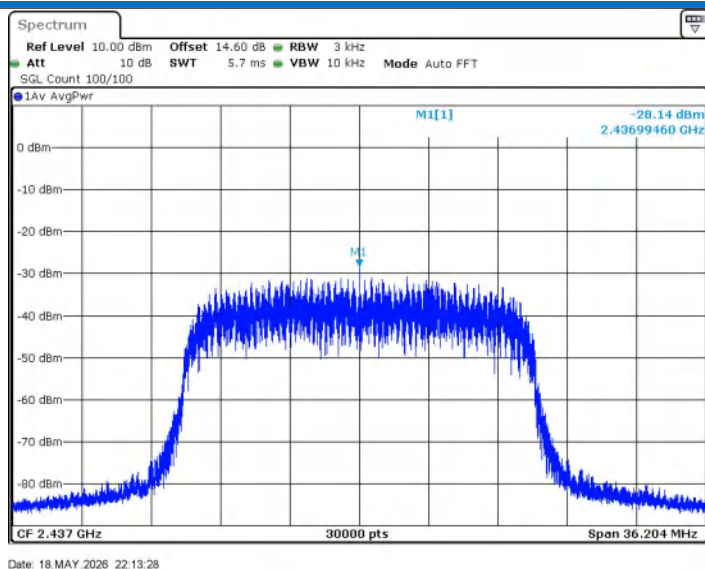


11N20SISO_Ant1_2462

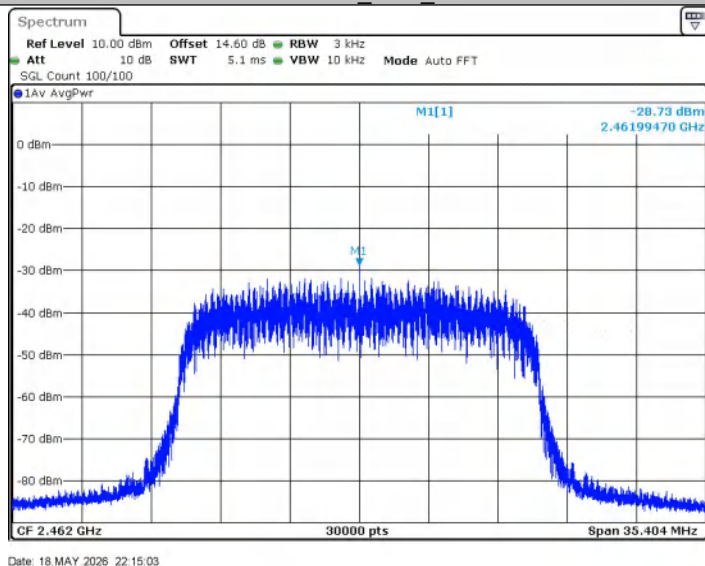

11N40SISO_Ant1_2422

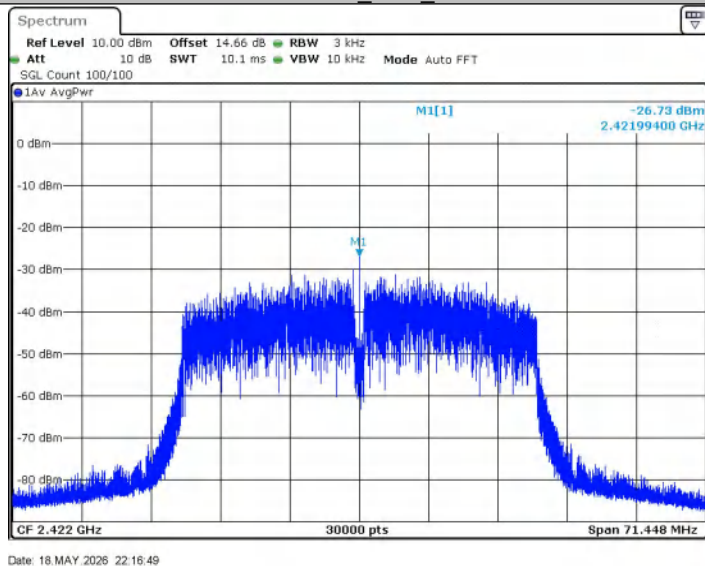


11N40SISO_Ant1_2437

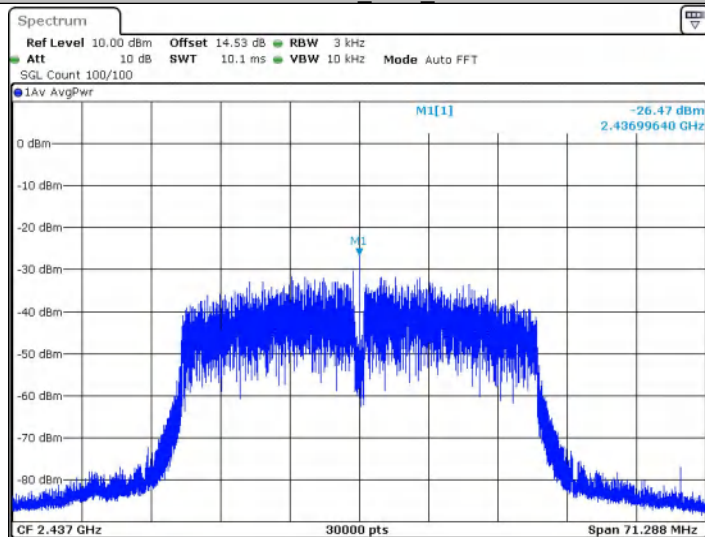


Date: 18 MAY 2026 22:18:55

11N40SISO_Ant1_2452

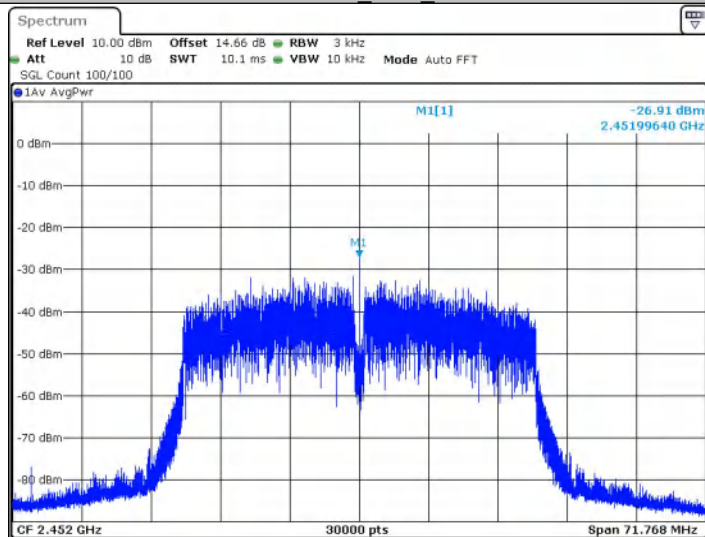


Date: 18 MAY 2026 22:20:06


11B_Ant1_2462

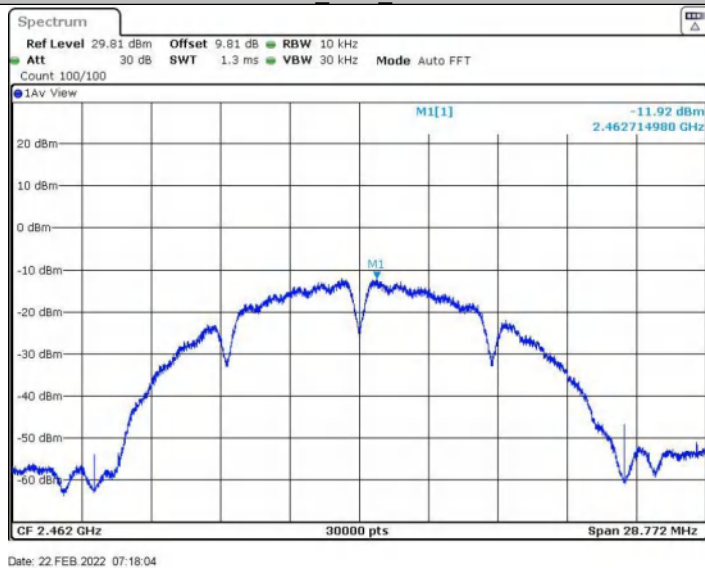


11G_Ant1_2412

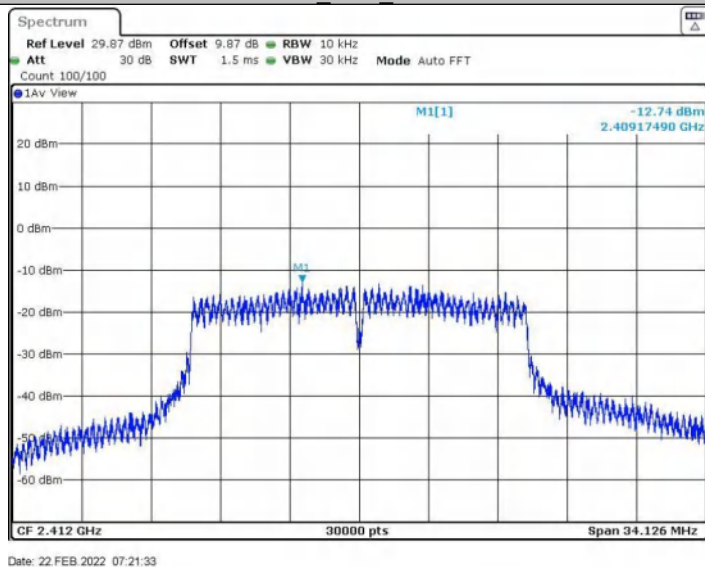


11G_Ant1_2437

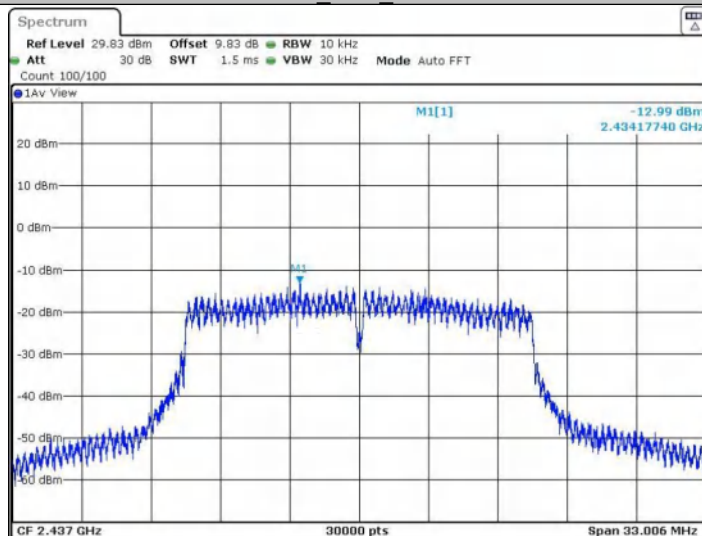


11G_Ant1_2462

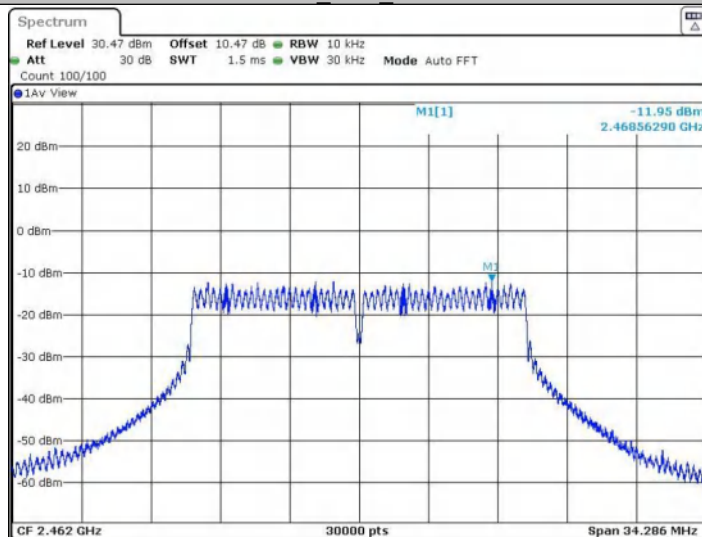


11N20SISO_Ant1_2412

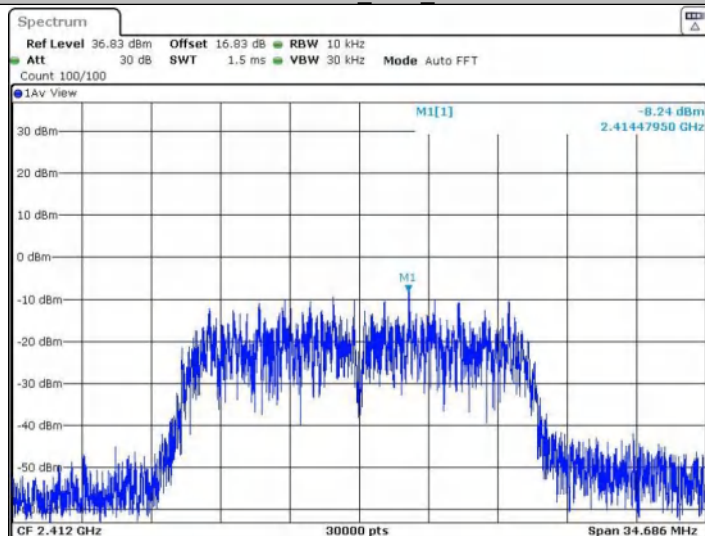


11N20SISO_Ant1_2437

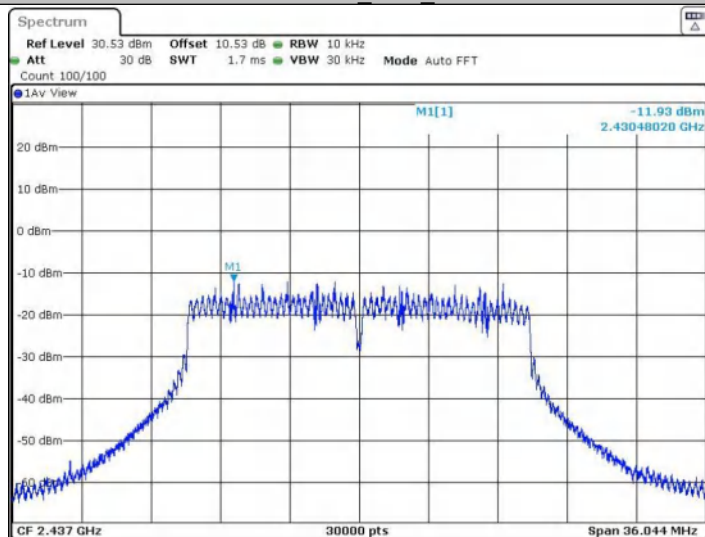


11N20SISO_Ant1_2462

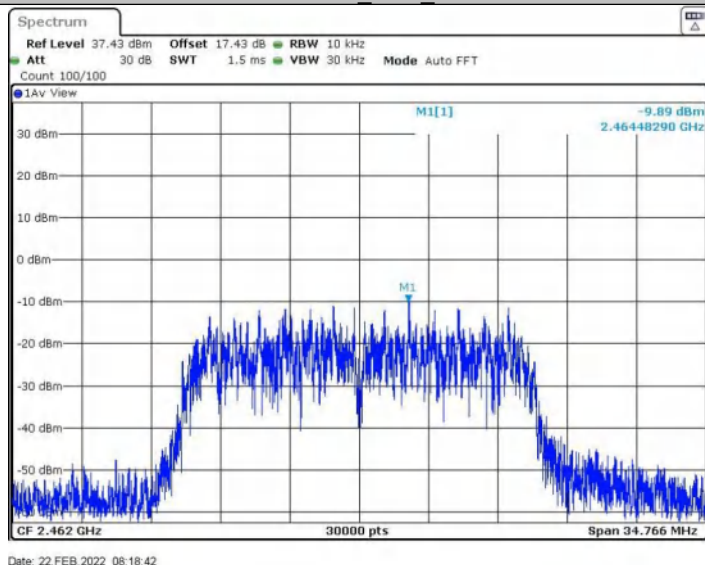

11N40SISO_Ant1_2422

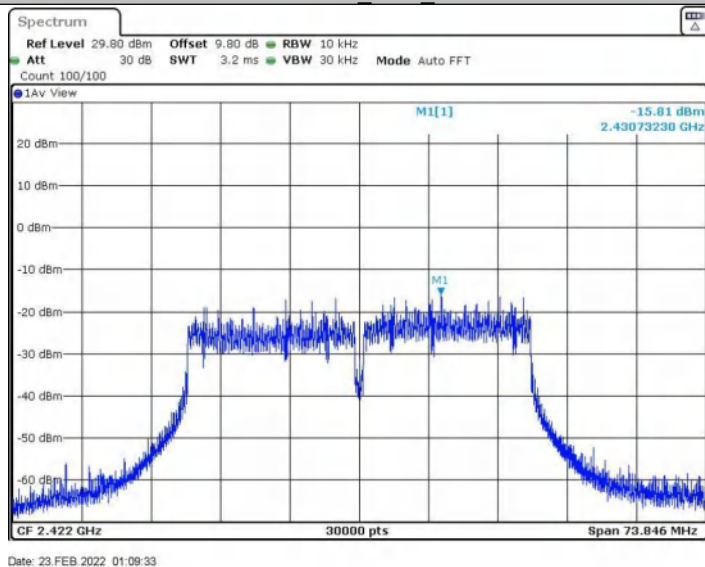


11N40SISO_Ant1_2437

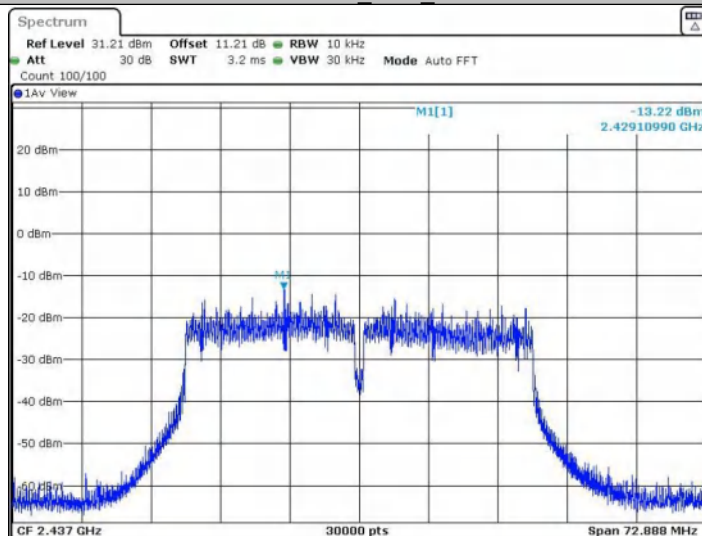


Date: 23.FEB.2022 01:12:49

11N40SISO_Ant1_2452

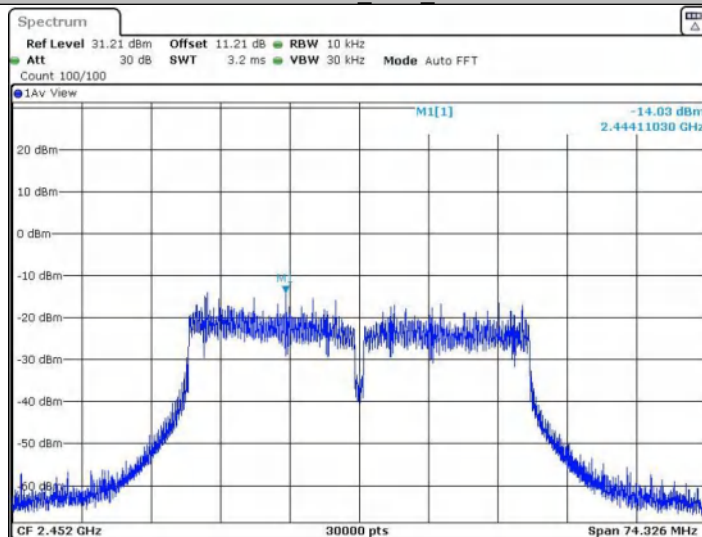

Date: 23.FEB.2022 01:14:33

5.7 Band-edge for RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	-9.06	-56.8	≤ -39.06	PASS
	High	2462	-9.79	-61.26	≤ -39.79	PASS
11G	Low	2412	-12.96	-56.41	≤ -42.96	PASS
	High	2462	-13.40	-62.15	≤ -43.4	PASS
11N20SISO	Low	2412	-13.11	-55.65	≤ -43.11	PASS
	High	2462	-13.18	-61.36	≤ -43.18	PASS
11N40SISO	Low	2422	-13.77	-54.44	≤ -43.77	PASS
	High	2452	-14.80	-59.84	≤ -44.8	PASS


Test Graphs

11B Ant1 Low 2412

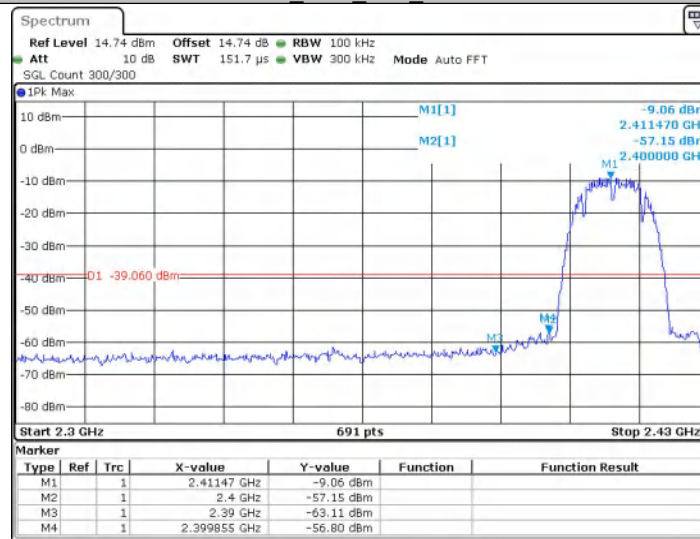


Date: 18 MAY 2026 21:58:01

11B Ant1 High 2462

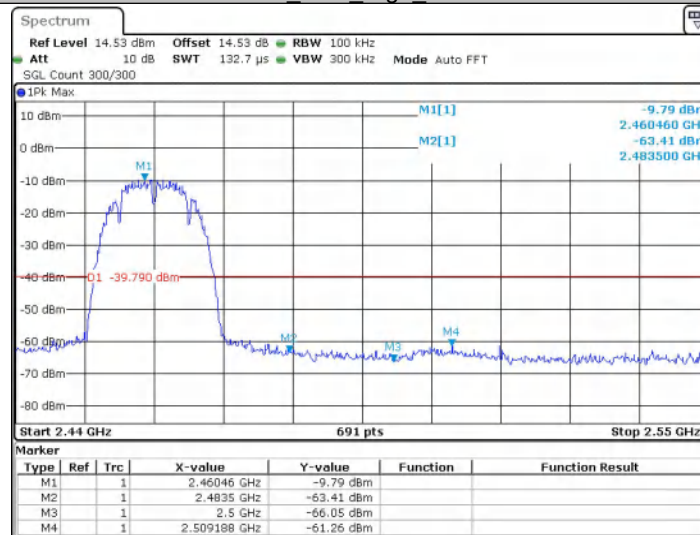


Date: 18 MAY 2026 22:02:22

11G Ant1 Low 2412

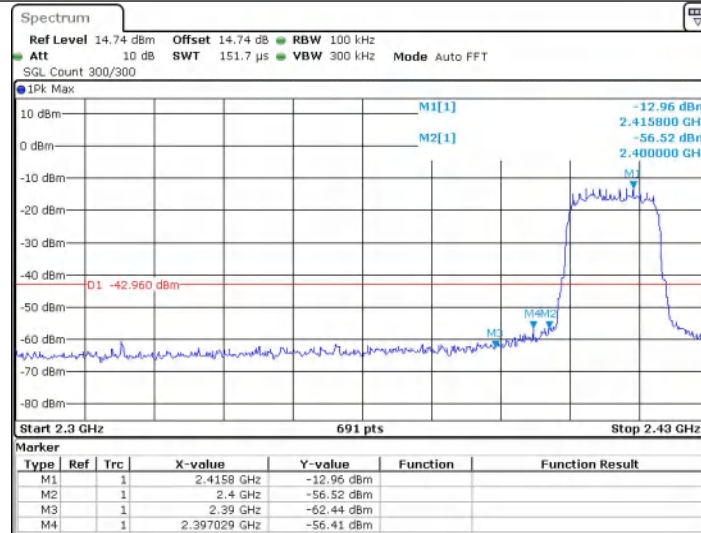


Date: 18 MAY 2026 22:05:13

11G_Ant1_High_2462

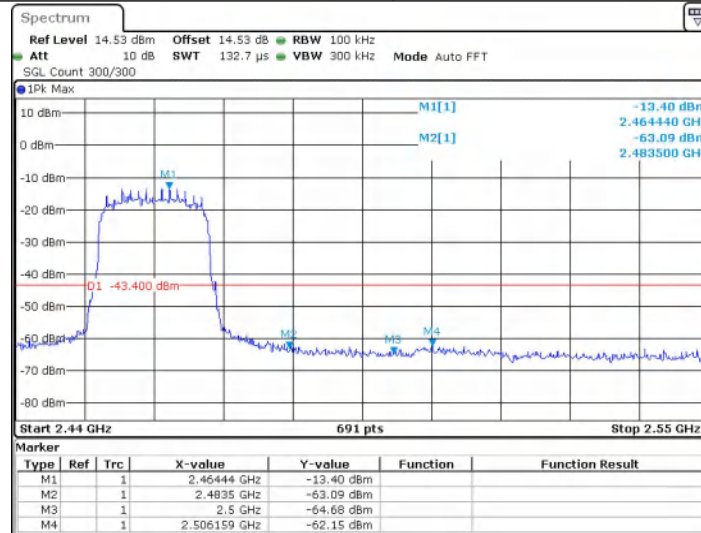


Date: 18 MAY 2026 22:09:22

11N20SISO_Ant1_Low_2412

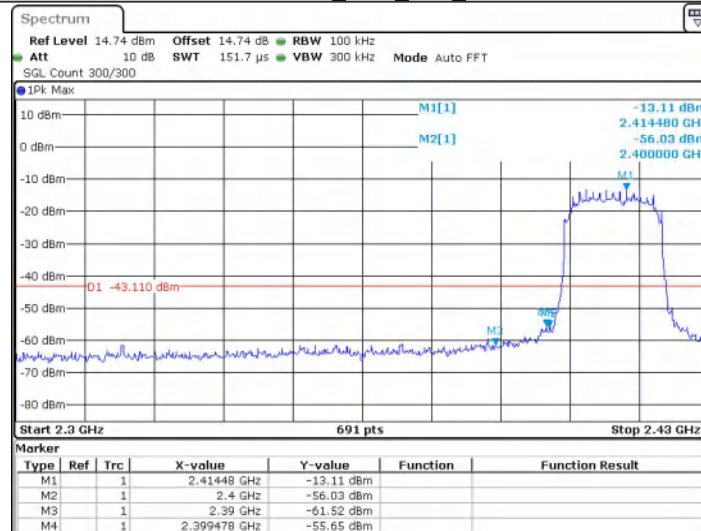


Date: 18 MAY 2026 22:11:45

11N20SISO_Ant1_High_2462

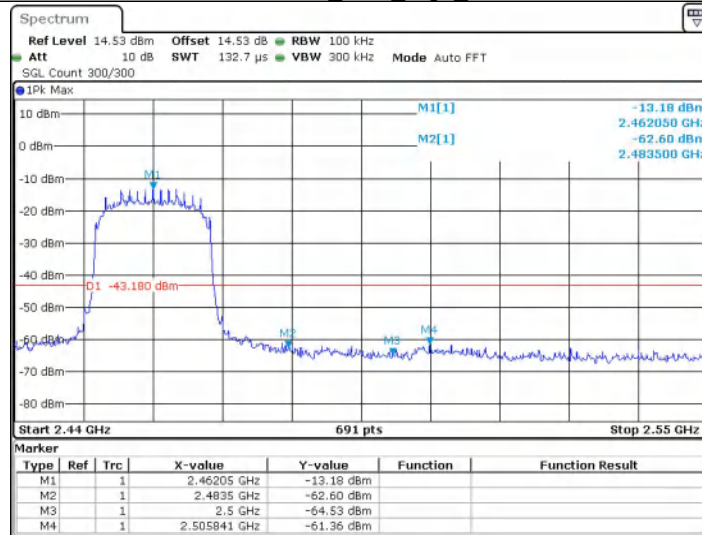

Date: 18 MAY 2026 22:15:11

11N40SISO_Ant1_Low_2422

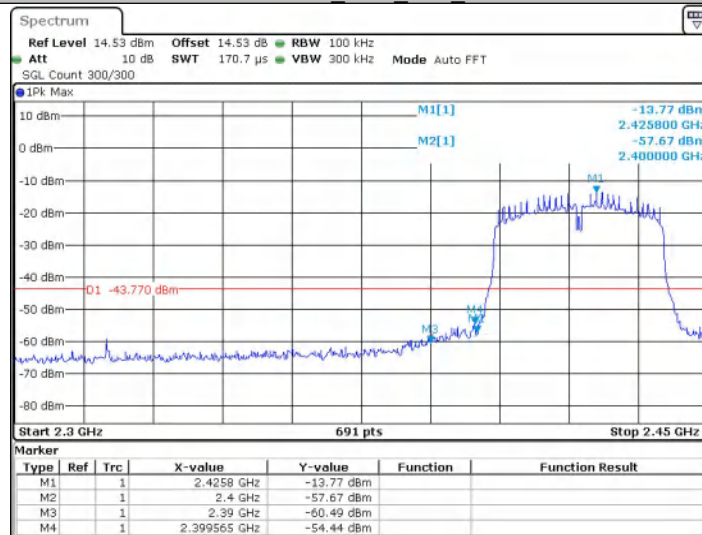


Date: 18 MAY 2026 22:16:58

11N40SISO_Ant1_High_2452



Date: 18 MAY 2026 22:20:14

5.8 RF Conducted Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 $\text{Offset} = \text{cable loss} + \text{attenuation factor}$
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	-9.67	-9.67	---	PASS
		30~1000	-9.67	-51.38	≤ -39.67	PASS
		1000~26500	-9.67	-47.88	≤ -39.67	PASS
	2437	Reference	-9.65	-9.65	---	PASS
		30~1000	-9.65	-52.04	≤ -39.65	PASS
		1000~26500	-9.65	-47.92	≤ -39.65	PASS
	2462	Reference	-11.38	-11.38	---	PASS
		30~1000	-11.38	-53.04	≤ -41.38	PASS
		1000~26500	-11.38	-48.21	≤ -41.38	PASS
11G	2412	Reference	-15.34	-15.34	---	PASS
		30~1000	-15.34	-51.19	≤ -45.34	PASS
		1000~26500	-15.34	-47.61	≤ -45.34	PASS
	2437	Reference	-15.69	-15.69	---	PASS
		30~1000	-15.69	-52.21	≤ -45.69	PASS
		1000~26500	-15.69	-48.57	≤ -45.69	PASS
	2462	Reference	-15.96	-15.96	---	PASS
		30~1000	-15.96	-51.54	≤ -45.96	PASS
		1000~26500	-15.96	-48.42	≤ -45.96	PASS
11N20SISO	2412	Reference	-14.81	-14.81	---	PASS
		30~1000	-14.81	-51.24	≤ -44.81	PASS
		1000~26500	-14.81	-47.72	≤ -44.81	PASS
	2437	Reference	-14.93	-14.93	---	PASS
		30~1000	-14.93	-51.41	≤ -44.93	PASS
		1000~26500	-14.93	-48.47	≤ -44.93	PASS
	2462	Reference	-17.23	-17.23	---	PASS
		30~1000	-17.23	-51.58	≤ -47.23	PASS
		1000~26500	-17.23	-47.77	≤ -47.23	PASS
11N40SISO	2422	Reference	-14.77	-14.77	---	PASS
		30~1000	-14.77	-52.42	≤ -44.77	PASS
		1000~26500	-14.77	-48.69	≤ -44.77	PASS
	2437	Reference	-16.73	-16.73	---	PASS
		30~1000	-16.73	-51.82	≤ -46.73	PASS
		1000~26500	-16.73	-48.78	≤ -46.73	PASS
	2452	Reference	-16.79	-16.79	---	PASS


		30~1000	-16.79	-51.14	≤ -46.79	PASS
		1000~26500	-16.79	-48.8	≤ -46.79	PASS

Test Graphs

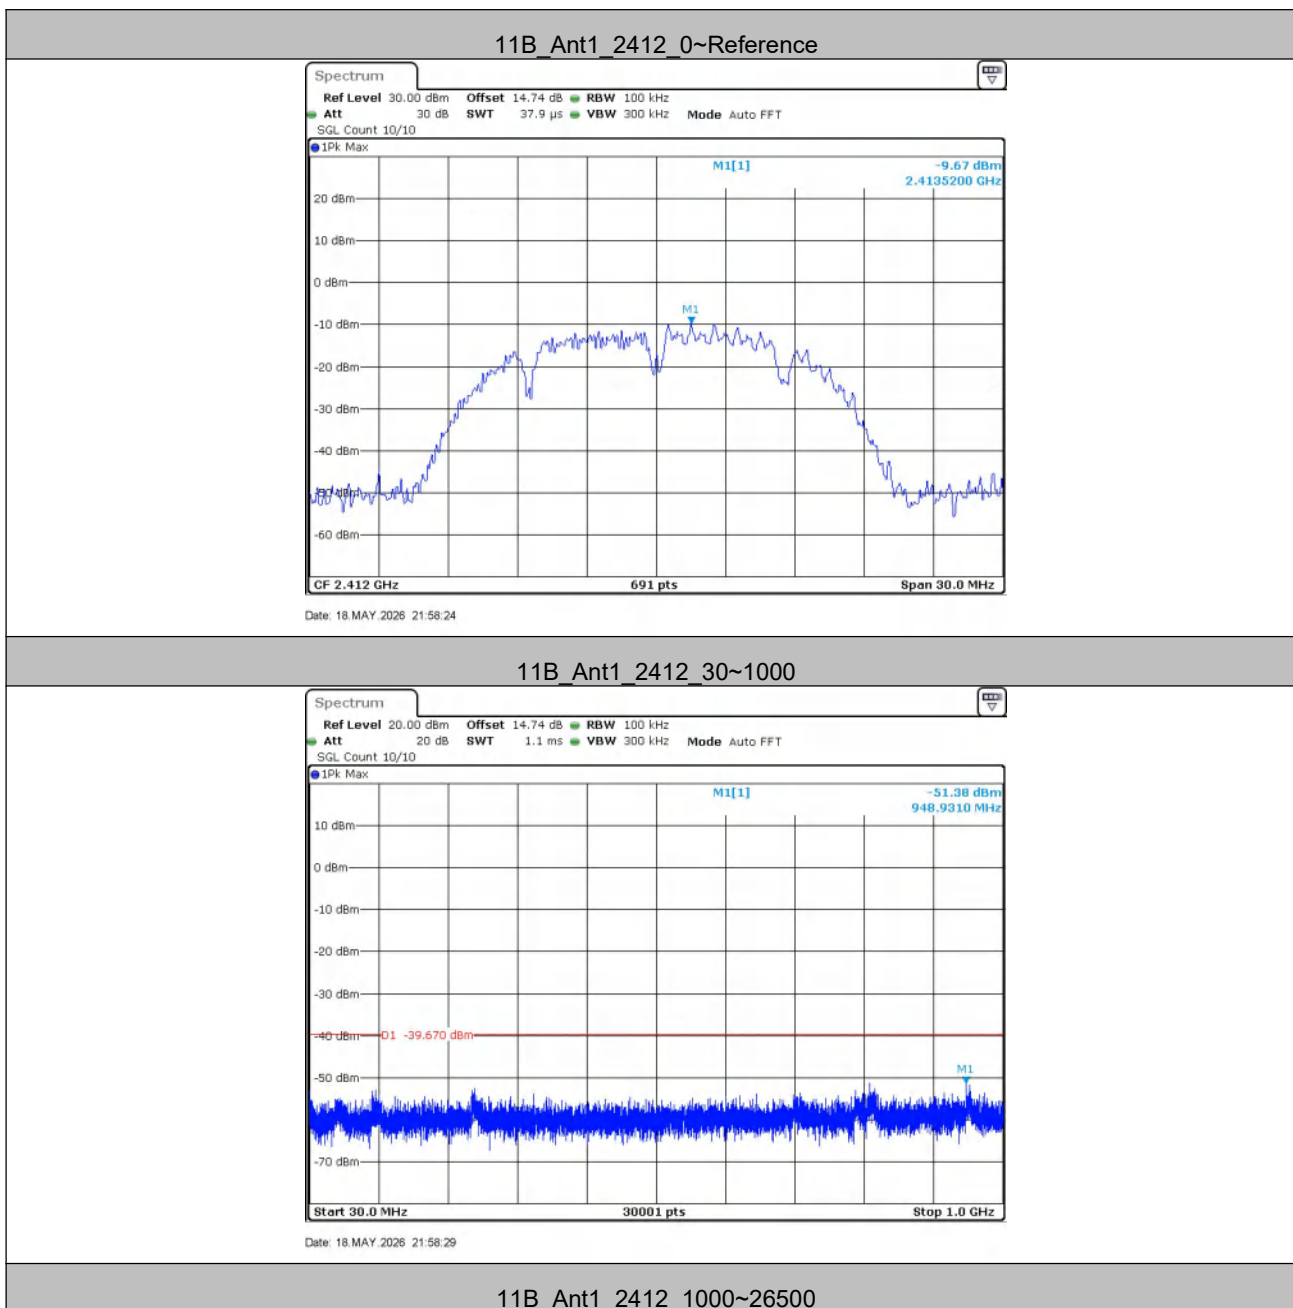


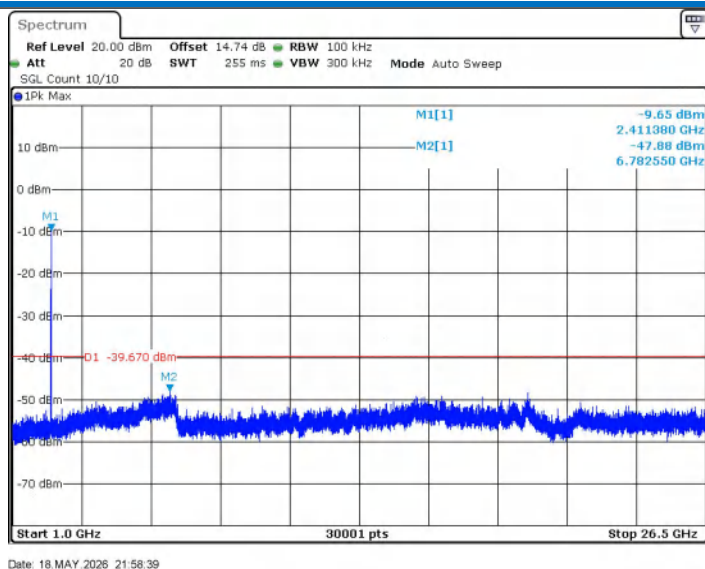


11B_Ant1_2437_0~Reference

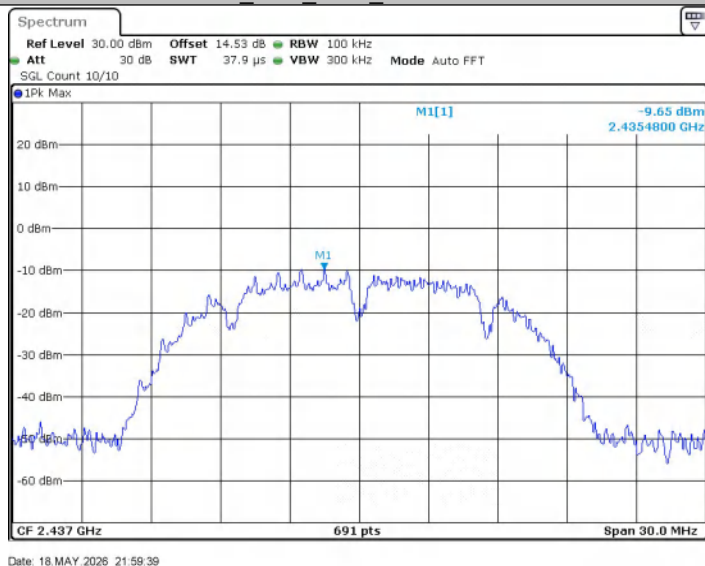

11B_Ant1_2437_30~1000

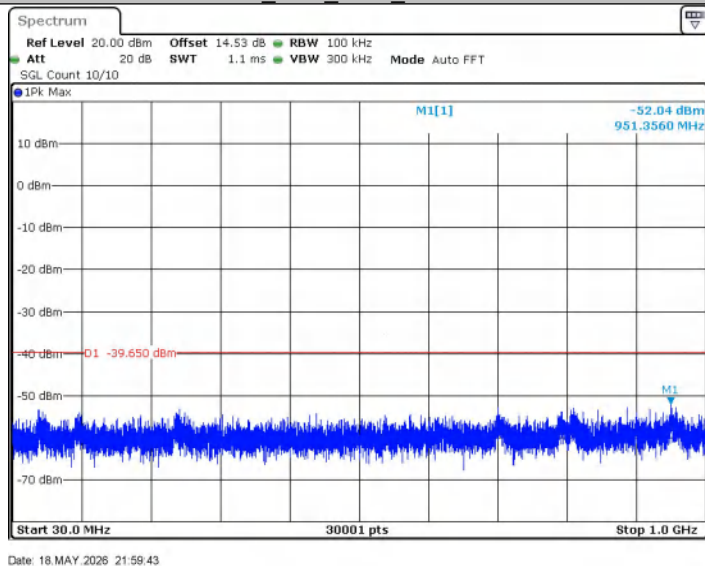


11B_Ant1_2437_1000~26500

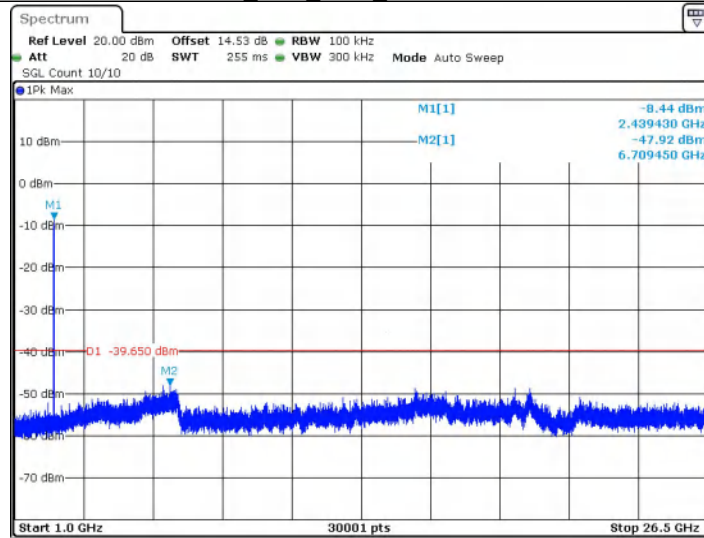


Date: 18 MAY 2026 21:59:54

11B_Ant1_2462_0~Reference

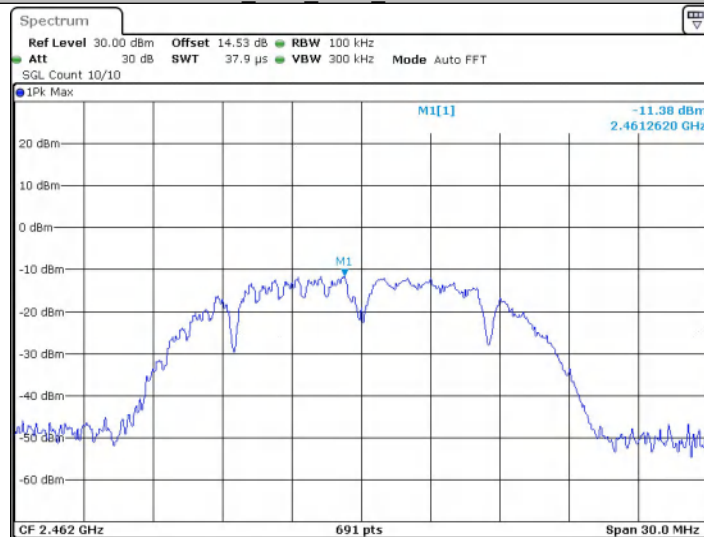


Date: 18 MAY 2026 22:02:47


11B_Ant1_2462_30~1000

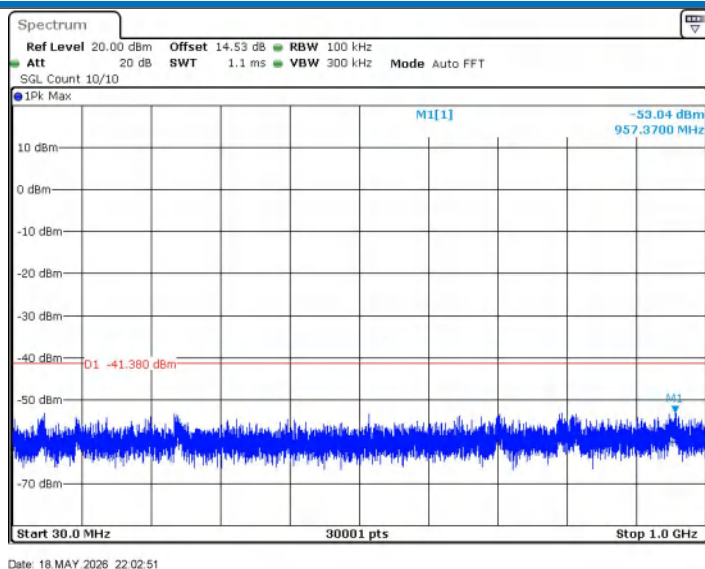


11B_Ant1_2462_1000~26500

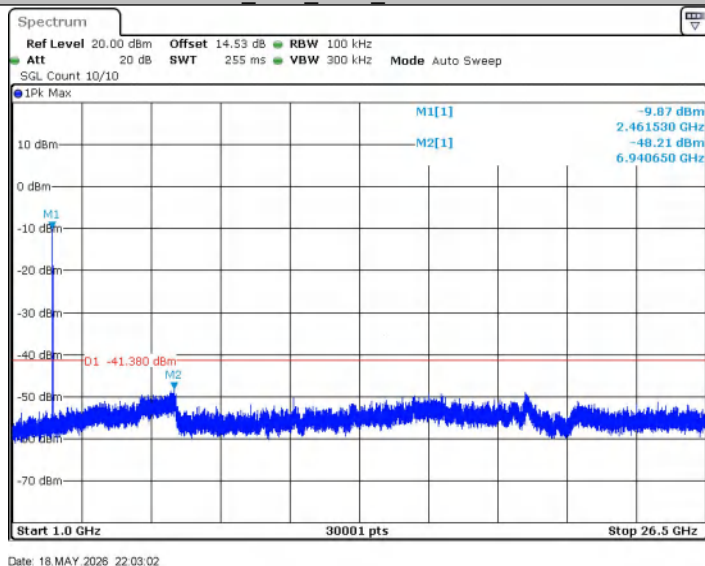

11G_Ant1_2412_0~Reference

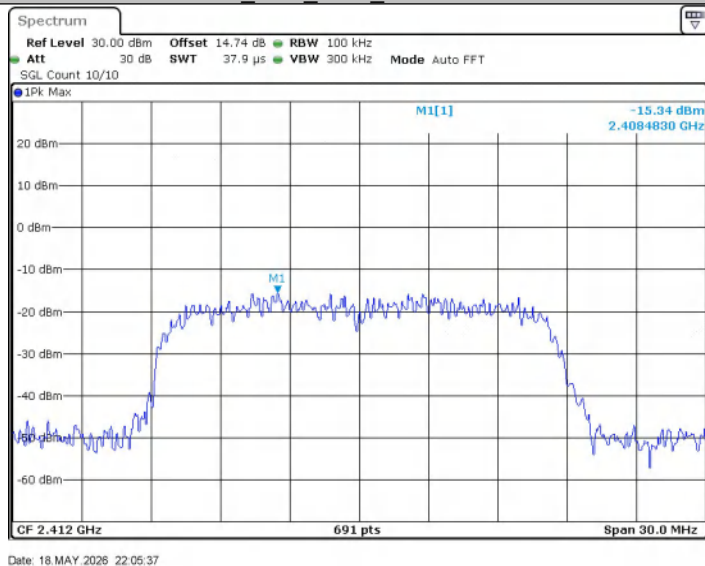


11G_Ant1_2412_30~1000

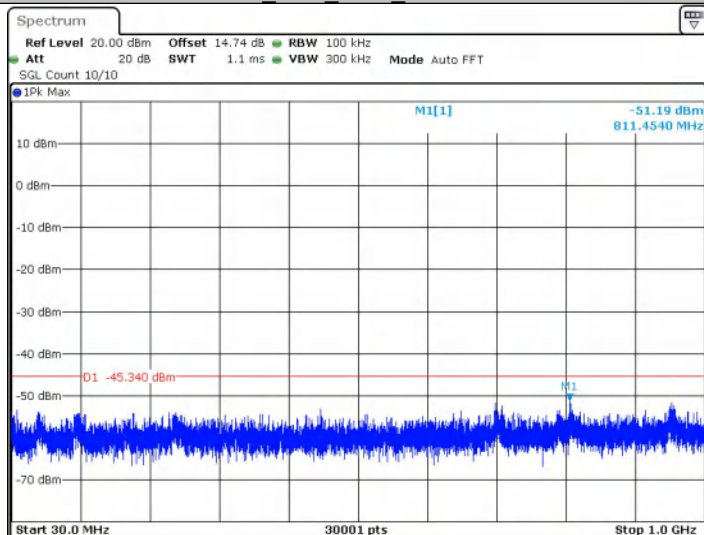


Date: 18 MAY 2026 22:05:41

11G_Ant1_2412_1000~26500

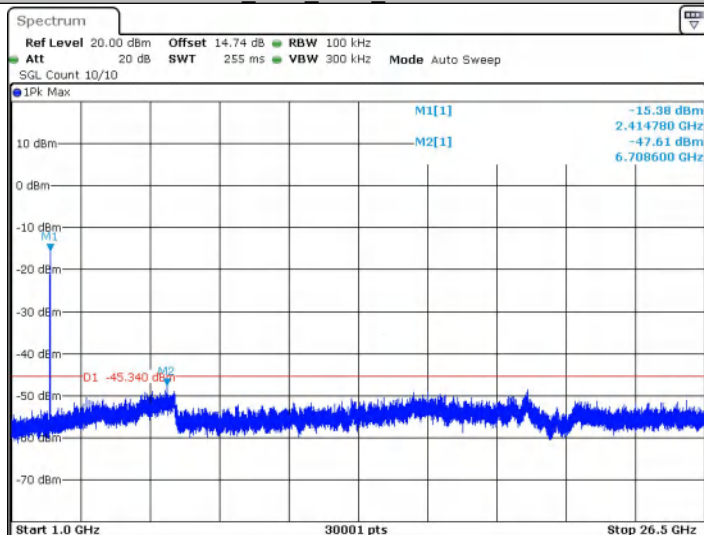


Date: 18 MAY 2026 22:05:52


11G_Ant1_2437_0~Reference

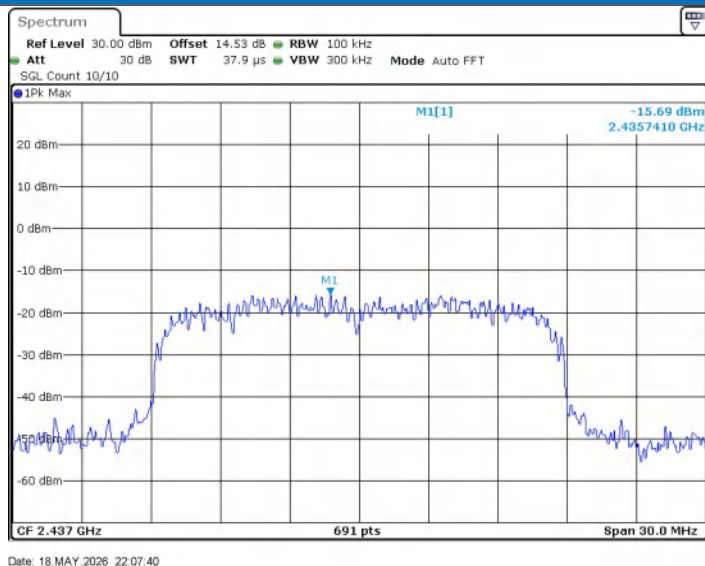


11G_Ant1_2437_30~1000

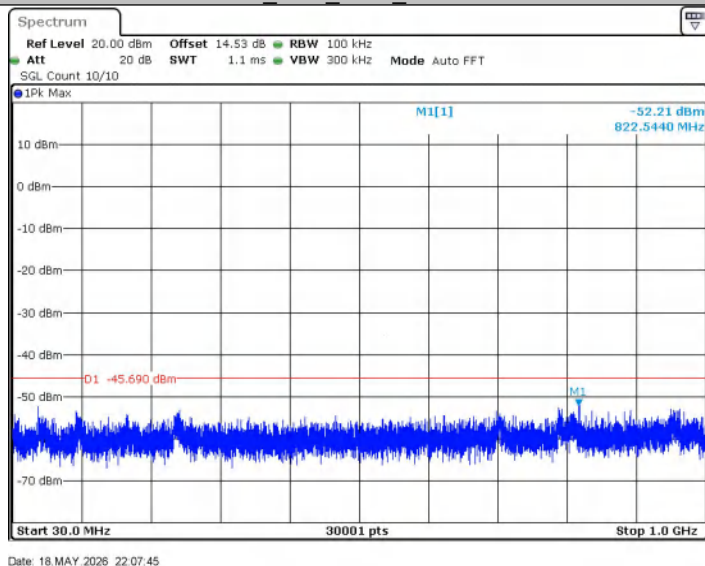

11G_Ant1_2437_1000~26500

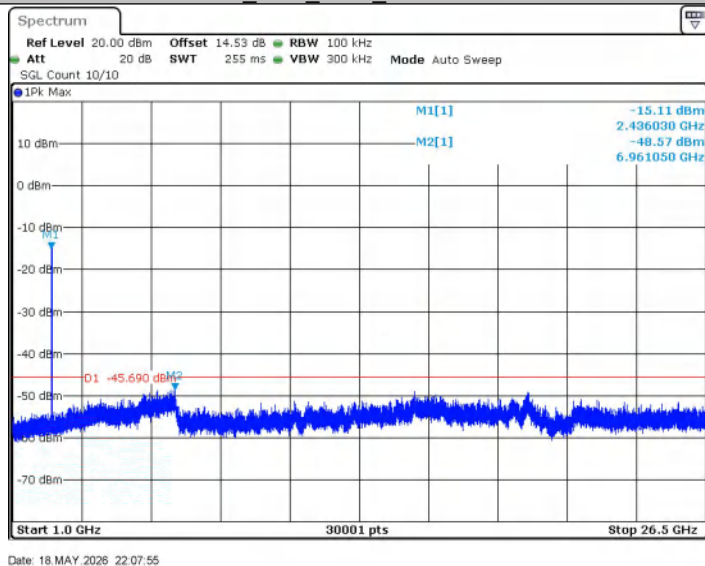


11G_Ant1_2462_0~Reference

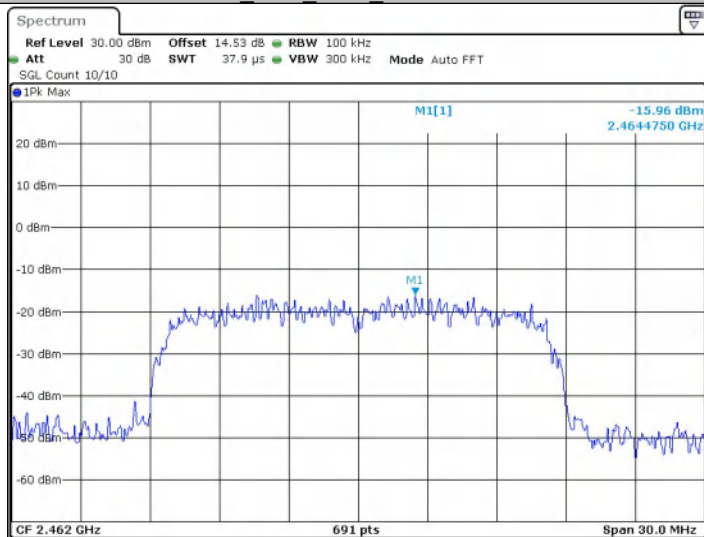


Date: 18 MAY 2026 22:09:48

11G_Ant1_2462_30~1000

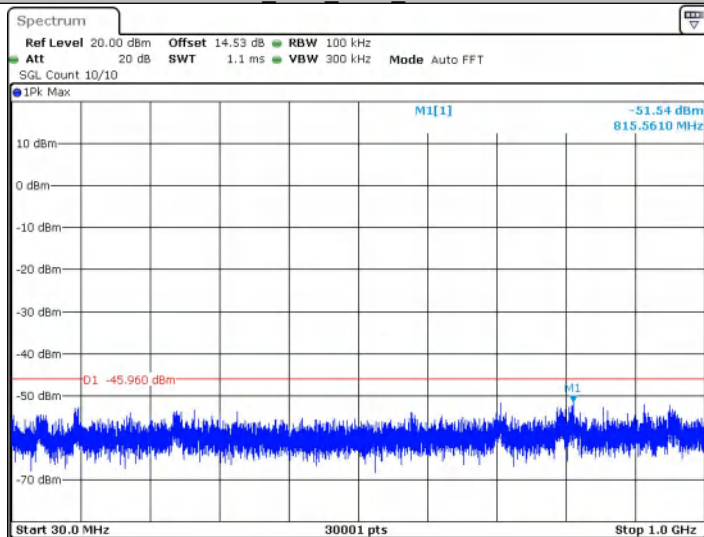


Date: 18 MAY 2026 22:09:52


11G_Ant1_2462_1000~26500

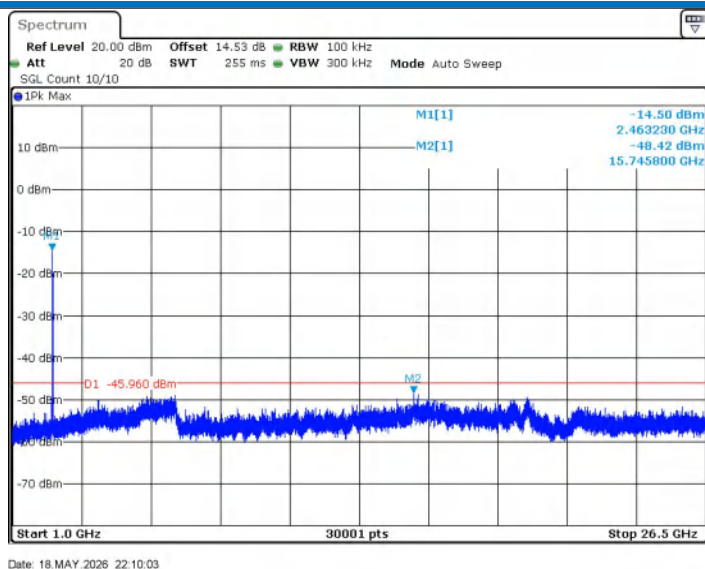


11N20SISO_Ant1_2412_0~Reference

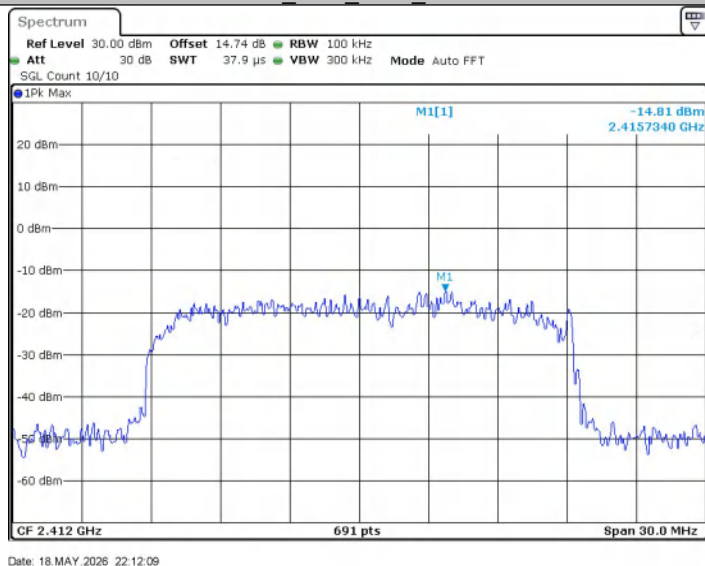

11N20SISO_Ant1_2412_30~1000

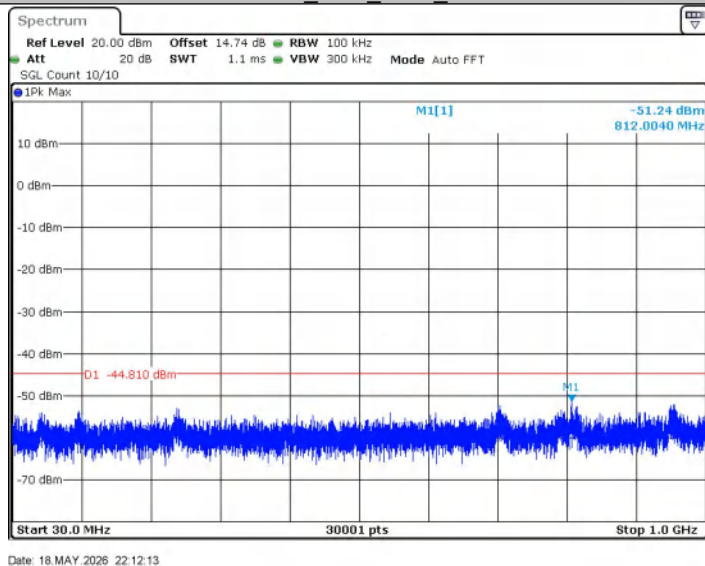


11N20SISO_Ant1_2412_1000~26500

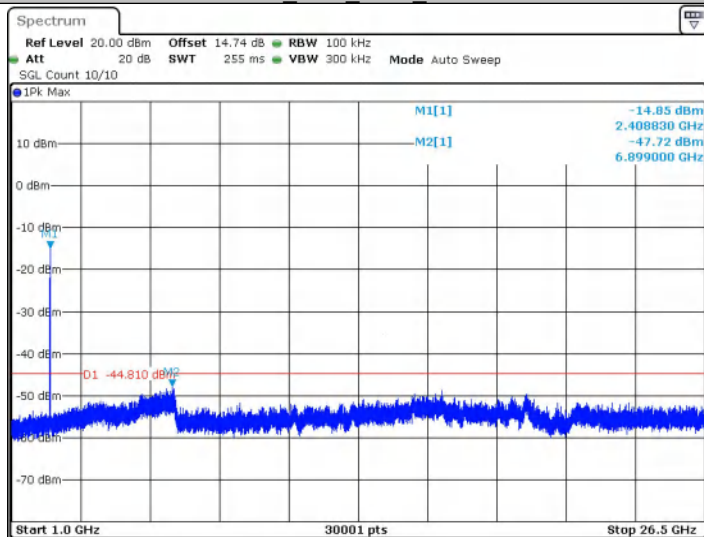


Date: 18 MAY 2026 22:12:24

11N20SISO_Ant1_2437_0~Reference

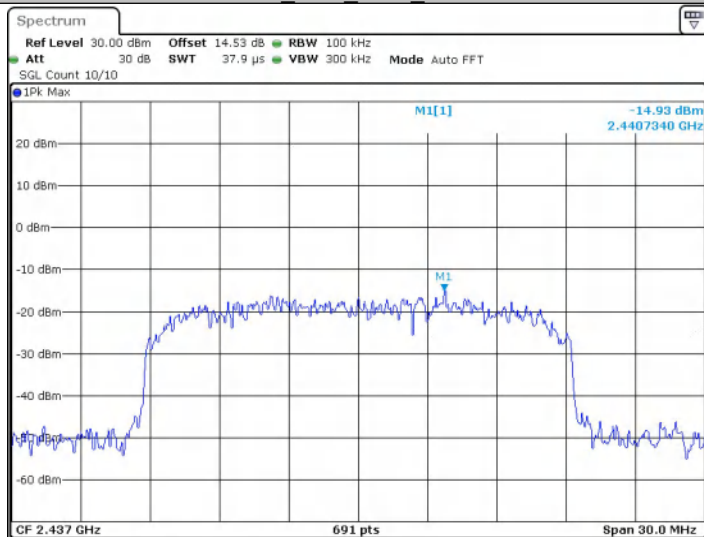


Date: 18 MAY 2026 22:13:31


11N20SISO_Ant1_2437_30~1000

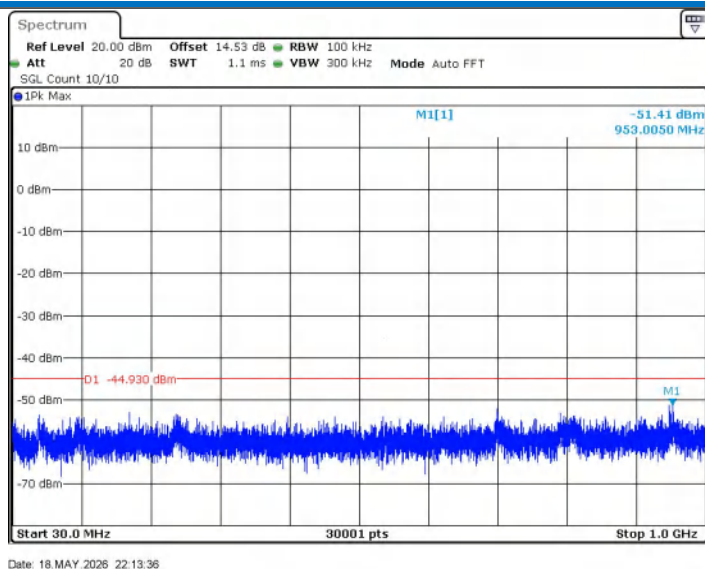


11N20SISO_Ant1_2437_1000~26500

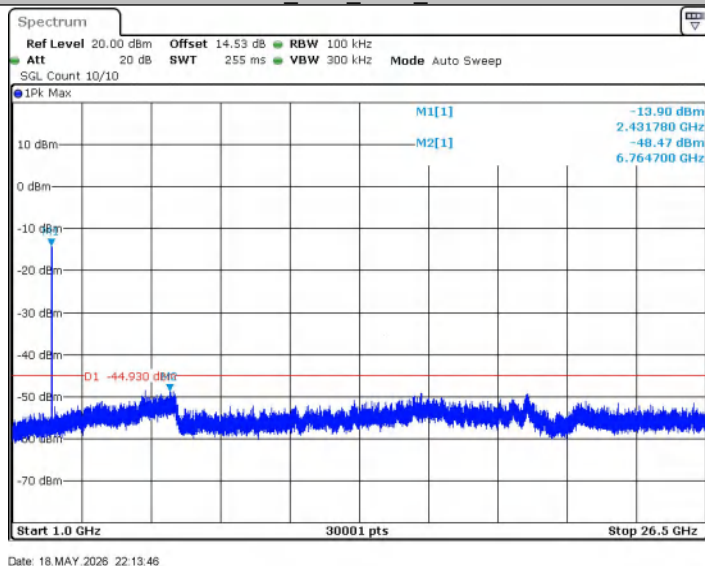

11N20SISO_Ant1_2462_0~Reference

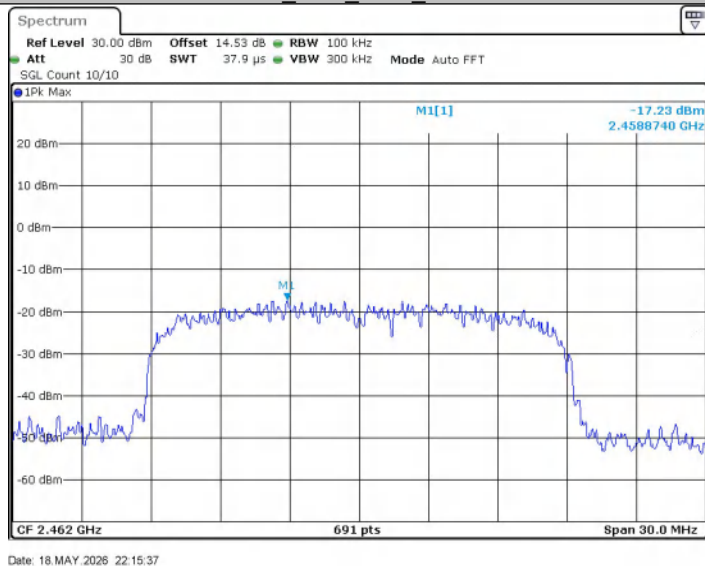


11N20SISO_Ant1_2462_30~1000

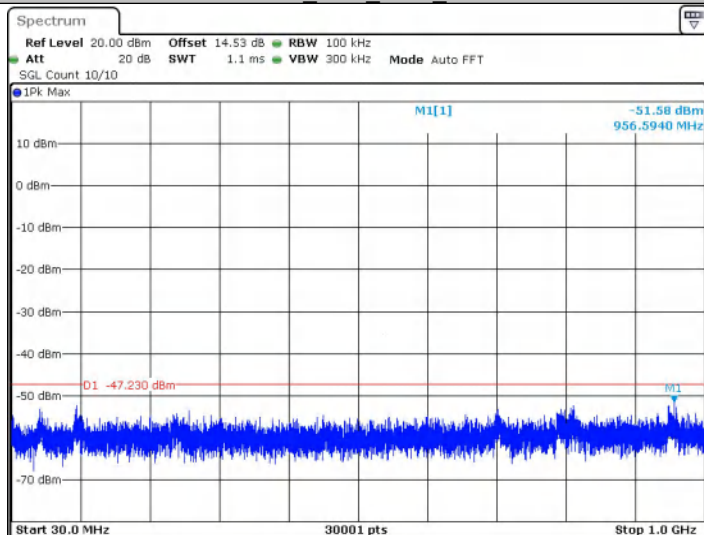


Date: 18 MAY 2026 22:15:41

11N20SISO_Ant1_2462_1000~26500

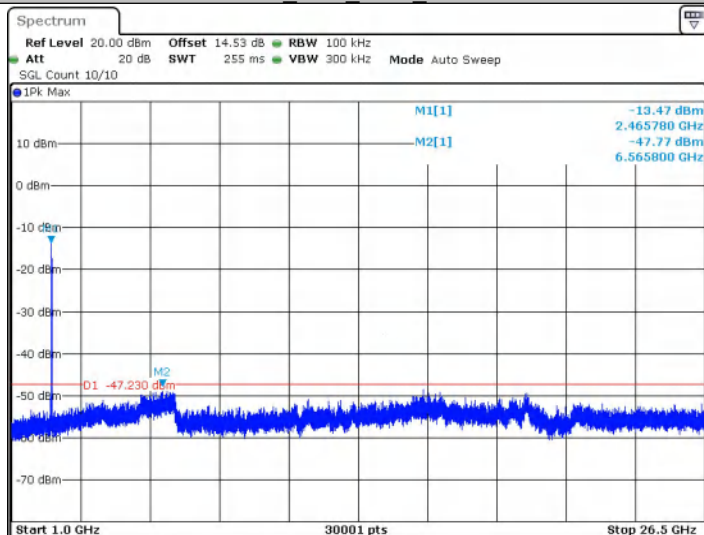


Date: 18 MAY 2026 22:15:52


11N40SISO_Ant1_2422_0~Reference

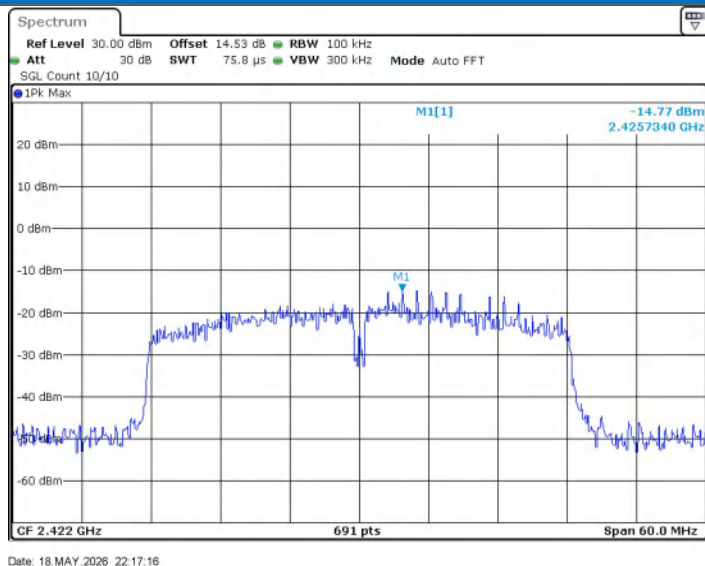


11N40SISO_Ant1_2422_30~1000

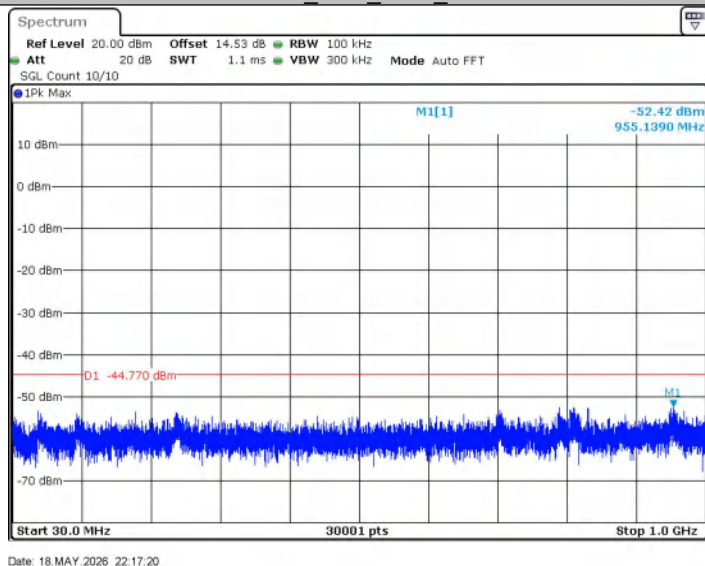

11N40SISO_Ant1_2422_1000~26500

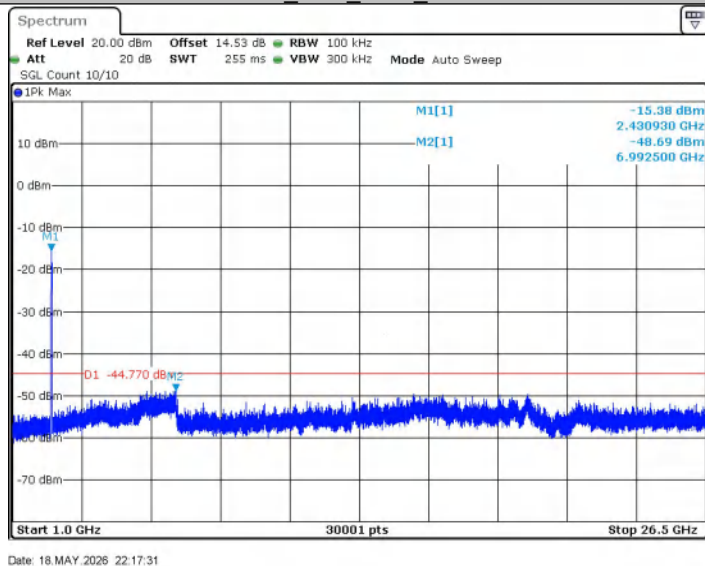


11N40SISO_Ant1_2437_0~Reference

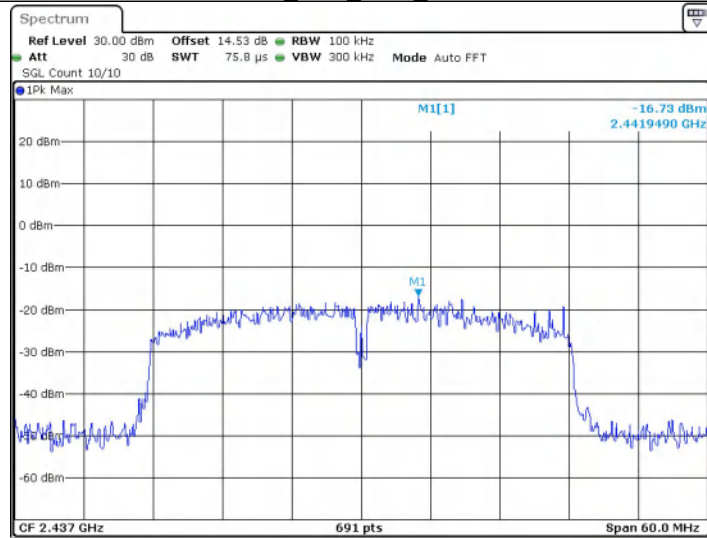


Date: 18 MAY 2026 22:18:59

11N40SISO_Ant1_2437_30~1000

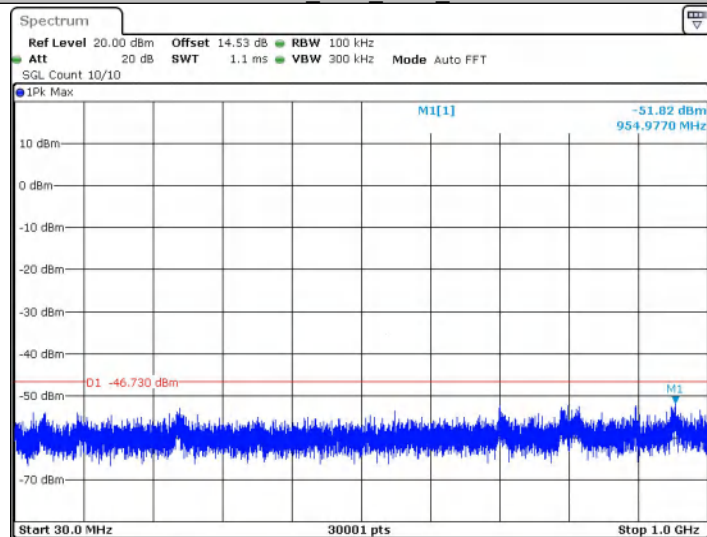


Date: 18 MAY 2026 22:19:03


11N40SISO_Ant1_2437_1000~26500

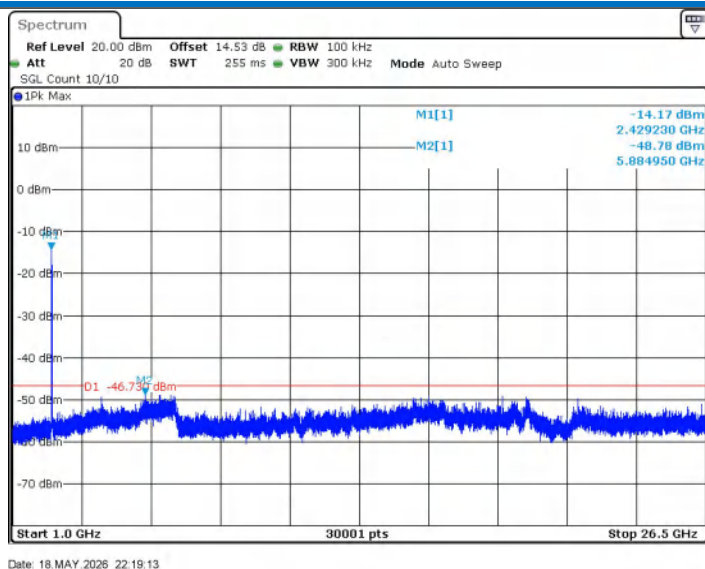


11N40SISO_Ant1_2452_0~Reference

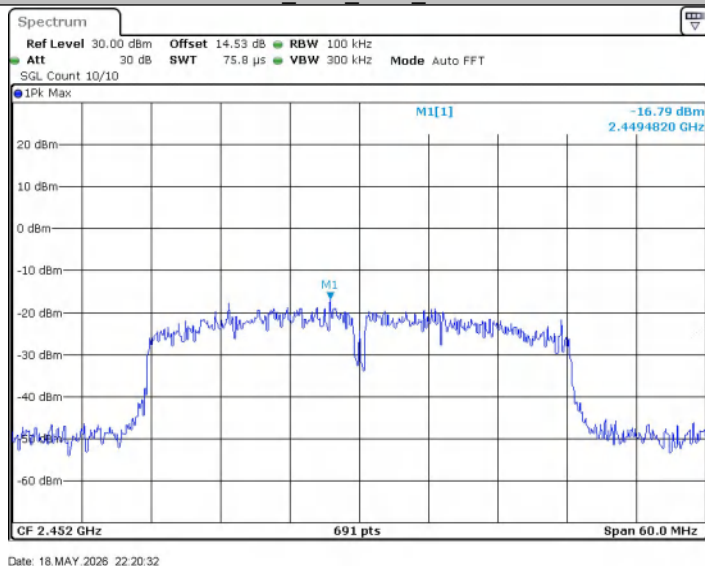

11N40SISO_Ant1_2452_30~1000

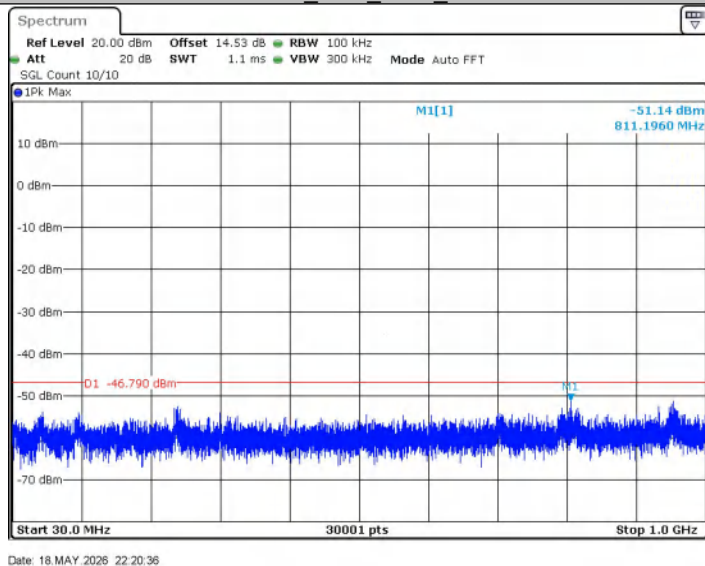

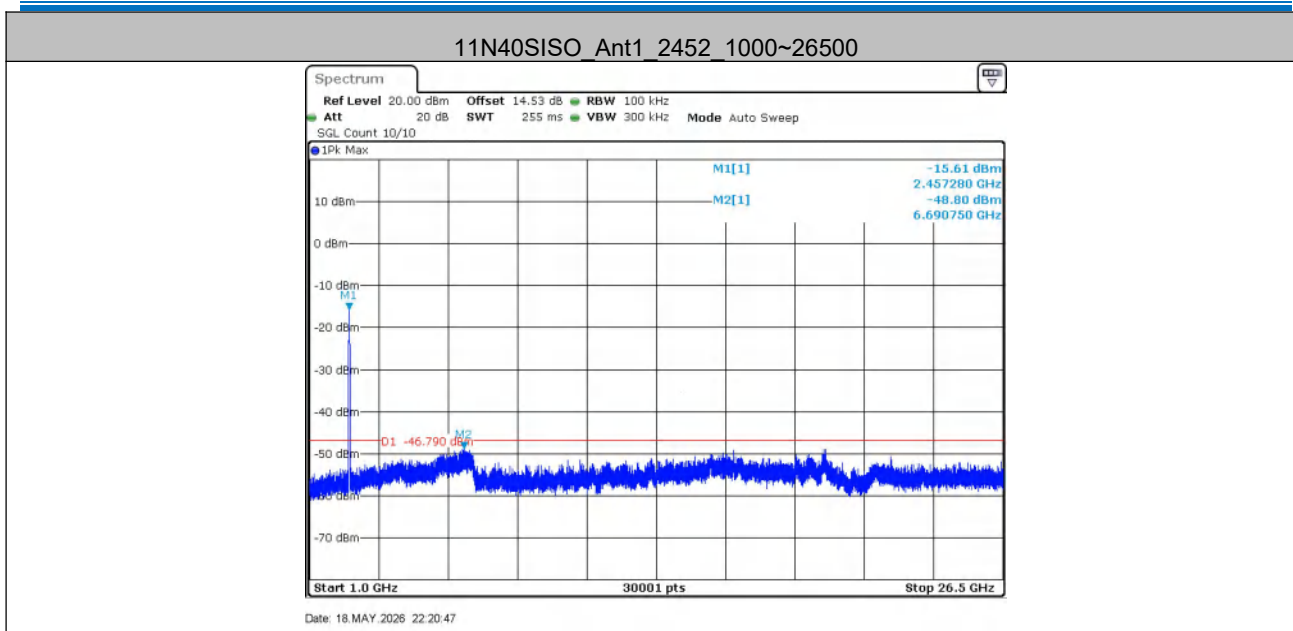

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

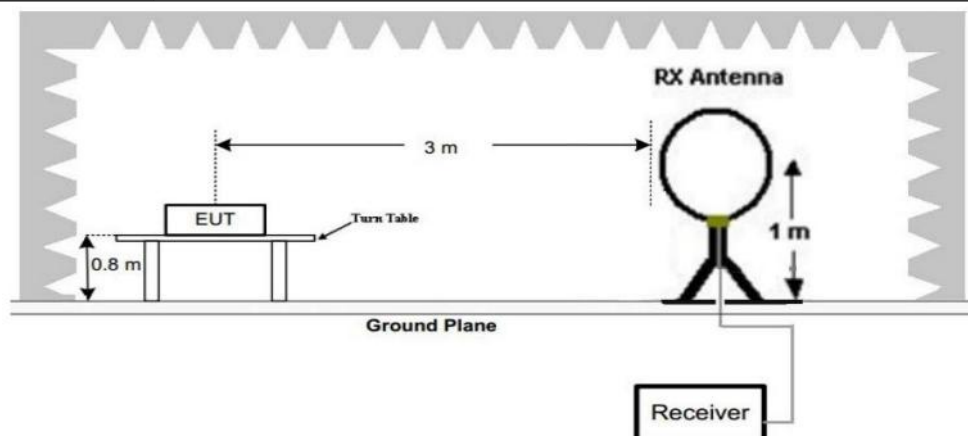


Figure 1. Below 30MHz

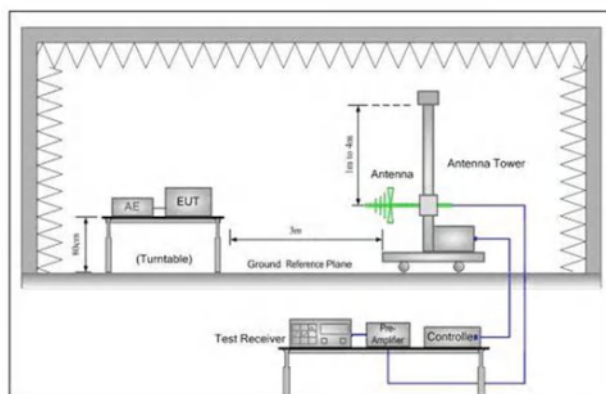


Figure 2. 30MHz to 1GHz

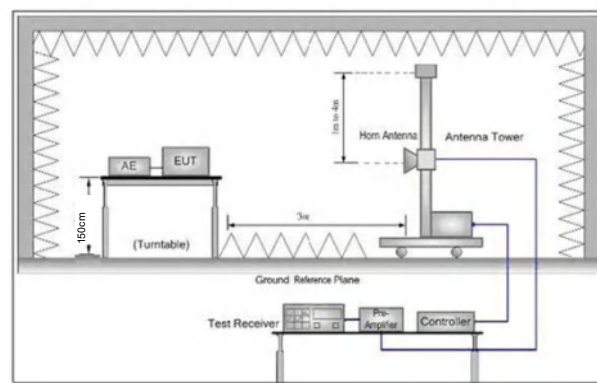


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

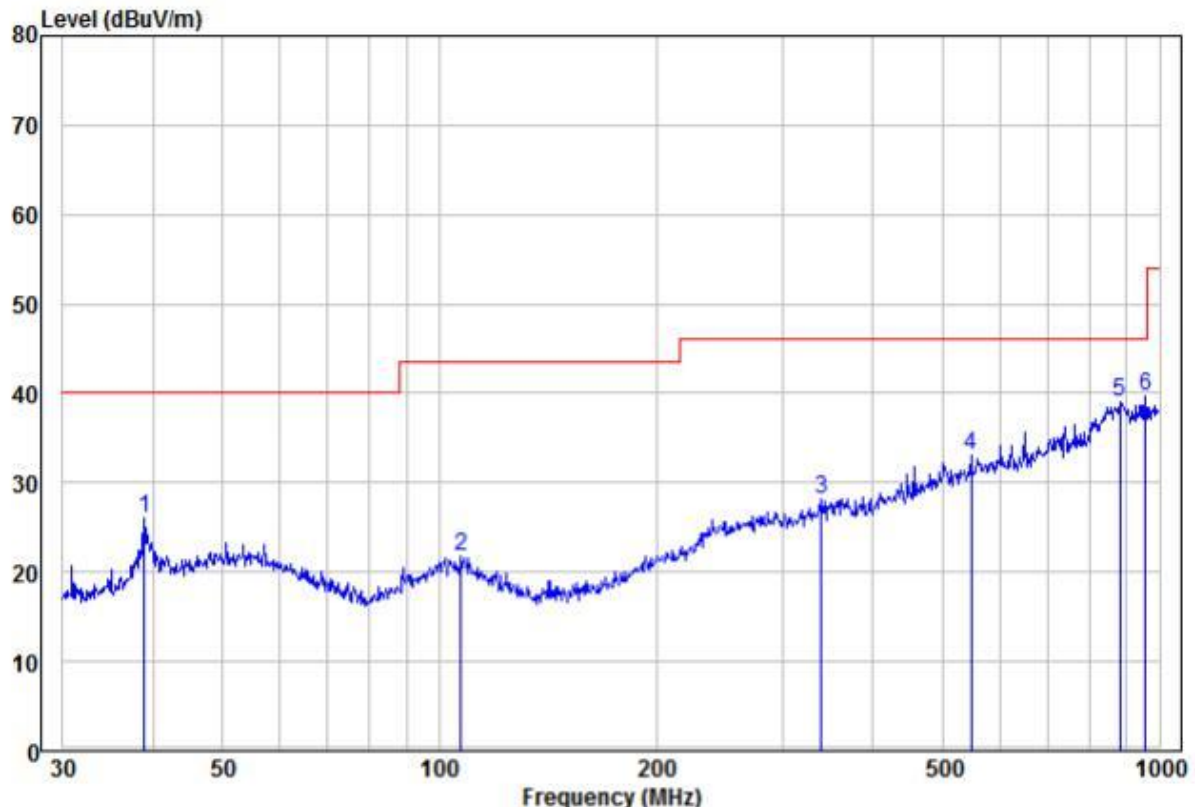

	Read Freq	Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	38.89	15.70	10.26	25.96	40.00	-14.04	Peak
2	107.13	9.91	11.86	21.77	43.50	-21.73	Peak
3	339.59	10.34	17.87	28.21	46.00	-17.79	Peak
4	547.10	11.47	21.57	33.04	46.00	-12.96	Peak
5	881.41	10.07	28.99	39.06	46.00	-6.94	Peak
6 pp	955.44	11.73	28.02	39.75	46.00	-6.25	Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

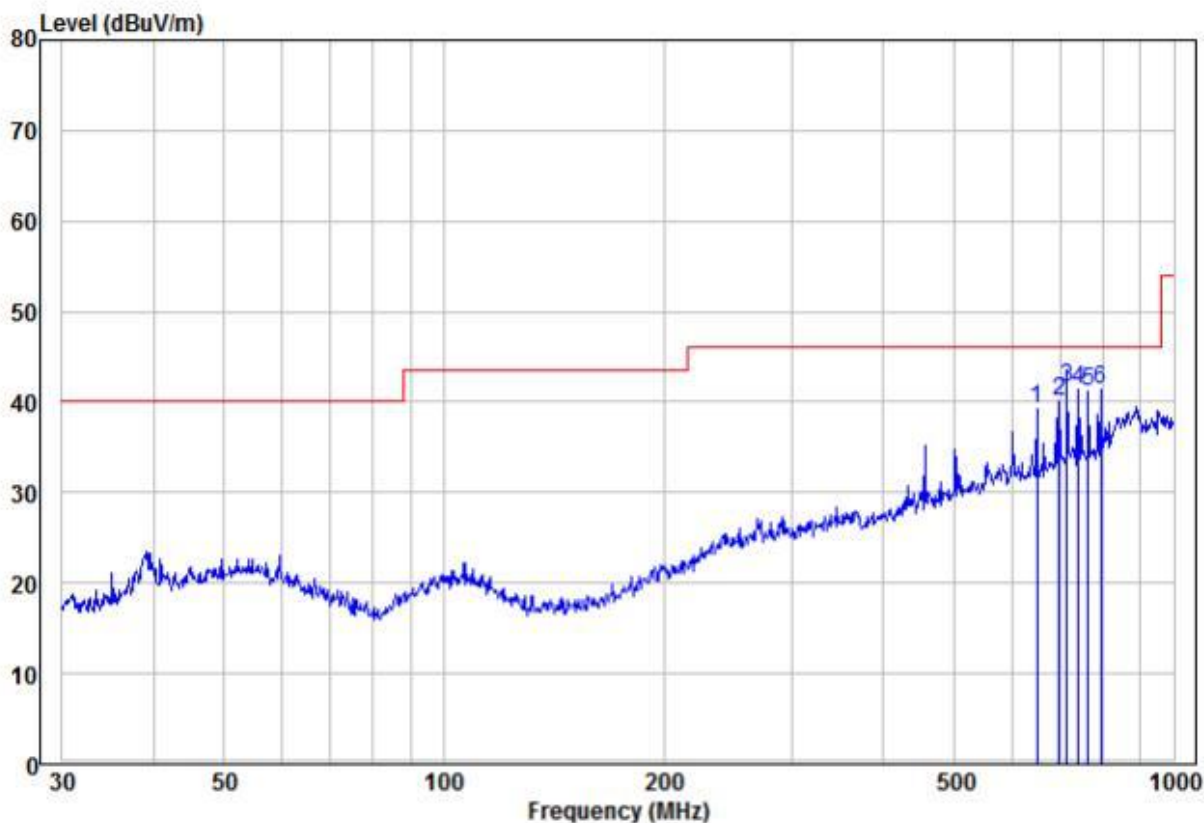

	Freq	Read		Limit	Over		
	MHz	Level	Factor	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	649.66	16.36	22.82	39.18	46.00	-6.82 Peak	HORIZONTAL
2	696.86	16.37	23.72	40.09	46.00	-5.91 Peak	HORIZONTAL
3 pp	714.17	17.69	23.91	41.60	46.00	-4.40 QP	HORIZONTAL
4	739.66	17.14	24.19	41.33	46.00	-4.67 Peak	HORIZONTAL
5	763.38	16.22	25.01	41.23	46.00	-4.77 Peak	HORIZONTAL
6 pk	793.40	15.92	25.48	41.40	46.00	-4.60 Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.33	-4.26	48.07	74	-25.93	peak	H	1.5	309
4824.000	36.96	-4.26	32.70	54	-21.30	AVG	H	1.5	64
7236.000	51.53	1.18	52.71	74	-21.29	peak	H	1.5	238
7236.000	38.75	1.18	39.93	54	-14.07	AVG	H	1.5	320
4824.000	56.24	-4.26	51.98	74	-22.02	peak	V	1.5	354
4824.000	38.89	-4.26	34.63	54	-19.37	AVG	V	1.5	357
7236.000	51.25	1.18	52.43	74	-21.57	peak	V	1.5	30
7236.000	36.73	1.18	37.91	54	-16.09	AVG	V	1.5	123

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.83	-4.12	48.71	74	-25.29	peak	H	1.5	12
4874.000	37.82	-4.12	33.70	54	-20.30	AVG	H	1.5	191
7311.000	49.43	1.46	50.89	74	-23.11	peak	H	1.5	198
7311.000	36.59	1.46	38.05	54	-15.95	AVG	H	1.5	326
4874.000	53.67	-4.12	49.55	74	-24.45	peak	V	1.5	13
4874.000	37.75	-4.12	33.63	54	-20.37	AVG	V	1.5	321
7311.000	49.37	1.46	50.83	74	-23.17	peak	V	1.5	246
7311.000	36.04	1.46	37.50	54	-16.50	AVG	V	1.5	245

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	52.17	-4.03	48.14	74	-25.86	peak	H	1.5	95
4924.000	38.11	-4.03	34.08	54	-19.92	AVG	H	1.5	250
7386.000	50.53	1.66	52.19	74	-21.81	peak	H	1.5	198
7386.000	37.14	1.66	38.80	54	-15.20	AVG	H	1.5	103
4924.000	54.29	-4.03	50.26	74	-23.74	peak	V	1.5	208
4924.000	38.69	-4.03	34.66	54	-19.34	AVG	V	1.5	270
7386.000	50.50	1.66	52.16	74	-21.84	peak	V	1.5	14
7386.000	37.59	1.66	39.25	54	-14.75	AVG	V	1.5	208

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.78	-4.26	48.52	74	-25.48	peak	H	1.5	11
4824.000	37.44	-4.26	33.18	54	-20.82	AVG	H	1.5	76
7236.000	50.46	1.18	51.64	74	-22.36	peak	H	1.5	85
7236.000	38.76	1.18	39.94	54	-14.06	AVG	H	1.5	38
4824.000	55.45	-4.26	51.19	74	-22.81	peak	V	1.5	43
4824.000	38.94	-4.26	34.68	54	-19.32	AVG	V	1.5	264
7236.000	51.84	1.18	53.02	74	-20.98	peak	V	1.5	183
7236.000	35.73	1.18	36.91	54	-17.09	AVG	V	1.5	250

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	53.02	-4.12	48.90	74	-25.10	peak	H	1.5	34
4874.000	37.27	-4.12	33.15	54	-20.85	AVG	H	1.5	98
7311.000	48.94	1.46	50.40	74	-23.60	peak	H	1.5	55
7311.000	35.11	1.46	36.57	54	-17.43	AVG	H	1.5	312
4874.000	53.76	-4.12	49.64	74	-24.36	peak	V	1.5	147
4874.000	36.72	-4.12	32.60	54	-21.40	AVG	V	1.5	147
7311.000	49.21	1.46	50.67	74	-23.33	peak	V	1.5	115
7311.000	35.01	1.46	36.47	54	-17.53	AVG	V	1.5	217

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	53.15	-4.03	49.12	74	-24.88	peak	H	1.5	275
4924.000	38.44	-4.03	34.41	54	-19.59	AVG	H	1.5	110
7386.000	49.72	1.66	51.38	74	-22.62	peak	H	1.5	258
7386.000	37.71	1.66	39.37	54	-14.63	AVG	H	1.5	275
4924.000	54.30	-4.03	50.27	74	-23.73	peak	V	1.5	205
4924.000	38.14	-4.03	34.11	54	-19.89	AVG	V	1.5	276
7386.000	50.00	1.66	51.66	74	-22.34	peak	V	1.5	224
7386.000	36.09	1.66	37.75	54	-16.25	AVG	V	1.5	218

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.77	-4.26	48.51	74	-25.49	peak	H	1.5	271
4824.000	36.22	-4.26	31.96	54	-22.04	AVG	H	1.5	4
7236.000	50.85	1.18	52.03	74	-21.97	peak	H	1.5	213
7236.000	37.85	1.18	39.03	54	-14.97	AVG	H	1.5	161
4824.000	56.21	-4.26	51.95	74	-22.05	peak	V	1.5	151
4824.000	39.74	-4.26	35.48	54	-18.52	AVG	V	1.5	246
7236.000	51.96	1.18	53.14	74	-20.86	peak	V	1.5	6
7236.000	36.13	1.18	37.31	54	-16.69	AVG	V	1.5	351

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.14	-4.12	48.02	74	-25.98	peak	H	1.5	12
4874.000	37.58	-4.12	33.46	54	-20.54	AVG	H	1.5	226
7311.000	49.59	1.46	51.05	74	-22.95	peak	H	1.5	42
7311.000	36.09	1.46	37.55	54	-16.45	AVG	H	1.5	155
4874.000	54.18	-4.12	50.06	74	-23.94	peak	V	1.5	353
4874.000	37.45	-4.12	33.33	54	-20.67	AVG	V	1.5	42
7311.000	49.06	1.46	50.52	74	-23.48	peak	V	1.5	244
7311.000	35.00	1.46	36.46	54	-17.54	AVG	V	1.5	174

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.46	-4.03	47.43	74	-26.57	peak	H	1.5	40
4924.000	38.73	-4.03	34.70	54	-19.30	AVG	H	1.5	240
7386.000	49.80	1.66	51.46	74	-22.54	peak	H	1.5	234
7386.000	36.17	1.66	37.83	54	-16.17	AVG	H	1.5	290
4924.000	54.42	-4.03	50.39	74	-23.61	peak	V	1.5	187
4924.000	38.30	-4.03	34.27	54	-19.73	AVG	V	1.5	247
7386.000	49.53	1.66	51.19	74	-22.81	peak	V	1.5	182
7386.000	37.41	1.66	39.07	54	-14.93	AVG	V	1.5	194

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.26	-4.26	49.00	74	-25.00	peak	H	1.5	145
4824.000	36.65	-4.26	32.39	54	-21.61	AVG	H	1.5	203
7236.000	51.13	1.18	52.31	74	-21.69	peak	H	1.5	130
7236.000	37.18	1.18	38.36	54	-15.64	AVG	H	1.5	133
4824.000	54.31	-4.26	50.05	74	-23.95	peak	V	1.5	297
4824.000	38.23	-4.26	33.97	54	-20.03	AVG	V	1.5	44
7236.000	52.21	1.18	53.39	74	-20.61	peak	V	1.5	325
7236.000	35.65	1.18	36.83	54	-17.17	AVG	V	1.5	226

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.98	-4.12	48.86	74	-25.14	peak	H	1.5	285
4874.000	37.82	-4.12	33.70	54	-20.30	AVG	H	1.5	342
7311.000	48.84	1.46	50.30	74	-23.70	peak	H	1.5	143
7311.000	36.36	1.46	37.82	54	-16.18	AVG	H	1.5	341
4874.000	53.30	-4.12	49.18	74	-24.82	peak	V	1.5	356
4874.000	36.10	-4.12	31.98	54	-22.02	AVG	V	1.5	292
7311.000	48.48	1.46	49.94	74	-24.06	peak	V	1.5	359
7311.000	35.41	1.46	36.87	54	-17.13	AVG	V	1.5	194

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.72	-4.03	47.69	74	-26.31	peak	H	1.5	79
4924.000	38.37	-4.03	34.34	54	-19.66	AVG	H	1.5	35
7386.000	49.73	1.66	51.39	74	-22.61	peak	H	1.5	23
7386.000	37.51	1.66	39.17	54	-14.83	AVG	H	1.5	94
4924.000	53.70	-4.03	49.67	74	-24.33	peak	V	1.5	57
4924.000	37.84	-4.03	33.81	54	-20.19	AVG	V	1.5	205
7386.000	51.10	1.66	52.76	74	-21.24	peak	V	1.5	325
7386.000	37.60	1.66	39.26	54	-14.74	AVG	V	1.5	8

Remark:

- 1) The MCS0 of rate of 802.11n40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2020		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

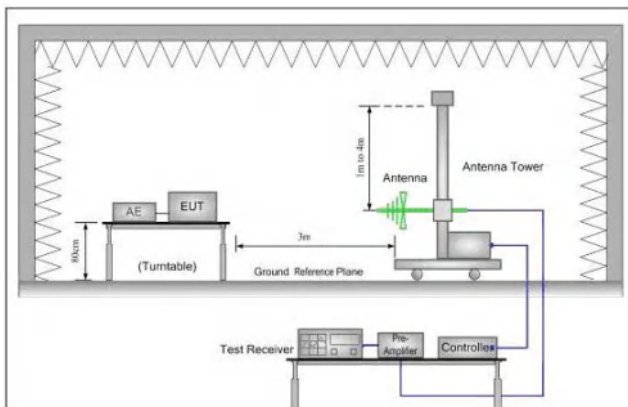


Figure 1. 30MHz to 1GHz

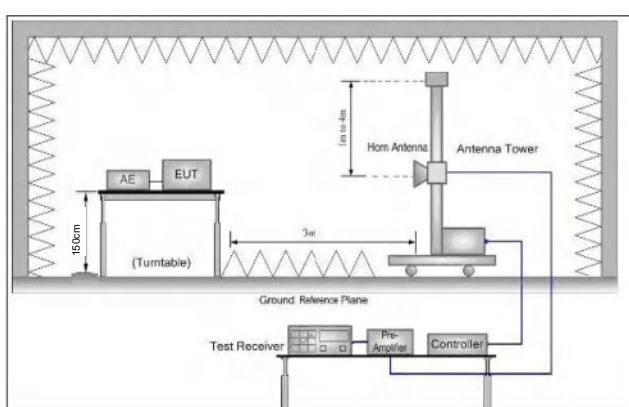


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.81	-9.2	49.61	74	-24.39	peak	H	1.5	66
2390.000	44.23	-9.2	35.03	54	-18.97	AVG	H	1.5	5
2400.000	59.53	-9.39	50.14	74	-23.86	peak	H	1.5	231
2400.000	46.19	-9.39	36.80	54	-17.20	AVG	H	1.5	38
2390.000	58.49	-9.2	49.29	74	-24.71	peak	V	1.5	192
2390.000	44.12	-9.2	34.92	54	-19.08	AVG	V	1.5	301
2400.000	59.26	-9.39	49.87	74	-24.13	peak	V	1.5	233
2400.000	46.46	-9.39	37.07	54	-16.93	AVG	V	1.5	353

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	58.41	-9.29	49.12	74	-24.88	peak	H	1.5	103
2483.500	43.62	-9.29	34.33	54	-19.67	AVG	H	1.5	162
2483.500	57.97	-9.29	48.68	74	-25.32	peak	V	1.5	218
2483.500	46.13	-9.29	36.84	54	-17.16	AVG	V	1.5	136

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.17	-9.2	49.97	74	-24.03	peak	H	1.5	316
2390.000	44.16	-9.2	34.96	54	-19.04	AVG	H	1.5	31
2400.000	59.67	-9.39	50.28	74	-23.72	peak	H	1.5	167
2400.000	46.49	-9.39	37.10	54	-16.90	AVG	H	1.5	233
2390.000	59.23	-9.2	50.03	74	-23.97	peak	V	1.5	167
2390.000	44.52	-9.2	35.32	54	-18.68	AVG	V	1.5	163
2400.000	59.74	-9.39	50.35	74	-23.65	peak	V	1.5	277
2400.000	46.20	-9.39	36.81	54	-17.19	AVG	V	1.5	235

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	58.05	-9.29	48.76	74	-25.24	peak	H	1.5	283
2483.500	44.35	-9.29	35.06	54	-18.94	AVG	H	1.5	137
2483.500	57.97	-9.29	48.68	74	-25.32	peak	V	1.5	108
2483.500	46.37	-9.29	37.08	54	-16.92	AVG	V	1.5	142

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.55	-9.2	49.35	74	-24.65	peak	H	1.5	205
2390.000	44.10	-9.2	34.90	54	-19.10	AVG	H	1.5	93
2400.000	59.84	-9.39	50.45	74	-23.55	peak	H	1.5	327
2400.000	46.77	-9.39	37.38	54	-16.62	AVG	H	1.5	100
2390.000	58.31	-9.2	49.11	74	-24.89	peak	V	1.5	290
2390.000	44.06	-9.2	34.86	54	-19.14	AVG	V	1.5	42
2400.000	59.54	-9.39	50.15	74	-23.85	peak	V	1.5	273
2400.000	46.22	-9.39	36.83	54	-17.17	AVG	V	1.5	47

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.83	-9.29	48.54	74	-25.46	peak	H	1.5	24
2483.500	43.94	-9.29	34.65	54	-19.35	AVG	H	1.5	3
2483.500	58.41	-9.29	49.12	74	-24.88	peak	V	1.5	354
2483.500	45.91	-9.29	36.62	54	-17.38	AVG	V	1.5	34

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.78	-9.2	49.58	74	-24.42	peak	H	1.5	237
2390.000	44.38	-9.2	35.18	54	-18.82	AVG	H	1.5	108
2400.000	59.81	-9.39	50.42	74	-23.58	peak	H	1.5	337
2400.000	46.44	-9.39	37.05	54	-16.95	AVG	H	1.5	342
2390.000	58.25	-9.2	49.05	74	-24.95	peak	V	1.5	334
2390.000	44.72	-9.2	35.52	54	-18.48	AVG	V	1.5	6
2400	59.24	-9.39	49.85	74	-24.15	peak	V	1.5	79
2400	46.95	-9.39	37.56	54	-16.44	AVG	V	1.5	25

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.51	-9.29	48.22	74	-25.78	peak	H	1.5	115
2483.500	44.05	-9.29	34.76	54	-19.24	AVG	H	1.5	176
2483.500	58.08	-9.29	48.79	74	-25.21	peak	V	1.5	133
2483.500	45.82	-9.29	36.53	54	-17.47	AVG	V	1.5	296

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

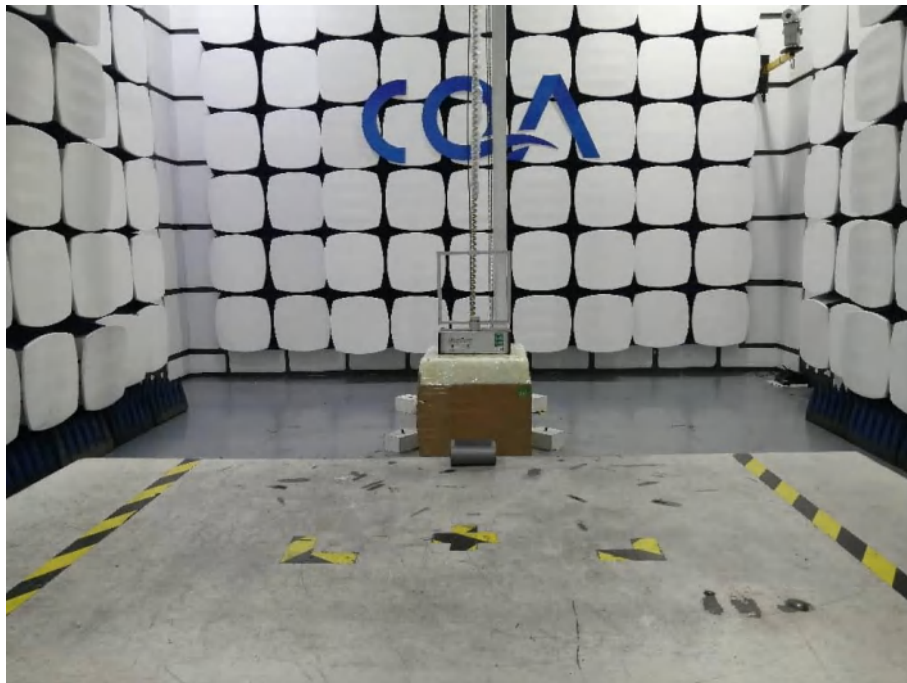

30MHz~1GHz:

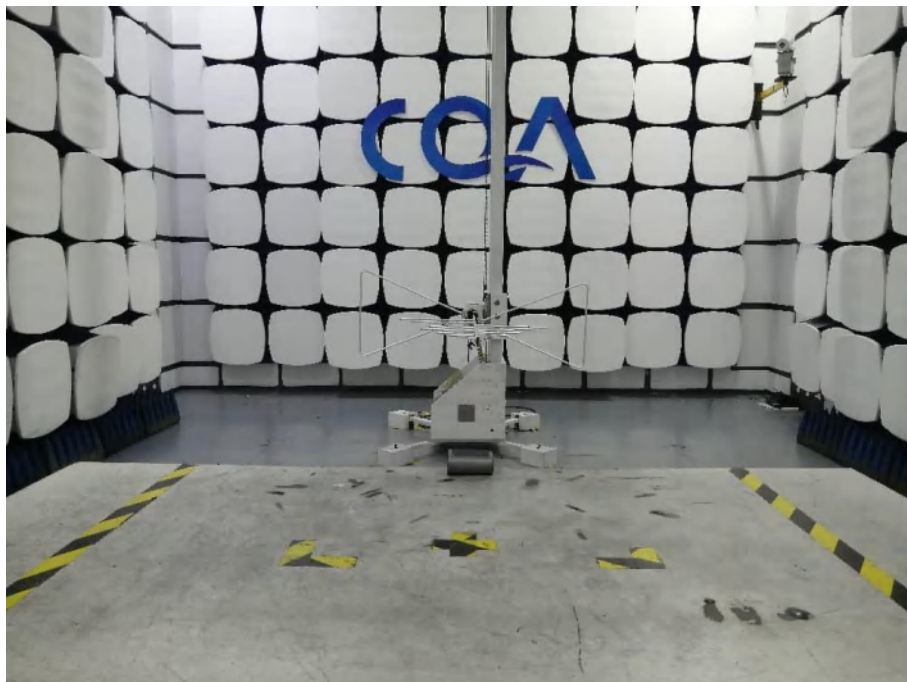


Above 1GHz:



6.2 Conducted Emission



6.3 RF Conducted measurement

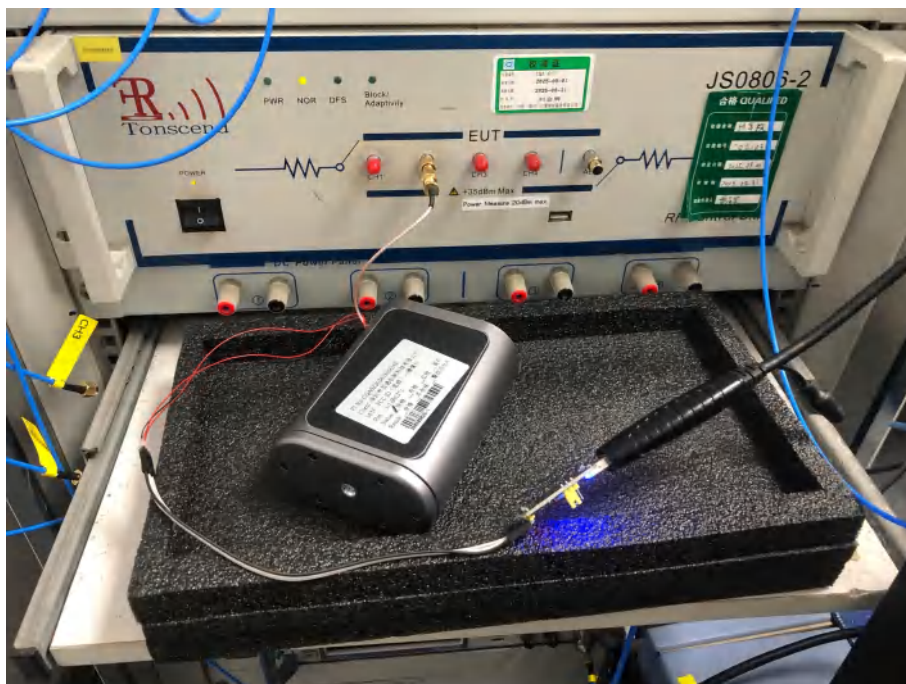

7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20260300616E-01.

*** END OF REPORT ***