




Min emission bandwidth

Test Mode	Antenna	Frequency[MHz]	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.560	5736.680	5753.240	0.5	PASS
11A	Ant1	5785	16.360	5776.800	5793.160	0.5	PASS
11A	Ant1	5825	16.520	5816.720	5833.240	0.5	PASS
11N20SISO	Ant1	5745	17.640	5736.160	5753.800	0.5	PASS
11N20SISO	Ant1	5785	17.800	5776.080	5793.880	0.5	PASS
11N20SISO	Ant1	5825	17.640	5816.160	5833.800	0.5	PASS
11N40SISO	Ant1	5755	36.320	5736.840	5773.160	0.5	PASS
11N40SISO	Ant1	5795	36.560	5776.680	5813.240	0.5	PASS
11AC20SISO	Ant1	5745	17.840	5736.040	5753.880	0.5	PASS
11AC20SISO	Ant1	5785	17.600	5776.160	5793.760	0.5	PASS
11AC20SISO	Ant1	5825	17.640	5816.160	5833.800	0.5	PASS
11AC40SISO	Ant1	5755	36.560	5736.680	5773.240	0.5	PASS
11AC40SISO	Ant1	5795	36.400	5776.760	5813.160	0.5	PASS
11AC80SISO	Ant1	5775	69.440	5736.760	5806.200	0.5	PASS
11AX20SISO	Ant1	5745	18.880	5735.520	5754.400	0.5	PASS
11AX20SISO	Ant1	5785	19.040	5775.480	5794.520	0.5	PASS
11AX20SISO	Ant1	5825	19.080	5815.480	5834.560	0.5	PASS
11AX40SISO	Ant1	5755	38.080	5735.960	5774.040	0.5	PASS
11AX40SISO	Ant1	5795	37.760	5776.120	5813.880	0.5	PASS
11AX80SISO	Ant1	5775	77.600	5736.280	5813.880	0.5	PASS

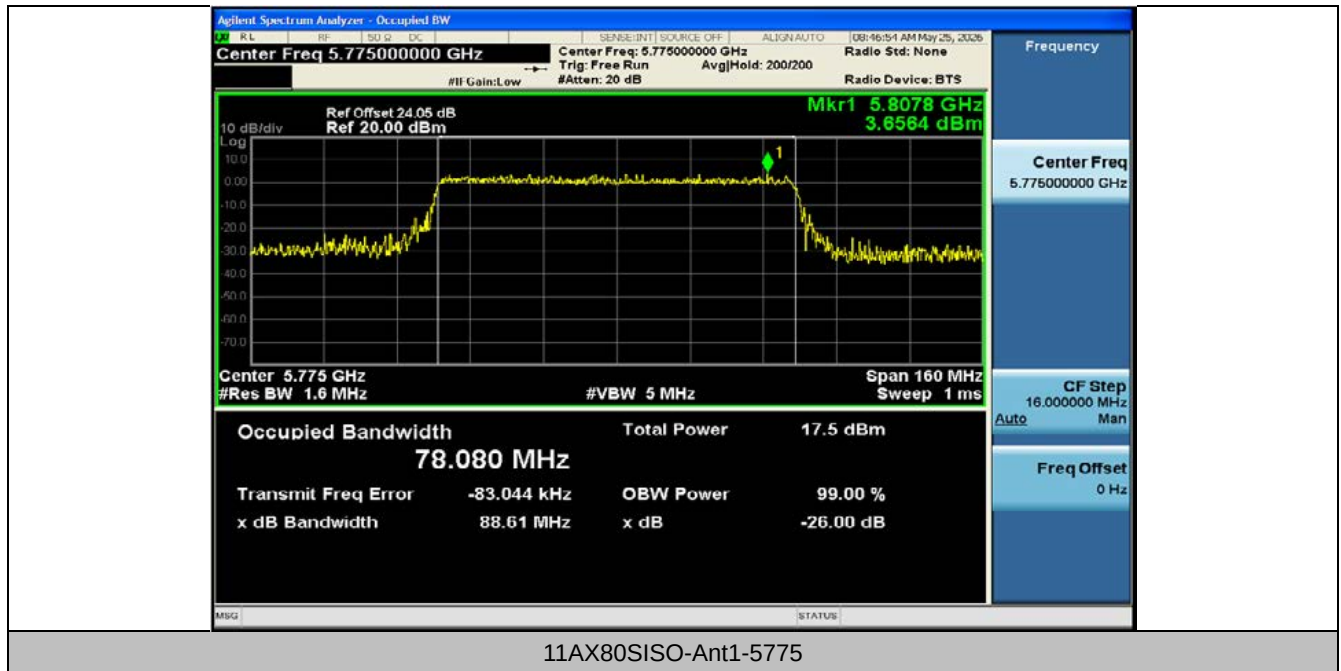

11A-Ant1-5745-PASS



11A-Ant1-5785-PASS



11A-Ant1-5825-PASS



11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5785-PASS



11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS



11AC20SISO-Ant1-5745-PASS



11AC20SISO-Ant1-5785-PASS




11AC20SISO-Ant1-5825-PASS




11AC40SISO-Ant1-5755-PASS



11AC40SISO-Ant1-5795-PASS

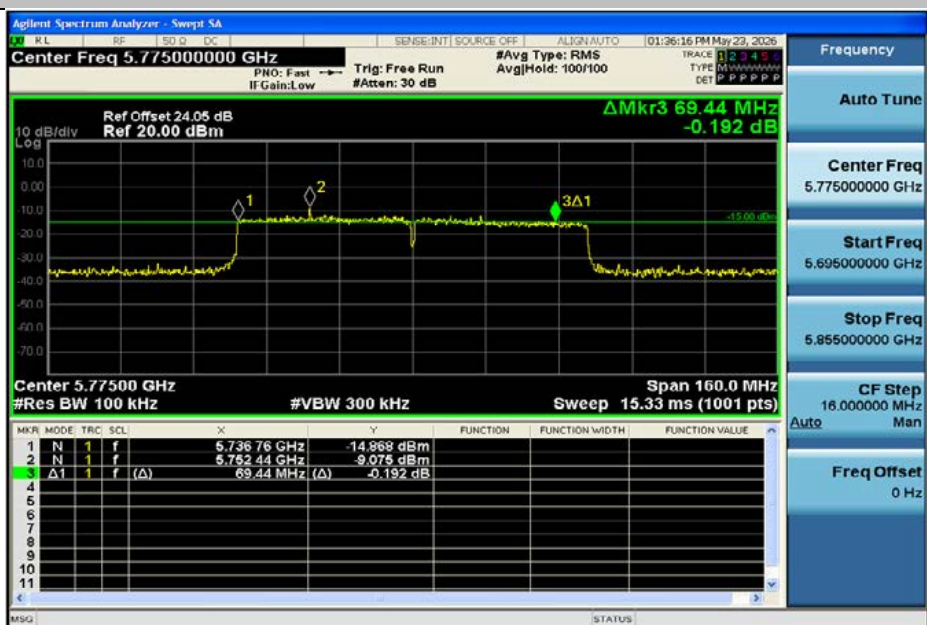

11AC80SISO-Ant1-5775-PASS

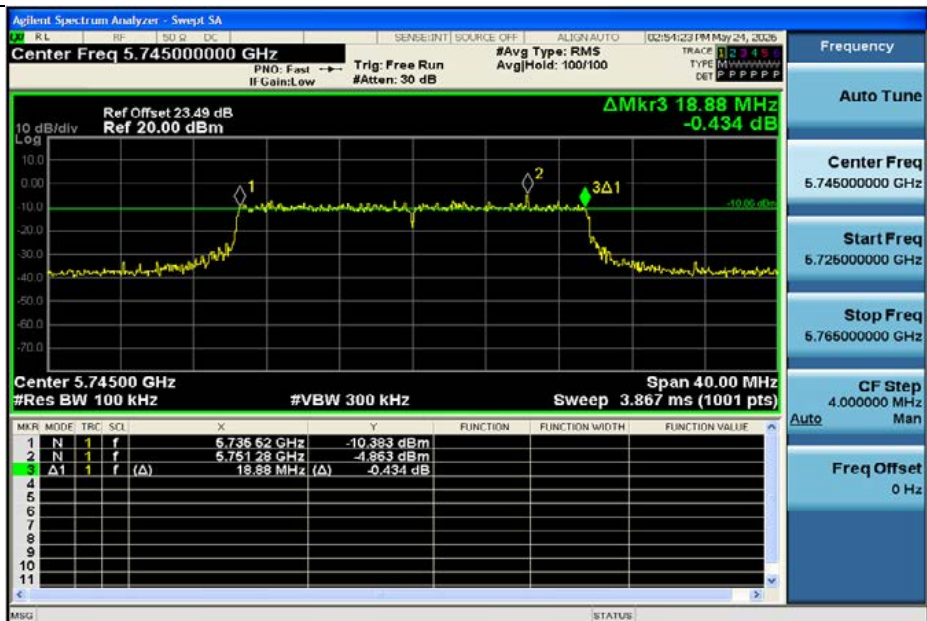

11AX20SISO-Ant1-5745-PASS




11AX20SISO-Ant1-5785-PASS




11AX20SISO-Ant1-5825-PASS



11AX40SISO-Ant1-5755-PASS

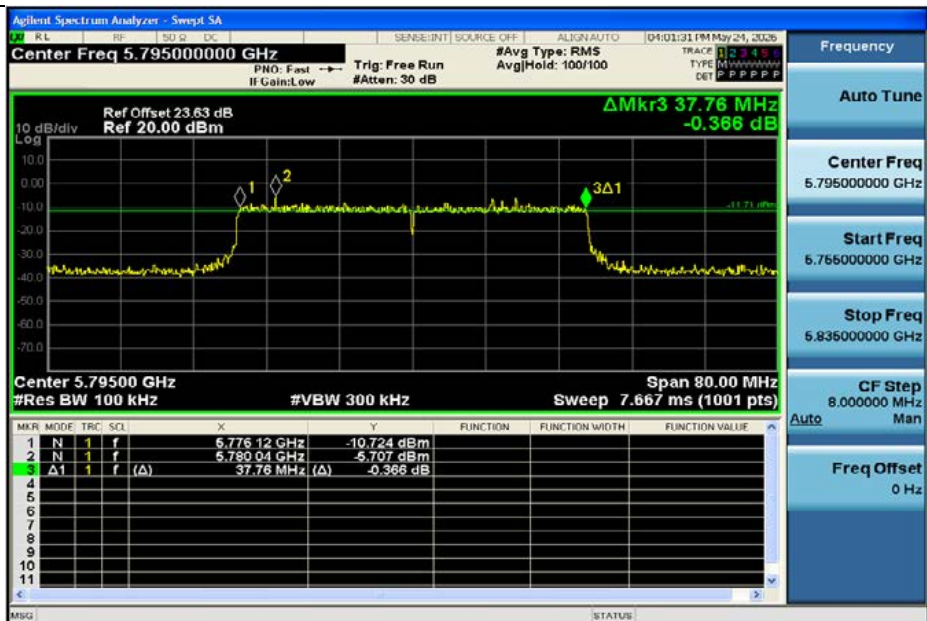

11AX40SISO-Ant1-5795-PASS

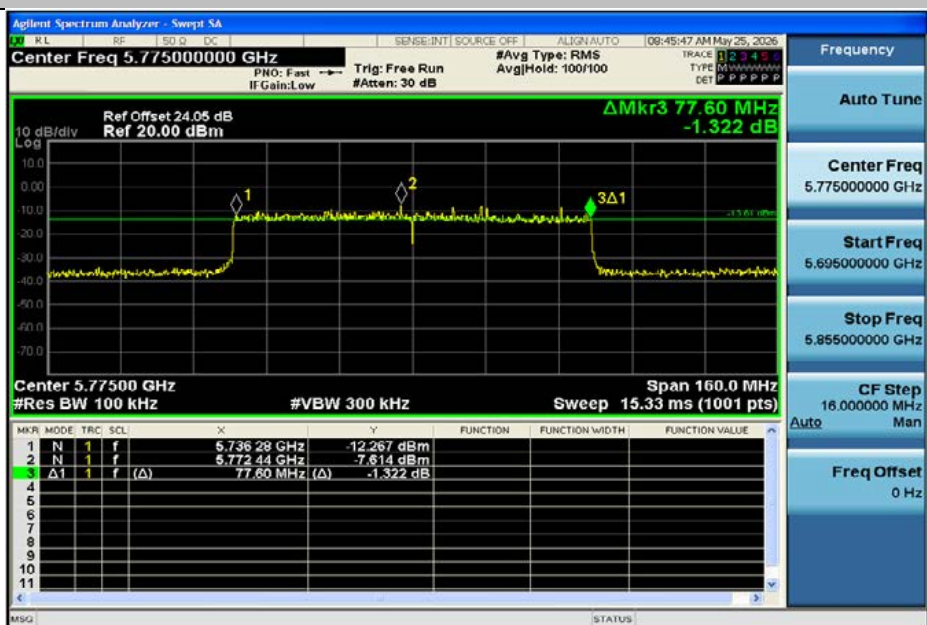

11AX80SISO-Ant1-5775-PASS

3.4 Conducted Output Power

3.4.1 Limit

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Conducted Output Power	Master device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

3.4.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
●Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

- a) The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b) Test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

3.4.3 Test Setup



3.4.4 Table of Parameters of Text Software Setting

UNII-1			
Test Software Version	adb.exe		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	Default	Default	Default
IEEE 802.11n20	Default	Default	Default
IEEE 802.11ac20	Default	Default	Default
IEEE 802.11ax20	Default	Default	Default
Frequency (MHz)	5190	5230	
IEEE 802.11n40	Default	Default	
IEEE 802.11ac40	Default	Default	
IEEE 802.11ax40	Default	Default	
Frequency (MHz)	5210		
IEEE 802.11ac80	Default		
IEEE 802.11ax80	Default		

UNII-2A			
Test Software Version	adb.exe		
Frequency (MHz)	5260	5280	5320
IEEE 802.11a	Default	Default	Default
IEEE 802.11n20	Default	Default	Default
IEEE 802.11ac20	Default	Default	Default
IEEE 802.11ax20	Default	Default	Default
Frequency (MHz)	5270	5310	
IEEE 802.11n40	Default	Default	
IEEE 802.11ac40	Default	Default	
IEEE 802.11ax40	Default	Default	
Frequency (MHz)	5290		
IEEE 802.11ac80	Default		
IEEE 802.11ax80	Default		

UNII-2C			
Test Software Version	adb.exe		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	Default	Default	Default
IEEE 802.11n20	Default	Default	Default
IEEE 802.11ac20	Default	Default	Default
IEEE 802.11ax20	Default	Default	Default
Frequency (MHz)	5510	5550	5670
IEEE 802.11n40	Default	Default	Default
IEEE 802.11ac40	Default	Default	Default
IEEE 802.11ax40	Default	Default	Default
Frequency (MHz)	5530	5610	
IEEE 802.11ac80	Default	Default	
IEEE 802.11ax80	Default	Default	

UNII-3			
Test Software Version	adb.exe		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	Default	Default	Default
IEEE 802.11n20	Default	Default	Default
IEEE 802.11ac20	Default	Default	Default
IEEE 802.11ax20	Default	Default	Default
Frequency (MHz)	5755	5795	
IEEE 802.11n40	Default	Default	
IEEE 802.11ac40	Default	Default	
IEEE 802.11ax40	Default	Default	
Frequency (MHz)	5775		
IEEE 802.11ac80	Default		
IEEE 802.11ax80	Default		

3.4.5 The Result

Test Mode	Antenna	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	11.31	≤23.98	PASS
11A	Ant1	5200	11.33	≤23.98	PASS
11A	Ant1	5240	11.20	≤23.98	PASS
11A	Ant1	5260	10.85	≤23.98	PASS
11A	Ant1	5280	11.33	≤23.98	PASS
11A	Ant1	5320	10.47	≤23.98	PASS
11A	Ant1	5500	10.48	≤23.98	PASS
11A	Ant1	5580	8.26	≤23.98	PASS
11A	Ant1	5700	9.23	≤23.98	PASS
11A	Ant1	5745	9.34	≤30.00	PASS
11A	Ant1	5785	10.49	≤30.00	PASS
11A	Ant1	5825	9.25	≤30.00	PASS
11N20SISO	Ant1	5180	11.45	≤23.98	PASS
11N20SISO	Ant1	5200	9.18	≤23.98	PASS
11N20SISO	Ant1	5240	11.19	≤23.98	PASS
11N20SISO	Ant1	5260	10.67	≤23.98	PASS
11N20SISO	Ant1	5280	10.88	≤23.98	PASS
11N20SISO	Ant1	5320	10.82	≤23.98	PASS
11N20SISO	Ant1	5500	10.36	≤23.98	PASS
11N20SISO	Ant1	5580	10.24	≤23.98	PASS
11N20SISO	Ant1	5700	9.20	≤23.98	PASS
11N20SISO	Ant1	5745	10.11	≤30.00	PASS
11N20SISO	Ant1	5785	10.35	≤30.00	PASS
11N20SISO	Ant1	5825	10.08	≤30.00	PASS
11N40SISO	Ant1	5190	11.07	≤23.98	PASS
11N40SISO	Ant1	5230	10.50	≤23.98	PASS
11N40SISO	Ant1	5270	10.56	≤23.98	PASS
11N40SISO	Ant1	5310	10.17	≤23.98	PASS
11N40SISO	Ant1	5510	10.35	≤23.98	PASS
11N40SISO	Ant1	5550	9.98	≤23.98	PASS
11N40SISO	Ant1	5670	9.52	≤23.98	PASS
11N40SISO	Ant1	5755	9.82	≤30.00	PASS
11N40SISO	Ant1	5795	9.46	≤30.00	PASS
11AC20SISO	Ant1	5180	9.71	≤23.98	PASS
11AC20SISO	Ant1	5200	9.71	≤23.98	PASS
11AC20SISO	Ant1	5240	10.65	≤23.98	PASS
11AC20SISO	Ant1	5260	9.87	≤23.98	PASS
11AC20SISO	Ant1	5280	10.10	≤23.98	PASS
11AC20SISO	Ant1	5320	10.19	≤23.98	PASS
11AC20SISO	Ant1	5500	9.42	≤23.98	PASS
11AC20SISO	Ant1	5580	9.85	≤23.98	PASS
11AC20SISO	Ant1	5700	9.01	≤23.98	PASS

11AC20SISO	Ant1	5745	9.72	≤30.00	PASS
11AC20SISO	Ant1	5785	9.89	≤30.00	PASS
11AC20SISO	Ant1	5825	10.08	≤30.00	PASS
11AC40SISO	Ant1	5190	10.76	≤23.98	PASS
11AC40SISO	Ant1	5230	11.36	≤23.98	PASS
11AC40SISO	Ant1	5270	10.26	≤23.98	PASS
11AC40SISO	Ant1	5310	10.52	≤23.98	PASS
11AC40SISO	Ant1	5510	9.96	≤23.98	PASS
11AC40SISO	Ant1	5550	9.86	≤23.98	PASS
11AC40SISO	Ant1	5670	9.28	≤23.98	PASS
11AC40SISO	Ant1	5755	9.62	≤30.00	PASS
11AC40SISO	Ant1	5795	9.31	≤30.00	PASS
11AC80SISO	Ant1	5210	9.95	≤23.98	PASS
11AC80SISO	Ant1	5290	10.47	≤23.98	PASS
11AC80SISO	Ant1	5530	9.97	≤23.98	PASS
11AC80SISO	Ant1	5610	9.94	≤23.98	PASS
11AC80SISO	Ant1	5775	9.50	≤30.00	PASS
11AX20SISO	Ant1	5180	10.12	≤23.98	PASS
11AX20SISO	Ant1	5200	10.00	≤23.98	PASS
11AX20SISO	Ant1	5240	10.63	≤23.98	PASS
11AX20SISO	Ant1	5260	10.89	≤23.98	PASS
11AX20SISO	Ant1	5280	10.43	≤23.98	PASS
11AX20SISO	Ant1	5320	10.40	≤23.98	PASS
11AX20SISO	Ant1	5500	10.02	≤23.98	PASS
11AX20SISO	Ant1	5580	10.32	≤23.98	PASS
11AX20SISO	Ant1	5700	9.74	≤23.98	PASS
11AX20SISO	Ant1	5745	10.07	≤30.00	PASS
11AX20SISO	Ant1	5785	10.48	≤30.00	PASS
11AX20SISO	Ant1	5825	9.24	≤30.00	PASS
11AX40SISO	Ant1	5190	10.63	≤23.98	PASS
11AX40SISO	Ant1	5230	11.01	≤23.98	PASS
11AX40SISO	Ant1	5270	10.00	≤23.98	PASS
11AX40SISO	Ant1	5310	9.77	≤23.98	PASS
11AX40SISO	Ant1	5510	9.80	≤23.98	PASS
11AX40SISO	Ant1	5550	10.05	≤23.98	PASS
11AX40SISO	Ant1	5670	9.03	≤23.98	PASS
11AX40SISO	Ant1	5755	11.47	≤30.00	PASS
11AX40SISO	Ant1	5795	10.28	≤30.00	PASS
11AX80SISO	Ant1	5210	11.15	≤23.98	PASS
11AX80SISO	Ant1	5290	10.47	≤23.98	PASS
11AX80SISO	Ant1	5530	10.10	≤23.98	PASS
11AX80SISO	Ant1	5610	9.66	≤23.98	PASS
11AX80SISO	Ant1	5775	10.85	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the test system

3.5 Power Spectral Density

3.5.1 Limit

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Master device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 300kHz and VBW at 1500kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/300 \text{ kHz})$ to the measured result, i.e. 2.22 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=300kHz has been added 2.22 dB by compensating offset, offset=cable loss+duty factor+ $10\log(500\text{kHz}/300\text{kHz})$.


3.5.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
●Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

a) The EUT was directly connected to the tonscond test system and antenna output port as show in the block diagram below. Spectrum analyser settings as following:

Centre Frequency	The centre frequency of the channel under test
RBW	= 1 MHz (Band1/2/3); = 500kHz (Band4)
VBW	$\geq 3 \times \text{RBW}$
Frequency span	2 x Nominal Channel Bandwidth
Detector Mode	RMS
Trace Mode	Max Hold
Sweep Time	Auto Couple

3.5.3 Test Setup

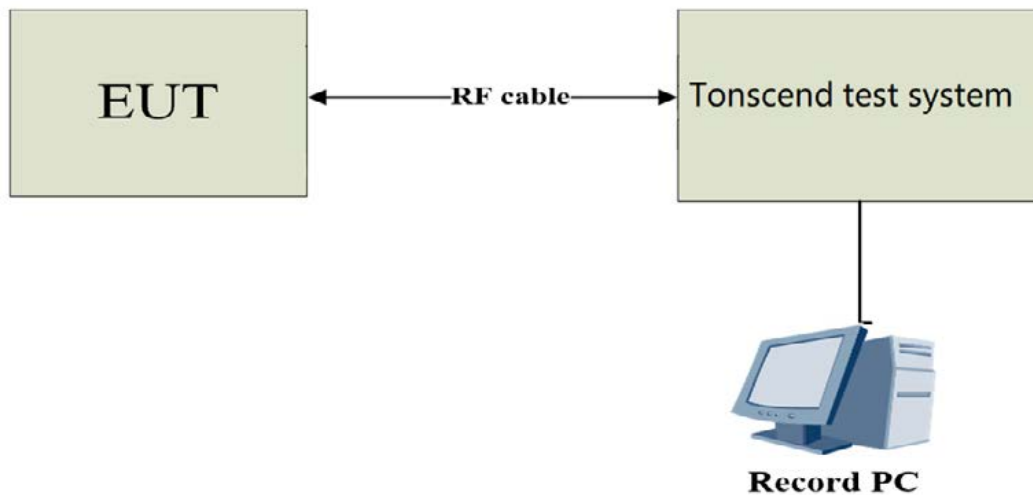

3.5.4 The Result

Test Mode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	2.85	≤10.85	PASS
11A	Ant1	5200	3.23	≤10.85	PASS
11A	Ant1	5240	2.69	≤10.85	PASS
11A	Ant1	5260	1.30	≤10.85	PASS
11A	Ant1	5280	0.65	≤10.85	PASS
11A	Ant1	5320	-0.37	≤10.85	PASS
11A	Ant1	5500	-0.44	≤10.85	PASS
11A	Ant1	5580	-0.06	≤10.85	PASS
11A	Ant1	5700	-1.86	≤10.85	PASS
11A	Ant1	5745	-3.20	≤30.00	PASS
11A	Ant1	5785	-3.32	≤30.00	PASS
11A	Ant1	5825	-4.37	≤30.00	PASS
11N20SISO	Ant1	5180	-1.72	≤10.85	PASS
11N20SISO	Ant1	5200	-0.25	≤10.85	PASS
11N20SISO	Ant1	5240	-1.03	≤10.85	PASS
11N20SISO	Ant1	5260	-0.70	≤10.85	PASS
11N20SISO	Ant1	5280	-0.15	≤10.85	PASS
11N20SISO	Ant1	5320	-0.75	≤10.85	PASS
11N20SISO	Ant1	5500	0.49	≤10.85	PASS
11N20SISO	Ant1	5580	-1.11	≤10.85	PASS
11N20SISO	Ant1	5700	-2.31	≤10.85	PASS
11N20SISO	Ant1	5745	-4.15	≤30.00	PASS
11N20SISO	Ant1	5785	-3.85	≤30.00	PASS
11N20SISO	Ant1	5825	-4.17	≤30.00	PASS
11N40SISO	Ant1	5190	-3.02	≤10.85	PASS
11N40SISO	Ant1	5230	-3.05	≤10.85	PASS

11N40SISO	Ant1	5270	-3.65	≤10.85	PASS
11N40SISO	Ant1	5310	-3.51	≤10.85	PASS
11N40SISO	Ant1	5510	-3.99	≤10.85	PASS
11N40SISO	Ant1	5550	-4.40	≤10.85	PASS
11N40SISO	Ant1	5670	-4.14	≤10.85	PASS
11N40SISO	Ant1	5755	-7.44	≤30.00	PASS
11N40SISO	Ant1	5795	-7.28	≤30.00	PASS
11AC20SISO	Ant1	5180	0.16	≤10.85	PASS
11AC20SISO	Ant1	5200	-1.20	≤10.85	PASS
11AC20SISO	Ant1	5240	-0.80	≤10.85	PASS
11AC20SISO	Ant1	5260	0.40	≤10.85	PASS
11AC20SISO	Ant1	5280	-0.75	≤10.85	PASS
11AC20SISO	Ant1	5320	-1.18	≤10.85	PASS
11AC20SISO	Ant1	5500	-1.86	≤10.85	PASS
11AC20SISO	Ant1	5580	-0.95	≤10.85	PASS
11AC20SISO	Ant1	5700	-2.38	≤10.85	PASS
11AC20SISO	Ant1	5745	-4.57	≤30.00	PASS
11AC20SISO	Ant1	5785	-4.32	≤30.00	PASS
11AC20SISO	Ant1	5825	-4.46	≤30.00	PASS
11AC40SISO	Ant1	5190	-3.35	≤10.85	PASS
11AC40SISO	Ant1	5230	-2.45	≤10.85	PASS
11AC40SISO	Ant1	5270	-2.88	≤10.85	PASS
11AC40SISO	Ant1	5310	-3.17	≤10.85	PASS
11AC40SISO	Ant1	5510	-4.47	≤10.85	PASS
11AC40SISO	Ant1	5550	-4.24	≤10.85	PASS
11AC40SISO	Ant1	5670	-5.20	≤10.85	PASS
11AC40SISO	Ant1	5755	-7.85	≤30.00	PASS
11AC40SISO	Ant1	5795	-7.69	≤30.00	PASS
11AC80SISO	Ant1	5210	-7.46	≤10.85	PASS
11AC80SISO	Ant1	5290	-6.52	≤10.85	PASS
11AC80SISO	Ant1	5530	-7.91	≤10.85	PASS
11AC80SISO	Ant1	5610	-7.16	≤10.85	PASS
11AC80SISO	Ant1	5775	-9.62	≤30.00	PASS
11AX20SISO	Ant1	5180	-0.93	≤10.85	PASS
11AX20SISO	Ant1	5200	-1.63	≤10.85	PASS
11AX20SISO	Ant1	5240	-0.83	≤10.85	PASS
11AX20SISO	Ant1	5260	-0.44	≤10.85	PASS
11AX20SISO	Ant1	5280	-0.25	≤10.85	PASS
11AX20SISO	Ant1	5320	-0.64	≤10.85	PASS
11AX20SISO	Ant1	5500	-1.19	≤10.85	PASS
11AX20SISO	Ant1	5580	-0.42	≤10.85	PASS
11AX20SISO	Ant1	5700	-1.78	≤10.85	PASS
11AX20SISO	Ant1	5745	-4.65	≤30.00	PASS
11AX20SISO	Ant1	5785	-2.96	≤30.00	PASS

11AX20SISO	Ant1	5825	-5.08	≤30.00	PASS
11AX40SISO	Ant1	5190	-3.33	≤10.85	PASS
11AX40SISO	Ant1	5230	-2.59	≤10.85	PASS
11AX40SISO	Ant1	5270	-3.05	≤10.85	PASS
11AX40SISO	Ant1	5310	-3.76	≤10.85	PASS
11AX40SISO	Ant1	5510	-4.66	≤10.85	PASS
11AX40SISO	Ant1	5550	-3.96	≤10.85	PASS
11AX40SISO	Ant1	5670	-5.15	≤10.85	PASS
11AX40SISO	Ant1	5755	-7.18	≤30.00	PASS
11AX40SISO	Ant1	5795	-7.37	≤30.00	PASS
11AX80SISO	Ant1	5210	-5.46	≤10.85	PASS
11AX80SISO	Ant1	5290	-6.51	≤10.85	PASS
11AX80SISO	Ant1	5530	-7.32	≤10.85	PASS
11AX80SISO	Ant1	5610	-7.04	≤10.85	PASS
11AX80SISO	Ant1	5775	-8.95	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the test system

For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 300kHz and VBW at 1500kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/300 \text{ kHz})$ to the measured result, i.e. 2.22 dB.

During the test of U-NII 3 PSD, the measurement result with RBW=300kHz has been added 2.22 dB by compensating offset, $\text{offset} = \text{cable loss} + \text{duty factor} + 10 \log(500 \text{ kHz}/300 \text{ kHz})$.



11A-Ant1-5180-PASS



11A-Ant1-5200-PASS



11A-Ant1-5240-PASS



11A-Ant1-5260-PASS



11A-Ant1-5280-PASS



11A-Ant1-5320-PASS



11A-Ant1-5500-PASS



11A-Ant1-5580-PASS



11A-Ant1-5700-PASS



11A-Ant1-5745-PASS



11A-Ant1-5785-PASS



11A-Ant1-5825-PASS




11N20SISO-Ant1-5180-PASS



11N20SISO-Ant1-5200-PASS



11N20SISO-Ant1-5240-PASS

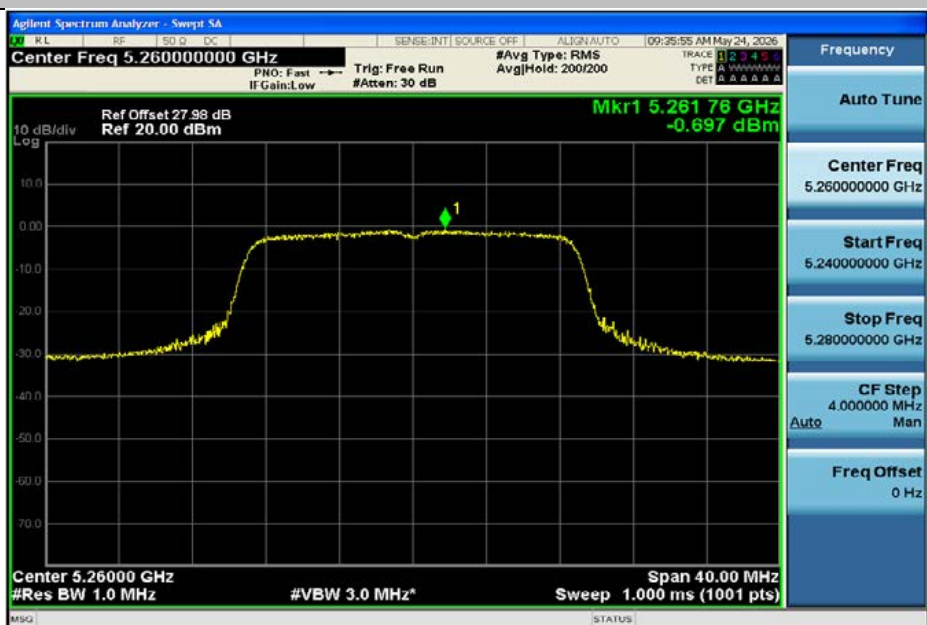

11N20SISO-Ant1-5260-PASS



11N20SISO-Ant1-5280-PASS



11N20SISO-Ant1-5320-PASS



11N20SISO-Ant1-5500-PASS



11N20SISO-Ant1-5580-PASS



11N20SISO-Ant1-5700-PASS



11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5785-PASS



11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5190-PASS



11N40SISO-Ant1-5230-PASS



11N40SISO-Ant1-5270-PASS



11N40SISO-Ant1-5310-PASS



11N40SISO-Ant1-5510-PASS



11N40SISO-Ant1-5550-PASS



11N40SISO-Ant1-5670-PASS



11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS



11AC20SISO-Ant1-5180-PASS



11AC20SISO-Ant1-5200-PASS



11AC20SISO-Ant1-5240-PASS



11AC20SISO-Ant1-5260-PASS



11AC20SISO-Ant1-5280-PASS



11AC20SISO-Ant1-5320-PASS



11AC20SISO-Ant1-5500-PASS



11AC20SISO-Ant1-5580-PASS



11AC20SISO-Ant1-5700-PASS



11AC20SISO-Ant1-5745-PASS




11AC20SISO-Ant1-5785-PASS



11AC20SISO-Ant1-5825-PASS



11AC40SISO-Ant1-5190-PASS

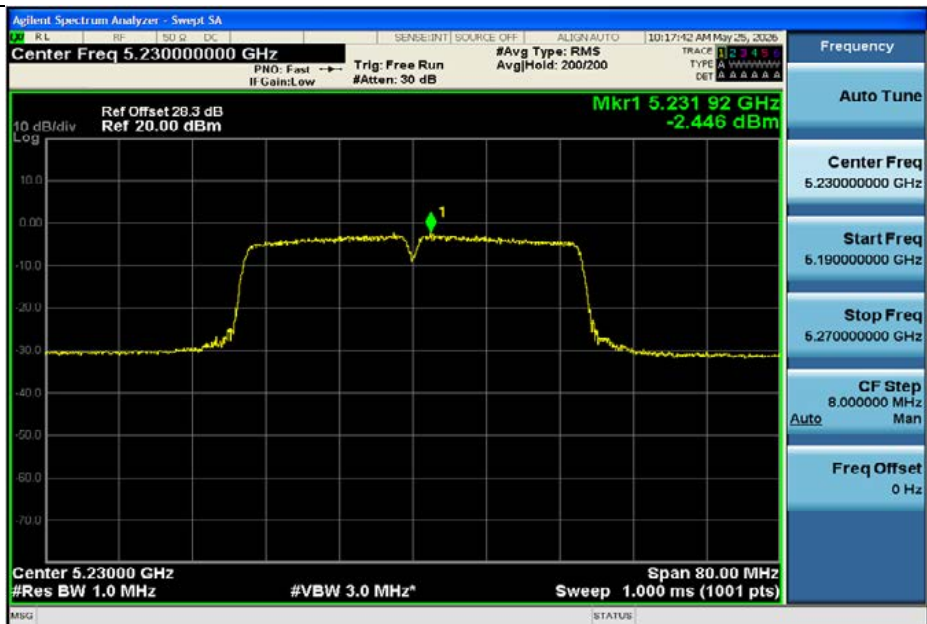

11AC40SISO-Ant1-5230-PASS



11AC40SISO-Ant1-5270-PASS



11AC40SISO-Ant1-5310-PASS



11AC40SISO-Ant1-5510-PASS



11AC40SISO-Ant1-5550-PASS



11AC40SISO-Ant1-5670-PASS



11AC40SISO-Ant1-5755-PASS



11AC40SISO-Ant1-5795-PASS



11AC80SISO-Ant1-5210-PASS



11AC80SISO-Ant1-5290-PASS



11AC80SISO-Ant1-5530-PASS



11AC80SISO-Ant1-5610-PASS



11AC80SISO-Ant1-5775-PASS



11AX20SISO-Ant1-5180-PASS



11AX20SISO-Ant1-5200-PASS



11AX20SISO-Ant1-5240-PASS



11AX20SISO-Ant1-5260-PASS



11AX20SISO-Ant1-5280-PASS



11AX20SISO-Ant1-5320-PASS



11AX20SISO-Ant1-5500-PASS



11AX20SISO-Ant1-5580-PASS



11AX20SISO-Ant1-5700-PASS



11AX20SISO-Ant1-5745-PASS




11AX20SISO-Ant1-5785-PASS



11AX20SISO-Ant1-5825-PASS




11AX40SISO-Ant1-5190-PASS

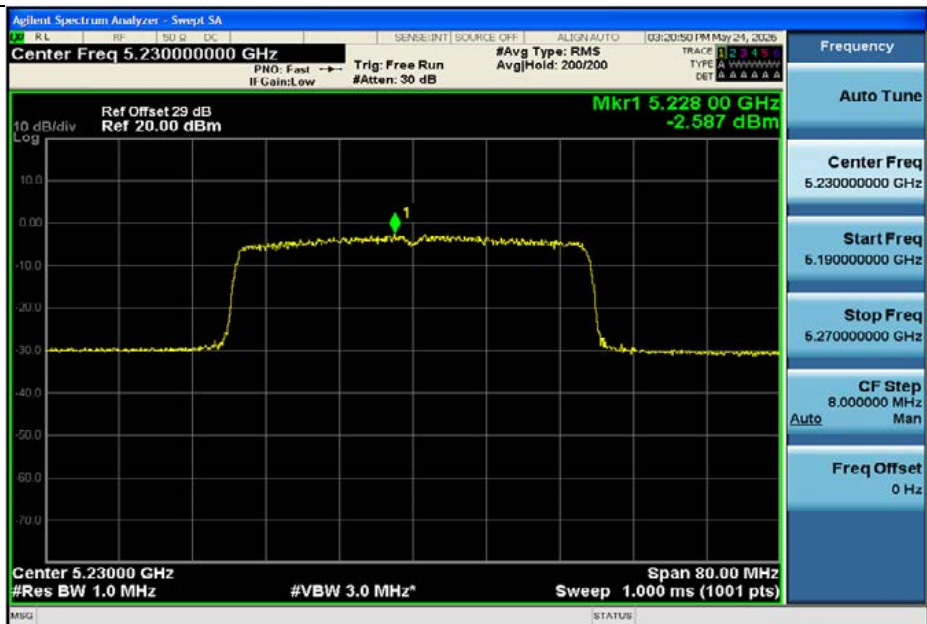

11AX40SISO-Ant1-5230-PASS



11AX40SISO-Ant1-5270-PASS

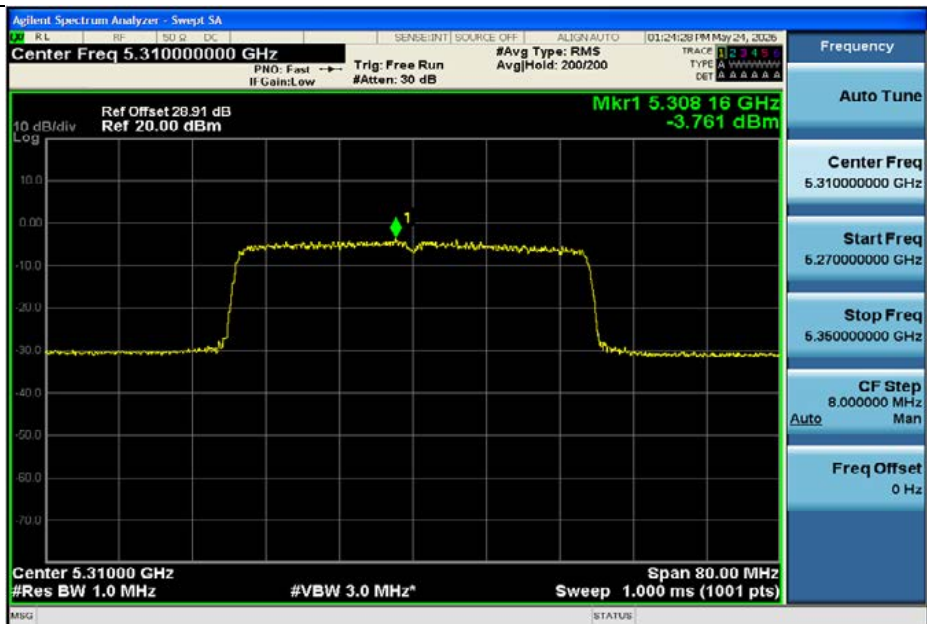

11AX40SISO-Ant1-5310-PASS




11AX40SISO-Ant1-5510-PASS



11AX40SISO-Ant1-5550-PASS



11AX40SISO-Ant1-5670-PASS

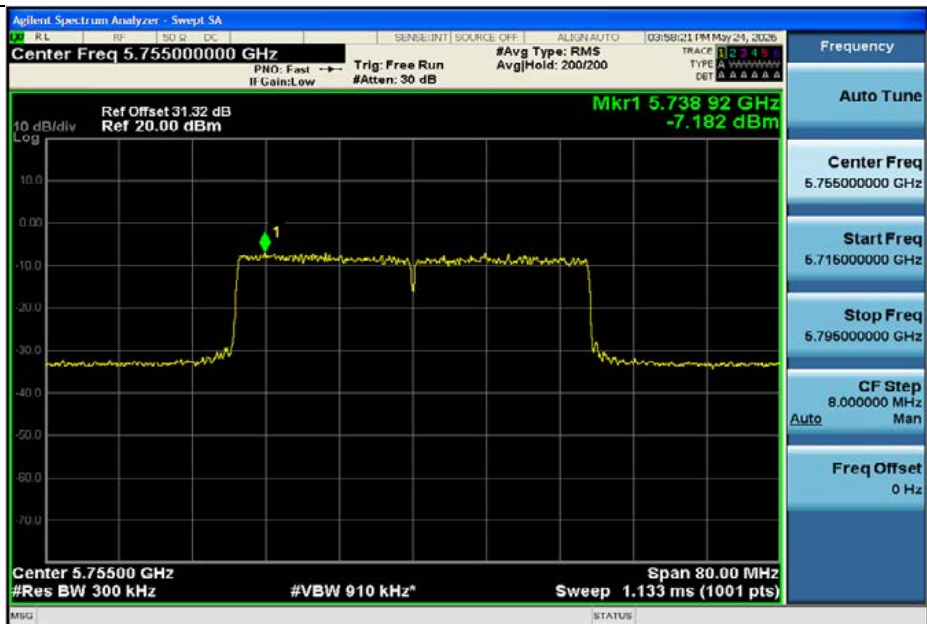

11AX40SISO-Ant1-5755-PASS



11AX40SISO-Ant1-5795-PASS



11AX80SISO-Ant1-5210-PASS



11AX80SISO-Ant1-5290-PASS



11AX80SISO-Ant1-5530-PASS



11AX80SISO-Ant1-5610-PASS



11AX80SISO-Ant1-5775-PASS

Statement

1. The report is invalid without the official seal or special seal of Shenzhen Haiyun Standard Technical Co., Ltd. (hereinafter referred to as the unit).
2. The report is invalid without the signature of the approver.
3. The report is invalid if altered arbitrarily.
4. The report shall not be partially copied without the written approval of the unit.
5. The reported test results are only valid for the tested samples.
6. If there is any objection to the test report, it shall be submitted to the test unit within 15 days from the date of receiving the report, and the overdue shall not be accepted.

Shenzhen Haiyun Standard Technical Co., Ltd.

Address: Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China

(END OF REPORT)