Appendix A

RF Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Portable Speaker

Trade Mark: PYLE

Test Model: PPHP8496

Environmental Conditions

Temperature:	26.8℃
Relative Humidity:	54.2%
ATM Pressure:	101Kpa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung

Contents

Page

COVER PAGE

1 Duty Cycle 3
1.1 Test Result 3
1.2 Test Graphs 4
2 Maximum Conducted Peak Output Power 9
2.1 Test Result 9
2.2 Test Graphs 10
3 20dB Bandwidth 15
3.1 Test Result 15
3.2 Test Graphs 16
4 Carrier Frequency Separation 21
4.1 Test Result 21
4.2 Test Graphs 22
5 Hopping Channel Number 24
5.1 Test Result 24
5.2 Test Graphs 25
6 Dwell Time 27
6.1 Test Result 27
6.2 Test Graphs 28
7 RF Conducted Spurious Emissions 31
7.1 Test Result 31
7.2 Test Graphs 32
8 Band-edge for RF Conducted Emissions 41
8.1 Test Result 41
8.2 Test Graphs 42
9 Restrict-band band-edge measurements 54
9.1 Test Result 54
9.2 Test Graphs 56

1 Duty Cycle

1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor	1/T (kHz)
1-DH1	2402	31.33	5.04	2.63
1-DH1	2441	31.2	5.06	2.63
1-DH1	2480	31.85	4.97	2.63
2-DH1	2402	32.05	4.94	2.56
2-DH1	2441	32	4.95	2.56
2-DH1	2480	32	4.95	2.56
3-DH1	2402	32	4.95	2.56
3-DH1	2441	32.01	4.95	2.56
3-DH1	2480	32	4.95	2.56

1.2 Test Graphs

Test Graphs

1-DH1 2402MHz

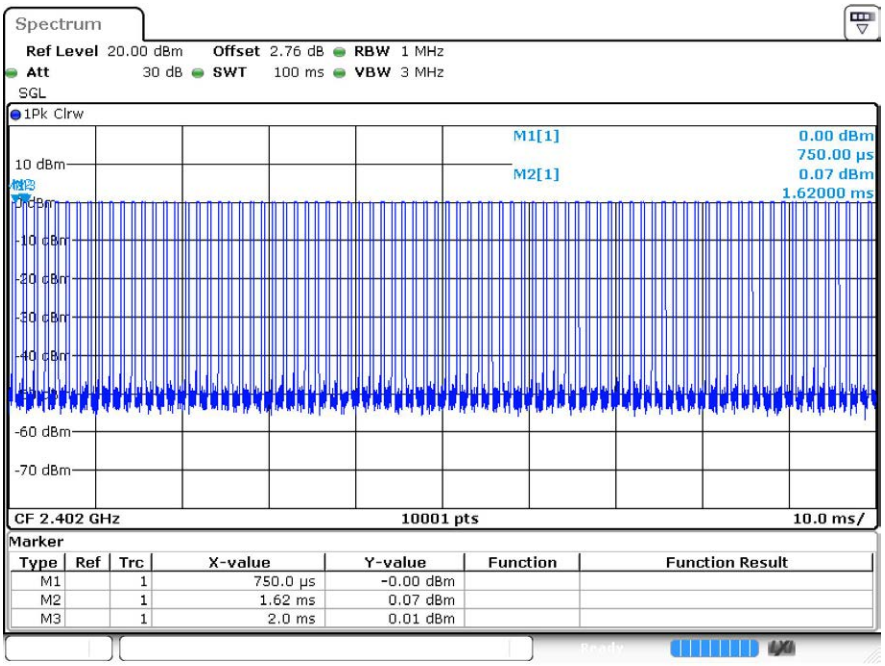

1-DH1 2441MHz

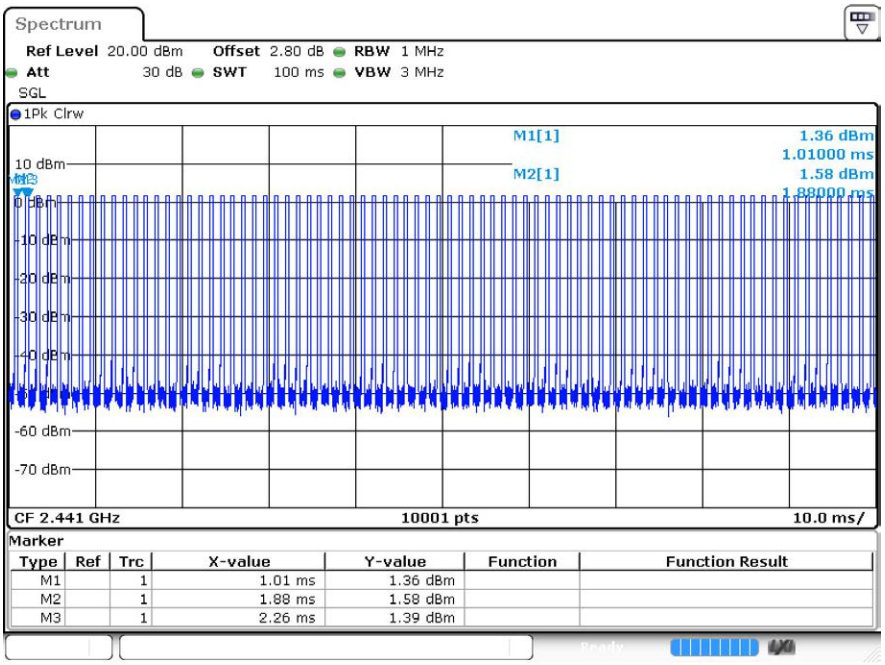

1-DH1 2480MHz

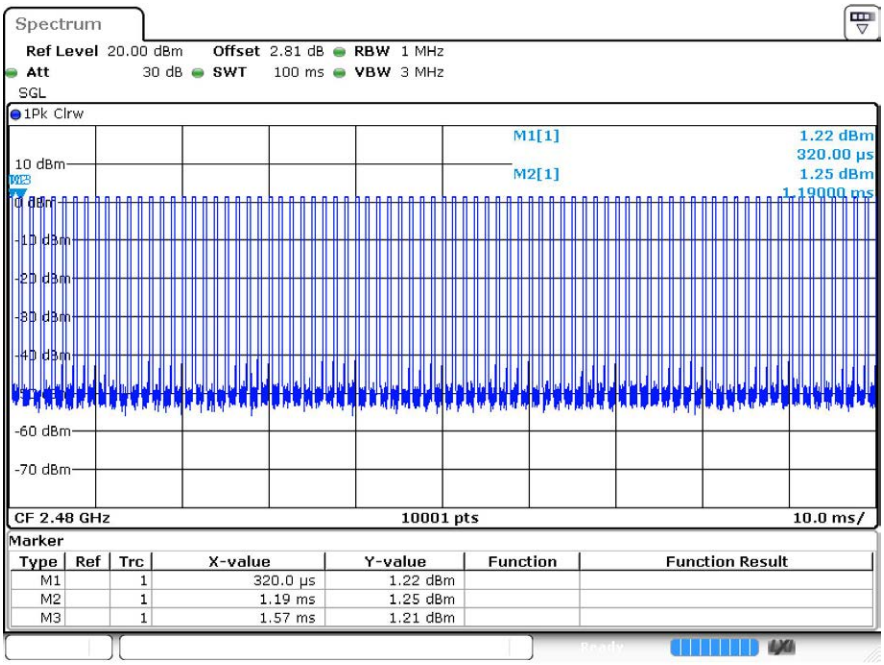

2-DH1 2402MHz

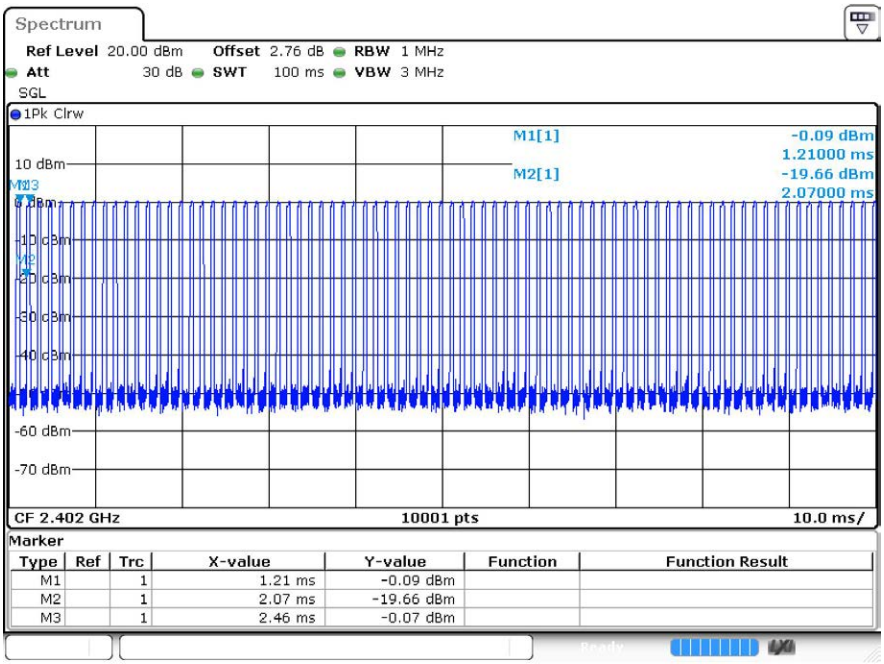

2-DH1 2441MHz

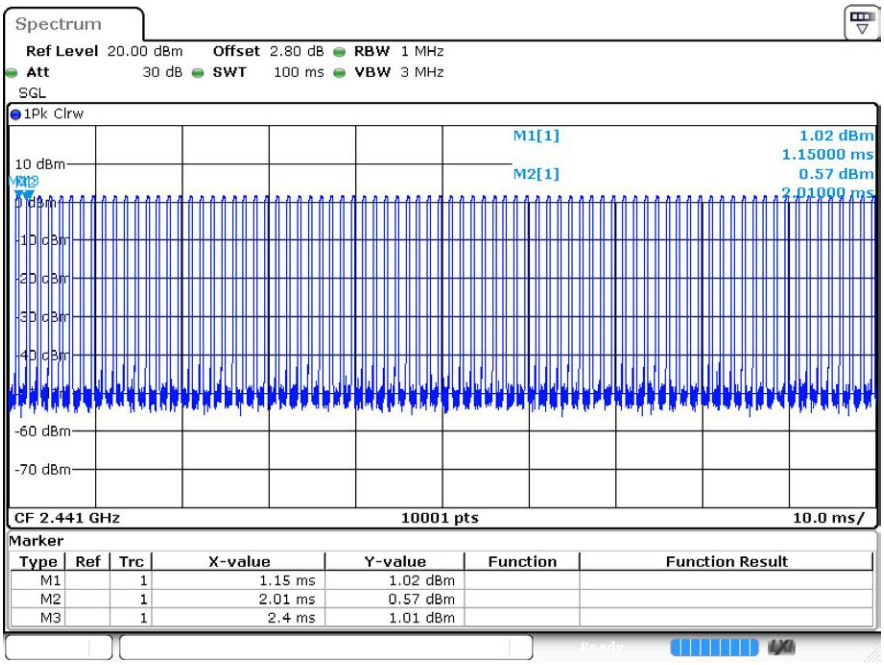

2-DH1 2480MHz

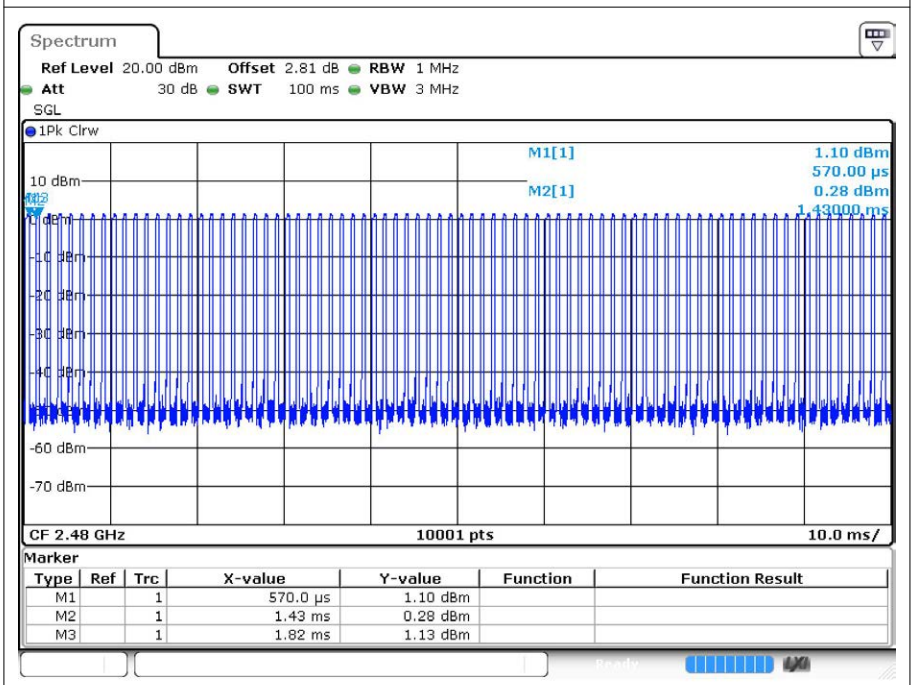

3-DH1 2402MHz

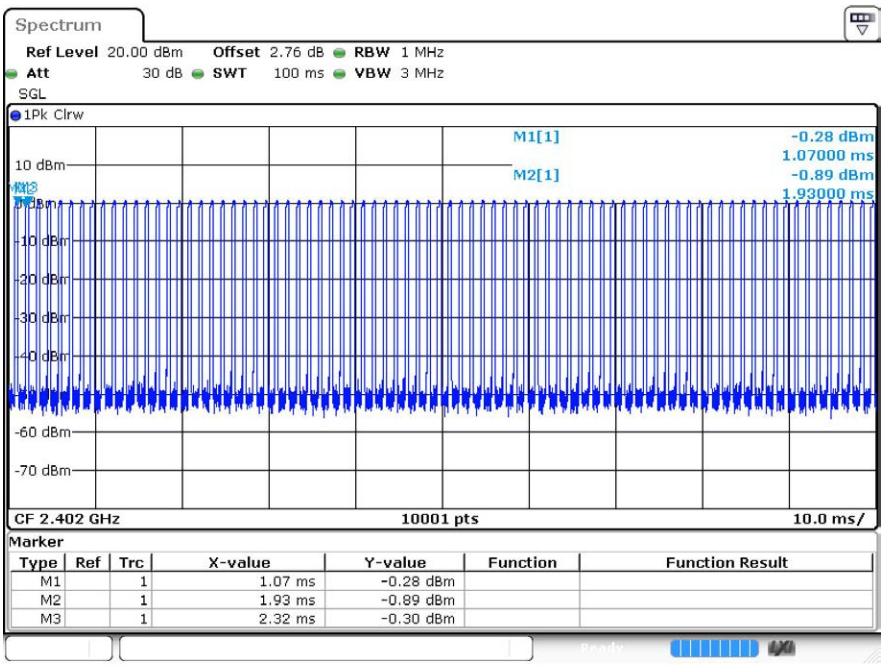

3-DH1 2441MHz

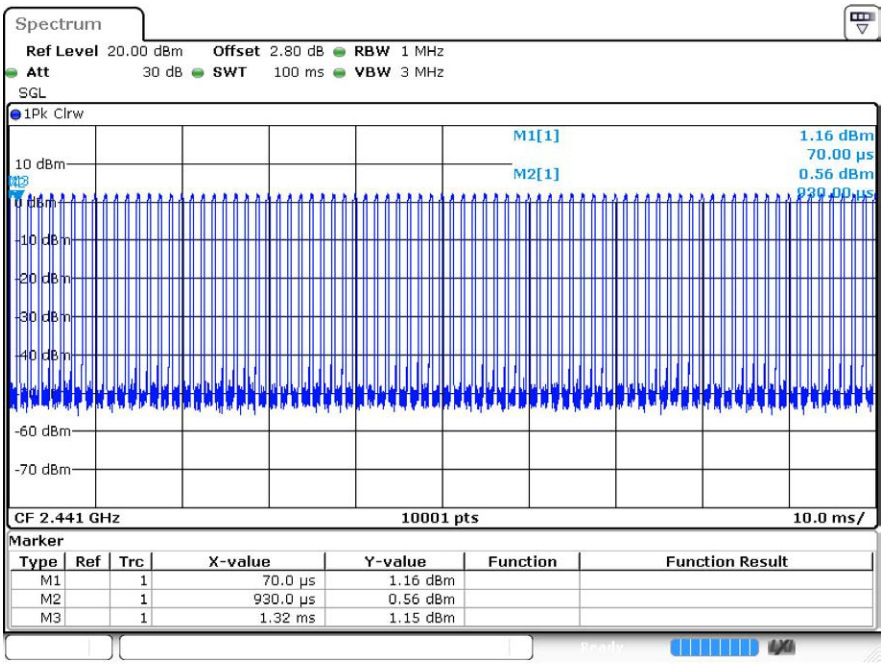

3-DH1 2480MHz

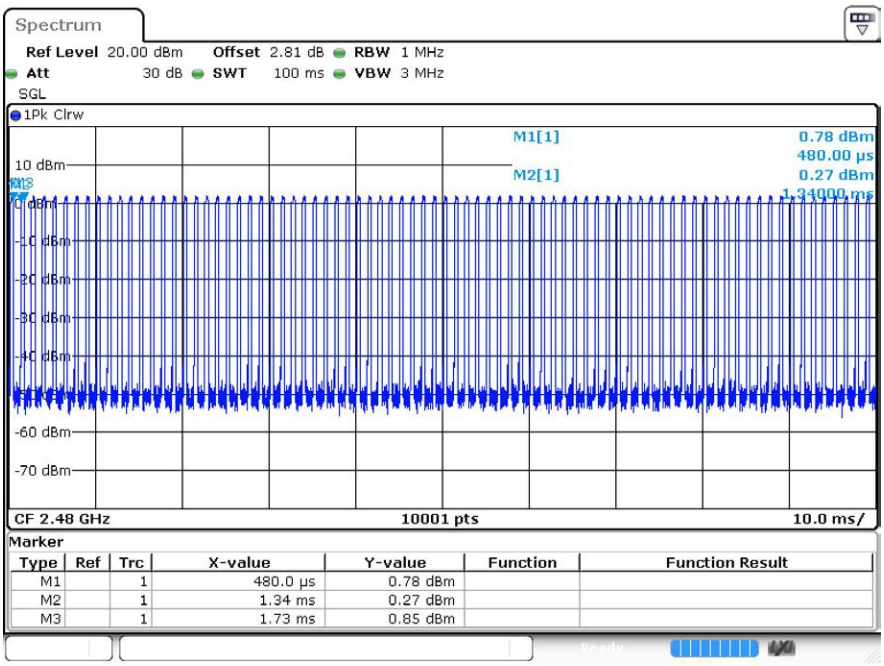

2 Maximum Conducted Peak Output Power

2.1 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	0.03	21	Pass
	MCH	1.43	21	Pass
	HCH	1.23	21	Pass
π/4DQPSK	LCH	0.83	21	Pass
	MCH	2.49	21	Pass
	HCH	2.27	21	Pass
8DPSK	LCH	1.32	21	Pass
	MCH	2.76	21	Pass
	HCH	2.1	21	Pass

2.2 Test Graphs

Test Graphs	
GFSK/LCH	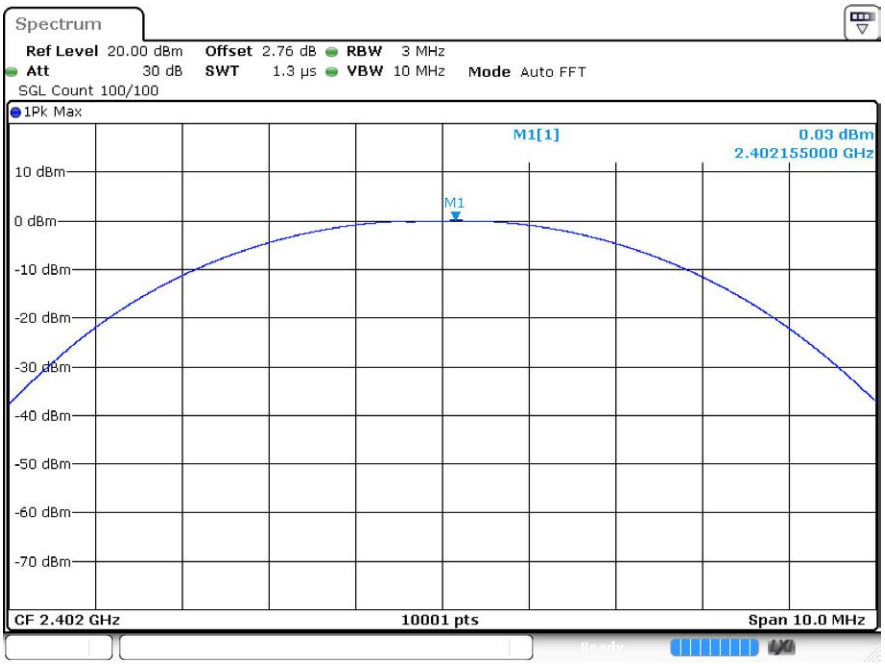
GFSK/MCH	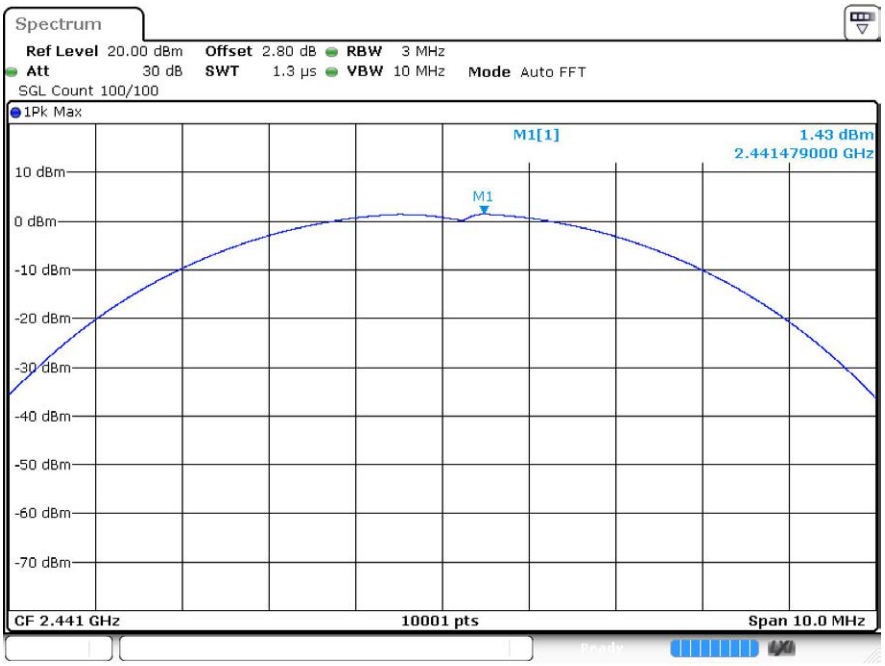

GFSK/HCH	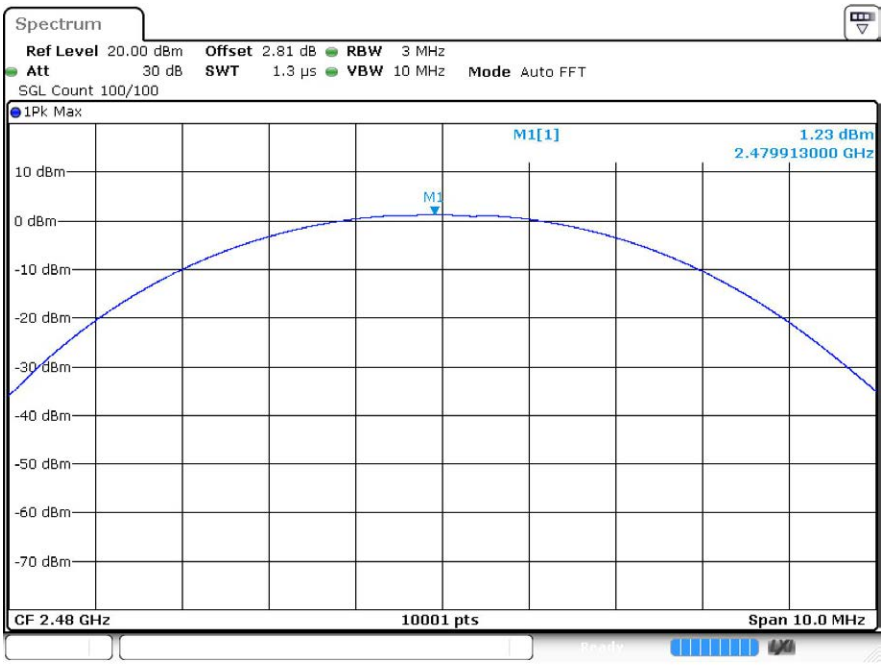
π/4DQPSK/LCH	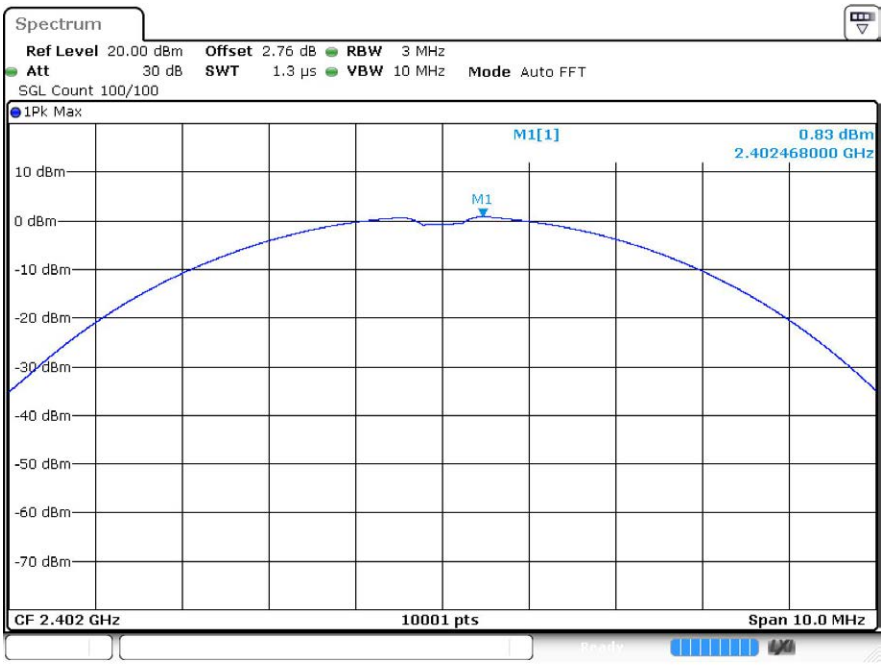

π/4DQPSK/MCH	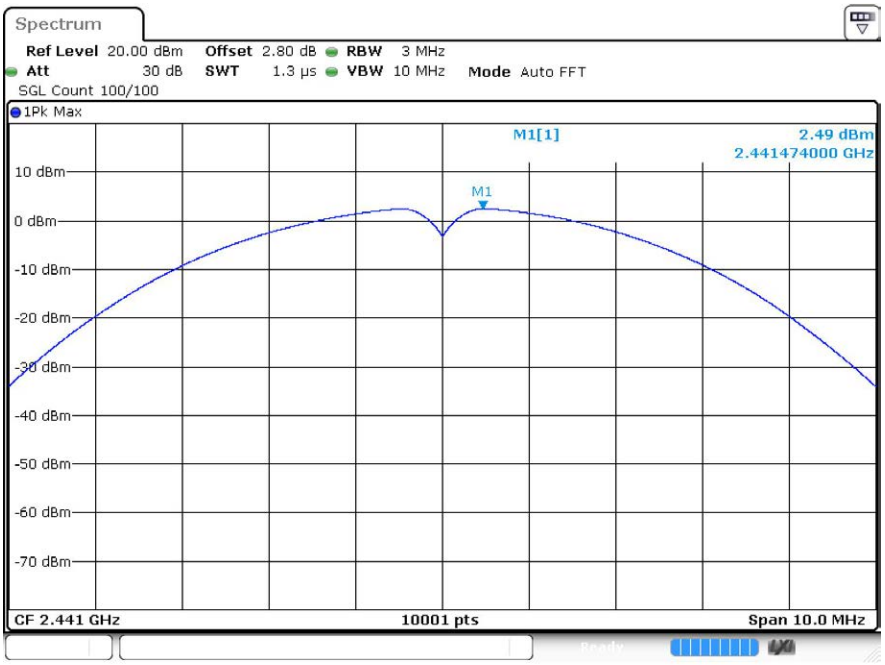
π/4DQPSK/HCH	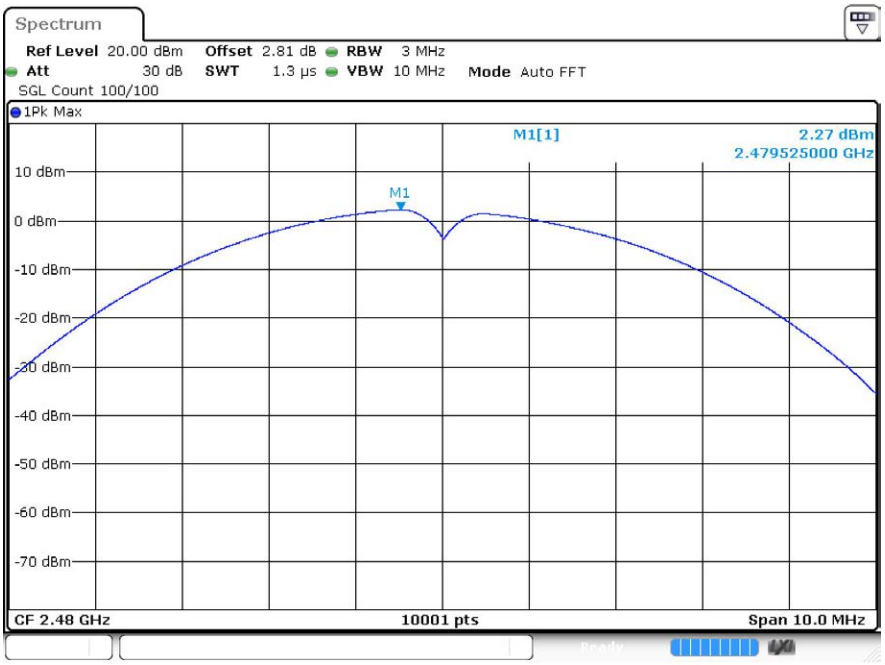

8DPSK/LCH	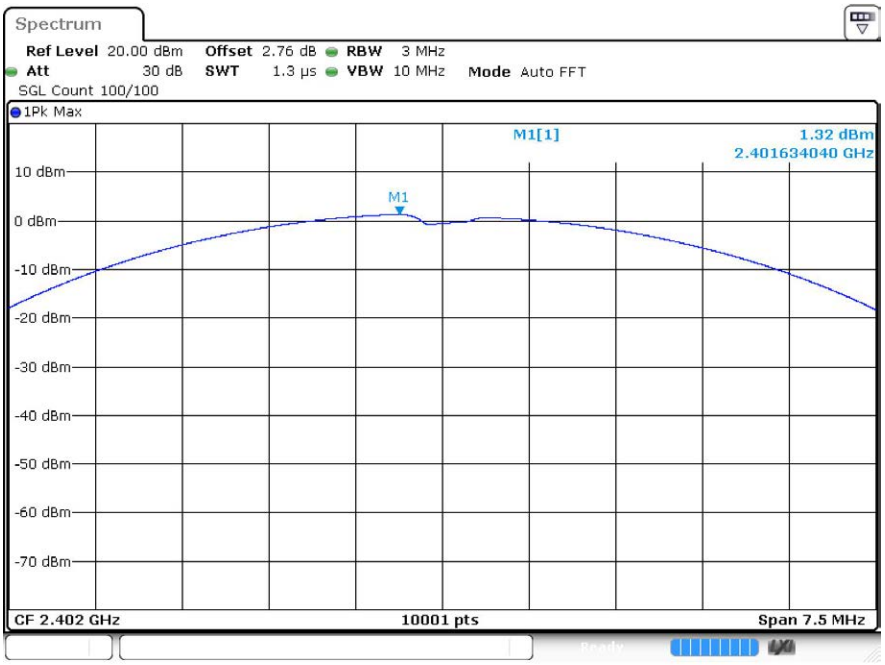
8DPSK/MCH	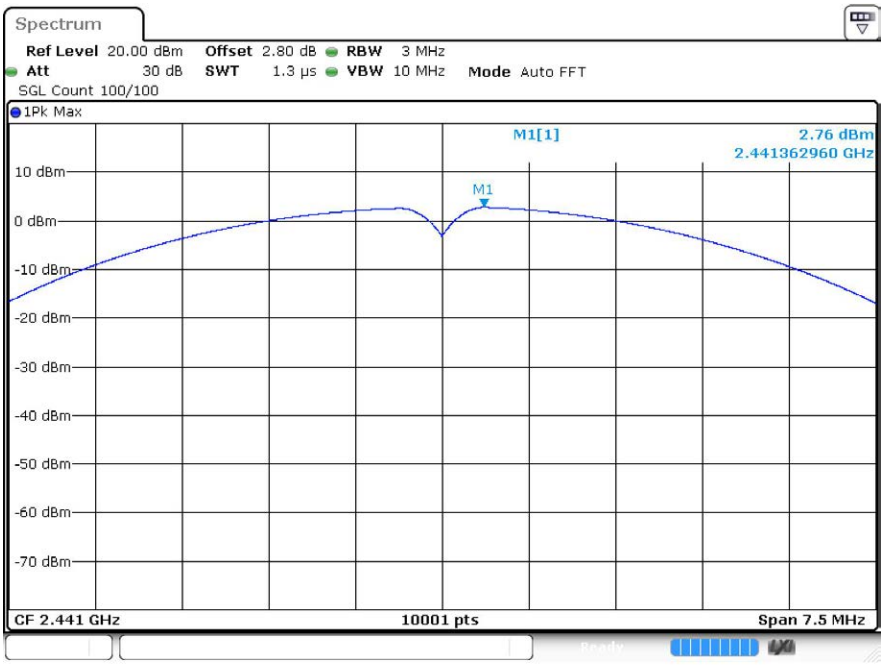

8DPSK/HCH	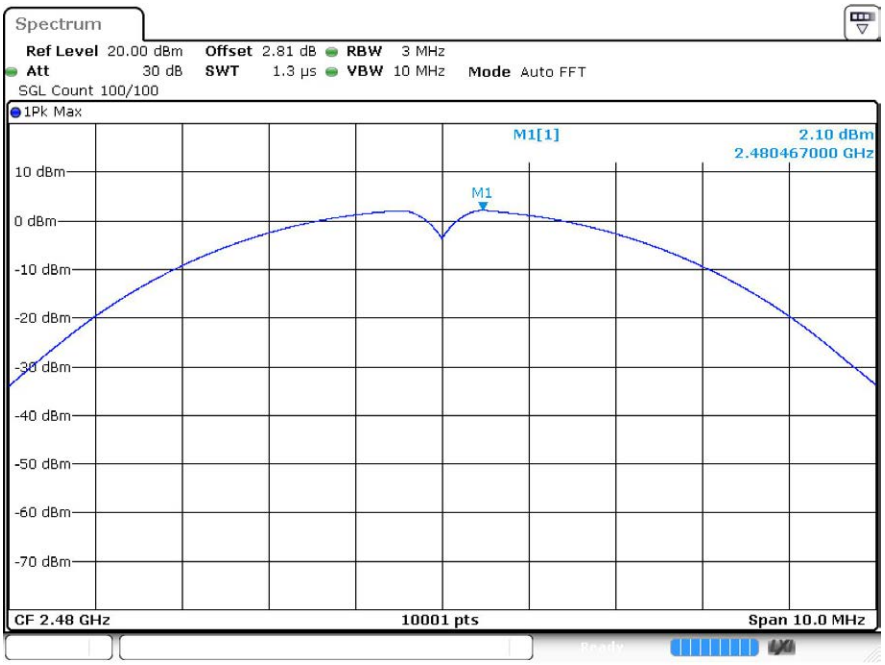 Spectrum Ref Level 20.00 dBm Offset 2.81 dB RBW 3 MHz Att 30 dB SWT 1.3 µs VBW 10 MHz Mode Auto FFT SGL Count 100/100 1Pk Max M1[1] 2.10 dBm 2.480467000 GHz M1 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.48 GHz 10001 pts Span 10.0 MHz

3 20dB Bandwidth

3.1 Test Result

Mode	Channel.	20dB Bandwidth [MHz]	Limit [MHz]	Verdict
GFSK	LCH	0.891	Not Specified	Pass
	MCH	0.867	Not Specified	Pass
	HCH	1.021	Not Specified	Pass
π/4DQPSK	LCH	1.398	Not Specified	Pass
	MCH	1.425	Not Specified	Pass
	HCH	1.395	Not Specified	Pass
8DPSK	LCH	1.406	Not Specified	Pass
	MCH	1.436	Not Specified	Pass
	HCH	1.423	Not Specified	Pass

3.2 Test Graphs

Test Graphs	
GFSK/LCH	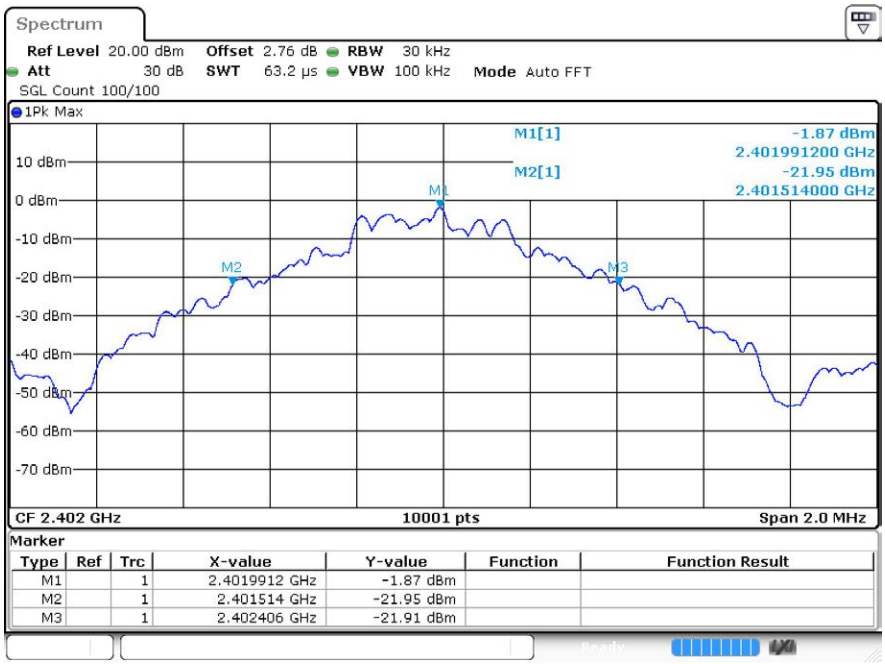
GFSK/MCH	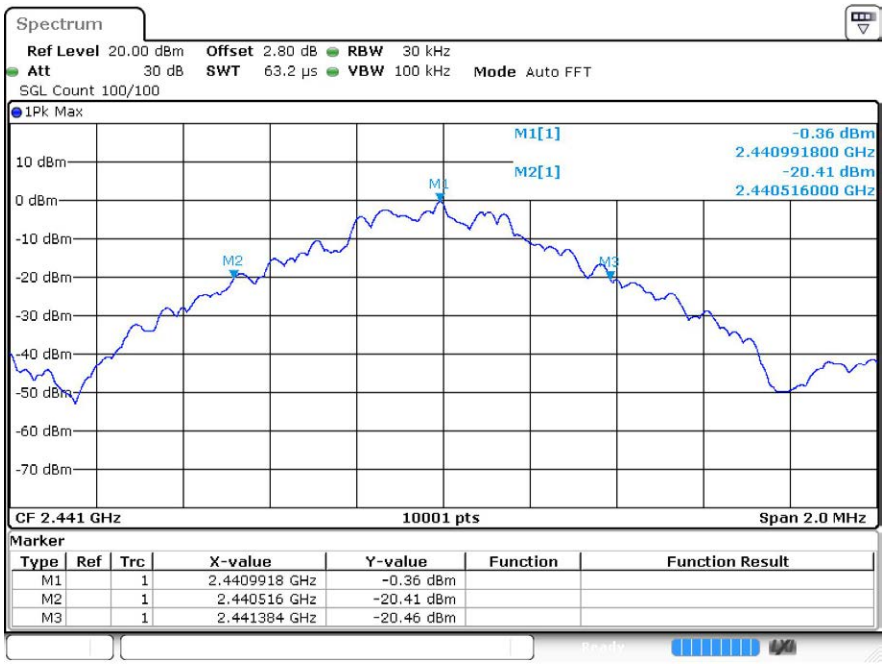

GFSK/HCH	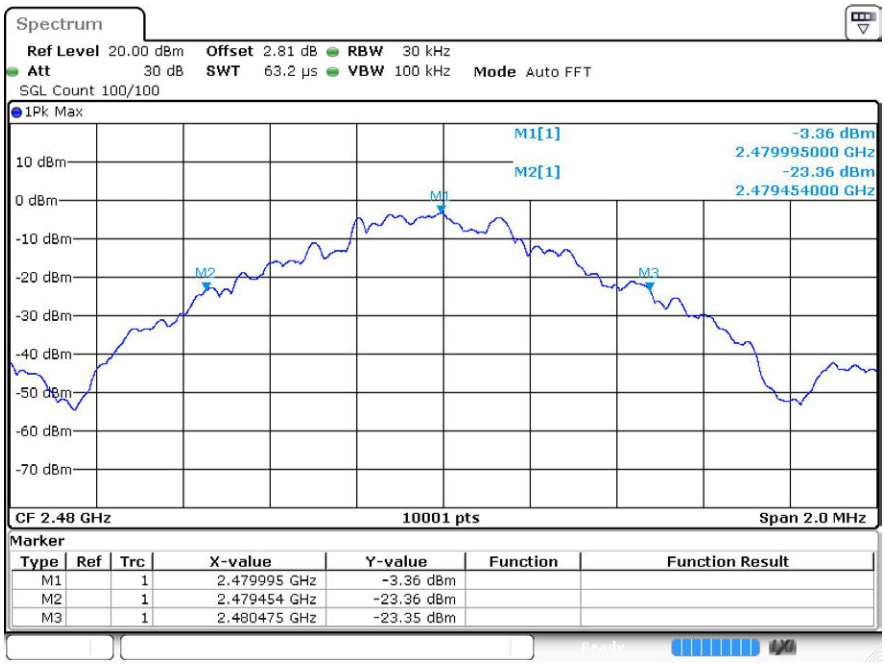
π/4DQPSK/LCH	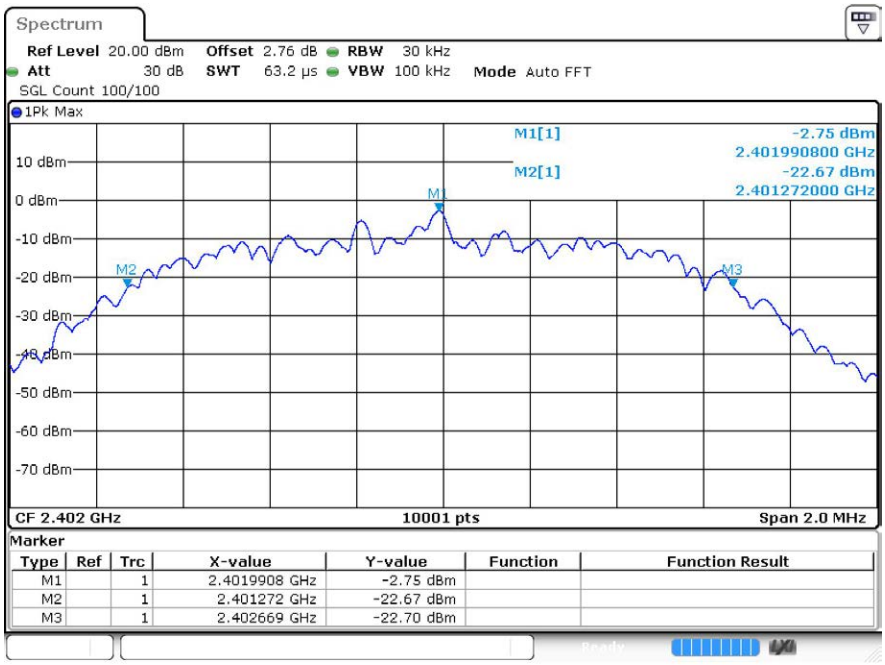

π/4DQPSK/MCH

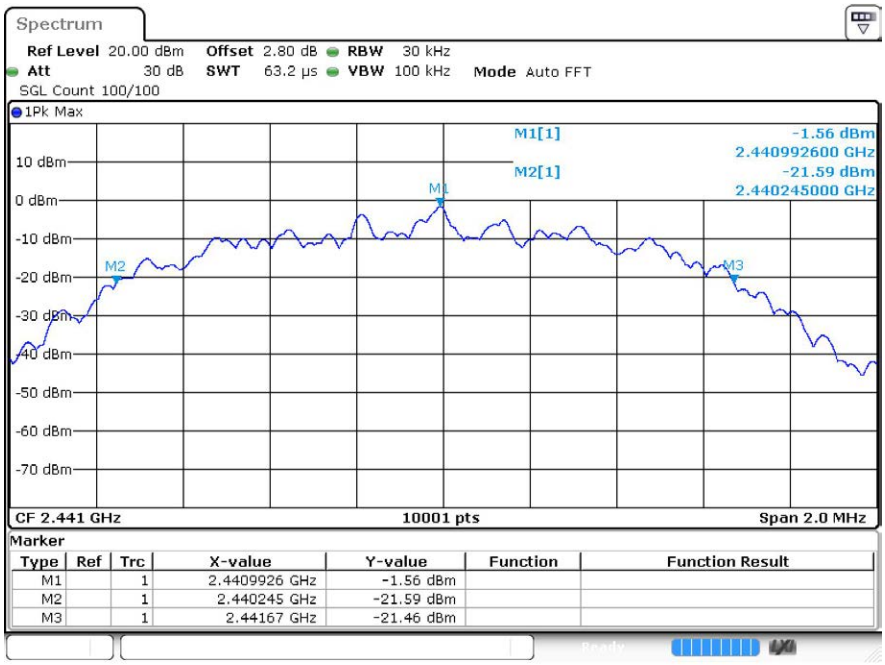

π/4DQPSK/HCH

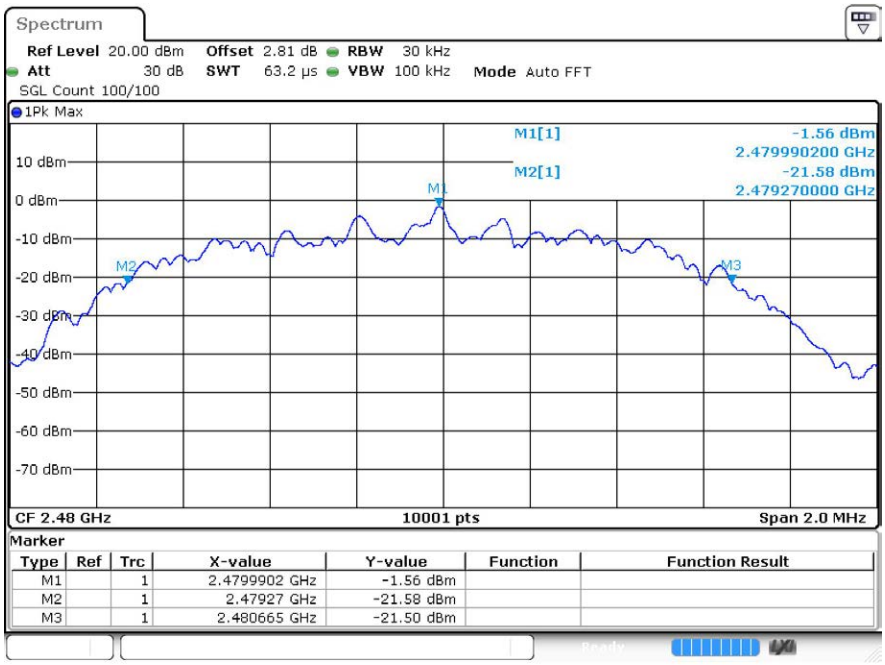

8DPSK/LCH

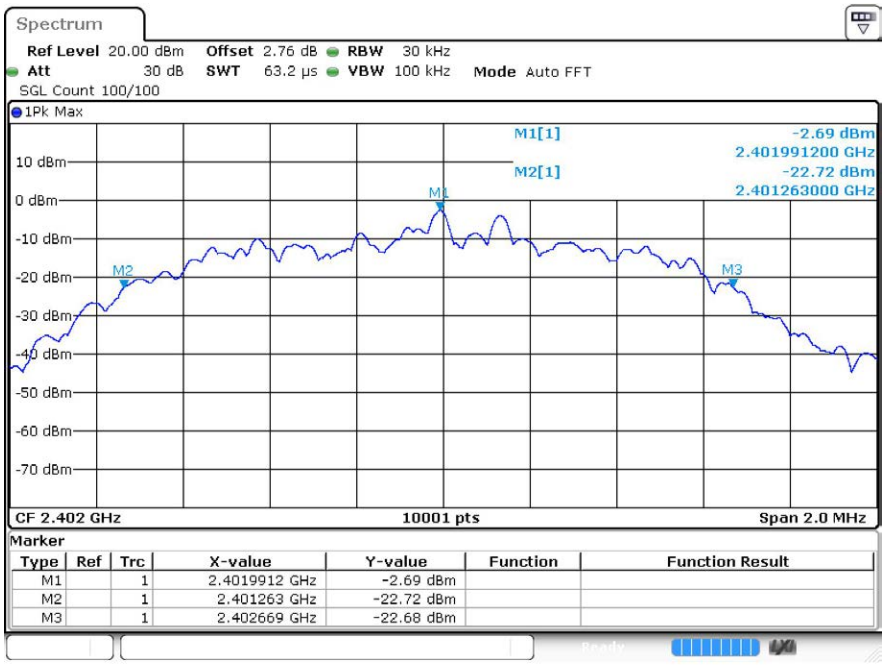

8DPSK/MCH

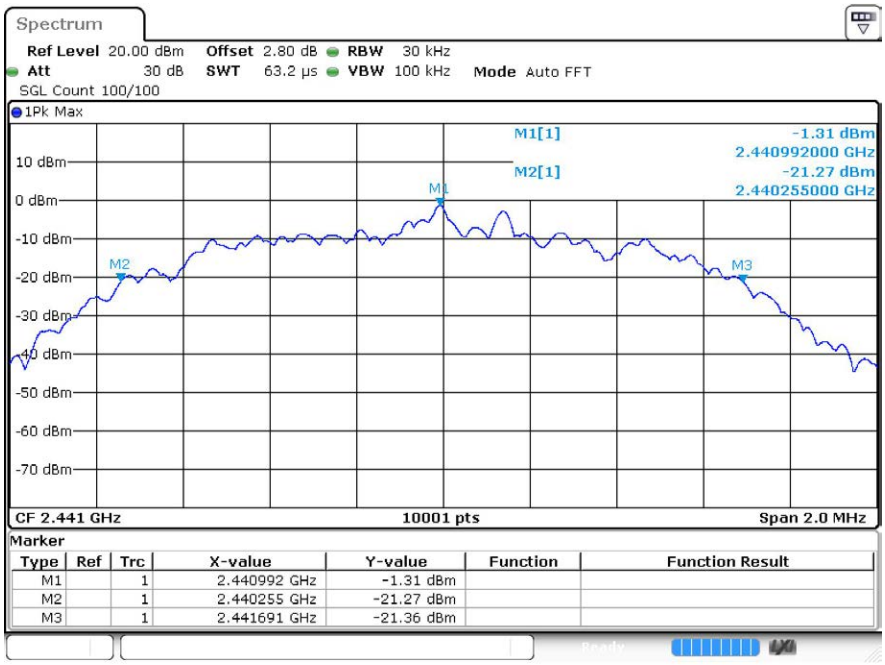

8DPSK/HCH	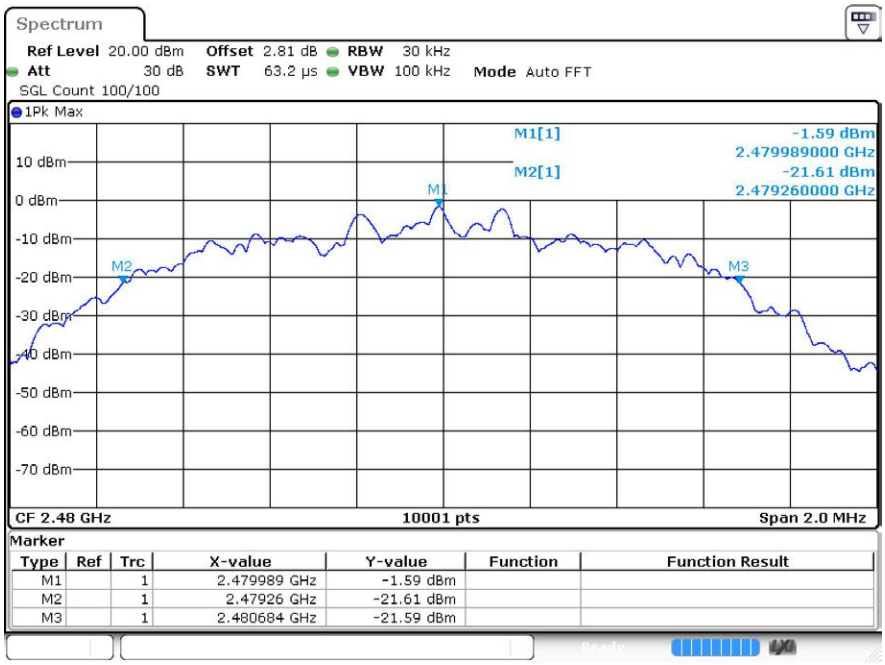 Spectrum Ref Level 20.00 dBm Offset 2.81 dB RBW 30 kHz Att 30 dB SWT 63.2 µs VBW 100 kHz Mode Auto FFT SGL Count 100/100 1Pk Max M1[1] -1.59 dBm 2.479989000 GHz M2[1] -21.61 dBm 2.479260000 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M3 CF 2.48 GHz 10001 pts Span 2.0 MHz Marker Type Ref Trc X-value Y-value Function Function Result M1 1 2.479989 GHz -1.59 dBm M2 1 2.47926 GHz -21.61 dBm M3 1 2.480684 GHz -21.59 dBm

4 Carrier Frequency Separation

4.1 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit [MHz]	Verdict
GFSK	MCH	1.002	0.578	Pass
π/4DQPSK	MCH	1.064	0.95	Pass
8DPSK	MCH	0.972	0.957	Pass

4.2 Test Graphs

Test Graphs	
GFSK/MCH	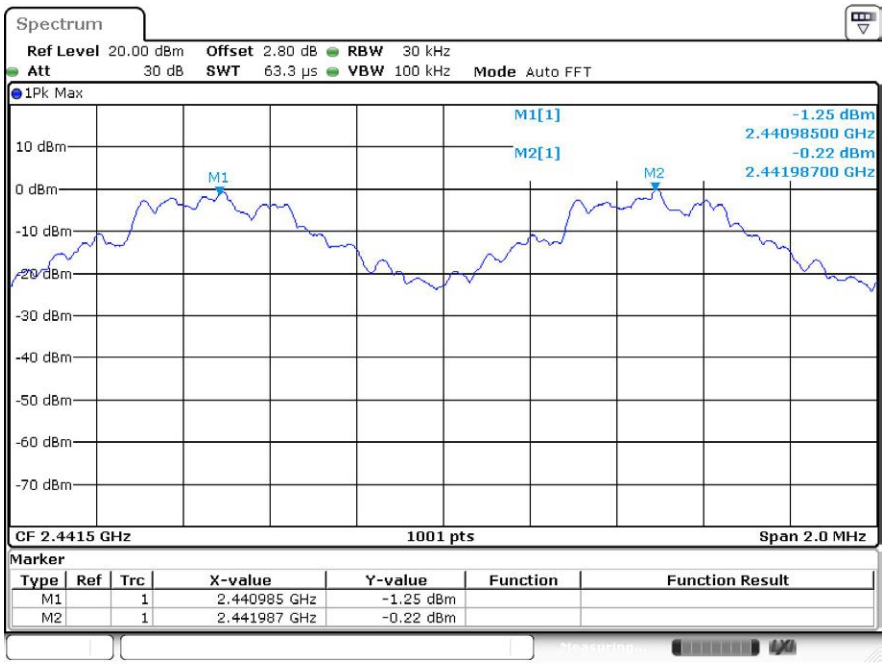
π/4DQPSK/MCH	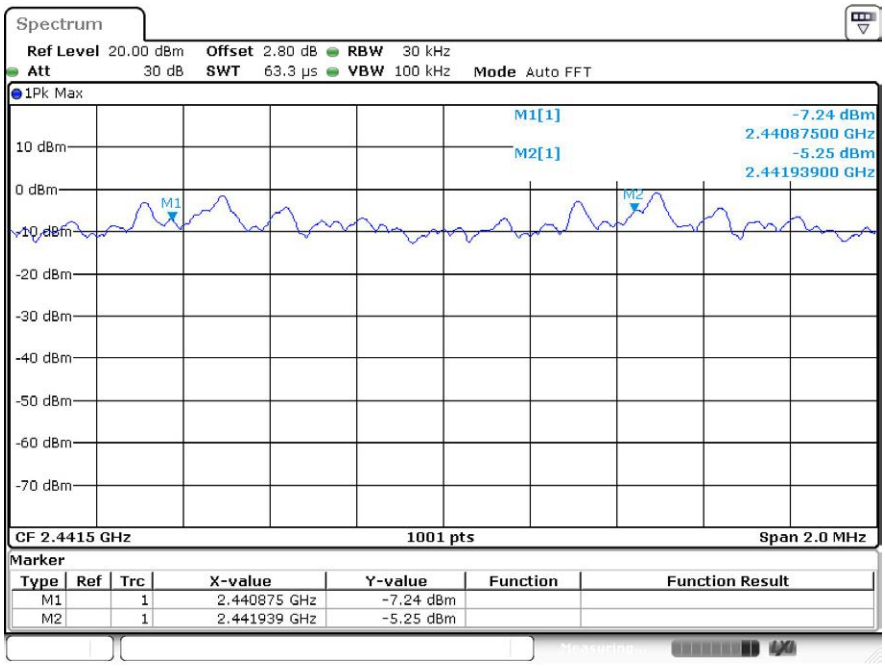

8DPSK/MCH	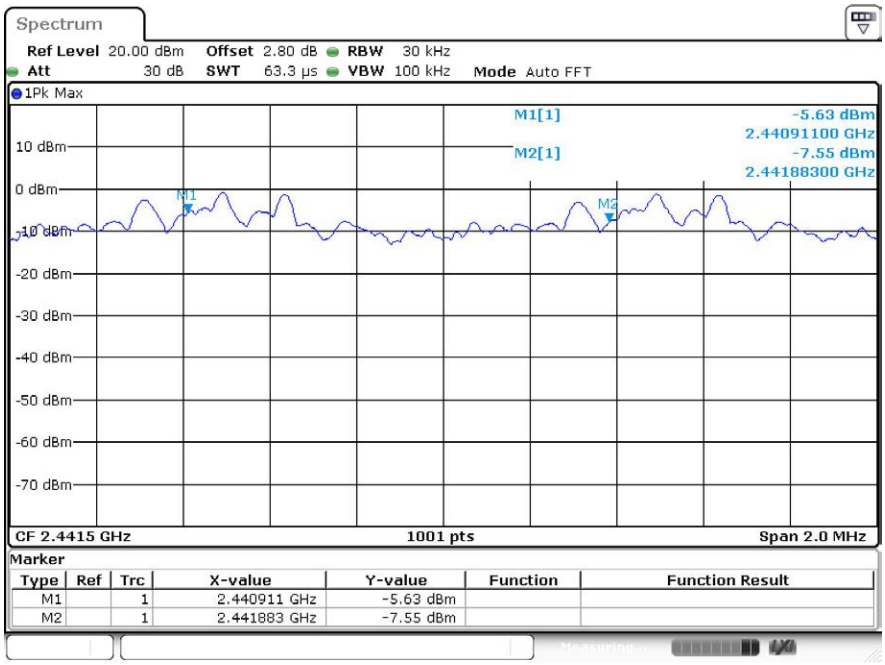 Spectrum Ref Level 20.00 dBm Offset 2.80 dB RBW 30 kHz Att 30 dB SWT 63.3 µs VBW 100 kHz Mode Auto FFT 1Pk Max M1[1] -5.63 dBm 2.44091100 GHz M2[1] -7.55 dBm 2.44188300 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.4415 GHz 1001 pts Span 2.0 MHz Marker Type Ref Trc X-value Y-value Function Function Result M1 1 2.440911 GHz -5.63 dBm M2 1 2.441883 GHz -7.55 dBm

5 Hopping Channel Number

5.1 Test Result

Mode	Channel.	Number of Hopping Channel [N]	Limit [N]	Verdict
GFSK	Hop	79	>=15	PASS
π/4DQPSK	Hop	79	>=15	PASS
8DPSK	Hop	79	>=15	PASS

5.2 Test Graphs

Test Graphs	
GFSK/Hop	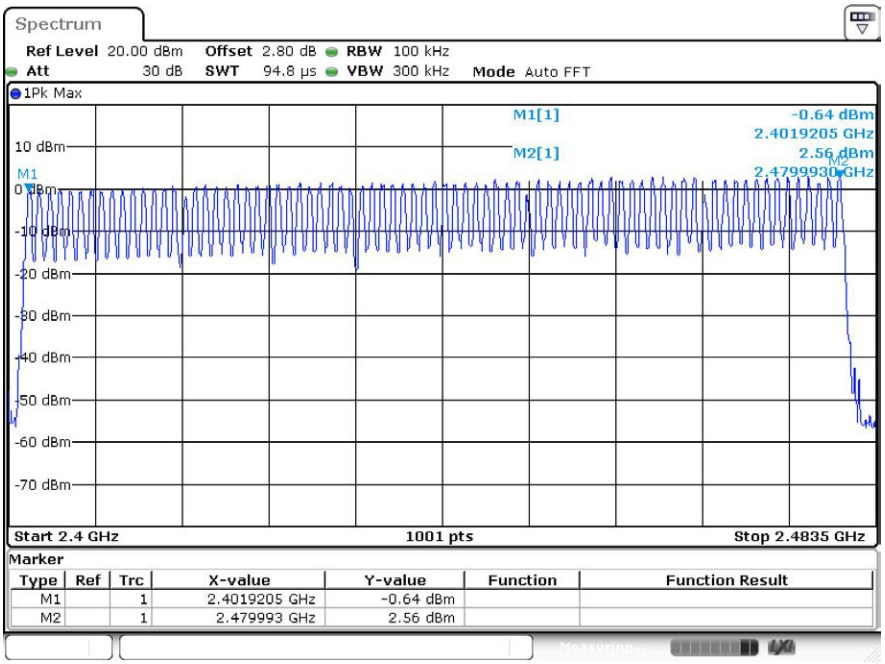
π/4DQPSK/Hop	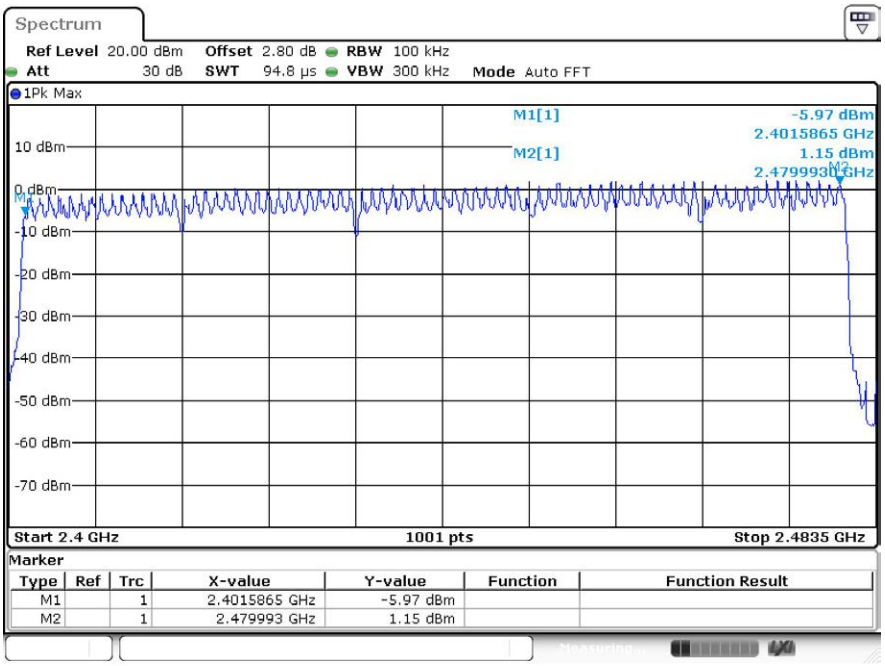

8DPSK/Hop	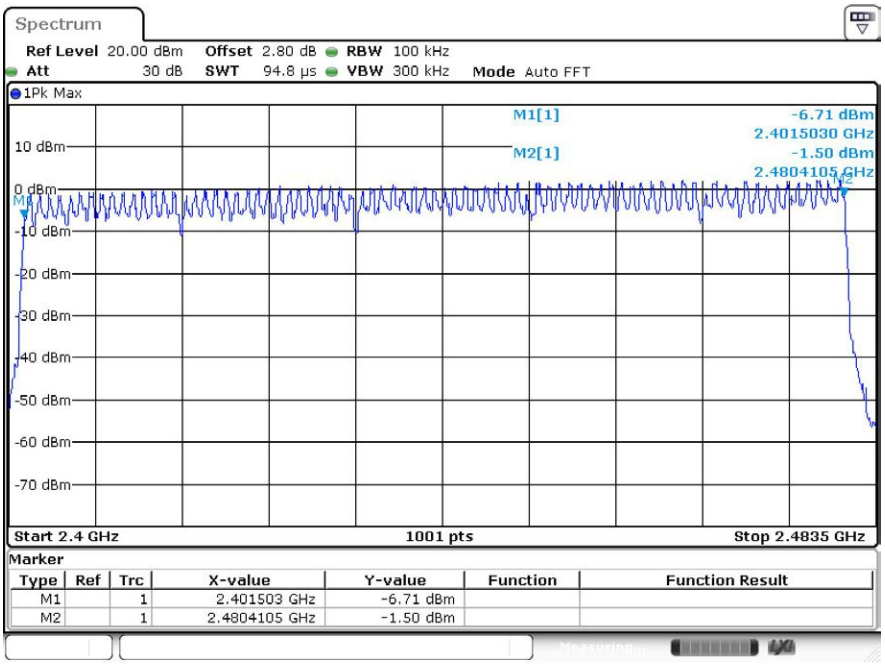 Spectrum Ref Level 20.00 dBm Offset 2.80 dB RBW 100 kHz Att 30 dB SWT 94.8 µs VBW 300 kHz Mode Auto FFT 1Pk Max M1[1] -6.71 dBm 2.4015030 GHz M2[1] -1.50 dBm 2.4804105 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 2.4 GHz 1001 pts Stop 2.4835 GHz Marker Type Ref Trc X-value Y-value Function Function Result M1 1 2.401503 GHz -6.71 dBm M2 1 2.4804105 GHz -1.50 dBm

6 Dwell Time

6.1 Test Result

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[ms]	Limit [s]	Verdict
GFSK	DH5	MCH	2.885	116	334.66	0.4	Pass
π/4DQPSK	2DH5	MCH	2.89	106	306.34	0.4	Pass
8DPSK	3DH5	MCH	2.891	98	283.318	0.4	Pass

6.2 Test Graphs

Test Graphs	
GFSK_DH5/MCH	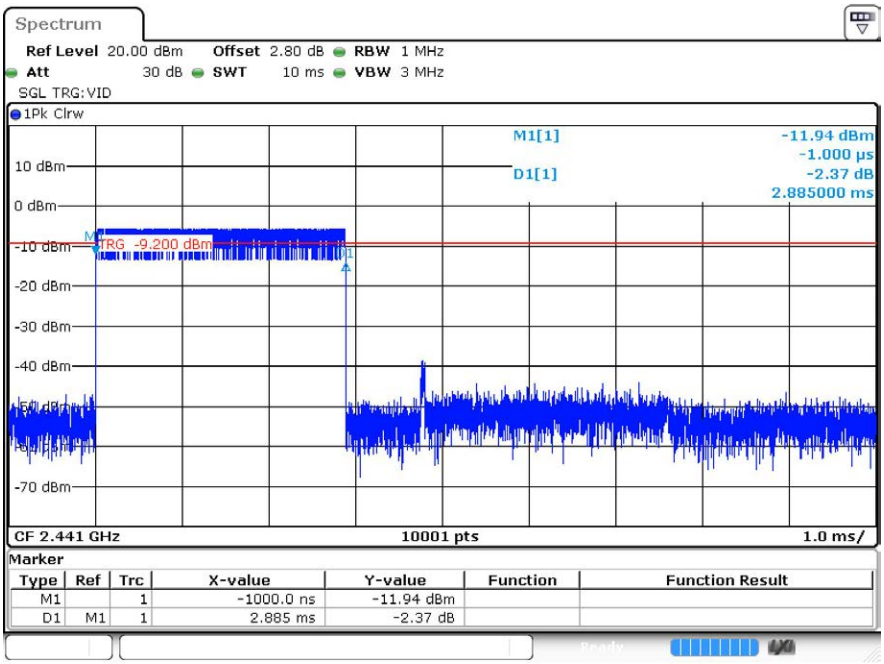 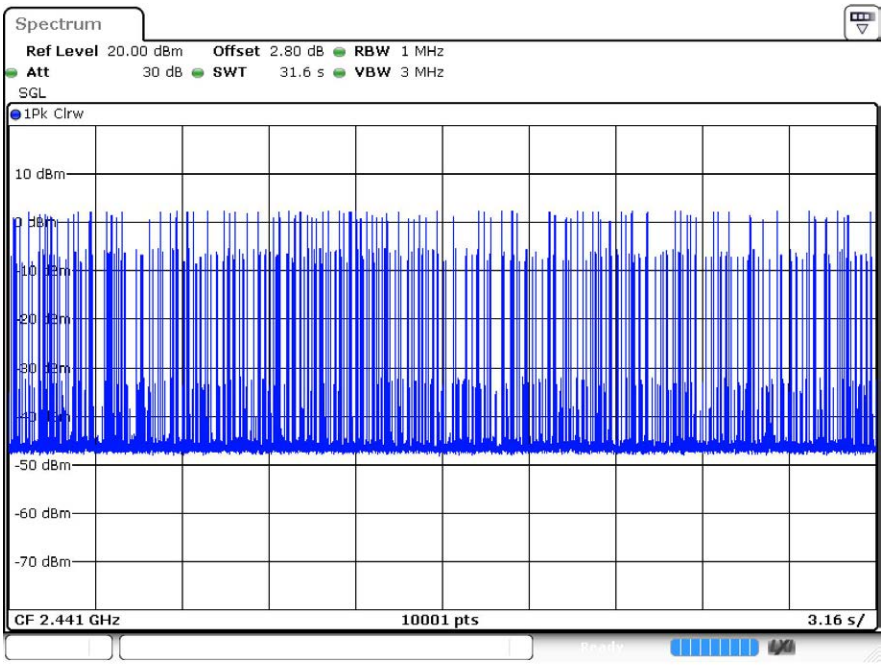

π/4DQPSK
_2DH5/MCH

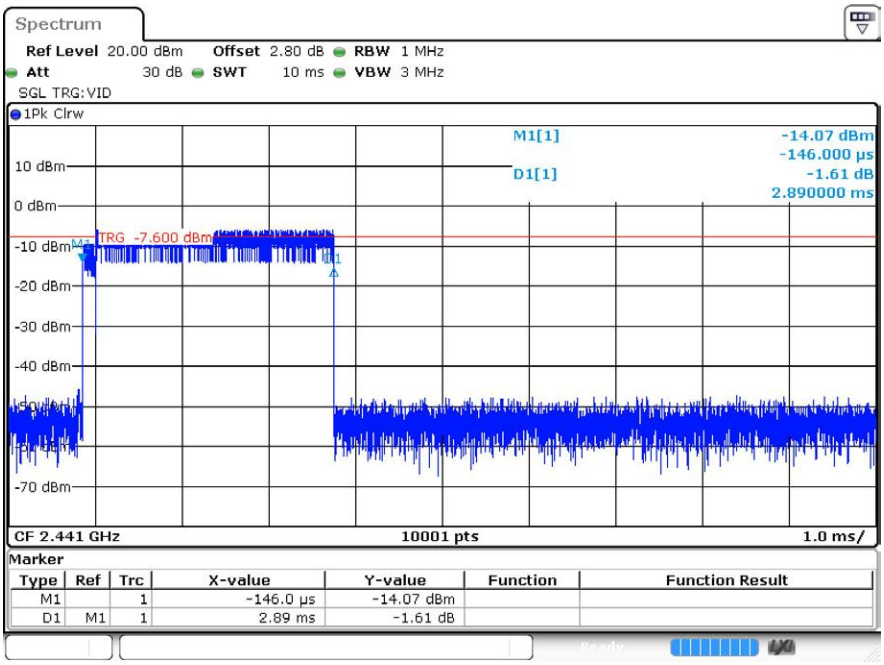

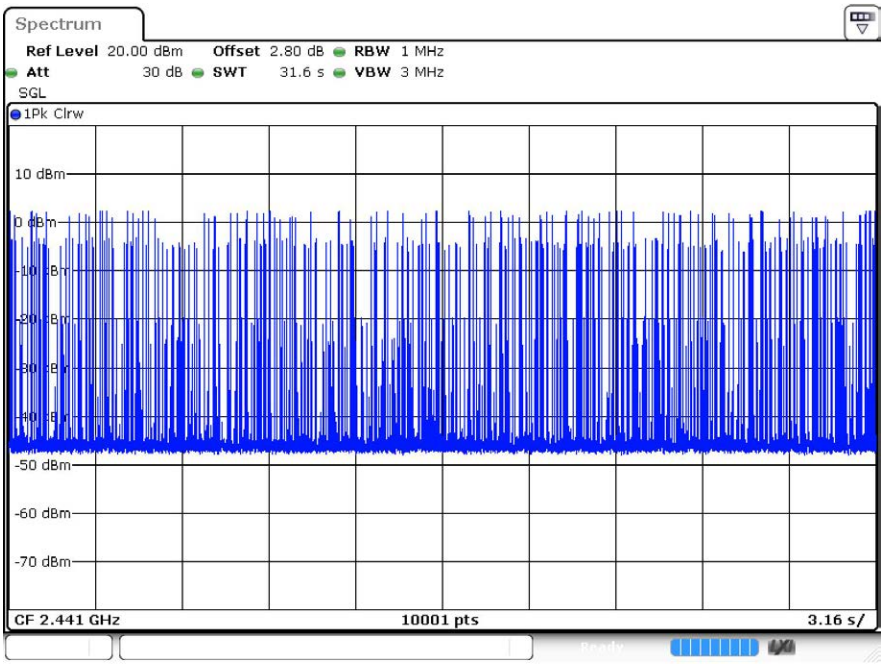

8DPSK _3DH5/MCH

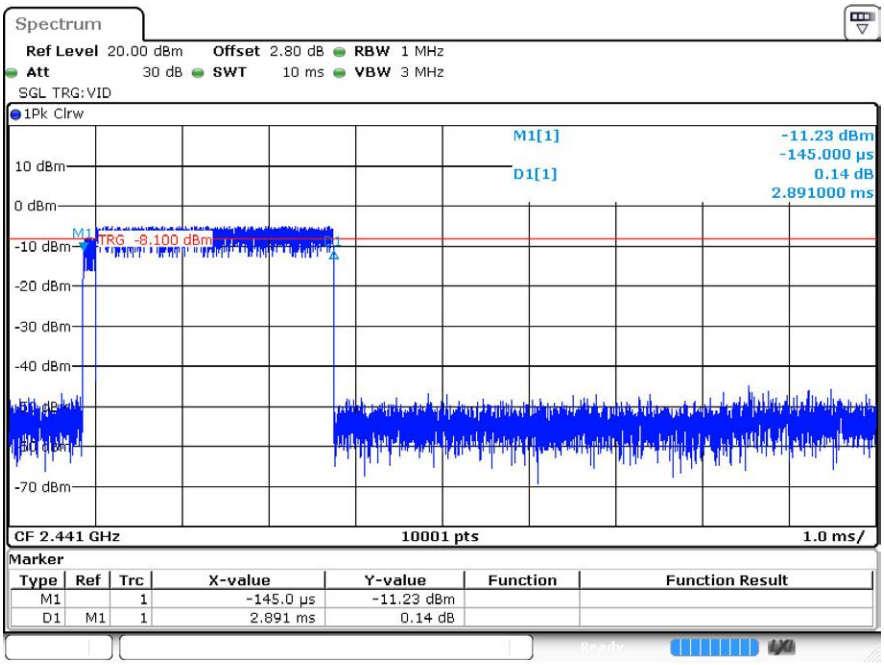

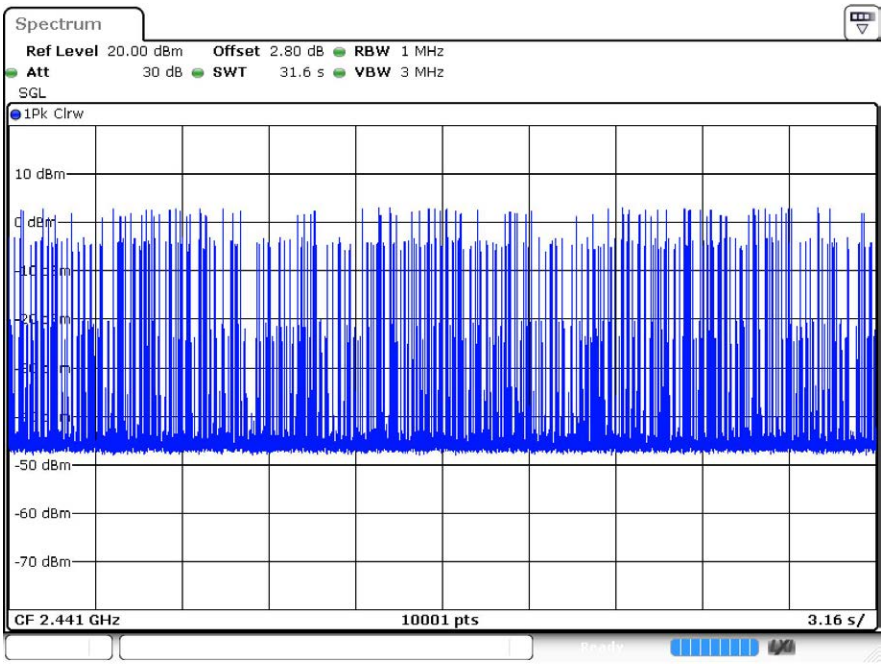

7 RF Conducted Spurious Emissions

7.1 Test Result

Mode	Channel	Max. Level [dBc]	Limit [dBc]	Verdict
GFSK	LCH	-41.49	-20	Pass
	MCH	-43.36	-20	Pass
	HCH	-41.74	-20	Pass
π/4DQPSK	LCH	-38.95	-20	Pass
	MCH	-41.63	-20	Pass
	HCH	-41.15	-20	Pass
8DPSK	LCH	-40.32	-20	Pass
	MCH	-42.4	-20	Pass
	HCH	-41.58	-20	Pass

7.2 Test Graphs

GFSK_LCH_Graphs	
Pref	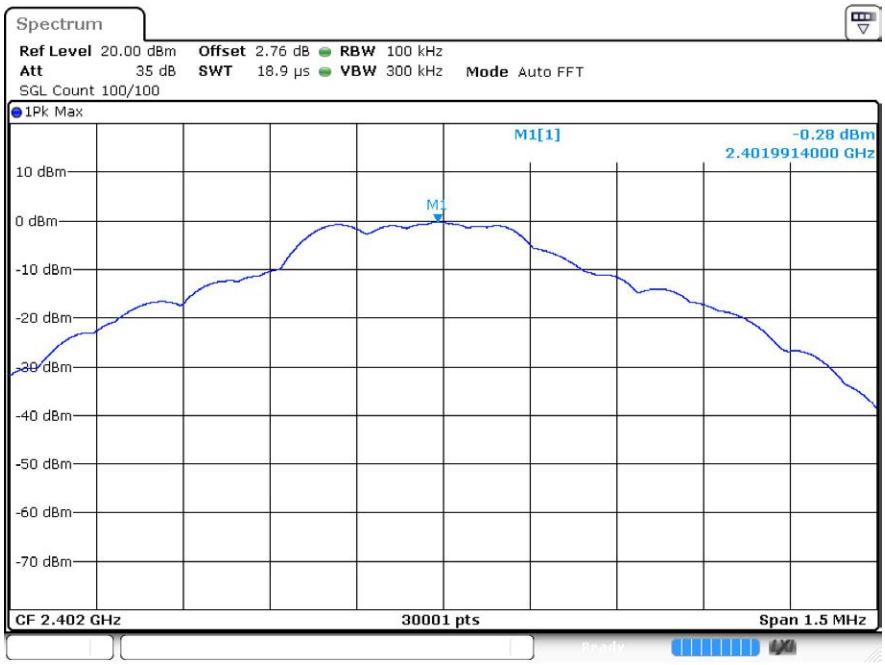
Puw	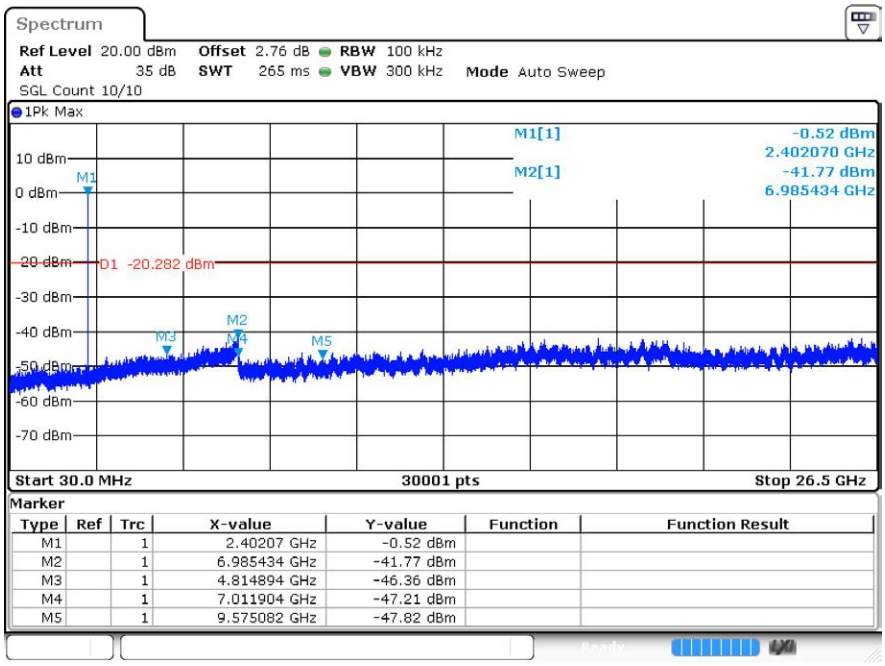

GFSK_MCH_Graphs	
Pref	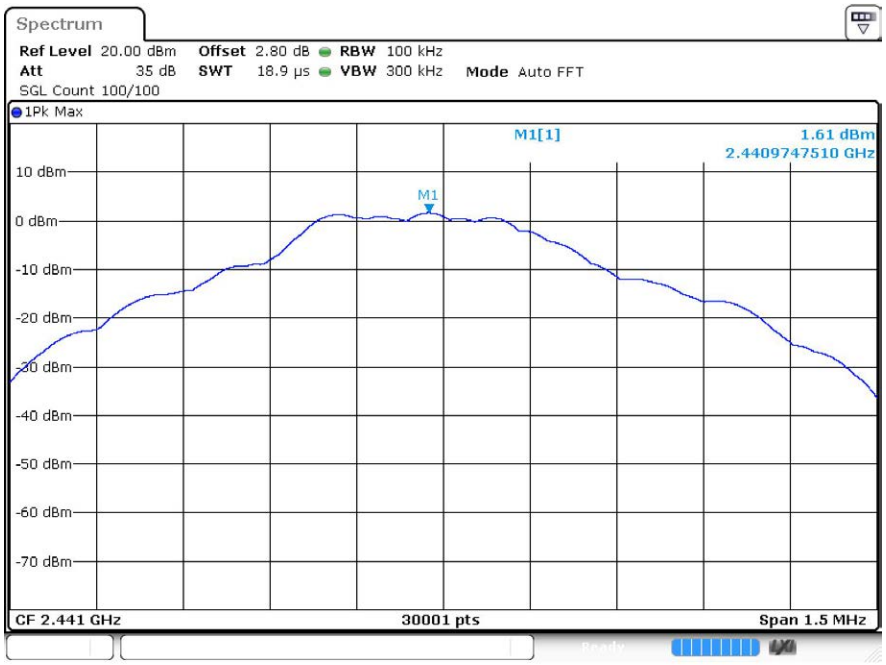
Puw	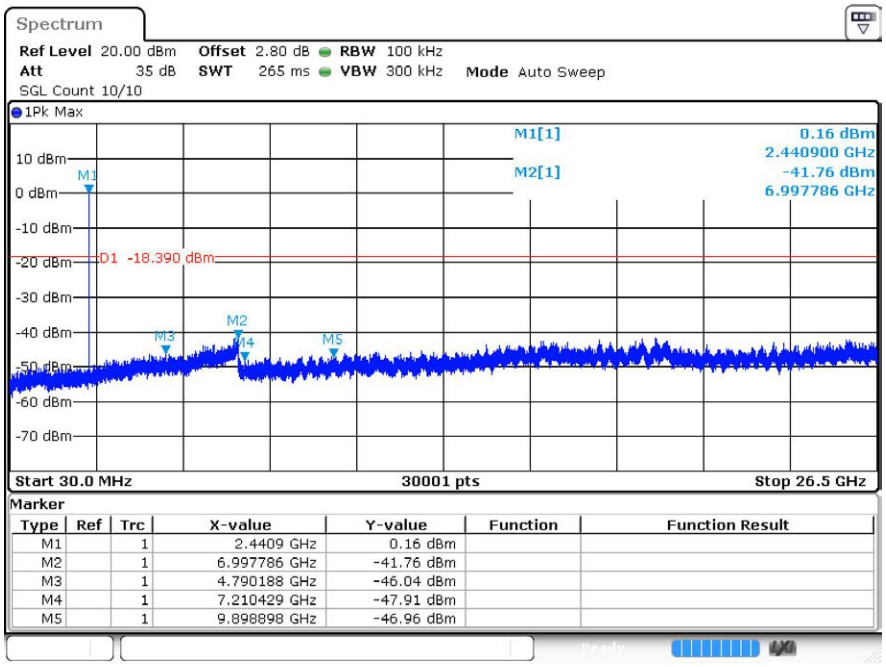

GFSK_HCH_Graphs	
Pref	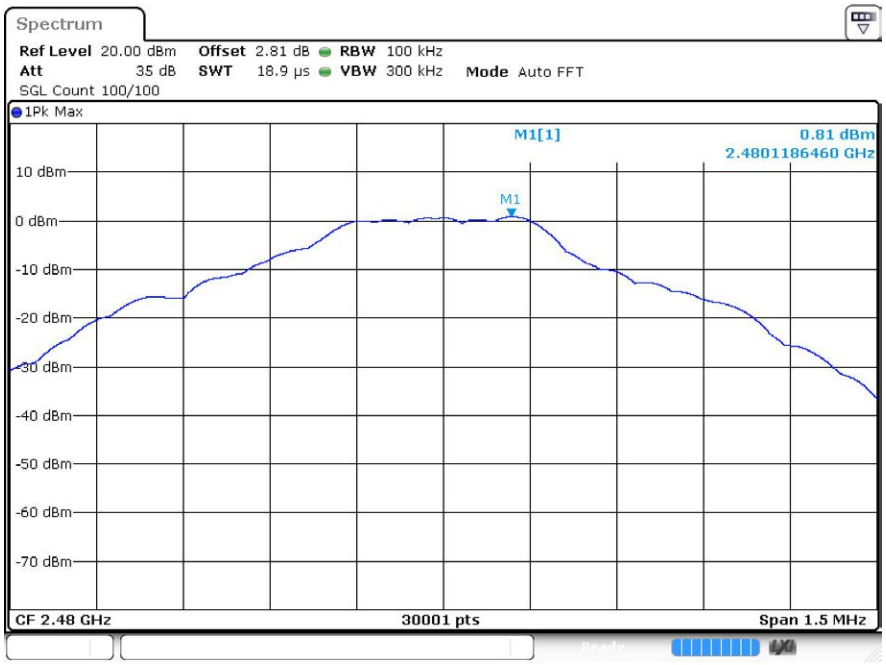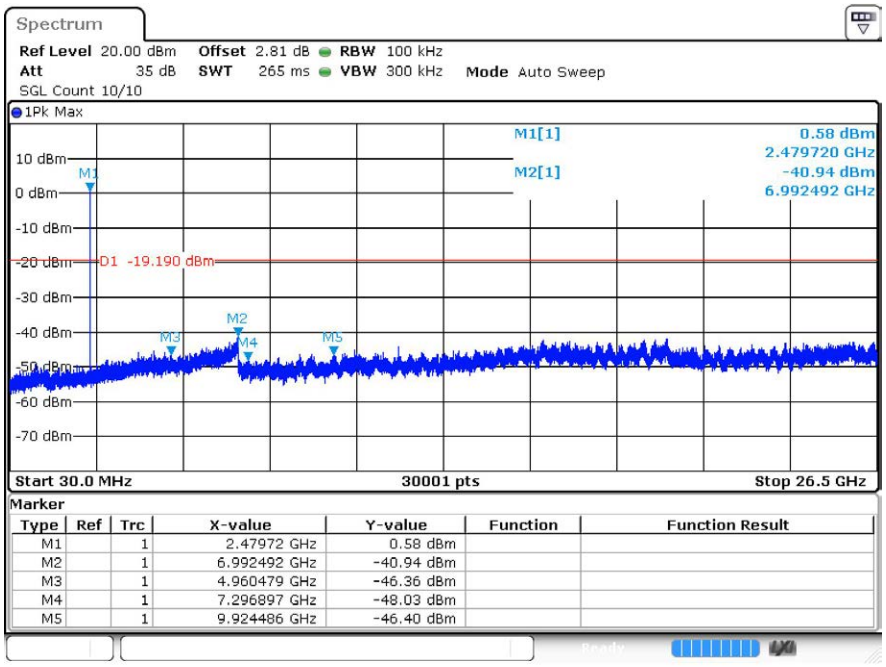
Puw