

Test Report

Product	Handheld Battery Powered Power Tool with WiFi
Name and address of the applicant	Atlas Copco SE-105 23 Stockholm Sweden
Name and address of the manufacturer	Atlas Copco SE-105 23 Stockholm Sweden
Model	ITB-A
Rating	Secondary Battery (Li-Ion, 18 V _{DC} , 2.6 Ah, 46.8 Wh)
Trademark	Atlas Copco
Serial number	L0000015
Additional information	WiFi
Tested according to	Parts of FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Parts of Industry Canada RSS-247, Issue 2 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
Order number	401311
Tested in period	2020-07-03 to 2020-08-26
Issue date	2020-09-15
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway CAB Number: FCC: NO0001 ISED: NO0470   An accredited technical test executed under the Norwegian accreditation scheme
 Prepared by [Frode Sveinsen]  Approved by [G.Suhanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.	

CONTENTS

1	INFORMATION	3
1.1	Test Item	3
1.2	Normal test condition	3
1.3	Test Engineer(s)	4
1.4	Antenna Requirement	4
1.5	Worst-Case Configuration, Mode and Duty Cycle	4
1.6	EUT Operating Modes	4
1.7	Power Levels	4
1.8	Comments	4
2	TEST REPORT SUMMARY	5
2.1	General	5
2.2	Test Summary	6
3	TEST RESULTS	7
3.1	Occupied Bandwidth (99% BW)	7
3.2	DTS Bandwidth	10
3.3	Peak Power Output, RMS	13
3.4	Conducted Emissions at Antenna Connector	18
3.5	Restricted Bands of operation	22
3.6	Radiated Emissions, Band Edge	23
3.7	Radiated Emissions 30 – 1000 MHz	28
3.8	Radiated Emissions, 1 – 18 GHz	30
3.9	Power Spectral Density (PSD)	37
4	Measurement Uncertainty	40
5	LIST OF TEST EQUIPMENT	41
6	BLOCK DIAGRAM	42
6.1	Conducted Tests	42
6.2	Test Site Radiated Emission	42

1 INFORMATION

1.1 Test Item

Name	Atlas Copco
Model/version	ITB-A
FCC ID	2AQ8P-ITB
ISED ID	24224-ITB
Serial number	L0000015
Hardware identity and/or version	3
Software identity and/or version	3.3
Frequency Range	2412 – 2462 MHz
Number of Channels	11
Channel Separation	5 MHz
Operating Modes	802.11b/g/n (HT20)
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
User Frequency Adjustment	None
Conducted Output Power	802.11b: 18.6 mW 802.11g: 83.2 mW 802.11n HT20: 91.2 mW
Power Supply	Secondary Battery (Li-Ion, 18 V _{DC} , 46.8 Wh, 2.6 Ah)
Desktop Charger	N/A (Battery is charged in a separate charger)
Antenna Connector	None
Number of Antennas	2
Diversity or Smart Antennas	Diversity

Description of Test Item

The tested device is a Power Tool with 2.4GHz and 5GHz WiFi.

1.2 Normal test condition

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	18 V _{DC} (Nominal Voltage)

The values are the limit registered during the test period.

All tests were performed with a fully charged battery.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Antenna Requirement

Is the antenna detachable?

☐ Yes ☒ No

If detachable, is the antenna connector non-standard?

☐ Yes ☐ No

Type of antenna connector: N/A

Ref. FCC §15.203

1.5 Worst-Case Configuration, Mode and Duty Cycle

Radiated Emissions and Power Line Conducted Emissions were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario. All measurements were performed with bitrate and duty cycle reported below.

Modulation	Worst Case Bitrate	Duty Cycle
802.11b	1 Mb	100 %
802.11g	6 Mb	100 %
802.11n HT20	MCS0	100 %

1.6 EUT Operating Modes

Description of operating modes	Continuous TX, 2.4GHz, IEEE 802.11 b/g/n HT20/HT40
Additional information	A computer was connected by USB to the EUT. Putty was used to log in with SH, and batch commands were used to program antenna, modulation, bit-rate and channel.

1.7 Power Levels

Output Power values below were used for all tests on this model. This is the maximum value.

	Modulation and Power Level		
Carrier No	802.11b	802.11g	802.11n HT20
1 to 11	127	127	127

1.8 Comments

All tested parameters are passed.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and ISED RSS-247 Issue 2 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were performed in a semi-anechoic chamber at measuring distance of 3m.

A description of the test facility is on file with the FCC and ISED.

☒ New Submission

☐ Class II Permissive Change

DTS Equipment Code

☒ Production Unit

☐ Pre-production Unit

☐ Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	N/A ¹
Antenna Requirement	15.203	6.8 (RSS-GEN)	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	Complies
Occupied Bandwidth (99% BW)	N/A	6.7 (RSS-GEN)	Complies
DTS Bandwidth	15.247(a)(2)	5.2 (1) (RSS-247)	Complies
Peak Power Output	15.247(b)	5.4 (RSS-247)	Complies
Power Spectral Density	15.247(d)	5.2 (2) (RSS-247)	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	5.5 (RSS-247)	Complies
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	Complies

¹ Covered by UPCS test report

Revision history

Revision	Date	Comment	Sign
00	2020-09-15	First edition	FS

3 TEST RESULTS

3.1 Occupied Bandwidth (99% BW)

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.2

Test Results: Complies

Measurement Data:

Number of RF channels in use: 11


Modulation type and bitrate	Occupied Bandwidth (99% BW)		
	Ch 01, 2412 MHz	Ch 06, 2437 MHz	Ch 11, 2462 MHz
802.11b, 1 Mbps	13.7 MHz	13.7 MHz	13.7 MHz
802.11g, 6 Mbps	17.4 MHz	17.5 MHz	17.4 MHz
802.11n, HT20	18.1 MHz	18.1 MHz	18.1 MHz

Occupied Bandwidth is reported for information only.


See attached plots

Requirements:


No requirements for Digital Transmission Systems.

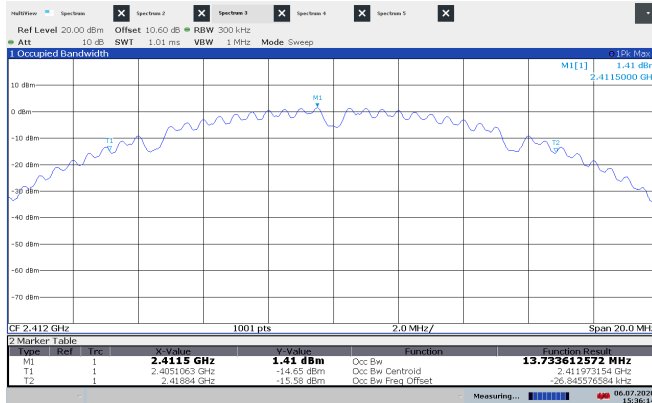


99% Occupied BW, 2412 MHz, 802.11b, 1Mb

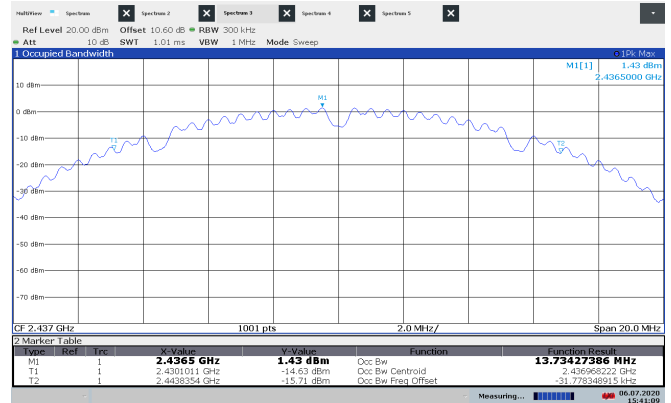


99% Occupied BW, 2437 MHz, 802.11b, 1Mb

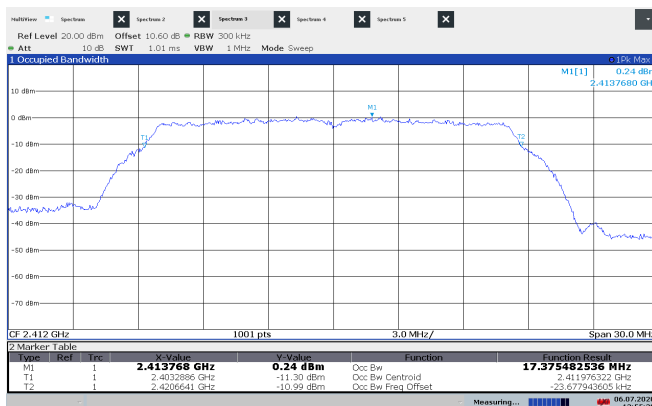


99% Occupied BW, 2412 MHz, 802.11g, 6Mb

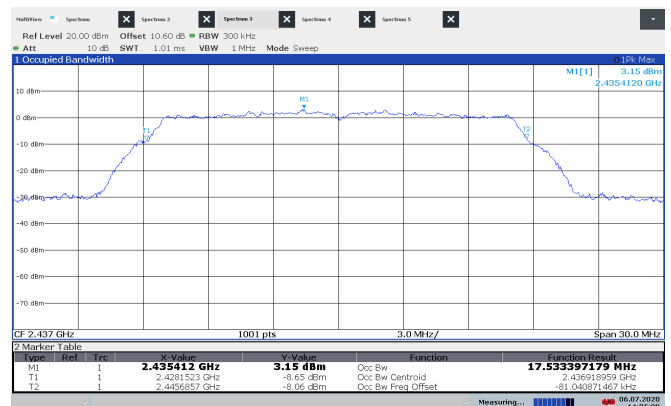


99% Occupied BW, 2437 MHz, 802.11g, 6Mb

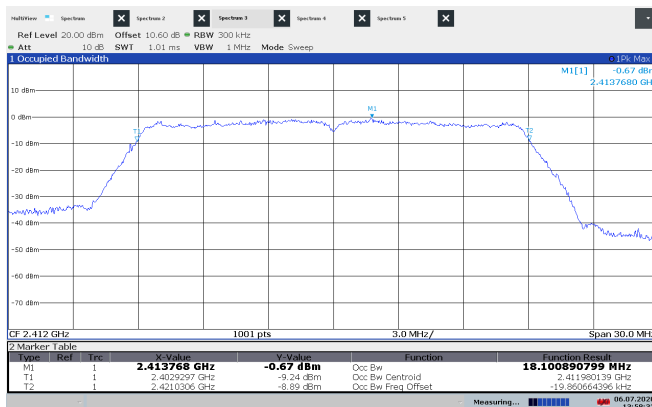


99% Occupied BW, 2412 MHz, 802.11n, HT20

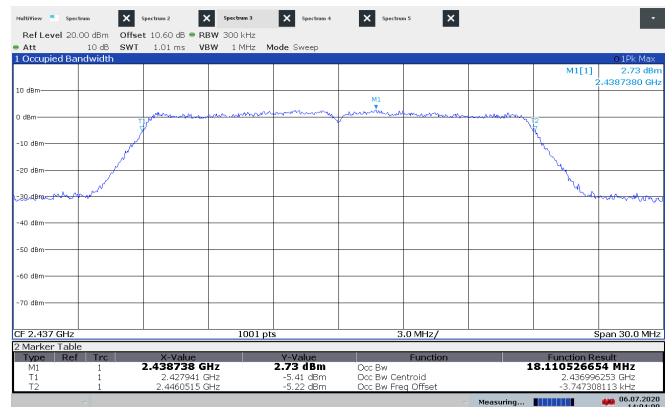


99% Occupied BW, 2437 MHz, 802.11n, HT20

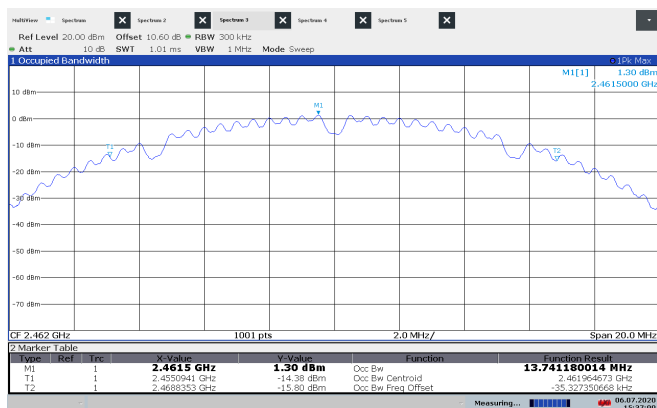

99% Occupied BW, 2462 MHz, 802.11b, 1Mb

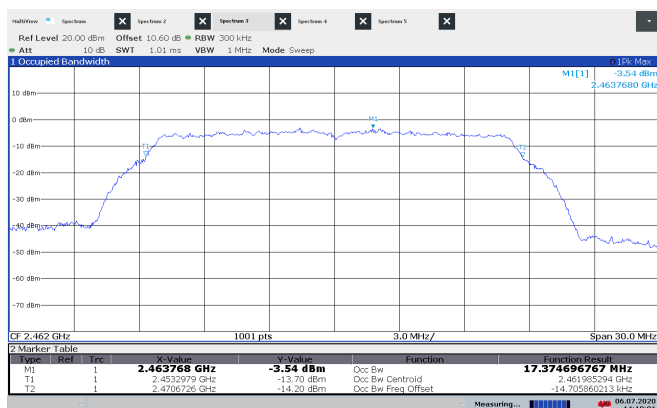

99% Occupied BW, 2462 MHz, 802.11g, 6Mb

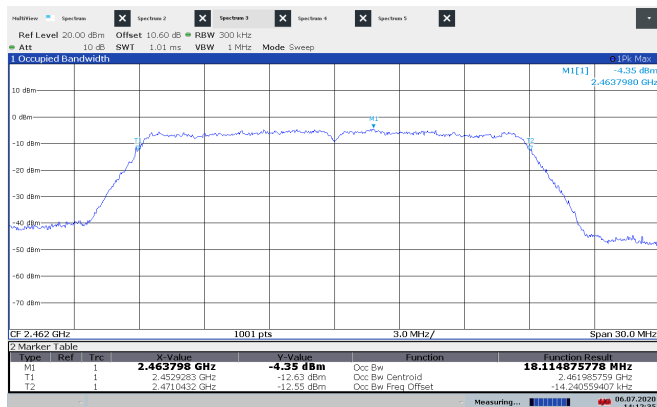

99% Occupied BW, 2462 MHz, 802.11n, HT20

3.2 DTS Bandwidth

FCC Part 15.247 (a)(2)

ISED Canada RSS-247 Issue 2, Clause 5.2 (1)

Measurement procedure: ANSI C63.10-2013 Clause 11.8


Test Results: Complies

Measurement Data:

Modulation type and bitrate	Measured DTS Bandwidth		
	Ch 01, 2412 MHz	Ch 06, 2437 MHz	Ch 11, 2462 MHz
802.11b, 1 Mbps	9.1 MHz	9.1 MHz	9.1 MHz
802.11g, 6 Mbps	16.5 MHz	16.5 MHz	16.5 MHz
802.11n, HT20	17.7 MHz	17.7 MHz	17.7 MHz

Requirements:


For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth (DTS BW) shall be at least 500 KHz.

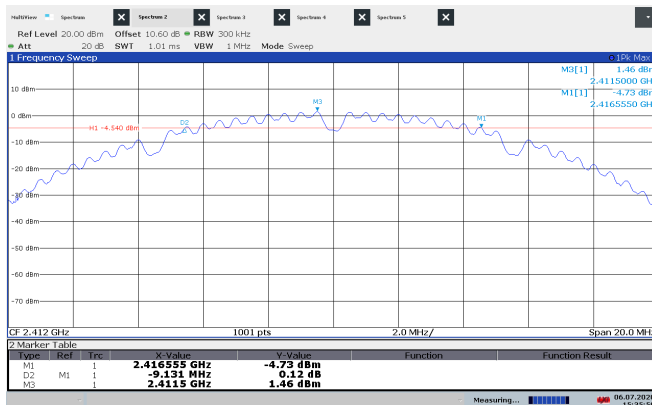


DTS Bandwidth, 2412 MHz, 802.11b, 1Mb




DTS Bandwidth, 2437 MHz, 802.11b, 1Mb

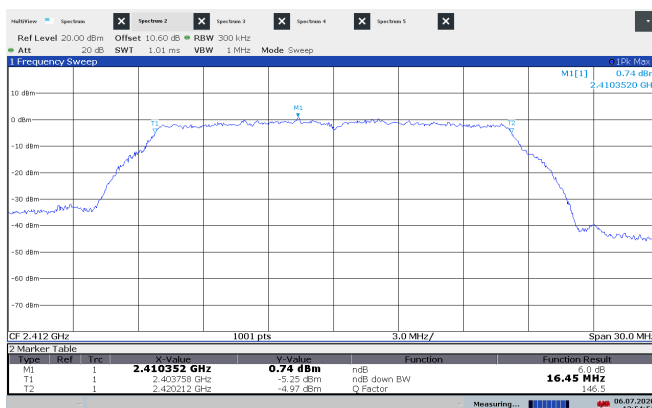


DTS Bandwidth, 2412 MHz, 802.11g, 6Mb

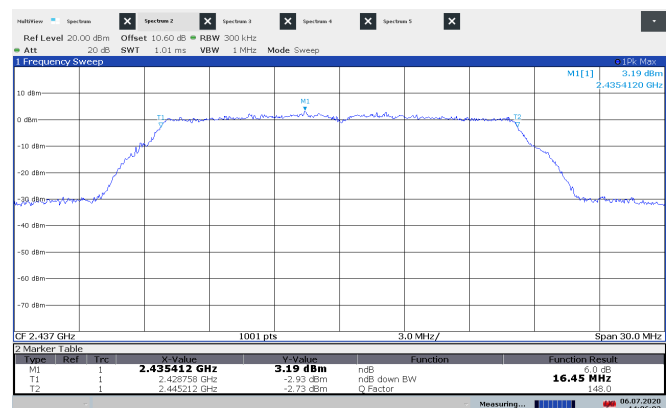


DTS Bandwidth, 2437 MHz, 802.11g, 6Mb

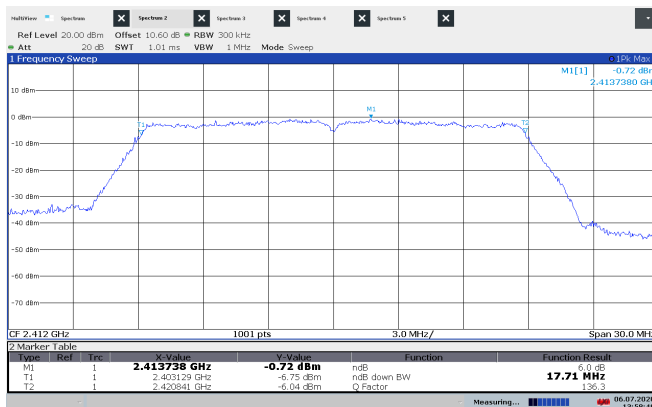


DTS Bandwidth, 2412 MHz, 802.11n, HT20

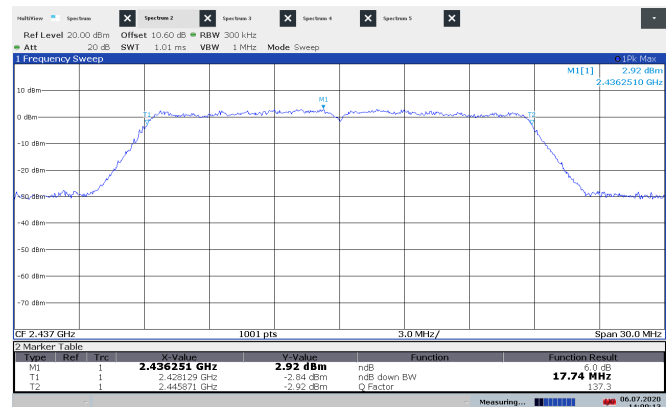


DTS Bandwidth, 2437 MHz, 802.11n, HT20

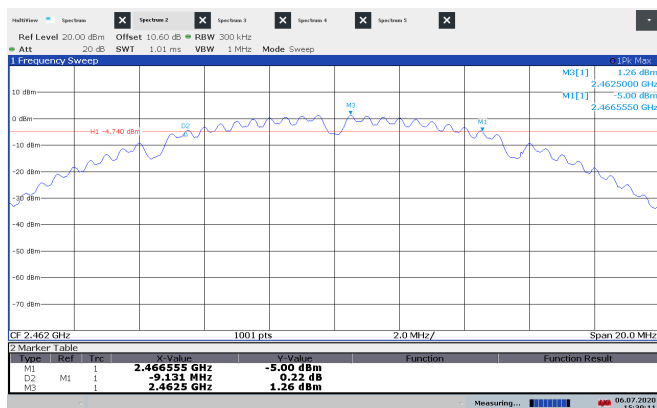

DTS Bandwidth, 2462 MHz, 802.11b, 1Mb

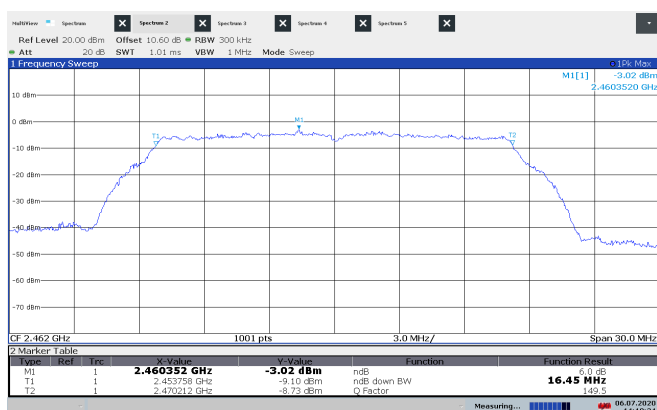

DTS Bandwidth, 2462 MHz, 802.11g, 6Mb

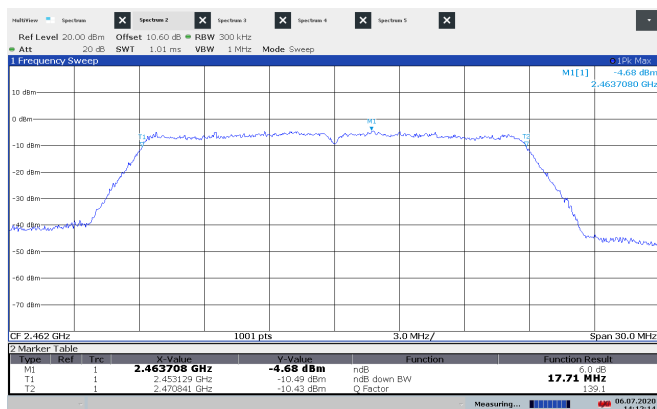

DTS Bandwidth, 2462 MHz, 802.11n, HT20

3.3 Peak Power Output, RMS

FCC Part 15.247 (b)

ISED Canada RSS-247 Issue 2, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

Measurement Data:

Carrier Frequency	Peak Conducted Power (dBm)		
(MHz)	802.11b 1Mbps	802.11g 6Mbps	802.11n HT20
2412	12.7	16.7	16.2
2417		17.7	17.3
2422		18.8	19.3
2437	12.6	19.2	19.6
2452		16.5	17.0
2457		13.8	14.6
2462	9.1	12.7	12.4

The Integrated Band Power Method was used to measure Output Power

Radiated Power was calculated from measured Field Strength using the method described in FCC KDB 412172 D01

Cable loss and Attenuator is included in the Conducted plots.

Transducer factor is included in the radiated plots.


See attached plots

Requirements:


The maximum peak output power shall not exceed the following limits:

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt


If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

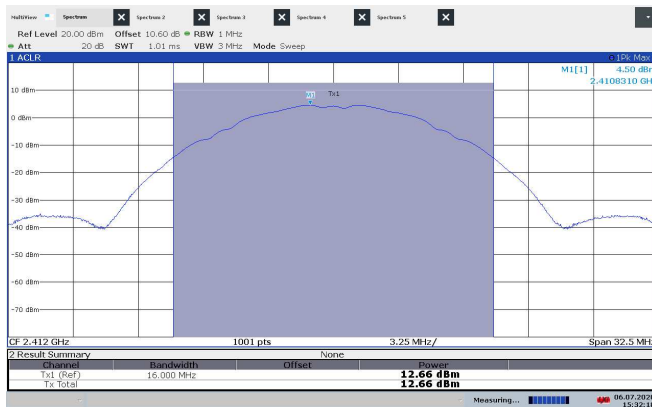


Peak Conducted Power, 2412 MHz, 802.11b, 1Mb

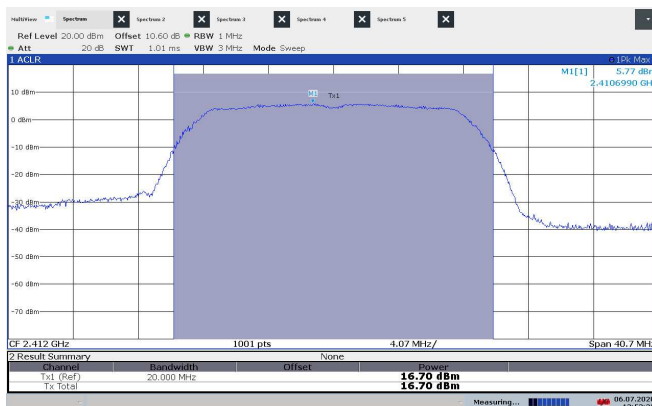


Peak Conducted Power, 2412 MHz, 802.11g, 6Mb

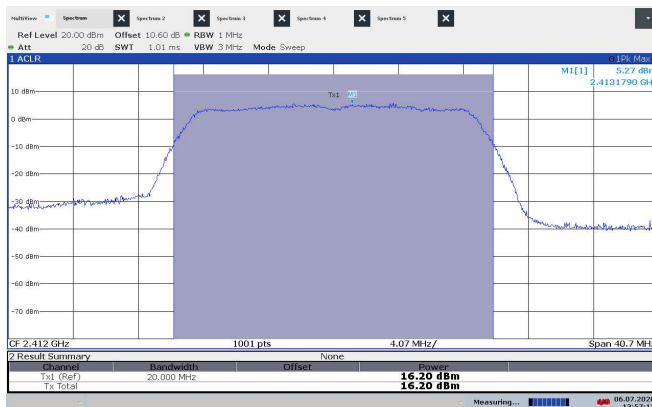


Peak Conducted Power, 2412 MHz, 802.11n, HT20

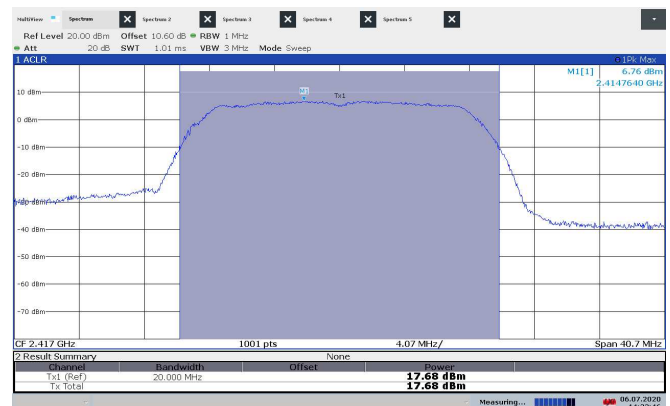


Peak Conducted Power, 2417 MHz, 802.11g, 6Mb

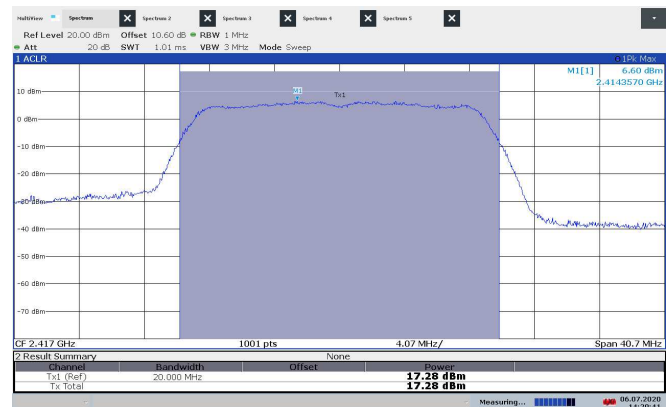


Peak Conducted Power, 2417 MHz, 802.11n, HT20

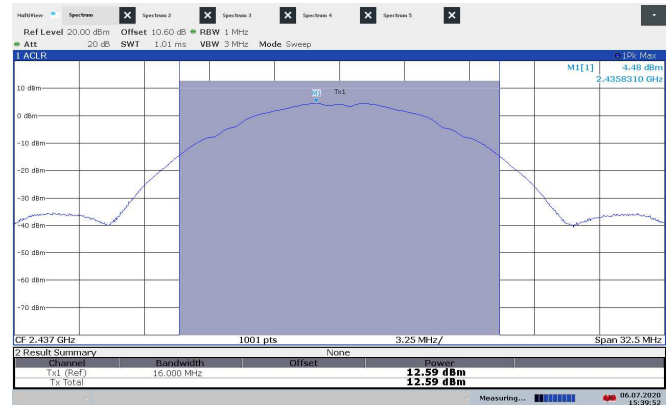


Peak Conducted Power, 2437 MHz, 802.11b, 1Mb

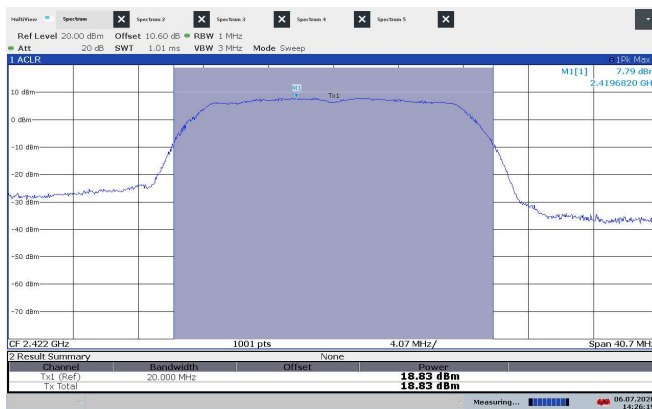


Peak Conducted Power, 2422 MHz, 802.11g, 6Mb

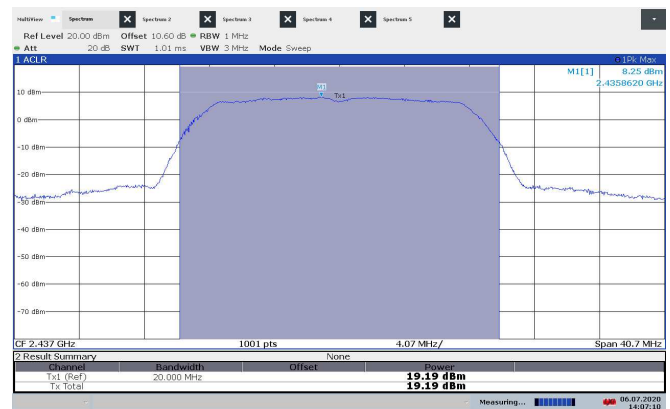


Peak Conducted Power, 2437 MHz, 802.11g, 6Mb

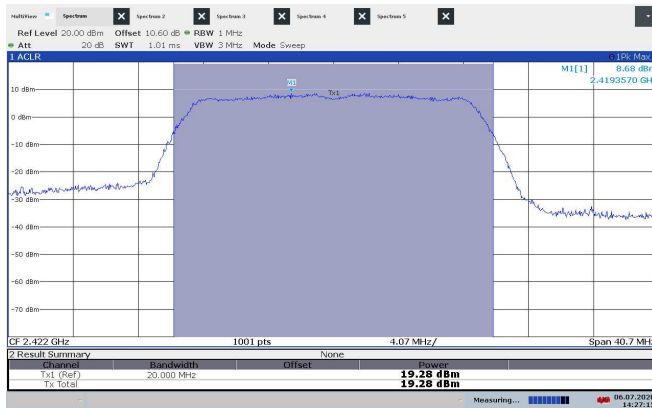


Peak Conducted Power, 2422 MHz, 802.11n, HT20

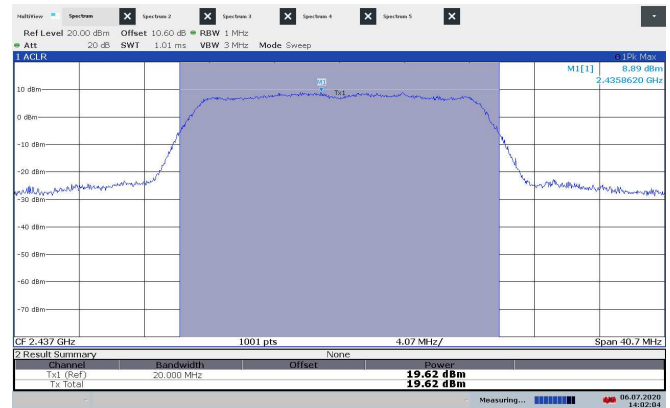


Peak Conducted Power, 2437 MHz, 802.11n, HT20

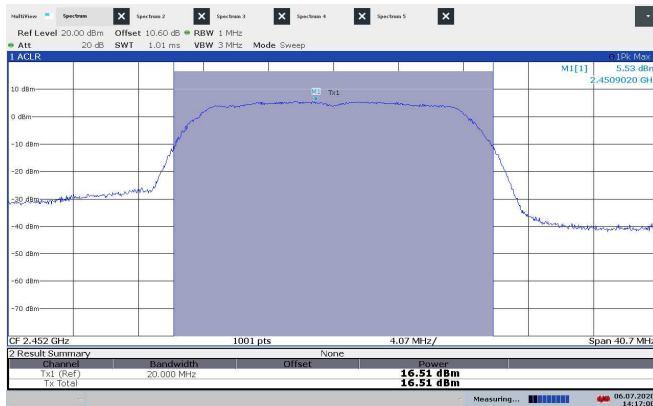


Peak Conducted Power, 2452 MHz, 802.11g, 6Mb

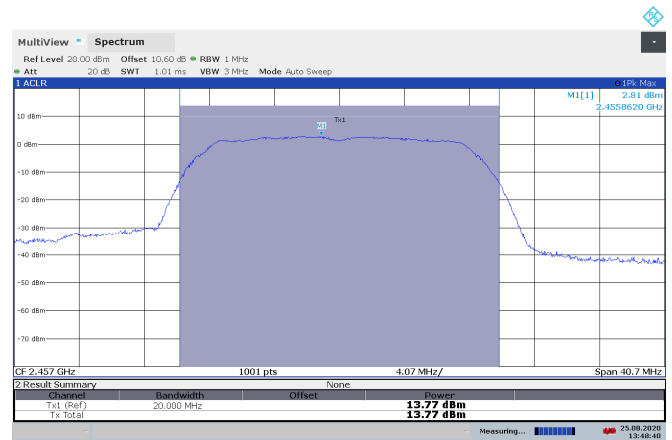


Peak Conducted Power, 2457 MHz, 802.11g, 6Mb

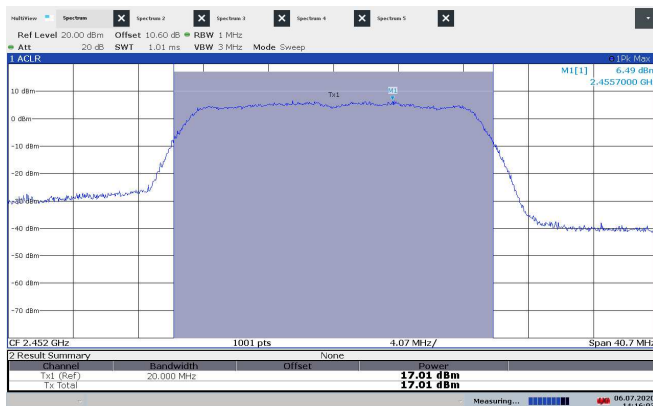


Peak Conducted Power, 2452 MHz, 802.11n, HT20

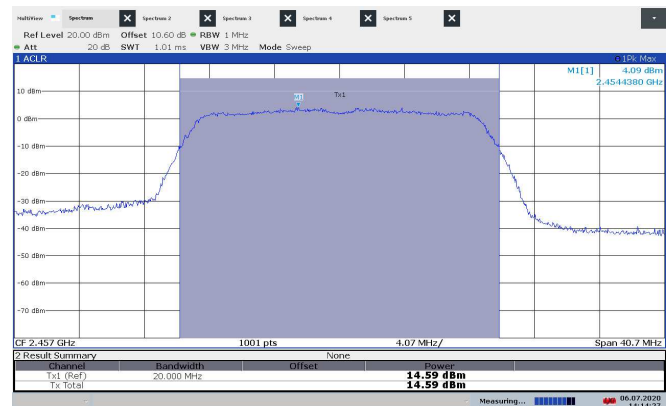


Peak Conducted Power, 2457 MHz, 802.11n, HT20

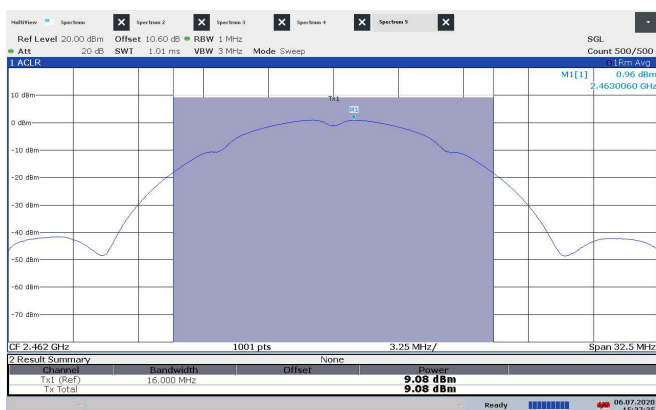

Peak Conducted Power, 2462 MHz, 802.11b, 1Mb

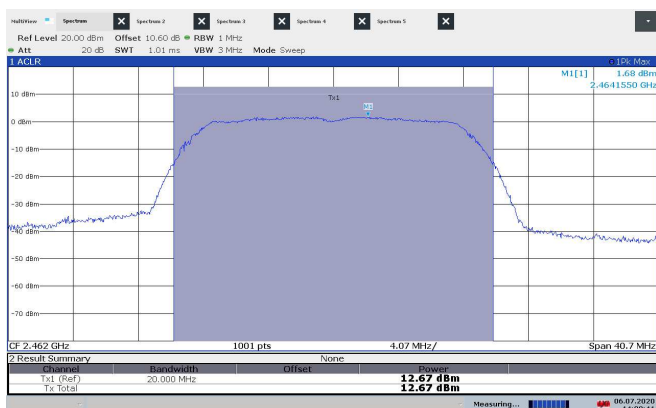

Peak Conducted Power, 2462 MHz, 802.11g, 6Mb

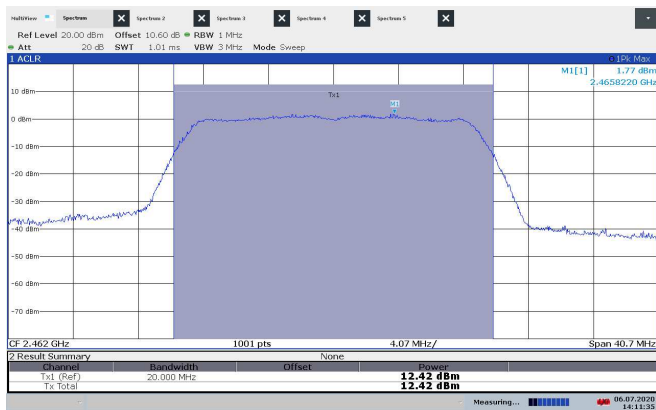

Peak Conducted Power, 2462 MHz, 802.11n, HT20

3.4 Conducted Emissions at Antenna Connector

FCC Part 15.247 (d)

ISED Canada RSS-247 Issue 2, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies

Measurement Data:

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2412 MHz	> 50	> 30	Pass
2437 MHz	> 50	> 30	Pass
2462 MHz	> 50	> 30	Pass

Measured with Peak Detector.

All tests are performed with the EUT transmitting at maximum output power.


RF conducted power to 25 GHz: see attached plots.

Limit


Peak measurement	RMS averaging
20 dBc or more in 100 kHz bandwidth	30 dBc or more in 100 kHz bandwidth

Detector type shall be the same as used for measuring Output Power.


Attenuation below the general limits specified in part 15.209(a) is not required.

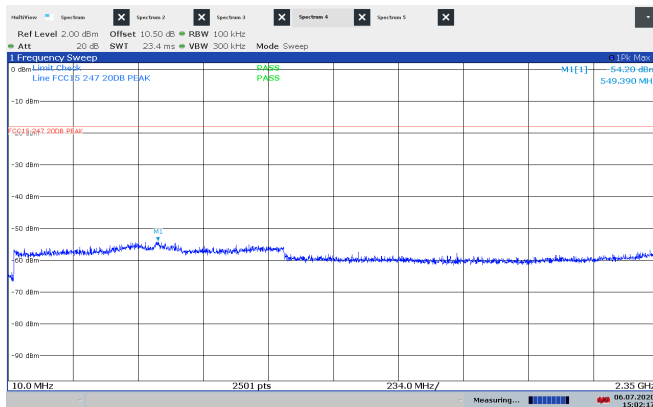


Conducted Emissions 10-2350 MHz, 2437 MHz, 802.11b, 1Mb

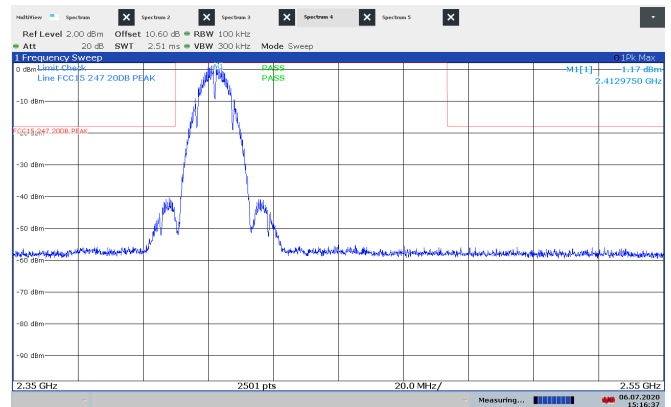


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11b, 1Mb

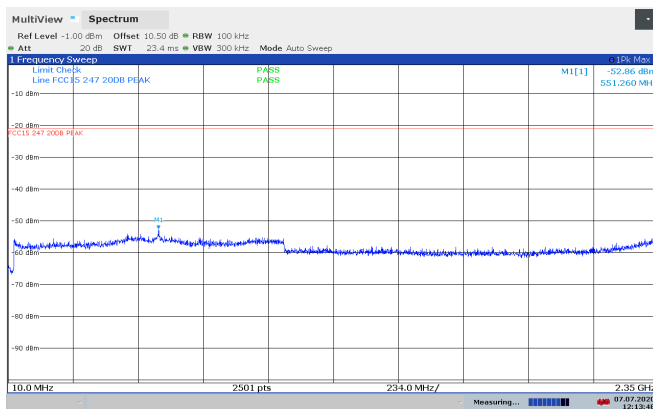


Conducted Emissions 10-2350 MHz, 2437 MHz, 802.11g, 6Mb

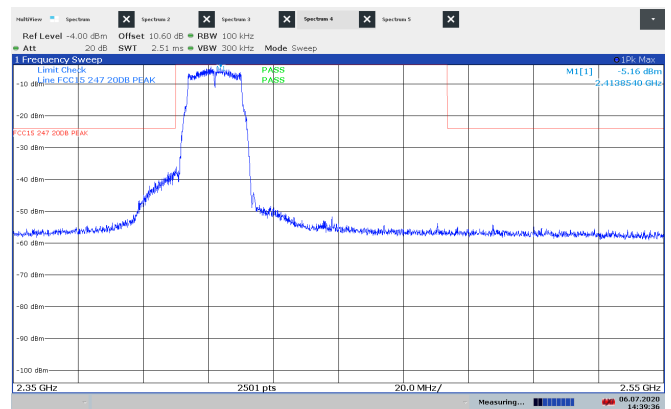


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11g, 6Mb

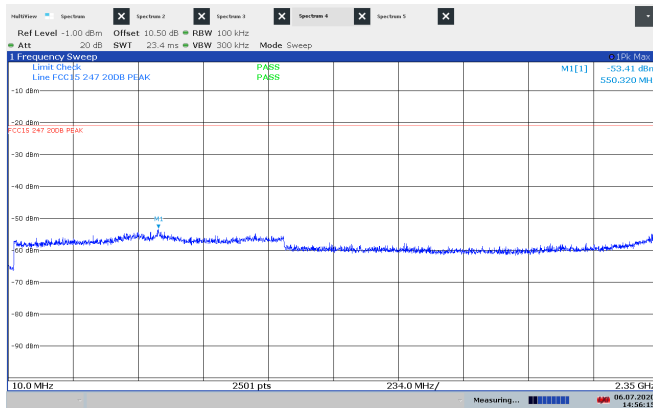


Conducted Emissions 10-2350 MHz, 2437 MHz, 802.11n, HT20

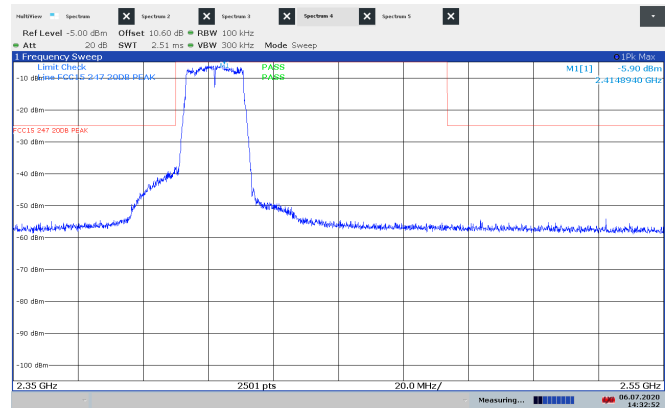


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11n, HT20

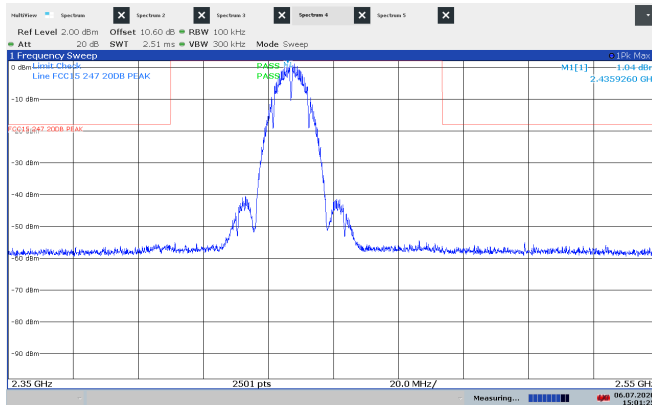


Conducted Emissions 2350-2550 MHz, 2437 MHz, 802.11b, 1Mb

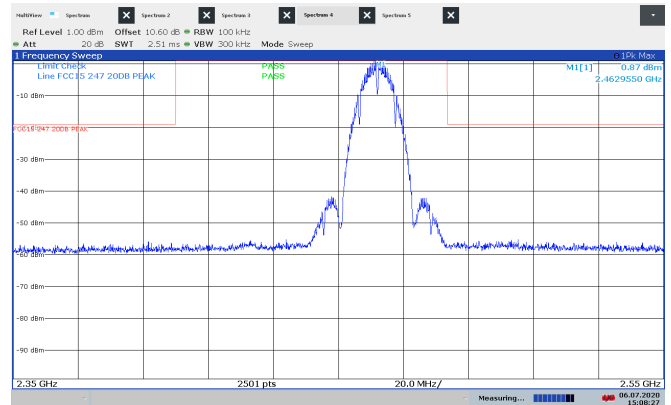


Conducted Emissions 2350-2550 MHz, 2462 MHz, 802.11b, 1Mb

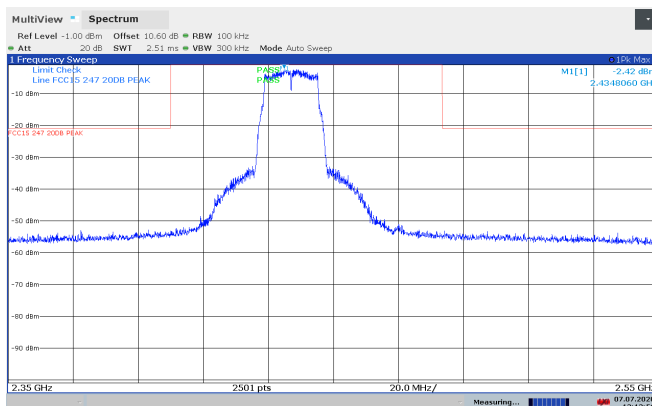


Conducted Emissions 2350-2550 MHz, 2437 MHz, 802.11g, 6Mb

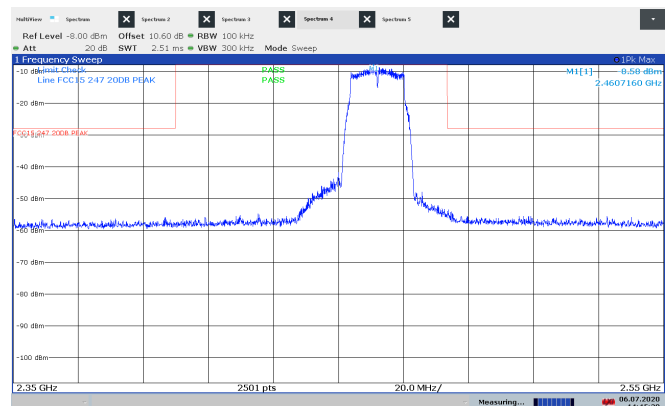


Conducted Emissions 2350-2550 MHz, 2462 MHz, 802.11g, 6Mb

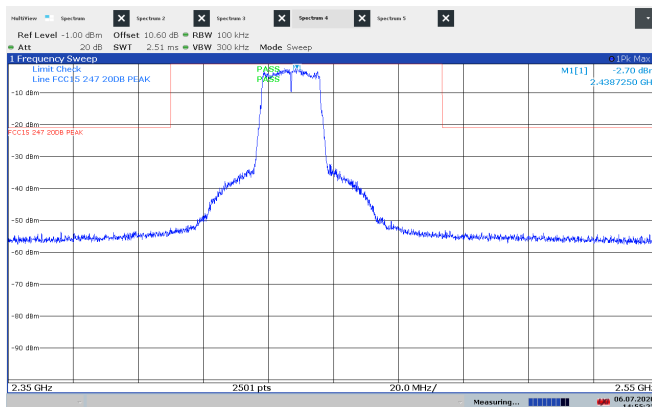


Conducted Emissions 2350-2550 MHz, 2437 MHz, 802.11n, HT20

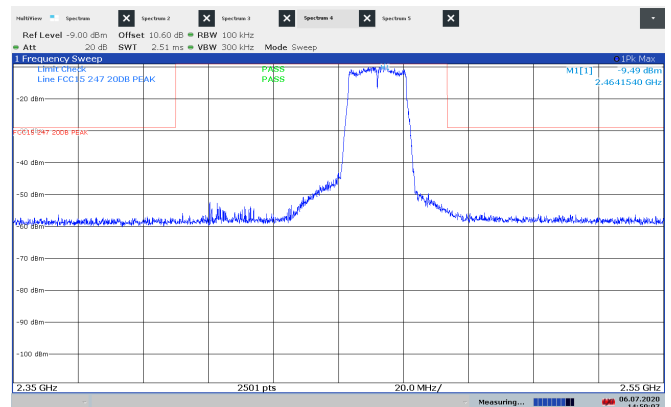


Conducted Emissions 2350-2550 MHz, 2462 MHz, 802.11n, HT20

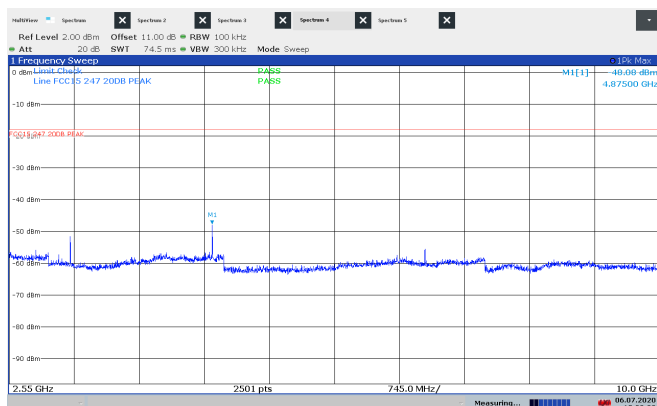


Conducted Emissions 2350-10000 MHz, 2437 MHz, 802.11b, 1Mb

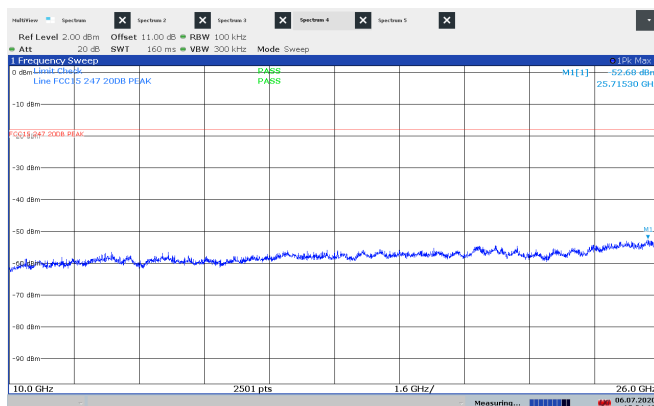


Conducted Emissions 10000-26000 MHz, 2437 MHz, 802.11b, 1Mb

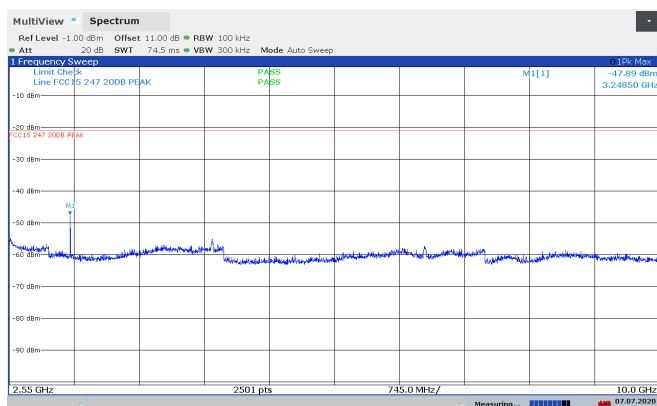


Conducted Emissions 2350-10000 MHz, 2437 MHz, 802.11g, 6Mb

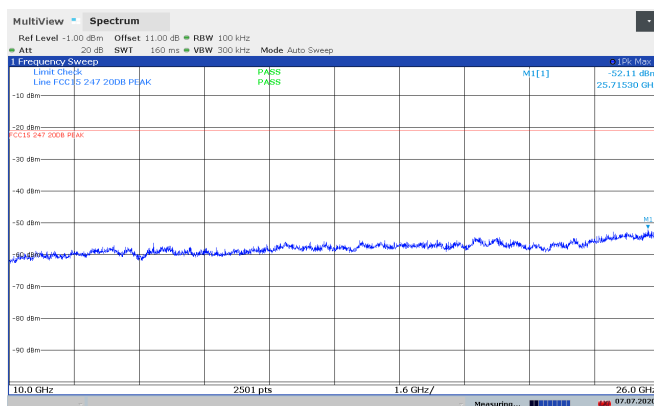

Conducted Emissions 10000-26000 MHz, 2437 MHz, 802.11g, 6Mb

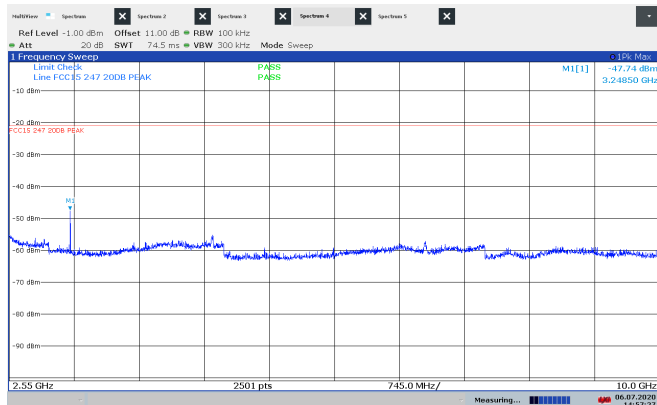

Conducted Emissions 2350-10000 MHz, 2437 MHz, 802.11n, HT20

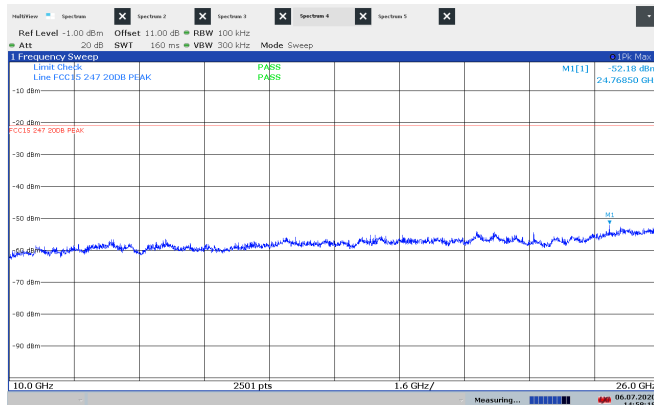

Conducted Emissions 10000-26000 MHz, 2437 MHz, 802.11n, HT20

3.5 Restricted Bands of operation

Restricted Bands of operation for FCC and ISSED are defined in FCC Part 15.205 and ISSED RSS-GEN, Issue 5 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISSED (MHz)	FCC (GHz)	ISSED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISSED, all other frequencies are common.

3.6 Radiated Emissions, Band Edge

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies


Measurement Data:

Peak Detector					
Modulation and Bitrate	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB	dB	
802.11b, 1 Mbps	53.6	52.0	74	20.4	22.0
802.11g, 6 Mbps	69.1	53.5	74	4.9	20.5
802.11n, MCS0, HT20	69.5	54.5	74	4.5	19.5


Average Detector					
Modulation and Bitrate	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB	dB	
802.11b, 1 Mbps	43.1	41.5	54	10.9	12.5
802.11g, 6 Mbps	53.0	43.3	54	1.0	10.7
802.11n, MCS0, HT20	53.6	43.4	54	0.4	10.6

Average values were measured using method SA-1 (Duty Cycle $\approx$ 100%)

See attached plots

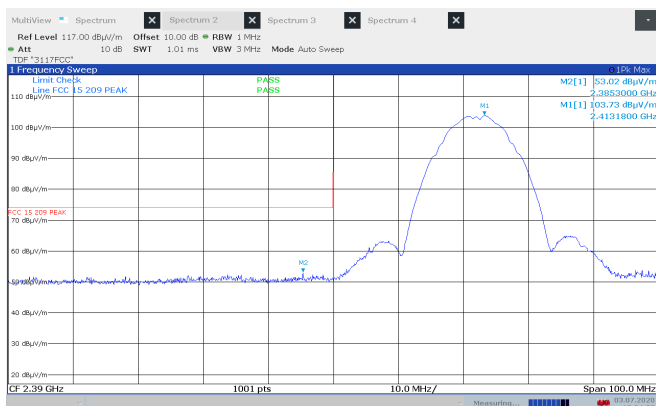


Lower Band Edge, 2412 MHz, 802.11b, 1Mb, Ant 1, Peak

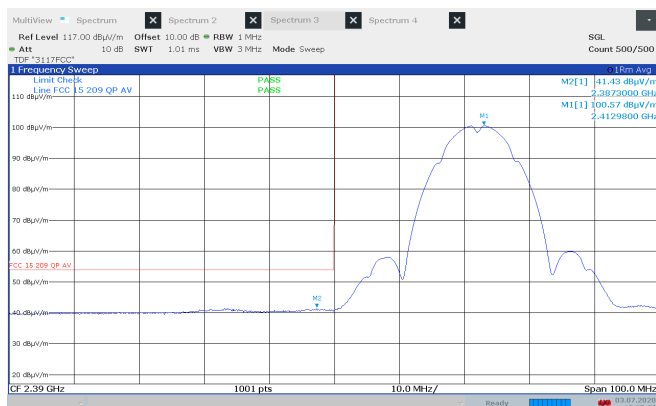

Lower Band Edge, 2412 MHz, 802.11b, 1Mb, Ant 1, Average




Lower Band Edge, 2412 MHz, 802.11g, 6Mb, Ant 1, Peak

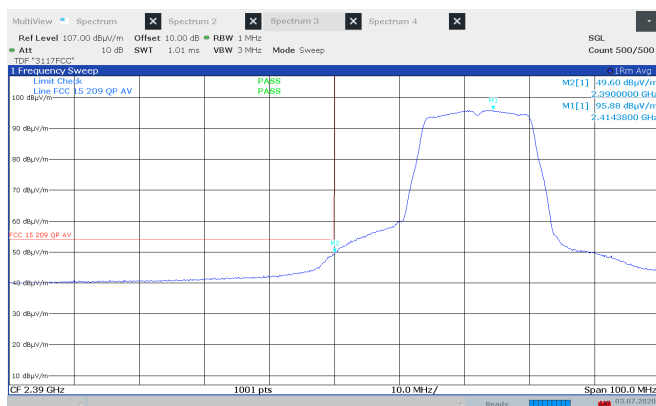


Lower Band Edge, 2412 MHz, 802.11g, 6Mb, Ant 1, Average




Lower Band Edge, 2412 MHz, 802.11n, HT20, Ant 1, Peak

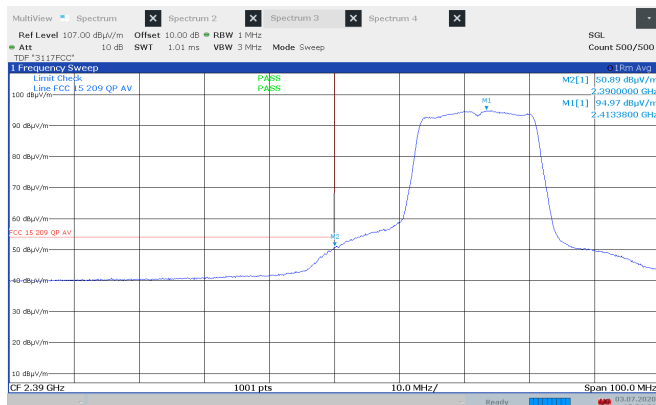

Lower Band Edge, 2412 MHz, 802.11n, HT20, Ant 1, Average

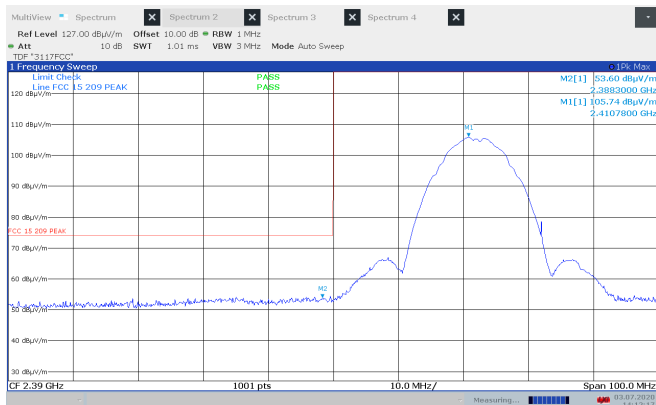


Lower Band Edge, 2412 MHz, 802.11b, 1Mb, Ant 2, Peak

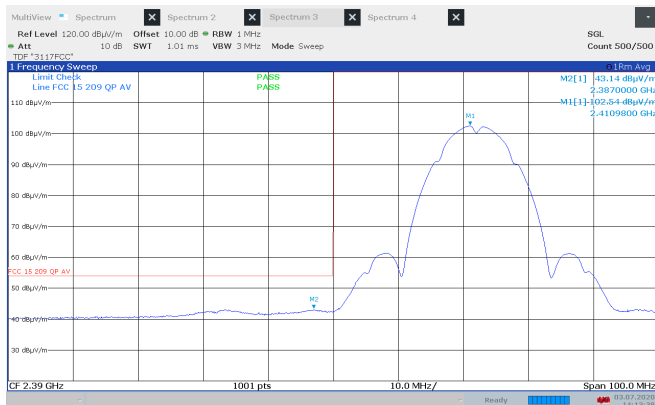


Lower Band Edge, 2412 MHz, 802.11b, 1Mb, Ant 2, Average




Lower Band Edge, 2412 MHz, 802.11g, 6Mb, Ant 2, Peak

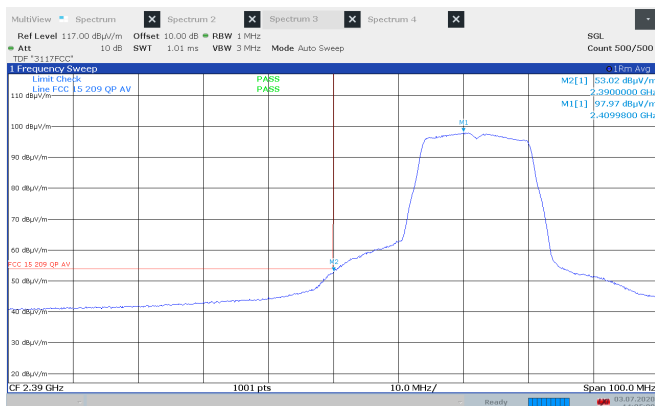


Lower Band Edge, 2412 MHz, 802.11g, 6Mb, Ant 2, Average

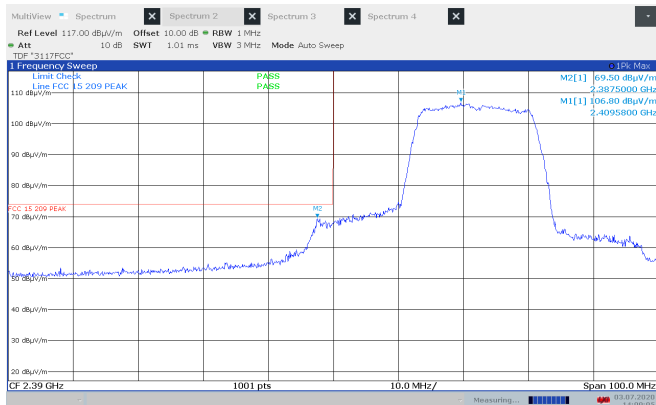


Lower Band Edge, 2412 MHz, 802.11n, HT20, Ant 2, Peak

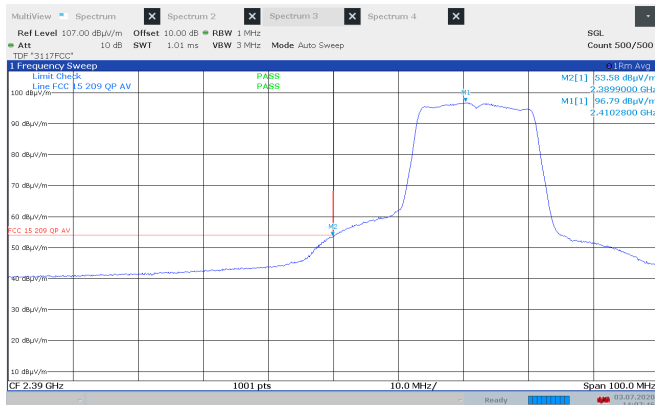


Lower Band Edge, 2412 MHz, 802.11n, HT20, Ant 2, Average

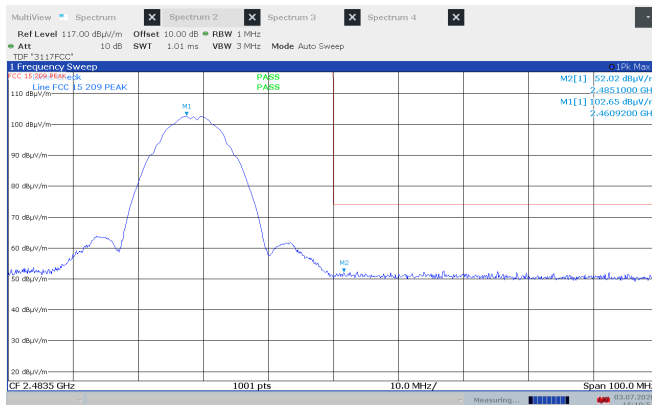


Upper Band Edge, 2462 MHz, 802.11b, 1Mb, Ant 1, Peak

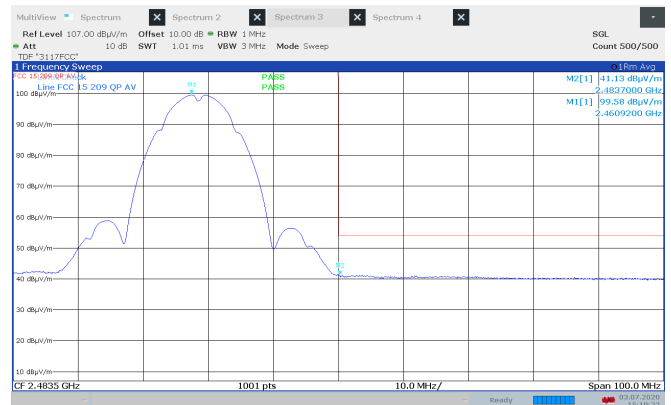


Upper Band Edge, 2462 MHz, 802.11b, 1Mb, Ant 1, Average

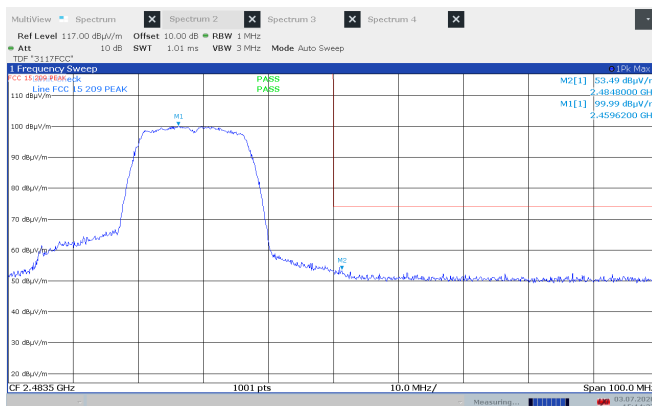


Upper Band Edge, 2462 MHz, 802.11g, 6Mb, Ant 1, Peak

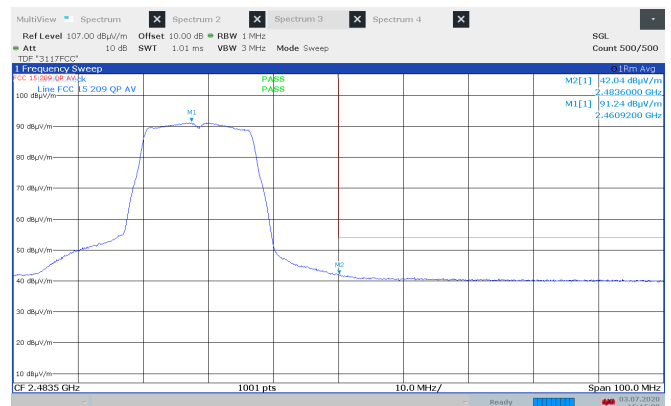


Upper Band Edge, 2462 MHz, 802.11g, 6Mb, Ant 1, Average

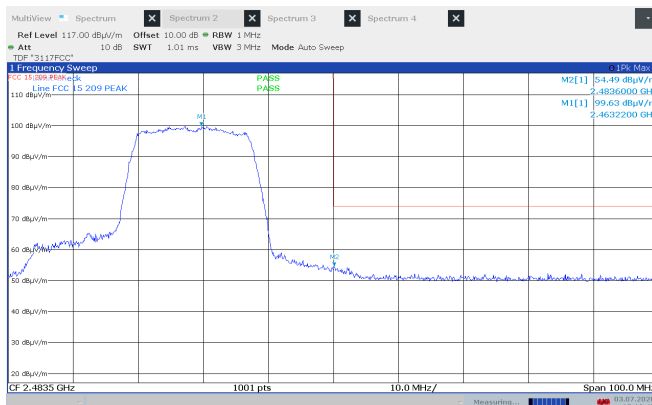


Upper Band Edge, 2462 MHz, 802.11n, HT20, Ant 1, Peak

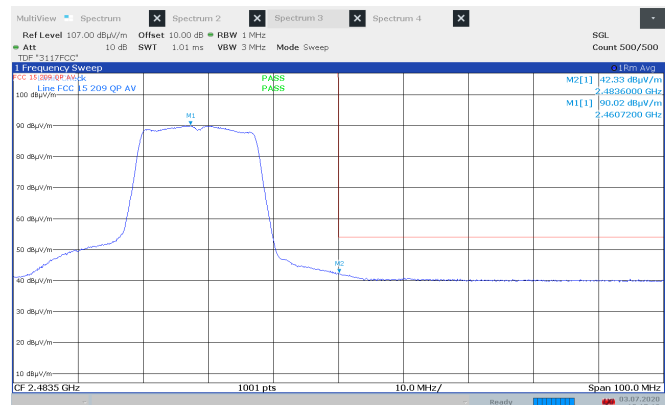


Upper Band Edge, 2462 MHz, 802.11n, HT20, Ant 1, Average

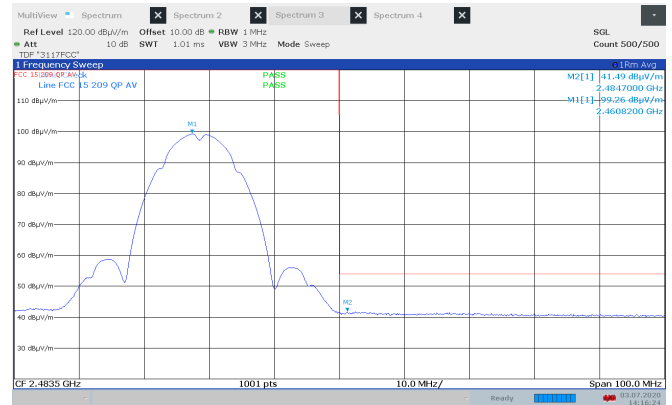


Upper Band Edge, 2462 MHz, 802.11b, 1Mb, Ant 2, Average

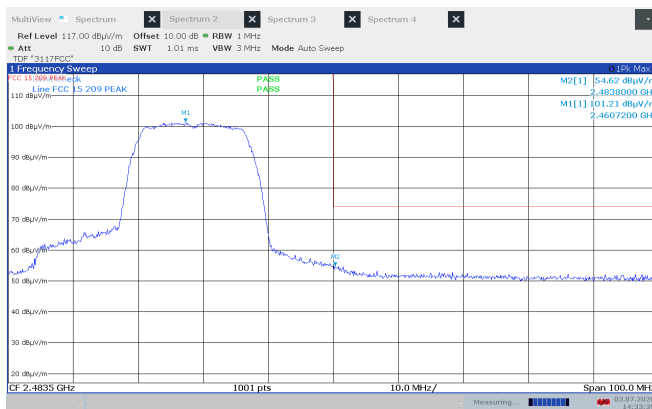


Upper Band Edge, 2462 MHz, 802.11g, 6Mb, Ant 2, Peak

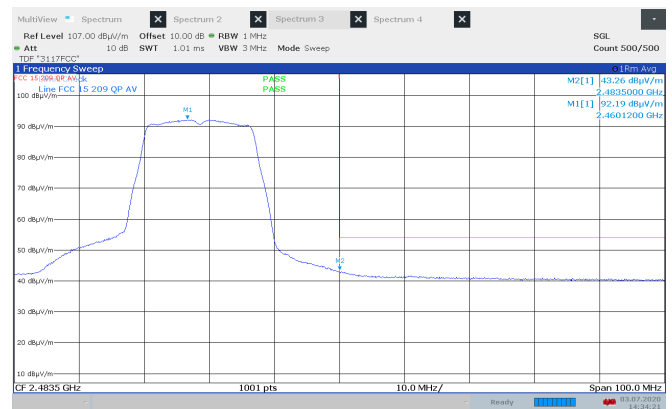

Upper Band Edge, 2462 MHz, 802.11g, 6Mb, Ant 2, Average

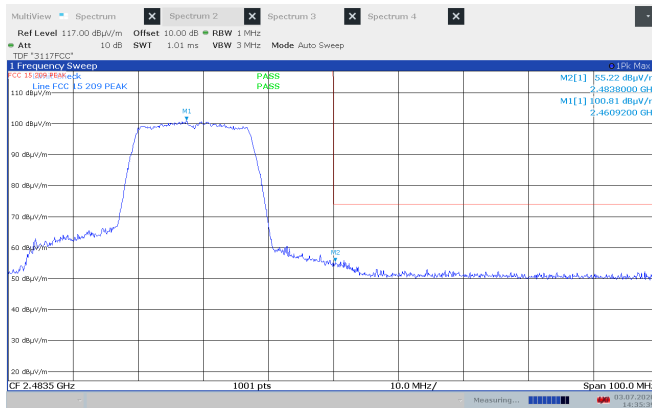

Upper Band Edge, 2462 MHz, 802.11n, HT20, Ant 2, Peak

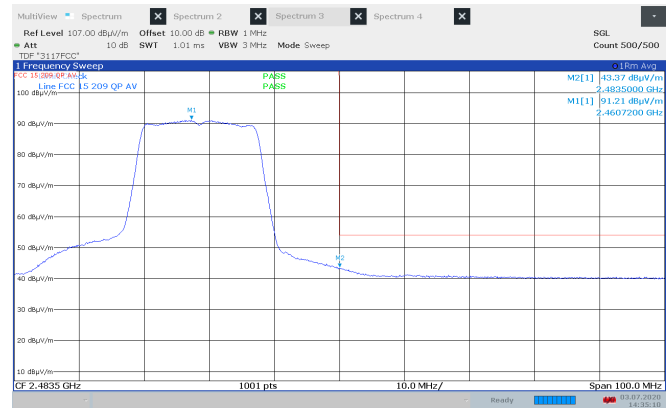

Upper Band Edge, 2462 MHz, 802.11n, HT20, Ant 2, Average

3.7 Radiated Emissions 30 – 1000 MHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Detector: Peak

Measuring distance 3m.


Tested in test mode with EUT transmitting on Ch06 with any modulation.

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol
147.273350	17.6	43.5	25.9	120.000	100.0	V
245.455050	32.5	46.0	13.5	120.000	241.0	V
343.637200	27.2	46.0	18.8	120.000	151.0	V
441.820450	33.1	46.0	12.9	120.000	277.0	V


See attached plots.

Requirements/Limit


FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Frequency	Radiated emission limit @3 meters	
30 – 88 MHz	100 µV/m	40.0 dBµV/m
88 – 216 MHz	150 µV/m	43.5 dBµV/m
216 – 960 MHz	200 µV/m	46.0 dBµV/m
960 – 1000 MHz	500 µV/m	54.0 dBµV/m
	Limits above are with Quasi Peak Detector	

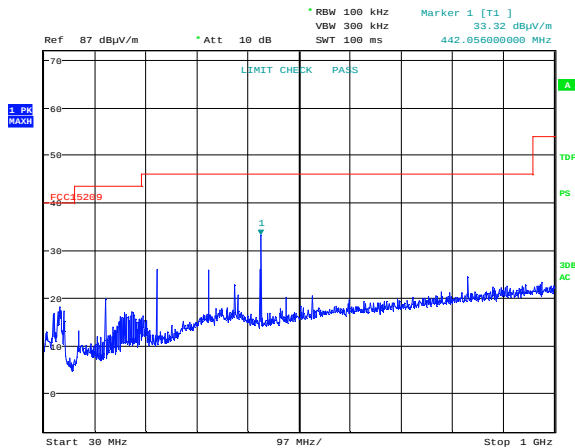


Radiated Emissions 30 -1000 MHz, 2437 MHz, 802.11g, 6Mb, VP

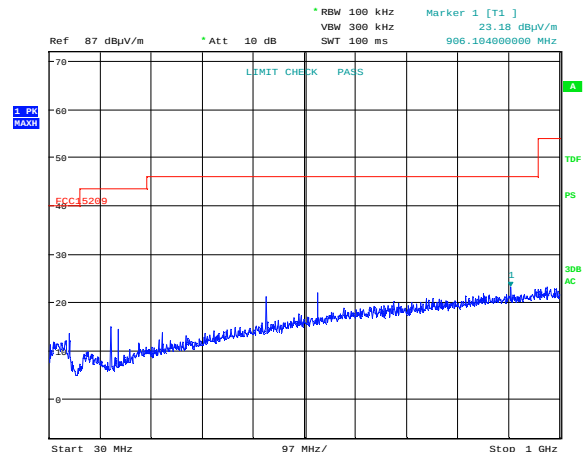


Radiated Emissions 30 -1000 MHz, 2437 MHz, 802.11g, 6Mb, HP

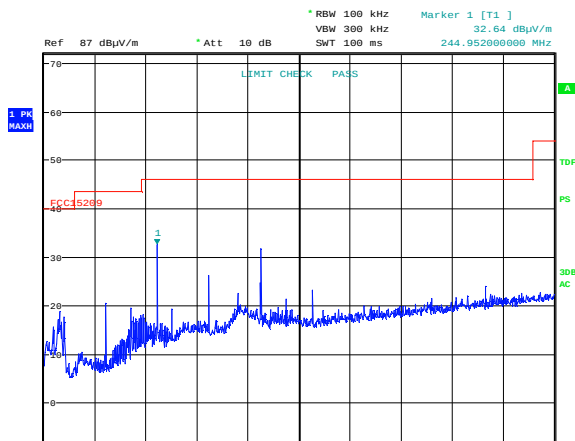


Radiated Emissions 30 -1000 MHz, 2437 MHz, 802.11n, HT20, VP

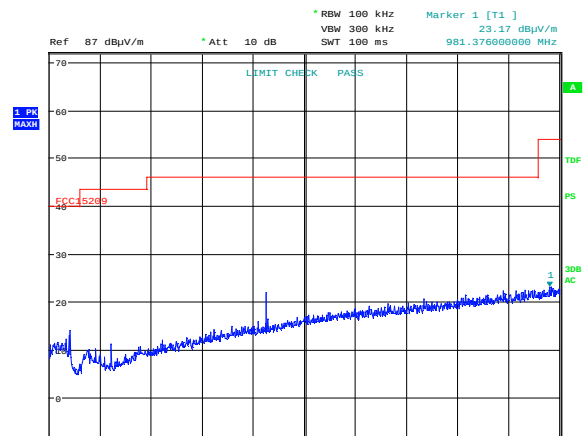



Radiated Emissions 30 -1000 MHz, 2437 MHz, 802.11n, HT20, HP

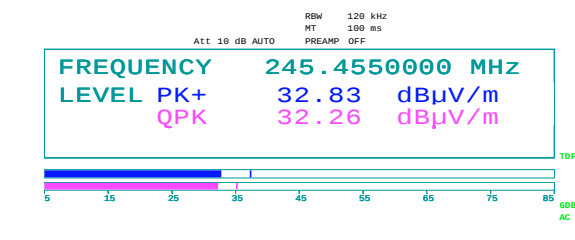

Radiated Emissions 245.46 MHz, 2437 MHz, 802.11n, HT20, VP, Max

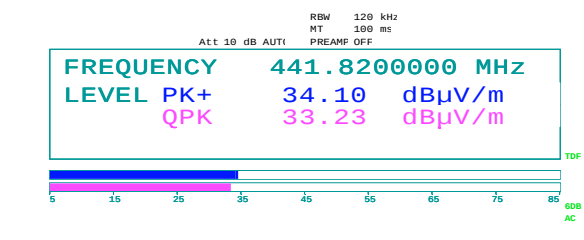

Radiated Emissions 441.82 MHz, 2437 MHz, 802.11g, 6Mb, VP, Max

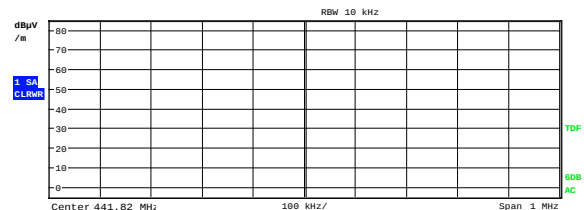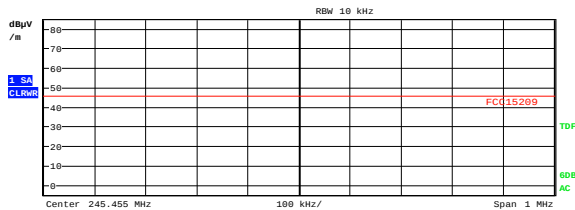

3.8 Radiated Emissions, 1 – 18 GHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Measuring distance: 3m (1–18 GHz)
a pre-scan was performed above 18 GHz

Bandwidths: RBW=1MHz / VBW=3MHz

Carrier Frequency (MHz)	Measured Frequency (MHz)	Modulation Scheme	Peak Level (dBμV/m)	Average Level (dBμV/m)	Pk Limit (dBμV/m)	Av Limit (dBμV/m)	Peak Margin (dB)	Av Margin (dB)
2437	4874	802.11b 1Mb	56.1	53.4	74	54	17.9	0.6
		802.11g 6Mb	55.2	43.7	74	54	18.8	10.3
		802.11n HT20	55.6	43.6	74	54	18.4	10.4
Any	Any	Any	<54	<44	74	54	>20	>10

Measured results are for 802.11b 1Mb, 802.11a 6 Mbps and 802.11n HT20/40, it was checked that other modulations and/or bitrates did not produce higher emissions.

A Band Reject Filter was used for all measurements.


Antenna factor, amplifier gain and cable loss are included in Spectrum Analyzer "Transducer factor".

See attached plots.


Average Detector values were measured with method SA-1. Duty Cycle was 100% for all measurements.

Requirements/Limit


FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency	Average Detector	Peak Detector
1 – 25 GHz	54.0 dBμV/m	74.0 dBμV/m

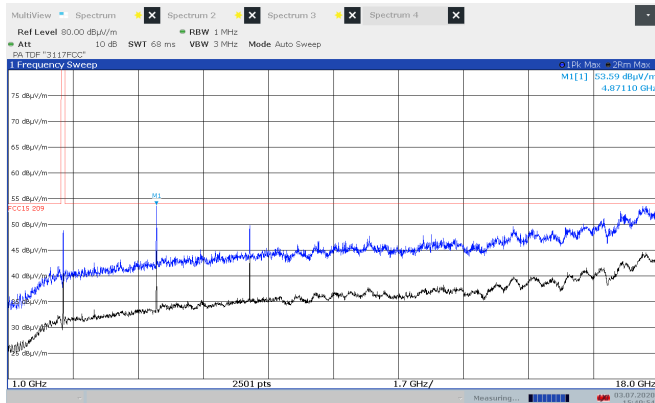


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11b, 1Mb, Ant 1, VP

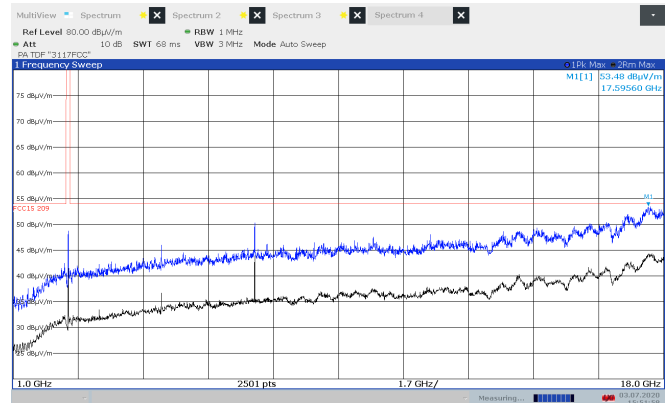


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11b, 1Mb, Ant 1, HP

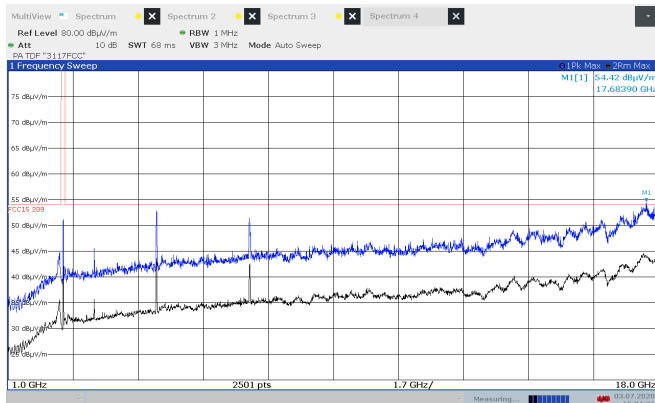


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11g, 6Mb, Ant 1, VP

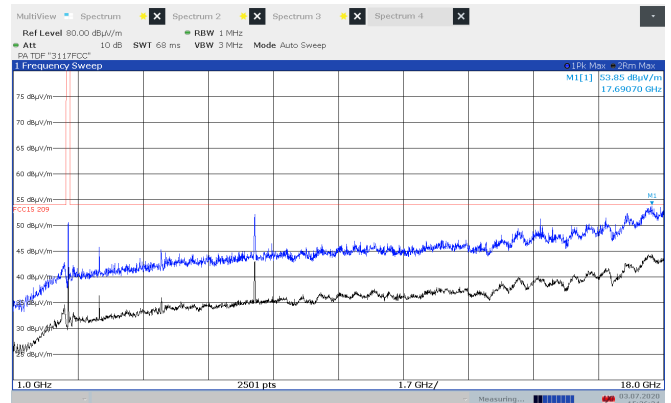


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11g, 6Mb, Ant 1, HP

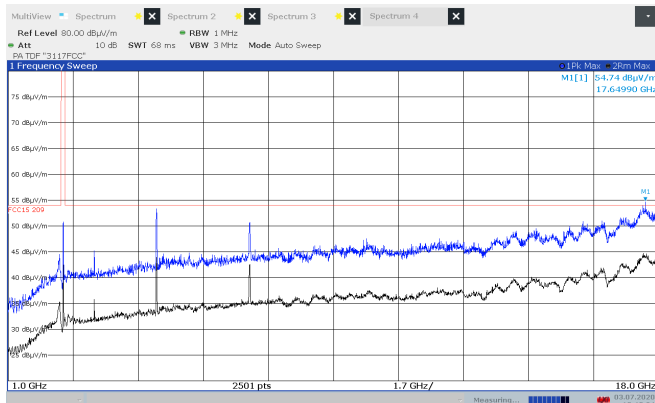


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11n, HT20, Ant 1, VP

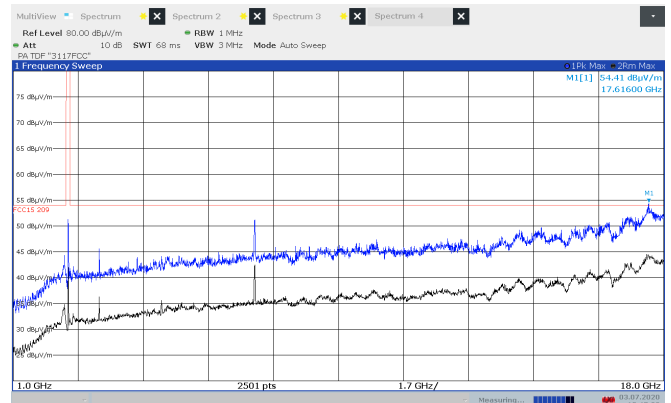


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11n, HT20, Ant 1, HP

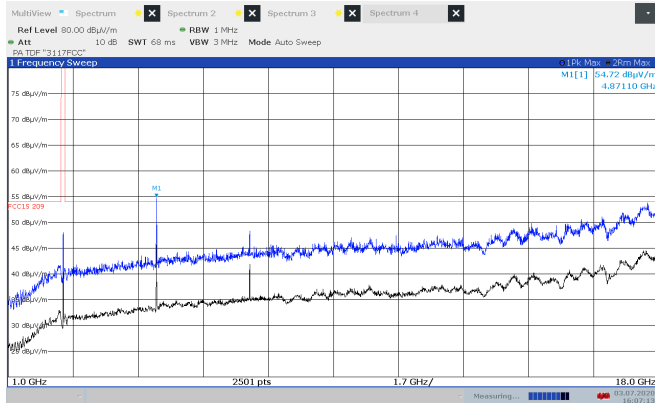


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11b, 1Mb, Ant 2, VP

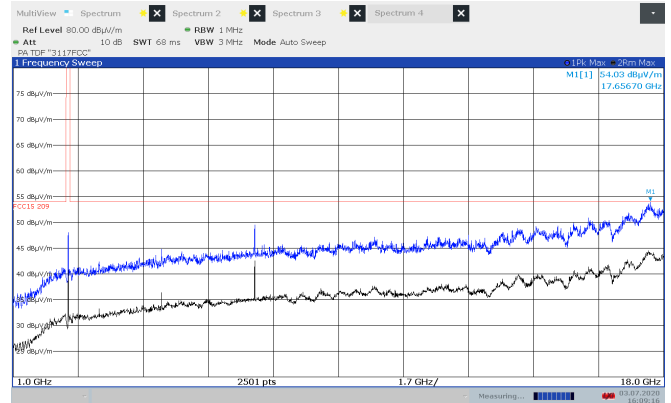


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11b, 1Mb, Ant 2, HP

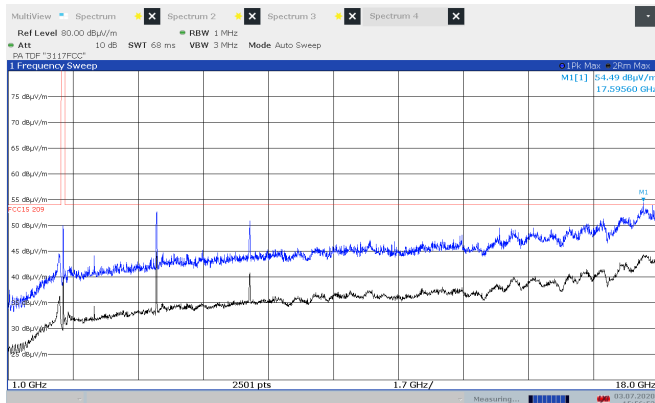


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11g, 6Mb, Ant 2, VP

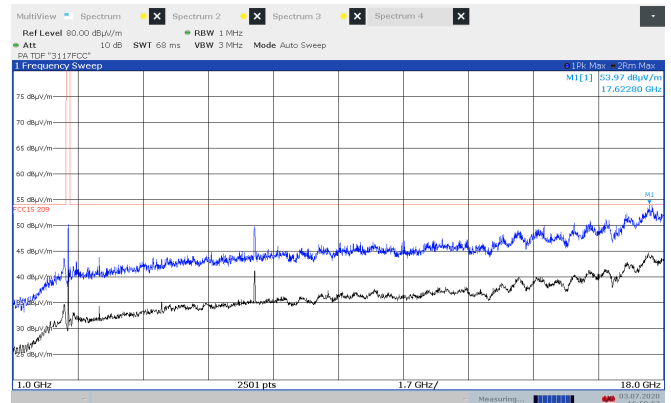


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11g, 6Mb, Ant 2, HP

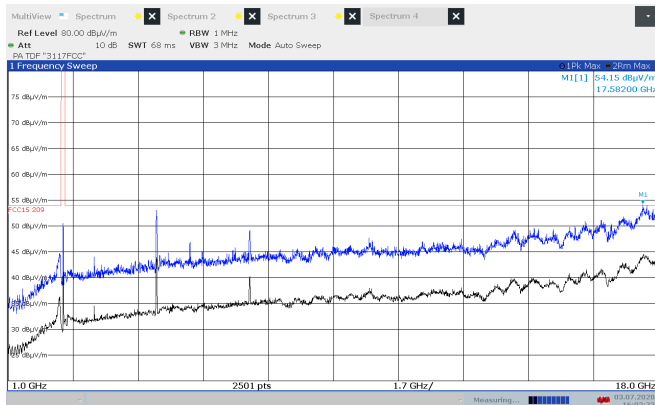



Radiated Emissions 1-18 GHz, 2437 MHz, 802.11n, HT20, Ant 2, VP

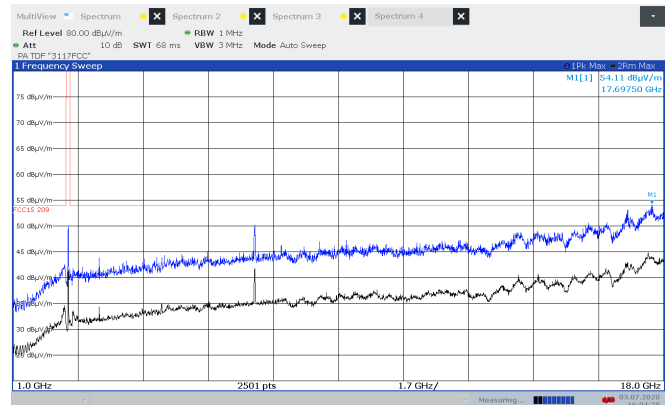


Radiated Emissions 1-18 GHz, 2437 MHz, 802.11n, HT20, Ant 2, HP

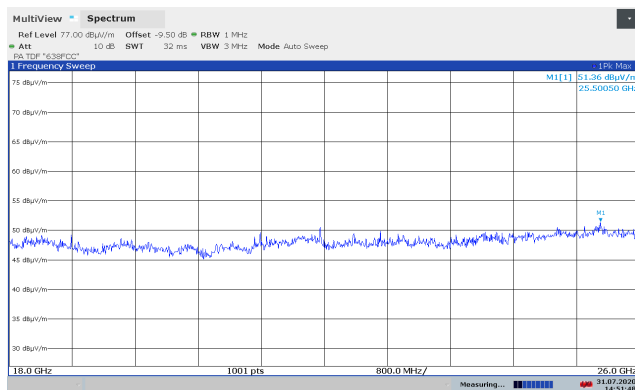


Emissions 18-26 GHz, 2437 MHz, 802.11b 1M, Ant 1, VP, @1m

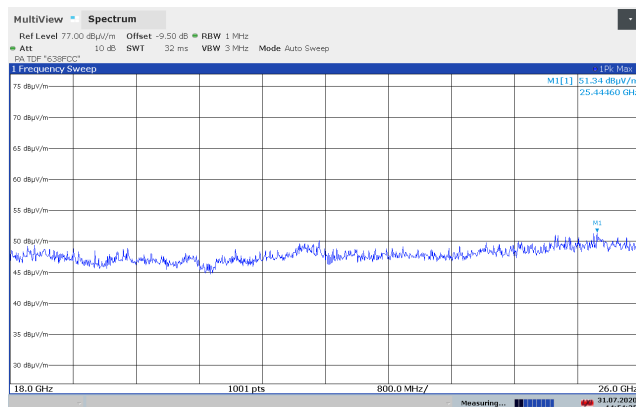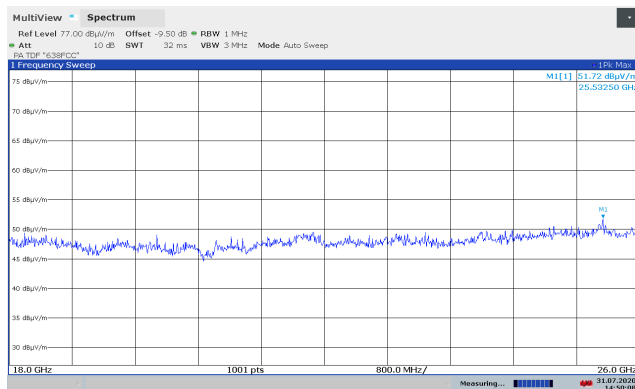


Emissions 18-26 GHz, 2437 MHz, 802.11b 1M, Ant 1, HP, @1m

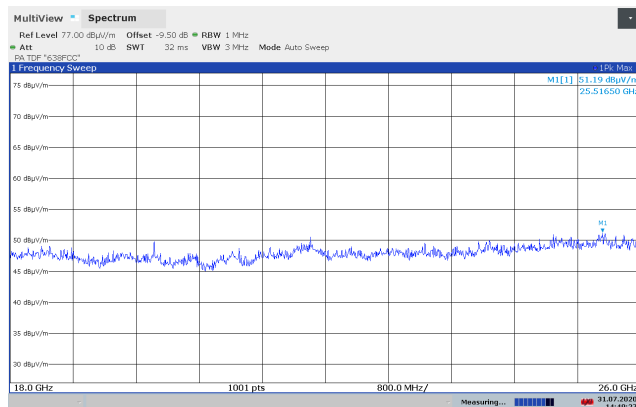


Emissions 18-26 GHz, 2437 MHz, 802.11g 6M, Ant 1, VP, @1m

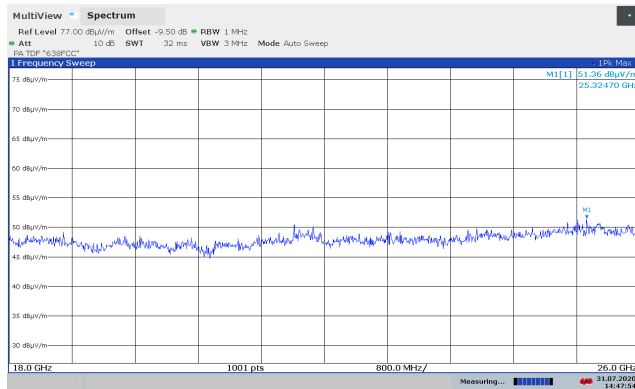


Emissions 18-26 GHz, 2437 MHz, 802.11g 6M, Ant 1, HP, @1m

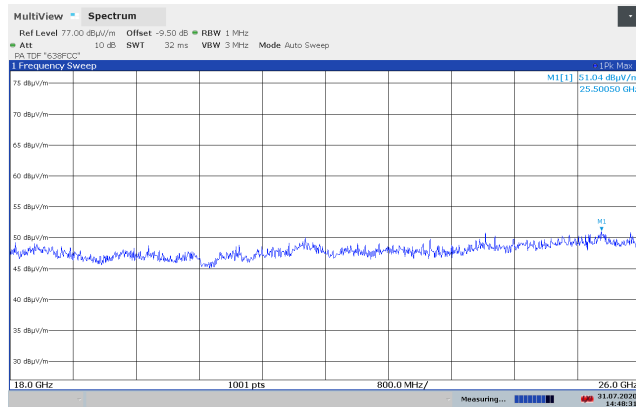

Emissions 18-26 GHz, 2437 MHz, 802.11n HT20, Ant 1, VP, @1m

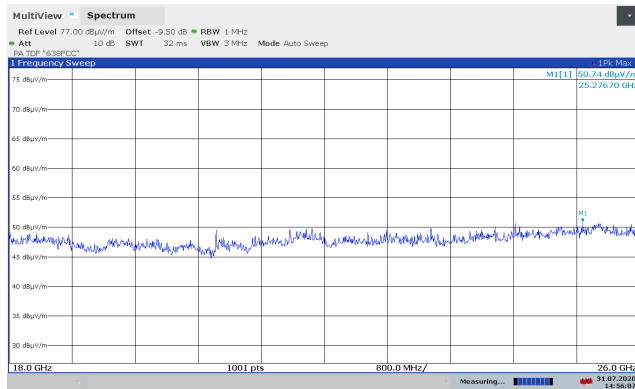


Emissions 18-26 GHz, 2437 MHz, 802.11n HT20, Ant 1, HP, @1m

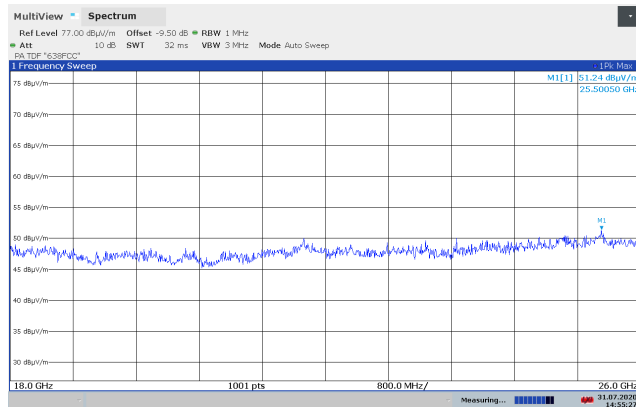


Emissions 18-26 GHz, 2437 MHz, 802.11b 1M, Ant 2, VP, @1m


Emissions 18-26 GHz, 2437 MHz, 802.11b 1M, Ant 2, HP, @1m

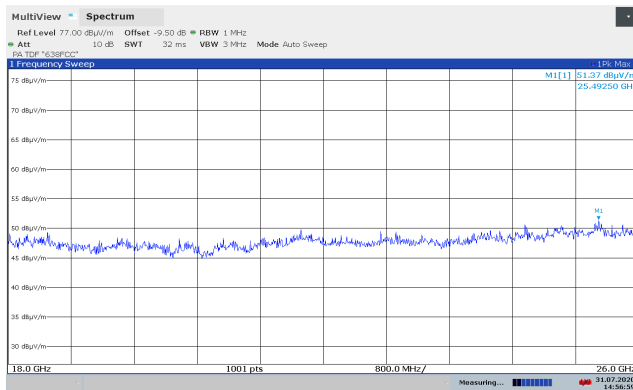


Emissions 18-26 GHz, 2437 MHz, 802.11g 6M, Ant 2, VP, @1m

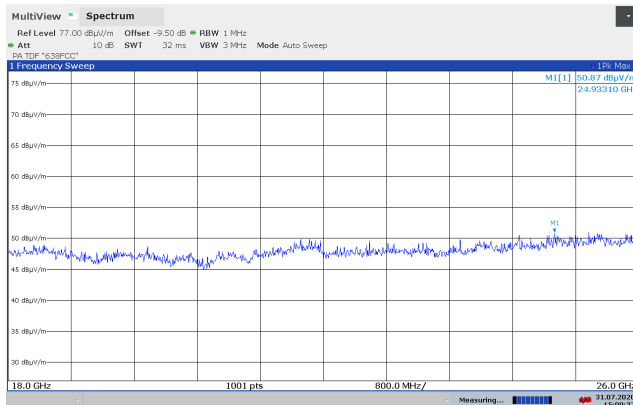


Emissions 18-26 GHz, 2437 MHz, 802.11n HT20, Ant 2, VP, @1m

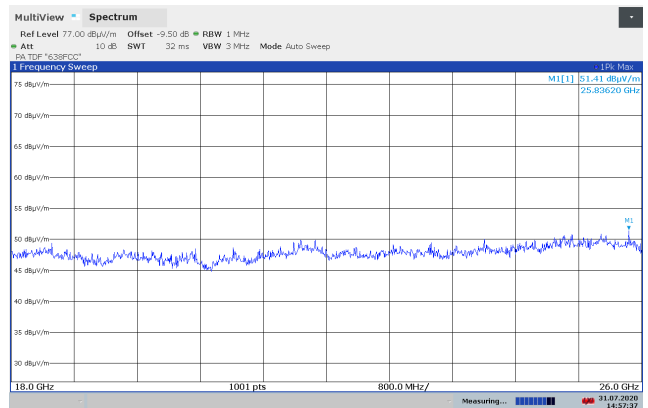


Emissions 18-26 GHz, 2437 MHz, 802.11g 6M, Ant 2, HP, @1m

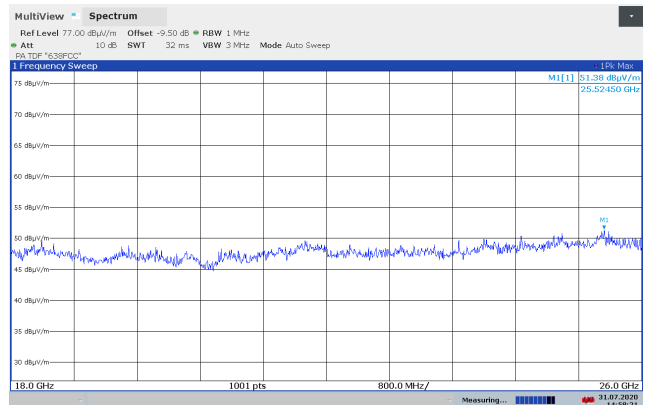


Emissions 18-26 GHz, 2437 MHz, 802.11n HT20, Ant 2, HP, @1m

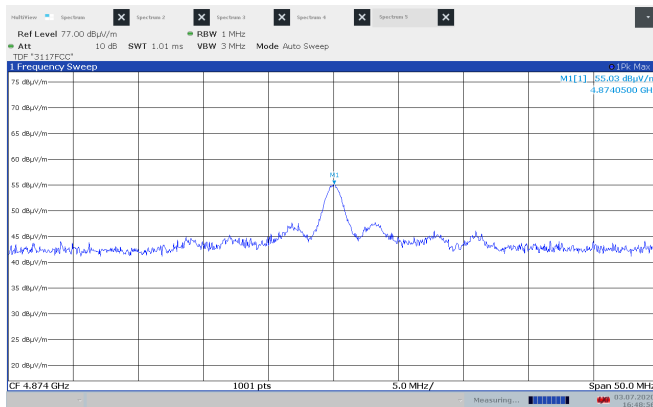


Radiated 4874 MHz, 2437 MHz, 802.11b, 1Mb, Ant 1, VP, Peak, Max

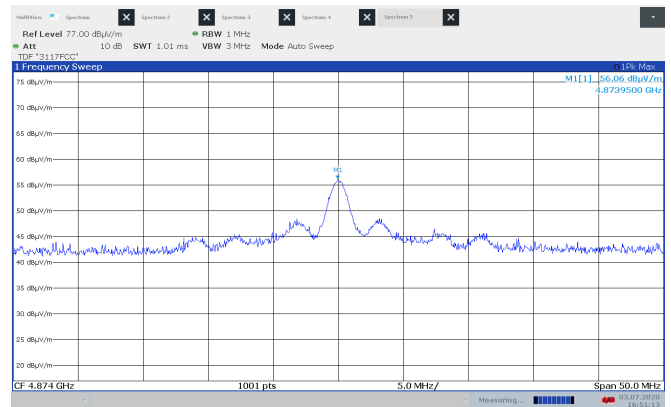


Radiated 4874 MHz, 2437 MHz, 802.11b, 1Mb, Ant 2, VP, Peak, Max

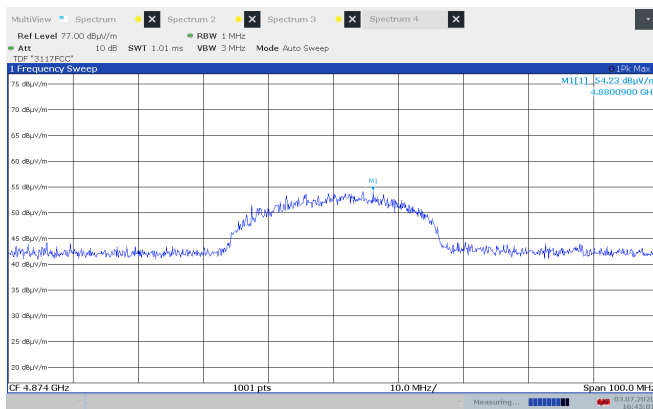


Radiated 4874 MHz, 2437 MHz, 802.11g, 6Mb, Ant 1, VP, Peak, Max

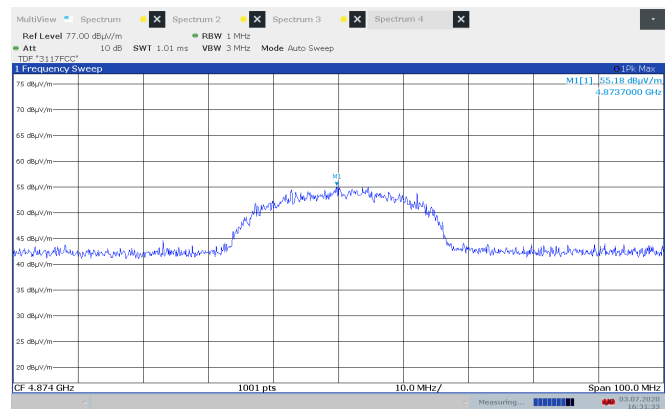


Radiated 4874 MHz, 2437 MHz, 802.11g, 6Mb, Ant 2, VP, Peak, Max

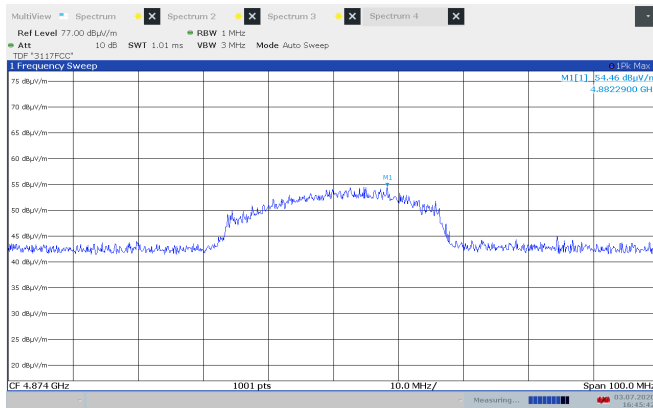


Radiated 4874 MHz, 2437 MHz, 802.11n, HT20, Ant 1, VP, Peak, Max

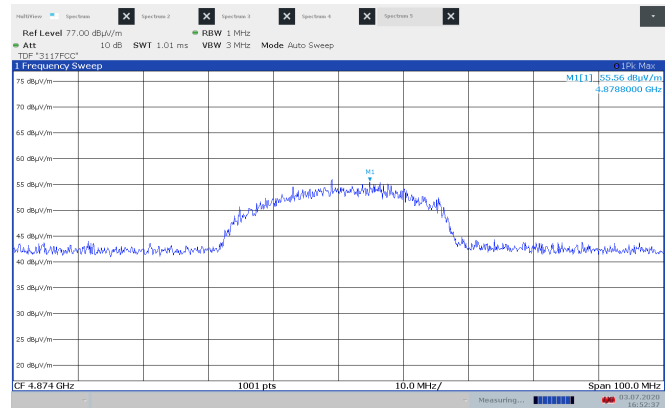


Radiated 4874 MHz, 2437 MHz, 802.11n, HT20, Ant 2, VP, Peak, Max

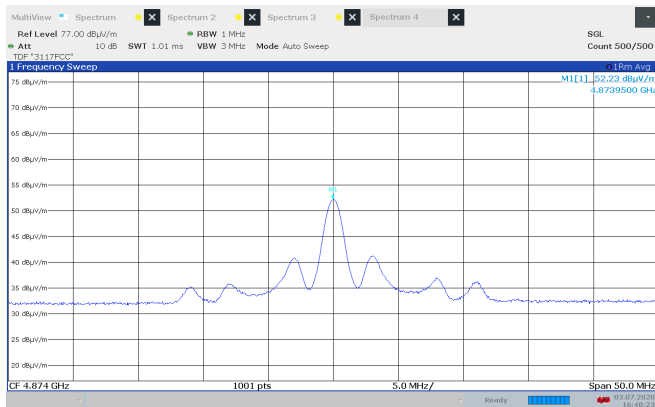


Radiated 4874 MHz, 2437 MHz, 802.11b, 1Mb, Ant 1, VP, Av, Max

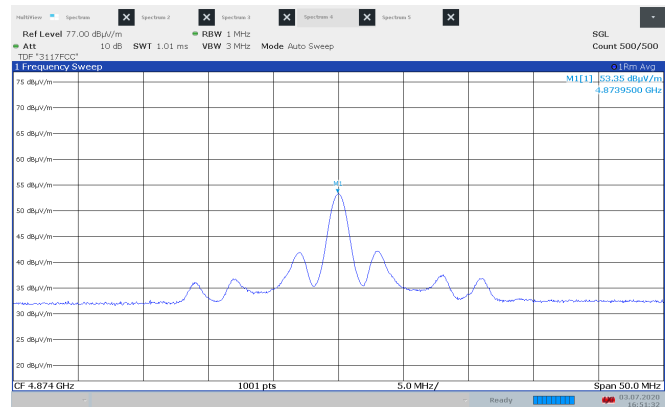


Radiated 4874 MHz, 2437 MHz, 802.11b, 1Mb, Ant 2, VP, Av, Max

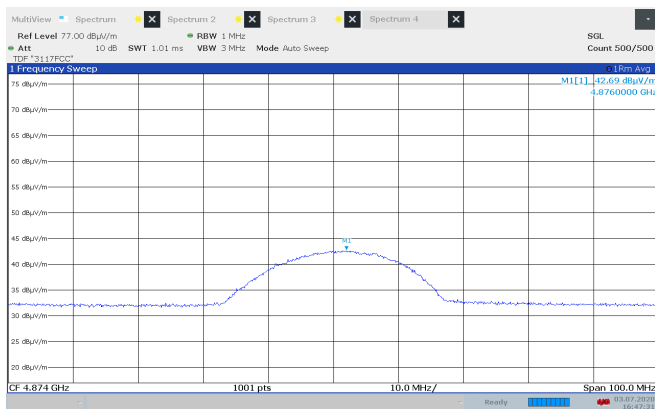


Radiated 4874 MHz, 2437 MHz, 802.11g, 6Mb, Ant 1, VP, Av, Max

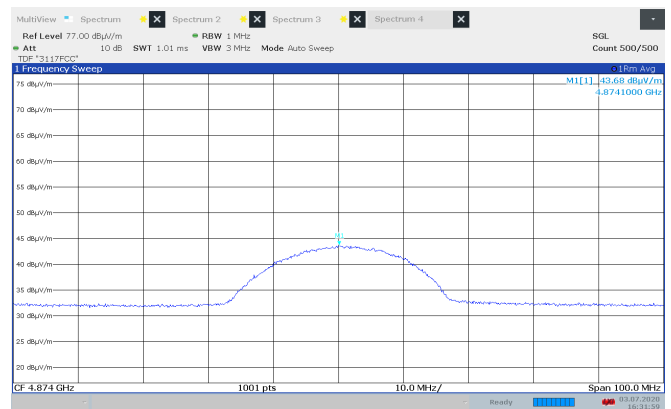

Radiated 4874 MHz, 2437 MHz, 802.11g, 6Mb, Ant 2, VP, Av, Max

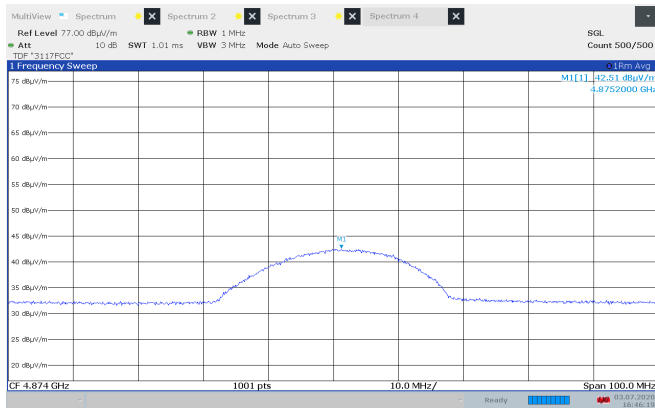

Radiated 4874 MHz, 2437 MHz, 802.11n, HT20, Ant 1, VP, Av, Max

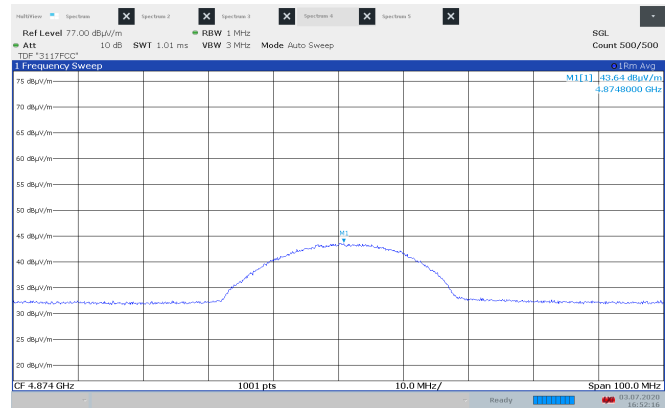

Radiated 4874 MHz, 2437 MHz, 802.11n, HT20, Ant 2, VP, Av, Max

3.9 Power Spectral Density (PSD)

FCC part 15.247(d)

ISED Canada RSS-247 Issue 2, Clause 5.2 (2)

Measurement procedure: ANSI C63.10-2013 Clause 11.10

Test Results: Complies

Measurement Data:

The measurement procedures PKPSD described in ANSI C63.10-2013 was used.


Carrier Frequency	Power Spectral Density (dBm/3kHz)		
	802.11b, 11 Mbps	802.11g, 6 Mbps	802.11n, MCS0
2412 MHz	-9.3		
2422 MHz		-15.3	-15.6
2437 MHz	-9.5	-14.9	-14.8
2452 MHz		-17.7	-17.7
2462 MHz	-9.8		

Values measured with 30 kHz RBW are corrected by a Bandwidth Correction Factor of -10 dB.


Measured on the highest and lowest channels with Maximum Power.

Requirements:


The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band

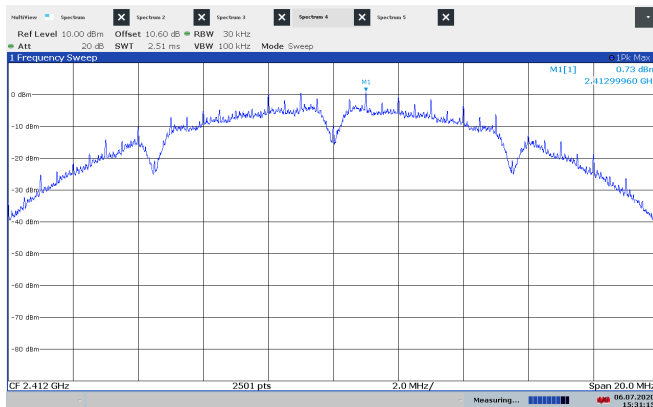


PSD, 2412 MHz, 802.11b, 1Mb

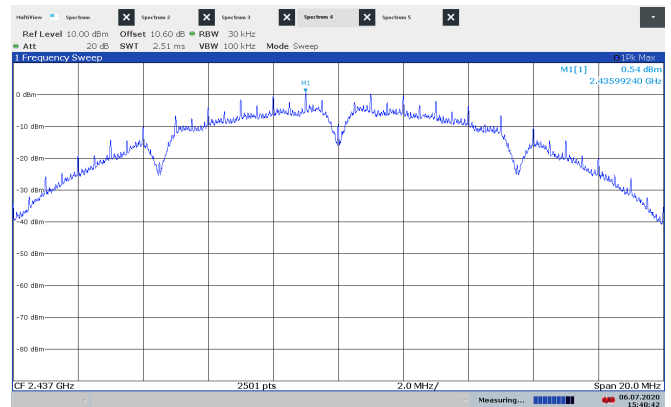


PSD, 2437 MHz, 802.11b, 1Mb

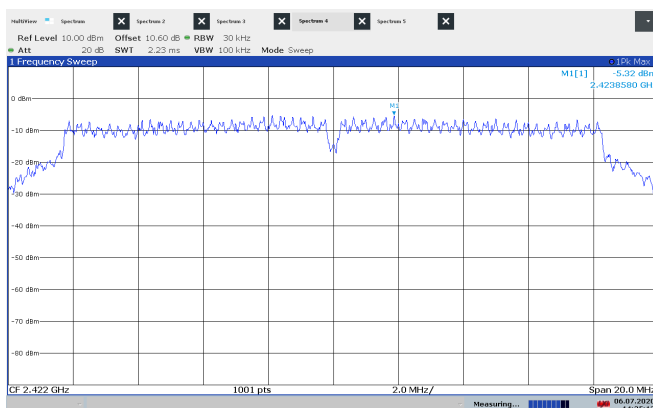


PSD, 2422 MHz, 802.11g, 6Mb

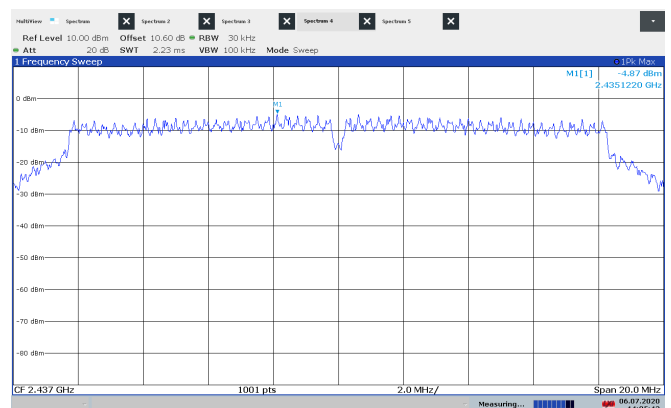


PSD, 2437 MHz, 802.11g, 6Mb

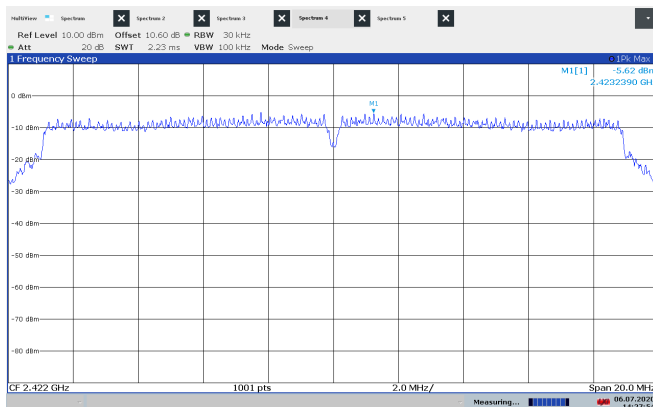


PSD, 2422 MHz, 802.11n, HT20

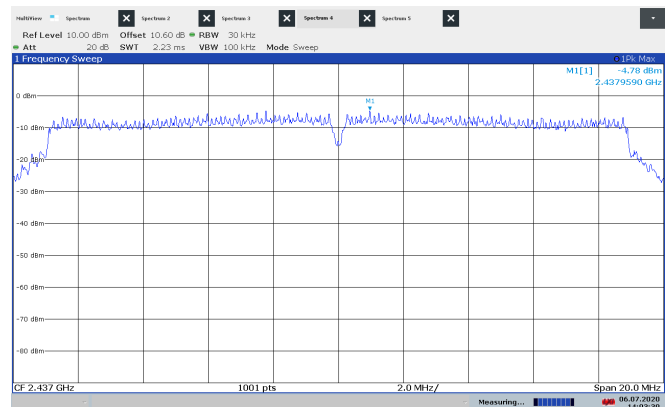


PSD, 2437 MHz, 802.11n, HT20

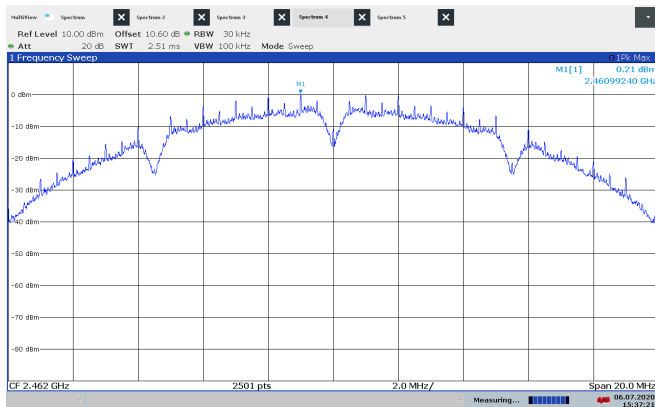

PSD, 2462 MHz, 802.11b, 1Mb

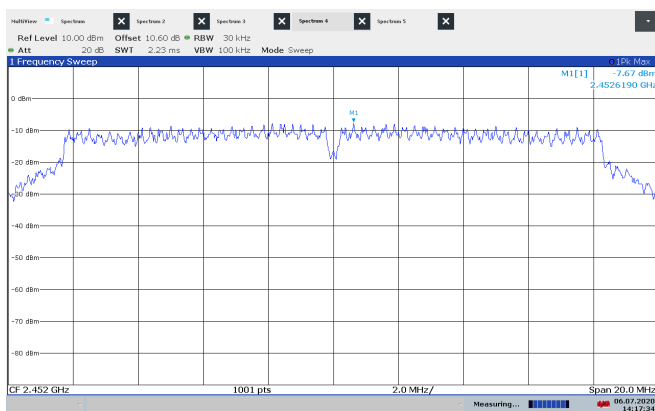

PSD, 2452 MHz, 802.11g, 6Mb

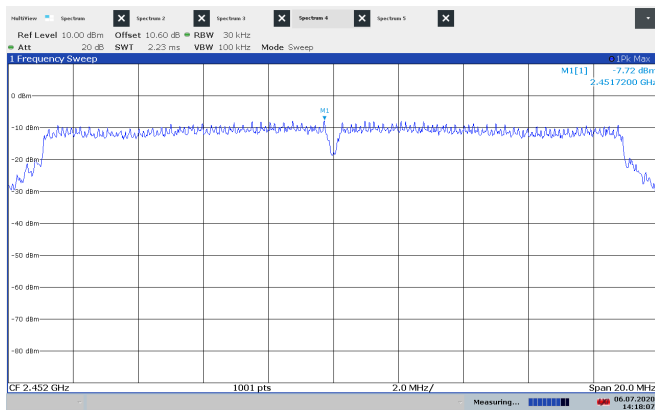

PSD, 2452 MHz, 802.11n, HT20

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSW43	Spectrum Analyzer	Rohde & Schwarz	LR 1690	2020-01	2021-01
2	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2020-01	2021-01
3	6810.17B	Attenuator	Suhner	LR 1669	2019-07 2020-08	2020-07 2021-08
4	NO324415	Band Reject Filter	Microwave Circuits	LR 1760	COU	
5	VULB 9163	BiLog Antenna	Schwarzbech	LR 1616	2020-01	2023-01
6	317	Preamplifier	Sonoma Inst.	LR 1687	2019-07 2020-08	2020-07 2021-08
7	3117-PA	Horn Antenna +PreAmp	EMCO	LR 1717	2017-12	2020-12
8	8449B			LR 1332	2019-07 2020-08	2020-07 2021-08
9	WLK5-1100-1485-7000-40SS	Low Pass Filter	Wainwright Inst.	LR 1761	COU	
10	ST18/SMA/N/36	RF Cable	Suhner	LR 1627	COU	
11	Sucoflex 102	Microwave Cable (1m)	Suhner	S/N: 500111	COU	
12	Sucoflex 102	Microwave Cable (2m)	Suhner	S/N: 500100	COU	


Note: COU – calibrate on use; N/A – Not Applicable

The software listed below has been used for one or more tests.

No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	EMC32	10.50.10	Radiated Emission test software
2	Rohde & Schwarz	GPIBShot	2.7	Screenshots from R&S Spectrum Analyzers
3				


6 BLOCK DIAGRAM

6.1 Conducted Tests



This test set-up is used for all Conducted tests.

6.2 Test Site Radiated Emission

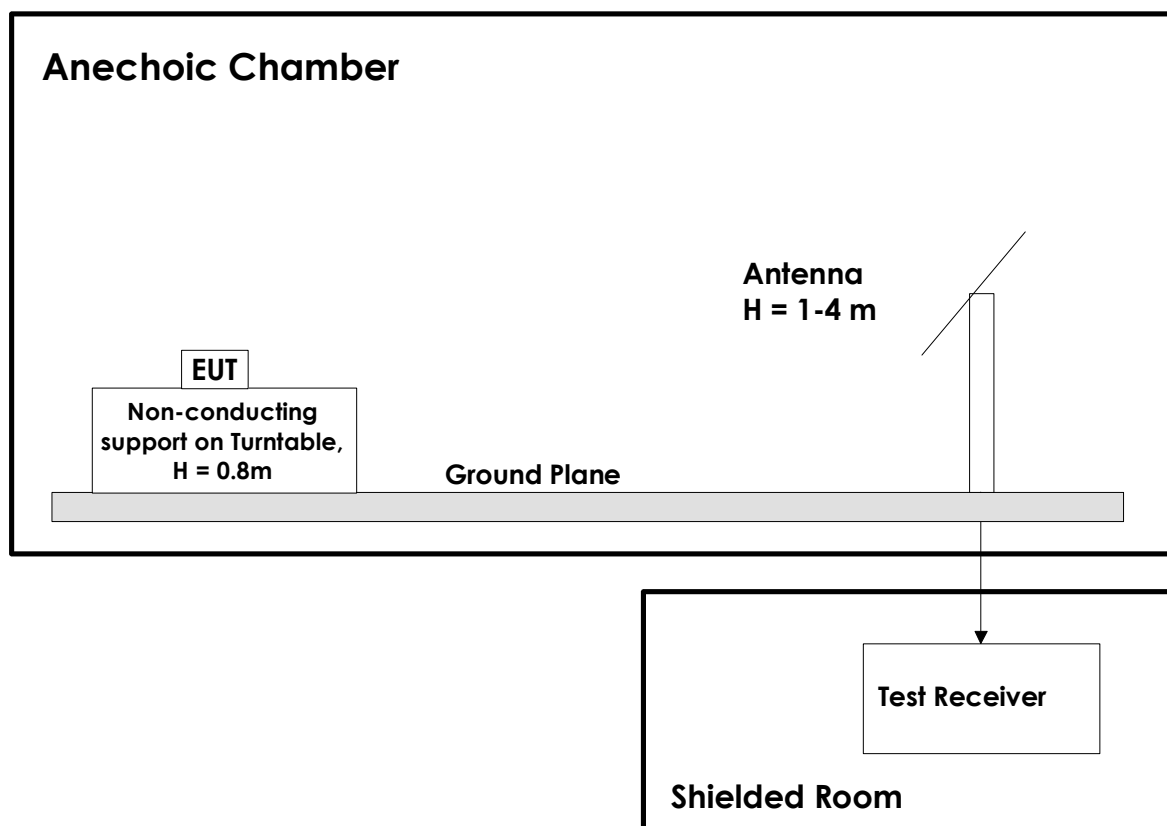

This test setup is used for all radiated emissions tests. Measuring distance is 3m for all frequencies up to 18 GHz. Above 18 GHz measuring distance is 1m.

Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna.

All measurements at 1 GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers.

A pre-amplifier is used for all measurements, and High-Pass filter is used for all harmonics.

Above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss.