

RF Exposure Report

Project Number: 5024907**Proposal Number: SUW-202302004058****Report Number: 5024907EMC08****Revision Level: 1****Client: Enovate Medical, LLC****Equipment Under Test: Wireless Medical Cart****Model Name: Envoy 2.0****Model Number: Phosphate – ENV-1DCAC0-A00
Mobius – ENV-2DCAC1-A00****FCC ID: 2AQ9D-A0002945****Contains FCC ID: 2AQ9D-ENV2SOM****Applicable Standards: 47 CFR §§ 2.1093 (Portable)****FCC KDB 447498 D01 General RF Exposure Guidance v06****Report revised on: 30 October 2023****Result: Exempt from SAR evaluation**

FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER: 3212.01

Report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Prepared by:

Daniel Alvarez, RF/EMC Sr. Staff Engineer

Reviewed by:

Stephen Whalen, SAR/EMC Manager

Remarks: This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. And for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 30 days only.

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	CLIENT INFORMATION.....	3
1.2	TEST LABORATORY	3
1.3	GENERAL INFORMATION OF EUT	3
1.4	SEPARATION DISTANCE.....	4
1.5	OPERATING MODES AND CONDITIONS	5
2	SAR EXCLUSION CALCULATIONS	5
2.1	SIMULTANEOUS CONDITIONS	9
3	REVISION HISTORY	10

1 General Information

1.1 Client Information

Name: Enovate Medical
Address: 1152 Park Avenue
City, State, Zip, Country: Murfreesboro, TN 37129, USA

1.2 Test Laboratory

Name: SGS North America, Inc.
Address: 620 Old Peachtree Road NW, Suite 100
City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA
Type of lab: Testing Laboratory
Certificate Number: 3212.01

1.3 General Information of EUT

Type of Product: Wireless Medical Cart
Model Name: Envoy 2.0
Model Number: Phosphate – ENV-1DCAC0-A00
Mobius – ENV-2DCAC1-A00
Serial Number: 3193746
Module Model: ENV2SOM

Frequency Ranges: 2402 – 2480 MHz (Bluetooth/BLE)
2412 – 2462 MHz (WLAN 2.4GHz)
5180 – 5240 MHz (WLAN 5GHz U-NII-1)
5260 – 5320 MHz (WLAN 5GHz U-NII-2A)
5500 – 5720 MHz (WLAN 5GHz U-NII-2C)
5745 – 5825 MHz (WLAN 5GHz U-NII-3)

Antenna: Trace, 2402-2462MHz, 3.5dBi*
Trace, 5180 – 5825MHz, 2.3dBi*
External Whip, 2400-2480MHz, 0.7 dBi*

Max Conducted Output Power: Bluetooth BDR: 4.91 dBm*
Bluetooth LE: 0.16 dBm*
WLAN 2.4GHz: 13.4 dBm*
WLAN 5GHz U-NII-1: 14.39 dBm*
WLAN 5GHz U-NII-2A: 14.5 dBm*
WLAN 5GHz U-NII-2C: 13.3 dBm*
WLAN 5GHz U-NII-3: 13.3 dBm*

Sample Received Date: 07 March 2023


Dates of testing: 02-3 May 2023

**Data was not measured by SGS laboratory and therefore not responsible for accuracy. Data obtained via customer, specification sheet, previous regulatory filing or other.*


1.4 Separation Distance

The closest exposure distance occurs when a user places his or her hand on the top flat surface of the device. See mechanical drawings for reference.

WLAN/BDR antenna is situated 149.5mm from the top cover.

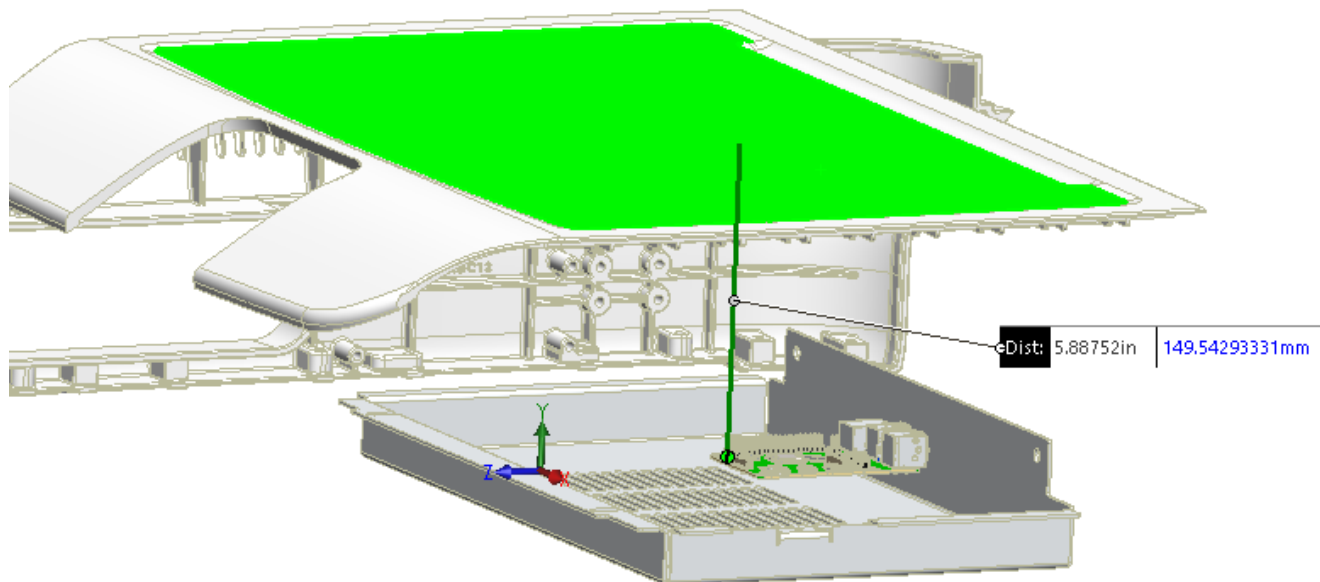

The closest exposure distance for the BLE external whip antenna occurs when a user places their hand on top of the work surface directly above the antenna. BLE external whip antenna is situated 13-25mm from the top cover.

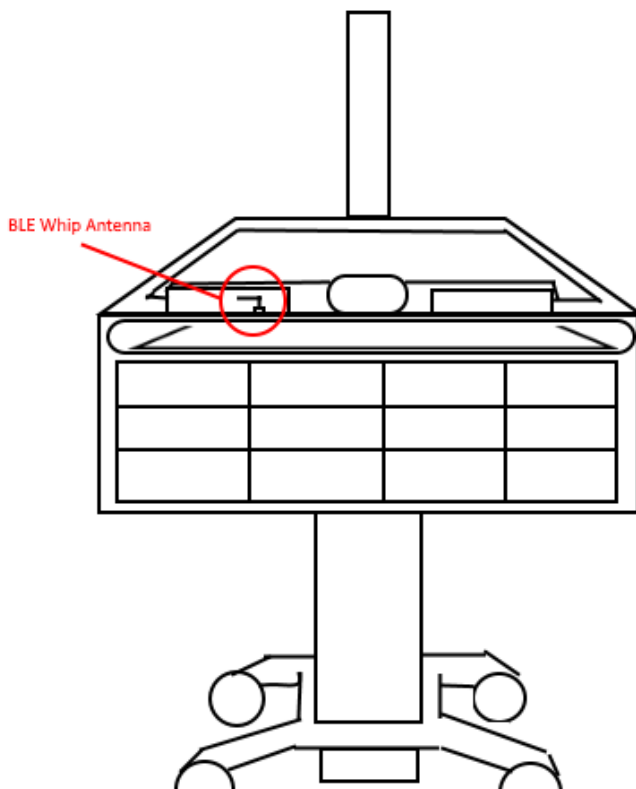

1.5 Operating Modes and Conditions

Maximum power levels were utilized for all calculations. Simultaneous transmissions are possible between Bluetooth WLAN and BLE.

2 SAR Exclusion Calculations

The highest conducted output power in conjunction with the Upper and Lower frequency boundaries have been used to demonstrate compliance for both WLAN and Bluetooth transmission mode.

Power levels were referenced from measurements captured in report number 5024907EMC03.

The EUT is considered an extremity application.

Nordic External Bluetooth LE (2AQ9D-A0002945)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	0.16	dBm
Duty Cycle:	100.0%	
Min separation distance:	5	mm
Frequency, f:	2480	MHz

<== Source based time average duty cycle

Value reference Number	Values used for Calculation	Reference number definition
v1	1.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW
v2	5 mm	[min. test separation distance, mm] 'Rounded to nearest mm
v3	1.575	[f(GHz)]

- a) For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$\frac{[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]}{\leq 3.0 \text{ for 1-g SAR, and } \leq 7.5 \text{ for 10-g extremity SAR,}}$$

Exclusion Calculation(1g):	0.3	number	<== [v2 / v3] must be less than 3
Exclusion Calculation(10g):	0.3	number	<== [v2 / v3] must be less than 7.5

Conclusions (Body):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
Conclusions (Extremity):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

Bluetooth BDR (2AQ9D-ENV2SOM)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	4.91	dBm
Duty Cycle:	100.0%	
Min separation distance:	30	mm
Frequency, f:	2441	MHz

<== Source based time average duty cycle

Value reference Number	Values used for Calculation	Reference number definition
v1	3.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW
v2	30 mm	[min. test separation distance, mm] 'Rounded to nearest mm
v3	1.562	[$\sqrt{f}$ (GHz)]

- a) For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0 \text{ for 1-g SAR, and } \leq 7.5 \text{ for 10-g extremity SAR,}$$

Exclusion Calculation(1g):	0.2	number	<== $[v2 / v3]$ must be less than 3
Exclusion Calculation(10g):	0.2	number	<== $[v2 / v3]$ must be less than 7.5

Conclusions (Body):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
Conclusions (Extremity):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

WLAN 2.4GHz: (2AQ9D-ENV2SOM)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	13.4	dBm
Duty Cycle:	100.0%	
Min separation distance:	30	mm
Frequency, f:	2462	MHz

<== Source based time average duty cycle

Value reference Number	Values used for Calculation	Reference number definition
v1	22.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW
v2	30 mm	[min. test separation distance, mm] 'Rounded to nearest mm
v3	1.569	[$\sqrt{f}$ (GHz)]

- a) For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0 \text{ for 1-g SAR, and } \leq 7.5 \text{ for 10-g extremity SAR,}$$

Exclusion Calculation(1g):	1.2	number	<== $[v2 / v3]$ must be less than 3
Exclusion Calculation(10g):	1.2	number	<== $[v2 / v3]$ must be less than 7.5

Conclusions (Body):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
Conclusions (Extremity):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

WLAN 5GHz U-NII-1: (2AQ9D-ENV2SOM)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	14.39	dBm
Duty Cycle:	100.0%	<== Source based time average duty cycle
Min separation distance:	149	mm
Frequency, f:	5240	MHz

Value reference Number	Values used for Calculation	Reference number definition
v1	27.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW'
v2	149 mm	[min. test separation distance, mm] 'Rounded to nearest mm'
v3	2.289	[f/(GHz)]

- b) For 100 MHz to 6 GHz and test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following (also illustrated in Appendix B)
- 1) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm) · (f/(MHz)/150)]} mW, for 100 MHz to 1500 MHz
 - 2) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm) · 10]} mW, for > 1500 MHz and ≤ 6 GHz

Value reference Number	Values used for Calculation	Reference number definition
v4 _{1g}	66 mW	<== 3 * 50 / V3 '[Power allowed at numeric threshold of 3.0 for 50 mm in step a)]
v4 _{10g}	164 mW	<== 7.5 * 50 / V3 '[Power allowed at numeric threshold of 7.5 for 50 mm in step a)]
v5	99 mm	[(test separation distance – 50 mm)]
v6	10.00	10 for >1500 MHz and <6 GHz

1g Exclusion Threshold:	1056 mW	<== v4 _{1g} + (v5 * v6)
10g Exclusion Threshold:	1154 mW	<== v4 _{10g} + (v5 * v6)

Conclusions:	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

WLAN 5GHz U-NII-2A: (2AQ9D-ENV2SOM)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	14.5	dBm
Duty Cycle:	100.0%	<== Source based time average duty cycle
Min separation distance:	149	mm
Frequency, f:	5320	MHz

Value reference Number	Values used for Calculation	Reference number definition
v1	28.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW'
v2	149 mm	[min. test separation distance, mm] 'Rounded to nearest mm'
v3	2.307	[f/(GHz)]

- b) For 100 MHz to 6 GHz and test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following (also illustrated in Appendix B)
- 1) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm) · (f/(MHz)/150)]} mW, for 100 MHz to 1500 MHz
 - 2) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm) · 10]} mW, for > 1500 MHz and ≤ 6 GHz

Value reference Number	Values used for Calculation	Reference number definition
v4 _{1g}	65 mW	<== 3 * 50 / V3 '[Power allowed at numeric threshold of 3.0 for 50 mm in step a)]
v4 _{10g}	163 mW	<== 7.5 * 50 / V3 '[Power allowed at numeric threshold of 7.5 for 50 mm in step a)]
v5	99 mm	[(test separation distance – 50 mm)]
v6	10.00	10 for >1500 MHz and <6 GHz

1g Exclusion Threshold:	1055 mW	<== v4 _{1g} + (v5 * v6)
10g Exclusion Threshold:	1153 mW	<== v4 _{10g} + (v5 * v6)

Conclusions:	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

WLAN 5GHz U-NII-2C: (2AQ9D-ENV2SOM)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	13.3	dBm
Duty Cycle:	100.0%	
Min separation distance:	30	mm
Frequency, f:	5720	MHz

<== Source based time average duty cycle

Value reference Number	Values used for Calculation	Reference number definition
v1	21.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW
v2	30 mm	[min. test separation distance, mm] 'Rounded to nearest mm
v3	2.392	[$\sqrt{f}$ (GHz)]

- a) For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0$$
 for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR,

Exclusion Calculation(1g):	1.7	number	<== [v2 / v3] must be less than 3
Exclusion Calculation(10g):	1.7	number	<== [v2 / v3] must be less than 7.5

Conclusions (Body):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
Conclusions (Extremity):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

WLAN 5GHz U-NII-3: (2AQ9D-ENV2SOM)

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units
Max Power:	13.3	dBm
Duty Cycle:	100.0%	
Min separation distance:	30	mm
Frequency, f:	5825	MHz

<== Source based time average duty cycle

Value reference Number	Values used for Calculation	Reference number definition
v1	21.00 mW	[max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW
v2	30 mm	[min. test separation distance, mm] 'Rounded to nearest mm
v3	2.414	[$\sqrt{f}$ (GHz)]

- a) For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0$$
 for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR,

Exclusion Calculation(1g):	1.7	number	<== [v2 / v3] must be less than 3
Exclusion Calculation(10g):	1.7	number	<== [v2 / v3] must be less than 7.5

Conclusions (Body):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
Conclusions (Extremity):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

2.1 *Simultaneous Conditions*

Simultaneous transmissions are evaluated using the equation and highest results from each technology.

$$\frac{S_1}{S_1 \text{ Limit}} + \frac{S_2}{S_2 \text{ Limit}} \dots + \frac{S_n}{S_n \text{ Limit}} \leq 1.0$$

$$6.2\% \text{ (UNII-2)} + 8\% \text{ (BDR)} + 10\% \text{ (BLE)} = 24.2\% (<100\%)$$

3 Revision History

Revision Level	Description of changes	Revision Date
0	Initial Release	19 September 2023
1	Updated section 1.3 & 2	30 October 2023