


RoHS COMPLIANT

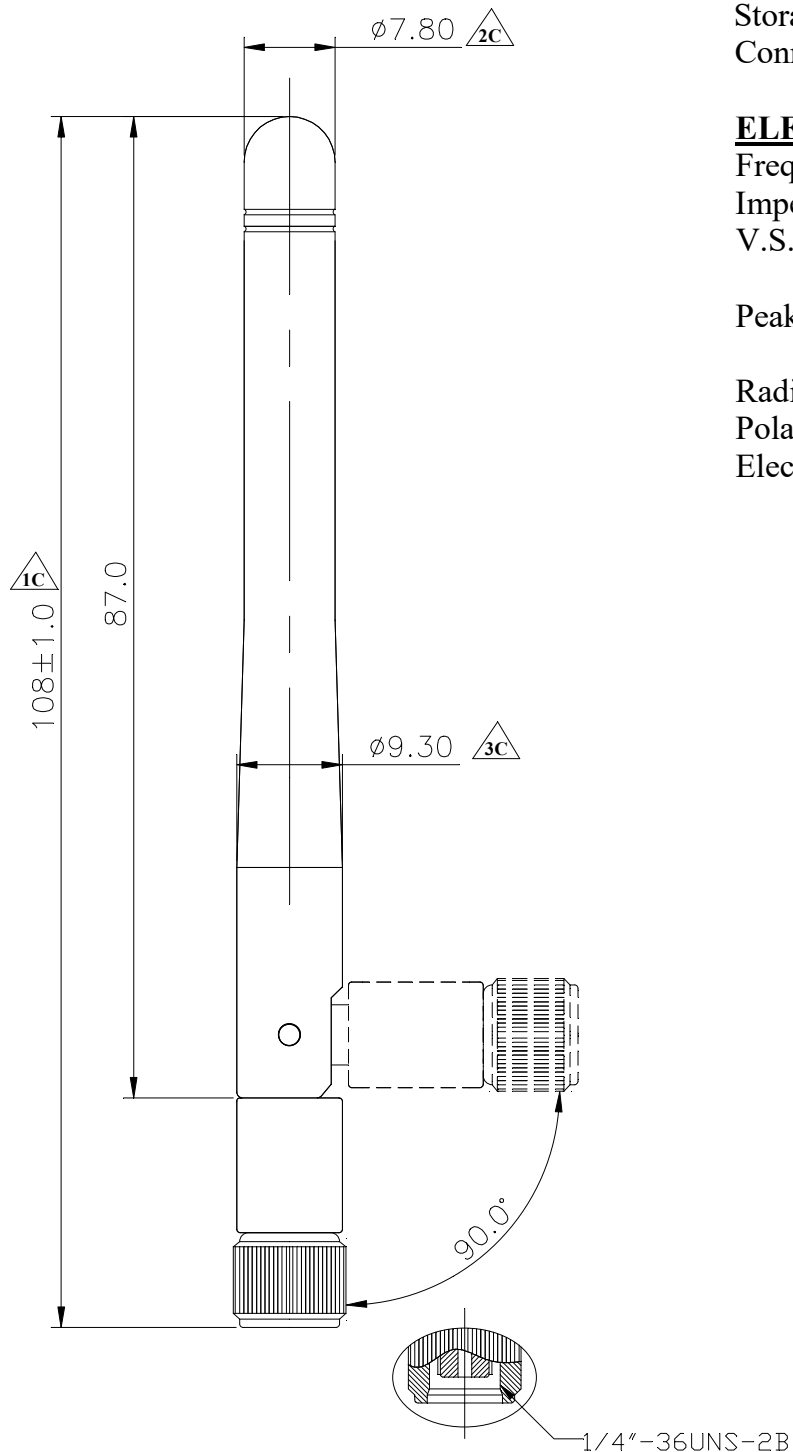

MECHANICAL

Antenna Cover : TPE.

Antenna Base : Engineering Plastics

Color : Black

Operation Temperature: -20°C ~ +65°C

Storage Temperature: -30°C ~ +75°C

Connector : SMA Plug Reverse

ELECTRICAL

Frequency : 2.4 / 5.8GHz

Impedance : 50 ohm

V.S.W.R : 2.4GHz ≤ 2.0

5.8GHz ≤ 3.0


Peak Gain: 2.4GHz ≤ 2 dBi

5.8GHz ≤ 3 dBi

Radiation : Omni

Polarization : Linear

Electrical wave : $1/4 \lambda$, Dipole

?? DR. Hayato 2018/07/03	?? APPD. Marco 2018/07/03	???? .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	?? ARTICLE 2.4/5.8GHz - SMA (M/S/R)(K.L)
???? 依E302-1806070建立	REVISION NOTE		?? DWG NO. 6602303181
		?? UNIT ?? mm	?? SCALE ?? 1.5/1
		?? SHEET ?? 1/1	?? REV. A