

Prüfbericht-Nr.: Test report no.:	CN25MF9F 001	Auftrags-Nr.: Order no.:	168583432	Seite 1 von 16 Page 1 of 16	
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-11-11		
Auftraggeber: Client:	Ugreen Group Limited Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, China				
Prüfgegenstand: Test item:	2-in-1 Wireless Charger				
Bezeichnung / Typ-Nr.: Identification / Type no.:	W526				
Auftrags-Inhalt: Order content:	Test Report				
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209				
Wareneingangsdatum: Date of sample receipt:	2025-11-11	Please refer to Photo Document			
Prüfmuster-Nr.: Test sample no.:	A004130853-001~004 A004183193-003				
Prüfzeitraum: Testing period:	2025-11-18 - 2026-02-03				
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: Test result*:	Pass				
geprüft von: tested by:			genehmigt von: authorized by:		
Datum: Date:	2026-02-05	Signed by: Lin Lin		Ausstellungsdatum: Issue date:	2026-02-05
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / Other:	FCC ID: 2AQI5-35278				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged				
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht-Nr.: CN25MF9F 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25MF9F 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

Prüfbericht - Nr.: CN25MF9F 001
Test Report No.:

Seite 5 von 16
Page 5 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2025-10-30	2026-10-29
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2025-10-30	2026-10-29
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2026-07-18
Artificial Mains Network	R&S	ENV432	101546	2026-02-09
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 2-in-1 Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	2-in-1 Wireless Charger
Type Designation:	W526
Product Number (P/N) code:	35278, 35278P, 35278X, 35278A, 35278B, 35278U, 35278JP, 35278ZD, 35278T
FCC ID:	2AQI5-35278
Operating Voltage:	USB-C1 (IN) Input: 9.0V=3.0A/12.0V=3A Wireless Charging Total Output Power: 20.0W Max USB-C2 (OUT) Output: 5.0V=1.0A 5.0W Max Total Output Power: 25.0W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Wireless charging output power:	Magnetic Wireless Charger: 5W / 7.5W / 15W Max. TWS Charging: 5W Max.
Type-C2 Output power:	5W Max
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz
Operating Frequency:	110.5 – 148.5 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	5W / 7.5W / 10W / 15W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, EPP, 15W (Phone)
- E. On, Wireless Charging, 5W TWS
- F. On, Co-location mode (Worst case mode A~D + mode E)
- G. On, Standby mode
- H. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W526 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Wireless charge Load	YBZ	YBZ-MPP25	N/A
AC/DC Adapter (EMC)	Lenovo	LA140	N/A
Digital Multimeter	Fluke	18B+	N/A
Cement resistor	Test Lab	Cement resistor-016	N/A
Phone	Apple	iPhone 16 Plus	N/A
AirPods Pro	Apple	AirPods Pro2	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

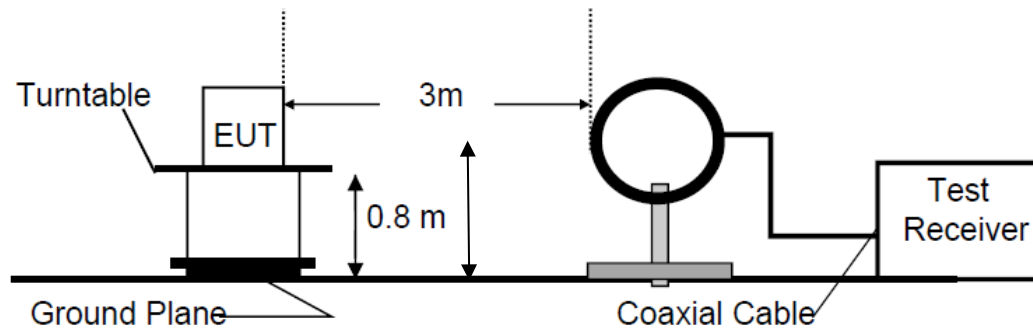


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


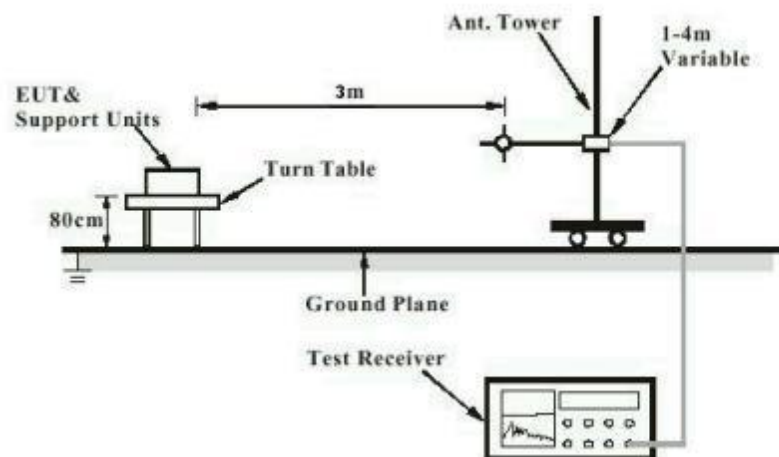


Diagram of Measurement Configuration for Mains Conduction Measurement

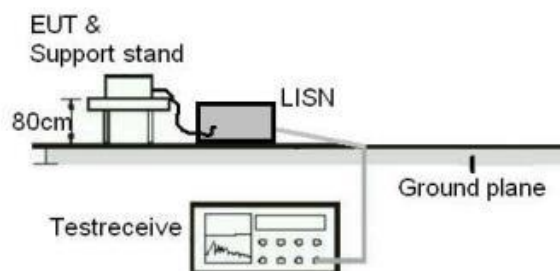

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25MF9F 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-11-18
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, G
Ambient temperature	: 24 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25MF9F 001
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10: 2020
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2025-12-03 to 2026-02-03
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25MF9F 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-11-20
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F
Ambient temperature	: 24.3 °C
Relative humidity	: 51.0 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (5W).....	2
Wireless charging (7.5W).....	3
Wireless charging (10W).....	4
Wireless charging (15W).....	5
Wireless charging (TWS 5W)	6
Standby mode (127kHz).....	7
Standby mode (145kHz).....	8
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	9
Wireless charging (5W).....	9
Wireless charging (7.5W).....	20
Wireless charging (10W).....	31
Wireless charging (15W).....	42
Wireless charging (TWS 5W)	53
Wireless charging (Co-location).....	64
Standby mode	69
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	74


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (5W)

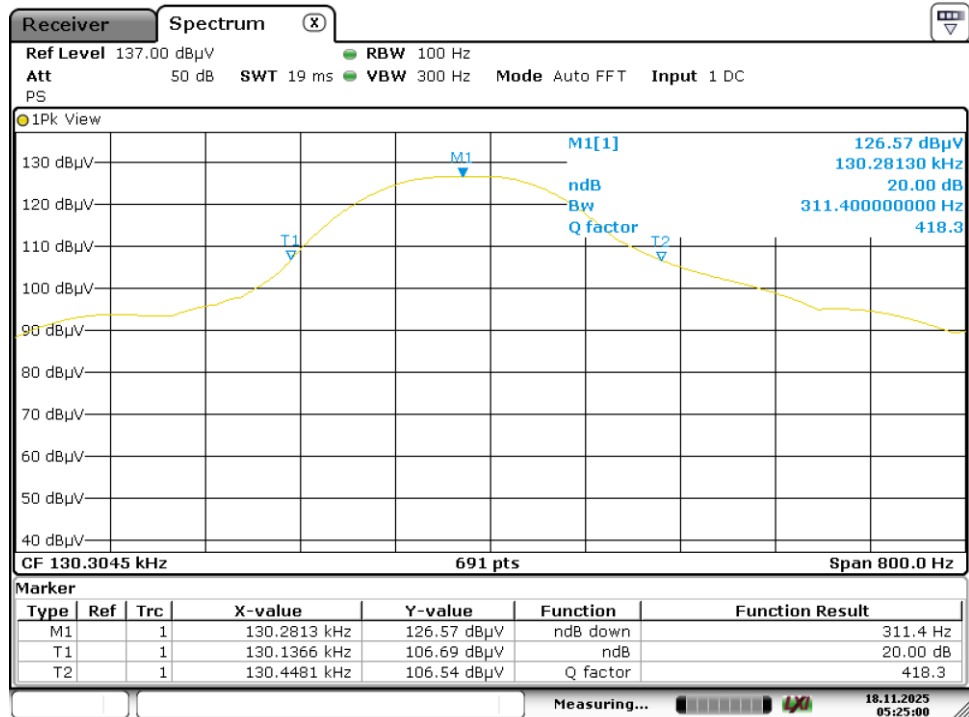


Date: 18.NOV.2025 05:25:01

Wireless charging (7.5W)

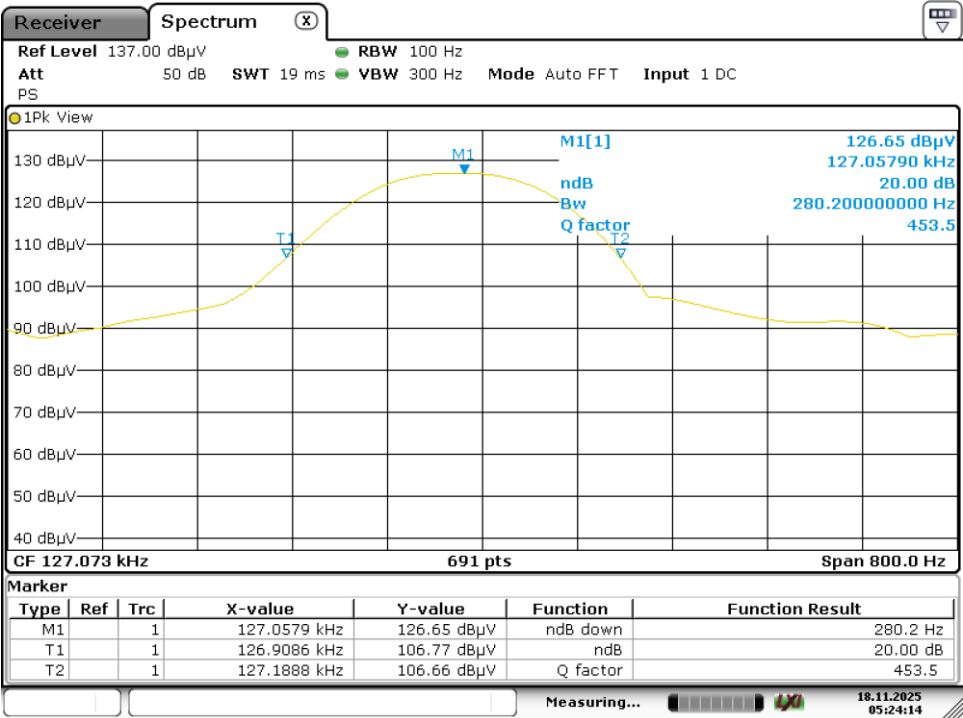


Date: 18.NOV.2025 05:24:14


Wireless charging (10W)

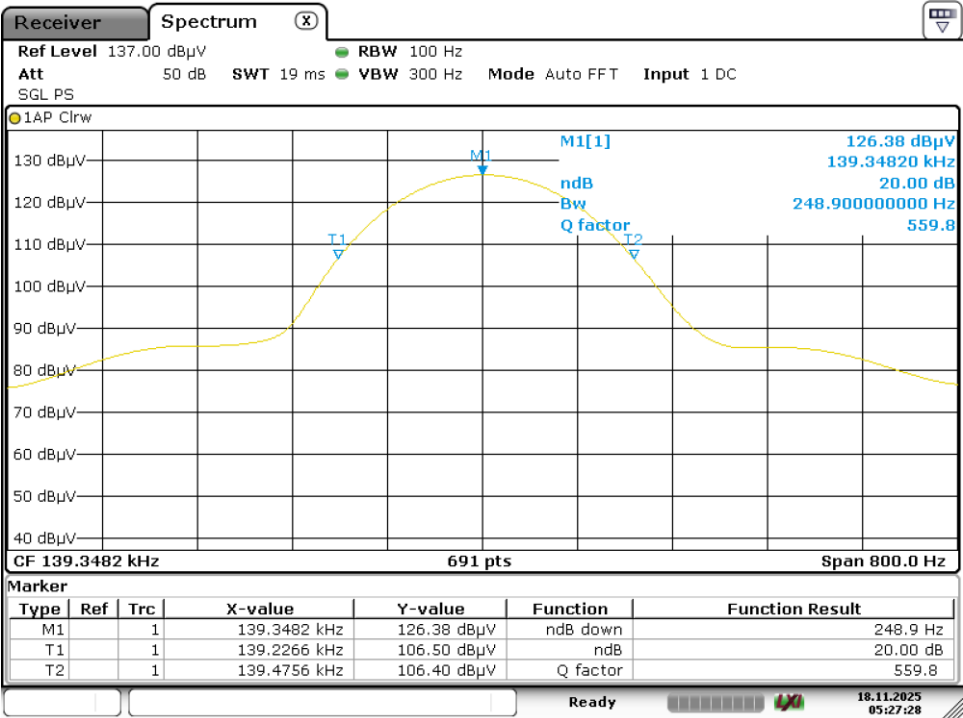

Wireless charging (15W)

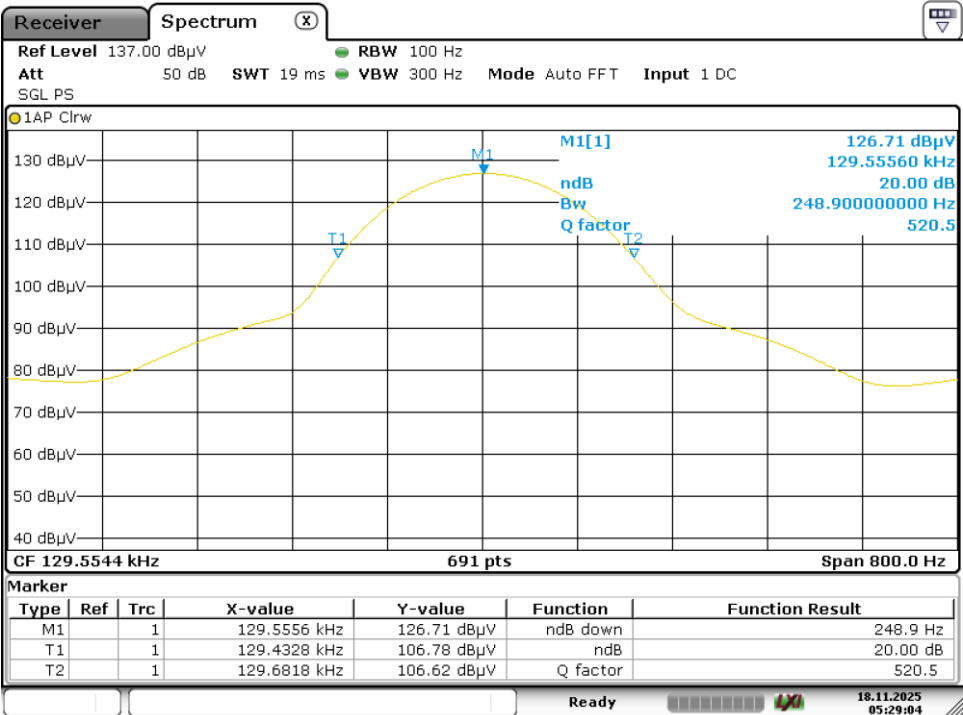


Wireless charging (TWS 5W)

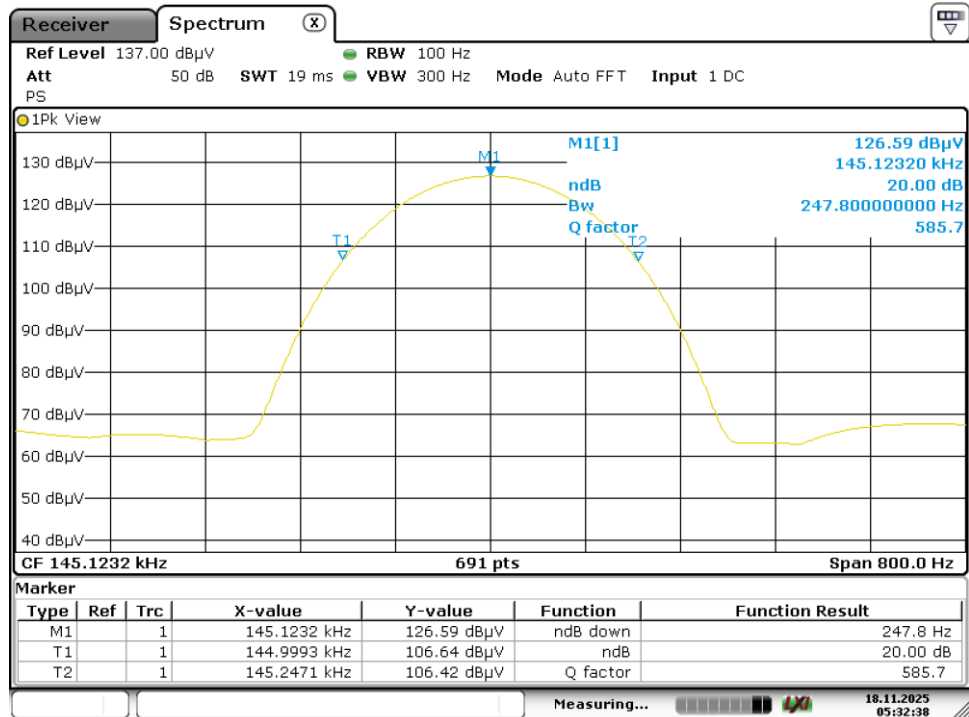


Date: 18.NOV.2025 05:32:38

Standby mode (127kHz)

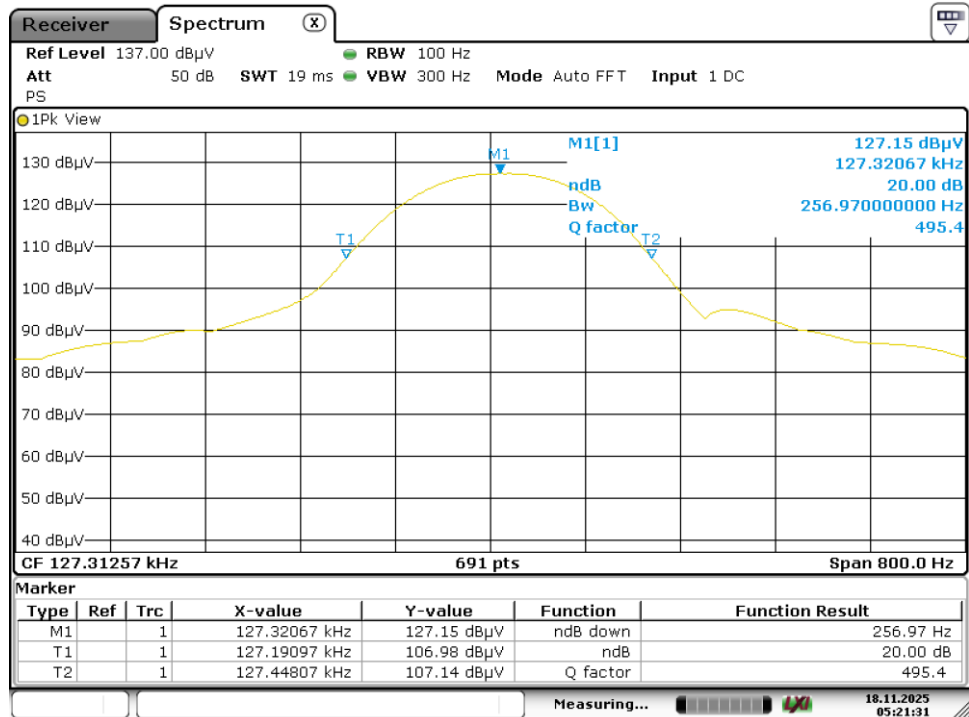

Date: 18.NOV.2025 05:21:31

Standby mode (145kHz)

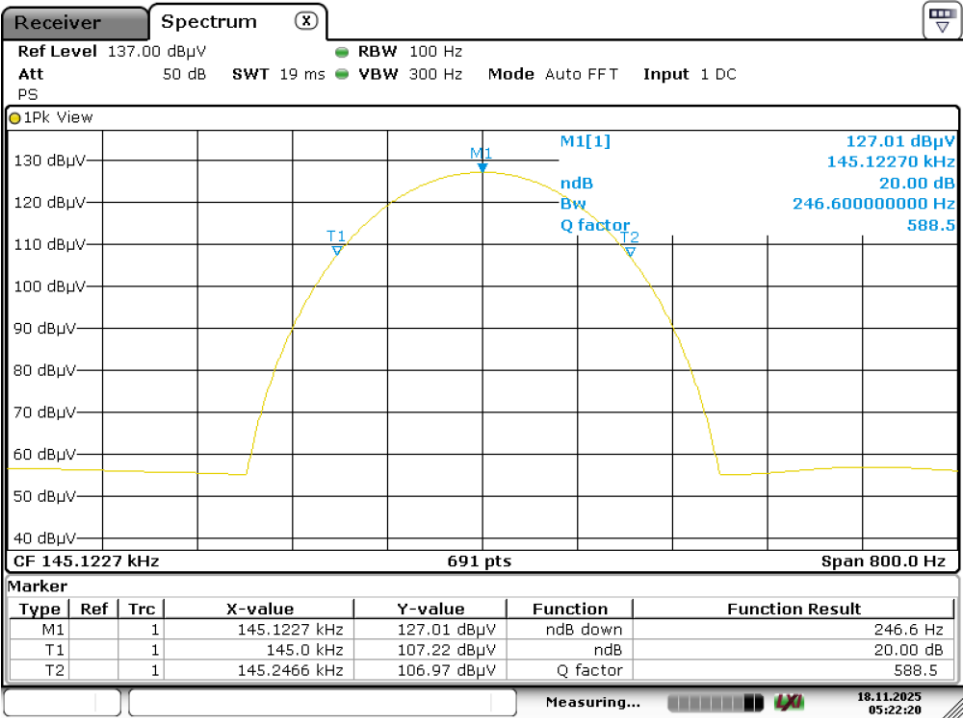


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (5W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Charging
Order No/Sample No:	168583432/A004130853-002
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

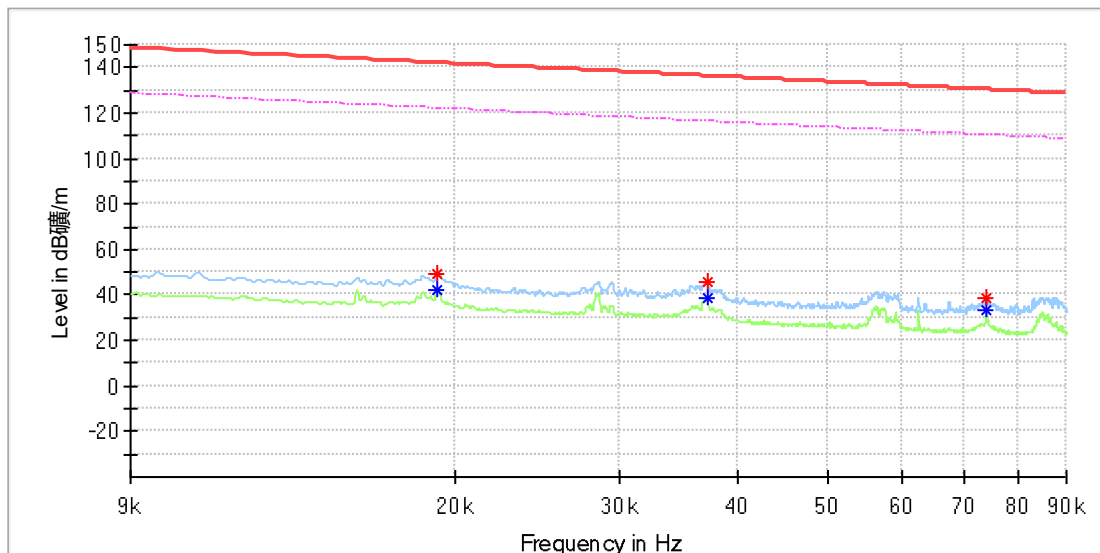


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	---	41.86	121.96	80.10	100.0	X	135.0	20.0
0.019183	49.01	---	141.93	92.92	100.0	X	135.0	20.0
0.037176	46.10	---	136.19	90.09	100.0	X	204.0	20.0
0.037176	---	38.31	116.19	77.87	100.0	X	204.0	20.0
0.073858	38.55	---	130.23	91.68	100.0	X	350.0	20.0
0.073858	---	33.09	110.23	77.14	100.0	X	350.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

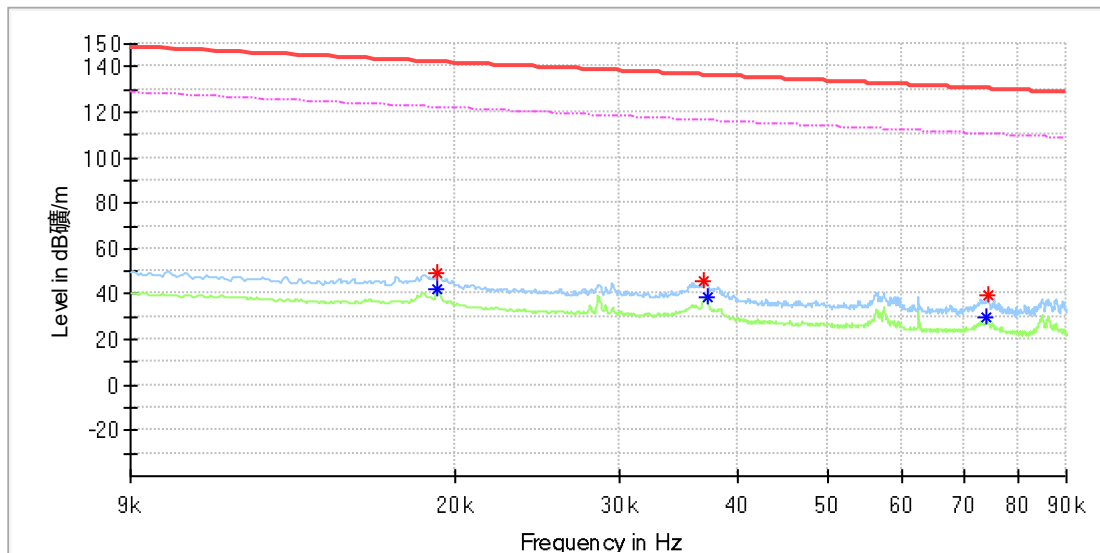


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.57	---	141.93	92.36	100.0	Y	19.0	20.0
0.019183	---	41.80	121.93	80.13	100.0	Y	19.0	20.0
0.036945	45.72	---	136.24	90.52	100.0	Y	130.0	20.0
0.037176	---	38.40	116.19	77.79	100.0	Y	0.0	20.0
0.073974	---	29.44	110.21	80.77	100.0	Y	84.0	20.0
0.074263	39.23	---	130.18	90.95	100.0	Y	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

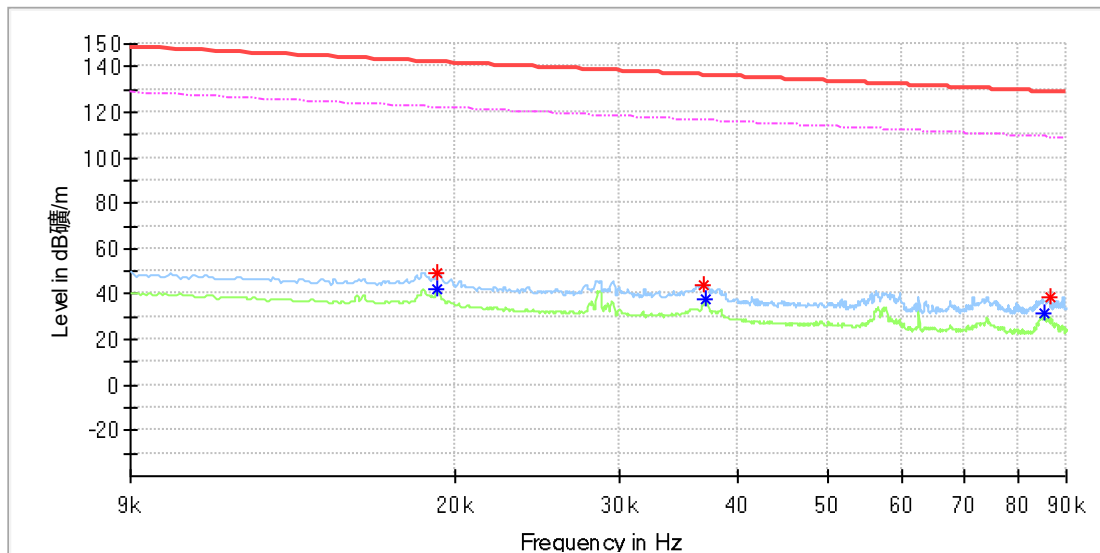


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	---	41.76	121.96	80.20	100.0	Z	351.0	20.0
0.019183	49.54	---	141.93	92.39	100.0	Z	351.0	20.0
0.036887	44.04	---	136.25	92.21	100.0	Z	234.0	20.0
0.037061	---	37.39	116.21	78.82	100.0	Z	240.0	20.0
0.085314	---	31.25	108.98	77.73	100.0	Z	30.0	20.0
0.086413	38.87	---	128.86	90.00	100.0	Z	24.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

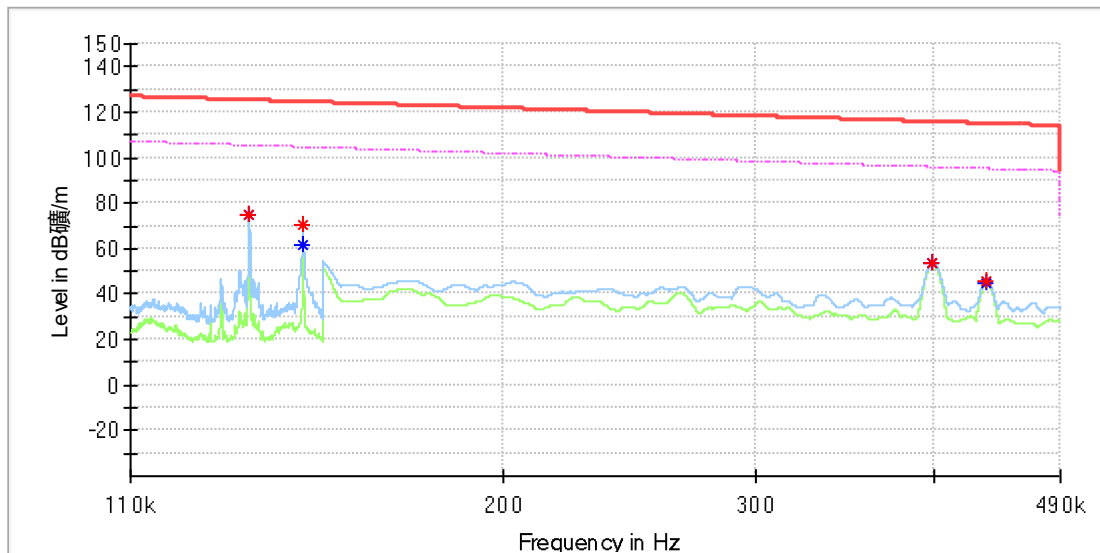


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.133057	---	75.00	105.12	30.11	100.0	X	323.0	20.0
0.133057	75.17	---	125.12	49.95	100.0	X	323.0	20.0
0.145143	70.64	---	124.36	53.72	100.0	X	90.0	20.0
0.145143	---	61.55	104.36	42.82	100.0	X	90.0	20.0
0.399300	53.67	---	115.58	61.90	100.0	X	12.0	20.0
0.399300	---	53.36	95.58	42.21	100.0	X	12.0	20.0
0.435250	45.77	---	114.83	69.06	100.0	X	171.0	20.0
0.435400	---	45.26	94.83	49.57	100.0	X	171.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

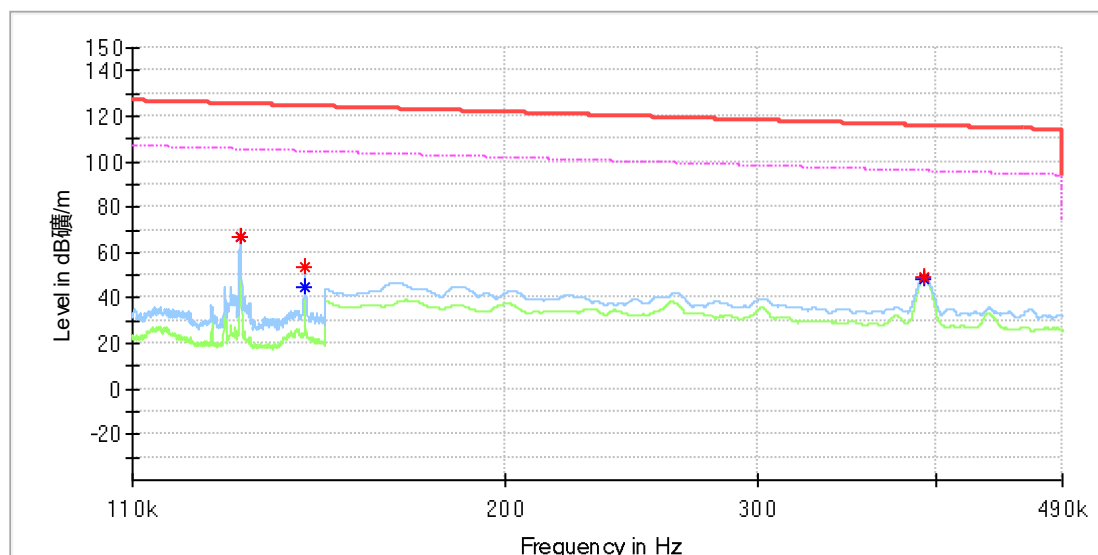


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130829	---	67.02	105.26	38.25	100.0	Y	46.0	20.0
0.130829	67.22	---	125.26	58.05	100.0	Y	46.0	20.0
0.145143	54.09	---	124.36	70.27	100.0	Y	187.0	20.0
0.145143	---	45.08	104.36	59.29	100.0	Y	187.0	20.0
0.392600	49.58	---	115.72	66.14	100.0	Y	297.0	20.0
0.392600	---	48.63	95.72	47.09	100.0	Y	297.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

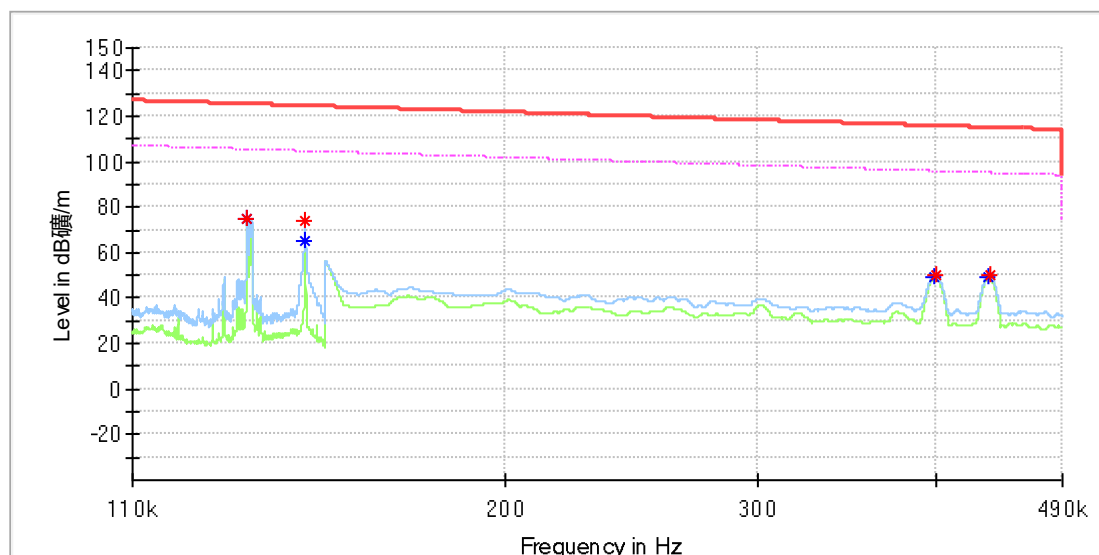


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.132286	74.82	---	125.17	50.34	100.0	Z	0.0	20.0
0.132286	---	74.65	105.17	30.52	100.0	Z	0.0	20.0
0.145143	74.41	---	124.36	49.95	100.0	Z	88.0	20.0
0.145143	---	64.88	104.36	39.48	100.0	Z	88.0	20.0
0.399250	---	49.52	95.58	46.06	100.0	Z	0.0	20.0
0.399550	50.03	---	115.57	65.54	100.0	Z	0.0	20.0
0.435400	---	49.52	94.83	45.31	100.0	Z	0.0	20.0
0.435700	50.17	---	114.82	64.65	100.0	Z	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

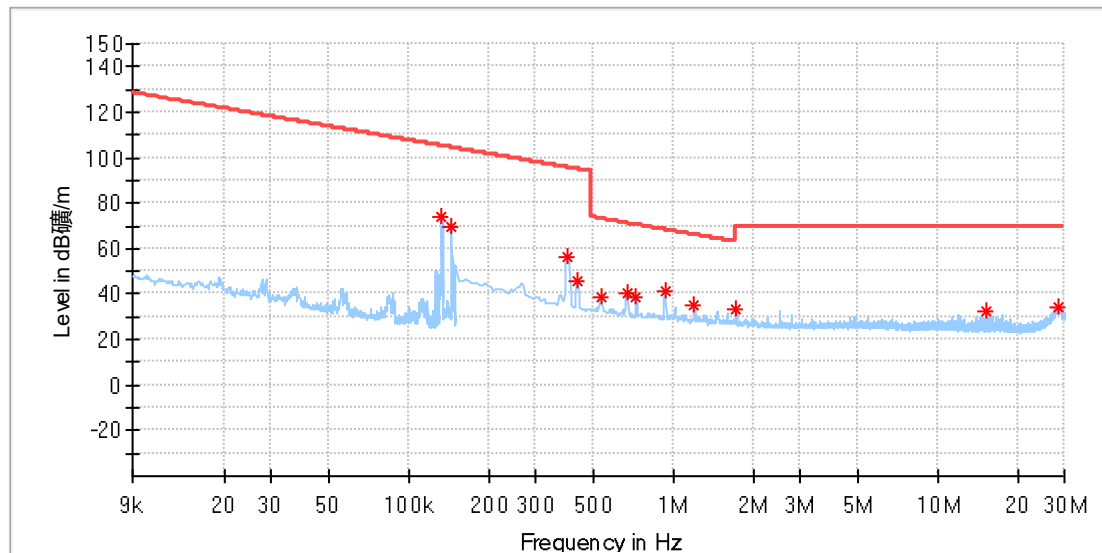

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.132576	73.77	105.15	31.38	100.0	X	43.0	19.9
0.145166	69.89	104.36	34.47	100.0	X	303.0	19.9
0.395824	56.56	95.65	39.10	100.0	X	58.0	19.9
0.435331	45.72	94.83	49.11	100.0	X	216.0	19.9
0.531905	38.52	73.09	34.57	100.0	X	69.0	19.9
0.663596	40.46	71.17	30.71	100.0	X	223.0	19.9
0.720662	38.25	70.46	32.21	100.0	X	223.0	19.9
0.926978	40.93	68.28	27.34	100.0	X	54.0	19.9
1.194750	35.26	66.08	30.82	100.0	X	22.0	19.9
1.725905	32.96	69.50	36.54	100.0	X	62.0	20.0
15.290096	32.37	69.50	37.13	100.0	X	198.0	20.3
28.507500	34.58	69.50	34.92	100.0	X	252.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

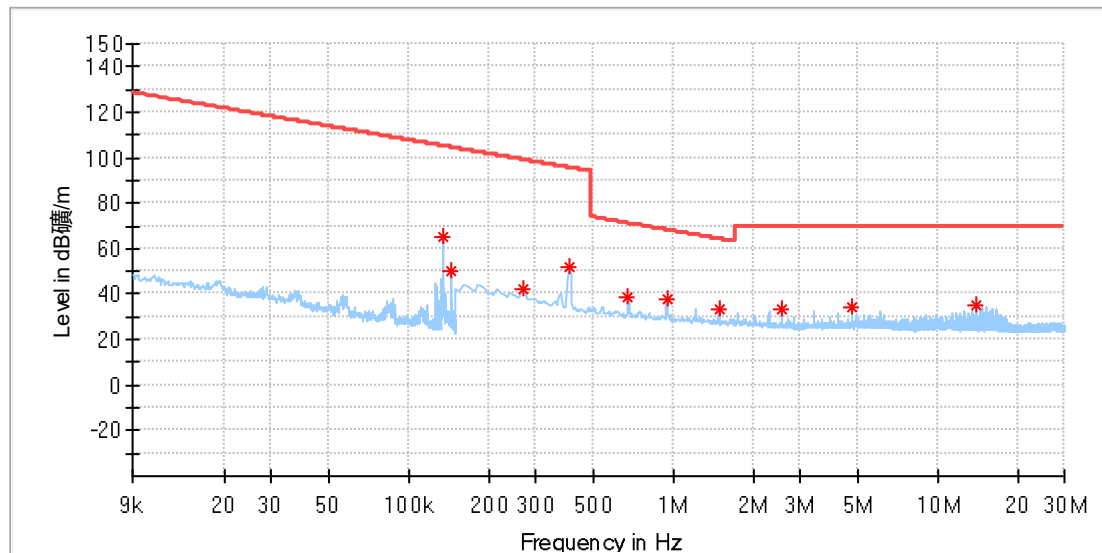

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.134591	65.21	105.02	39.80	100.0	Y	139.0	19.9
0.145166	50.43	104.36	53.93	100.0	Y	36.0	19.9
0.268522	42.29	99.02	56.73	100.0	Y	359.0	19.9
0.404603	52.34	95.46	43.12	100.0	Y	323.0	19.9
0.672375	38.60	71.06	32.46	100.0	Y	323.0	19.9
0.944537	37.38	68.12	30.74	100.0	Y	136.0	19.9
1.480081	33.20	64.23	31.03	100.0	Y	53.0	20.0
2.564338	33.15	69.50	36.35	100.0	Y	60.0	20.0
4.719684	33.96	69.50	35.54	100.0	Y	42.0	20.1
13.902949	34.85	69.50	34.65	100.0	Y	46.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

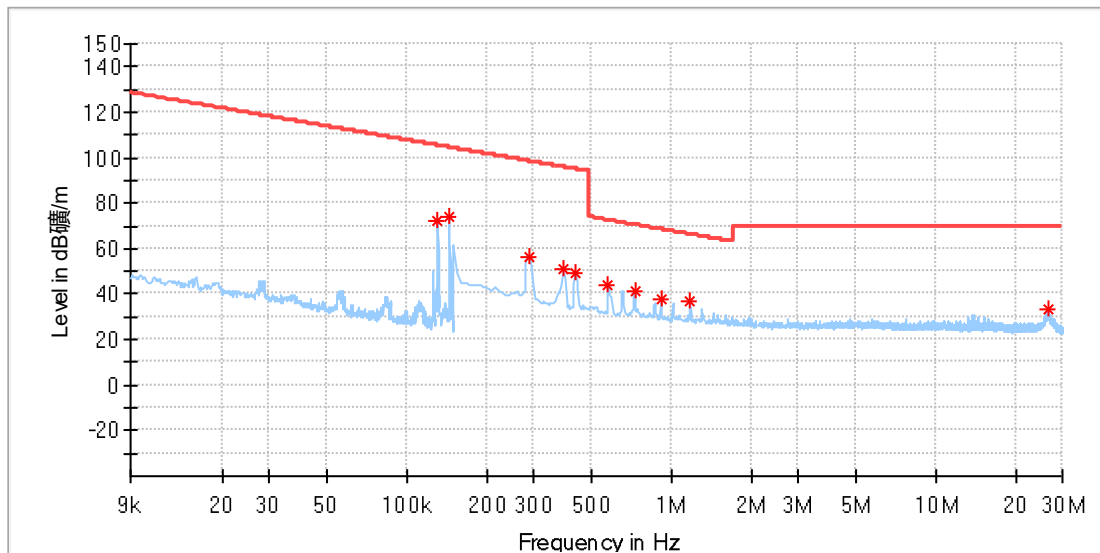

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130864	72.25	105.26	33.01	100.0	Z	25.0	19.9
0.145166	73.77	104.36	30.59	100.0	Z	270.0	19.9
0.290471	56.59	98.34	41.74	100.0	Z	244.0	19.9
0.391434	50.62	95.75	45.13	100.0	Z	61.0	19.9
0.435331	49.64	94.83	45.19	100.0	Z	241.0	19.9
0.575802	43.59	72.40	28.81	100.0	Z	244.0	19.9
0.725052	41.54	70.41	28.87	100.0	Z	223.0	19.9
0.913809	37.35	68.40	31.05	100.0	Z	25.0	19.9
1.172802	36.64	66.24	29.60	100.0	Z	61.0	19.9
26.418000	33.14	69.50	36.36	100.0	Z	151.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

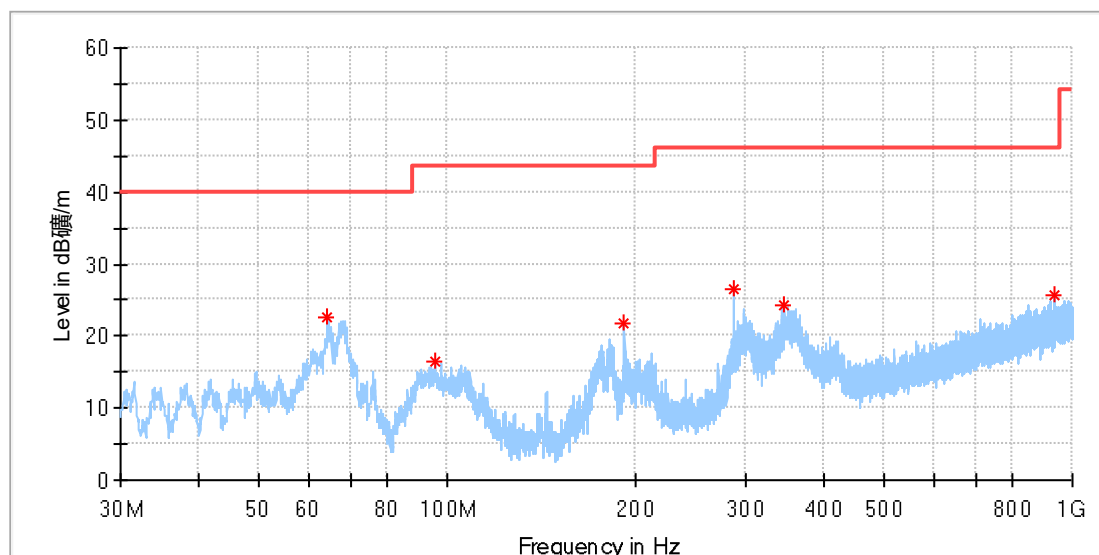

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
64.327222	22.66	40.00	17.34	100.0	H	181.0	-20.1
95.421111	16.56	43.50	26.94	100.0	H	130.0	-19.8
191.990000	21.77	43.50	21.73	100.0	H	0.0	-19.5
288.020000	26.55	46.00	19.45	100.0	H	181.0	-16.6
346.651111	24.27	46.00	21.73	100.0	H	159.0	-14.9
936.950000	25.58	46.00	20.42	100.0	H	0.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

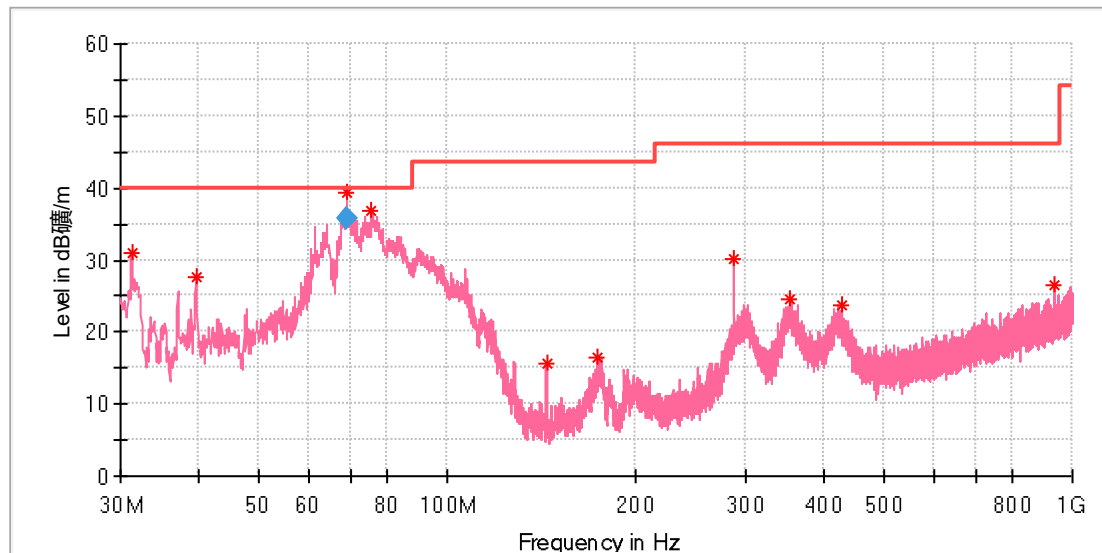

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.293333	31.10	40.00	8.90	100.0	V	259.0	-22.8
39.646111	27.59	40.00	12.41	100.0	V	317.0	-20.3
68.961667	39.37	40.00	0.63	100.0	V	229.0	-21.6
75.643889	36.90	40.00	3.10	100.0	V	302.0	-23.5
144.028889	15.53	43.50	27.97	100.0	V	287.0	-22.4
174.206667	16.52	43.50	26.98	100.0	V	0.0	-21.1
288.020000	30.22	46.00	15.78	100.0	V	252.0	-16.6
352.902222	24.56	46.00	21.44	100.0	V	71.0	-14.8
427.807778	23.75	46.00	22.25	100.0	V	28.0	-13.1
936.950000	26.54	46.00	19.46	100.0	V	127.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
68.973945	35.60	40.00	4.40	100.0	V	224.0	-21.6

Wireless charging (7.5W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Charging
Order No/Sample No:	168583432/A004130853-002
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

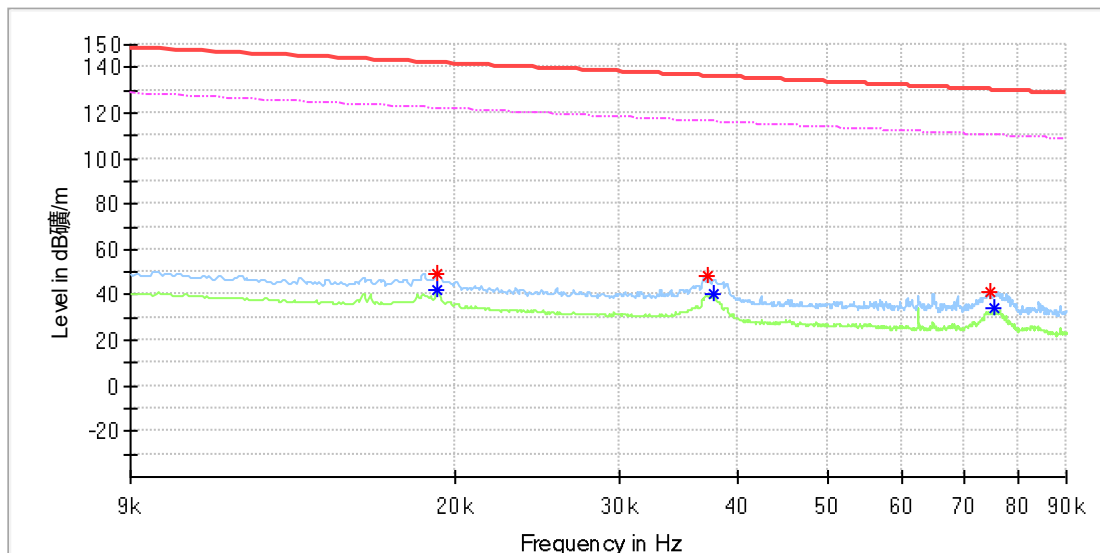


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	48.84	---	141.96	93.12	100.0	X	32.0	20.0
0.019183	---	41.95	121.93	79.98	100.0	X	0.0	20.0
0.037234	48.12	---	136.17	88.05	100.0	X	0.0	20.0
0.037755	---	40.72	116.05	75.33	100.0	X	80.0	20.0
0.074784	41.57	---	130.12	88.55	100.0	X	75.0	20.0
0.075246	---	34.20	110.07	75.86	100.0	X	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

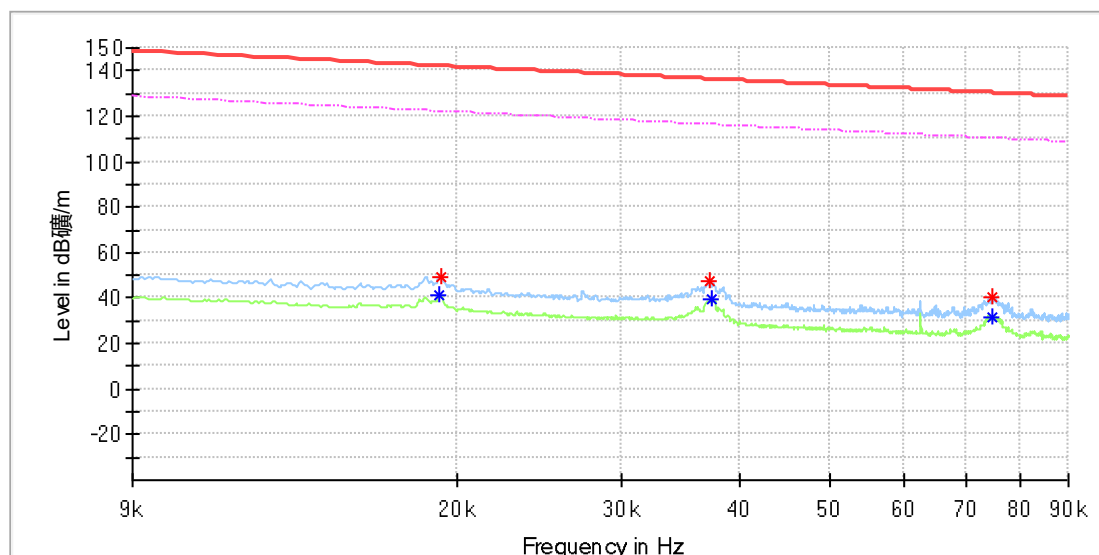


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	41.74	121.93	80.19	100.0	Y	311.0	20.0
0.019241	49.16	---	141.90	92.75	100.0	Y	311.0	20.0
0.037176	47.13	---	136.19	89.06	100.0	Y	311.0	20.0
0.037466	---	39.33	116.12	76.79	100.0	Y	47.0	20.0
0.074668	---	31.84	110.13	78.29	100.0	Y	42.0	20.0
0.074784	40.47	---	130.12	89.65	100.0	Y	47.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

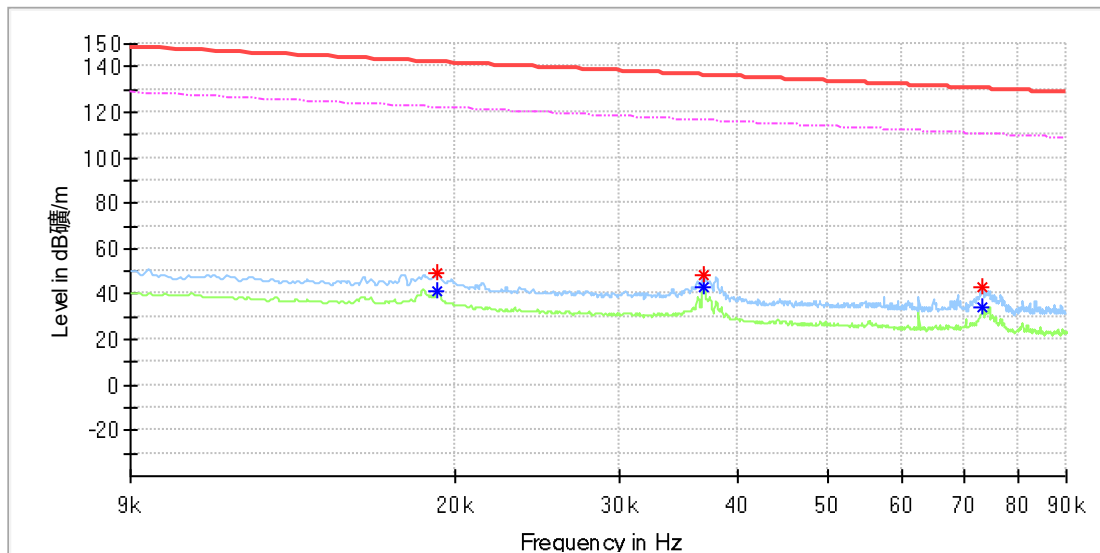


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.32	---	141.93	92.61	100.0	Z	152.0	20.0
0.019183	---	41.37	121.93	80.56	100.0	Z	152.0	20.0
0.036887	48.62	---	136.25	87.64	100.0	Z	15.0	20.0
0.036887	---	42.88	116.25	73.37	100.0	Z	15.0	20.0
0.073279	43.19	---	130.30	87.10	100.0	Z	15.0	20.0
0.073279	---	34.67	110.30	75.62	100.0	Z	15.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

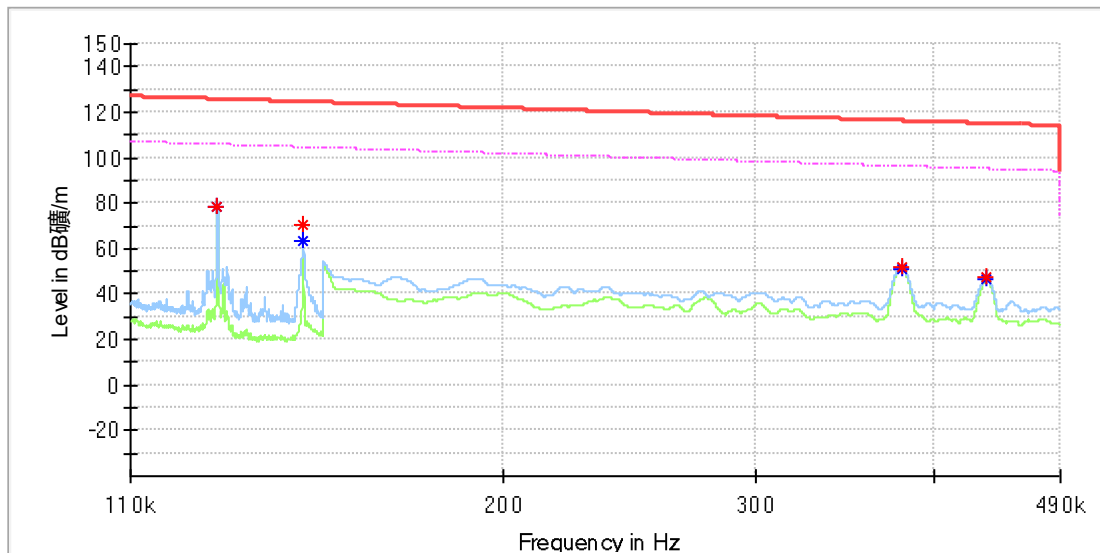


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126514	---	78.09	105.56	27.46	100.0	X	9.0	20.0
0.126514	78.33	---	125.56	47.22	100.0	X	9.0	20.0
0.145143	70.54	---	124.36	53.83	100.0	X	100.0	20.0
0.145143	---	62.95	104.36	41.41	100.0	X	100.0	20.0
0.379450	51.96	---	116.02	64.06	100.0	X	25.0	20.0
0.379450	---	51.35	96.02	44.67	100.0	X	25.0	20.0
0.435050	47.37	---	114.83	67.46	100.0	X	117.0	20.0
0.435250	---	46.37	94.83	48.46	100.0	X	117.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

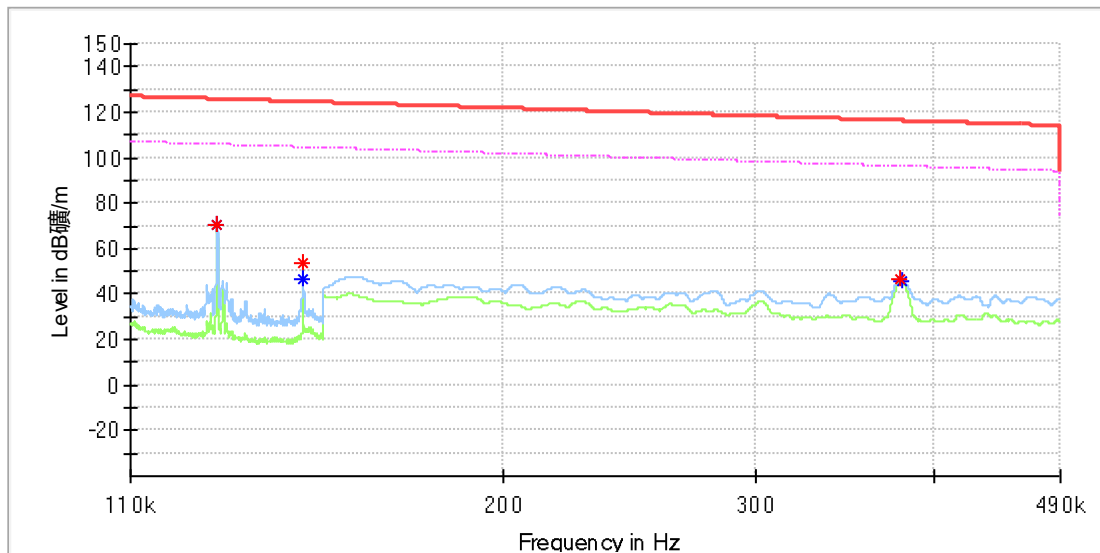


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126429	---	70.22	105.56	35.34	100.0	Y	87.0	20.0
0.126429	70.38	---	125.56	55.18	100.0	Y	87.0	20.0
0.145143	53.86	---	124.36	70.50	100.0	Y	194.0	20.0
0.145143	---	46.28	104.36	58.09	100.0	Y	194.0	20.0
0.379150	46.64	---	116.03	69.39	100.0	Y	280.0	20.0
0.379400	---	45.44	96.02	50.58	100.0	Y	280.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

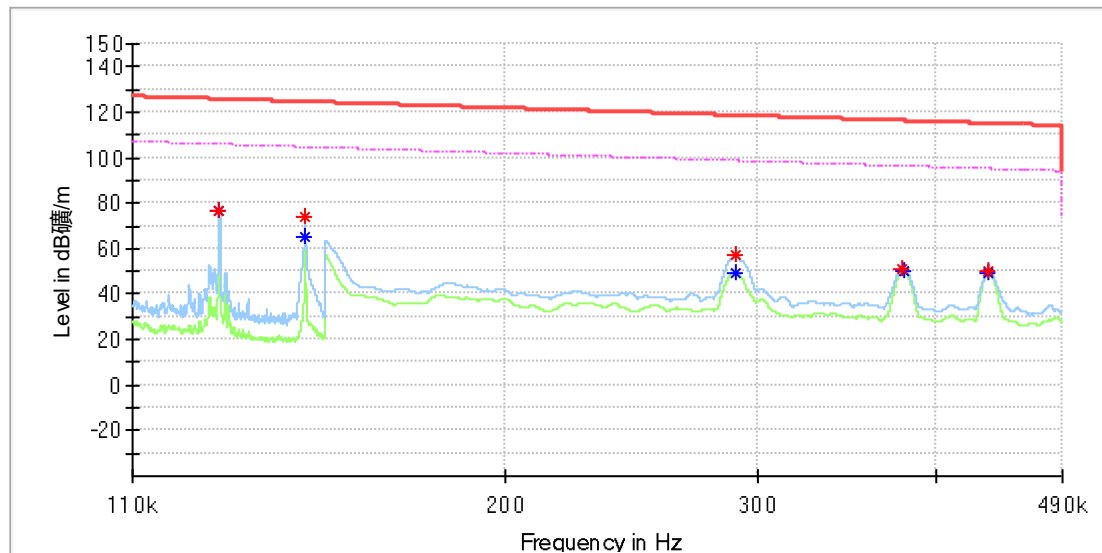


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126486	76.95	---	125.56	48.60	100.0	Z	0.0	20.0
0.126486	---	76.81	105.56	28.75	100.0	Z	0.0	20.0
0.145143	---	65.05	104.36	39.31	100.0	Z	85.0	20.0
0.145143	74.36	---	124.36	50.00	100.0	Z	85.0	20.0
0.289700	56.90	---	118.36	61.46	100.0	Z	288.0	20.0
0.289800	---	49.58	98.36	48.78	100.0	Z	288.0	20.0
0.379100	51.34	---	116.03	64.68	100.0	Z	322.0	20.0
0.379550	---	50.25	96.02	45.77	100.0	Z	322.0	20.0
0.435400	49.94	---	114.83	64.89	100.0	Z	148.0	20.0
0.435400	---	49.61	94.83	45.22	100.0	Z	148.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

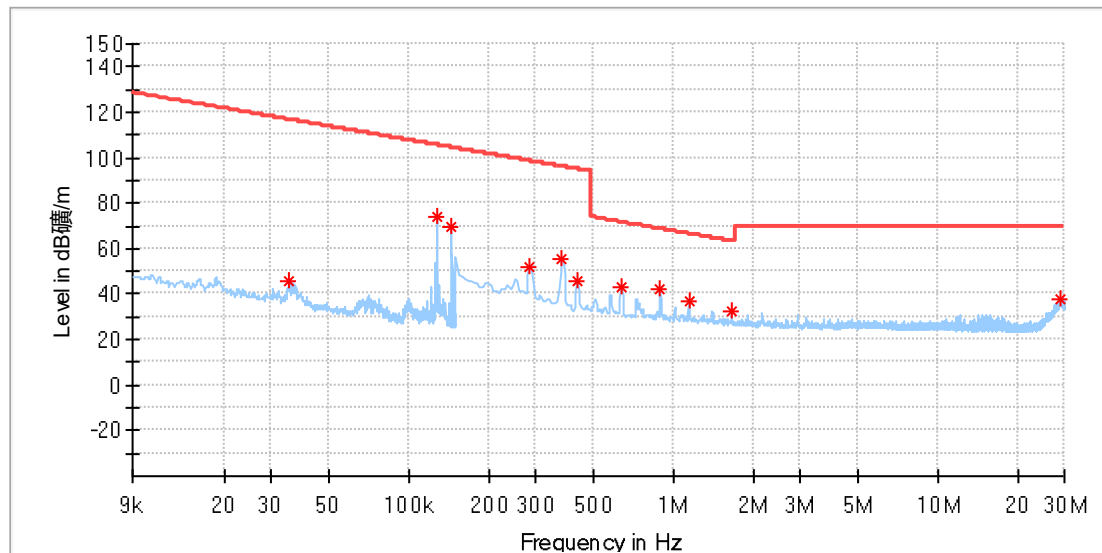

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.035286	45.84	116.64	70.80	100.0	X	106.0	19.9
0.127541	73.60	105.49	31.88	100.0	X	55.0	19.9
0.145166	69.84	104.36	34.52	100.0	X	300.0	19.9
0.286081	51.99	98.47	46.48	100.0	X	198.0	19.9
0.378265	55.60	96.05	40.45	100.0	X	241.0	19.9
0.435331	45.93	94.83	48.90	100.0	X	335.0	19.9
0.632868	43.41	71.58	28.18	100.0	X	76.0	19.9
0.891860	41.79	68.61	26.82	100.0	X	223.0	19.9
1.146463	37.01	66.44	29.43	100.0	X	231.0	19.9
1.651280	32.51	63.28	30.77	100.0	X	173.0	20.0
29.170346	37.97	69.50	31.53	100.0	X	338.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

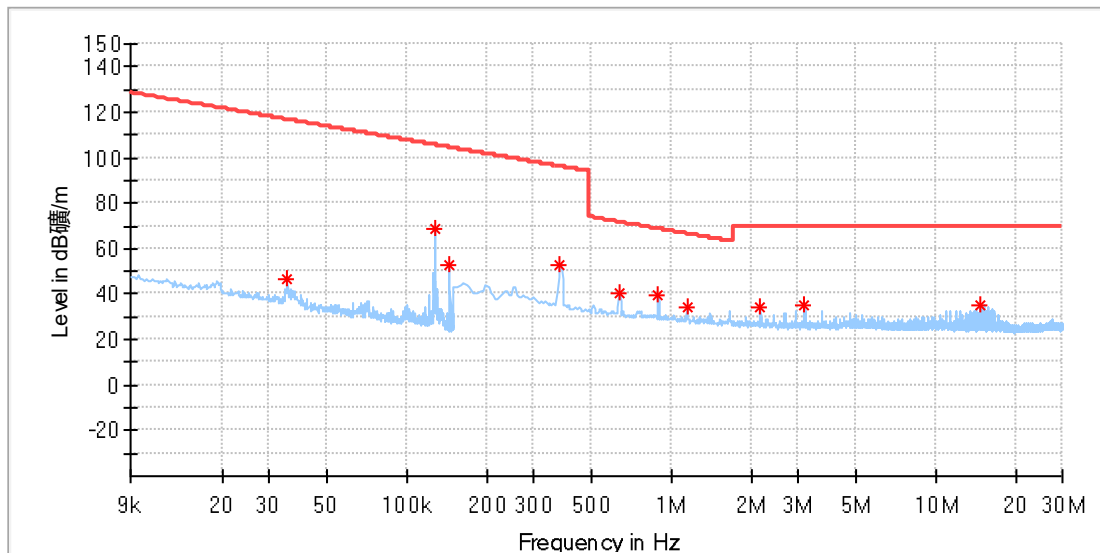

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.035286	46.32	116.64	70.32	100.0	Y	39.0	19.9
0.127641	68.40	105.48	37.08	100.0	Y	141.0	19.9
0.145166	52.50	104.36	51.86	100.0	Y	334.0	19.9
0.378265	52.36	96.05	43.69	100.0	Y	325.0	19.9
0.637258	40.32	71.52	31.21	100.0	Y	340.0	19.9
0.891860	39.11	68.61	29.50	100.0	Y	329.0	19.9
1.146463	34.21	66.44	32.23	100.0	Y	142.0	19.9
2.164875	34.19	69.50	35.31	100.0	Y	45.0	20.0
3.187677	34.80	69.50	34.70	100.0	Y	52.0	20.0
14.671147	34.69	69.50	34.81	100.0	Y	48.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

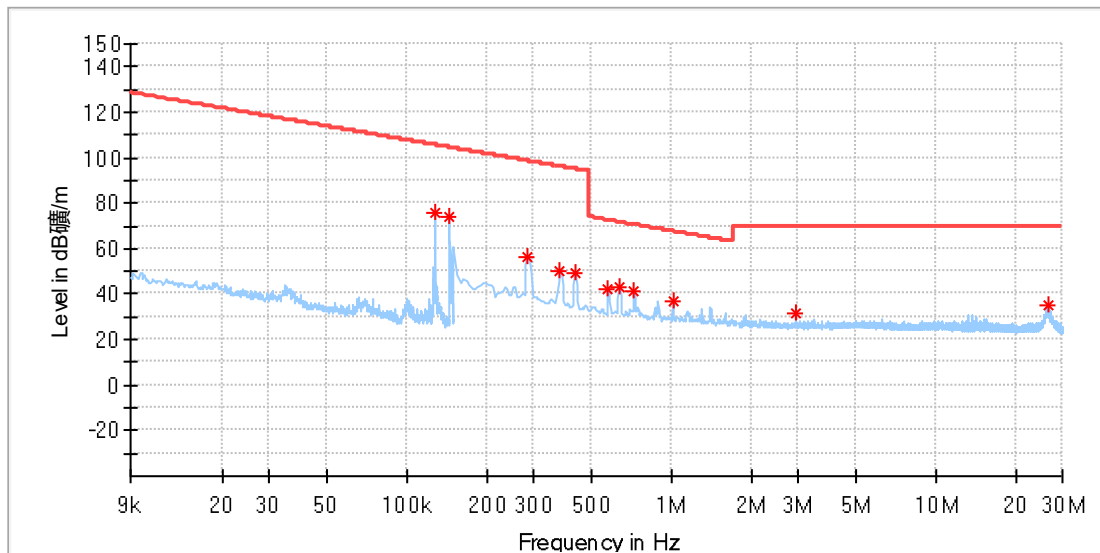

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127641	75.53	105.48	29.94	100.0	Z	30.0	19.9
0.145166	73.66	104.36	30.70	100.0	Z	289.0	19.9
0.286081	56.33	98.47	42.14	100.0	Z	319.0	19.9
0.378265	50.19	96.05	45.86	100.0	Z	41.0	19.9
0.435331	49.36	94.83	45.47	100.0	Z	305.0	19.9
0.575802	42.45	72.40	29.95	100.0	Z	319.0	19.9
0.632868	42.90	71.58	28.69	100.0	Z	265.0	19.9
0.720662	41.06	70.46	29.40	100.0	Z	308.0	19.9
1.014772	36.62	67.49	30.87	100.0	Z	312.0	19.9
2.928684	31.43	69.50	38.07	100.0	Z	337.0	20.0
26.439949	35.41	69.50	34.09	100.0	Z	163.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

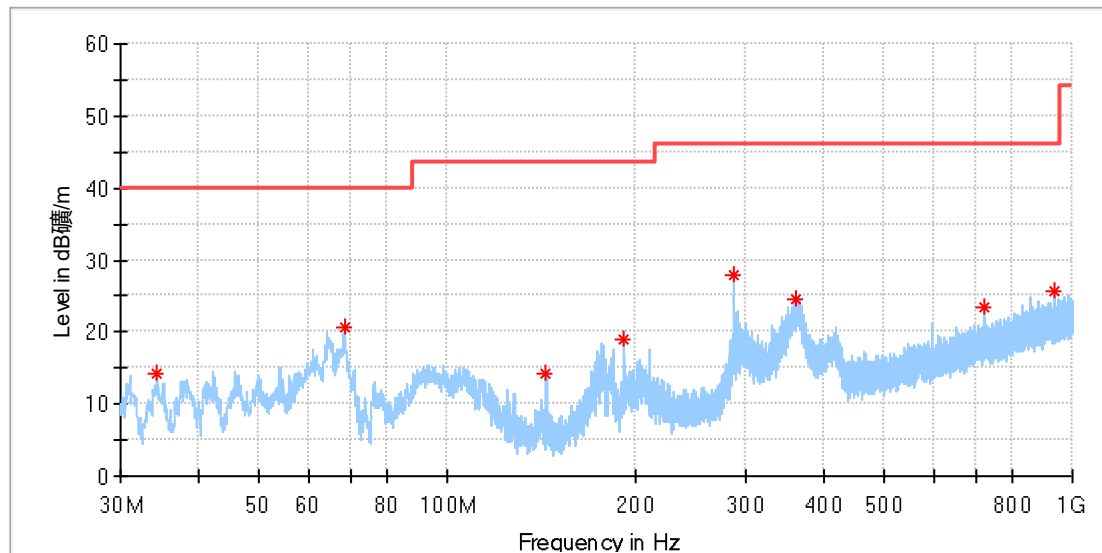

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.311111	14.14	40.00	25.86	100.0	H	105.0	-22.2
68.584444	20.75	40.00	19.25	100.0	H	354.0	-21.5
143.975000	14.35	43.50	29.15	100.0	H	358.0	-22.4
191.990000	18.87	43.50	24.63	100.0	H	334.0	-19.5
288.020000	27.79	46.00	18.21	100.0	H	142.0	-16.6
361.255000	24.69	46.00	21.31	100.0	H	134.0	-14.6
721.017222	23.43	46.00	22.57	100.0	H	275.0	-7.5
936.842222	25.57	46.00	20.43	100.0	H	254.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

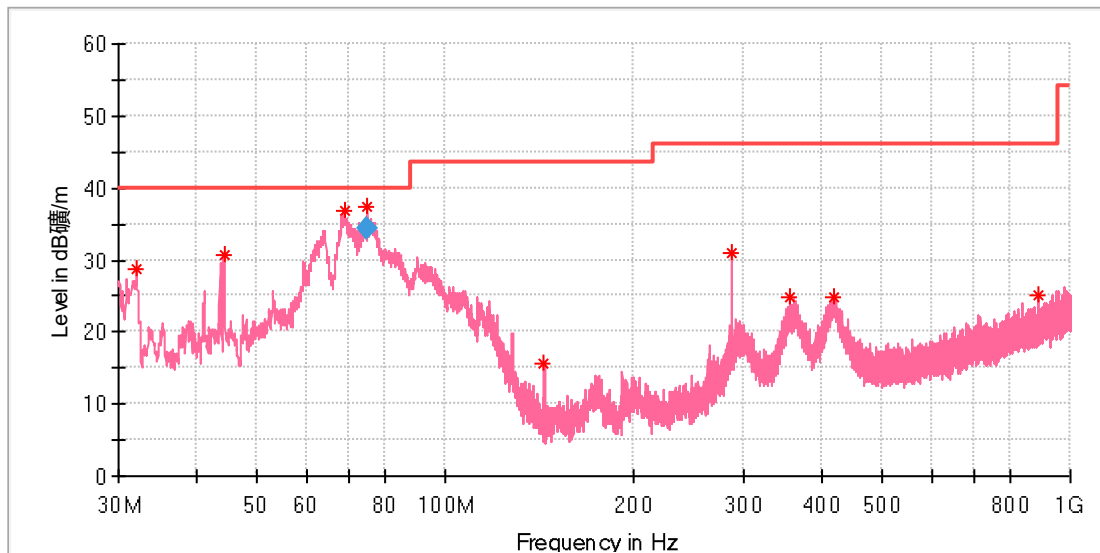

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.047778	28.61	40.00	11.39	100.0	V	142.0	-22.7
44.226667	30.58	40.00	9.42	100.0	V	107.0	-19.1
68.853889	36.92	40.00	3.08	100.0	V	107.0	-21.6
75.105000	37.36	40.00	2.64	100.0	V	290.0	-23.5
143.975000	15.76	43.50	27.74	100.0	V	231.0	-22.4
288.020000	31.04	46.00	14.96	100.0	V	231.0	-16.6
355.542778	24.97	46.00	21.03	100.0	V	113.0	-14.7
419.077778	24.78	46.00	21.22	100.0	V	23.0	-13.3
891.467778	25.08	46.00	20.92	100.0	V	356.0	-4.9


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
75.090794	34.37	40.00	5.63	100.0	V	288.0	-23.5

Wireless charging (10W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Charging
Order No/Sample No:	168583432/A004130853-002
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

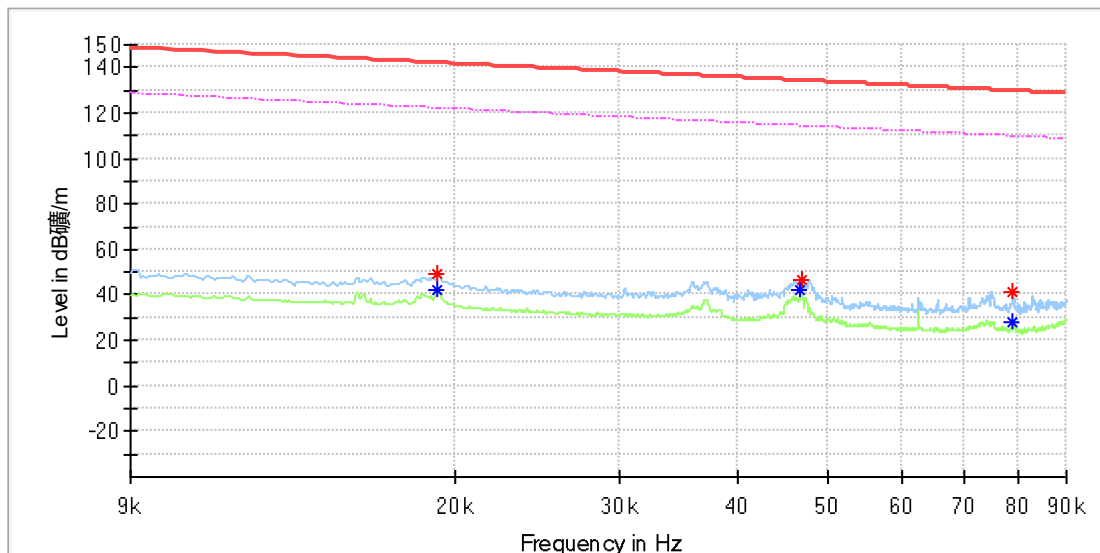


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.17	---	141.93	92.76	100.0	X	301.0	20.0
0.019183	---	41.93	121.93	80.00	100.0	X	301.0	20.0
0.046723	---	42.05	114.20	72.15	100.0	X	75.0	20.0
0.047012	46.95	---	134.15	87.20	100.0	X	69.0	20.0
0.078834	41.56	---	129.66	88.10	100.0	X	347.0	20.0
0.078834	---	27.66	109.66	82.01	100.0	X	347.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

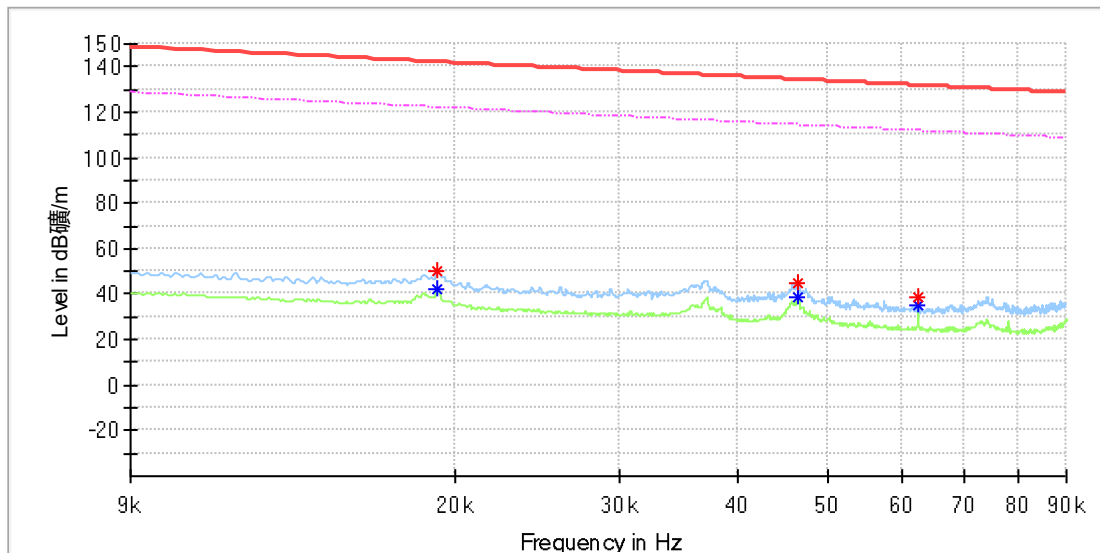


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.88	---	141.93	92.05	100.0	Y	49.0	20.0
0.019183	---	41.92	121.93	80.01	100.0	Y	49.0	20.0
0.046491	---	39.00	114.25	75.24	100.0	Y	49.0	20.0
0.046491	44.76	---	134.25	89.49	100.0	Y	49.0	20.0
0.062460	39.07	---	131.68	92.61	100.0	Y	25.0	20.0
0.062518	---	34.98	111.67	76.70	100.0	Y	25.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

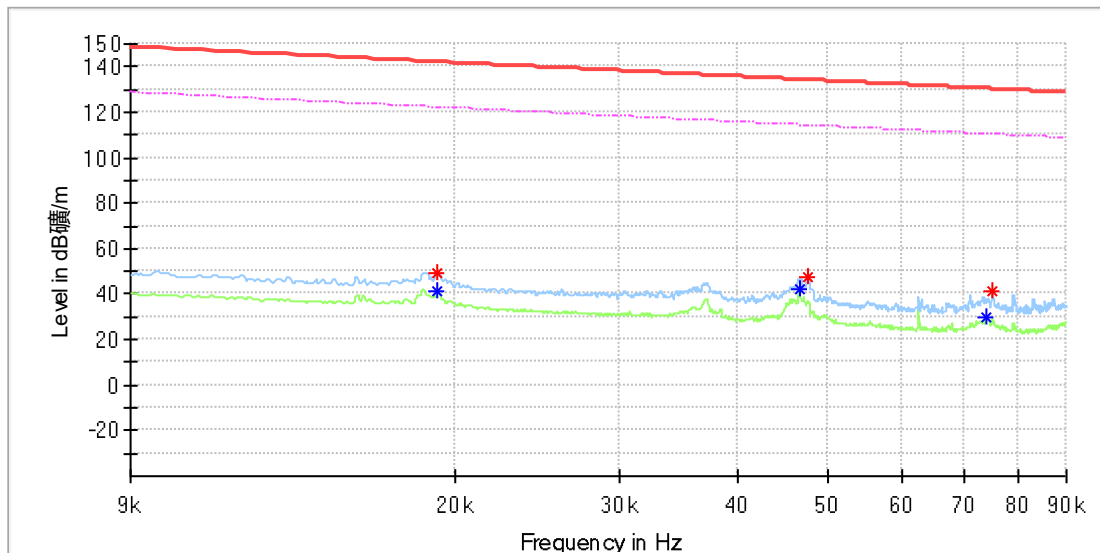


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.40	---	141.93	92.53	100.0	Z	347.0	20.0
0.019183	---	41.48	121.93	80.45	100.0	Z	347.0	20.0
0.046607	---	41.85	114.22	72.37	100.0	Z	36.0	20.0
0.047591	47.45	---	134.04	86.60	100.0	Z	43.0	20.0
0.073974	---	30.08	110.21	80.13	100.0	Z	22.0	20.0
0.074957	41.71	---	130.10	88.39	100.0	Z	359.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

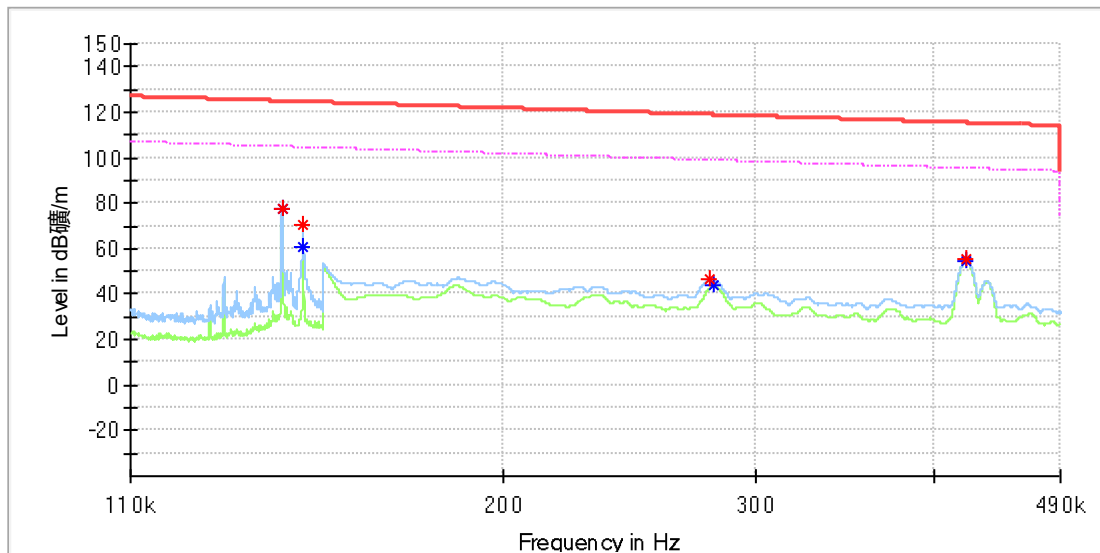


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.140372	---	77.46	104.65	27.19	100.0	X	338.0	20.0
0.140372	77.57	---	124.65	47.08	100.0	X	338.0	20.0
0.145143	---	60.49	104.36	43.87	100.0	X	81.0	20.0
0.145143	70.10	---	124.36	54.26	100.0	X	81.0	20.0
0.279300	46.59	---	118.68	72.09	100.0	X	73.0	20.0
0.280600	---	43.77	98.64	54.87	100.0	X	244.0	20.0
0.421150	---	54.82	95.11	40.29	100.0	X	325.0	20.0
0.421300	55.24	---	115.11	59.87	100.0	X	325.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

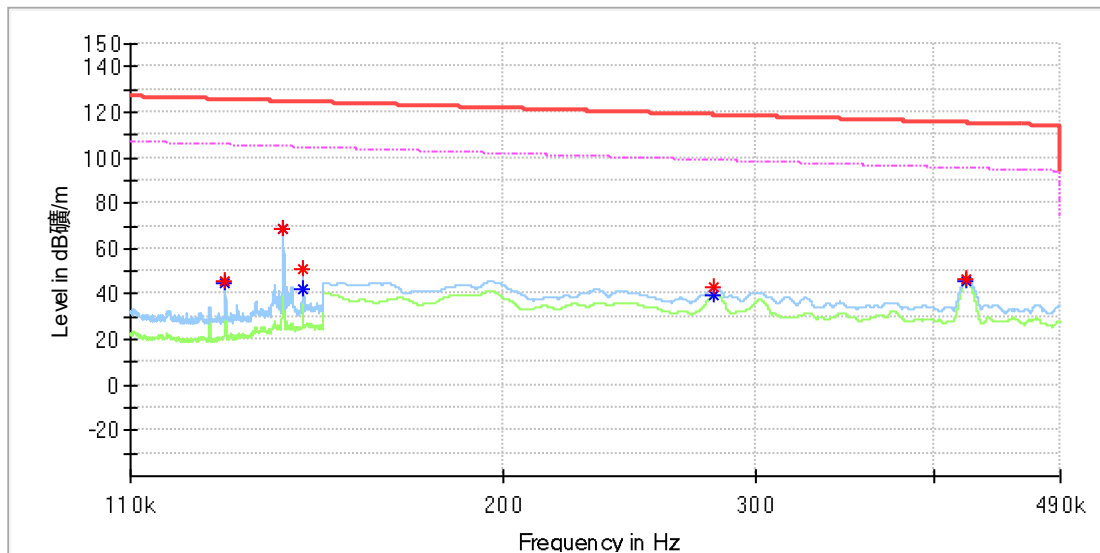


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128029	45.80	---	125.45	79.65	100.0	Y	70.0	20.0
0.128029	---	44.89	105.45	60.56	100.0	Y	70.0	20.0
0.140572	---	68.54	104.64	36.10	100.0	Y	50.0	20.0
0.140572	68.78	---	124.64	55.86	100.0	Y	50.0	20.0
0.145143	51.43	---	124.36	72.93	100.0	Y	164.0	20.0
0.145143	---	41.93	104.36	62.44	100.0	Y	164.0	20.0
0.280300	42.64	---	118.65	76.01	100.0	Y	359.0	20.0
0.281100	---	39.93	98.62	58.69	100.0	Y	359.0	20.0
0.421300	46.60	---	115.11	68.51	100.0	Y	40.0	20.0
0.421700	---	45.82	95.10	49.29	100.0	Y	62.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

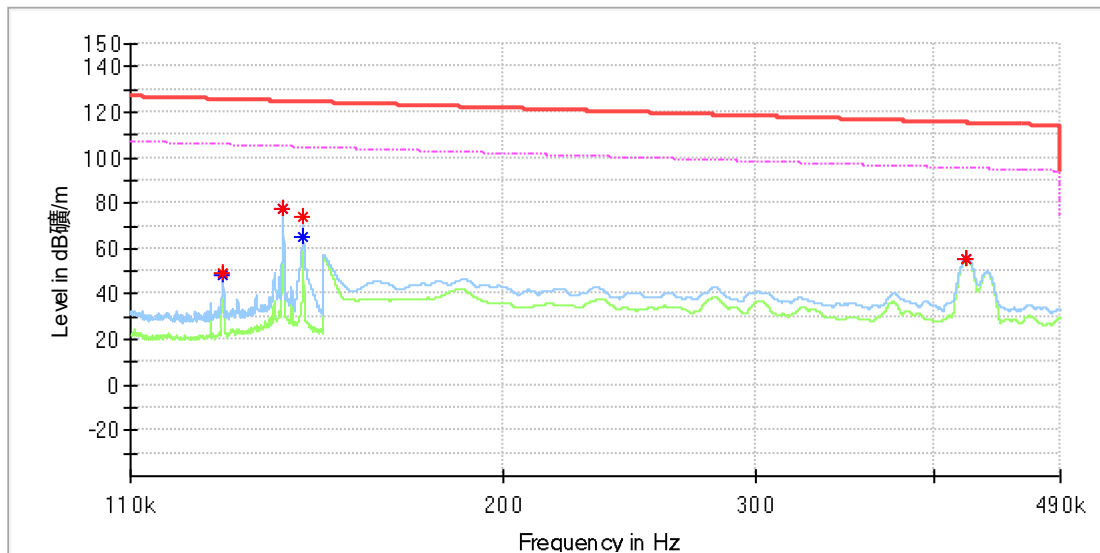


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127543	49.10	---	125.48	76.38	100.0	Z	73.0	20.0
0.127572	---	48.14	105.48	57.35	100.0	Z	73.0	20.0
0.140543	---	77.48	104.64	27.16	100.0	Z	0.0	20.0
0.140543	77.61	---	124.64	47.04	100.0	Z	0.0	20.0
0.145143	74.33	---	124.36	50.04	100.0	Z	107.0	20.0
0.145143	---	64.89	104.36	39.47	100.0	Z	107.0	20.0
0.421550	---	55.48	95.11	39.63	100.0	Z	4.0	20.0
0.421700	55.86	---	115.10	59.25	100.0	Z	4.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

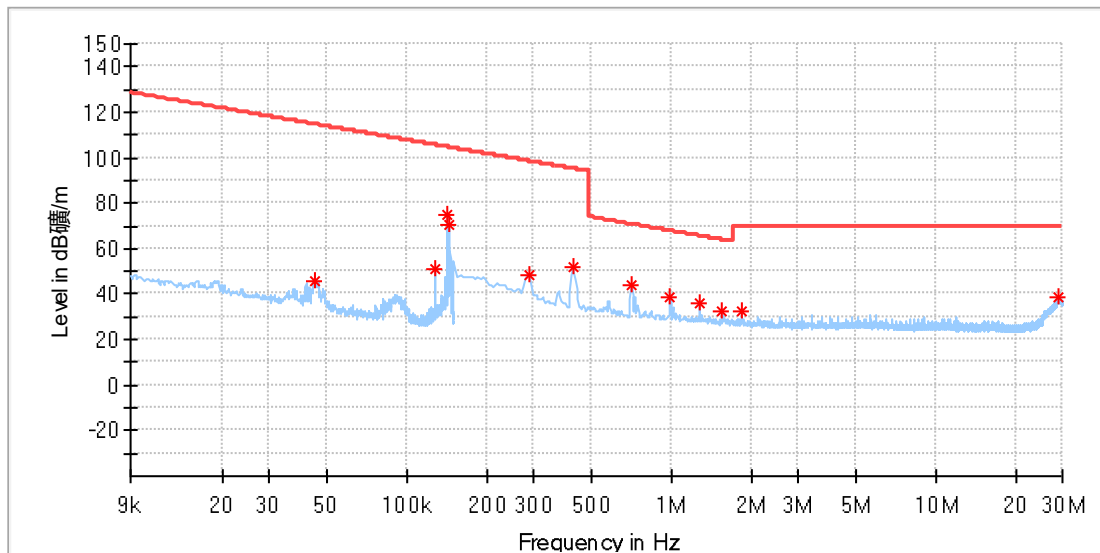

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.045056	46.15	114.52	68.37	100.0	X	82.0	19.9
0.127138	50.77	105.51	54.75	100.0	X	39.0	19.9
0.141641	74.60	104.57	29.98	100.0	X	46.0	19.9
0.145166	70.21	104.36	34.15	100.0	X	287.0	19.9
0.290471	48.72	98.34	49.62	100.0	X	73.0	19.9
0.422162	51.48	95.09	43.61	100.0	X	358.0	19.9
0.707493	43.89	70.62	26.73	100.0	X	40.0	19.9
0.988434	38.72	67.72	29.00	100.0	X	63.0	19.9
1.273765	35.80	65.53	29.72	100.0	X	40.0	19.9
1.559096	32.85	63.78	30.93	100.0	X	54.0	20.0
1.840037	32.10	69.50	37.40	100.0	X	54.0	20.0
28.959640	38.51	69.50	30.99	100.0	X	167.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

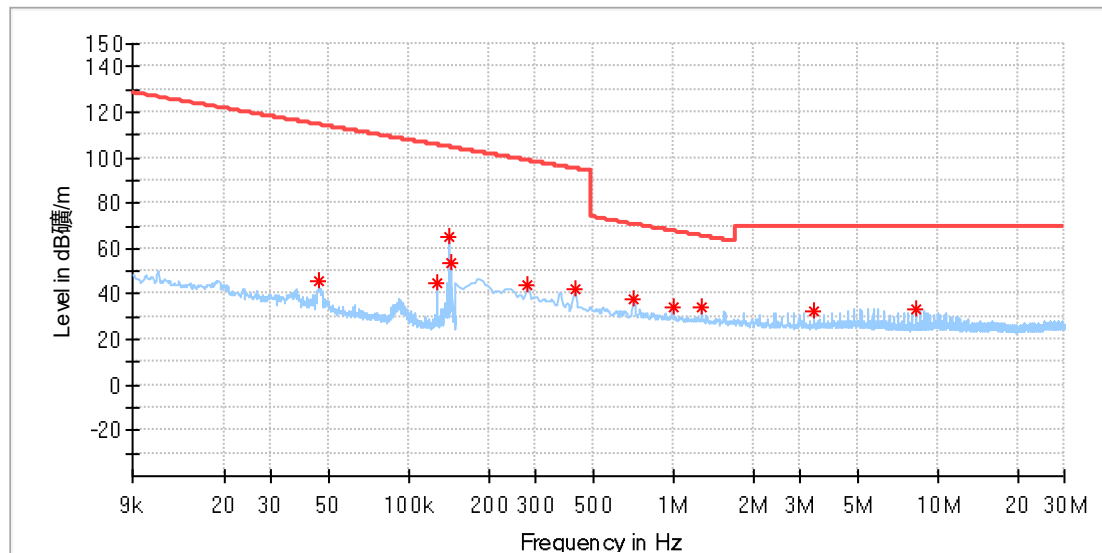

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.045761	45.88	114.38	68.51	100.0	Y	44.0	19.9
0.126936	45.18	105.53	60.34	100.0	Y	86.0	19.9
0.141943	64.94	104.56	39.62	100.0	Y	335.0	19.9
0.145166	53.76	104.36	50.60	100.0	Y	17.0	19.9
0.281691	43.66	98.61	54.94	100.0	Y	150.0	19.9
0.422162	41.75	95.09	53.34	100.0	Y	118.0	19.9
0.707493	38.05	70.62	32.57	100.0	Y	136.0	19.9
0.992824	34.20	67.68	33.48	100.0	Y	143.0	19.9
1.273765	34.37	65.53	31.16	100.0	Y	143.0	19.9
3.402772	32.63	69.50	36.87	100.0	Y	16.0	20.1
8.231449	33.10	69.50	36.40	100.0	Y	59.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

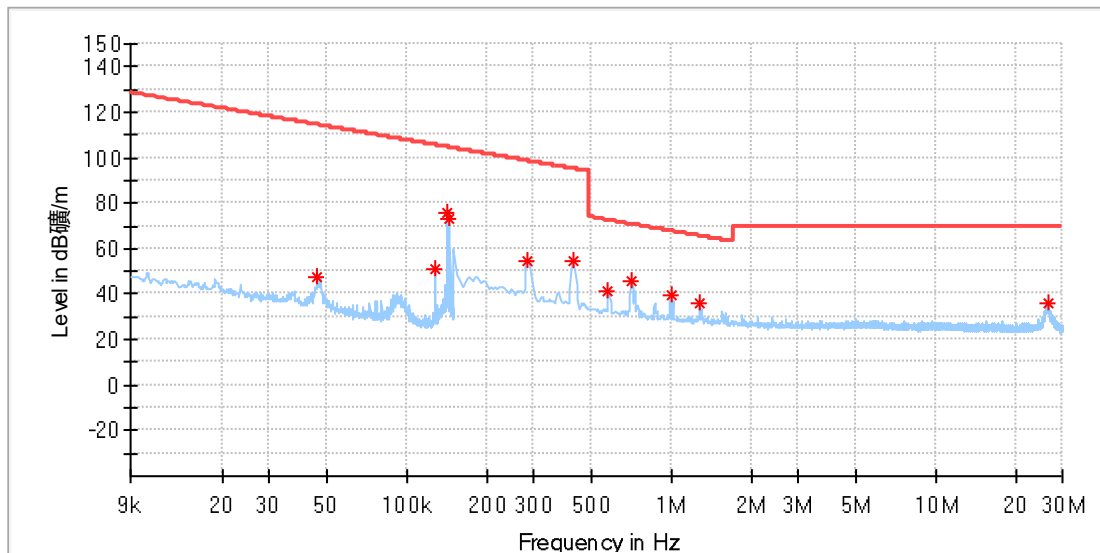

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.045660	47.21	114.40	67.19	100.0	Z	77.0	19.9
0.126836	50.85	105.53	54.68	100.0	Z	49.0	19.9
0.141741	76.05	104.57	28.51	100.0	Z	22.0	19.9
0.145166	73.37	104.36	30.99	100.0	Z	283.0	19.9
0.286081	54.81	98.47	43.66	100.0	Z	149.0	19.9
0.422162	54.48	95.09	40.61	100.0	Z	45.0	19.9
0.575802	41.65	72.40	30.75	100.0	Z	244.0	19.9
0.707493	45.93	70.62	24.69	100.0	Z	16.0	19.9
0.992824	39.93	67.68	27.75	100.0	Z	9.0	19.9
1.273765	35.59	65.53	29.94	100.0	Z	38.0	19.9
26.365324	36.28	69.50	33.22	100.0	Z	88.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

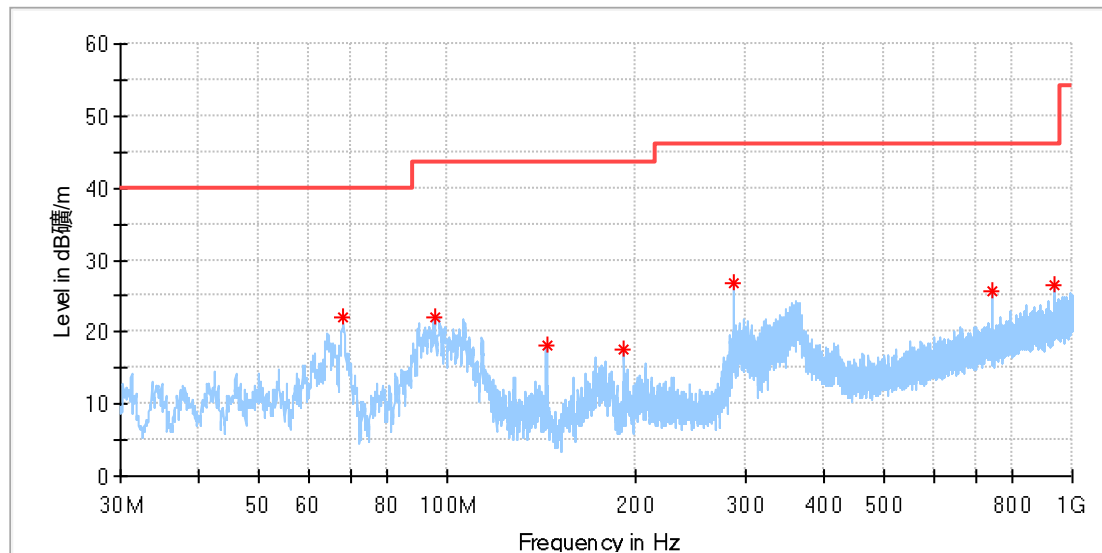

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
67.883889	22.04	40.00	17.96	100.0	H	267.0	-21.2
95.528889	22.03	43.50	21.47	100.0	H	283.0	-19.8
144.028889	18.04	43.50	25.46	100.0	H	343.0	-22.4
191.990000	17.55	43.50	25.95	100.0	H	357.0	-19.5
288.020000	26.69	46.00	19.31	100.0	H	125.0	-16.6
742.518889	25.81	46.00	20.19	100.0	H	0.0	-7.2
938.458889	26.48	46.00	19.52	100.0	H	69.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

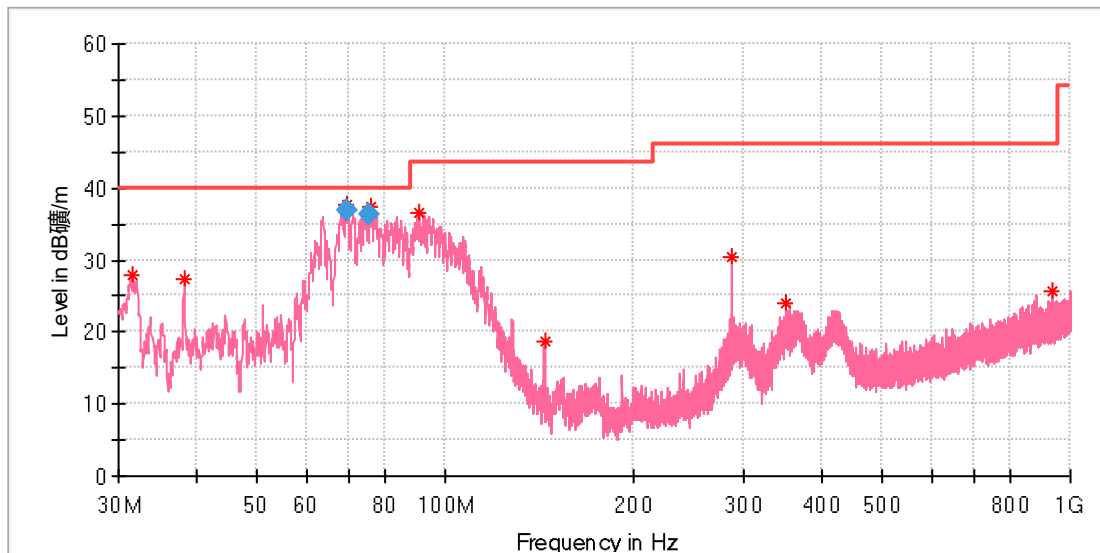

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.616667	27.89	40.00	12.11	100.0	V	190.0	-22.8
38.245000	27.45	40.00	12.55	100.0	V	327.0	-20.7
69.446667	37.74	40.00	2.26	100.0	V	198.0	-21.8
75.805556	37.50	40.00	2.50	100.0	V	177.0	-23.5
90.732778	36.49	43.50	7.01	100.0	V	0.0	-20.9
144.028889	18.79	43.50	24.71	100.0	V	241.0	-22.4
288.020000	30.55	46.00	15.45	100.0	V	256.0	-16.6
350.046111	24.02	46.00	21.98	100.0	V	94.0	-14.9
938.458889	25.56	46.00	20.44	100.0	V	283.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
69.488045	36.72	40.00	3.28	100.0	V	203.0	-21.8
75.764223	36.42	40.00	3.58	100.0	V	175.0	-23.5

Wireless charging (15W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Charging
Order No/Sample No:	168583432/A004130853-002
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

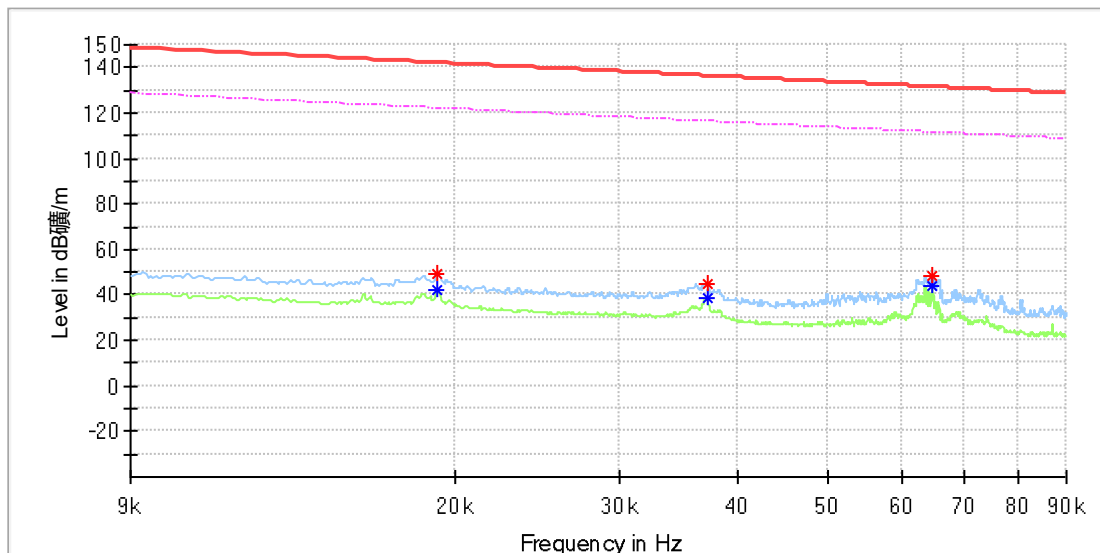


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	49.30	---	141.96	92.66	100.0	X	92.0	20.0
0.019183	---	42.14	121.93	79.79	100.0	X	92.0	20.0
0.037176	45.17	---	136.19	91.02	100.0	X	0.0	20.0
0.037176	---	38.50	116.19	77.69	100.0	X	0.0	20.0
0.064716	---	44.28	111.37	67.09	100.0	X	92.0	20.0
0.064832	47.97	---	131.36	83.39	100.0	X	9.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

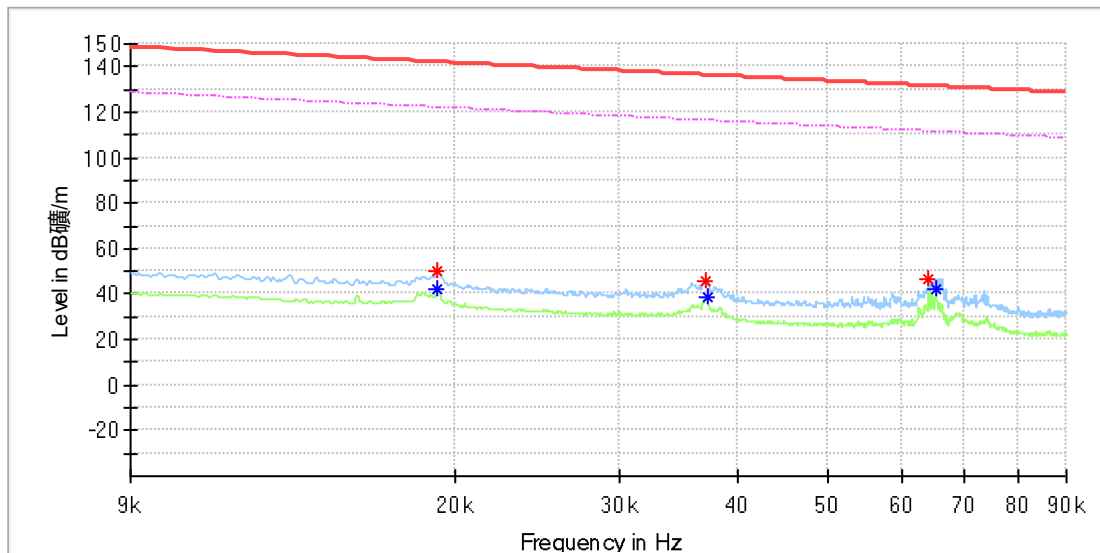


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.85	---	141.93	92.08	100.0	Y	181.0	20.0
0.019183	---	42.29	121.93	79.64	100.0	Y	181.0	20.0
0.037003	45.62	---	136.23	90.60	100.0	Y	289.0	20.0
0.037176	---	38.25	116.19	77.93	100.0	Y	181.0	20.0
0.064196	46.94	---	131.44	84.50	100.0	Y	46.0	20.0
0.065295	---	41.80	111.30	69.50	100.0	Y	46.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

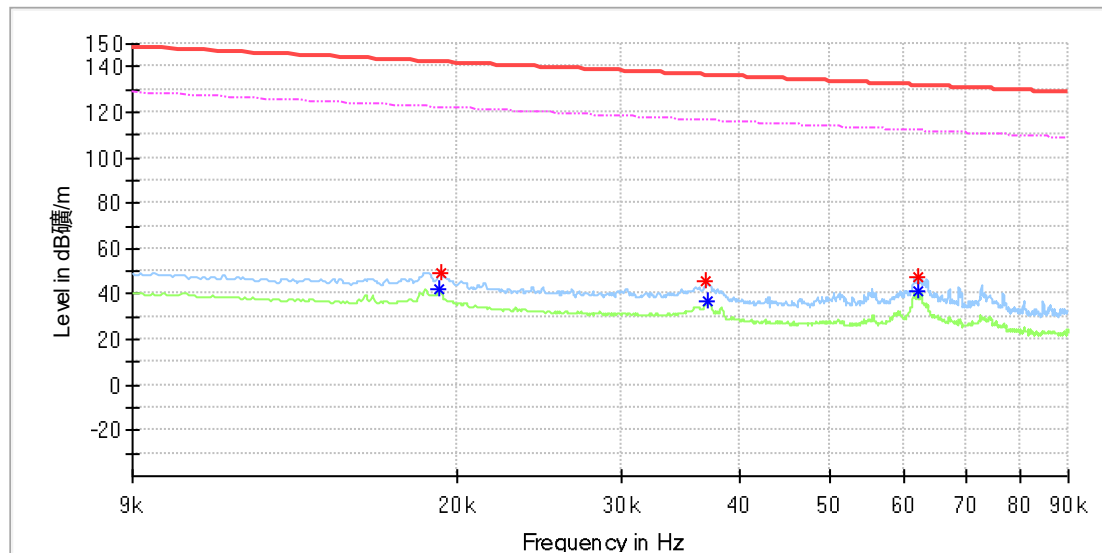


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	42.37	121.93	79.56	100.0	Z	302.0	20.0
0.019241	49.38	---	141.90	92.53	100.0	Z	351.0	20.0
0.036945	45.77	---	136.24	90.47	100.0	Z	60.0	20.0
0.037061	---	37.06	116.21	79.16	100.0	Z	60.0	20.0
0.062055	47.59	---	131.74	84.15	100.0	Z	41.0	20.0
0.062113	---	41.47	111.73	70.26	100.0	Z	41.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

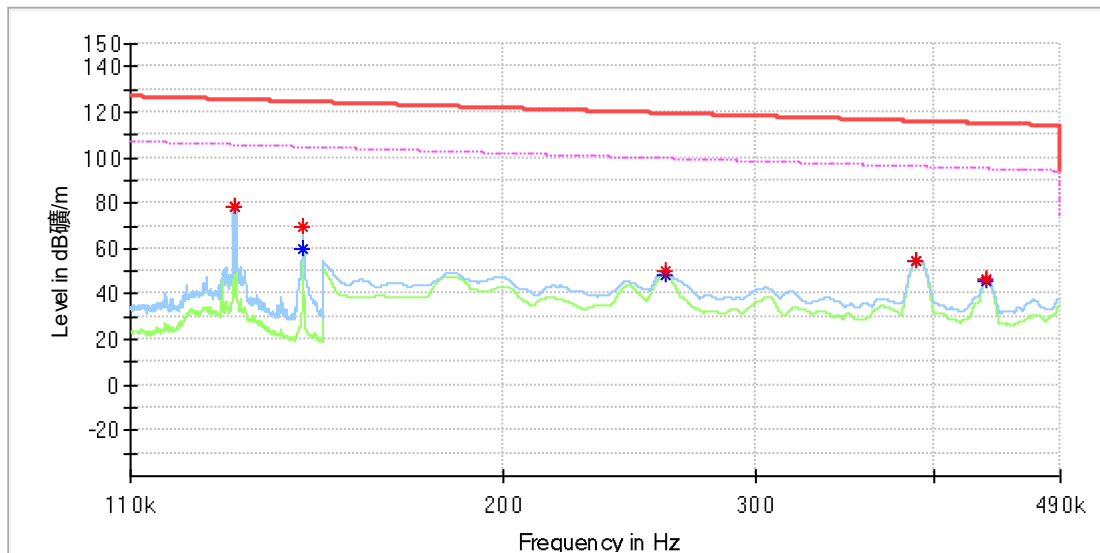


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130257	---	78.26	105.30	27.04	100.0	X	341.0	20.0
0.130257	78.45	---	125.30	46.85	100.0	X	341.0	20.0
0.145143	---	60.19	104.36	44.17	100.0	X	92.0	20.0
0.145143	69.79	---	124.36	54.57	100.0	X	92.0	20.0
0.259450	50.19	---	119.32	69.13	100.0	X	271.0	20.0
0.259450	---	48.40	99.32	50.92	100.0	X	271.0	20.0
0.389000	54.92	---	115.80	60.88	100.0	X	353.0	20.0
0.389000	---	54.35	95.80	41.45	100.0	X	353.0	20.0
0.435500	---	45.54	94.82	49.29	100.0	X	63.0	20.0
0.435550	46.84	---	114.82	67.98	100.0	X	63.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

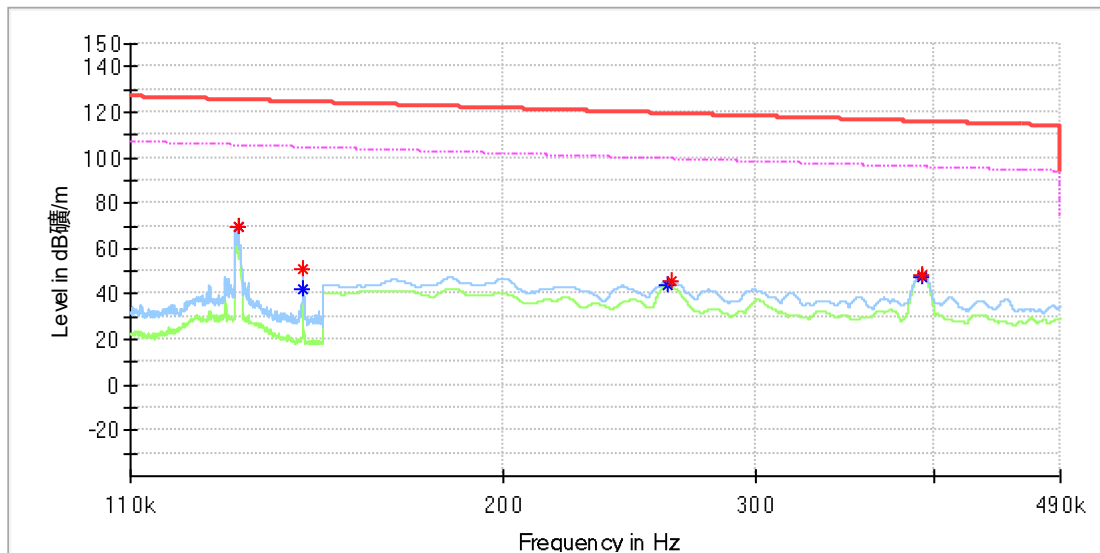


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130886	69.89	---	125.26	55.37	100.0	Y	59.0	20.0
0.130886	---	69.65	105.26	35.61	100.0	Y	59.0	20.0
0.145143	51.46	---	124.36	72.90	100.0	Y	183.0	20.0
0.145143	---	41.80	104.36	62.57	100.0	Y	183.0	20.0
0.260400	---	43.72	99.29	55.57	100.0	Y	128.0	20.0
0.262400	45.82	---	119.22	73.40	100.0	Y	19.0	20.0
0.392800	---	47.58	95.72	48.14	100.0	Y	78.0	20.0
0.393000	48.47	---	115.72	67.25	100.0	Y	78.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

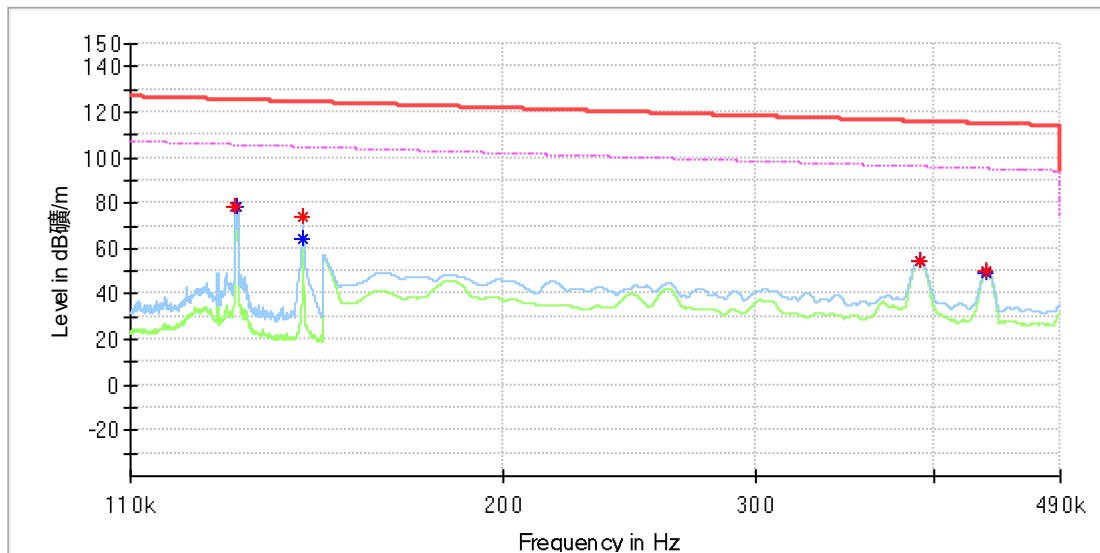


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130229	78.24	---	125.30	47.07	100.0	Z	0.0	20.0
0.130286	---	78.08	105.30	27.22	100.0	Z	346.0	20.0
0.145143	---	64.66	104.36	39.71	100.0	Z	126.0	20.0
0.145143	74.25	---	124.36	50.11	100.0	Z	126.0	20.0
0.390600	---	54.56	95.77	41.20	100.0	Z	359.0	20.0
0.390700	54.95	---	115.77	60.81	100.0	Z	359.0	20.0
0.435300	---	49.33	94.83	45.50	100.0	Z	173.0	20.0
0.435400	49.89	---	114.83	64.94	100.0	Z	173.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

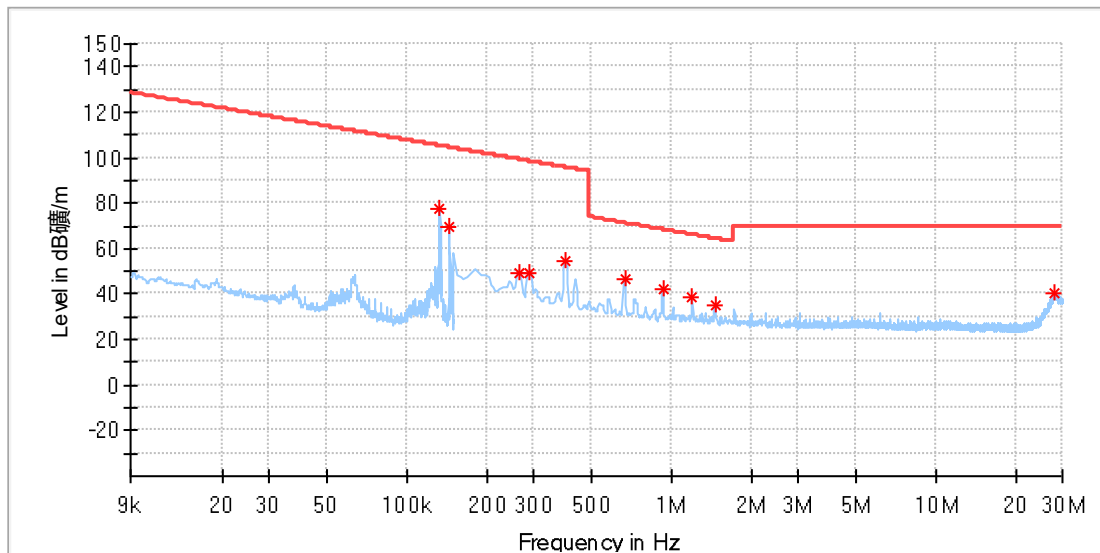

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.133080	77.54	105.12	27.58	100.0	X	43.0	19.9
0.145166	69.75	104.36	34.61	100.0	X	251.0	19.9
0.264133	49.50	99.17	49.67	100.0	X	260.0	19.9
0.290471	49.42	98.34	48.92	100.0	X	27.0	19.9
0.395824	54.80	95.65	40.86	100.0	X	66.0	19.9
0.663596	46.61	71.17	24.57	100.0	X	48.0	19.9
0.926978	42.60	68.28	25.68	100.0	X	235.0	19.9
1.194750	38.53	66.08	27.55	100.0	X	66.0	19.9
1.462522	35.23	64.33	29.10	100.0	X	48.0	20.0
28.217779	40.31	69.50	29.19	100.0	X	95.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

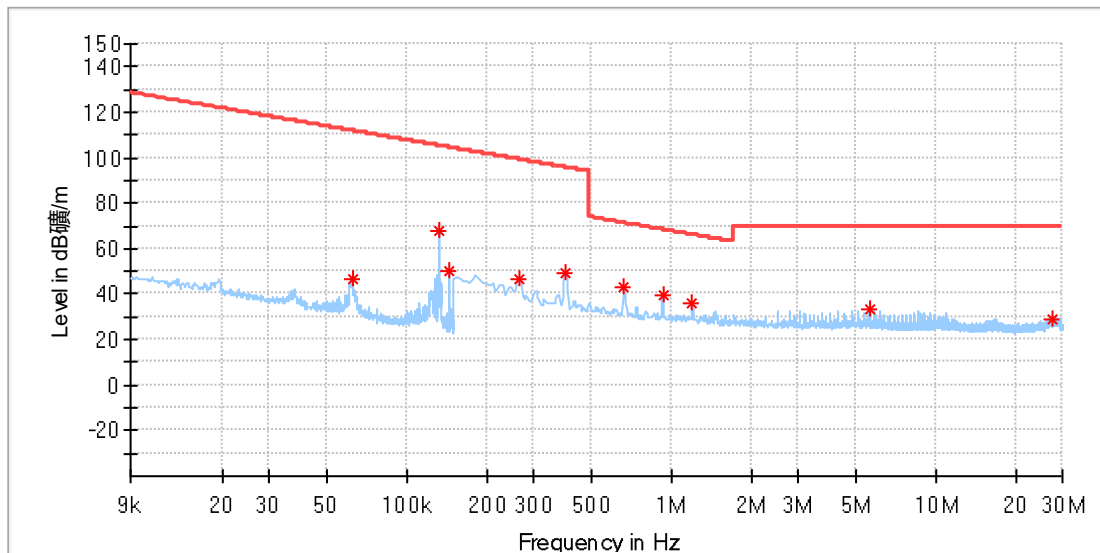

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.061875	46.76	111.76	65.01	100.0	Y	55.0	19.9
0.132375	67.75	105.16	37.41	100.0	Y	168.0	19.9
0.145166	50.48	104.36	53.88	100.0	Y	28.0	19.9
0.264133	46.74	99.17	52.43	100.0	Y	339.0	19.9
0.395824	49.52	95.65	46.13	100.0	Y	321.0	19.9
0.659206	43.22	71.23	28.01	100.0	Y	325.0	19.9
0.926978	39.61	68.28	28.66	100.0	Y	339.0	19.9
1.194750	35.57	66.08	30.51	100.0	Y	138.0	19.9
5.575677	33.23	69.50	36.27	100.0	Y	66.0	20.1
27.546154	29.28	69.50	40.22	100.0	Y	81.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

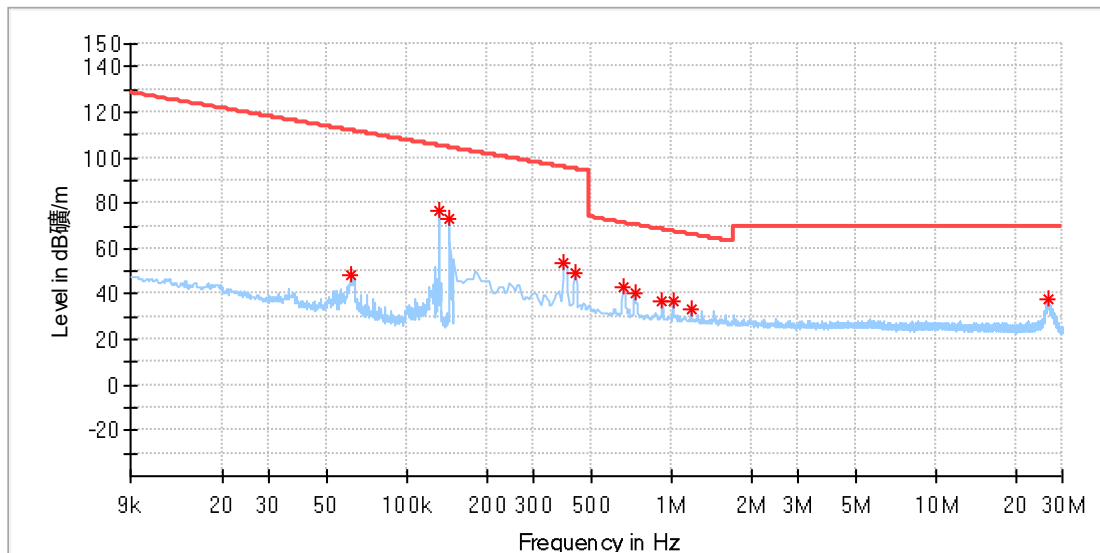

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.061573	48.54	111.81	63.27	100.0	Z	68.0	19.9
0.132274	76.31	105.17	28.86	100.0	Z	18.0	19.9
0.145166	73.16	104.36	31.21	100.0	Z	261.0	19.9
0.391434	53.48	95.75	42.27	100.0	Z	295.0	19.9
0.435331	49.05	94.83	45.78	100.0	Z	277.0	19.9
0.659206	42.64	71.23	28.59	100.0	Z	230.0	19.9
0.725052	40.70	70.41	29.70	100.0	Z	270.0	19.9
0.922588	36.52	68.32	31.80	100.0	Z	35.0	19.9
1.014772	36.81	67.49	30.69	100.0	Z	263.0	19.9
1.185971	33.63	66.14	32.51	100.0	Z	28.0	19.9
26.527743	37.84	69.50	31.66	100.0	Z	338.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

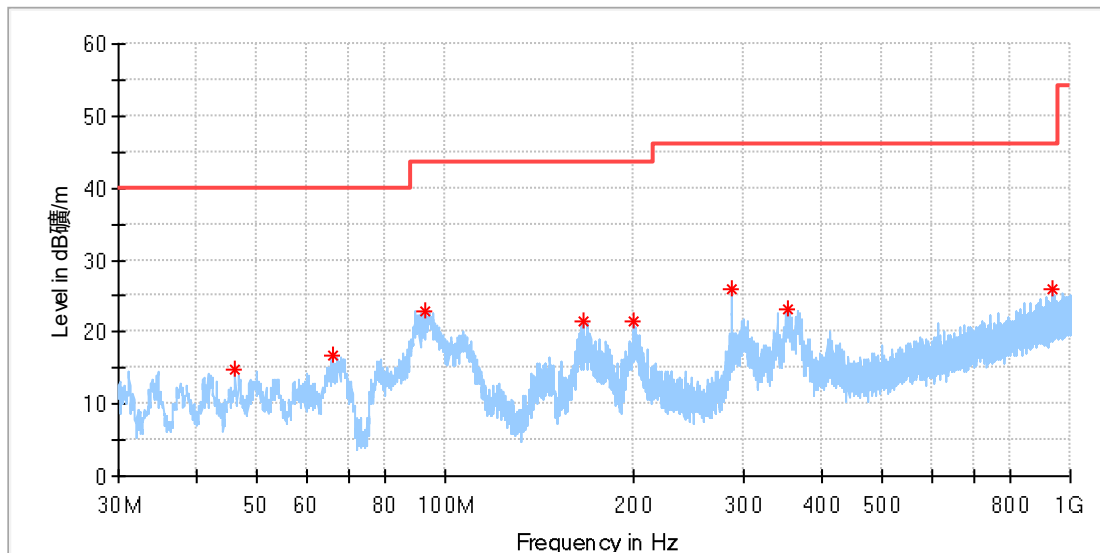

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.112778	14.70	40.00	25.30	100.0	H	164.0	-18.8
65.890000	16.78	40.00	23.22	100.0	H	207.0	-20.5
92.511111	22.91	43.50	20.59	100.0	H	80.0	-20.5
166.554444	21.39	43.50	22.11	100.0	H	0.0	-21.5
200.235000	21.56	43.50	21.94	100.0	H	346.0	-19.1
288.020000	25.86	46.00	20.14	100.0	H	148.0	-16.6
351.932222	23.13	46.00	22.87	100.0	H	303.0	-14.8
936.950000	26.00	46.00	20.00	100.0	H	103.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

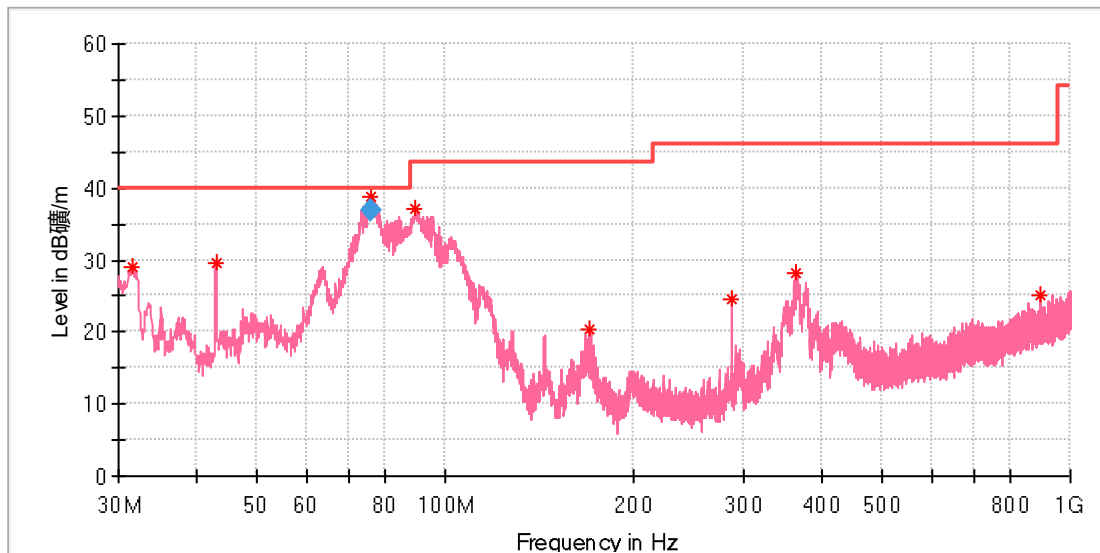

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.670556	29.01	40.00	10.99	100.0	V	266.0	-22.8
42.933333	29.63	40.00	10.37	100.0	V	16.0	-19.4
76.182778	38.80	40.00	1.20	100.0	V	112.0	-23.5
89.277778	37.17	43.50	6.33	100.0	V	179.0	-21.3
170.488333	20.32	43.50	23.18	100.0	V	257.0	-21.3
288.020000	24.46	46.00	21.54	100.0	V	257.0	-16.6
364.596111	28.06	46.00	17.94	100.0	V	298.0	-14.5
897.180000	25.23	46.00	20.77	100.0	V	166.0	-4.8


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
76.186950	36.76	40.00	3.24	100.0	V	107.0	-23.5

Wireless charging (TWS 5W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Charging
Order No/Sample No:	168583432/A004130853-002
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

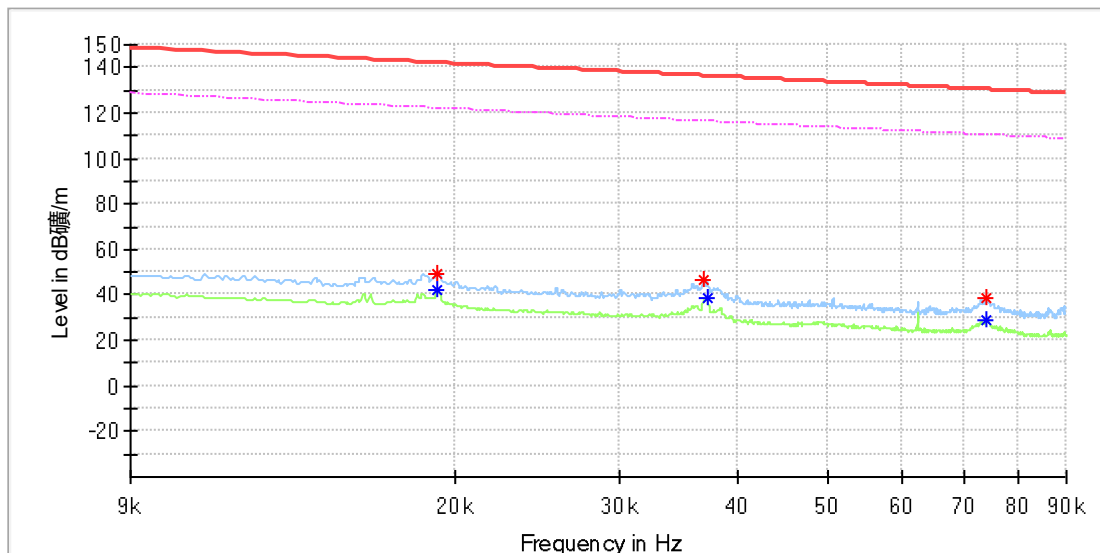


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	49.40	---	141.93	92.53	100.0	X	105.0	20.0
0.019183	---	42.15	121.93	79.78	100.0	X	105.0	20.0
0.036887	46.22	---	136.25	90.03	100.0	X	336.0	20.0
0.037176	---	38.44	116.19	77.74	100.0	X	54.0	20.0
0.073916	38.63	---	130.22	91.59	100.0	X	0.0	20.0
0.073916	---	29.31	110.22	80.91	100.0	X	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

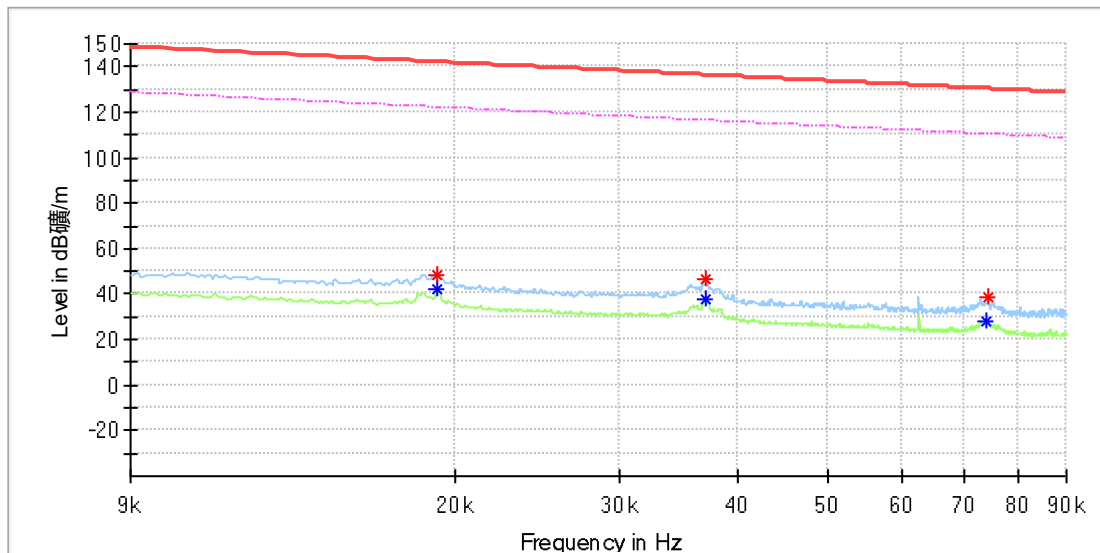


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	48.81	---	141.93	93.12	100.0	Y	232.0	20.0
0.019183	---	41.81	121.93	80.12	100.0	Y	232.0	20.0
0.037003	46.45	---	136.23	89.78	100.0	Y	342.0	20.0
0.037119	---	37.64	116.20	78.56	100.0	Y	342.0	20.0
0.073916	---	28.39	110.22	81.83	100.0	Y	323.0	20.0
0.074205	38.68	---	130.19	91.51	100.0	Y	342.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

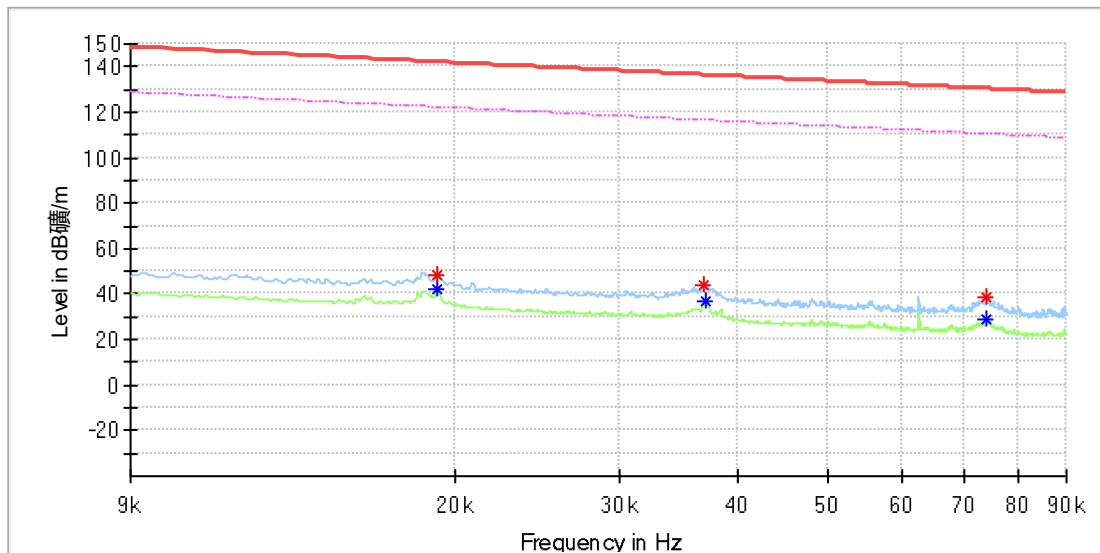


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	48.60	---	141.96	93.36	100.0	Z	129.0	20.0
0.019125	---	41.91	121.96	80.04	100.0	Z	129.0	20.0
0.036829	44.33	---	136.27	91.94	100.0	Z	152.0	20.0
0.037119	---	37.10	116.20	79.10	100.0	Z	104.0	20.0
0.074031	38.95	---	130.21	91.26	100.0	Z	0.0	20.0
0.074031	---	28.85	110.21	81.36	100.0	Z	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

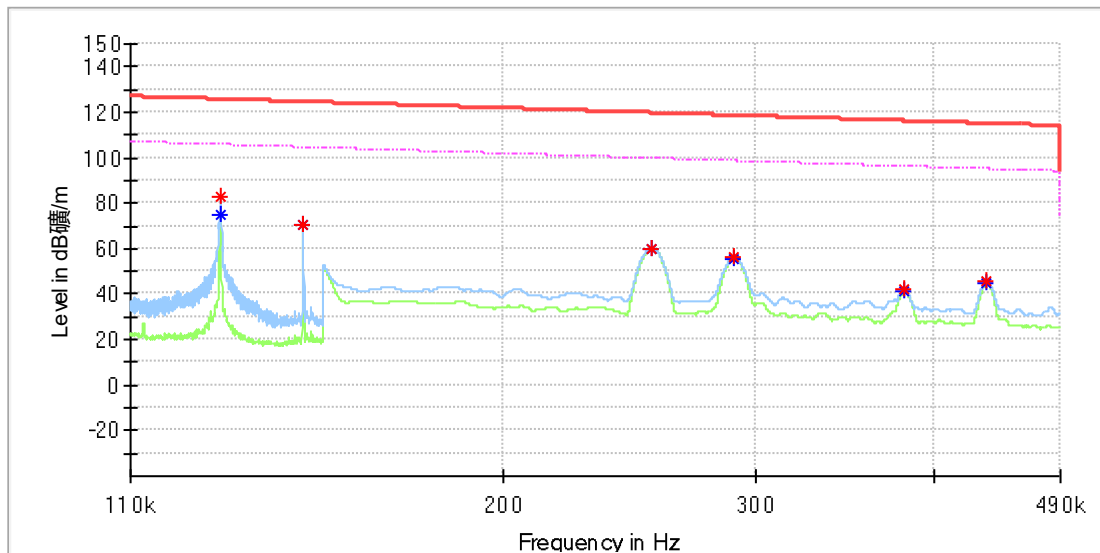


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127114	---	74.92	105.51	30.59	100.0	X	339.0	20.0
0.127114	82.63	---	125.51	42.89	100.0	X	339.0	20.0
0.145143	70.18	---	124.36	54.18	100.0	X	0.0	20.0
0.145143	---	70.04	104.36	34.32	100.0	X	0.0	20.0
0.254250	---	59.89	99.50	39.60	100.0	X	62.0	20.0
0.254350	60.29	---	119.49	59.21	100.0	X	62.0	20.0
0.290300	---	55.80	98.34	42.55	100.0	X	11.0	20.0
0.290350	56.23	---	118.34	62.11	100.0	X	11.0	20.0
0.381100	42.39	---	115.98	73.59	100.0	X	62.0	20.0
0.381500	---	40.91	95.97	55.06	100.0	X	62.0	20.0
0.435300	45.60	---	114.83	69.23	100.0	X	20.0	20.0
0.435450	---	44.75	94.83	50.07	100.0	X	20.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

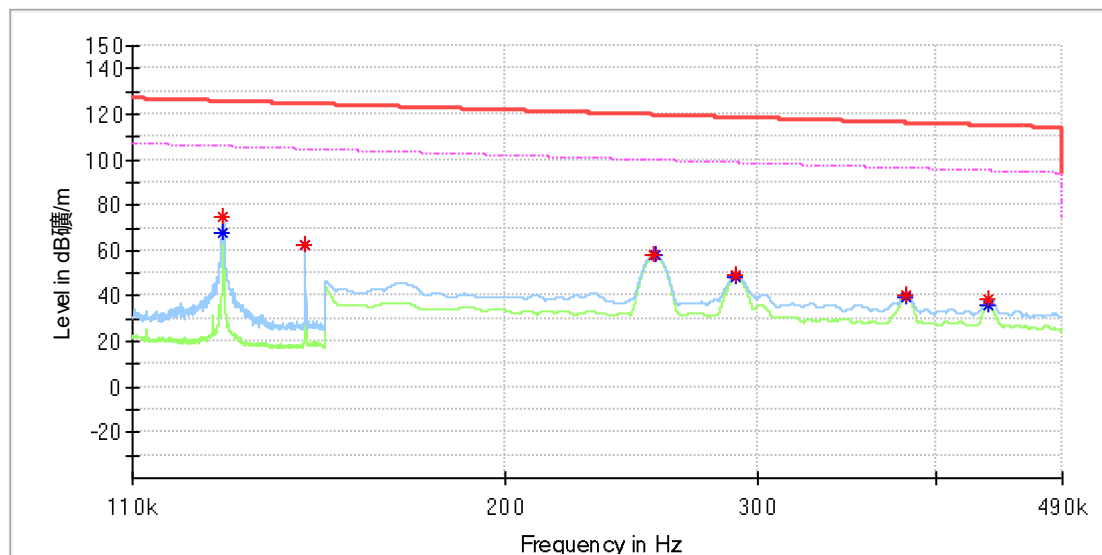


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127286	75.21	---	125.50	50.29	100.0	Y	84.0	20.0
0.127286	---	67.42	105.50	38.08	100.0	Y	84.0	20.0
0.145143	62.43	---	124.36	61.93	100.0	Y	70.0	20.0
0.145143	---	62.29	104.36	42.07	100.0	Y	70.0	20.0
0.254450	58.19	---	119.49	61.30	100.0	Y	74.0	20.0
0.254550	---	57.75	99.49	41.73	100.0	Y	74.0	20.0
0.290250	---	48.07	98.35	50.28	100.0	Y	74.0	20.0
0.290350	49.20	---	118.34	69.14	100.0	Y	74.0	20.0
0.380850	40.70	---	115.99	75.28	100.0	Y	58.0	20.0
0.381700	---	39.48	95.97	56.49	100.0	Y	58.0	20.0
0.435200	---	36.34	94.83	58.49	100.0	Y	292.0	20.0
0.435550	39.09	---	114.82	75.73	100.0	Y	292.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

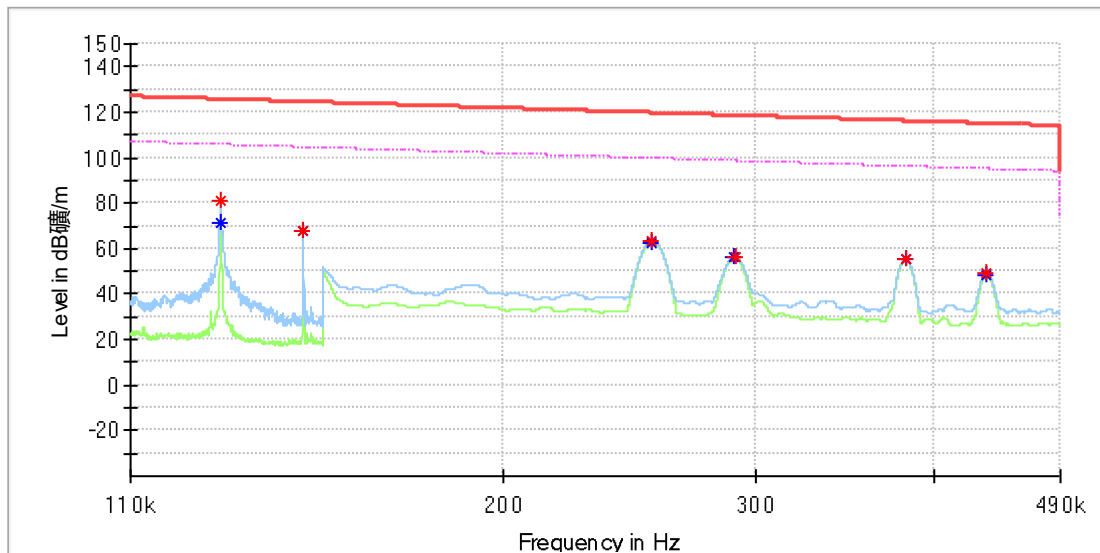


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127172	81.18	---	125.51	44.33	100.0	Z	0.0	20.0
0.127172	---	71.33	105.51	34.18	100.0	Z	0.0	20.0
0.145143	---	67.49	104.36	36.87	100.0	Z	9.0	20.0
0.145143	67.66	---	124.36	56.71	100.0	Z	9.0	20.0
0.254400	63.25	---	119.49	56.24	100.0	Z	320.0	20.0
0.254400	---	62.95	99.49	36.54	100.0	Z	320.0	20.0
0.290250	---	55.91	98.35	42.44	100.0	Z	6.0	20.0
0.290450	56.26	---	118.34	62.08	100.0	Z	6.0	20.0
0.382000	---	55.03	95.96	40.93	100.0	Z	304.0	20.0
0.382150	55.37	---	115.96	60.59	100.0	Z	304.0	20.0
0.435350	---	48.72	94.83	46.11	100.0	Z	2.0	20.0
0.435400	49.37	---	114.83	65.46	100.0	Z	2.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

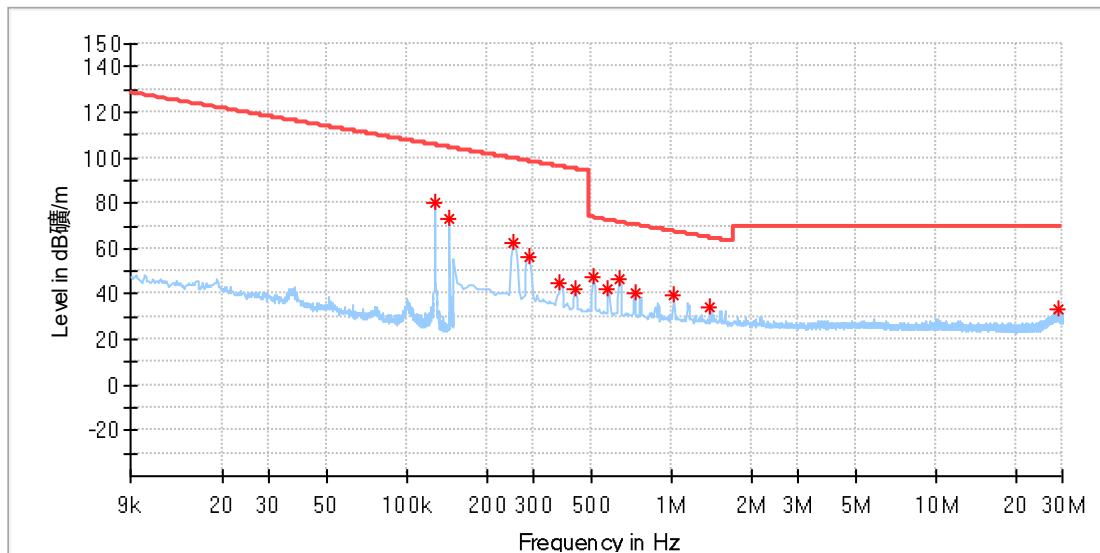

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127641	79.82	105.48	25.66	100.0	X	348.0	19.9
0.145166	73.35	104.36	31.01	100.0	X	348.0	19.9
0.250963	62.93	99.61	36.68	100.0	X	29.0	19.9
0.290471	56.30	98.34	42.04	100.0	X	329.0	19.9
0.378265	45.04	96.05	51.01	100.0	X	0.0	19.9
0.435331	41.93	94.83	52.90	100.0	X	166.0	19.9
0.509956	47.06	73.45	26.39	100.0	X	29.0	19.9
0.575802	42.49	72.40	29.91	100.0	X	336.0	19.9
0.637258	46.58	71.52	24.95	100.0	X	29.0	19.9
0.725052	40.54	70.41	29.87	100.0	X	332.0	19.9
1.019162	39.93	67.46	27.53	100.0	X	0.0	19.9
1.401066	33.94	64.70	30.76	100.0	X	72.0	19.9
29.025485	33.21	69.50	36.29	100.0	X	173.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

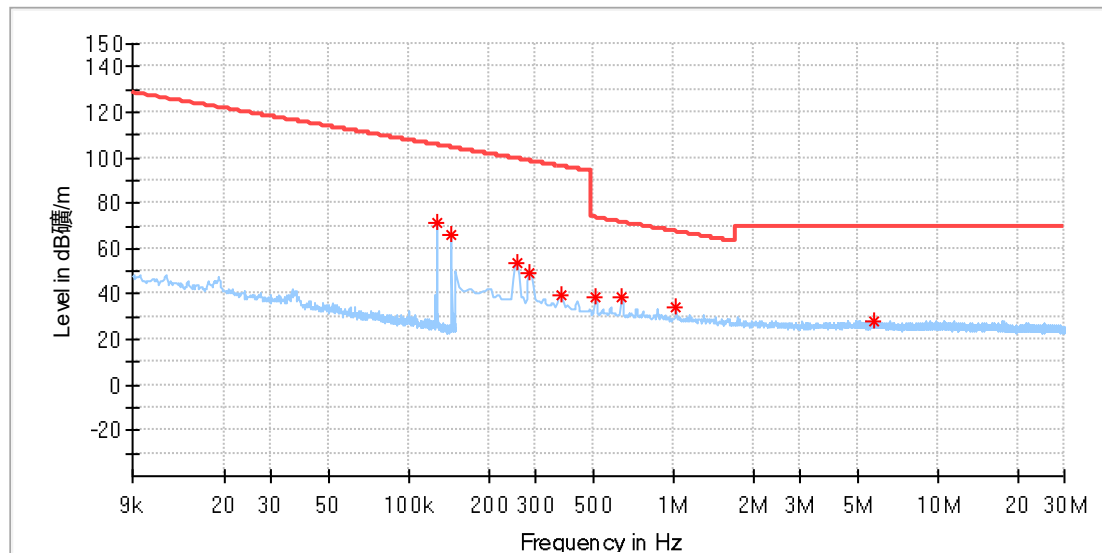

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127944	71.57	105.46	33.88	100.0	Y	107.0	19.9
0.145166	65.73	104.36	38.63	100.0	Y	85.0	19.9
0.255353	53.94	99.46	45.51	100.0	Y	301.0	19.9
0.286081	49.33	98.47	49.14	100.0	Y	66.0	19.9
0.373875	39.81	96.15	56.34	100.0	Y	75.0	19.9
0.509956	38.79	73.45	34.66	100.0	Y	301.0	19.9
0.637258	38.51	71.52	33.02	100.0	Y	301.0	19.9
1.019162	33.87	67.46	33.59	100.0	Y	301.0	19.9
5.698588	28.26	69.50	41.24	100.0	Y	276.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

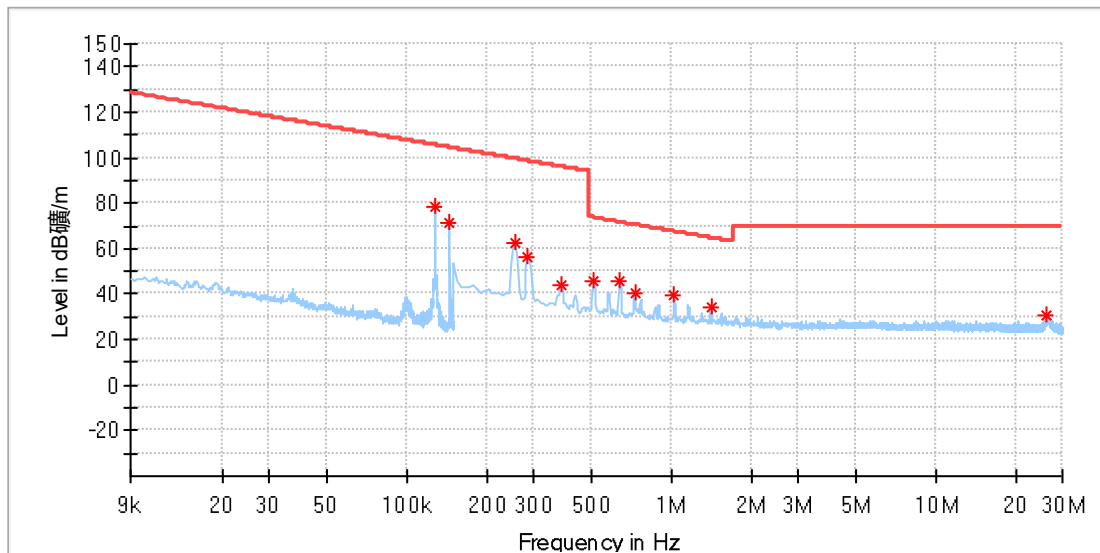

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127944	78.40	105.46	27.06	100.0	Z	60.0	19.9
0.145166	71.61	104.36	32.75	100.0	Z	341.0	19.9
0.255353	62.09	99.46	37.36	100.0	Z	0.0	19.9
0.286081	56.01	98.47	42.46	100.0	Z	336.0	19.9
0.382655	44.31	95.95	51.63	100.0	Z	329.0	19.9
0.509956	45.89	73.45	27.57	100.0	Z	36.0	19.9
0.637258	45.83	71.52	25.70	100.0	Z	0.0	19.9
0.725052	40.42	70.41	29.99	100.0	Z	47.0	19.9
1.023552	39.10	67.42	28.32	100.0	Z	0.0	19.9
1.405456	34.60	64.67	30.08	100.0	Z	0.0	19.9
26.290699	31.05	69.50	38.45	100.0	Z	22.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

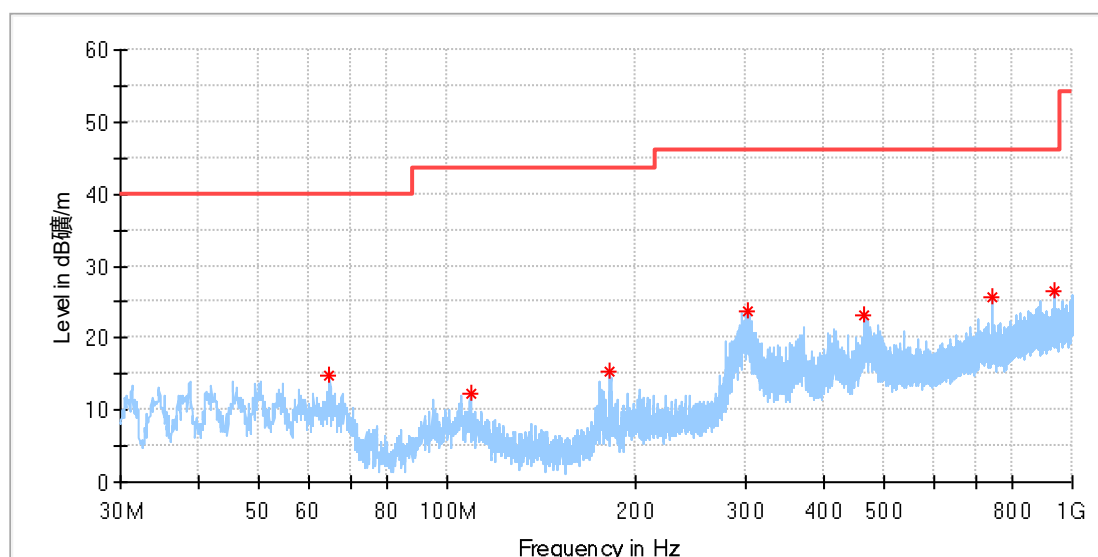

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
64.866111	14.74	40.00	25.26	100.0	H	44.0	-20.2
108.839444	12.32	43.50	31.18	100.0	H	227.0	-19.1
181.858889	15.46	43.50	28.04	100.0	H	0.0	-20.4
302.354444	23.83	46.00	22.17	100.0	H	162.0	-16.2
463.913333	23.27	46.00	22.73	100.0	H	227.0	-12.5
742.518889	25.55	46.00	20.45	100.0	H	316.0	-7.2
936.950000	26.53	46.00	19.47	100.0	H	67.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

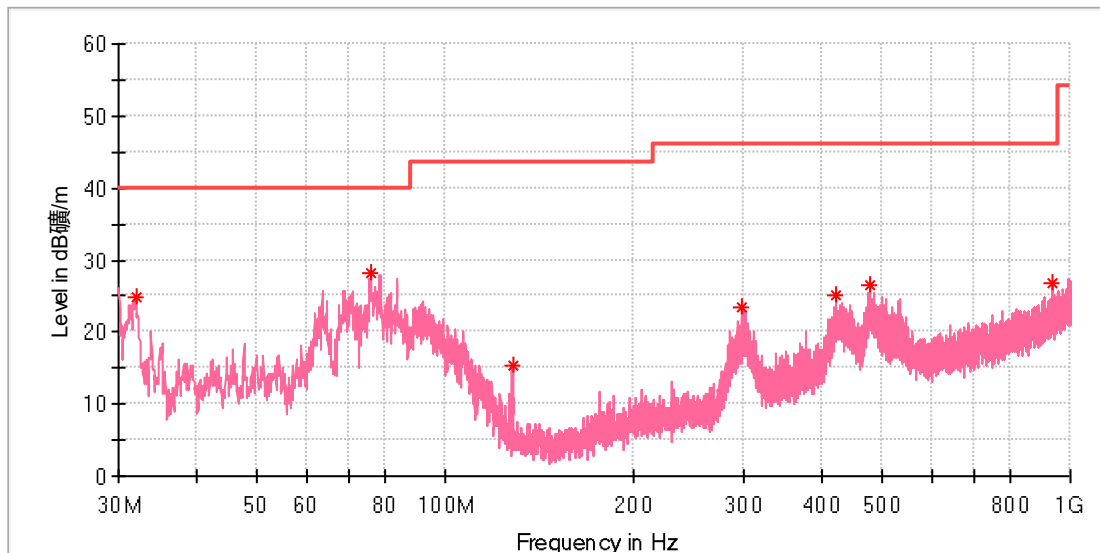

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.047778	24.88	40.00	15.12	100.0	V	241.0	-22.7
76.021111	28.12	40.00	11.88	100.0	V	22.0	-23.5
128.023889	15.44	43.50	28.06	100.0	V	258.0	-21.7
298.205000	23.51	46.00	22.49	100.0	V	202.0	-16.3
421.448889	25.04	46.00	20.96	100.0	V	45.0	-13.2
478.732778	26.39	46.00	19.61	100.0	V	187.0	-12.2
936.950000	26.80	46.00	19.20	100.0	V	89.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (Co-location)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Charging
Order No/Sample No:	168583432/A004183193-003
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

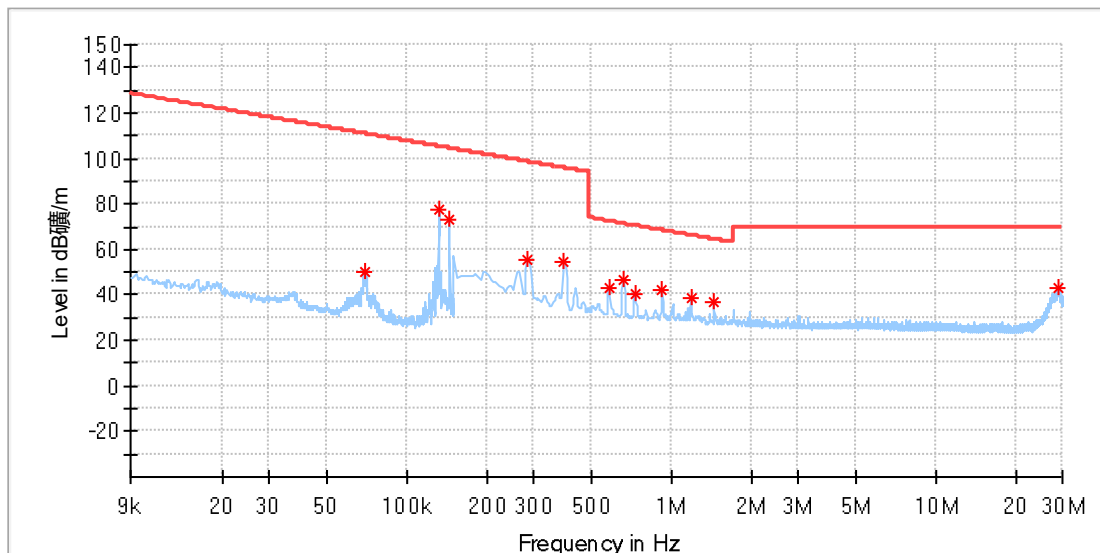

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.069630	50.38	110.74	60.36	100.0	X	79.0	19.9
0.131267	77.65	105.24	27.59	100.0	X	48.0	19.9
0.145166	73.11	104.36	31.25	100.0	X	349.0	19.9
0.286081	55.14	98.47	43.33	100.0	X	351.0	19.9
0.391434	54.97	95.75	40.78	100.0	X	41.0	19.9
0.580191	43.36	72.34	28.98	100.0	X	357.0	19.9
0.654816	46.83	71.29	24.46	100.0	X	55.0	19.9
0.725052	40.79	70.41	29.62	100.0	X	344.0	19.9
0.922588	42.27	68.32	26.05	100.0	X	45.0	19.9
1.181581	38.26	66.18	27.91	100.0	X	55.0	19.9
1.449353	37.02	64.41	27.38	100.0	X	30.0	20.0
29.025485	43.01	69.50	26.49	100.0	X	163.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

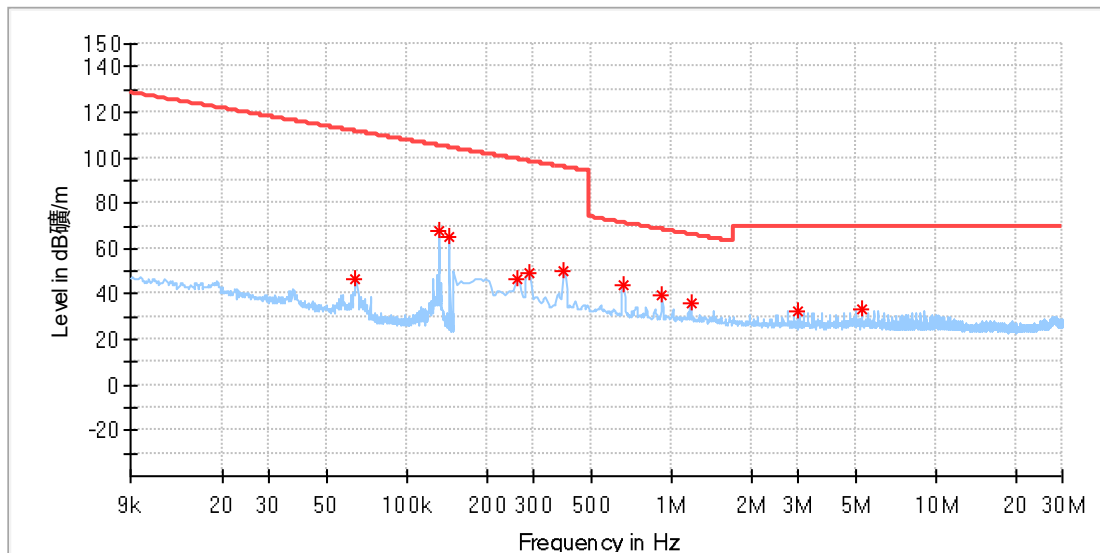

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.063688	46.18	111.51	65.34	100.0	Y	46.0	19.9
0.131670	67.82	105.21	37.39	100.0	Y	348.0	19.9
0.145166	64.78	104.36	39.58	100.0	Y	65.0	19.9
0.259743	46.52	99.31	52.79	100.0	Y	139.0	19.9
0.290471	49.33	98.34	49.01	100.0	Y	247.0	19.9
0.391434	49.87	95.75	45.87	100.0	Y	313.0	19.9
0.654816	43.86	71.29	27.43	100.0	Y	334.0	19.9
0.918199	39.63	68.36	28.73	100.0	Y	324.0	19.9
1.181581	35.84	66.18	30.33	100.0	Y	135.0	19.9
3.025257	32.24	69.50	37.26	100.0	Y	85.0	20.0
5.259618	33.16	69.50	36.34	100.0	Y	42.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

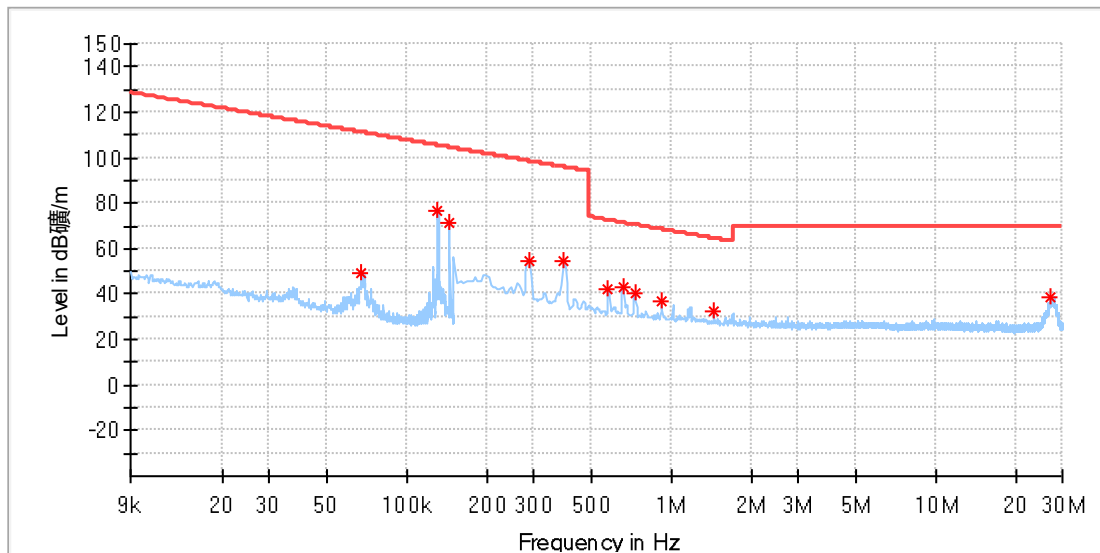

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.067011	49.06	111.07	62.01	100.0	Z	57.0	19.9
0.130461	77.06	105.29	28.23	100.0	Z	24.0	19.9
0.145166	71.46	104.36	32.90	100.0	Z	4.0	19.9
0.290471	54.46	98.34	43.88	100.0	Z	12.0	19.9
0.391434	54.39	95.75	41.36	100.0	Z	41.0	19.9
0.575802	42.16	72.40	30.24	100.0	Z	351.0	19.9
0.654816	43.38	71.29	27.91	100.0	Z	34.0	19.9
0.725052	40.17	70.41	30.24	100.0	Z	63.0	19.9
0.918199	36.84	68.36	31.52	100.0	Z	41.0	19.9
1.440574	32.62	64.46	31.83	100.0	Z	73.0	20.0
27.080846	38.41	69.50	31.09	100.0	Z	357.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

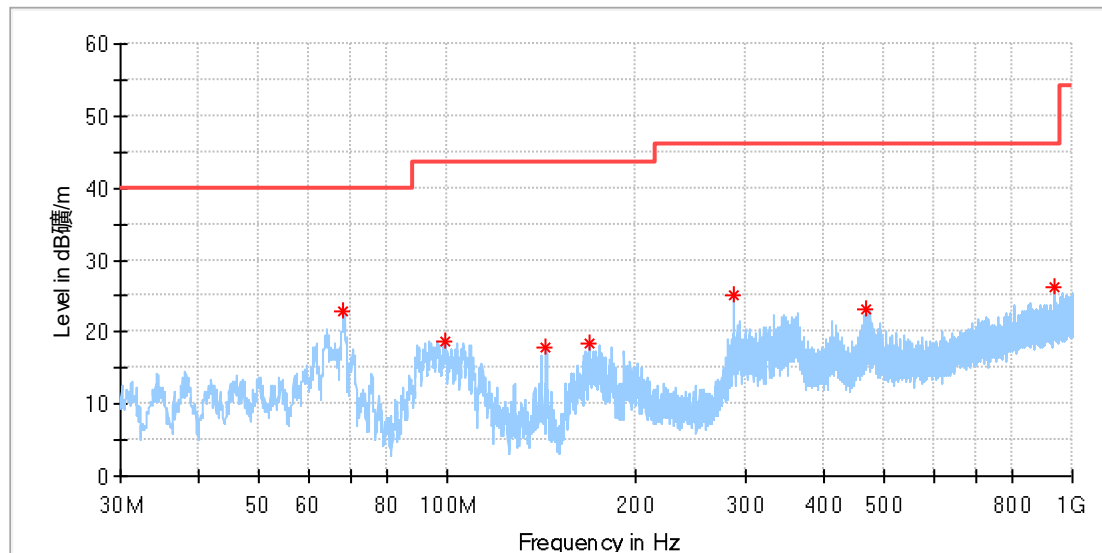

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
68.099444	22.80	40.00	17.20	100.0	H	328.0	-21.3
99.516667	18.80	43.50	24.70	100.0	H	45.0	-19.2
143.975000	17.73	43.50	25.77	100.0	H	0.0	-22.4
168.494444	18.33	43.50	25.17	100.0	H	0.0	-21.4
288.020000	25.23	46.00	20.77	100.0	H	196.0	-16.6
466.661667	23.09	46.00	22.91	100.0	H	240.0	-12.4
938.458889	26.26	46.00	19.74	100.0	H	70.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Charging
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

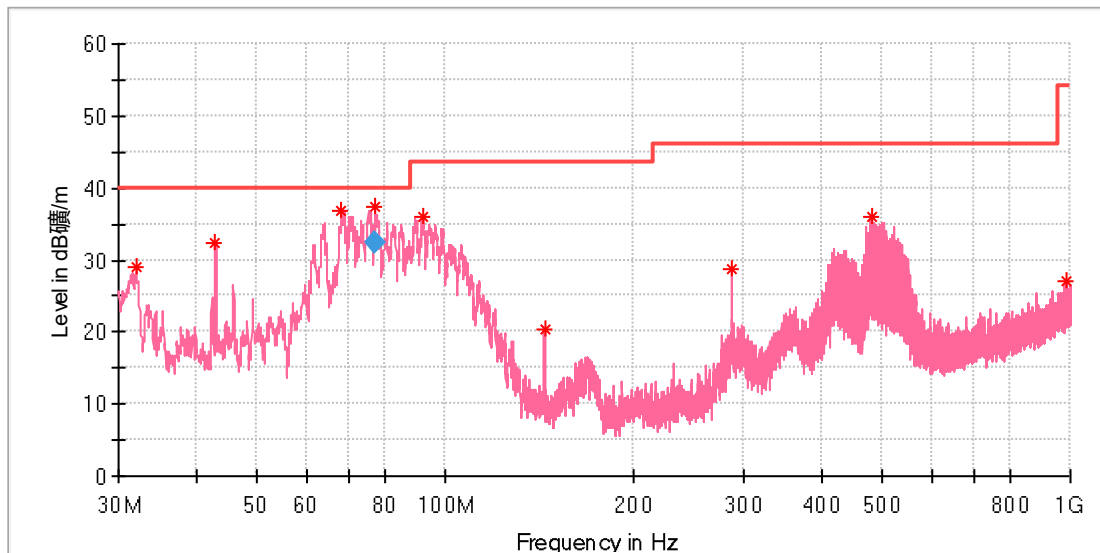

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.047778	28.94	40.00	11.06	100.0	V	285.0	-22.7
42.879444	32.31	40.00	7.69	100.0	V	337.0	-19.4
68.207222	36.93	40.00	3.07	100.0	V	13.0	-21.4
77.098889	37.41	40.00	2.59	100.0	V	183.0	-23.5
91.918333	35.91	43.50	7.59	100.0	V	77.0	-20.6
144.028889	20.46	43.50	23.04	100.0	V	249.0	-22.4
288.020000	28.77	46.00	17.23	100.0	V	278.0	-16.6
481.427222	36.05	46.00	9.95	100.0	V	219.0	-12.1
987.551667	27.00	54.00	27.00	100.0	V	0.0	-3.7


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
77.122106	32.48	40.00	7.52	100.0	V	181.0	-23.5

Standby mode

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W526
Test Mode:	Standby
Order No/Sample No:	168583432/A004183193-003
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

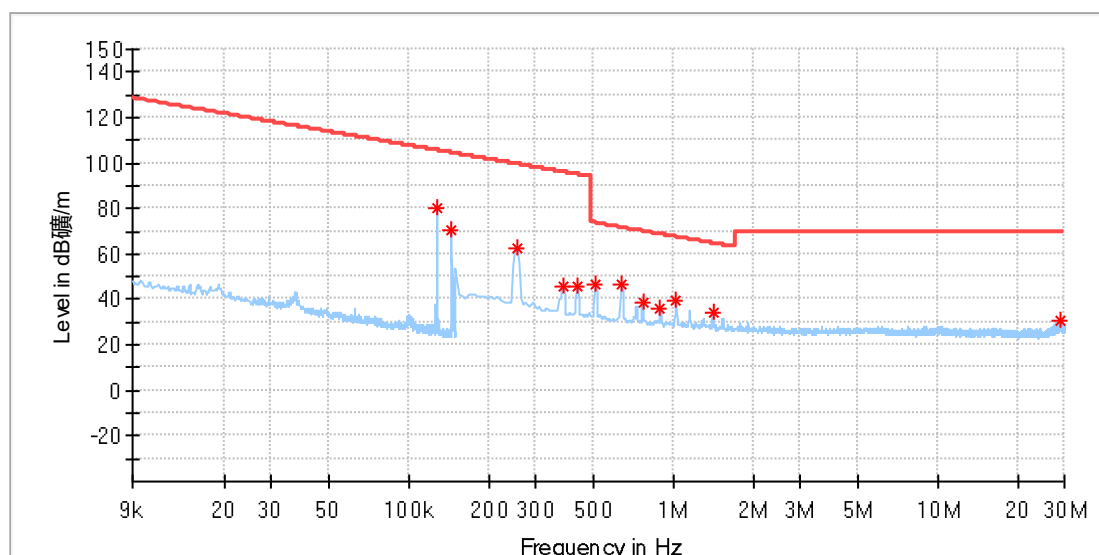

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	80.17	105.46	25.30	100.0	X	39.0	19.9
0.145166	70.43	104.36	33.93	100.0	X	307.0	19.9
0.255353	62.69	99.46	36.77	100.0	X	27.0	19.9
0.382655	45.50	95.95	50.45	100.0	X	27.0	19.9
0.435331	45.49	94.83	49.34	100.0	X	4.0	19.9
0.509956	46.81	73.45	26.64	100.0	X	27.0	19.9
0.637258	46.52	71.52	25.01	100.0	X	27.0	19.9
0.764559	39.08	69.95	30.87	100.0	X	27.0	19.9
0.891860	35.92	68.61	32.70	100.0	X	27.0	19.9
1.019162	39.34	67.46	28.12	100.0	X	27.0	19.9
1.405456	33.93	64.67	30.75	100.0	X	27.0	19.9
29.170346	30.31	69.50	39.19	100.0	X	77.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Standby
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

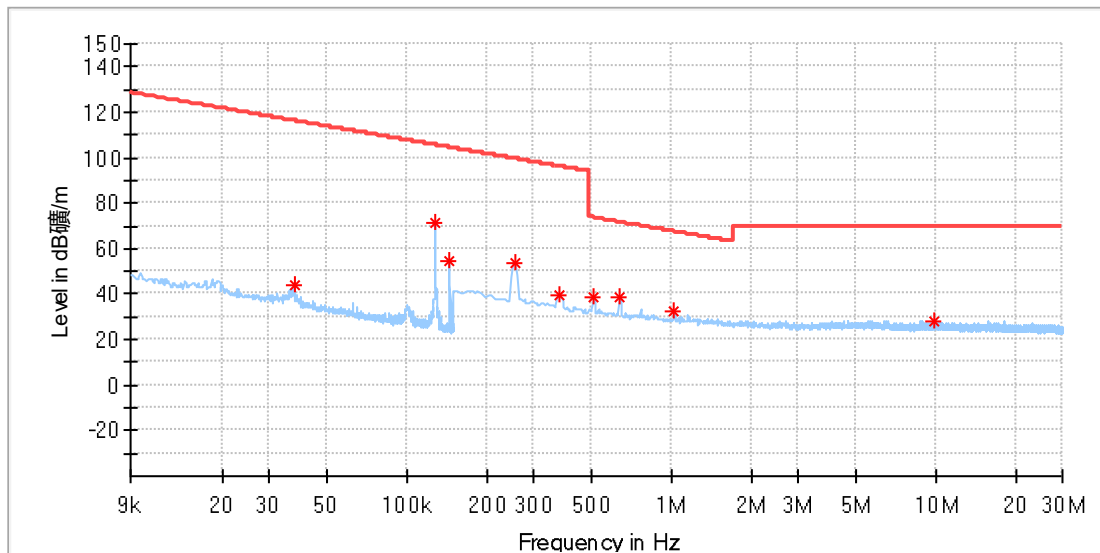

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037301	43.65	116.16	72.51	100.0	Y	348.0	19.9
0.127944	71.11	105.46	34.35	100.0	Y	104.0	19.9
0.145166	54.89	104.36	49.47	100.0	Y	24.0	19.9
0.255353	53.66	99.46	45.79	100.0	Y	84.0	19.9
0.373875	39.57	96.15	56.58	100.0	Y	120.0	19.9
0.509956	38.32	73.45	35.13	100.0	Y	127.0	19.9
0.637258	38.36	71.52	33.16	100.0	Y	265.0	19.9
1.019162	32.46	67.46	35.00	100.0	Y	265.0	19.9
9.890757	28.05	69.50	41.45	100.0	Y	280.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Standby
Order No/Sample No: 168583432/A004183193-003
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

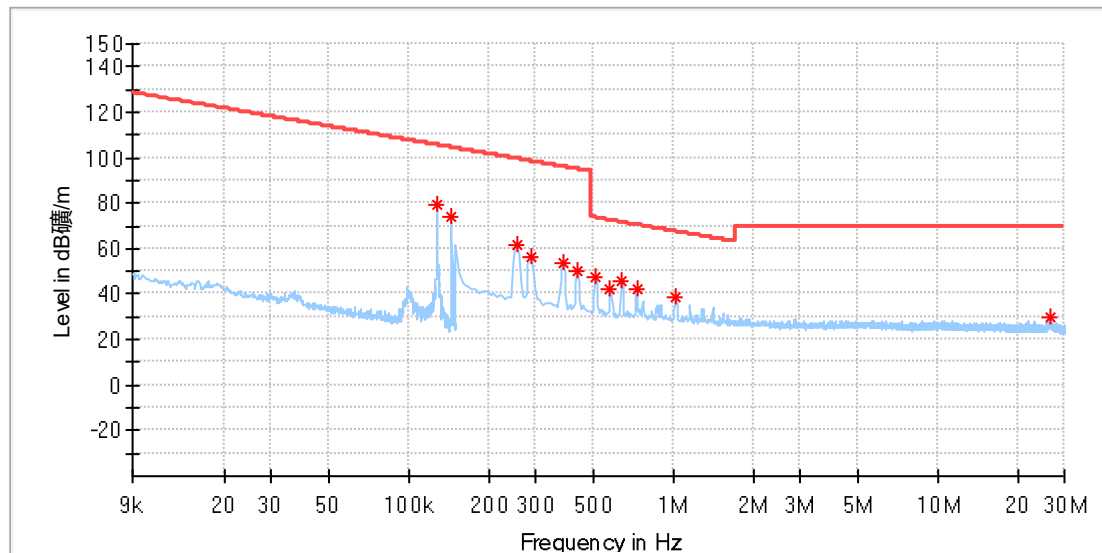

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128044	78.98	105.45	26.47	100.0	Z	359.0	19.9
0.145166	73.78	104.36	30.58	100.0	Z	348.0	19.9
0.255353	61.94	99.46	37.52	100.0	Z	1.0	19.9
0.290471	56.33	98.34	42.01	100.0	Z	349.0	19.9
0.382655	53.27	95.95	42.67	100.0	Z	84.0	19.9
0.430941	49.76	94.92	45.15	100.0	Z	271.0	19.9
0.509956	47.58	73.45	25.87	100.0	Z	84.0	19.9
0.575802	42.56	72.40	29.84	100.0	Z	349.0	19.9
0.637258	45.84	71.52	25.68	100.0	Z	1.0	19.9
0.725052	41.84	70.41	28.57	100.0	Z	271.0	19.9
1.019162	38.43	67.46	29.03	100.0	Z	1.0	19.9
26.576029	30.03	69.50	39.47	100.0	Z	1.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Standby
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

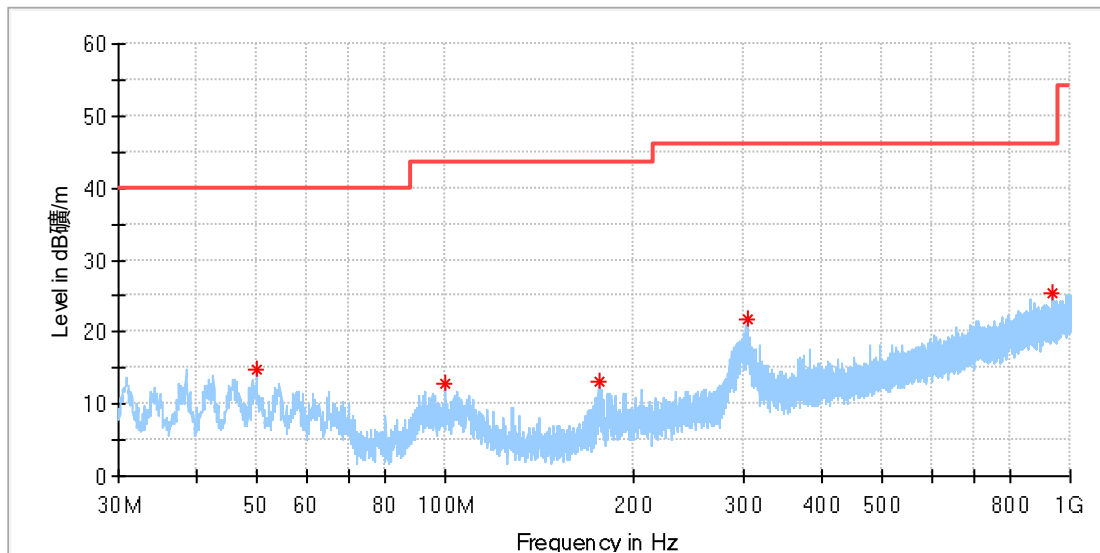

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.046667	14.75	40.00	25.25	100.0	H	78.0	-18.4
99.732222	12.91	43.50	30.59	100.0	H	78.0	-19.2
176.955000	13.23	43.50	30.27	100.0	H	0.0	-20.8
304.348333	21.75	46.00	24.25	100.0	H	166.0	-16.2
938.405000	25.33	46.00	20.67	100.0	H	166.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W526
Test Mode: Standby
Order No/Sample No: 168583432/A004130853-002
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

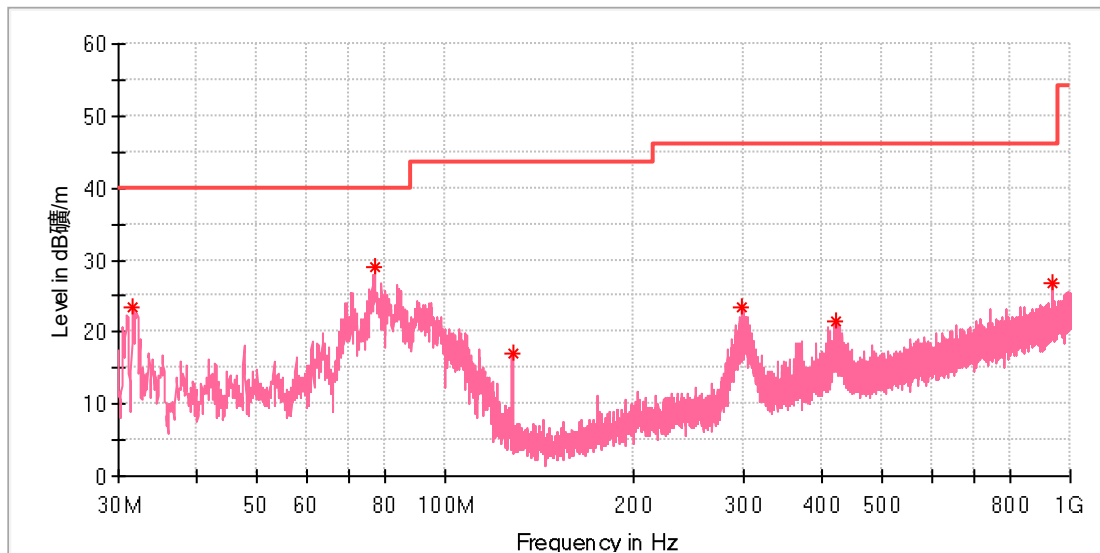

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.616667	23.41	40.00	16.59	100.0	V	20.0	-22.8
77.260556	29.09	40.00	10.91	100.0	V	253.0	-23.5
128.023889	17.04	43.50	26.46	100.0	V	253.0	-21.7
299.013333	23.36	46.00	22.64	100.0	V	209.0	-16.3
420.640556	21.50	46.00	24.50	100.0	V	209.0	-13.2
938.458889	26.87	46.00	19.13	100.0	V	0.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: 2-in-1 Wireless Charger
Order Number: 168583432_Item130
Model: W526
Test Mode: 7.5W+5W+5W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Brain Zhang/ Murphy Chen
Tem./Hum./Pressure: 24.3°C/51.0%/101kPa
Remark: SR2

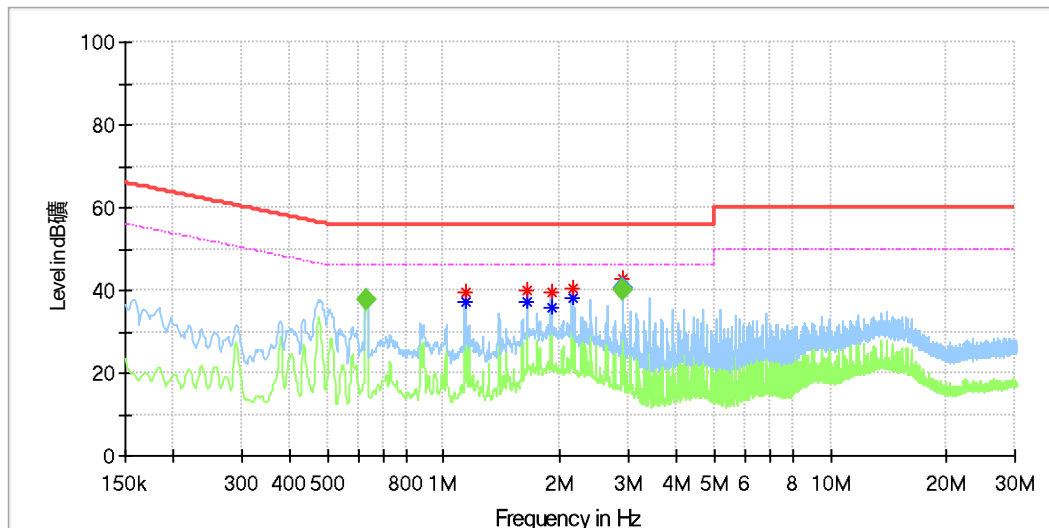

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.63	---	37.50	46.00	8.50	L1	10.27
1.14	39.37	---	56.00	16.63	L1	10.28
1.14	---	37.14	46.00	8.86	L1	10.28
1.64	---	37.04	46.00	8.96	L1	10.30
1.64	40.22	---	56.00	15.78	L1	10.30
1.89	---	35.73	46.00	10.27	L1	10.30
1.89	39.59	---	56.00	16.41	L1	10.30
2.15	---	38.24	46.00	7.76	L1	10.31
2.15	40.39	---	56.00	15.61	L1	10.31
2.91	42.88	---	56.00	13.12	L1	10.34
2.91	---	40.92	46.00	5.08	L1	10.34

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.63	---	37.52	46.00	8.48	1000.00	9.00	L1	10.27
2.91	40.64	---	56.00	15.36	1000.00	9.00	L1	10.34
2.91	---	39.80	46.00	6.20	1000.00	9.00	L1	10.34

EUT Information

EUT Name: 2-in-1 Wireless Charger
Order Number: 168583432_Item130
Model: W526
Test Mode: 7.5W+5W+5W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Brain Zhang/ Murphy Chen
Tem./Hum./Pressure: 24.3°C/51.0%/101kPa
Remark: SR2

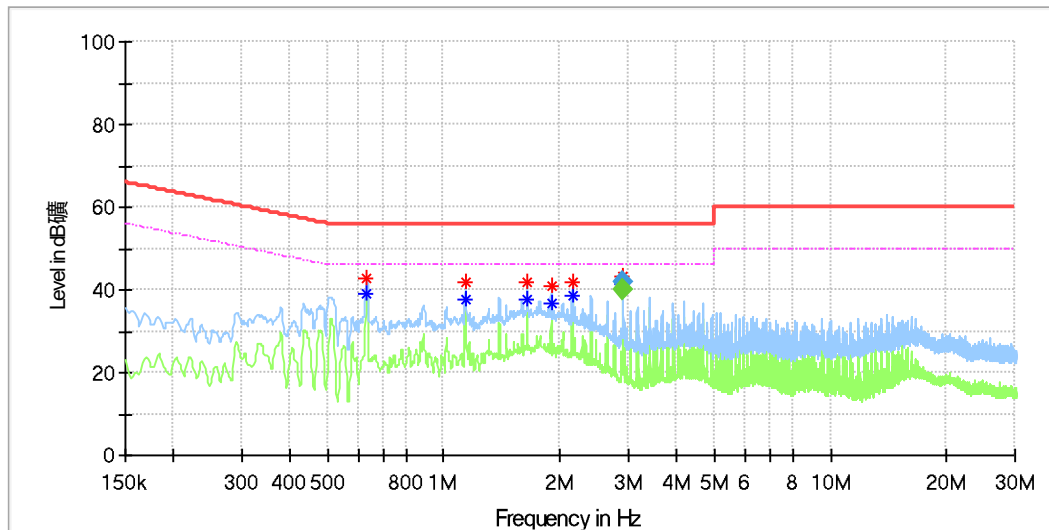

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.63	42.77	---	56.00	13.23	N	10.28
0.63	---	39.06	46.00	6.94	N	10.28
1.14	41.64	---	56.00	14.36	N	10.29
1.14	---	37.81	46.00	8.19	N	10.29
1.64	41.74	---	56.00	14.26	N	10.30
1.64	---	37.51	46.00	8.49	N	10.30
1.90	41.11	---	56.00	14.89	N	10.31
1.90	---	36.54	46.00	9.46	N	10.31
2.15	---	38.49	46.00	7.51	N	10.31
2.15	41.82	---	56.00	14.18	N	10.31
2.91	43.45	---	56.00	12.55	N	10.34
2.91	---	41.62	46.00	4.38	N	10.34

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
2.91	---	39.88	46.00	6.12	1000.00	9.00	N	10.34
2.91	41.92	---	56.00	14.08	1000.00	9.00	N	10.34