


Mode:


AX20-2412-MIMO

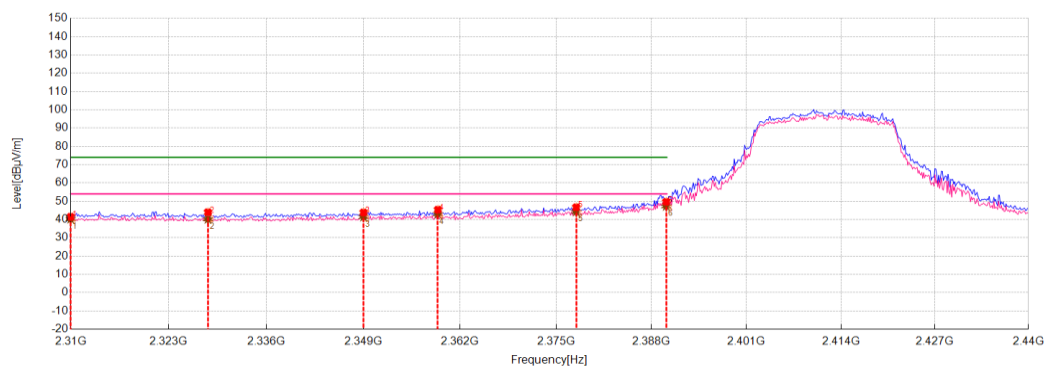

★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	2.67	41.50	74.00	32.50	40.19	54.00	13.81	150	36	Horizontal	PASS
2	2328.2000	2.85	43.97	74.00	30.03	40.09	54.00	13.91	150	116	Horizontal	PASS
3	2349.0000	3.01	43.85	74.00	30.15	41.32	54.00	12.68	150	104	Horizontal	PASS
4	2359.0100	2.96	45.35	74.00	28.65	42.85	54.00	11.15	150	314	Horizontal	PASS
5	2377.7300	3.08	46.68	74.00	27.32	44.13	54.00	9.87	150	320	Horizontal	PASS
6	2390.0000	2.95	49.68	74.00	24.32	47.19	54.00	6.81	150	314	Horizontal	PASS

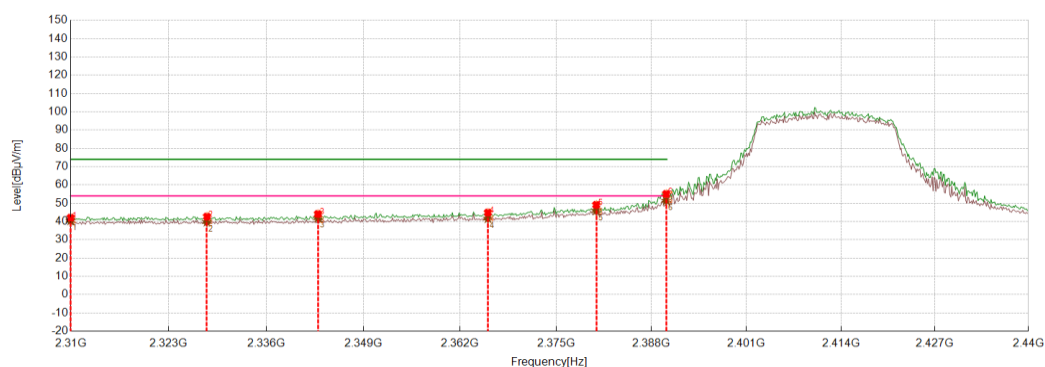


★ PK Detector ● AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	2.67	42.08	74.00	31.92	40.37	54.00	13.63	150	45	Vertical	PASS
2	2328.0700	2.85	42.67	74.00	31.33	39.67	54.00	14.33	150	333	Vertical	PASS
3	2342.8900	2.90	44.12	74.00	29.88	41.80	54.00	12.20	150	105	Vertical	PASS
4	2365.7700	2.99	44.87	74.00	29.13	41.54	54.00	12.46	150	323	Vertical	PASS
5	2380.4600	3.04	49.10	74.00	24.90	45.88	54.00	8.12	150	105	Vertical	PASS
6	2390.0000	2.95	55.09	74.00	18.91	51.32	54.00	2.68	150	105	Vertical	PASS

Mode:


AX20-2462-MIMO

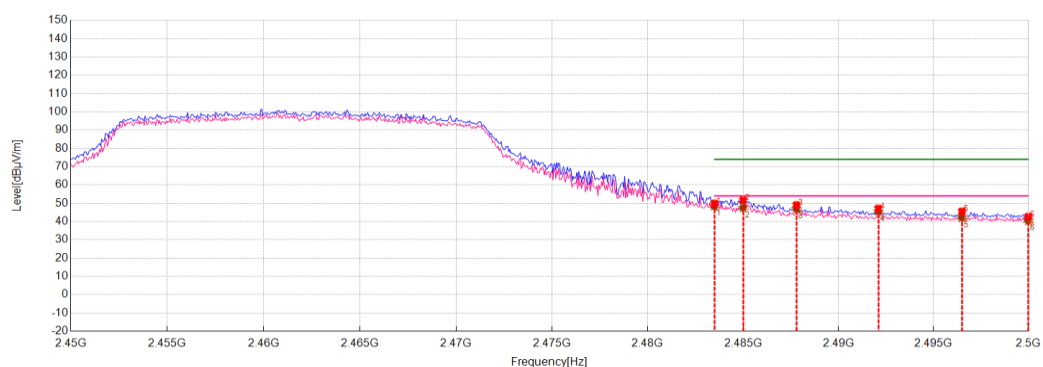

★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	3.46	49.88	74.00	24.12	48.34	54.00	5.66	150	82	Horizontal	PASS
2	2485.0000	3.54	51.67	74.00	22.33	47.40	54.00	6.60	150	121	Horizontal	PASS
3	2487.8000	3.48	49.03	74.00	24.97	46.80	54.00	7.20	150	107	Horizontal	PASS
4	2492.1000	3.56	47.11	74.00	26.89	45.37	54.00	8.63	150	82	Horizontal	PASS
5	2496.5000	3.57	45.54	74.00	28.46	42.05	54.00	11.95	150	156	Horizontal	PASS
6	2500.0000	3.50	42.66	74.00	31.34	40.38	54.00	13.62	150	156	Horizontal	PASS

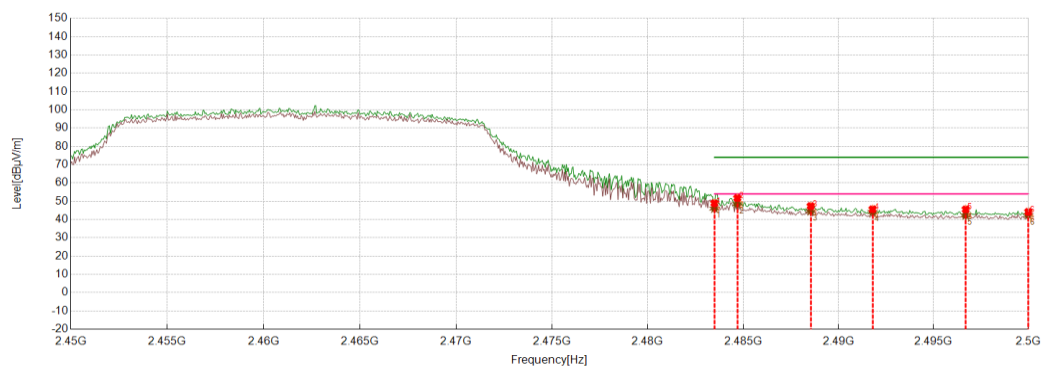


★ PK Detector ● AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	3.46	48.90	74.00	25.10	45.98	54.00	8.02	150	106	Vertical	PASS
2	2484.7000	3.52	51.73	74.00	22.27	48.50	54.00	5.50	150	106	Vertical	PASS
3	2488.5500	3.51	47.34	74.00	26.66	44.55	54.00	9.45	150	106	Vertical	PASS
4	2491.8000	3.56	45.61	74.00	28.39	44.07	54.00	9.93	150	106	Vertical	PASS
5	2496.7000	3.58	45.53	74.00	28.47	42.23	54.00	11.77	150	106	Vertical	PASS
6	2500.0000	3.50	44.19	74.00	29.81	42.39	54.00	11.61	150	106	Vertical	PASS

Mode:


AX40-2422-MIMO

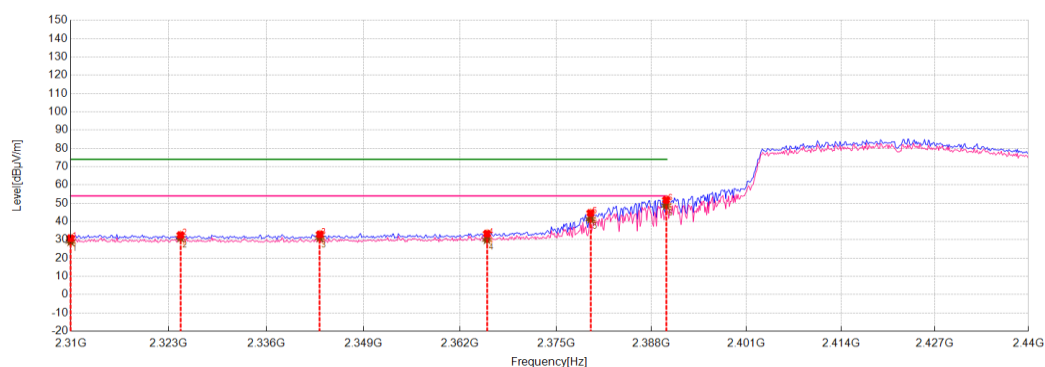

★ PK Detector ★ AV Detector

Final Data List


NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	2.67	30.90	74.00	43.10	28.91	54.00	25.09	150	7	Horizontal	PASS
2	2324.5600	2.85	32.60	74.00	41.40	30.97	54.00	23.03	150	7	Horizontal	PASS
3	2343.1500	2.91	32.99	74.00	41.01	30.97	54.00	23.03	150	318	Horizontal	PASS
4	2365.6400	2.99	33.35	74.00	40.65	29.99	54.00	24.01	150	41	Horizontal	PASS
5	2379.6800	3.05	44.63	74.00	29.37	41.19	54.00	12.81	150	313	Horizontal	PASS
6	2390.0000	2.95	51.78	74.00	22.22	48.61	54.00	5.39	150	308	Horizontal	PASS

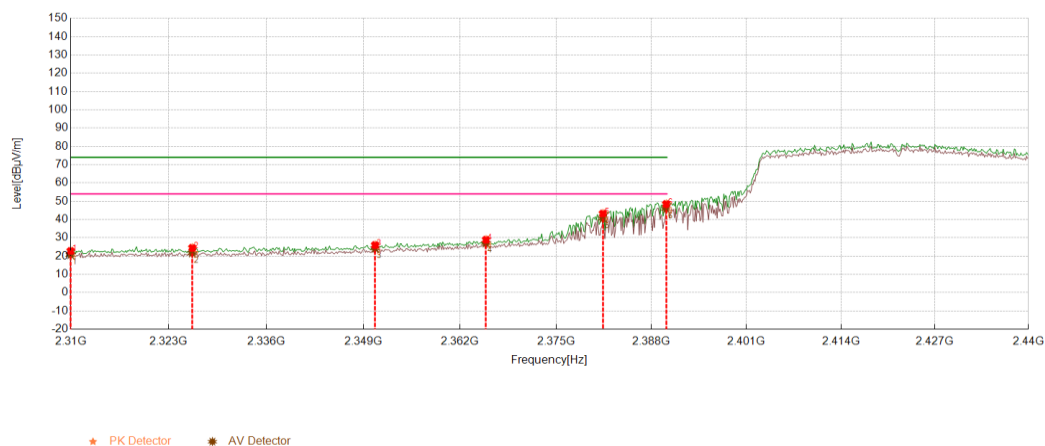

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	2.67	22.76	74.00	51.24	20.72	54.00	33.28	150	317	Vertical	PASS
2	2326.1200	2.86	24.47	74.00	49.53	21.64	54.00	32.36	150	309	Vertical	PASS
3	2350.5600	3.03	25.99	74.00	48.01	24.18	54.00	29.82	150	32	Vertical	PASS
4	2365.5100	2.99	28.89	74.00	45.11	27.08	54.00	26.92	150	19	Vertical	PASS
5	2381.3700	3.03	43.21	74.00	30.79	40.54	54.00	13.46	150	25	Vertical	PASS
6	2390.0000	2.95	48.45	74.00	25.55	45.80	54.00	8.20	150	6	Vertical	PASS

Mode:


AX40-2452-MIMO

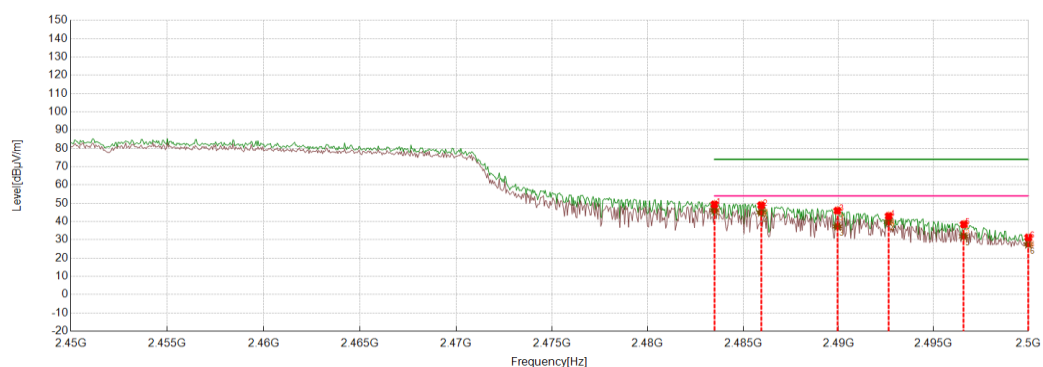

★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	3.46	49.34	74.00	24.66	46.23	54.00	7.77	150	320	Vertical	PASS
2	2485.9500	3.47	48.90	74.00	25.10	45.01	54.00	8.99	150	306	Vertical	PASS
3	2489.9500	3.57	45.92	74.00	28.08	37.27	54.00	16.73	150	313	Vertical	PASS
4	2492.6500	3.57	42.97	74.00	31.03	39.80	54.00	14.20	150	303	Vertical	PASS
5	2496.6000	3.58	38.44	74.00	35.56	31.91	54.00	22.09	150	303	Vertical	PASS
6	2500.0000	3.50	31.25	74.00	42.75	27.55	54.00	26.45	150	47	Vertical	PASS

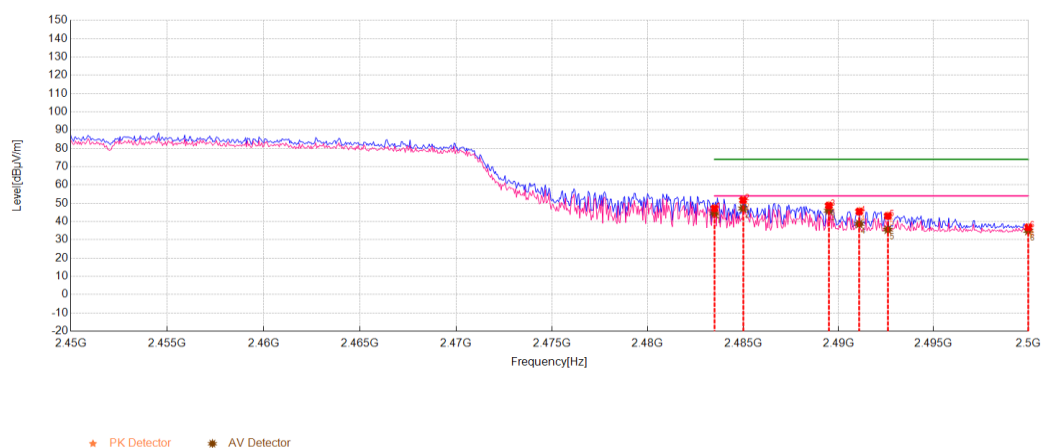

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	3.46	47.16	74.00	26.84	44.41	54.00	9.59	150	9	Horizontal	PASS
2	2485.0000	3.54	51.69	74.00	22.31	47.12	54.00	6.88	150	6	Horizontal	PASS
3	2489.5000	3.56	48.69	74.00	25.31	45.89	54.00	8.11	150	6	Horizontal	PASS
4	2491.1000	3.55	45.48	74.00	28.52	38.62	54.00	15.38	150	6	Horizontal	PASS
5	2492.6000	3.57	43.03	74.00	30.97	35.55	54.00	18.45	150	349	Horizontal	PASS
6	2500.0000	3.50	36.83	74.00	37.17	34.85	54.00	19.15	150	53	Horizontal	PASS

All the modes have been tested. DSSS, OFDM and OFDMA technologies respectively represent the maximum power mode of data and different bandwidths.

Appendix I: Spurious emissions


Test Result

Note:


The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

30MHz-1GHz

Mode:	N20-2437-MIMO
-------	---------------

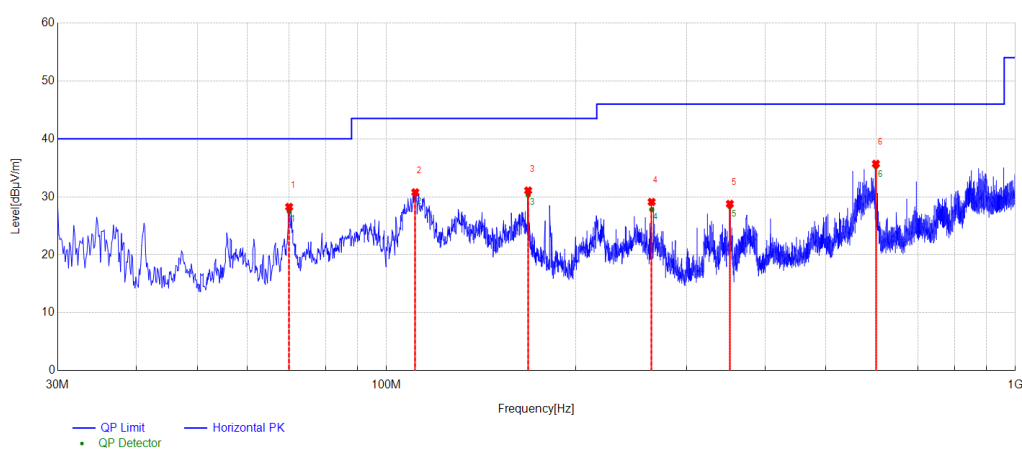

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	70.0125	-18.39	27.47	40.00	12.53	100	12	Horizontal	PASS
2	111.1162	-18.59	30.53	43.50	12.97	100	77	Horizontal	PASS
3	167.9825	-16.22	30.30	43.50	13.20	100	298	Horizontal	PASS
4	264.0125	-17.15	27.79	46.00	18.21	100	138	Horizontal	PASS
5	351.5550	-14.98	28.29	46.00	17.71	100	289	Horizontal	PASS
6	600.1175	-8.83	35.20	46.00	10.80	100	332	Horizontal	PASS

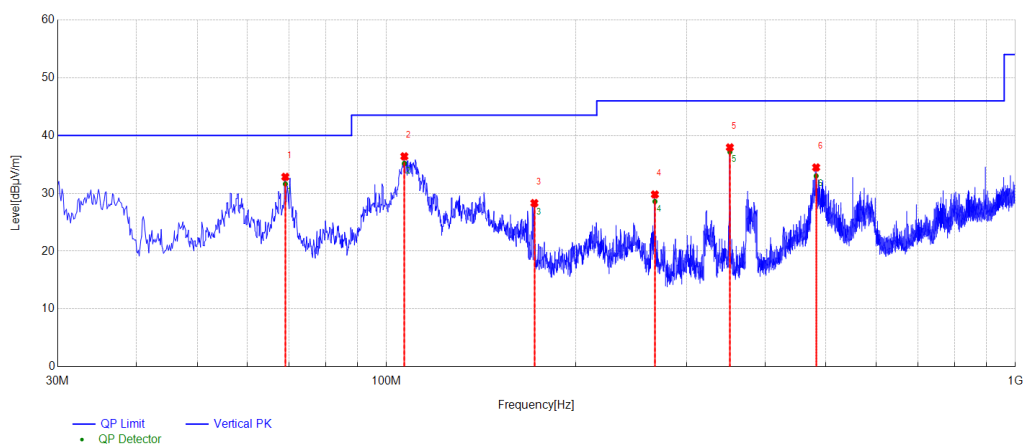

QP Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	69.0425	-18.13	31.63	40.00	8.37	100	100	Vertical	PASS
2	106.7512	-18.95	35.18	43.50	8.32	100	240	Vertical	PASS
3	171.8625	-16.67	28.06	43.50	15.44	100	348	Vertical	PASS
4	267.1650	-17.01	28.59	46.00	17.41	100	348	Vertical	PASS
5	351.5550	-14.98	37.15	46.00	8.85	100	326	Vertical	PASS
6	482.1412	-11.77	33.01	46.00	12.99	100	153	Vertical	PASS

All modes were tested, and the data only represent the maximum power mode data.


1GHz~18GHz

Mode:	B-2412-ANT 1
-------	--------------

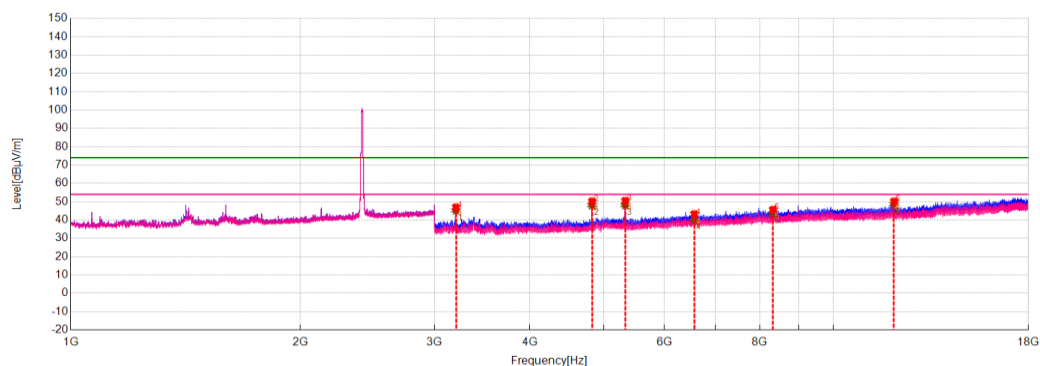

★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	46.95	74.00	27.05	45.17	54.00	8.83	150	223	Horizontal	PASS
2	4824.0000	-14.91	50.23	74.00	23.77	47.90	54.00	6.10	150	285	Horizontal	PASS
3	5333.0000	-13.66	50.52	74.00	23.48	47.95	54.00	6.05	150	161	Horizontal	PASS
4	6567.5000	-10.21	43.22	74.00	30.78	39.97	54.00	14.03	150	145	Horizontal	PASS
5	8328.5000	-7.47	45.64	74.00	28.36	43.33	54.00	10.67	150	4	Horizontal	PASS
6	12000.0000	-1.72	50.15	74.00	23.85	48.57	54.00	5.43	150	115	Horizontal	PASS

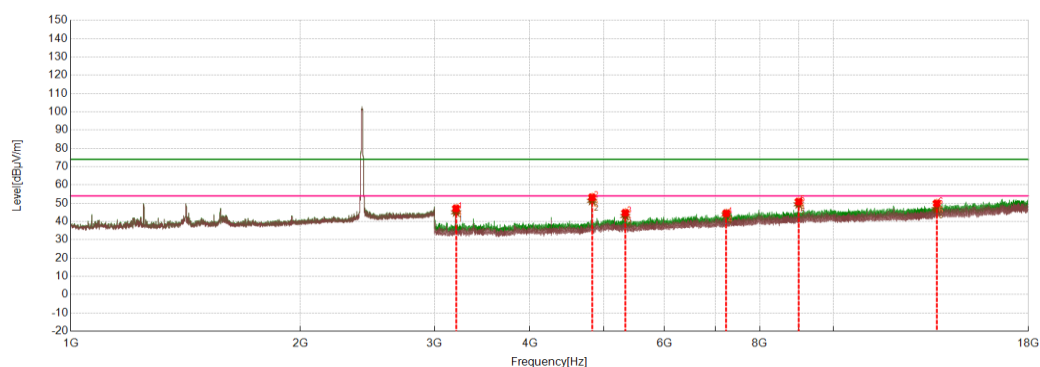


★ PK Detector ● AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	47.19	74.00	26.81	45.01	54.00	8.99	150	192	Vertical	PASS
2	4824.0000	-14.91	53.27	74.00	20.73	51.25	54.00	2.75	150	6	Vertical	PASS
3	5333.0000	-13.66	44.80	74.00	29.20	42.95	54.00	11.05	150	137	Vertical	PASS
4	7235.0000	-9.06	44.53	74.00	29.47	43.73	54.00	10.27	150	52	Vertical	PASS
5	9000.0000	-6.32	50.91	74.00	23.09	49.37	54.00	4.63	150	44	Vertical	PASS
6	13651.5000	1.10	49.95	74.00	24.05	46.81	54.00	7.19	150	106	Vertical	PASS

Mode:


B-2437-ANT 1

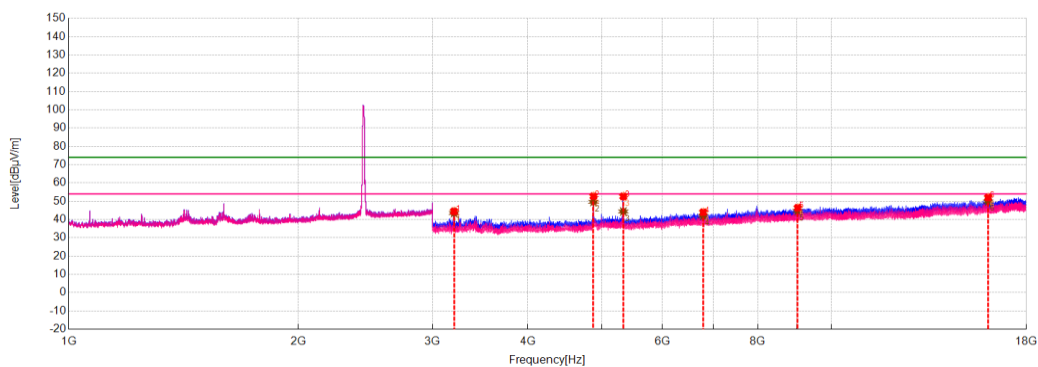

★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.46	74.00	29.54	43.52	54.00	10.48	150	209	Horizontal	PASS
2	4874.0000	-14.20	52.72	74.00	21.28	49.62	54.00	4.38	150	278	Horizontal	PASS
3	5333.5000	-13.67	52.63	74.00	21.37	44.35	54.00	9.65	150	202	Horizontal	PASS
4	6788.5000	-9.85	43.98	74.00	30.02	41.92	54.00	12.08	150	209	Horizontal	PASS
5	9029.0000	-6.32	46.39	74.00	27.61	44.70	54.00	9.30	150	148	Horizontal	PASS
6	16040.0000	3.66	52.02	74.00	21.98	49.80	54.00	4.20	150	224	Horizontal	PASS

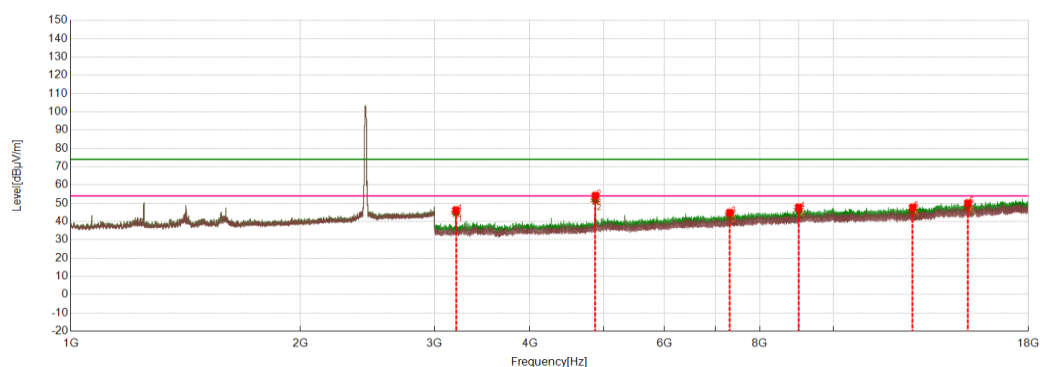


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	46.26	74.00	27.74	44.82	54.00	9.18	150	177	Vertical	PASS
2	4874.0000	-14.20	54.21	74.00	19.79	51.53	54.00	2.47	150	5	Vertical	PASS
3	7309.5000	-9.62	44.88	74.00	29.12	43.73	54.00	10.27	150	67	Vertical	PASS
4	9000.0000	-6.32	47.77	74.00	26.23	46.25	54.00	7.75	150	44	Vertical	PASS
5	12697.0000	-0.75	47.74	74.00	26.26	45.69	54.00	8.31	150	293	Vertical	PASS
6	14999.0000	2.49	50.08	74.00	23.92	47.71	54.00	6.29	150	262	Vertical	PASS

Mode:


B-2462-ANT 1

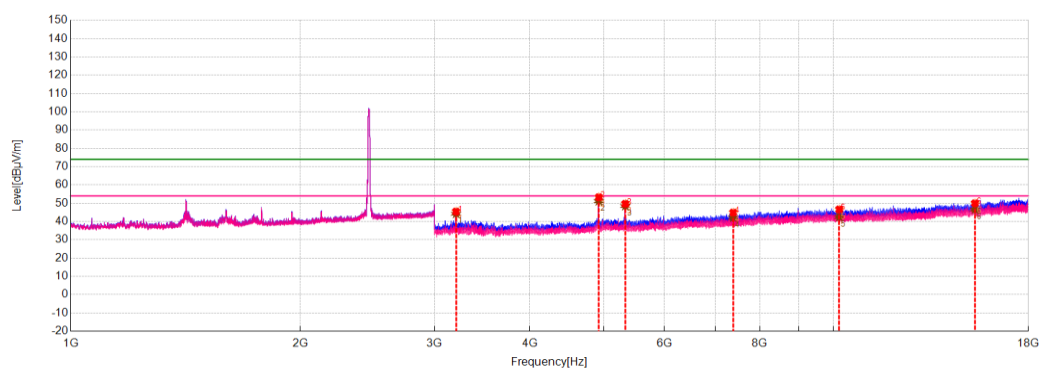

★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	45.43	74.00	28.57	44.20	54.00	9.80	150	216	Horizontal	PASS
2	4924.0000	-13.68	53.28	74.00	20.72	51.08	54.00	2.92	150	340	Horizontal	PASS
3	5333.0000	-13.66	49.69	74.00	24.31	48.42	54.00	5.58	150	176	Horizontal	PASS
4	7386.5000	-9.44	44.87	74.00	29.13	42.07	54.00	11.93	150	340	Horizontal	PASS
5	10173.0000	-4.37	46.60	74.00	27.40	42.38	54.00	11.62	150	0	Horizontal	PASS
6	15320.5000	2.60	49.98	74.00	24.02	46.52	54.00	7.48	150	6	Horizontal	PASS

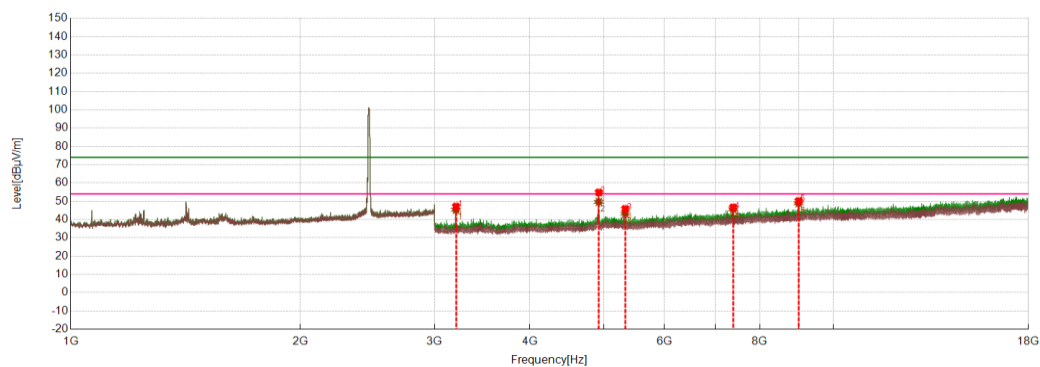


★ PK Detector ● AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	47.09	74.00	26.91	45.28	54.00	8.72	150	161	Vertical	PASS
2	4923.5000	-13.66	54.80	74.00	19.20	49.60	54.00	4.40	150	68	Vertical	PASS
3	5333.0000	-13.66	45.81	74.00	28.19	43.17	54.00	10.83	150	99	Vertical	PASS
4	7387.0000	-9.45	46.63	74.00	27.37	45.58	54.00	8.42	150	0	Vertical	PASS
5	9000.0000	-6.32	50.11	74.00	23.89	48.87	54.00	5.13	150	14	Vertical	PASS

Mode:


N20-2412-MIMO

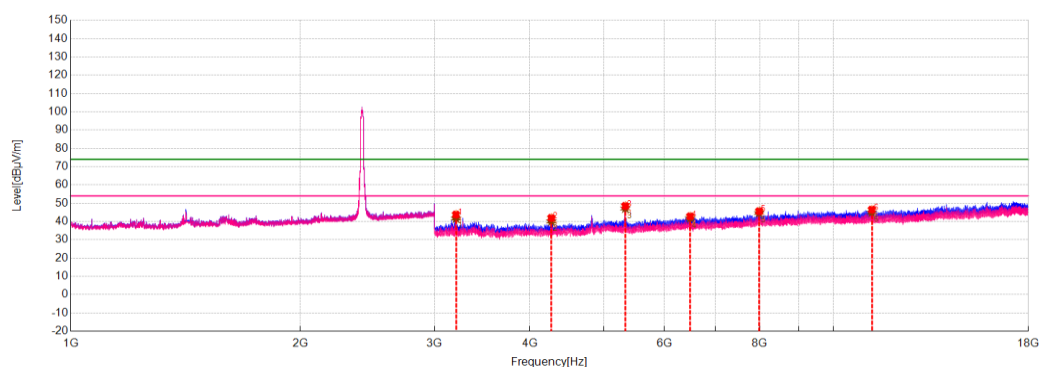

★ PK Detector ✱ AV Detector

Final Data List


NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	43.81	74.00	30.19	41.55	54.00	12.45	150	231	Horizontal	PASS
2	4266.5000	-16.95	41.99	74.00	32.01	39.97	54.00	14.03	150	153	Horizontal	PASS
3	5333.0000	-13.66	48.52	74.00	25.48	47.07	54.00	6.93	150	161	Horizontal	PASS
4	6487.0000	-9.95	42.84	74.00	31.16	41.76	54.00	12.24	150	6	Horizontal	PASS
5	7988.0000	-7.32	45.62	74.00	28.38	44.59	54.00	9.41	150	200	Horizontal	PASS
6	11222.0000	-2.39	46.50	74.00	27.50	44.88	54.00	9.12	150	107	Horizontal	PASS

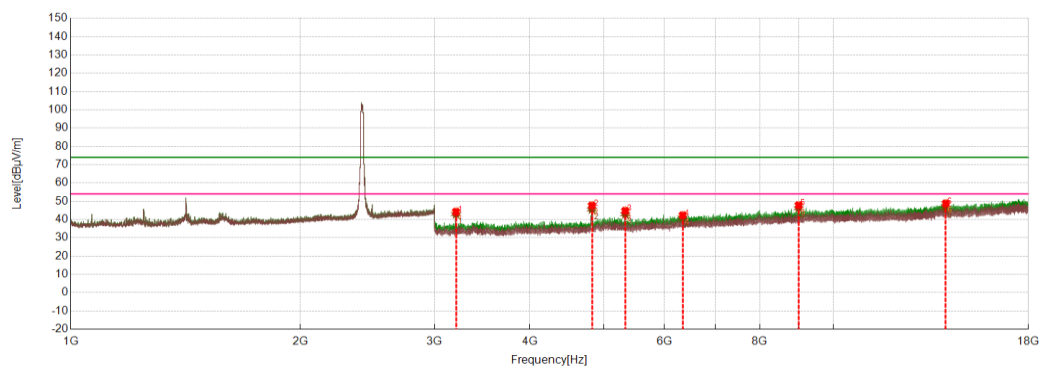

★ PK Detector ★ AV Detector


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.27	74.00	29.73	42.90	54.00	11.10	150	164	Vertical	PASS
2	4822.0000	-15.00	47.70	74.00	26.30	45.45	54.00	8.55	150	9	Vertical	PASS
3	5333.0000	-13.66	44.81	74.00	29.19	42.79	54.00	11.21	150	109	Vertical	PASS
4	6342.5000	-10.35	42.34	74.00	31.66	41.02	54.00	12.98	150	71	Vertical	PASS
5	9000.0000	-6.32	47.81	74.00	26.19	46.21	54.00	7.79	150	16	Vertical	PASS
6	14031.0000	1.11	48.83	74.00	25.17	46.41	54.00	7.59	150	102	Vertical	PASS

Mode:	N20-2437-MIMO
-------	---------------

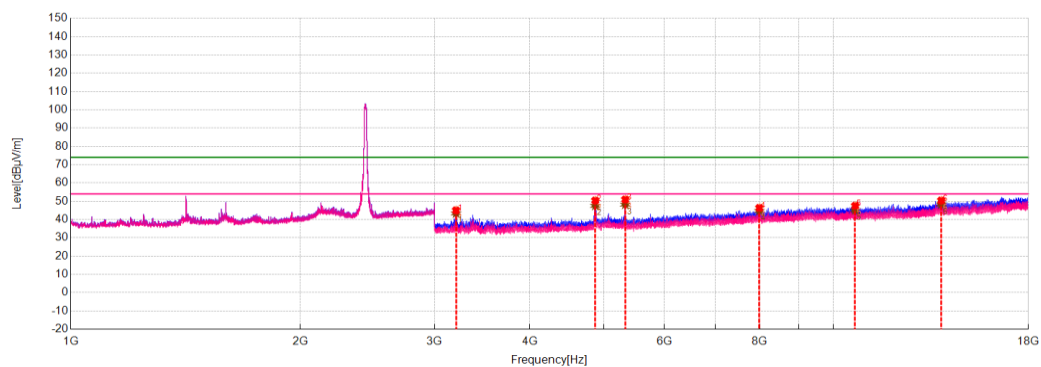

★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	45.01	74.00	28.99	43.30	54.00	10.70	150	153	Horizontal	PASS
2	4871.5000	-14.26	50.39	74.00	23.61	47.49	54.00	6.51	150	341	Horizontal	PASS
3	5332.5000	-13.66	50.92	74.00	23.08	48.10	54.00	5.90	150	201	Horizontal	PASS
4	7993.0000	-7.46	46.34	74.00	27.66	44.67	54.00	9.33	150	177	Horizontal	PASS
5	10673.0000	-3.90	47.49	74.00	26.51	45.00	54.00	9.00	150	210	Horizontal	PASS
6	13841.0000	0.94	50.41	74.00	23.59	48.17	54.00	5.83	150	278	Horizontal	PASS

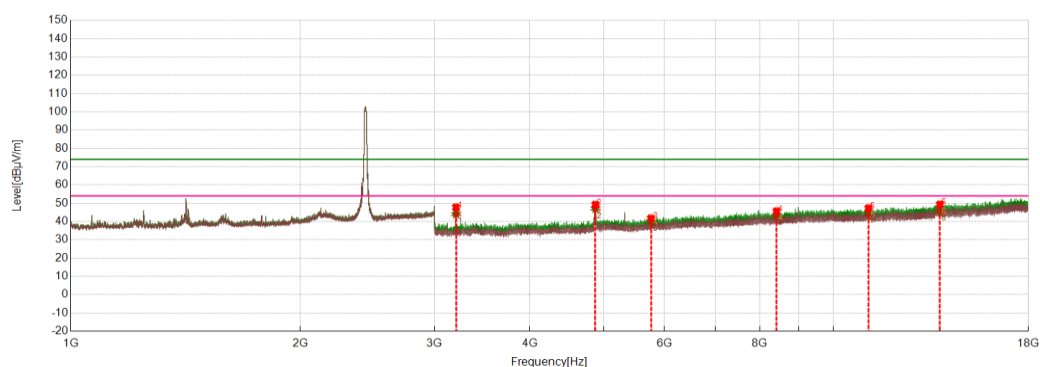


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	47.79	74.00	26.21	44.01	54.00	9.99	150	192	Vertical	PASS
2	4874.0000	-14.20	49.28	74.00	24.72	47.05	54.00	6.95	150	35	Vertical	PASS
3	5762.0000	-12.40	41.75	74.00	32.25	40.09	54.00	13.91	150	293	Vertical	PASS
4	8419.0000	-7.25	45.65	74.00	28.35	43.01	54.00	10.99	150	59	Vertical	PASS
5	11110.0000	-2.96	47.33	74.00	26.67	44.64	54.00	9.36	150	59	Vertical	PASS
6	13780.5000	0.95	49.33	74.00	24.67	45.88	54.00	8.12	150	340	Vertical	PASS

Mode:


N20-2462-MIMO

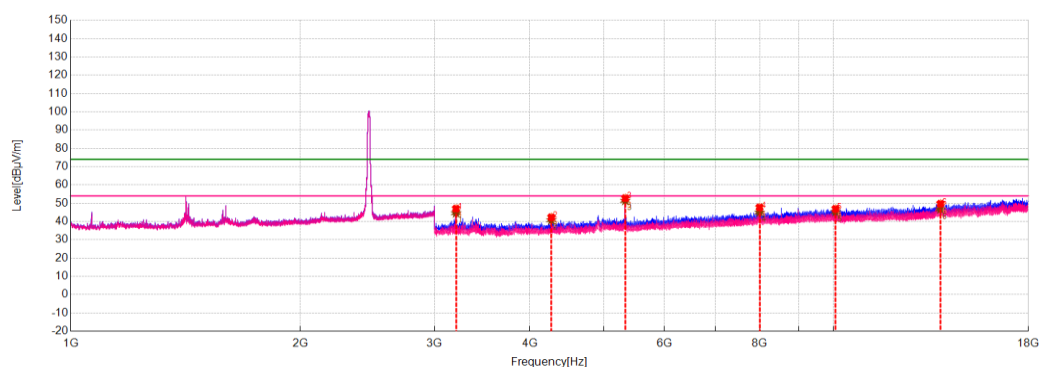

★ PK Detector ★ AV Detector


Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	47.02	74.00	26.98	44.53	54.00	9.47	150	152	Horizontal	PASS
2	4266.5000	-16.95	42.32	74.00	31.68	40.67	54.00	13.33	150	175	Horizontal	PASS
3	5333.0000	-13.66	52.75	74.00	21.25	51.30	54.00	2.70	150	199	Horizontal	PASS
4	7997.5000	-7.68	47.68	74.00	26.32	44.96	54.00	9.04	150	199	Horizontal	PASS
5	10061.0000	-4.51	46.92	74.00	27.08	45.17	54.00	8.83	150	152	Horizontal	PASS
6	13805.5000	1.16	49.69	74.00	24.31	46.64	54.00	7.36	150	144	Horizontal	PASS

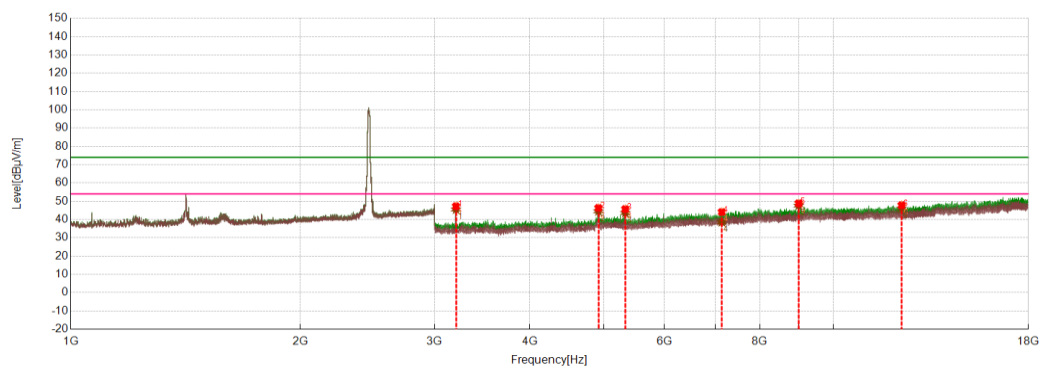

★ PK Detector ★ AV Detector


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	47.26	74.00	26.74	45.41	54.00	8.59	150	184	Vertical	PASS
2	4917.5000	-13.40	46.31	74.00	27.69	44.43	54.00	9.57	150	323	Vertical	PASS
3	5333.0000	-13.66	45.71	74.00	28.29	43.47	54.00	10.53	150	323	Vertical	PASS
4	7136.5000	-9.70	44.07	74.00	29.93	38.47	54.00	15.53	150	238	Vertical	PASS
5	9000.0000	-6.32	48.85	74.00	25.15	47.58	54.00	6.42	150	35	Vertical	PASS
6	12279.5000	-1.28	47.79	74.00	26.21	46.10	54.00	7.90	150	238	Vertical	PASS

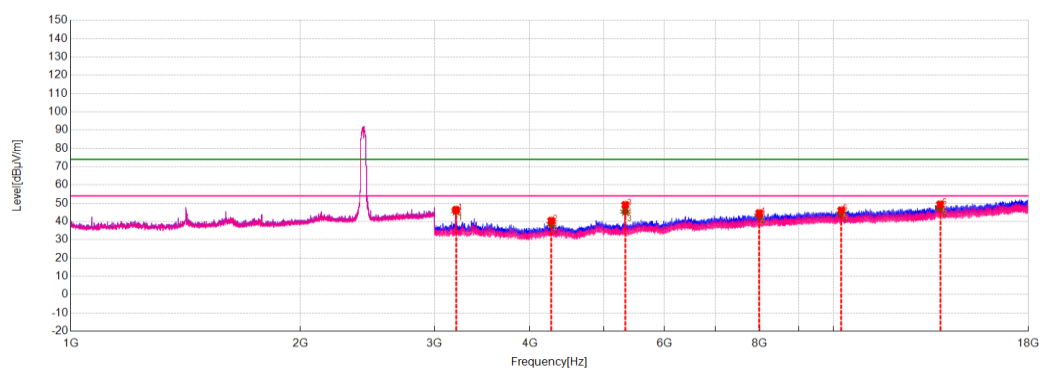Mode:
N40-2422-MIMO


★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	46.39	74.00	27.61	45.62	54.00	8.38	150	146	Horizontal	PASS
2	4266.5000	-16.95	40.47	74.00	33.53	38.44	54.00	15.56	150	348	Horizontal	PASS
3	5333.5000	-13.67	49.10	74.00	24.90	45.38	54.00	8.62	150	189	Horizontal	PASS
4	7990.0000	-7.32	44.62	74.00	29.38	43.37	54.00	10.63	150	189	Horizontal	PASS
5	10236.0000	-3.96	46.16	74.00	27.84	44.36	54.00	9.64	150	38	Horizontal	PASS
6	13793.0000	1.10	49.38	74.00	24.62	47.42	54.00	6.58	150	311	Horizontal	PASS

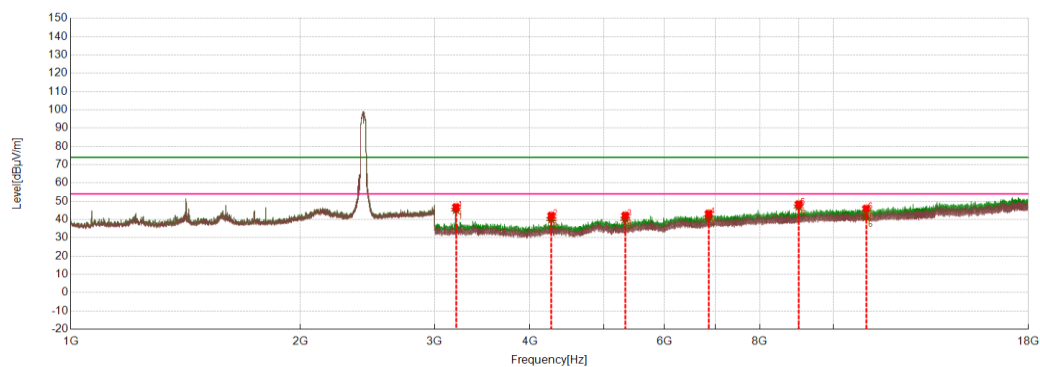


★ PK Detector ● AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	46.79	74.00	27.21	45.36	54.00	8.64	150	164	Vertical	PASS
2	4266.5000	-16.95	42.18	74.00	31.82	40.06	54.00	13.94	150	142	Vertical	PASS
3	5333.0000	-13.66	42.24	74.00	31.76	40.21	54.00	13.79	150	230	Vertical	PASS
4	6859.5000	-9.46	43.27	74.00	30.73	41.08	54.00	12.92	150	164	Vertical	PASS
5	9000.0000	-6.32	48.41	74.00	25.59	47.08	54.00	6.92	150	11	Vertical	PASS
6	11033.0000	-2.85	45.97	74.00	28.03	41.36	54.00	12.64	150	119	Vertical	PASS

Mode:


N40-2437-MIMO

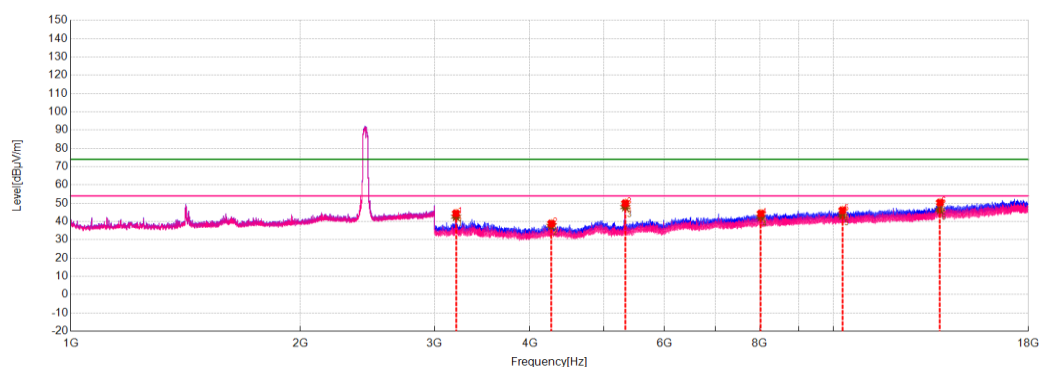

★ PK Detector ✱ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.46	74.00	29.54	42.55	54.00	11.45	150	215	Horizontal	PASS
2	4266.5000	-16.95	38.88	74.00	35.12	37.64	54.00	16.36	150	66	Horizontal	PASS
3	5333.0000	-13.66	50.02	74.00	23.98	47.85	54.00	6.15	150	192	Horizontal	PASS
4	8030.5000	-7.65	44.35	74.00	29.65	42.47	54.00	11.53	150	98	Horizontal	PASS
5	10271.5000	-3.80	46.12	74.00	27.88	43.15	54.00	10.85	150	98	Horizontal	PASS
6	13788.5000	1.04	50.35	74.00	23.65	46.29	54.00	7.71	150	278	Horizontal	PASS

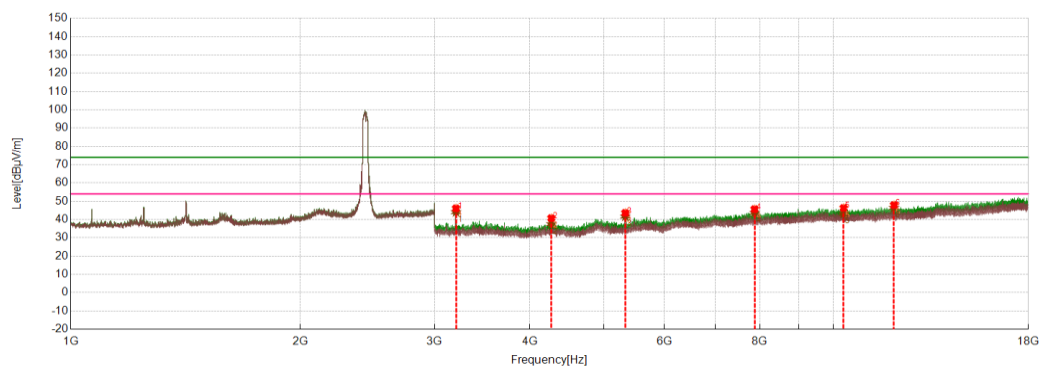


★ PK Detector ● AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	46.09	74.00	27.91	43.97	54.00	10.03	150	153	Vertical	PASS
2	4266.0000	-16.95	40.74	74.00	33.26	37.41	54.00	16.59	150	200	Vertical	PASS
3	5333.0000	-13.66	43.59	74.00	30.41	41.52	54.00	12.48	150	200	Vertical	PASS
4	7878.0000	-8.20	45.65	74.00	28.35	43.55	54.00	10.45	150	294	Vertical	PASS
5	10306.5000	-4.03	46.30	74.00	27.70	43.01	54.00	10.99	150	61	Vertical	PASS
6	12000.0000	-1.72	47.90	74.00	26.10	46.35	54.00	7.65	150	332	Vertical	PASS

Mode:


N40-2452-MIMO

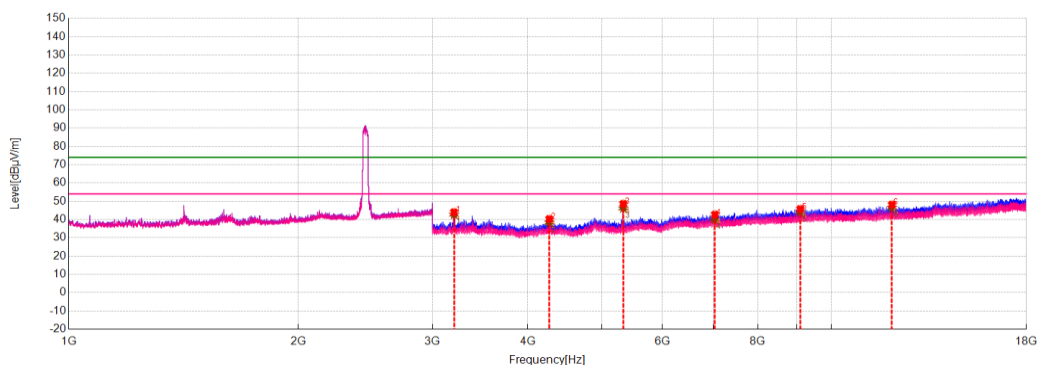

★ PK Detector ● AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.01	74.00	29.99	42.61	54.00	11.39	150	139	Horizontal	PASS
2	4266.5000	-16.95	40.32	74.00	33.68	38.29	54.00	15.71	150	193	Horizontal	PASS
3	5333.5000	-13.67	48.60	74.00	25.40	46.09	54.00	7.91	150	200	Horizontal	PASS
4	7032.0000	-9.65	42.71	74.00	31.29	39.92	54.00	14.08	150	124	Horizontal	PASS
5	9099.0000	-5.99	45.76	74.00	28.24	44.01	54.00	9.99	150	271	Horizontal	PASS
6	12000.0000	-1.72	48.18	74.00	25.82	46.41	54.00	7.59	150	154	Horizontal	PASS

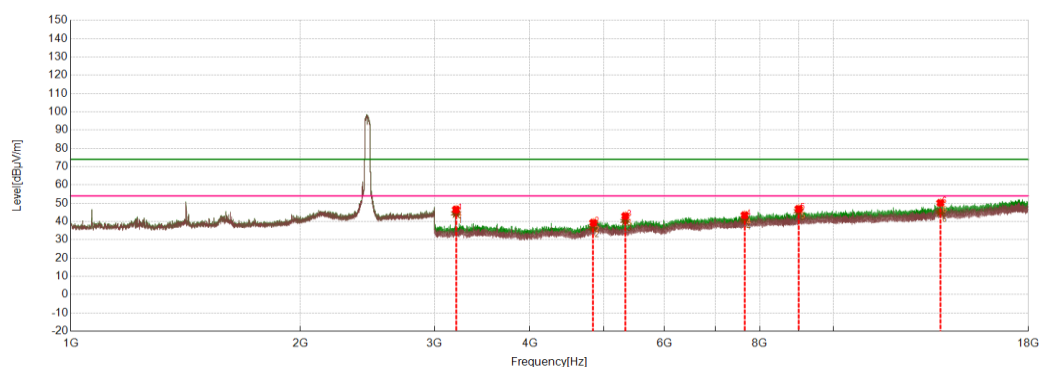


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	46.56	74.00	27.44	44.36	54.00	9.64	150	160	Vertical	PASS
2	4842.0000	-14.50	39.31	74.00	34.69	36.49	54.00	17.51	150	136	Vertical	PASS
3	5333.5000	-13.67	43.00	74.00	31.00	40.22	54.00	13.78	150	113	Vertical	PASS
4	7645.5000	-8.56	43.47	74.00	30.53	40.85	54.00	13.15	150	59	Vertical	PASS
5	9000.0000	-6.32	46.90	74.00	27.10	45.60	54.00	8.40	150	12	Vertical	PASS
6	13804.5000	1.17	50.18	74.00	23.82	45.14	54.00	8.86	150	74	Vertical	PASS

Mode:


AX20-2412-MIMO

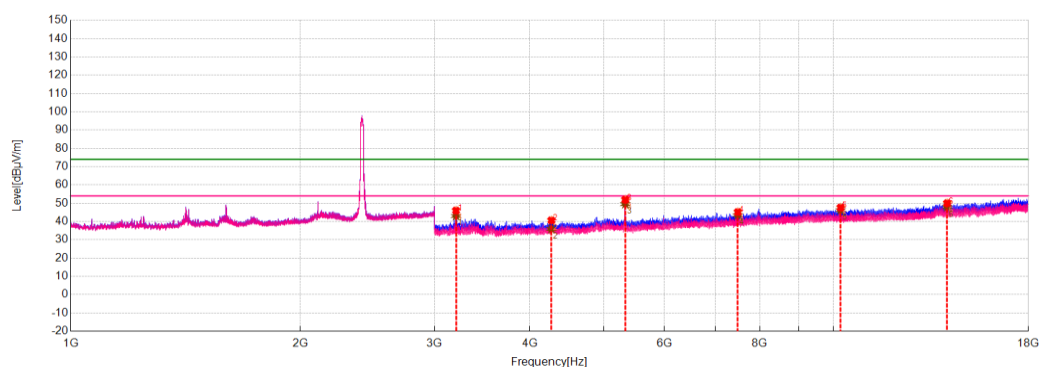

★ PK Detector ★ AV Detector

Final Data List


NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	45.96	74.00	28.04	42.97	54.00	11.03	150	247	Horizontal	PASS
2	4267.0000	-16.95	40.61	74.00	33.39	35.88	54.00	18.12	150	114	Horizontal	PASS
3	5333.5000	-13.67	51.94	74.00	22.06	49.49	54.00	4.51	150	161	Horizontal	PASS
4	7490.0000	-8.97	45.14	74.00	28.86	43.39	54.00	10.61	150	28	Horizontal	PASS
5	10214.5000	-4.18	47.61	74.00	26.39	46.21	54.00	7.79	150	254	Horizontal	PASS
6	14089.0000	1.08	50.03	74.00	23.97	47.83	54.00	6.17	150	224	Horizontal	PASS

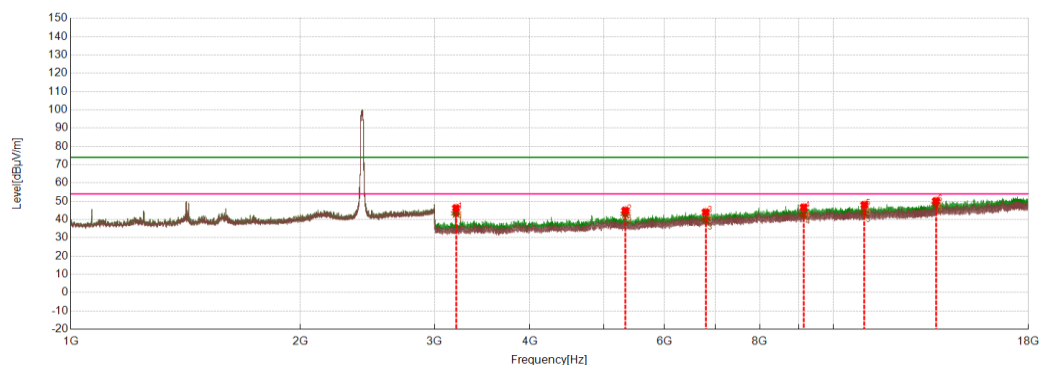


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	46.26	74.00	27.74	43.31	54.00	10.69	150	188	Vertical	PASS
2	5333.0000	-13.66	44.96	74.00	29.04	43.04	54.00	10.96	150	88	Vertical	PASS
3	6797.0000	-10.08	44.00	74.00	30.00	39.85	54.00	14.15	150	73	Vertical	PASS
4	9137.0000	-6.07	46.66	74.00	27.34	42.59	54.00	11.41	150	211	Vertical	PASS
5	10973.0000	-3.31	48.00	74.00	26.00	43.90	54.00	10.10	150	5	Vertical	PASS
6	13619.5000	0.50	50.14	74.00	23.86	48.25	54.00	5.75	150	127	Vertical	PASS

Mode:	AX20-2437-MIMO
-------	----------------

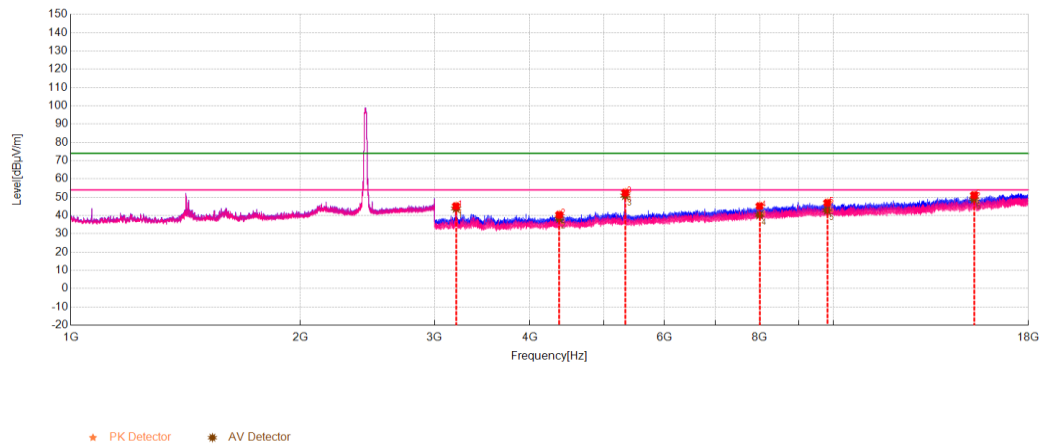


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	45.12	74.00	28.88	43.84	54.00	10.16	150	146	Horizontal	PASS
2	4369.5000	-16.84	40.42	74.00	33.58	38.21	54.00	15.79	150	200	Horizontal	PASS
3	5333.0000	-13.66	52.53	74.00	21.47	50.83	54.00	3.17	150	192	Horizontal	PASS
4	7998.5000	-7.73	45.13	74.00	28.87	40.22	54.00	13.78	150	200	Horizontal	PASS
5	9812.0000	-4.36	46.93	74.00	27.07	42.77	54.00	11.23	150	200	Horizontal	PASS
6	15281.0000	2.61	51.17	74.00	22.83	48.87	54.00	5.13	150	192	Horizontal	PASS

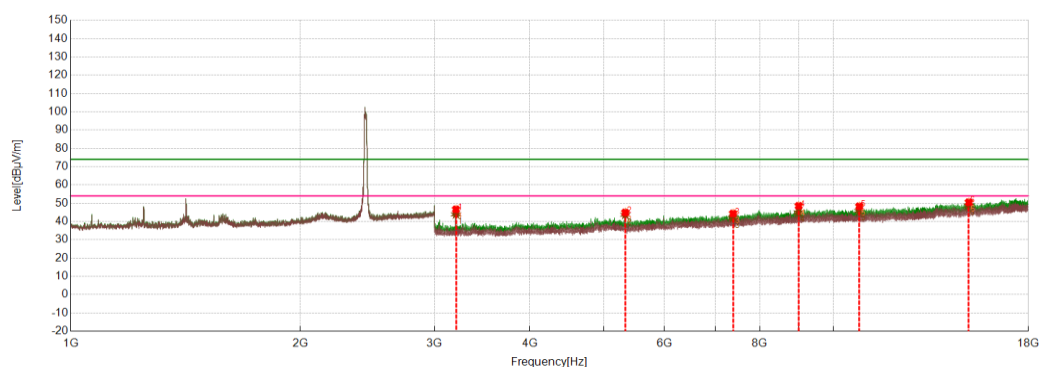


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	46.63	74.00	27.37	43.89	54.00	10.11	150	177	Vertical	PASS
2	5333.0000	-13.66	44.91	74.00	29.09	43.65	54.00	10.35	150	317	Vertical	PASS
3	7382.5000	-9.36	44.36	74.00	29.64	41.77	54.00	12.23	150	192	Vertical	PASS
4	9000.5000	-6.32	48.54	74.00	25.46	45.01	54.00	8.99	150	37	Vertical	PASS
5	10808.0000	-3.42	48.30	74.00	25.70	45.76	54.00	8.24	150	231	Vertical	PASS
6	15042.0000	1.98	50.53	74.00	23.47	48.65	54.00	5.35	150	184	Vertical	PASS

Mode:	AX20-2462-MIMO
-------	----------------

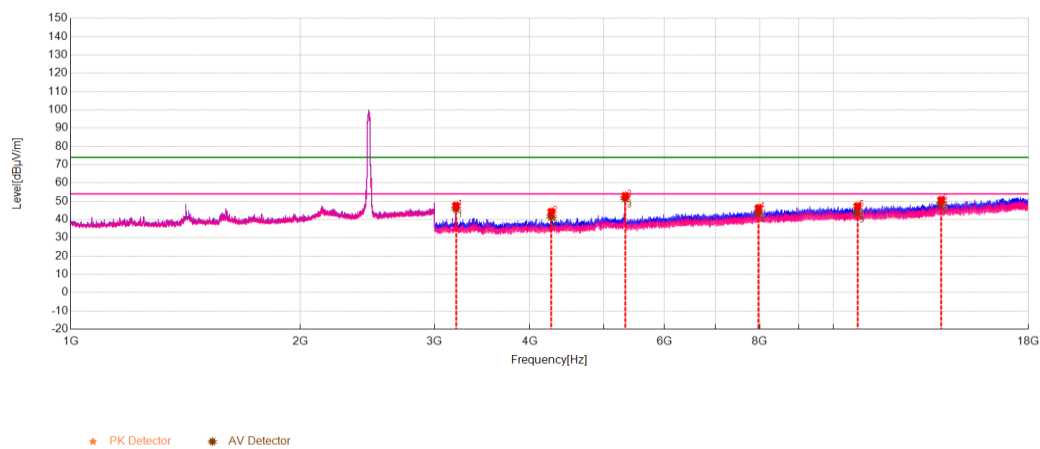

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	47.59	74.00	26.41	46.00	54.00	8.00	150	132	Horizontal	PASS
2	4266.5000	-16.95	44.28	74.00	29.72	41.58	54.00	12.42	150	186	Horizontal	PASS
3	5333.0000	-13.66	52.91	74.00	21.09	51.67	54.00	2.33	150	193	Horizontal	PASS
4	7972.5000	-7.57	46.29	74.00	27.71	43.65	54.00	10.35	150	193	Horizontal	PASS
5	10746.0000	-3.49	47.30	74.00	26.70	43.64	54.00	10.36	150	39	Horizontal	PASS
6	13837.5000	0.97	50.66	74.00	23.34	48.52	54.00	5.48	150	61	Horizontal	PASS

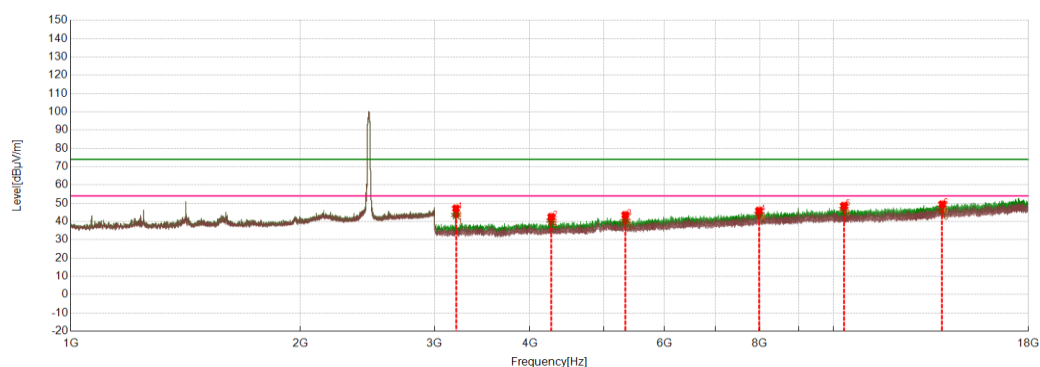


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	47.16	74.00	26.84	43.58	54.00	10.42	150	193	Vertical	PASS
2	4266.5000	-16.95	42.55	74.00	31.45	40.37	54.00	13.63	150	8	Vertical	PASS
3	5333.5000	-13.67	43.58	74.00	30.42	40.28	54.00	13.72	150	317	Vertical	PASS
4	7986.0000	-7.33	45.95	74.00	28.05	44.04	54.00	9.96	150	193	Vertical	PASS
5	10318.0000	-3.90	48.60	74.00	25.40	46.77	54.00	7.23	150	247	Vertical	PASS
6	13879.5000	1.02	49.39	74.00	24.61	46.20	54.00	7.80	150	170	Vertical	PASS

Mode:


AX40-2422-MIMO

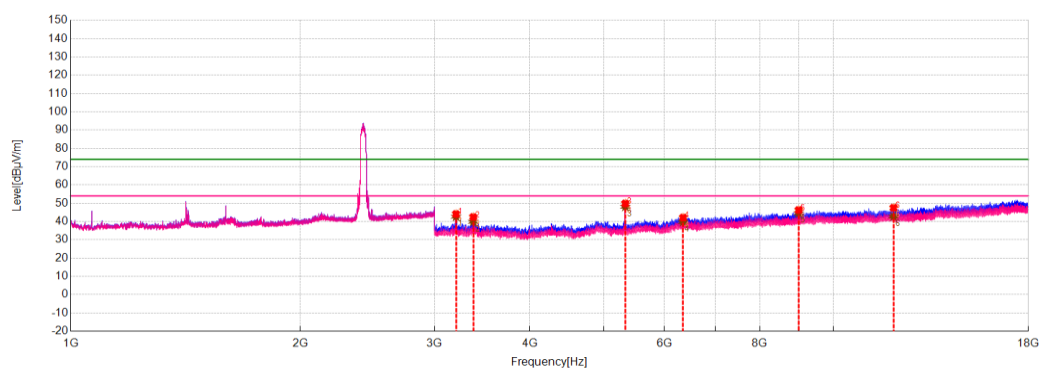

★ PK Detector ★ AV Detector

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.09	74.00	29.91	42.58	54.00	11.42	150	130	Horizontal	PASS
2	3370.5000	-19.91	42.45	74.00	31.55	39.80	54.00	14.20	150	176	Horizontal	PASS
3	5333.0000	-13.66	49.86	74.00	24.14	48.02	54.00	5.98	150	200	Horizontal	PASS
4	6349.5000	-10.15	42.12	74.00	31.88	39.69	54.00	14.31	150	114	Horizontal	PASS
5	9000.0000	-6.32	46.27	74.00	27.73	44.47	54.00	9.53	150	184	Horizontal	PASS
6	11983.0000	-1.80	47.48	74.00	26.52	42.67	54.00	11.33	150	60	Horizontal	PASS

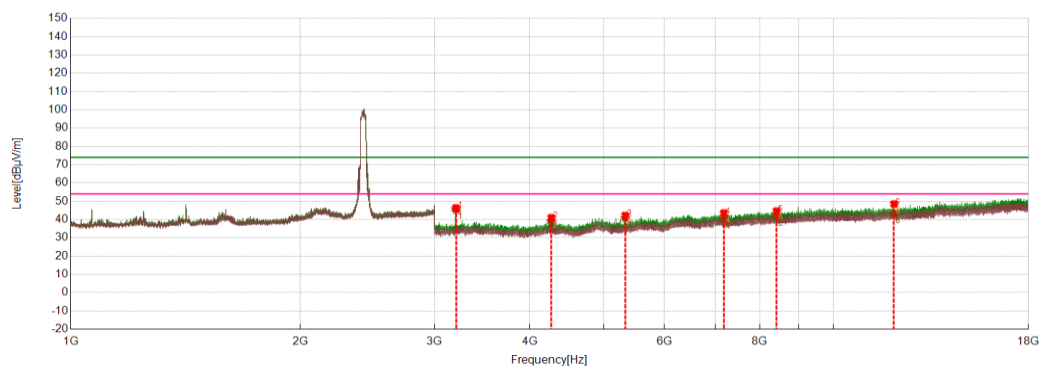


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	46.31	74.00	27.69	45.39	54.00	8.61	150	177	Vertical	PASS
2	4266.5000	-16.95	40.99	74.00	33.01	38.75	54.00	15.25	150	115	Vertical	PASS
3	5333.0000	-13.66	42.20	74.00	31.80	40.78	54.00	13.22	150	100	Vertical	PASS
4	7180.0000	-9.67	43.53	74.00	30.47	40.18	54.00	13.82	150	348	Vertical	PASS
5	8418.0000	-7.26	44.62	74.00	29.38	41.68	54.00	12.32	150	30	Vertical	PASS
6	12000.5000	-1.72	48.48	74.00	25.52	42.93	54.00	11.07	150	341	Vertical	PASS

Mode:


AX40-2437-MIMO

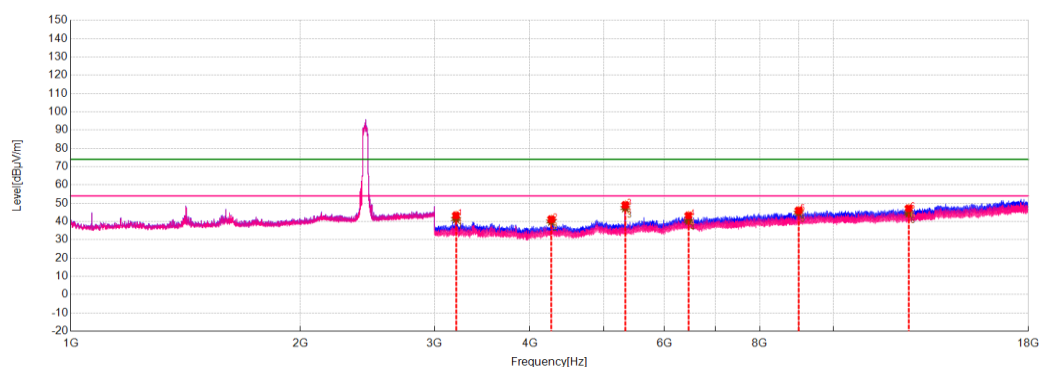

★ PK Detector ★ AV Detector

Final Data List


NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	43.36	74.00	30.64	41.27	54.00	12.73	150	169	Horizontal	PASS
2	4266.0000	-16.95	41.27	74.00	32.73	39.97	54.00	14.03	150	122	Horizontal	PASS
3	5333.0000	-13.66	49.07	74.00	24.93	47.35	54.00	6.65	150	185	Horizontal	PASS
4	6453.5000	-10.28	43.27	74.00	30.73	40.26	54.00	13.74	150	292	Horizontal	PASS
5	9000.0000	-6.32	46.06	74.00	27.94	44.85	54.00	9.15	150	169	Horizontal	PASS
6	12543.5000	-1.03	47.20	74.00	26.80	44.33	54.00	9.67	150	340	Horizontal	PASS

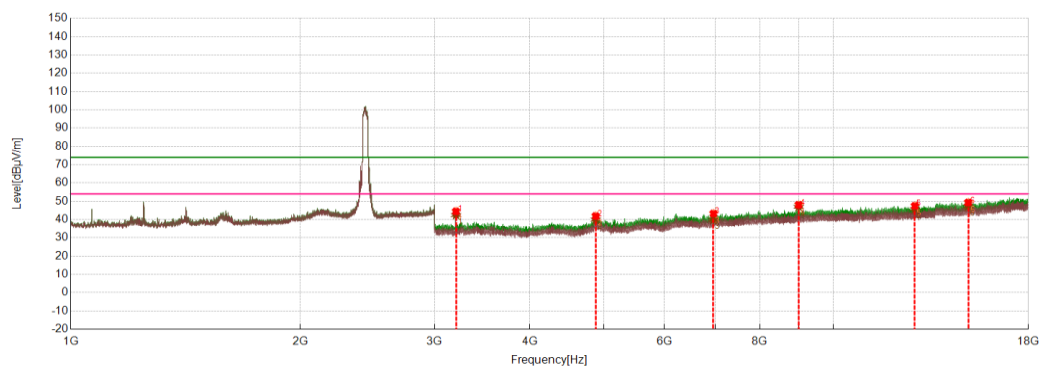


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3199.5000	-20.54	44.44	74.00	29.56	42.38	54.00	11.62	150	160	Vertical	PASS
2	4878.0000	-14.12	41.89	74.00	32.11	39.89	54.00	14.11	150	333	Vertical	PASS
3	6959.0000	-9.70	43.24	74.00	30.76	39.90	54.00	14.10	150	167	Vertical	PASS
4	9000.0000	-6.32	48.01	74.00	25.99	46.89	54.00	7.11	150	35	Vertical	PASS
5	12781.5000	-0.97	47.43	74.00	26.57	45.66	54.00	8.34	150	128	Vertical	PASS
6	15011.5000	2.16	49.30	74.00	24.70	47.17	54.00	6.83	150	121	Vertical	PASS

Mode:	AX40-2452-MIMO
-------	----------------

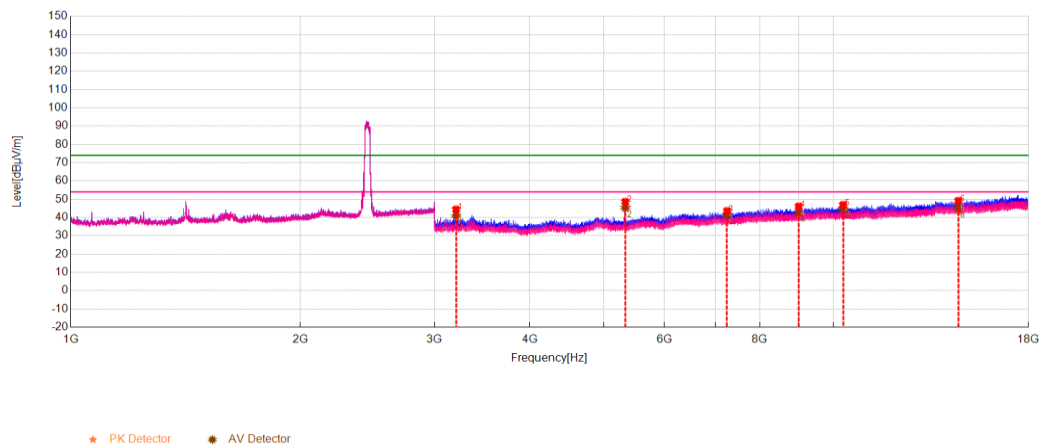

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.38	74.00	29.62	40.78	54.00	13.22	150	245	Horizontal	PASS
2	5332.5000	-13.66	48.58	74.00	25.42	45.29	54.00	8.71	150	199	Horizontal	PASS
3	7251.0000	-9.39	43.55	74.00	30.45	41.43	54.00	12.57	150	57	Horizontal	PASS
4	9000.5000	-6.32	46.03	74.00	27.97	42.70	54.00	11.30	150	222	Horizontal	PASS
5	10289.0000	-3.82	46.90	74.00	27.10	44.74	54.00	9.26	150	112	Horizontal	PASS
6	14568.0000	1.71	49.08	74.00	24.92	45.09	54.00	8.91	150	269	Horizontal	PASS

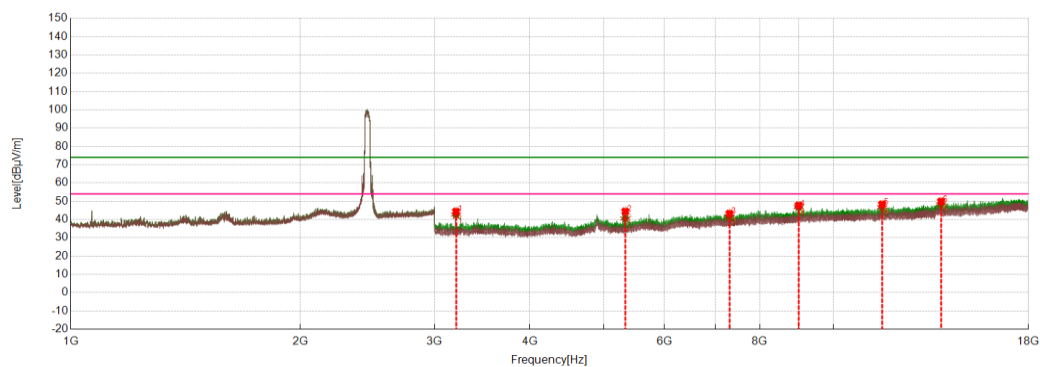

★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3200.0000	-20.53	44.41	74.00	29.59	42.62	54.00	11.38	150	168	Vertical	PASS
2	5333.5000	-13.67	44.45	74.00	29.55	40.53	54.00	13.47	150	90	Vertical	PASS
3	7303.5000	-9.42	43.26	74.00	30.74	41.52	54.00	12.48	150	137	Vertical	PASS
4	9000.0000	-6.32	47.72	74.00	26.28	46.75	54.00	7.25	150	43	Vertical	PASS
5	11576.0000	-2.08	48.29	74.00	25.71	46.74	54.00	7.26	150	261	Vertical	PASS
6	13831.5000	1.02	49.90	74.00	24.10	48.37	54.00	5.63	150	121	Vertical	PASS