

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



东莞市金赞智能科技有限公司

产品规格书

PRODUCT SPECIFICATION

客 户:	深圳市富士达工业有限公司
CUSTOMER:	_____
客户料号:	190-0455-0-000
CUST P/N:	_____
金赞料号:	J30-000961-001
K C P/N:	_____
产品型号:	20.5*39.5*0.08*80P*11TS*60MM
D E S E :	_____
日 期:	2026.1.21
D A T E :	_____
版 本:	A.0
VERSION :	_____

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
王振伟			

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

Dongguan Jinzan Intelligent Technology Co., Ltd.

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

**Dongguan Jinzan Intelligent Technology Co., Ltd.**

Specification

PRODUCT SPECIFICATION

client :	Shenzhen Fudida Industrial Co., Ltd.
CUSTOMER:	_____
Customer Part Number:	190-0455-0-000
CUST P/N:	_____
Jinzai Material Number:	J30-000961-001
K C P/N:	_____
product model :	20. 5*39. 5*0. 08*80P*11TS*60MM
D E S E :	_____
date :	2026. 1. 21
D A T E :	_____
edition :	A. 0
VERSION :	_____

(Customer acknowledges receipt of the acceptance stamp) **ACCEPTANCE STAMP**

Fiction PREPARED BY	Merchandiser MERCHANDISER	Engineering Review ENGINEER CHECKED BY	Ratify APPROVED BY
Wang Zhenwei			

Address: No.2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114 Fax: 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

File Number: FilNo: KC-JZ-09-008

Dongguan Jinzan Intelligent Technology Co., Ltd.
DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Version Change Notification
Version Change History

client material
CUST P/N

Gold phase
KC DESE

Measure tool
mould Number:

20. 5*39. 5*0. 08*80P*11TS*60M
M

Edition Rev.	Before Change Before Change	Modified Content DESCRIPTION(Content Or Reason ForChanged)	Date Date	Reviser
A. 0	--	New Release (Initial Release)	2026/1/21	Wang Zhenwei

Fiction
PREPARED BY

Wang Zhenwei

Engineering Review:-checked by Engineer

Li Jin


Address: No.2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114 Fax: 86-076986015646

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS*60M
M

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

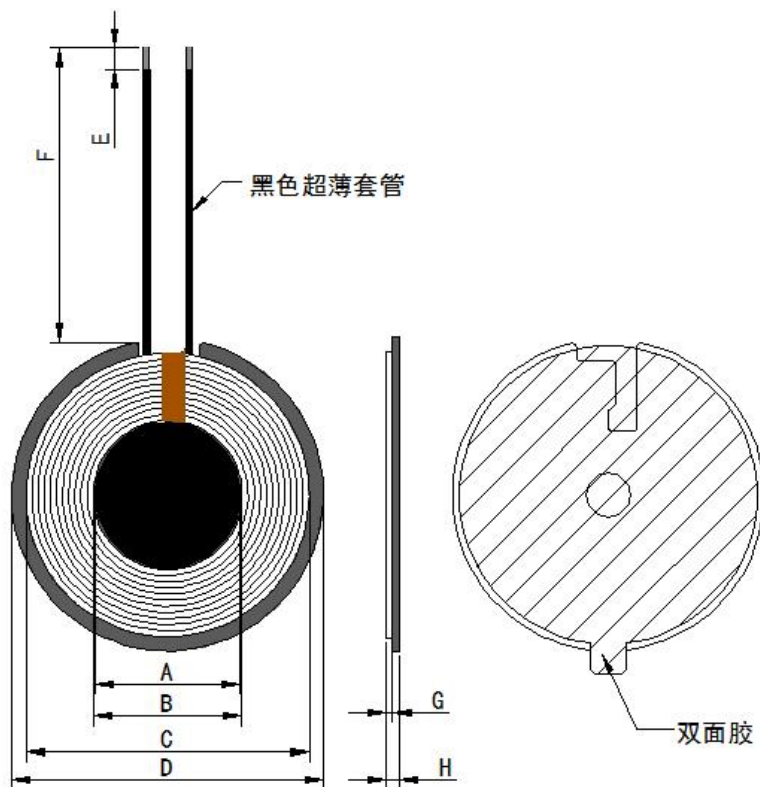

单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H
20±0.5	20.5±0.5	39.5±1	42.9±0.5	3±1	60±2	0.95±0.1	3.0MAX

PS:1. (F) 为磁外引线长度; 2. (H) 包含进线, 不包含离型纸.

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*80P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/Paste)

拟制
PREPARED BY

王振伟

工程审核
ENGINEER CHECKED BY

李进

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008


Dongguan Jinzan Intelligent Technology Co., Ltd.

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification Details

Specificationclient material
CUST P/NGold
KC DESE20.5*39.5*0.08*80P*11TS*60M
M

1. Overall dimensions of products:

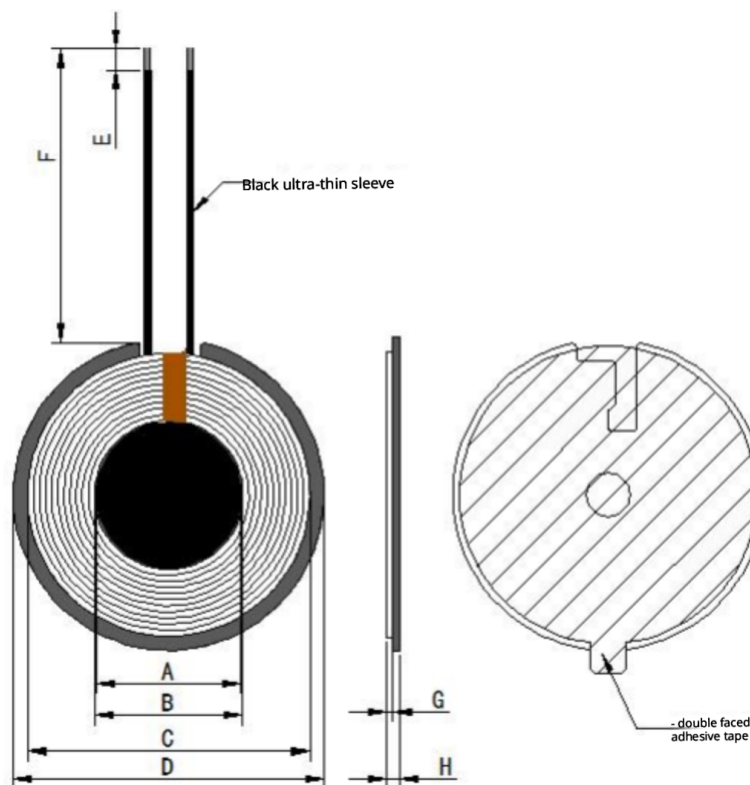

Unit: Millimeter (mm)

A	B	C	D	E	F	G	H
20±0.5	20.5±0.5	39.5±1	42.9±0.5	3±1	60±2	0.95±0.1	3.0MAX

PS: 1. (F) represents the length of the magnetic external lead; 2. (H) includes the incoming wire but excludes the release paper.

Number of turns Turns	Wire Diameter Wire Dia.	Winding Method: Spaced/Closed; Wdg. Type: Spaced/ Closed	Direction of winding Wdg. Direction	Intersect: Yes/ No Yes/Not	Coil: Positive/Anti Pa- ste
11TS	0.08*80P Hot- drawn stranded wire	Close	Anti-clockwise	Yes	Anti-Paste

Fiction
PREPARED BY

Engineering Review:-checked by Engineer

Wang Zhenwei

Jin

Address: No.2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

File Number: FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS*60M
M

所有材料要求合格 ROHS 标准

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: 25±10℃, 湿度 RELATIVE HUMIDITY: 65±10%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	线圈加磁片: 8.1uH±5%	100kHz/1V	LCZ METER 1062
2	DCR	S-F	阻值: 60mΩ MAX	/	LCZ METER 1062
3	Q 值	S-F	Q 值: 85MIN	100kHz/1V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code	单位用量 Dosage per unit
1	线材	0.08*80P 热风绞线	/	/	4.65G
2	大磁片	G42.9*5.2*1.0H 带孔带槽	GCP-T-00292	KL	1pcs
3	小磁片	圆形硬磁圆形 20*1.0H 无孔无槽	GCP-T-00264	LX	1pcs
4	大双面胶	圆形 EVA 双面胶 40*0.8H 硬度 45, 一面背胶一面 3M9448A 仿品带手撕	SMJ-EVA-0110	FL	1pcs
5	小双面胶	18*0.08H 带手撕	SMJ-T-0010	HWD	1pcs
6	胶水	JS-E7202 (加稠) 白胶	E7202W	HZY	0.03g
7	锡条	环保无铅焊锡条	无铅高温锡条	XC	0.15g
8	黑色热缩套管	Φ1.0*58MM 超薄	/	/	1pcs

拟制
PREPARED BY

王振伟

工程审核
ENGINEER CHECKED BY

李进

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

Dongguan Jinzan Intelligent Technology Co., Ltd.

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification Details

Specificationclient material
CUST P/NGold
KC DESE20.5*39.5*0.08*80P*11TS*60M
M**All materials must comply with the ROHS standards.**

2. Electrical Characteristics: Temperature: 25 ± 10°C; Relative Humidity: 65 ± 10%.

Order number NO.	Project ITEM	Terminal TERMINAL	Standard SPECIFICATION	Test condition TEST FREQUENCY	Measuring and test instruments TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic sheet: 8.1 μH ± 5%	100kHz/1V	LCZ METER 1062
2	DCR	S-F	Resistance value: 60 mΩ MAX	/	LCZ METER 1062
3	Q price	S-F	Q Value: 85 MIN	100kHz/1V	LCZ METER 1062

3. Bill of Materials:

Order Number NO.	Material Name Material name	Product Name Description	Material Code: Material Code	Manufacturer Code Vendor code	Unit dosage: Dosage per unit
1	Wire stock	0.08*80P hot-drawn wire	/	/	4.65G
2	Large magnetic disk	G42.9*5.2*1.0H, with holes and grooves	GCP-T-00292	KL	1pcs
3	Small magnetic disk	Circular hard magnetic disc, size 20×1.0 cm, flat surface with no holes or grooves	GCP-T-00264	LX	1pcs
4	Double-sided adhesive tape	Circular EVA double-sided adhesive tape, dimensions 40×0.8 mm in height, hardness grade 45; one side coated with adhesive, the other side with 3M 9448A adhesive material – counterfeit product featuring a tear-off design.	SMJ-EVA-0110	FL	1pcs
5	Small double-sided adhesive tape	18*0.08H, with tear-off handle	SMJ-T-0010	HWD	1pcs
6	Glue	JS-E7202 (Thickened) White Adhesive	E7202W	HZY	0.03g
7	Tin bar	Environmental-friendly, lead-free solder wire	Lead-free high-temperature tin bar	XC	0.15g
8	Black heat-shrink sleeve	F 1.0*58MM Ultra-thin	/	/	1pcs

Fiction
PREPARED BY

Wang Zhenwei

Engineering Review:-checked by Engineer

Jin

Address: No.2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

File Number: FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS*60M
M

9	金手指胶布	3mm	高温胶纸 3MM	JRM	30mm
---	-------	-----	----------	-----	------

4. 包装材料 (PACKAGING MATERIALS):

序号 NO	材料名称 Material name	规格 specifications	数量 quantity
1	珍珠棉 Pearl cotton	32 格 380*270*62mm	160pcs
2	纸箱 carton	常规 40*28*21cm	480pcs

拟制
PREPARED BY

王振伟

工程审核
ENGINEER CHECKED BY

李进

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

Dongguan Jinzan Intelligent Technology Co., Ltd.

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification Details

Specificationclient material
CUST P/NGold Plate
KC DESE20.5*39.5*0.08*80P*11TS*60M
M

9	Gold Finger Bandage	3mm	High-strength adhesive tape 3 mm	JRM	30mm
---	---------------------	-----	----------------------------------	-----	------

4. Packaging Materials (PACKAGING MATERIALS):

Order number NO	Material Name	Specification Details	Quantity
1	Pearl cotton	32 Size: 380*270*62 mm	160pcs
2	Carton	Standard size: 40*28*21 cm	480pcs

Fiction
PREPARED BY

Wang Zhenwei

Engineering Review:-checked by Engineer

Li Jin

Address: No.2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

File Number: FilNo: KC-JZ-09-008