

Prüfbericht-Nr.: Test report no.:	CN257X55 002	Auftrags-Nr.: Order no.:	168568375	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-08-05	
Auftraggeber: Client:	Ugreen Group Limited UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, 518000, China			
Prüfgegenstand: Test item:	2-in-1 Magnetic Wireless Charger			
Bezeichnung / Typ-Nr.: Identification / Type no.:	W701			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2025-09-09	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A004086536 001~004			
Prüfzeitraum: Testing period:	2025-09-27 - 2025-10-21			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	<u>X</u>  Lin Lin	genehmigt von: authorized by:	<u>X</u>  Bell Hu	
Datum: Date:	2025-10-27	Ausstellungsdatum: Issue date:	2025-10-27	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / Other:	FCC ID: 2AQI5-W701			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN257X55 002
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN257X55 002
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

Prüfbericht - Nr.: CN257X55 002
Test Report No.:

Seite 5 von 16
Page 5 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2024-10-31	2025-10-30
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2024-10-31	2025-10-30
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Prüfbericht - Nr.: CN257X55 002
Test Report No.:Seite 7 von 16
Page 7 of 16

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2026-02-09
Artificial Mains Network	R&S	ENV216	102333	2026-07-18
EMC32 Test Software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 2-in-1 Magnetic Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	2-in-1 Magnetic Wireless Charger
Type Designation:	W701
Product Number (P/N) code:	75252, 75252P, 75252X, 75252A, 75252B, 75252U, 75252JP, 75252ZD, 75252T, 85998, 85998P, 85998X, 85998A, 85998B, 85998U, 85998JP, 85998ZD, 85998T, 85880, 85880P, 85880X, 85880A, 85880B, 85880U, 85880JP, 85880ZD, 85880T
FCC ID:	2AQI5-W701
Operating Voltage:	USB-C1(IN) Input: 5Vdc, 3A/ 9Vdc, 3A/ 12Vdc, 2.5A/ 15Vdc, 2A Wireless Charging Output Power: iPhone 15.0W Max, AirPods 5.0 Max Wireless Charging Total Output Power: 20.0W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Wireless charging output power:	Magnetic Wireless Charger: 5W / 7.5W / 10W / 15W Max TWS Charging: 5W Max
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 360 kHz
Operating Frequency:	110.5 – 148.5 kHz & 360 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	5W / 7.5W / 10W / 15W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, MPP, 15W (Phone)
- E. On, Wireless Charging, 5W TWS
- F. On, Co-location mode (Worst case mode A~D + mode E)
- G. On, Standby mode
- H. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W701 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Wireless charge Load	YBZ	YBZ-MPP25	N/A
AC/DC Adapter	HUAWEI	HW-200325CP1	N/A
Digital Multimeter	Fluke	18B+	N/A
AirPods Pro	Apple	AirPods Pro2	N/A
Cell Phone	Apple	iPhone 16Plus	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

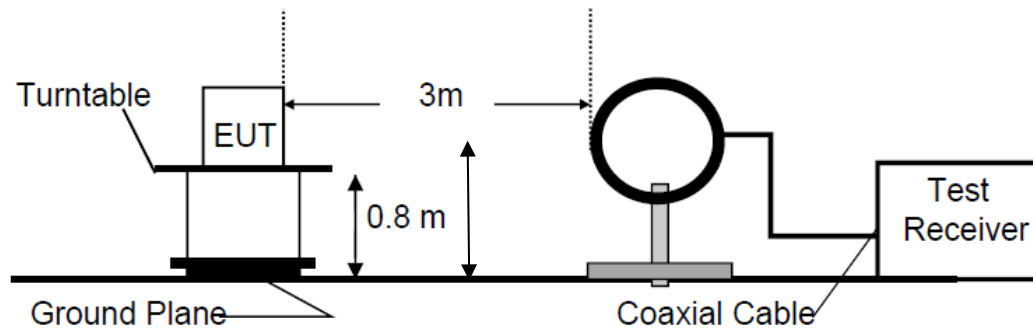


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


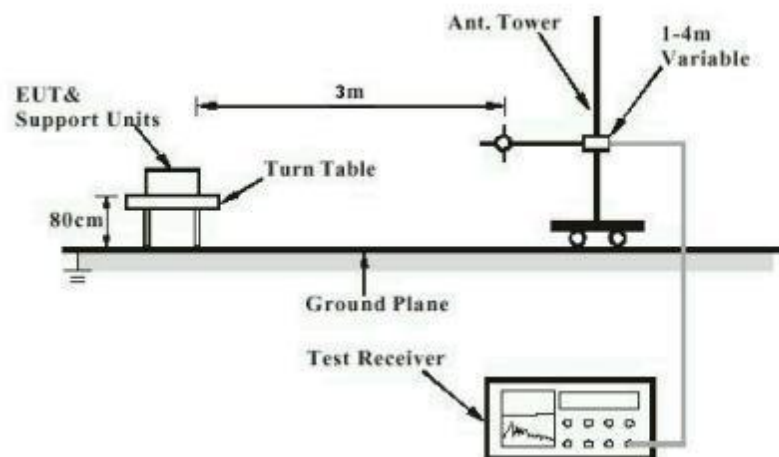


Diagram of Measurement Configuration for Mains Conduction Measurement

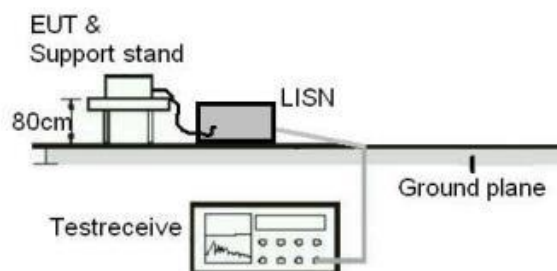

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN257X55 002
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-09-27 to 2025-09-28
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G
Ambient temperature	: 23 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN257X55 002
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10: 2020
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2025-10-01 to 2025-10-14
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G
Ambient temperature	: 23 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN257X55 002
Test Report No.:

Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-10-21
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G
Ambient temperature	: 24.5 °C
Relative humidity	: 51.3 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (EPP 10W).....	2
Wireless charging (MPP 15W)	3
Wireless charging (TWS 5W)	4
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	5
Wireless charging (EPP 10W).....	5
Wireless charging (MPP 15W)	16
Wireless charging (TWS 5W)	27
Wireless charging (Co-location).....	38
Standby mode	43
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	48


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (EPP 10W)

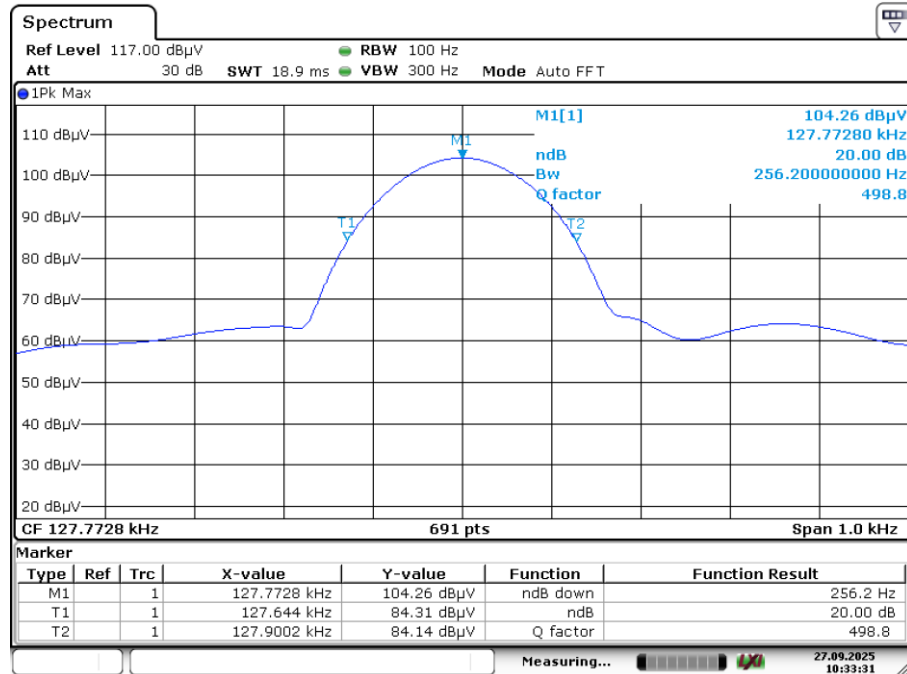


Date: 27.SEP.2025 10:33:32

Wireless charging (MPP 15W)

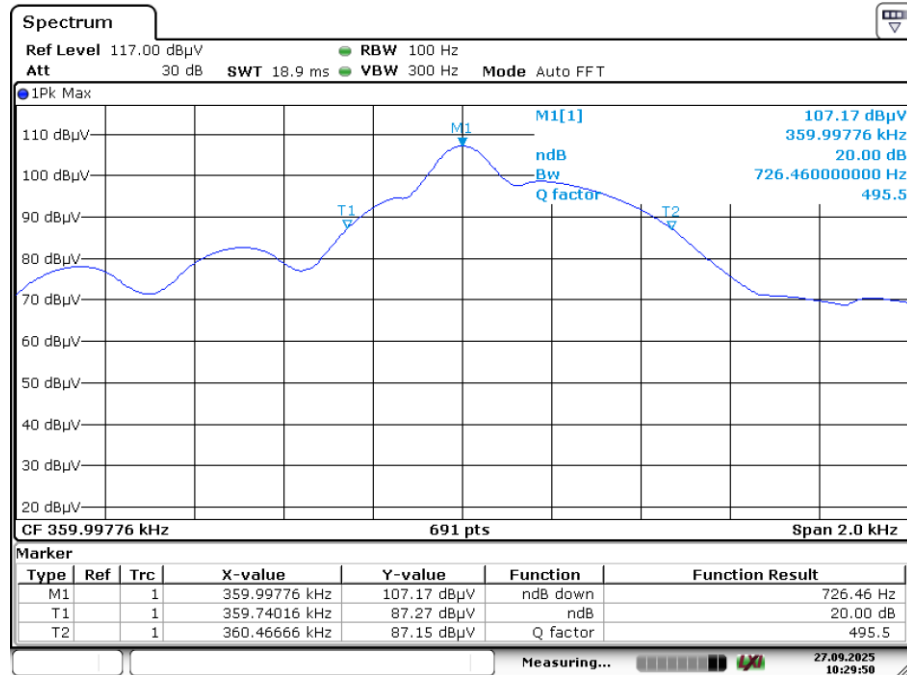

Date: 27.SEP.2025 10:29:51

Wireless charging (TWS 5W)

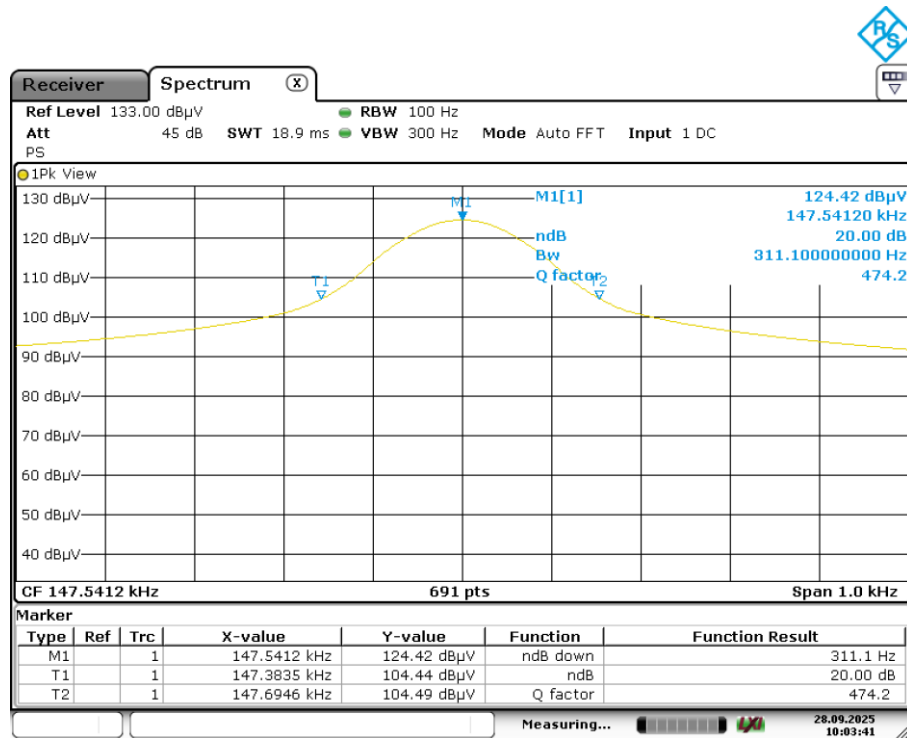

Date: 28.SEP.2025 10:03:41


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (EPP 10W)

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charger
Model:	W701
Test Mode:	Charging
Order No/Sample No:	168568375/A004086536-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

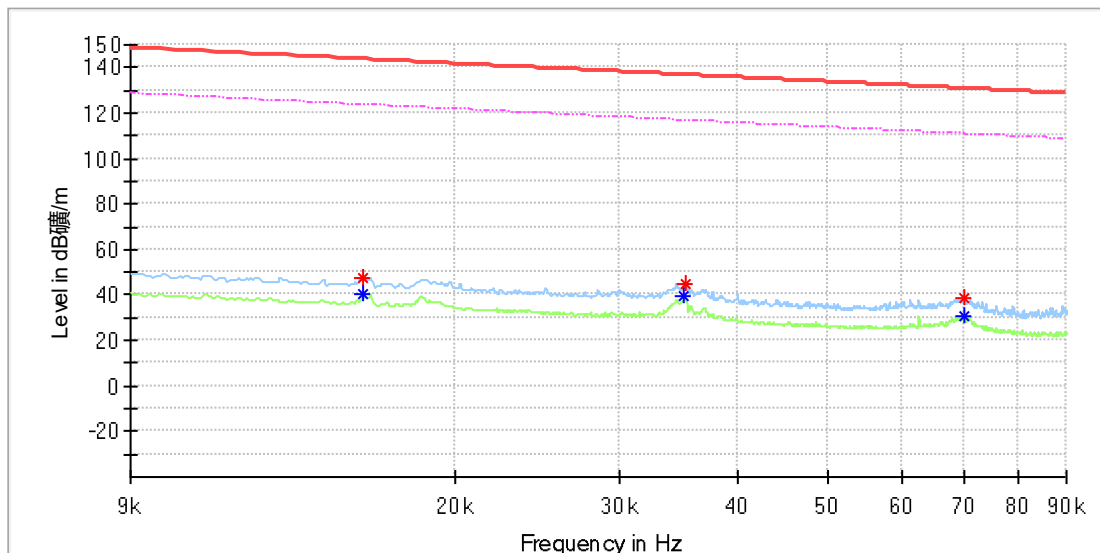


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015943	47.27	---	143.54	96.26	100.0	X	8.0	20.0
0.015943	---	40.09	123.54	83.45	100.0	X	8.0	20.0
0.035151	---	39.82	116.67	76.85	100.0	X	2.0	20.0
0.035209	44.93	---	136.66	91.72	100.0	X	2.0	20.0
0.069866	---	31.13	110.71	79.57	100.0	X	0.0	20.0
0.069924	38.38	---	130.70	92.32	100.0	X	2.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

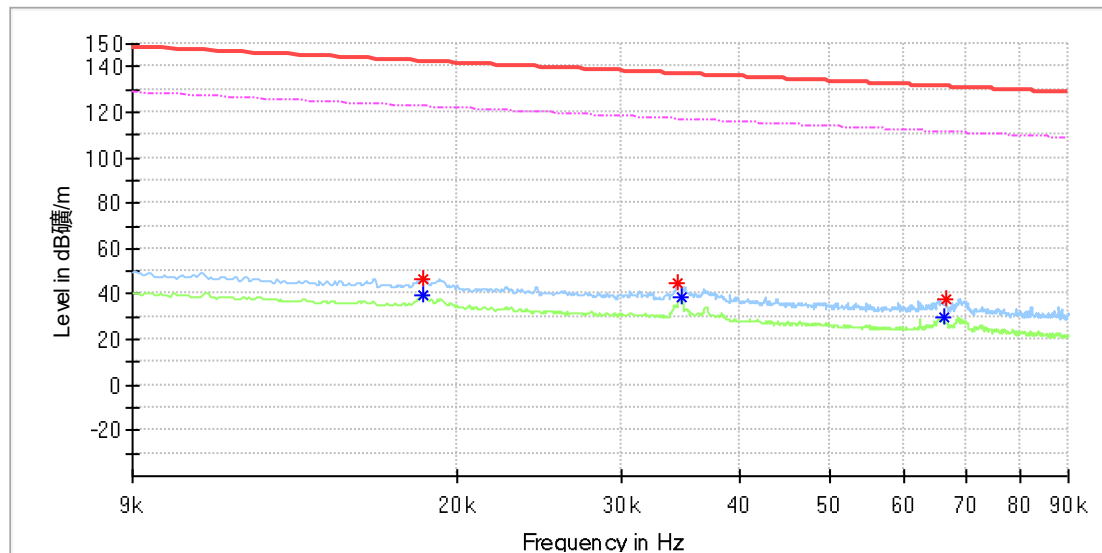


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	46.36	---	142.31	95.94	100.0	Y	242.0	20.0
0.018373	---	39.64	122.31	82.67	100.0	Y	242.0	20.0
0.034399	44.84	---	136.86	92.02	100.0	Y	54.0	20.0
0.034689	---	38.42	116.79	78.37	100.0	Y	35.0	20.0
0.066221	---	29.80	111.17	81.38	100.0	Y	42.0	20.0
0.066568	38.13	---	131.13	93.00	100.0	Y	42.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

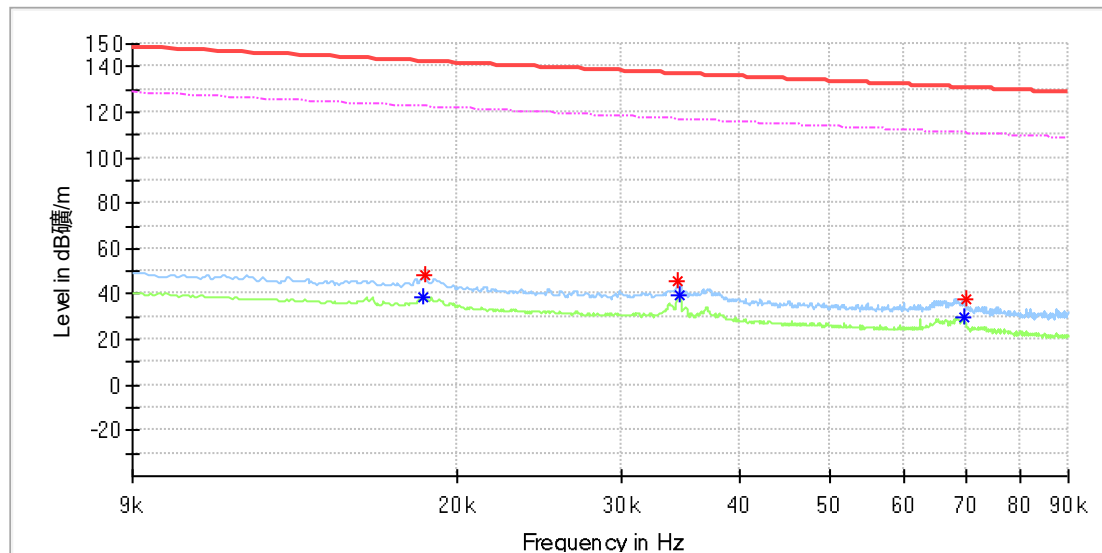


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	38.78	122.28	83.50	100.0	Z	60.0	20.0
0.018489	48.67	---	142.25	93.58	100.0	Z	66.0	20.0
0.034457	45.56	---	136.85	91.28	100.0	Z	37.0	20.0
0.034515	---	39.26	116.83	77.57	100.0	Z	26.0	20.0
0.069519	---	29.41	110.75	81.34	100.0	Z	26.0	20.0
0.069866	37.83	---	130.71	92.87	100.0	Z	0.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

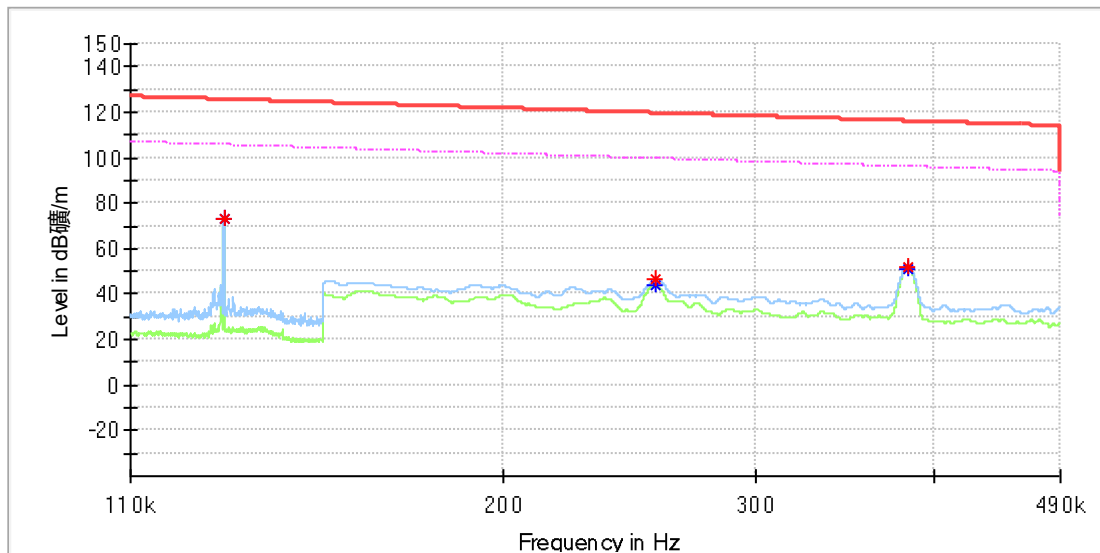


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	73.41	105.47	32.06	100.0	X	351.0	20.0
0.127772	73.45	---	125.47	52.02	100.0	X	351.0	20.0
0.255450	---	43.74	99.46	55.72	100.0	X	292.0	20.0
0.255950	46.17	---	119.44	73.27	100.0	X	292.0	20.0
0.383400	52.13	---	115.93	63.80	100.0	X	353.0	20.0
0.383450	---	51.45	95.93	44.48	100.0	X	353.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

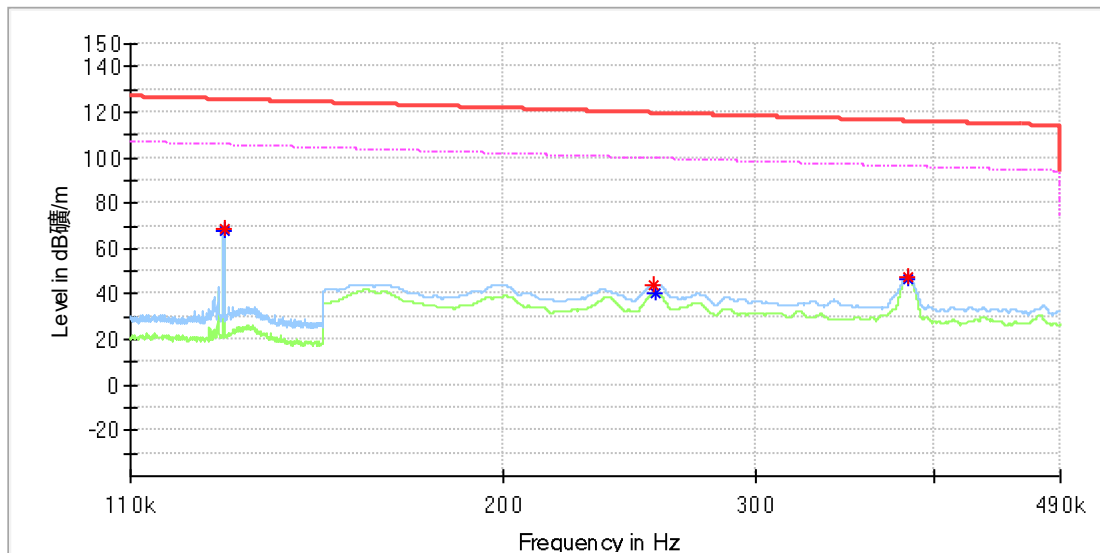


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	68.25	105.47	37.22	100.0	Y	82.0	20.0
0.127772	68.30	---	125.47	57.16	100.0	Y	82.0	20.0
0.255150	44.35	---	119.47	75.11	100.0	Y	191.0	20.0
0.255300	---	40.20	99.46	59.26	100.0	Y	191.0	20.0
0.383200	47.72	---	115.93	68.22	100.0	Y	90.0	20.0
0.383200	---	46.67	95.93	49.27	100.0	Y	90.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

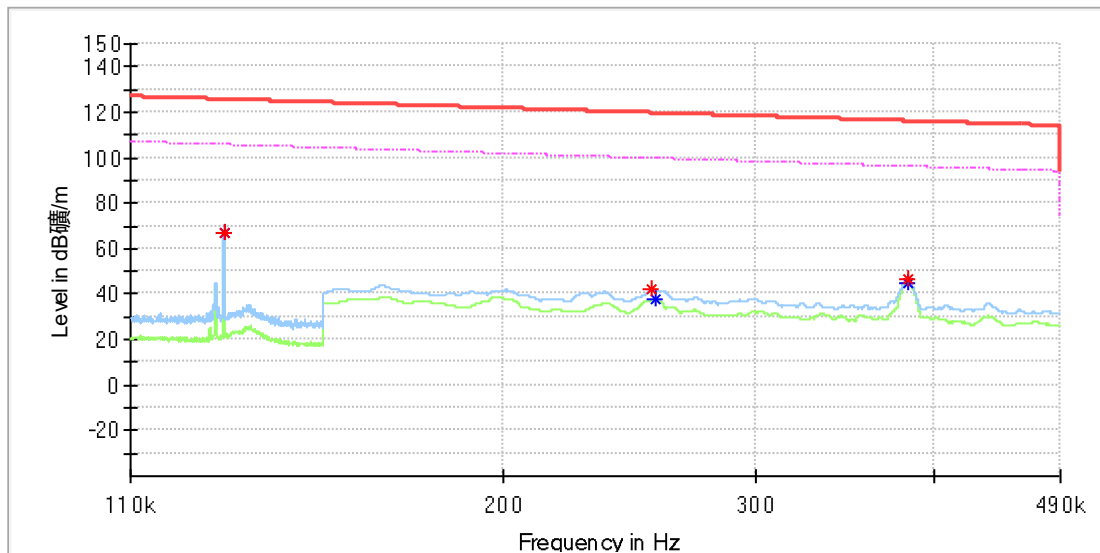


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	66.55	105.47	38.91	100.0	Z	351.0	20.0
0.127772	66.62	---	125.47	58.85	100.0	Z	351.0	20.0
0.254100	42.11	---	119.50	77.39	100.0	Z	297.0	20.0
0.256000	---	37.66	99.44	61.78	100.0	Z	279.0	20.0
0.383250	46.36	---	115.93	69.58	100.0	Z	0.0	20.0
0.383500	---	44.66	95.93	51.27	100.0	Z	0.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

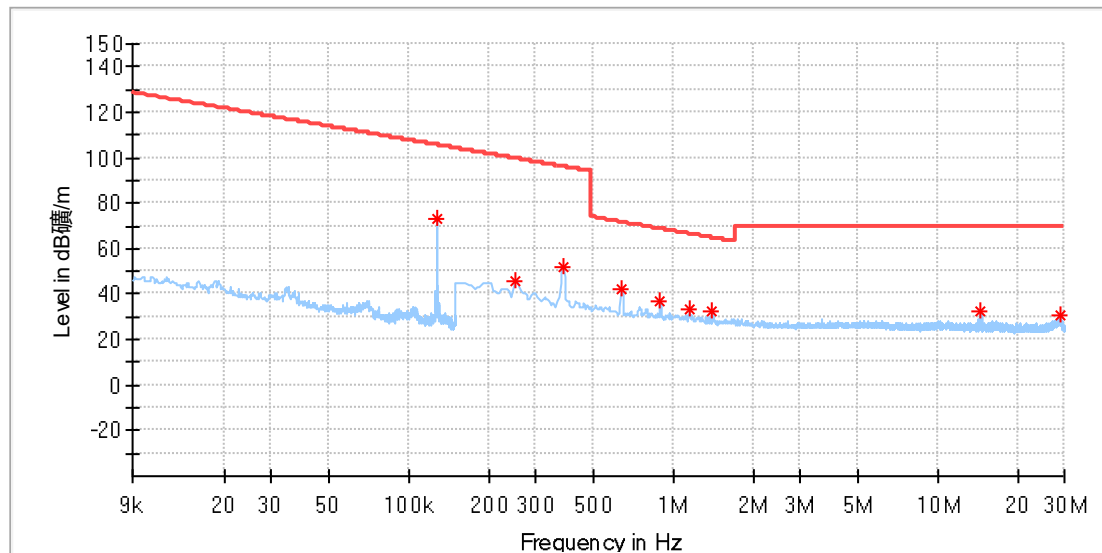

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	73.30	105.46	32.16	100.0	X	348.0	19.9
0.250963	45.91	99.61	53.69	100.0	X	103.0	19.9
0.382655	52.07	95.95	43.88	100.0	X	340.0	19.9
0.637258	42.34	71.52	29.19	100.0	X	0.0	19.9
0.891860	36.60	68.61	32.01	100.0	X	351.0	19.9
1.146463	33.11	66.44	33.33	100.0	X	37.0	19.9
1.401066	32.78	64.70	31.92	100.0	X	8.0	19.9
14.438493	32.71	69.50	36.79	100.0	X	128.0	20.3
28.731375	31.00	69.50	38.50	100.0	X	60.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

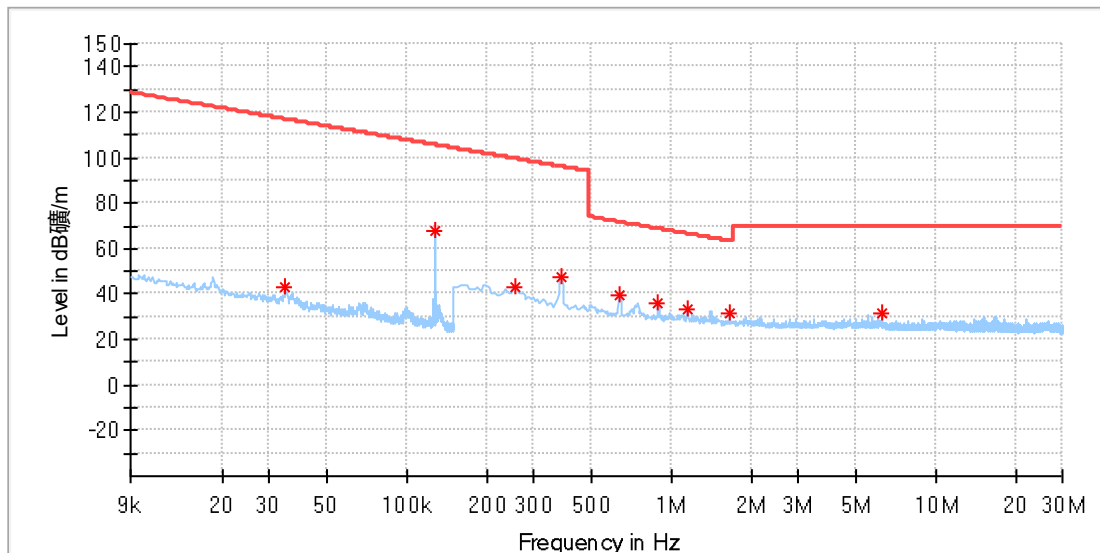

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034581	43.49	116.81	73.32	100.0	Y	43.0	19.9
0.127843	68.17	105.46	37.29	100.0	Y	86.0	19.9
0.255353	43.42	99.46	56.04	100.0	Y	178.0	19.9
0.382655	47.89	95.95	48.05	100.0	Y	88.0	19.9
0.637258	39.38	71.52	32.15	100.0	Y	84.0	19.9
0.891860	35.56	68.61	33.05	100.0	Y	135.0	19.9
1.150853	33.35	66.40	33.05	100.0	Y	131.0	19.9
1.660059	31.54	63.23	31.69	100.0	Y	124.0	20.0
6.260471	31.63	69.50	37.87	100.0	Y	343.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

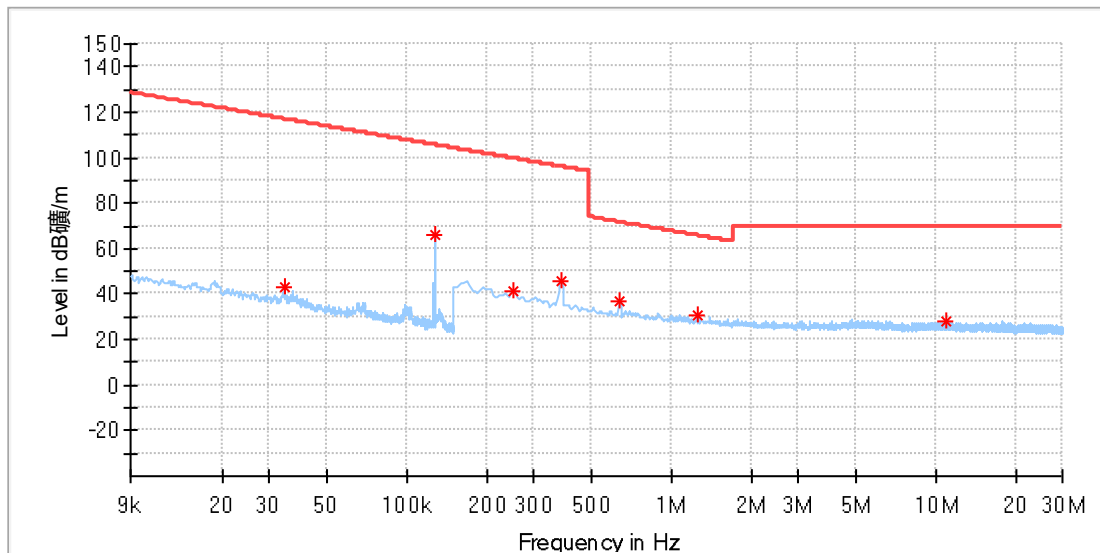

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034481	42.77	116.84	74.07	100.0	Z	41.0	19.9
0.127843	66.47	105.46	39.00	100.0	Z	356.0	19.9
0.250963	41.74	99.61	57.86	100.0	Z	252.0	19.9
0.382655	46.05	95.95	49.90	100.0	Z	357.0	19.9
0.637258	36.61	71.52	34.91	100.0	Z	0.0	19.9
1.251816	30.62	65.68	35.05	100.0	Z	36.0	19.9
10.992574	28.01	69.50	41.49	100.0	Z	137.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

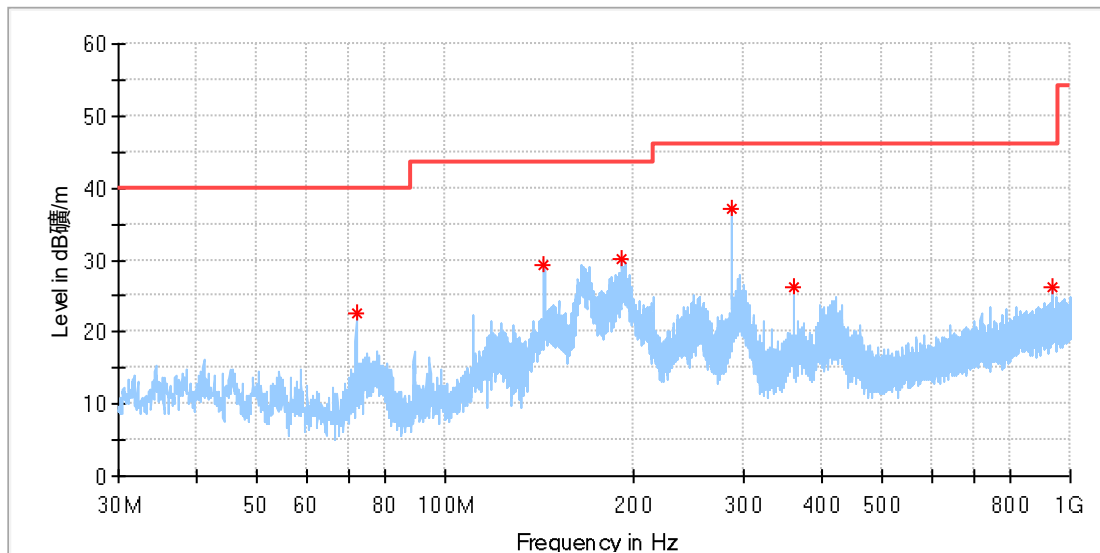

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
72.008462	22.66	40.00	17.34	100.0	H	333.0	-22.6
144.012308	29.25	43.50	14.25	100.0	H	228.0	-22.4
191.952692	30.22	43.50	13.28	100.0	H	0.0	-19.5
288.020000	37.26	46.00	8.74	100.0	H	277.0	-16.6
360.023846	26.25	46.00	19.75	100.0	H	164.0	-14.6
938.405000	26.24	46.00	19.76	100.0	H	62.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

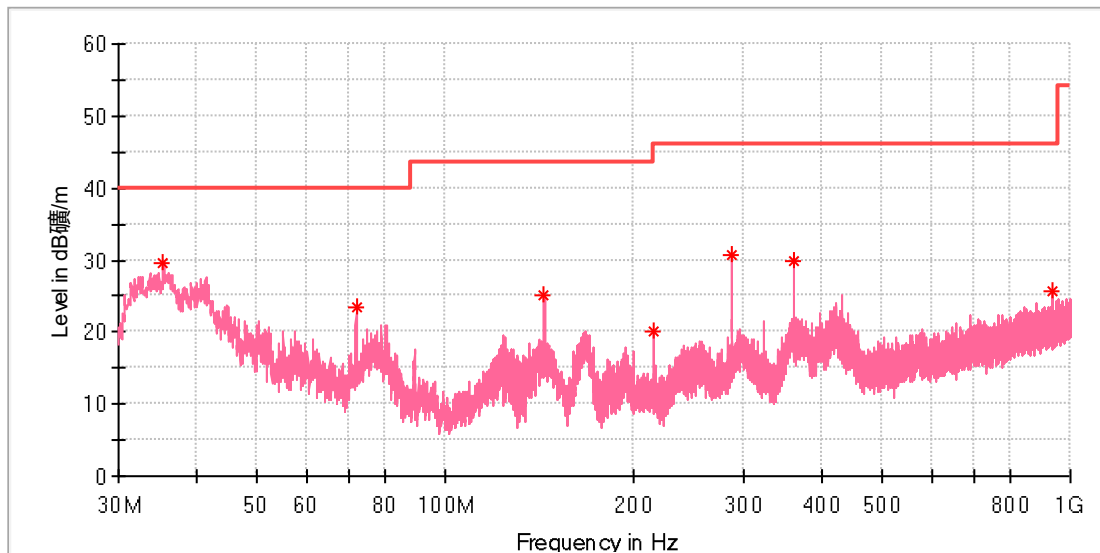

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.409615	29.63	40.00	10.37	100.0	V	52.0	-21.8
72.008462	23.35	40.00	16.65	100.0	V	193.0	-22.6
144.012308	25.14	43.50	18.36	100.0	V	284.0	-22.4
216.016154	20.21	46.00	25.79	100.0	V	184.0	-18.7
288.020000	30.74	46.00	15.26	100.0	V	109.0	-16.6
360.023846	29.85	46.00	16.15	100.0	V	260.0	-14.6
936.950000	25.64	46.00	20.36	100.0	V	309.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (MPP 15W)

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charger
Model:	W701
Test Mode:	Charging
Order No/Sample No:	168568375/A004086536-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

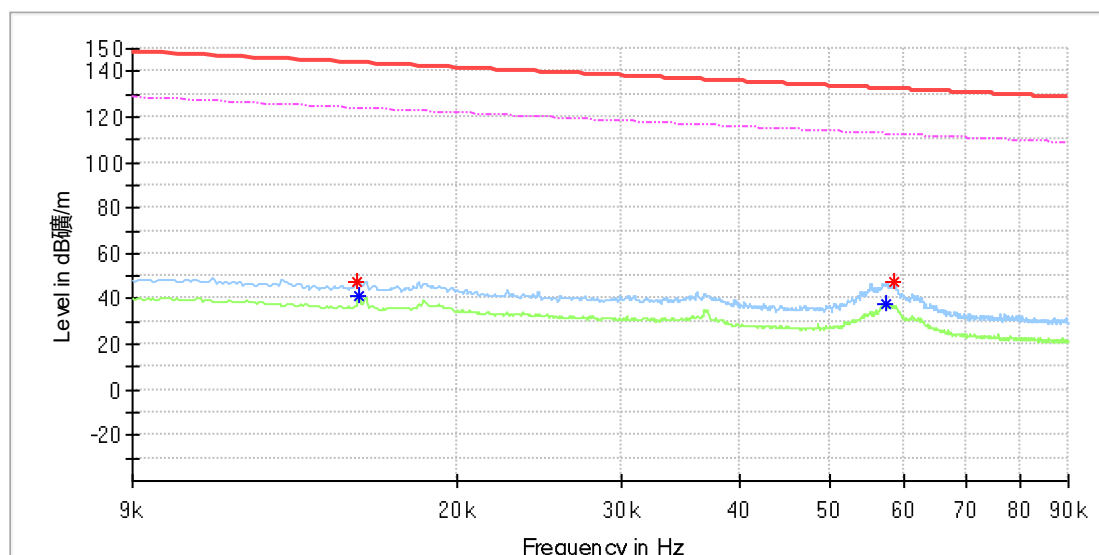


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015654	47.78	---	143.70	95.92	100.0	X	58.0	20.0
0.015711	---	41.14	123.66	82.53	100.0	X	53.0	20.0
0.057369	---	38.05	112.42	74.37	100.0	X	75.0	20.0
0.058526	47.10	---	132.25	85.15	100.0	X	344.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

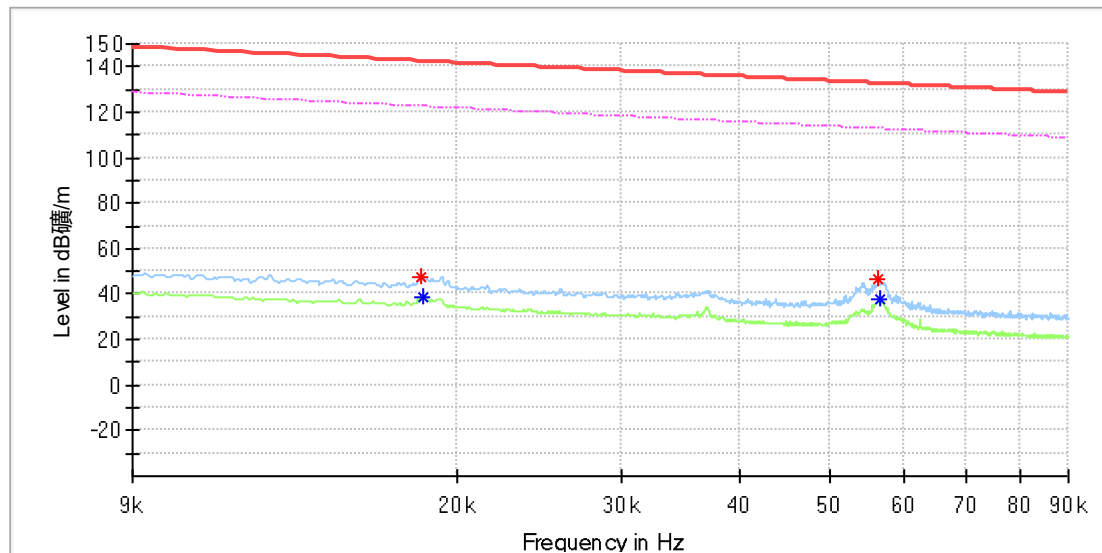


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	47.67	---	142.33	94.67	100.0	Y	0.0	20.0
0.018373	---	38.80	122.31	83.51	100.0	Y	0.0	20.0
0.056443	46.93	---	132.56	85.64	100.0	Y	35.0	20.0
0.056732	---	37.44	112.52	75.08	100.0	Y	35.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

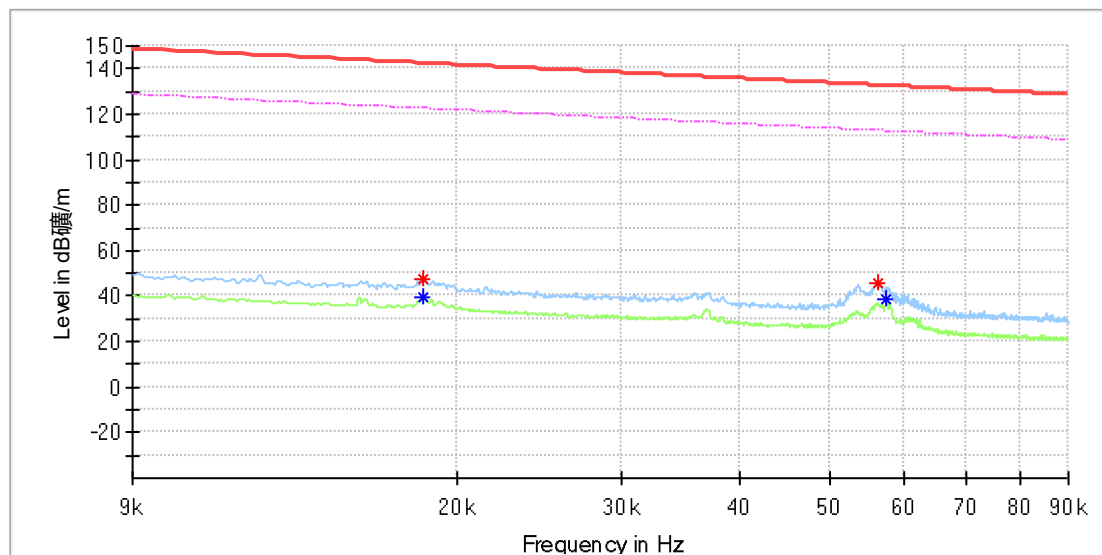


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	47.08	---	142.28	95.20	100.0	Z	353.0	20.0
0.018431	---	39.27	122.28	83.00	100.0	Z	353.0	20.0
0.056211	45.49	---	132.60	87.11	100.0	Z	0.0	20.0
0.057484	---	38.30	112.40	74.11	100.0	Z	0.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

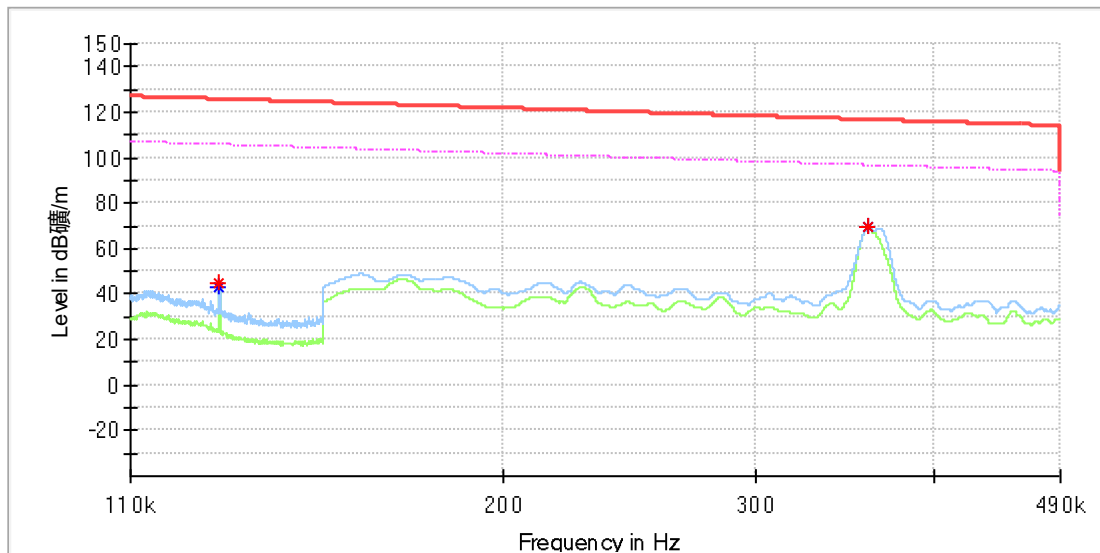


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126943	44.56	---	125.53	80.96	100.0	X	130.0	20.0
0.126943	---	43.16	105.53	62.36	100.0	X	130.0	20.0
0.360050	---	69.21	96.48	27.27	100.0	X	356.0	20.0
0.360050	69.28	---	116.48	47.20	100.0	X	356.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

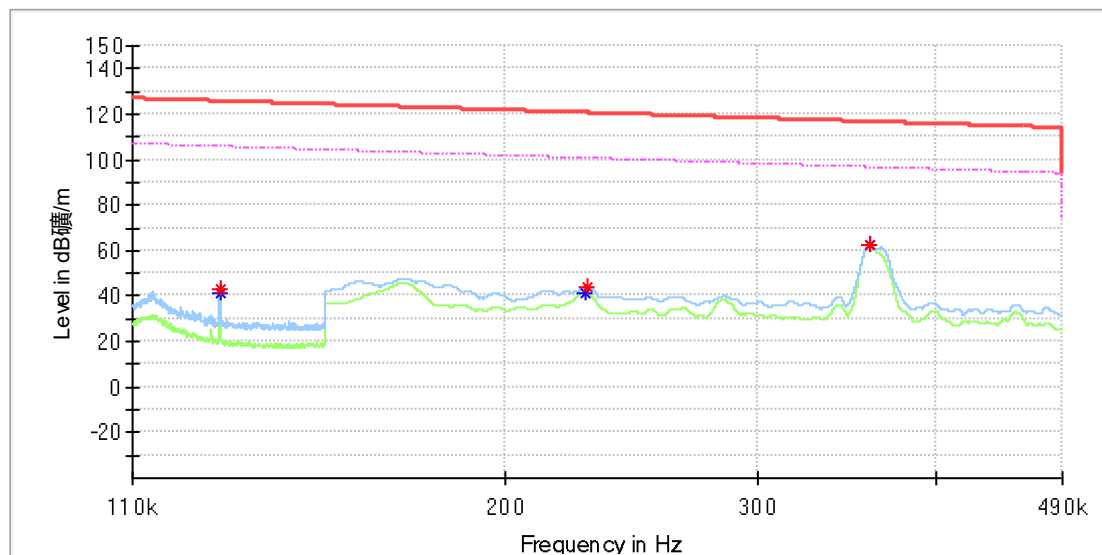


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126572	43.21	---	125.55	82.34	100.0	Y	70.0	20.0
0.126572	---	41.69	105.55	63.86	100.0	Y	70.0	20.0
0.227550	---	41.61	100.46	58.85	100.0	Y	29.0	20.0
0.228550	43.90	---	120.42	76.52	100.0	Y	29.0	20.0
0.360050	---	62.60	96.48	33.87	100.0	Y	61.0	20.0
0.360100	62.78	---	116.47	53.70	100.0	Y	61.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

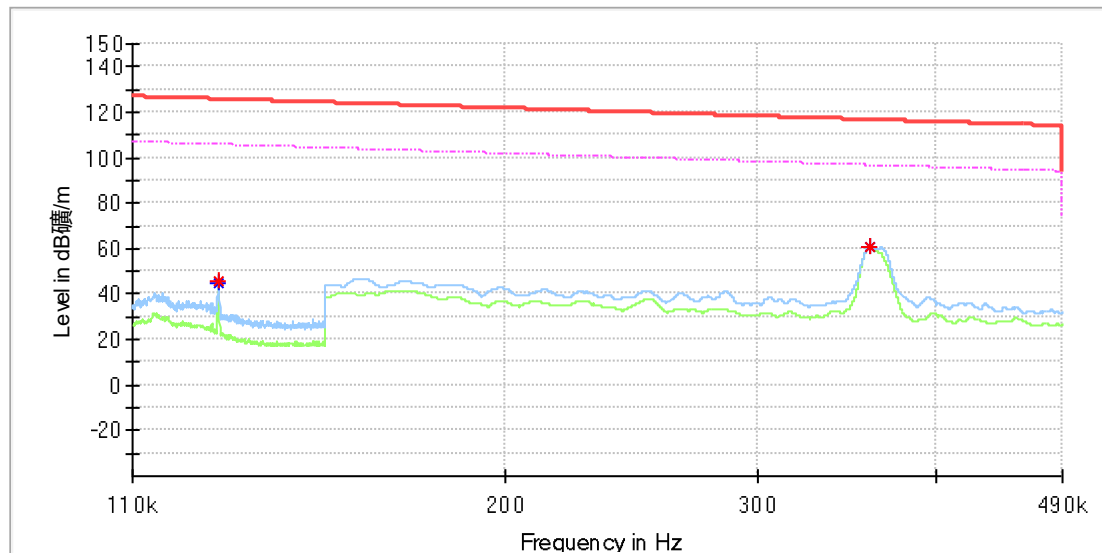


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126286	45.71	---	125.57	79.86	100.0	Z	79.0	20.0
0.126314	---	44.41	105.57	61.15	100.0	Z	69.0	20.0
0.360050	---	60.92	96.48	35.55	100.0	Z	2.0	20.0
0.360100	61.13	---	116.47	55.35	100.0	Z	2.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

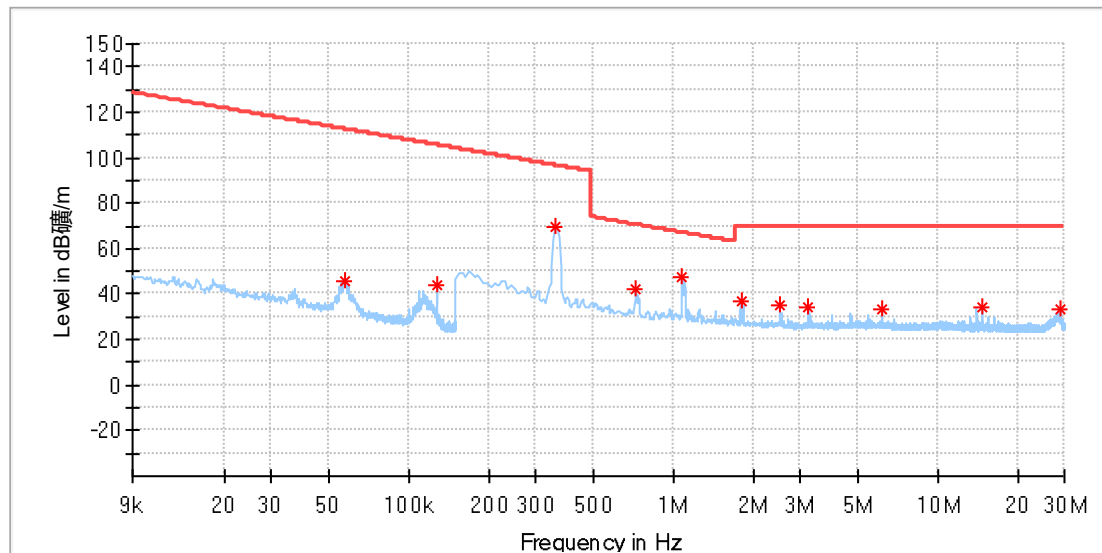

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.057041	45.82	112.47	66.65	100.0	X	94.0	19.9
0.126735	43.93	105.54	61.61	100.0	X	124.0	19.9
0.356316	69.24	96.57	27.33	100.0	X	340.0	19.9
0.716272	41.82	70.51	28.69	100.0	X	290.0	19.9
1.076228	47.83	66.99	19.15	100.0	X	157.0	19.9
1.796140	36.77	69.50	32.73	100.0	X	179.0	20.0
2.516052	35.05	69.50	34.45	100.0	X	60.0	20.0
3.235963	34.19	69.50	35.31	100.0	X	111.0	20.0
6.120000	32.92	69.50	36.58	100.0	X	89.0	20.1
14.758941	34.10	69.50	35.40	100.0	X	121.0	20.3
28.792831	33.21	69.50	36.29	100.0	X	100.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

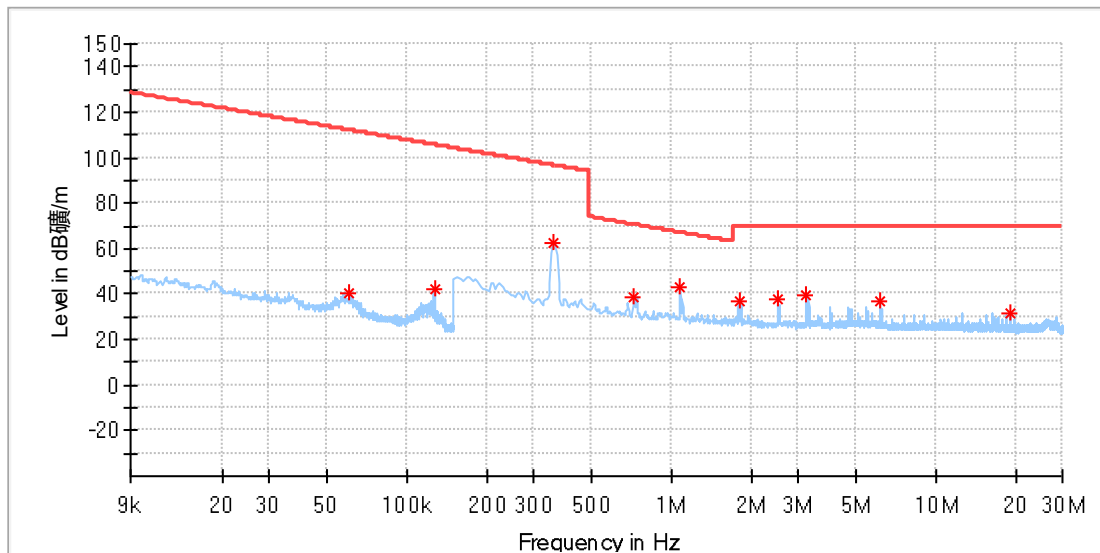

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.060465	40.30	111.96	71.66	100.0	Y	30.0	19.9
0.126534	42.48	105.55	63.07	100.0	Y	69.0	19.9
0.356316	62.67	96.57	33.90	100.0	Y	60.0	19.9
0.720662	38.94	70.46	31.52	100.0	Y	49.0	19.9
1.076228	43.05	66.99	23.94	100.0	Y	46.0	19.9
1.796140	37.26	69.50	32.24	100.0	Y	21.0	20.0
2.516052	37.92	69.50	31.58	100.0	Y	28.0	20.0
3.235963	39.92	69.50	29.58	100.0	Y	35.0	20.0
6.120000	36.75	69.50	32.75	100.0	Y	28.0	20.1
19.078412	31.21	69.50	38.29	100.0	Y	12.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

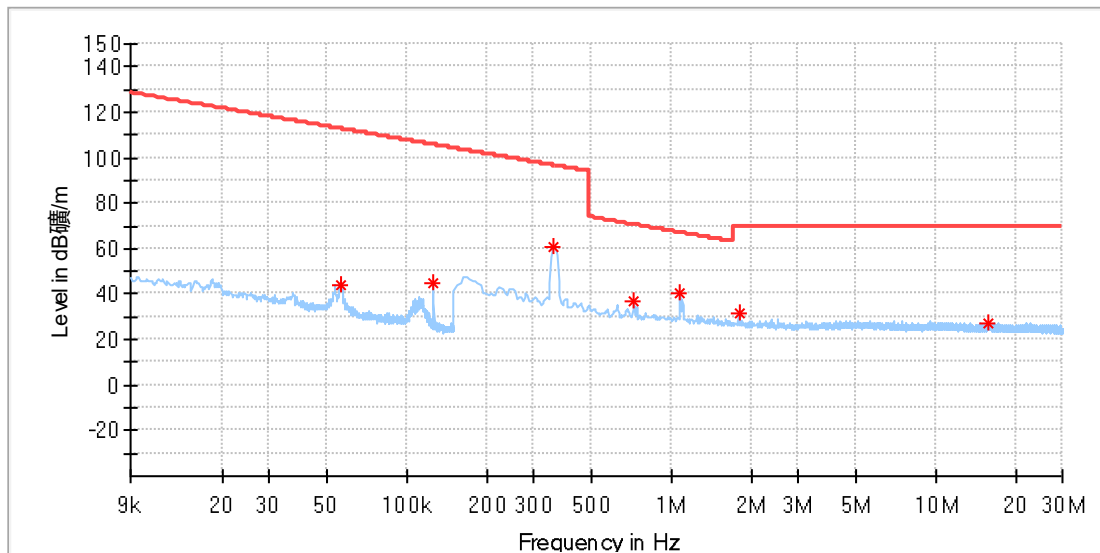

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.056134	43.88	112.61	68.73	100.0	Z	0.0	19.9
0.126231	44.68	105.57	60.89	100.0	Z	91.0	19.9
0.356316	61.09	96.57	35.47	100.0	Z	4.0	19.9
0.720662	37.12	70.46	33.34	100.0	Z	291.0	19.9
1.076228	40.19	66.99	26.80	100.0	Z	341.0	19.9
1.796140	31.51	69.50	37.99	100.0	Z	334.0	20.0
15.781743	27.58	69.50	41.92	100.0	Z	46.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

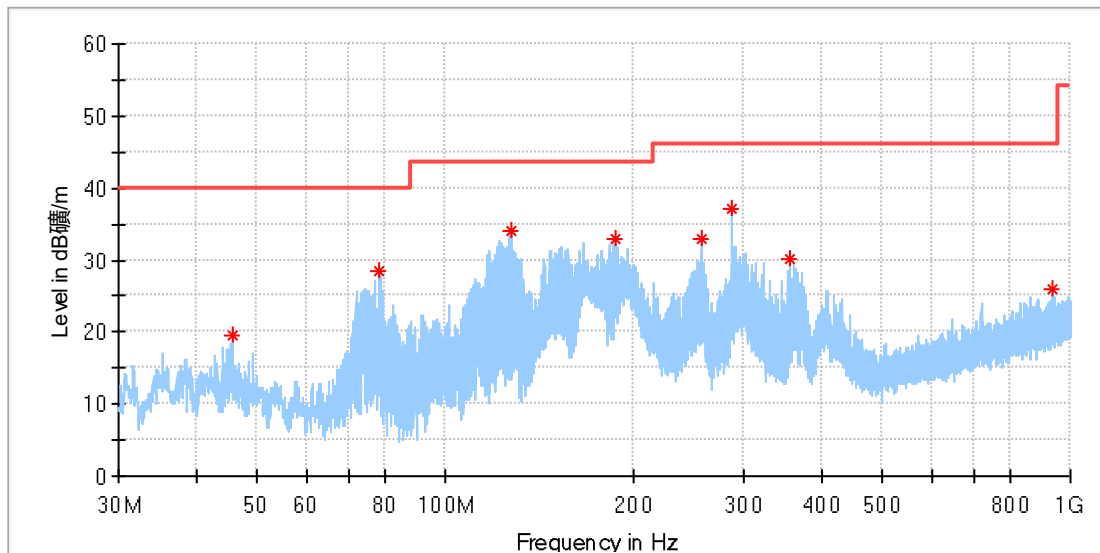

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.706539	19.46	40.00	20.54	100.0	H	169.0	-18.8
78.126923	28.53	40.00	11.47	100.0	H	357.0	-23.5
127.074615	33.96	43.50	9.54	100.0	H	301.0	-21.6
186.841539	32.86	43.50	10.64	100.0	H	25.0	-19.9
257.763462	33.04	46.00	12.96	100.0	H	122.0	-17.2
288.020000	37.10	46.00	8.90	100.0	H	294.0	-16.6
355.658846	30.05	46.00	15.95	100.0	H	160.0	-14.7
936.950000	25.91	46.00	20.09	100.0	H	87.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

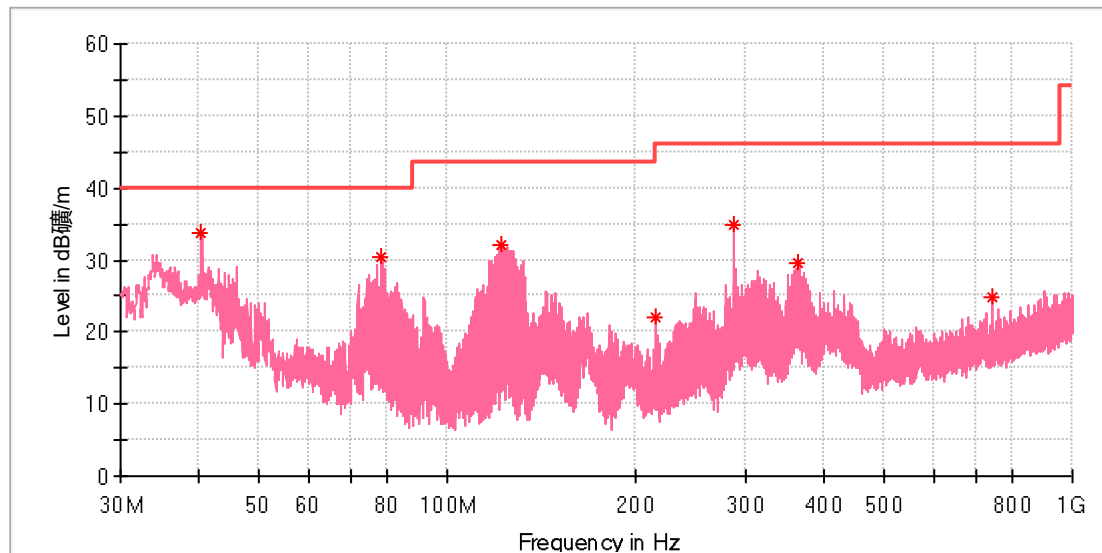

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.446154	33.83	40.00	6.17	100.0	V	48.0	-20.1
78.126923	30.32	40.00	9.68	100.0	V	151.0	-23.5
122.038077	32.18	43.50	11.32	100.0	V	299.0	-21.1
216.016154	22.09	46.00	23.91	100.0	V	100.0	-18.7
288.020000	34.83	46.00	11.17	100.0	V	183.0	-16.6
363.978462	29.68	46.00	16.32	100.0	V	13.0	-14.6
742.465000	24.75	46.00	21.25	100.0	V	215.0	-7.2


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (TWS 5W)

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charger
Model:	W701
Test Mode:	Charging
Order No/Sample No:	168568375/A004086536-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

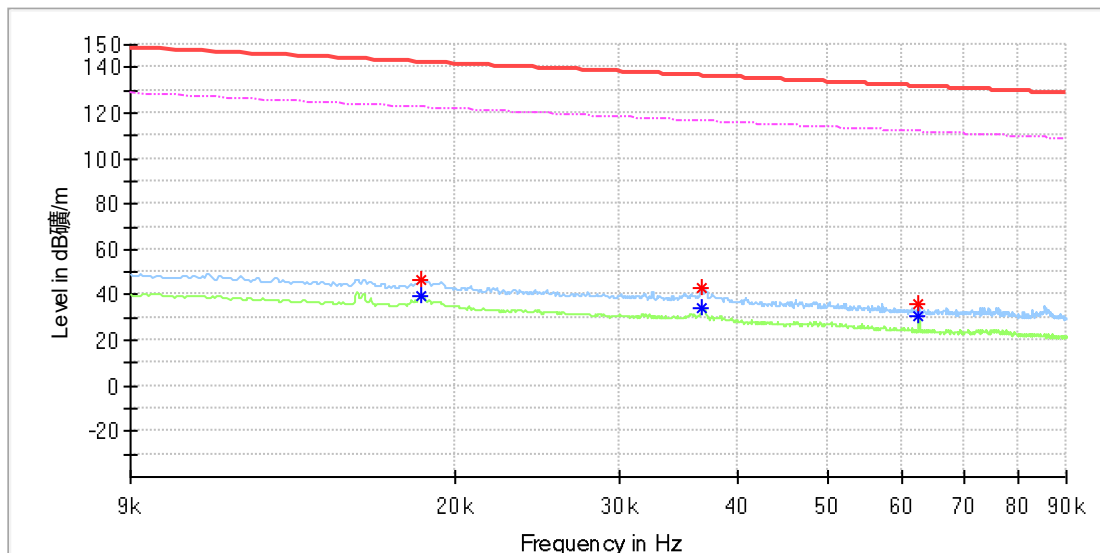


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	---	39.13	122.31	83.18	100.0	X	311.0	20.0
0.018431	47.02	---	142.28	95.26	100.0	X	311.0	20.0
0.036656	42.80	---	136.31	93.51	100.0	X	345.0	20.0
0.036771	---	33.95	116.28	82.33	100.0	X	345.0	20.0
0.062634	36.09	---	131.66	95.57	100.0	X	282.0	20.0
0.062634	---	30.36	111.66	81.30	100.0	X	282.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

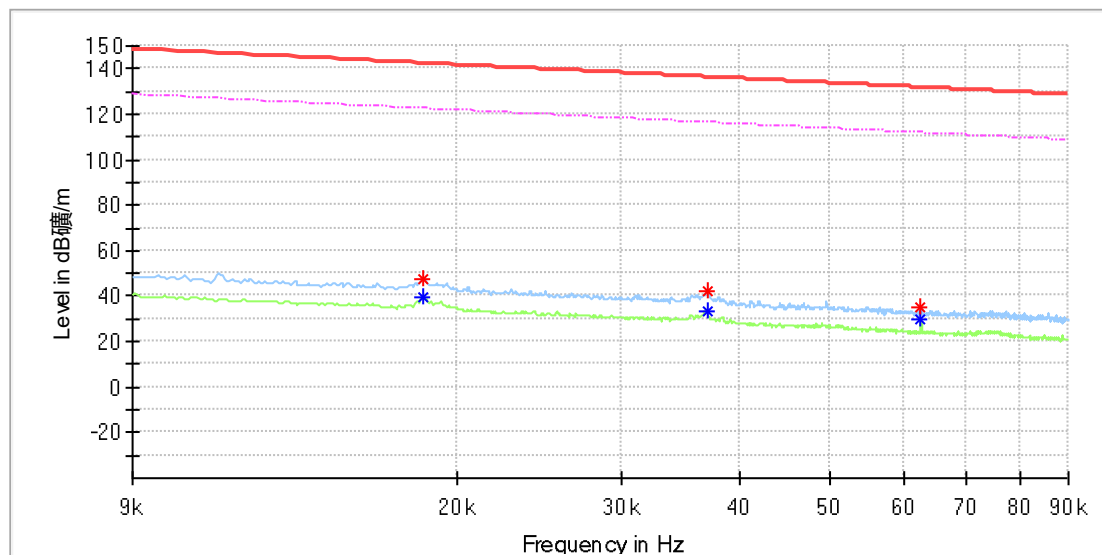


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	---	39.57	122.31	82.73	100.0	Y	0.0	20.0
0.018431	47.57	---	142.28	94.71	100.0	Y	0.0	20.0
0.037003	42.30	---	136.23	93.93	100.0	Y	151.0	20.0
0.037003	---	33.71	116.23	82.52	100.0	Y	151.0	20.0
0.062576	35.45	---	131.67	96.22	100.0	Y	140.0	20.0
0.062634	---	29.74	111.66	81.92	100.0	Y	180.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

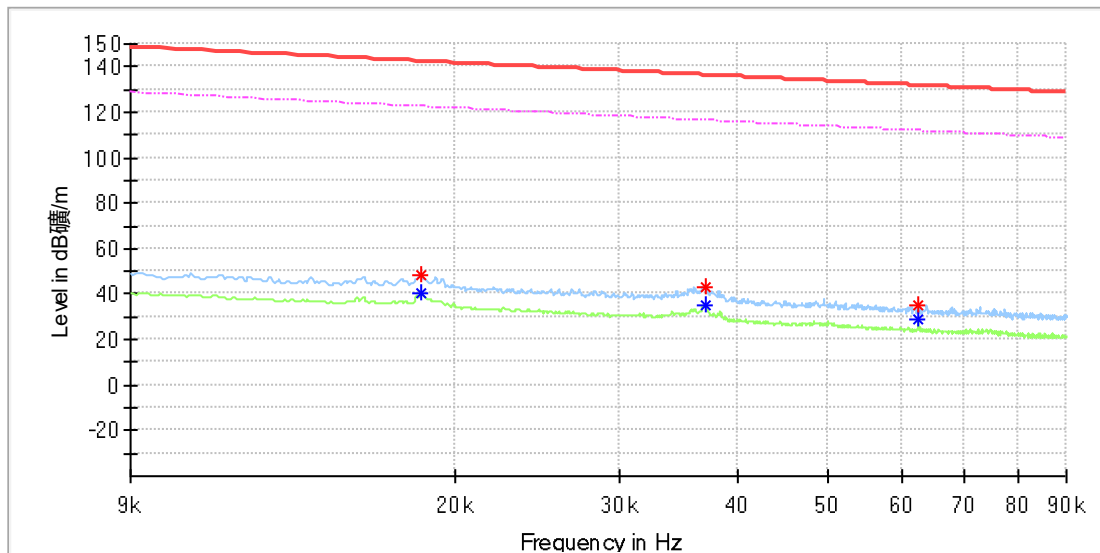


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	48.78	---	142.31	93.53	100.0	Z	302.0	20.0
0.018431	---	40.65	122.28	81.62	100.0	Z	302.0	20.0
0.037003	43.21	---	136.23	93.02	100.0	Z	295.0	20.0
0.037061	---	35.07	116.21	81.15	100.0	Z	88.0	20.0
0.062518	34.75	---	131.67	96.93	100.0	Z	258.0	20.0
0.062518	---	29.16	111.67	82.51	100.0	Z	258.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

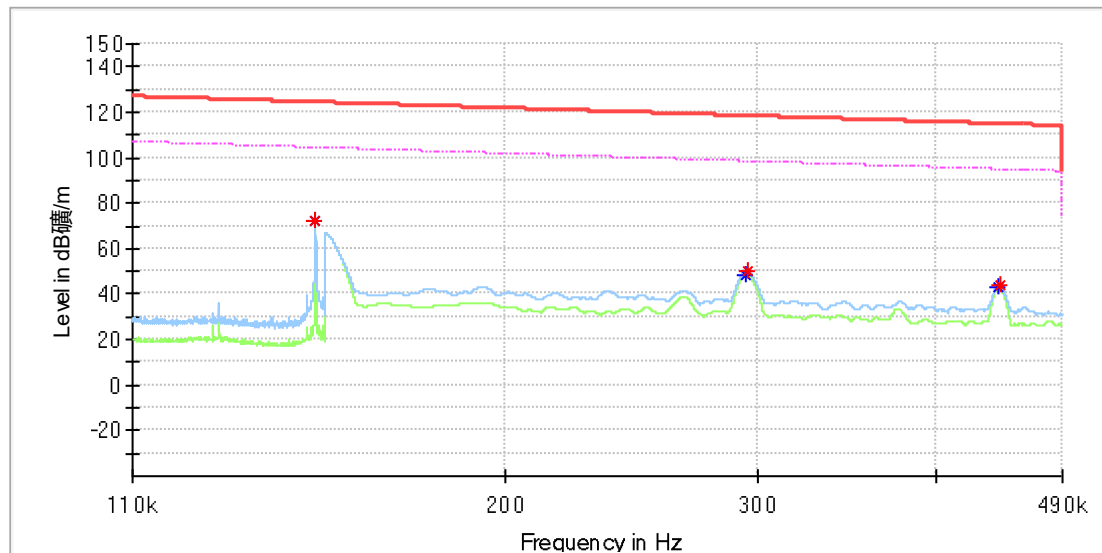


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	---	72.23	104.22	31.99	100.0	X	0.0	20.0
0.147543	72.44	---	124.22	51.78	100.0	X	0.0	20.0
0.295000	---	48.49	98.21	49.72	100.0	X	328.0	20.0
0.295100	49.96	---	118.20	68.24	100.0	X	328.0	20.0
0.442550	---	42.94	94.68	51.74	100.0	X	176.0	20.0
0.442950	43.76	---	114.68	70.92	100.0	X	176.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

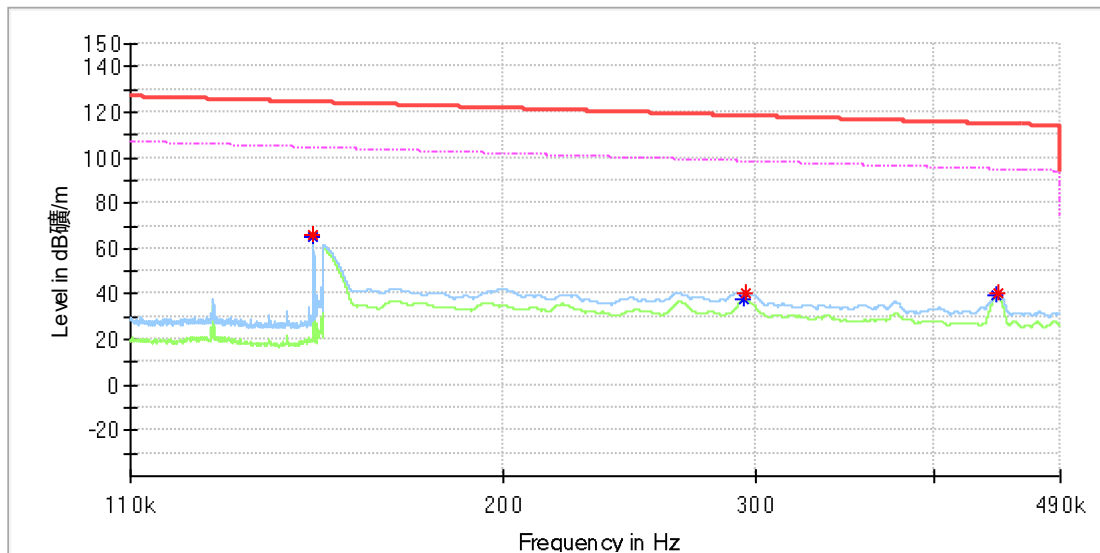


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	---	65.34	104.22	38.88	100.0	Y	85.0	20.0
0.147543	65.65	---	124.22	58.57	100.0	Y	85.0	20.0
0.295050	---	38.00	98.20	60.21	100.0	Y	59.0	20.0
0.295650	40.54	---	118.19	77.65	100.0	Y	59.0	20.0
0.442650	---	39.51	94.68	55.17	100.0	Y	274.0	20.0
0.443150	40.54	---	114.67	74.13	100.0	Y	293.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

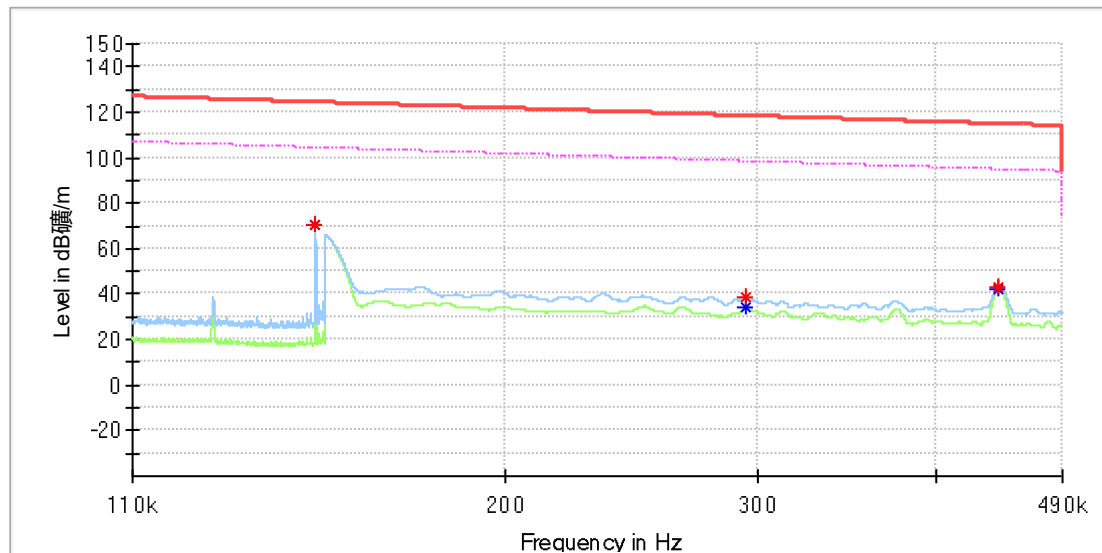


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	---	70.56	104.22	33.66	100.0	Z	340.0	20.0
0.147543	70.69	---	124.22	53.53	100.0	Z	340.0	20.0
0.294250	38.33	---	118.23	79.90	100.0	Z	154.0	20.0
0.294600	---	34.38	98.22	63.83	100.0	Z	154.0	20.0
0.442450	43.49	---	114.69	71.20	100.0	Z	189.0	20.0
0.442550	---	42.62	94.68	52.06	100.0	Z	189.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

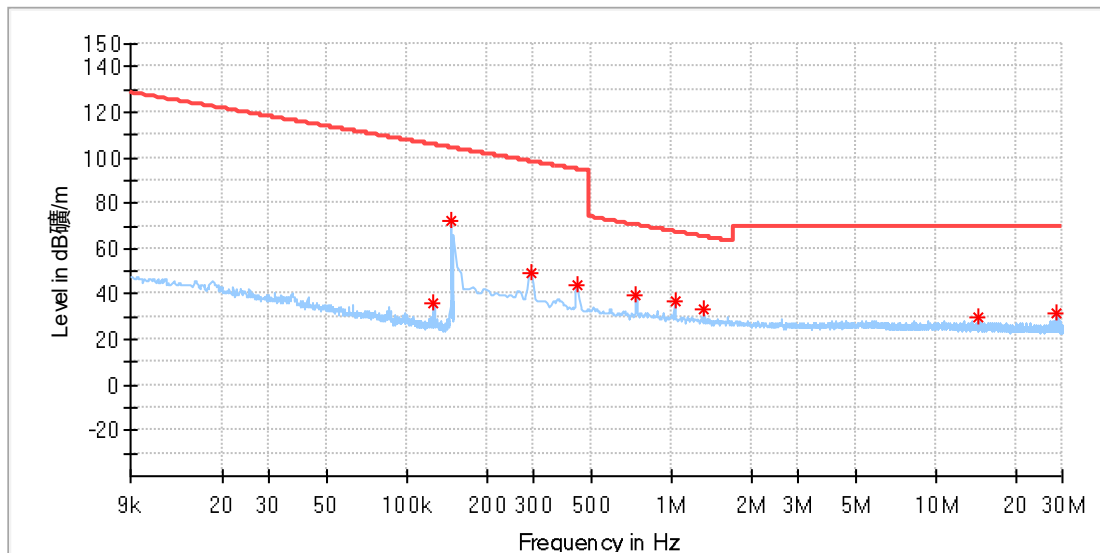

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126433	36.24	105.56	69.32	100.0	X	138.0	19.9
0.147583	72.44	104.22	31.78	100.0	X	337.0	19.9
0.294860	49.33	98.21	48.88	100.0	X	340.0	19.9
0.439721	44.15	94.74	50.59	100.0	X	197.0	19.9
0.733831	39.28	70.30	31.02	100.0	X	182.0	19.9
1.032331	36.75	67.35	30.60	100.0	X	333.0	19.9
1.322052	32.96	65.20	32.24	100.0	X	305.0	19.9
14.456052	29.70	69.50	39.80	100.0	X	128.0	20.3
28.626022	31.27	69.50	38.23	100.0	X	258.0	20.6

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

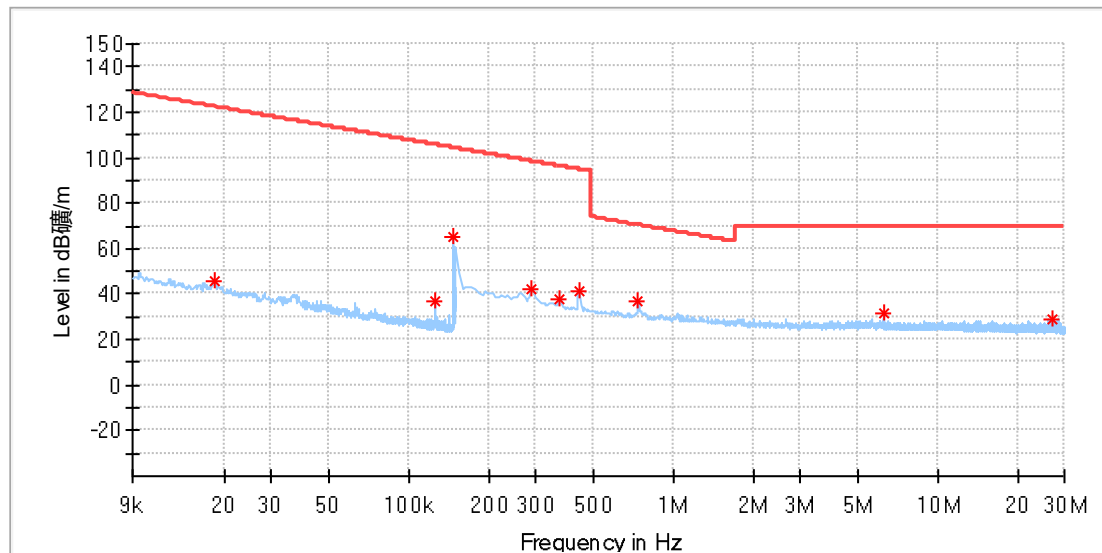

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018266	45.90	122.36	76.46	100.0	Y	219.0	19.9
0.125627	36.66	105.62	68.96	100.0	Y	78.0	19.9
0.147583	65.54	104.22	38.67	100.0	Y	96.0	19.9
0.290471	42.07	98.34	56.27	100.0	Y	54.0	19.9
0.369485	38.04	96.25	58.21	100.0	Y	17.0	19.9
0.439721	41.62	94.74	53.12	100.0	Y	280.0	19.9
0.733831	37.00	70.30	33.31	100.0	Y	79.0	19.9
6.194625	31.51	69.50	37.99	100.0	Y	357.0	20.1
27.146691	29.10	69.50	40.40	100.0	Y	50.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

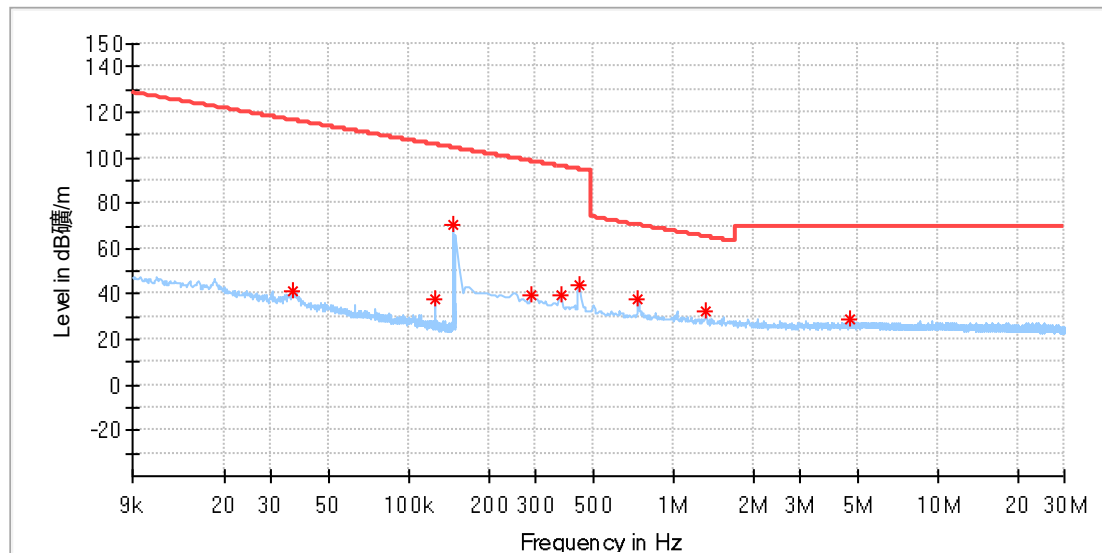

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036495	41.25	116.35	75.10	100.0	Z	51.0	19.9
0.125124	37.38	105.65	68.27	100.0	Z	69.0	19.9
0.147583	70.51	104.22	33.70	100.0	Z	347.0	19.9
0.290471	39.19	98.34	59.15	100.0	Z	155.0	19.9
0.373875	39.89	96.15	56.26	100.0	Z	79.0	19.9
0.439721	43.91	94.74	50.83	100.0	Z	205.0	19.9
0.733831	38.13	70.30	32.17	100.0	Z	223.0	19.9
1.326441	32.26	65.18	32.91	100.0	Z	17.0	19.9
4.601162	28.50	69.50	41.00	100.0	Z	1.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

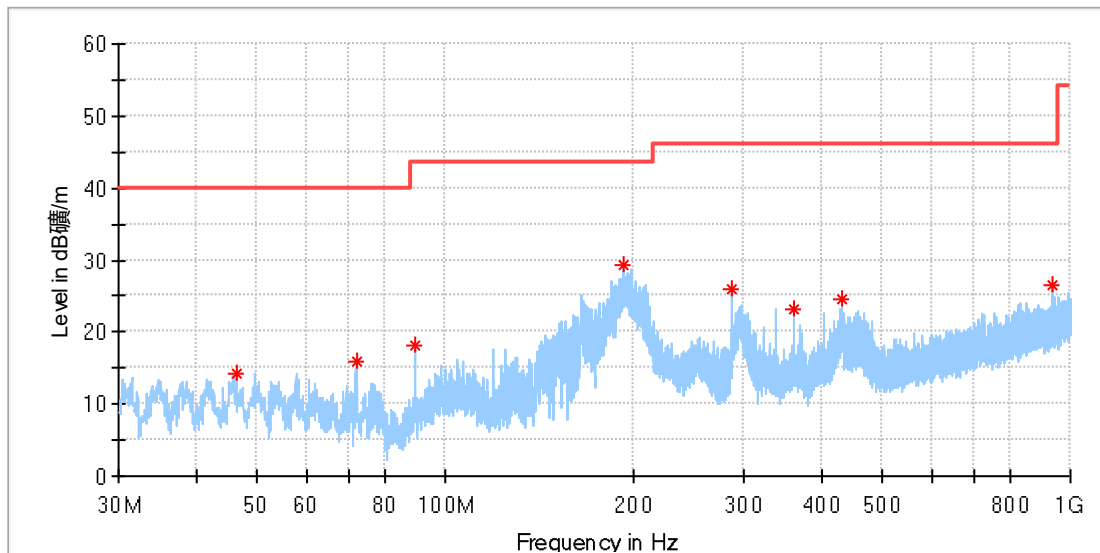

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.303462	14.35	40.00	25.65	100.0	H	144.0	-18.7
72.008462	16.02	40.00	23.98	100.0	H	0.0	-22.6
89.319231	18.19	43.50	25.31	100.0	H	329.0	-21.3
192.400385	29.44	43.50	14.06	100.0	H	0.0	-19.5
288.020000	25.83	46.00	20.17	100.0	H	102.0	-16.6
360.023846	23.26	46.00	22.74	100.0	H	41.0	-14.6
432.027692	24.69	46.00	21.31	100.0	H	170.0	-13.1
936.950000	26.41	46.00	19.59	100.0	H	144.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

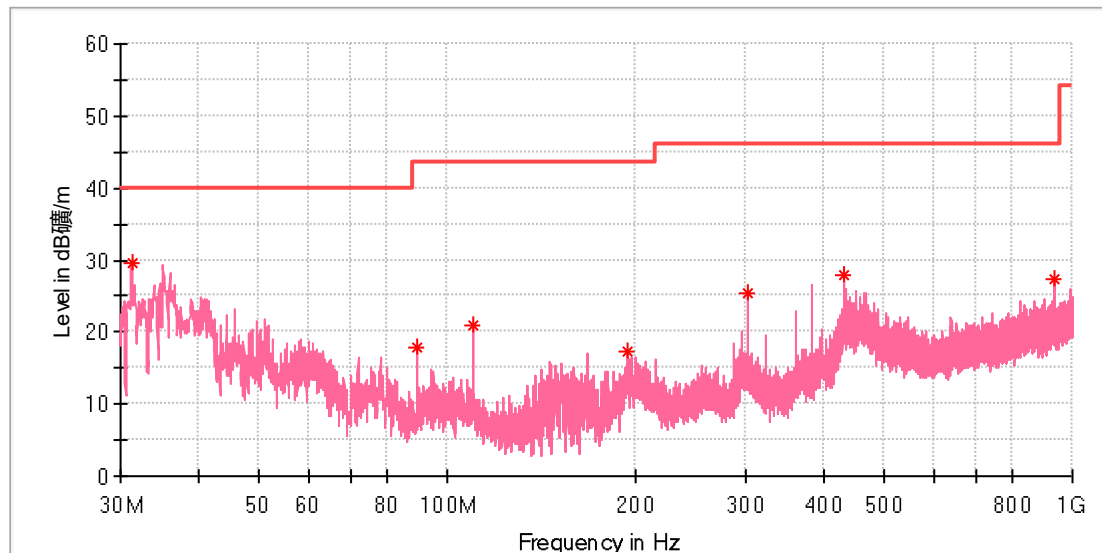

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.268462	29.46	40.00	10.54	100.0	V	53.0	-22.8
89.281923	17.95	43.50	25.55	100.0	V	161.0	-21.3
109.801154	20.90	43.50	22.60	100.0	V	338.0	-19.2
194.788077	17.28	43.50	26.22	100.0	V	178.0	-19.3
302.495385	25.31	46.00	20.69	100.0	V	359.0	-16.2
431.990385	27.95	46.00	18.05	100.0	V	251.0	-13.1
938.405000	27.35	46.00	18.65	100.0	V	25.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (Co-location)

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charger
Model:	W701
Test Mode:	Charging
Order No/Sample No:	168568375/A004086536-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

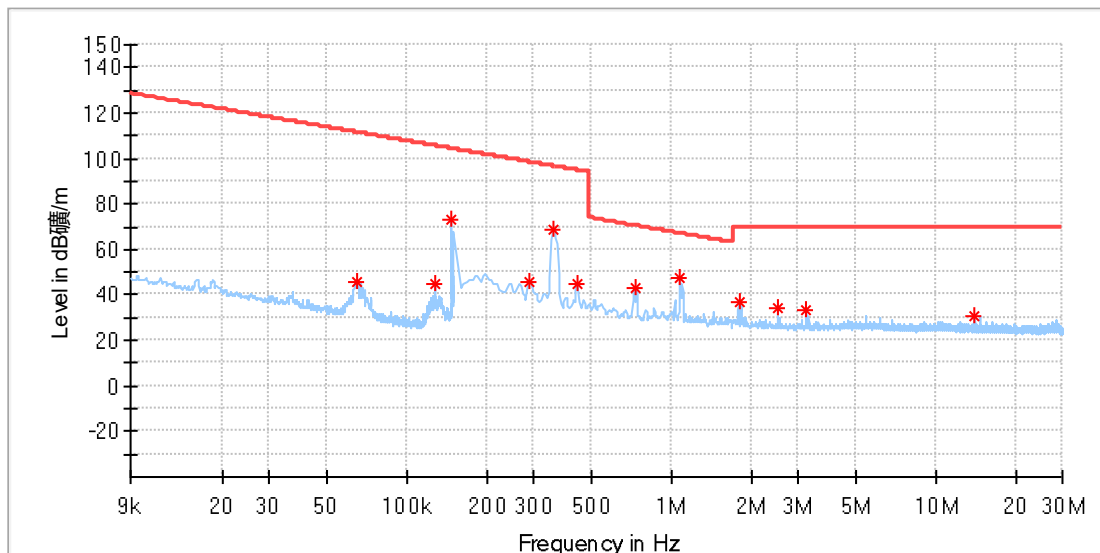

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.064191	45.52	111.45	65.93	100.0	X	323.0	19.9
0.126836	45.19	105.53	60.34	100.0	X	108.0	19.9
0.147583	72.74	104.22	31.48	100.0	X	356.0	19.9
0.290471	45.50	98.34	52.84	100.0	X	91.0	19.9
0.356316	68.78	96.57	27.79	100.0	X	336.0	19.9
0.439721	44.92	94.74	49.82	100.0	X	8.0	19.9
0.733831	43.18	70.30	27.13	100.0	X	355.0	19.9
1.076228	47.56	66.99	19.42	100.0	X	336.0	19.9
1.796140	36.96	69.50	32.54	100.0	X	100.0	20.0
2.516052	34.47	69.50	35.03	100.0	X	69.0	20.0
3.235963	33.15	69.50	36.35	100.0	X	82.0	20.0
14.039030	31.05	69.50	38.45	100.0	X	168.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

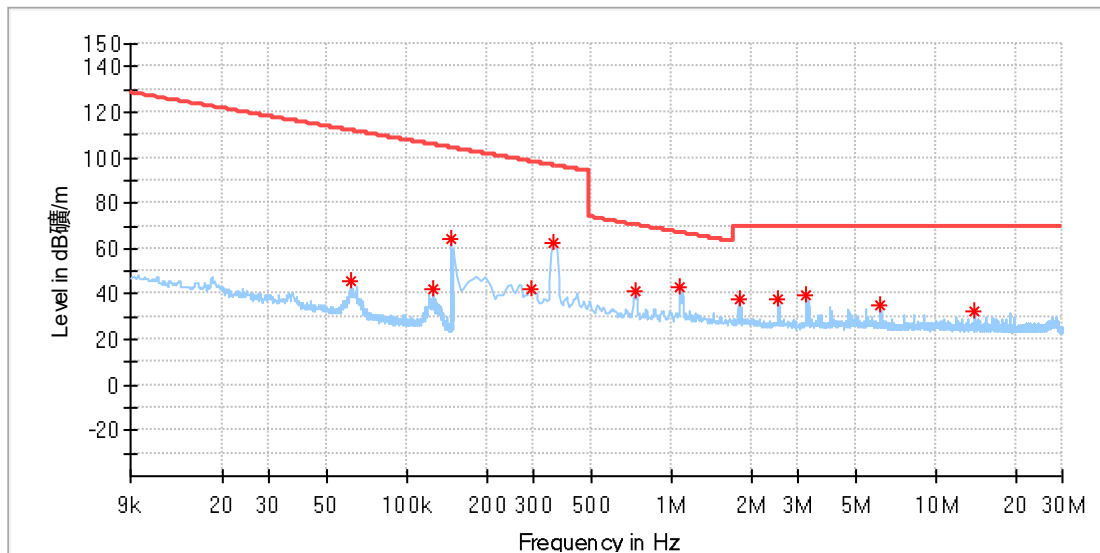

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.061674	45.35	111.79	66.44	100.0	Y	47.0	19.9
0.126332	42.33	105.57	63.24	100.0	Y	60.0	19.9
0.147583	63.97	104.22	40.24	100.0	Y	74.0	19.9
0.294860	42.47	98.21	55.74	100.0	Y	202.0	19.9
0.356316	62.92	96.57	33.64	100.0	Y	46.0	19.9
0.733831	40.97	70.30	29.33	100.0	Y	42.0	19.9
1.076228	42.95	66.99	24.04	100.0	Y	31.0	19.9
1.796140	37.49	69.50	32.01	100.0	Y	21.0	20.0
2.516052	37.33	69.50	32.17	100.0	Y	12.0	20.0
3.235963	39.72	69.50	29.78	100.0	Y	56.0	20.0
6.115610	35.02	69.50	34.48	100.0	Y	242.0	20.1
14.039030	32.69	69.50	36.81	100.0	Y	96.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

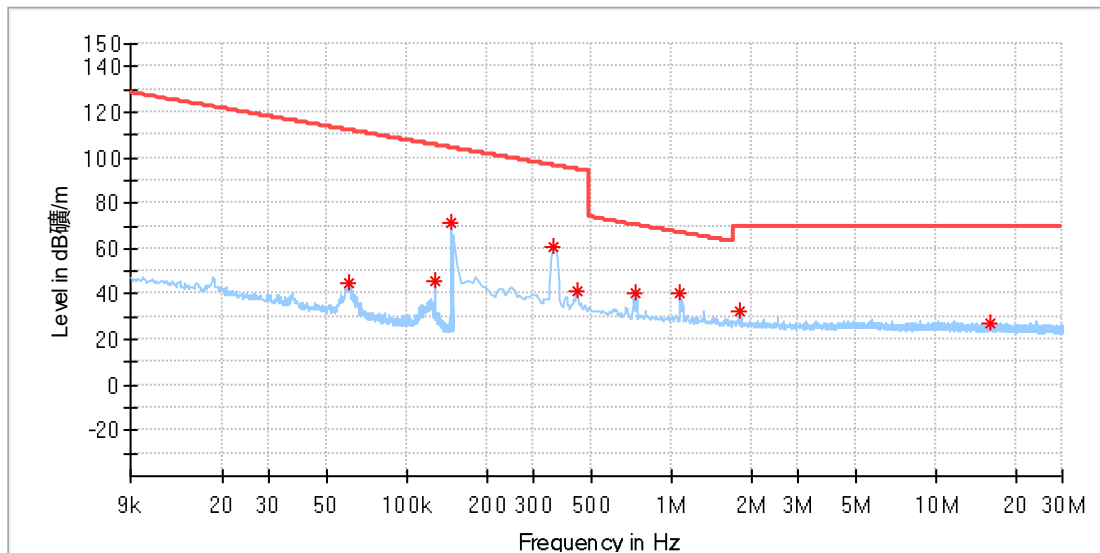

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.060163	45.02	112.01	66.99	100.0	Z	18.0	19.9
0.126836	45.52	105.53	60.01	100.0	Z	64.0	19.9
0.147583	71.12	104.22	33.10	100.0	Z	326.0	19.9
0.356316	61.15	96.57	35.41	100.0	Z	0.0	19.9
0.439721	41.60	94.74	53.14	100.0	Z	194.0	19.9
0.733831	40.75	70.30	29.55	100.0	Z	316.0	19.9
1.076228	40.75	66.99	26.23	100.0	Z	0.0	19.9
1.800530	32.10	69.50	37.40	100.0	Z	24.0	20.0
16.045125	27.50	69.50	42.00	100.0	Z	119.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

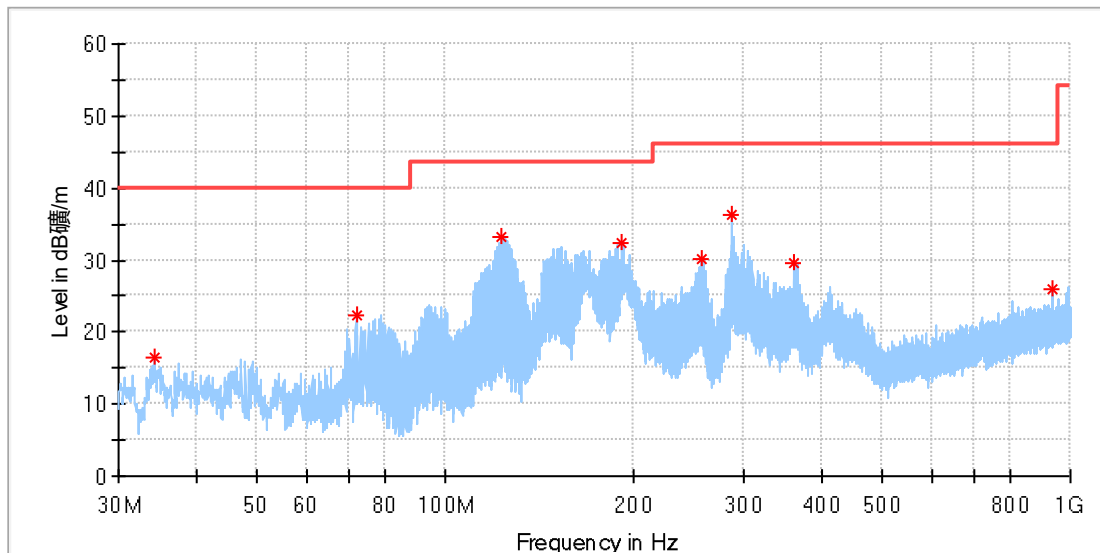

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.215769	16.53	40.00	23.47	100.0	H	172.0	-22.2
72.008462	22.36	40.00	17.64	100.0	H	5.0	-22.6
122.746923	33.13	43.50	10.37	100.0	H	276.0	-21.2
192.027308	32.26	43.50	11.24	100.0	H	13.0	-19.5
257.390385	30.25	46.00	15.75	100.0	H	109.0	-17.2
288.020000	36.19	46.00	9.81	100.0	H	109.0	-16.6
359.986539	29.59	46.00	16.41	100.0	H	172.0	-14.6
938.405000	26.03	46.00	19.97	100.0	H	258.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Charging
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

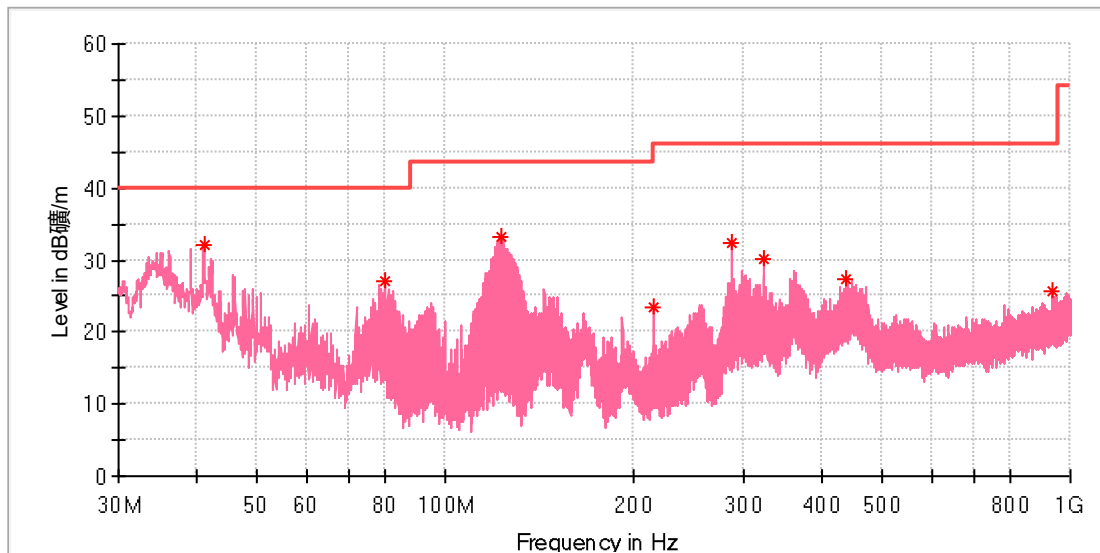

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.080385	32.17	40.00	7.83	100.0	V	106.0	-19.9
80.290769	27.14	40.00	12.86	100.0	V	147.0	-23.5
122.746923	33.28	43.50	10.22	100.0	V	293.0	-21.2
216.016154	23.35	46.00	22.65	100.0	V	201.0	-18.7
288.020000	32.26	46.00	13.74	100.0	V	73.0	-16.6
323.984615	30.22	46.00	15.78	100.0	V	201.0	-15.5
436.728462	27.21	46.00	18.79	100.0	V	253.0	-13.0
938.405000	25.80	46.00	20.20	100.0	V	80.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby mode

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charger
Model:	W701
Test Mode:	Standby
Order No/Sample No:	168568375/A004086536-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

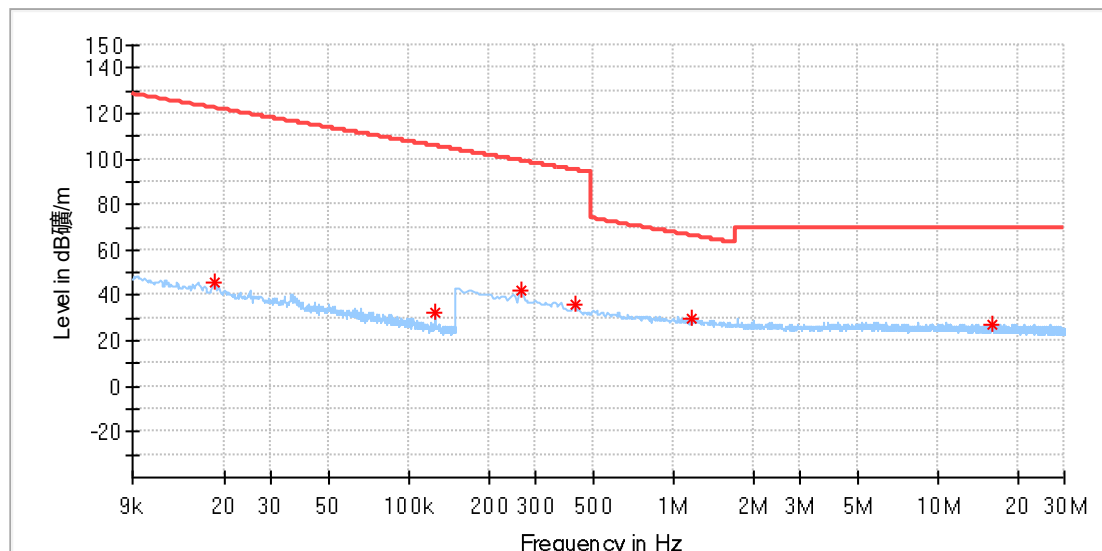

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018366	45.62	122.31	76.69	100.0	X	134.0	19.9
0.126030	32.45	105.59	73.14	100.0	X	122.0	19.9
0.264133	42.20	99.17	56.96	100.0	X	0.0	19.9
0.422162	36.31	95.09	58.78	100.0	X	218.0	19.9
1.159632	30.18	66.34	36.16	100.0	X	155.0	19.9
15.909044	27.51	69.50	41.99	100.0	X	33.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Standby
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

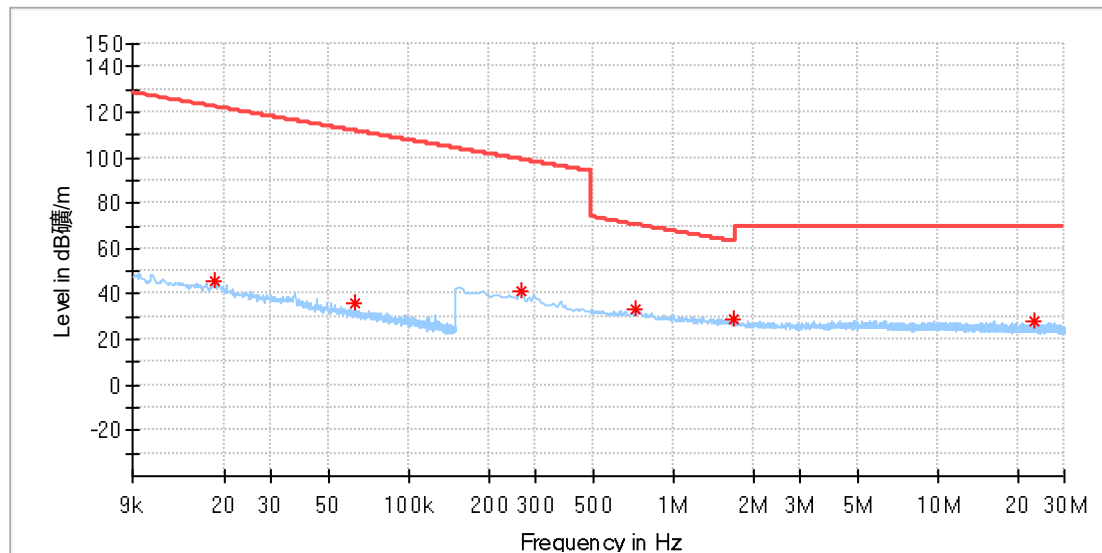

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018366	46.15	122.31	76.16	100.0	Y	279.0	19.9
0.062580	36.02	111.67	75.65	100.0	Y	111.0	19.9
0.264133	41.13	99.17	58.03	100.0	Y	260.0	19.9
0.720662	33.02	70.46	37.44	100.0	Y	56.0	19.9
1.673228	28.53	63.16	34.63	100.0	Y	314.0	20.0
22.906235	28.35	69.50	41.15	100.0	Y	256.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Standby
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

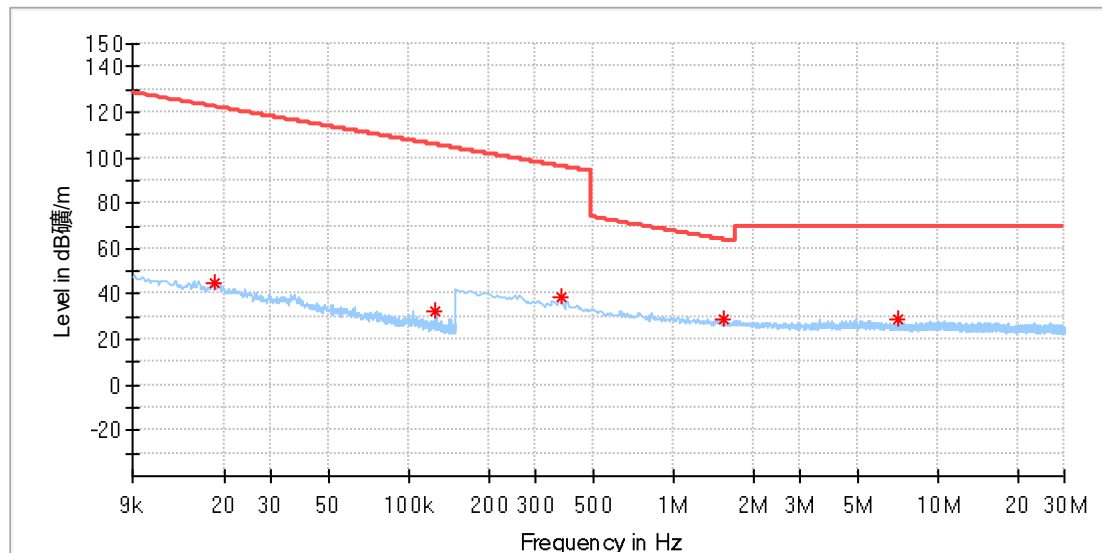

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018266	44.76	122.36	77.59	100.0	Z	56.0	19.9
0.126433	32.83	105.56	72.73	100.0	Z	51.0	19.9
0.373875	38.76	96.15	57.38	100.0	Z	72.0	19.9
1.545927	28.79	63.85	35.05	100.0	Z	248.0	20.0
7.024280	28.73	69.50	40.77	100.0	Z	87.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Standby
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

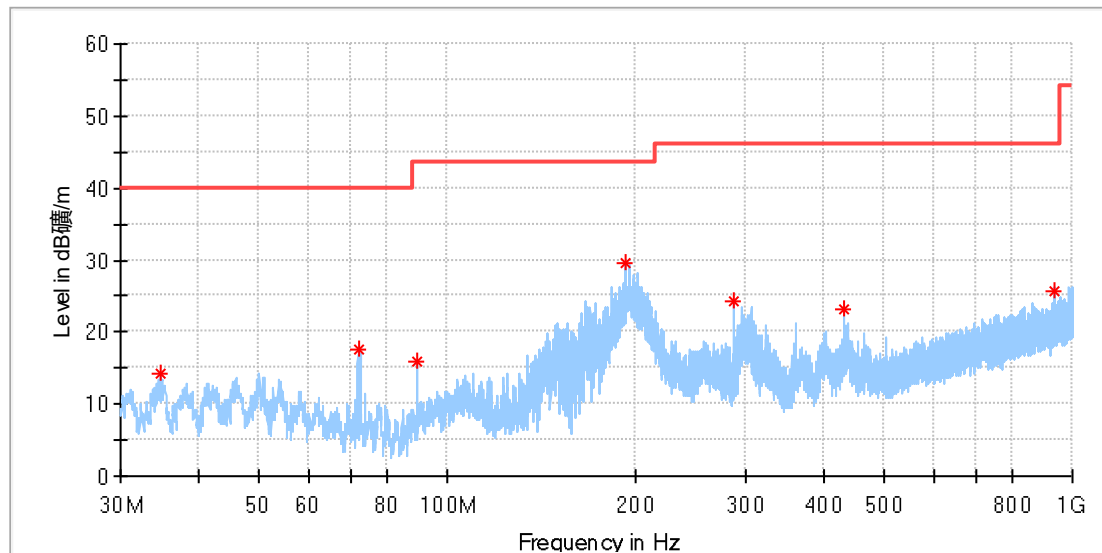

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.850000	14.16	40.00	25.84	100.0	H	333.0	-22.0
72.008462	17.59	40.00	22.41	100.0	H	342.0	-22.6
89.319231	15.96	43.50	27.54	100.0	H	324.0	-21.3
192.400385	29.49	43.50	14.01	100.0	H	10.0	-19.5
288.020000	24.22	46.00	21.78	100.0	H	110.0	-16.6
432.027692	23.30	46.00	22.70	100.0	H	175.0	-13.1
938.405000	25.76	46.00	20.24	100.0	H	10.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Model: W701
Test Mode: Standby
Order No/Sample No: 168568375/A004086536-003
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

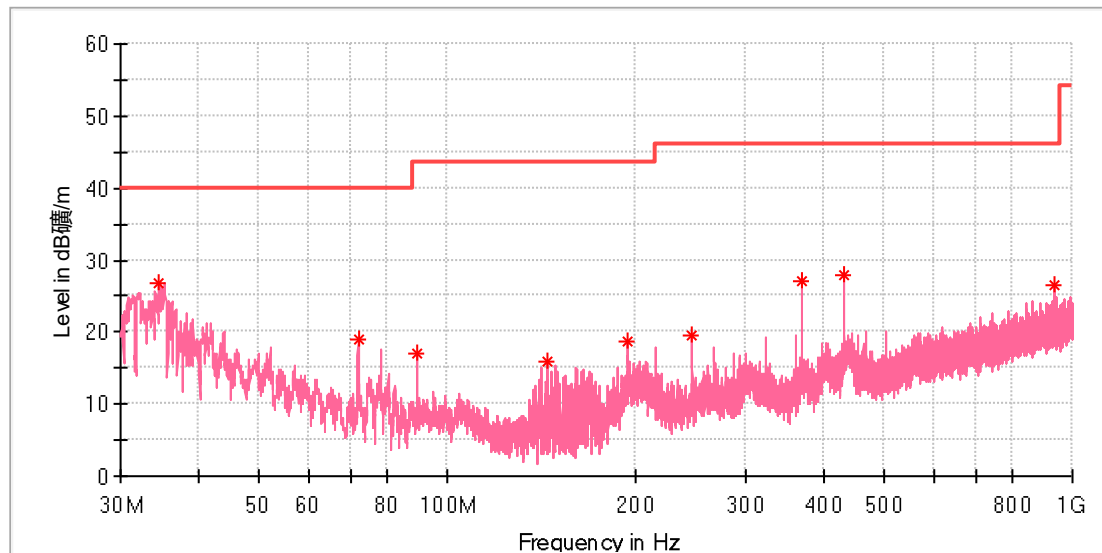

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.626154	26.84	40.00	13.16	100.0	V	6.0	-22.1
71.971154	18.91	40.00	21.09	100.0	V	122.0	-22.6
89.356539	16.91	43.50	26.59	100.0	V	172.0	-21.3
144.198846	15.82	43.50	27.68	100.0	V	290.0	-22.4
193.706154	18.74	43.50	24.76	100.0	V	172.0	-19.4
246.683077	19.42	46.00	26.58	100.0	V	224.0	-17.5
368.940385	27.14	46.00	18.86	100.0	V	43.0	-14.5
432.027692	27.97	46.00	18.03	100.0	V	240.0	-13.1
938.442308	26.54	46.00	19.46	100.0	V	112.0	-4.4


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Order Number: 168568375 130
Model: W701
Test Mode: Wireless Charging only, MPP, 15W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Solomon Wu / Murphy Chen
Tem./Hum./Pressure: 24.0°C/52.1%/101kPa
Remark: SR 2

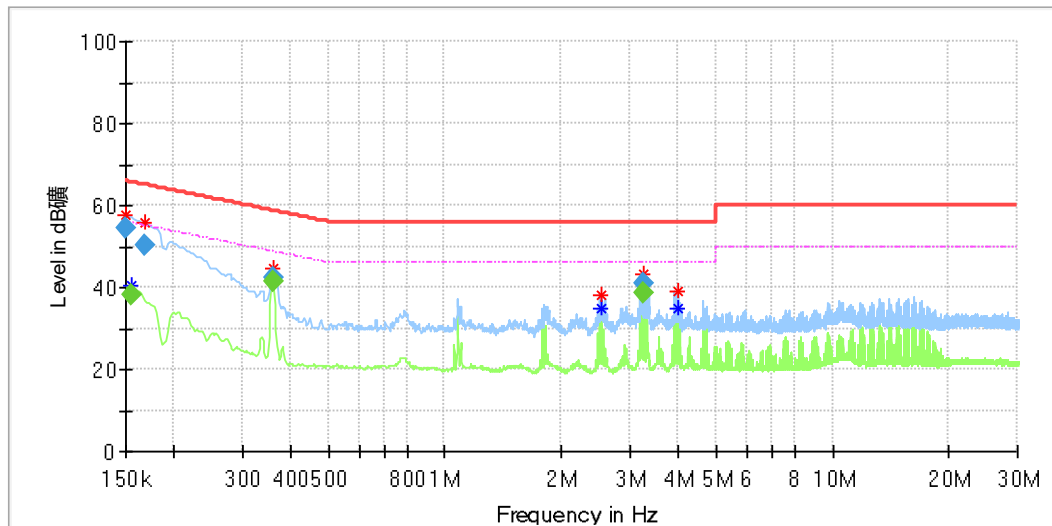

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150	57.5	---	66.00	8.46	L1	9.5
0.155	---	40.5	55.73	15.24	L1	9.6
0.167	56.0	---	65.09	9.04	L1	9.6
0.359	44.5	---	58.75	14.23	L1	9.6
0.359	---	42.3	48.75	6.48	L1	9.6
2.540	---	35.1	46.00	10.91	L1	9.6
2.540	38.3	---	56.00	17.67	L1	9.6
3.262	---	41.4	46.00	4.63	L1	9.6
3.262	43.4	---	56.00	12.58	L1	9.6
4.003	---	34.8	46.00	11.24	L1	9.7
4.003	39.2	---	56.00	16.82	L1	9.7

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150	54.6	---	66.00	11.45	1000.0	9.0	L1	9.5
0.155	---	38.0	55.73	17.72	1000.0	9.0	L1	9.6
0.167	50.2	---	65.09	14.86	1000.0	9.0	L1	9.6
0.359	---	41.5	48.75	7.27	1000.0	9.0	L1	9.6
0.359	42.3	---	58.75	16.44	1000.0	9.0	L1	9.6
3.262	---	38.6	46.00	7.37	1000.0	9.0	L1	9.6
3.262	40.9	---	56.00	15.12	1000.0	9.0	L1	9.6

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charger
Order Number: 168568375 130
Model: W701
Test Mode: Wireless Charging only, MPP, 15W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Solomon Wu / Murphy Chen
Tem./Hum./Pressure: 24.0°C/52.1%/101kPa
Remark: SR 2

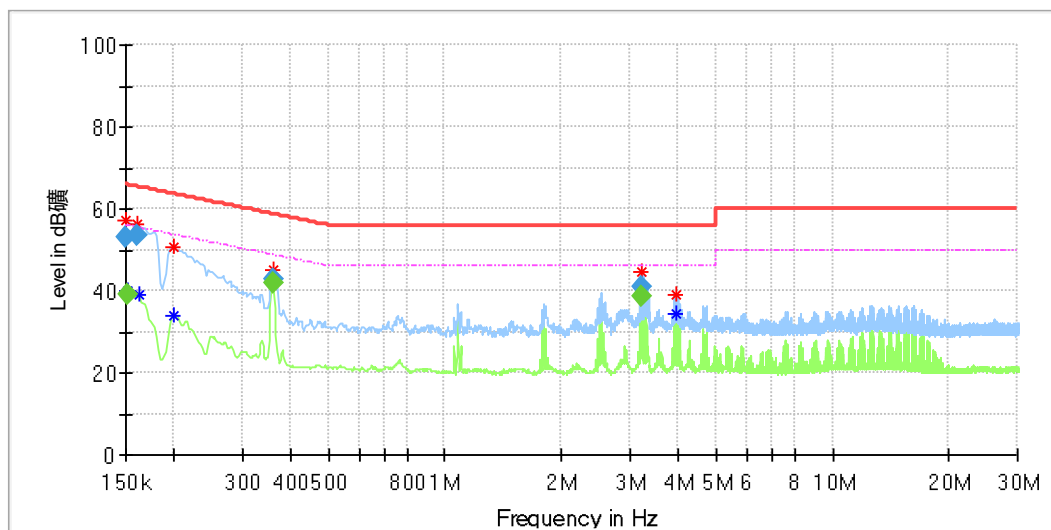

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150	57.1	---	66.00	8.91	N	9.7
0.152	---	40.2	55.86	15.69	N	9.7
0.160	56.1	---	65.47	9.37	N	9.8
0.162	---	38.9	55.34	16.48	N	9.8
0.200	---	34.1	53.62	19.53	N	9.9
0.200	50.5	---	63.62	13.15	N	9.9
0.359	---	42.3	48.75	6.45	N	9.9
0.359	45.0	---	58.75	13.76	N	9.9
3.217	44.6	---	56.00	11.44	N	9.8
3.217	---	41.1	46.00	4.95	N	9.8
3.936	---	34.5	46.00	11.46	N	9.7
3.936	39.3	---	56.00	16.75	N	9.7

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150	53.2	---	66.00	12.83	1000.0	9.0	N	9.7
0.152	---	39.3	55.86	16.57	1000.0	9.0	N	9.7
0.160	53.6	---	65.47	11.84	1000.0	9.0	N	9.8
0.359	---	41.9	48.75	6.84	1000.0	9.0	N	9.9
0.359	42.6	---	58.75	16.10	1000.0	9.0	N	9.9
3.217	---	38.7	46.00	7.25	1000.0	9.0	N	9.8
3.217	41.1	---	56.00	14.89	1000.0	9.0	N	9.8