

Prüfbericht-Nr.: Test report no.:	CN25DRMT 001	Auftrags-Nr.: Order no.:	168573768	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-09-08	
Auftraggeber: Client:	Ugreen Group Limited UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, 518000, China			
Prüfgegenstand: Test item:	3-in-1 Wireless Charger			
Bezeichnung / Typ-Nr.: Identification / Type no.:	W711			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2025-09-10	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A004082331-001~004			
Prüfzeitraum: Testing period:	2025-09-18 - 2025-10-26			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	<u>X Lin Lin</u>		genehmigt von: authorized by:	<u>X Hardy Suo</u>
Datum: Date:	2025-10-31		Ausstellungsdatum: Issue date:	2025-10-31
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2AQI5-W711A			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25DRMT 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25DRMT 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2024-10-31	2025-10-30
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2024-10-31	2025-10-30
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2026-07-18
Artificial Mains Network	R&S	ENV432	101546	2026-02-09
EMC32 Test Software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 3-in-1 Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	3-in-1 Wireless Charger
Type Designation:	W711
Product Number (P/N) code:	55676, 55676P, 55676X, 55676A, 55676B, 55676U, 55676JP, 55676ZD, 55677, 55677P, 55677X, 55677A, 55677B, 55677U, 55677JP, 55677ZD, 55678, 55678P, 55678X, 55678A, 55678B, 55678U, 55678JP, 55684ZD
FCC ID:	2AQI5-W711A
Operating Voltage:	USB-C1(IN) Input: 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3.0A Wireless Charging Output Power: iPhone 25.0W Max, Apple Watch 5.0W Max, AirPods 5.0 Max Wireless Charging Total Output Power: 32.5W Max USB-C2(OUT) Output: 5Vdc, 2A, 10W Max Total Output Power: 35.0W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Wireless charging output power:	Magnetic Wireless Charger: 5W / 7.5W / 10W / 15W / 25W Max. TWS Charging: 5W Max. Watch Charging: 5W Max.
Type-C2 Output power:	10W Max
AC/DC Adapter:	Model: W0452 Input: 100-240Vac, 50/60Hz, 1.2A Output: 5Vdc, 3A/ 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3A/ 20Vdc, 2.25A
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 326.5 kHz & 360kHz & 1.778MHz
Operating Frequency:	110.5 – 148.5 kHz & 326.5 kHz & 360kHz & 1.778MHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	5W / 7.5W / 10W / 15W / 25W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, MPP, 15W (Phone)
- E. On, Wireless Charging, MPP, 25W (Phone)
- F. On, Wireless Charging, 5W TWS
- G. On, Wireless Charging, 5W Watch
- H. On, Co-location mode (Worst case mode A~E + mode F + mode G)
- I. On, Standby mode
- J. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W711 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Wireless charge Load	YBZ	YBZ-MPP25	N/A
Watch	Apple	iWatch	N/A
Earphone	Apple	Airpods Pro2	N/A
Cell Phone	Apple	iPhone 16 Plus	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

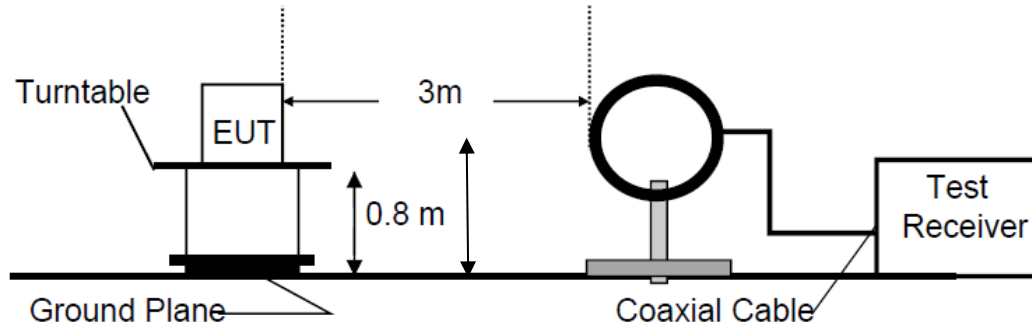


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


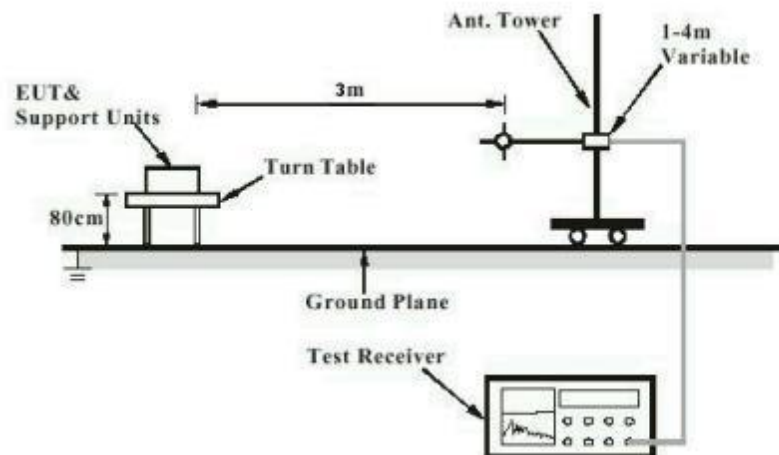


Diagram of Measurement Configuration for Mains Conduction Measurement

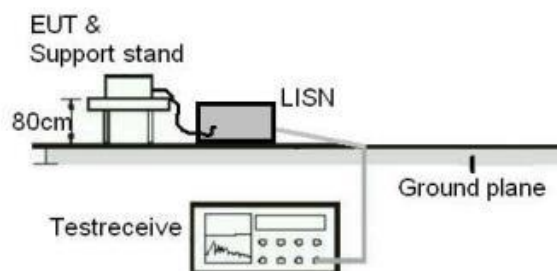

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25DRMT 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-09-27 to 2025-09-28
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, I
Ambient temperature	: 24 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25DRMT 001
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.209 & 15.205
Basic standard : ANSI C63.10: 2020
Limits : Refer to 15.209(a)
Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2025-10-01 to 2025-10-02
Input voltage : AC 120V, 60Hz
Operation mode : A, B, C, D, E, F, G, H, I
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25DRMT 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-09-18 to 2025-10-26
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H, I
Ambient temperature	: 24.0 °C
Relative humidity	: 52.1 %
Atmospheric pressure	: 101 kPa

This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (EPP 10W).....	2
Wireless charging (MPP 25W)	3
Wireless charging (TWS 5W)	4
Wireless charging (Watch 5W_326.5kHz)	5
Wireless charging (Watch 5W_1.778MHz).....	6
Standby mode (127kHz).....	7
Standby mode (140kHz).....	8
Standby mode (326.5kHz).....	9
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	10
Wireless charging (EPP 10W).....	10
Wireless charging (MPP 25W)	21
Wireless charging (TWS 5W)	32
Wireless charging (Watch 5W_326.5kHz)	43
Wireless charging (Watch 5W_1.778MHz).....	54
Wireless charging (Co-location).....	59
Standby mode.....	64
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	69


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (EPP 10W)

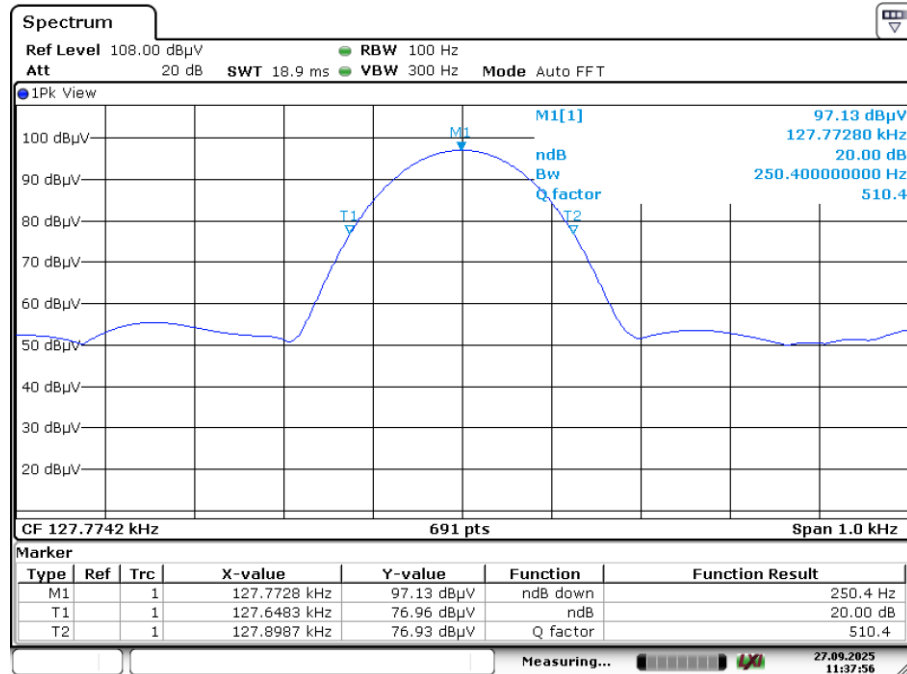


Date: 27.SEP.2025 11:37:56

Wireless charging (MPP 25W)

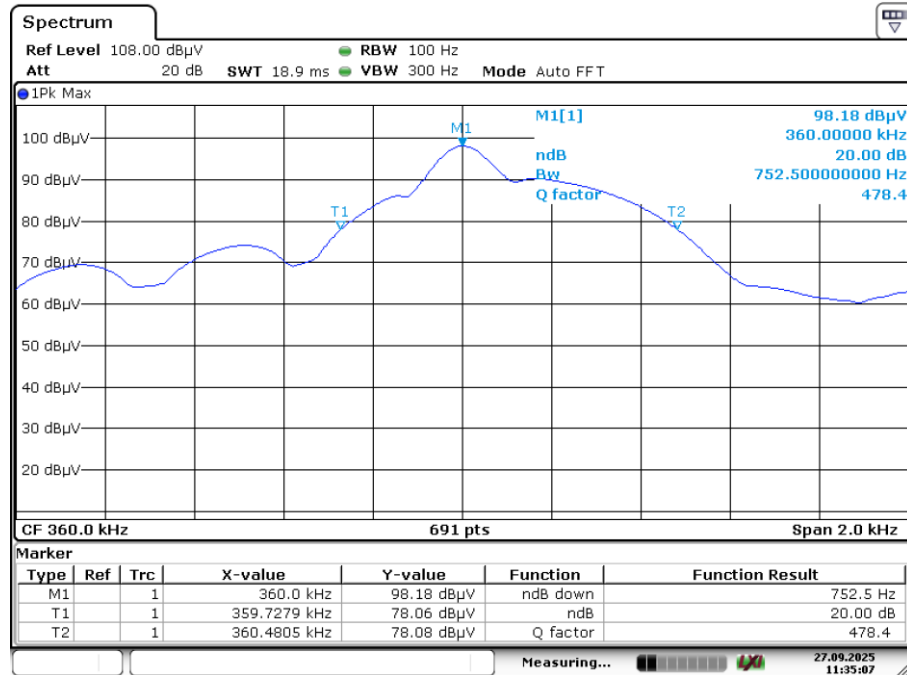


Date: 27.SEP.2025 11:35:07

Wireless charging (TWS 5W)

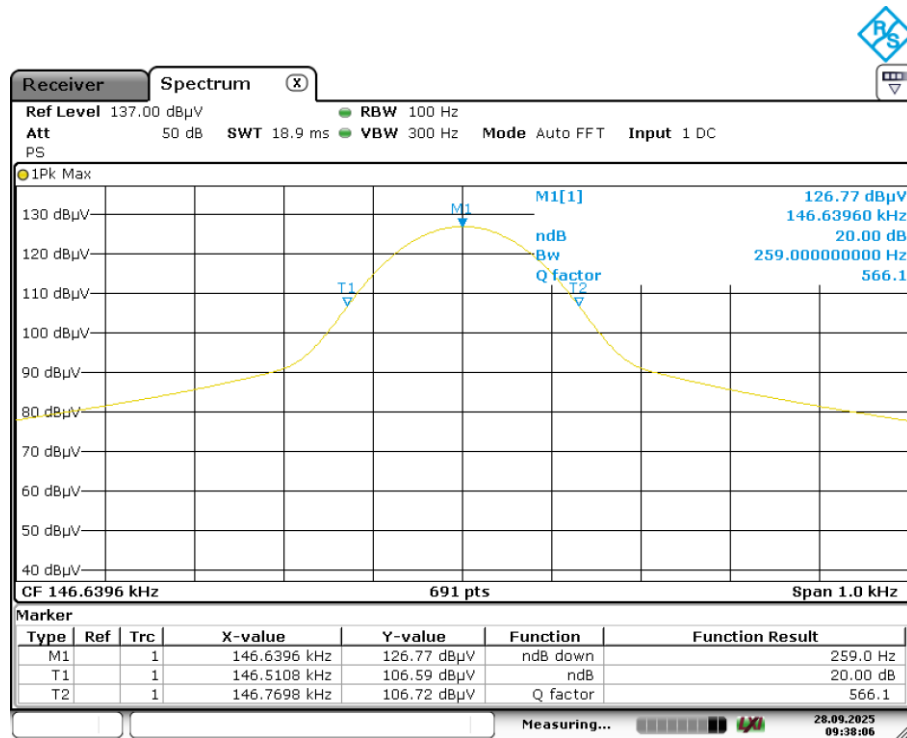


Date: 28.SEP.2025 09:38:06

Wireless charging (Watch 5W_326.5kHz)

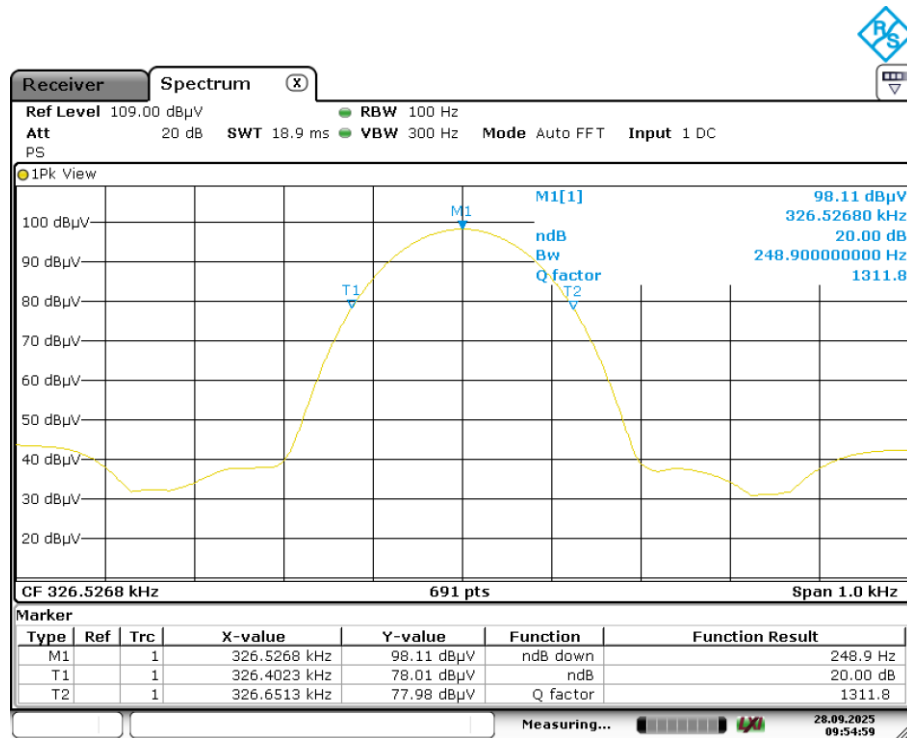


Date: 28.SEP.2025 09:54:59

Wireless charging (Watch 5W_1.778MHz)

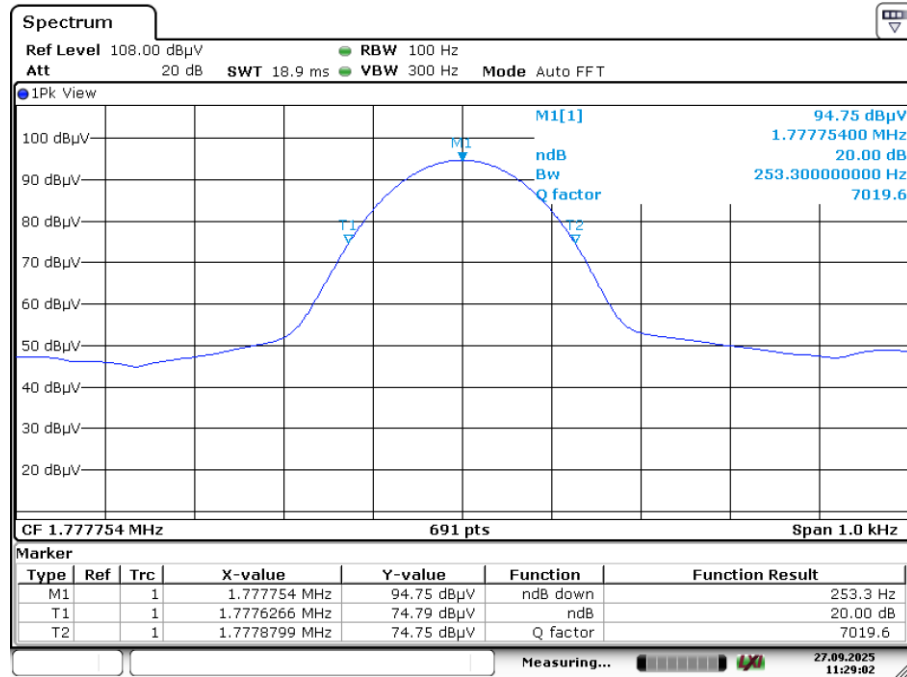


Date: 27.SEP.2025 11:29:02

Standby mode (127kHz)

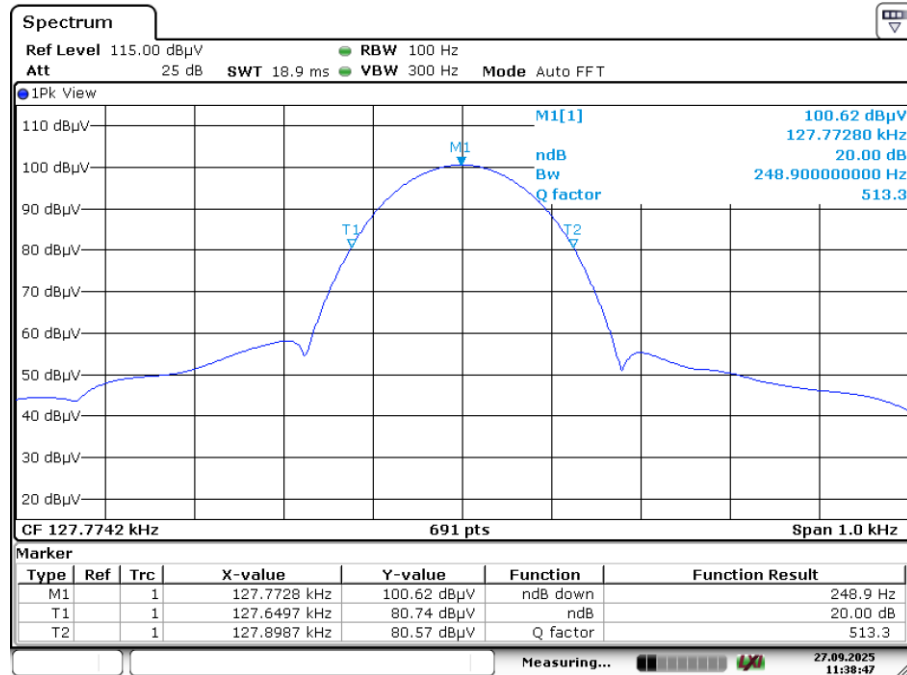


Date: 27.SEP.2025 11:38:47

Standby mode (140kHz)

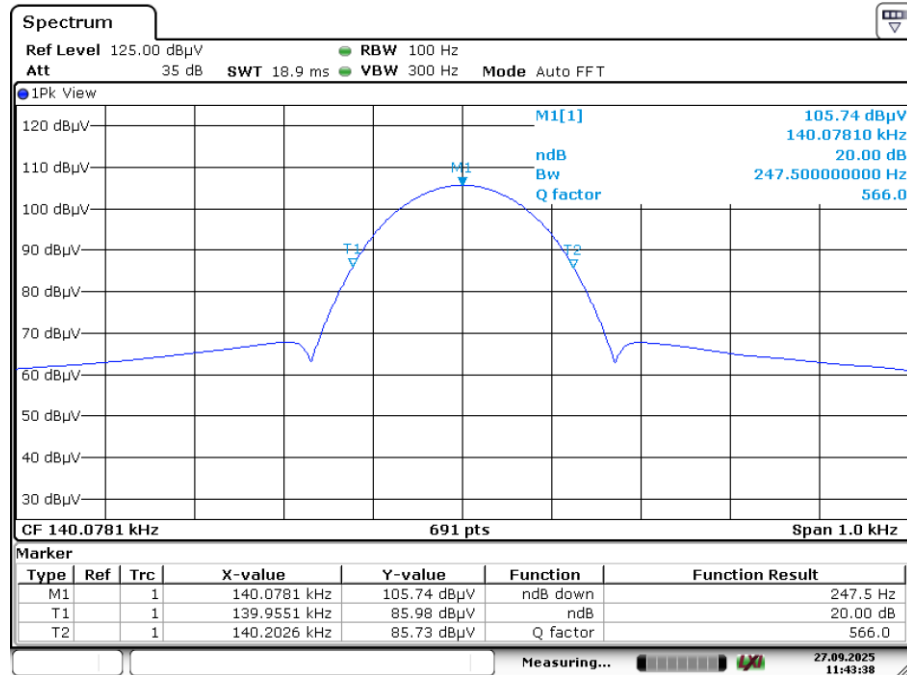

Date: 27.SEP.2025 11:43:38

Standby mode (326.5kHz)

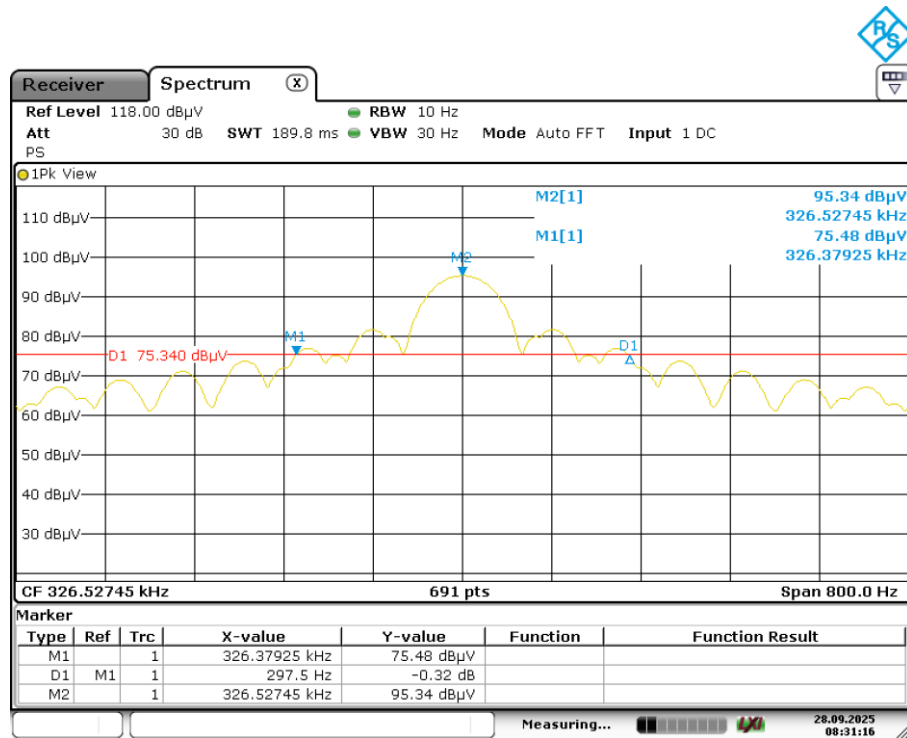

Date: 28.SEP.2025 08:31:16


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (EPP 10W)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W711
Test Mode:	Charging
Order No/Sample No:	168573768/A004082331-004
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

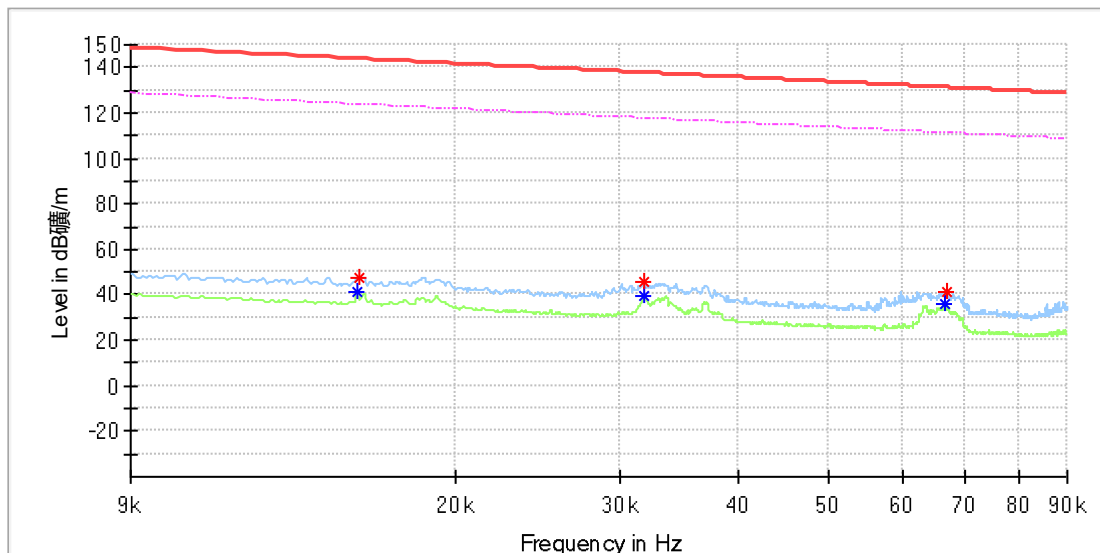


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	---	41.60	123.66	82.06	100.0	X	251.0	20.0
0.015769	47.41	---	143.63	96.23	100.0	X	251.0	20.0
0.031796	45.42	---	137.54	92.13	100.0	X	42.0	20.0
0.031796	---	39.48	117.54	78.06	100.0	X	42.0	20.0
0.066741	---	35.63	111.11	75.48	100.0	X	59.0	20.0
0.067089	41.73	---	131.06	89.33	100.0	X	42.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

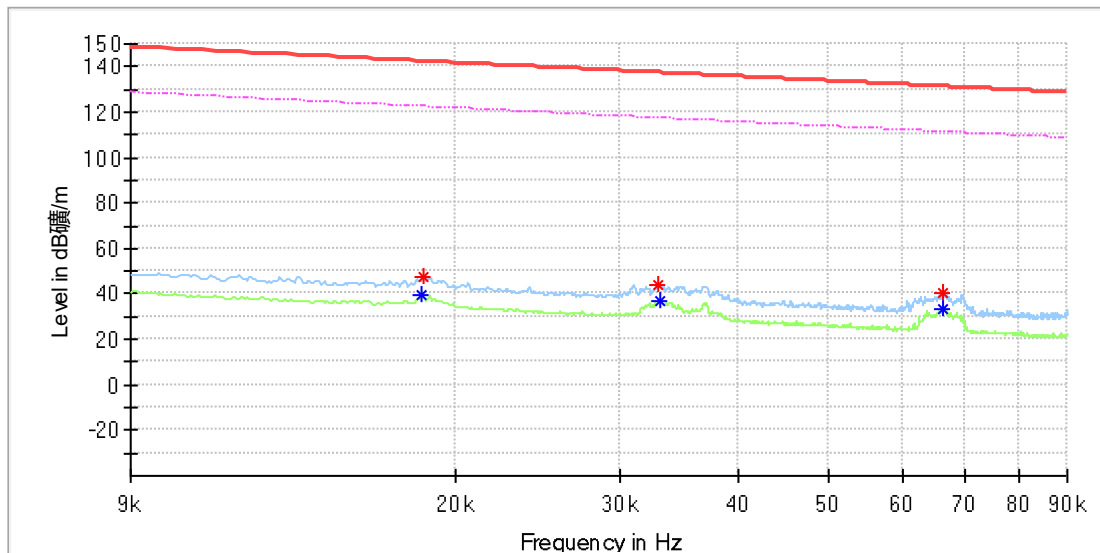


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	39.76	122.28	82.51	100.0	Y	160.0	20.0
0.018489	47.40	---	142.25	94.85	100.0	Y	160.0	20.0
0.032953	43.77	---	137.23	93.46	100.0	Y	93.0	20.0
0.033011	---	37.27	117.22	79.95	100.0	Y	93.0	20.0
0.066336	---	33.42	111.16	77.74	100.0	Y	87.0	20.0
0.066452	40.02	---	131.14	91.13	100.0	Y	100.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

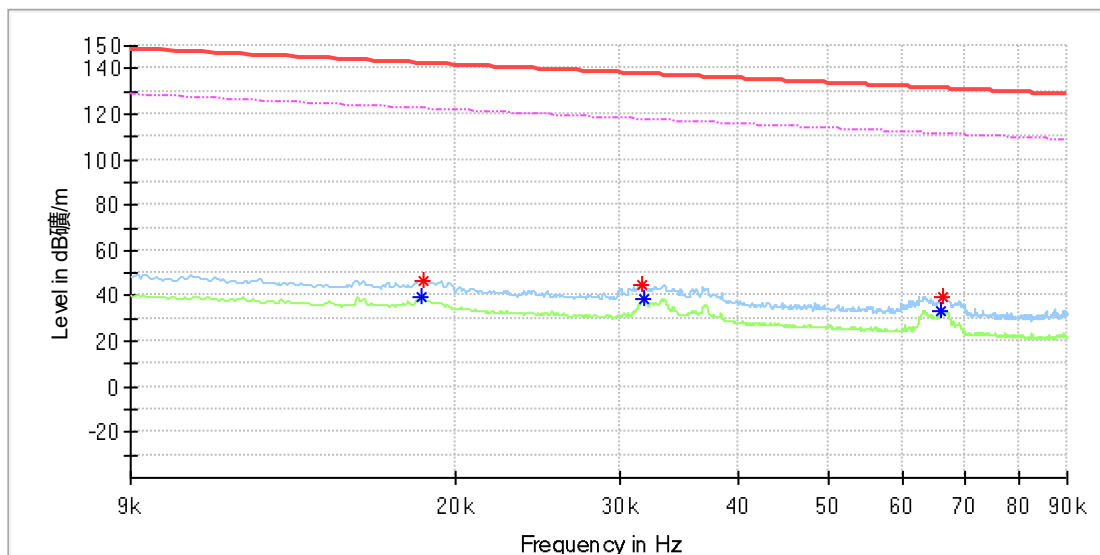


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	39.80	122.28	82.48	100.0	Z	290.0	20.0
0.018489	46.78	---	142.25	95.47	100.0	Z	210.0	20.0
0.031680	45.11	---	137.58	92.46	100.0	Z	100.0	20.0
0.031738	---	38.71	117.56	78.85	100.0	Z	105.0	20.0
0.066047	---	33.24	111.20	77.96	100.0	Z	100.0	20.0
0.066336	39.81	---	131.16	91.35	100.0	Z	100.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

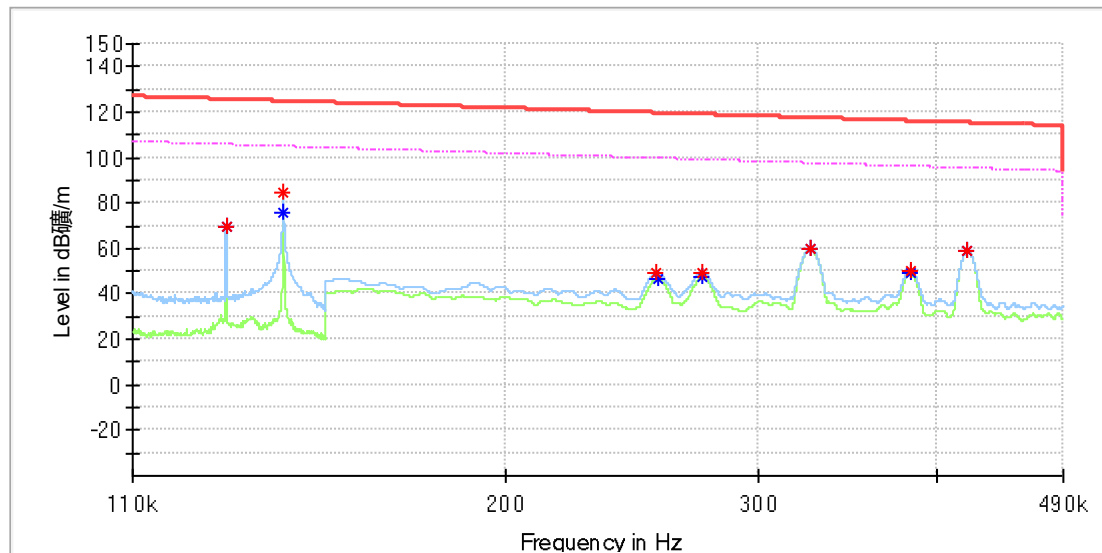


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	69.97	---	125.47	55.50	100.0	X	51.0	20.0
0.127772	---	69.86	105.47	35.61	100.0	X	51.0	20.0
0.140086	---	75.40	104.67	29.27	100.0	X	349.0	20.0
0.140086	84.60	---	124.67	40.07	100.0	X	349.0	20.0
0.255050	48.86	---	119.47	70.60	100.0	X	53.0	20.0
0.255450	---	46.45	99.46	53.01	100.0	X	53.0	20.0
0.274350	49.33	---	118.84	69.51	100.0	X	44.0	20.0
0.274500	---	47.22	98.83	51.61	100.0	X	44.0	20.0
0.326450	---	59.64	97.33	37.69	100.0	X	325.0	20.0
0.326500	59.79	---	117.32	57.53	100.0	X	325.0	20.0
0.383300	---	49.27	95.93	46.66	100.0	X	49.0	20.0
0.383350	50.18	---	115.93	65.75	100.0	X	49.0	20.0
0.420200	58.92	---	115.13	56.22	100.0	X	343.0	20.0
0.420250	---	58.84	95.13	36.30	100.0	X	343.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

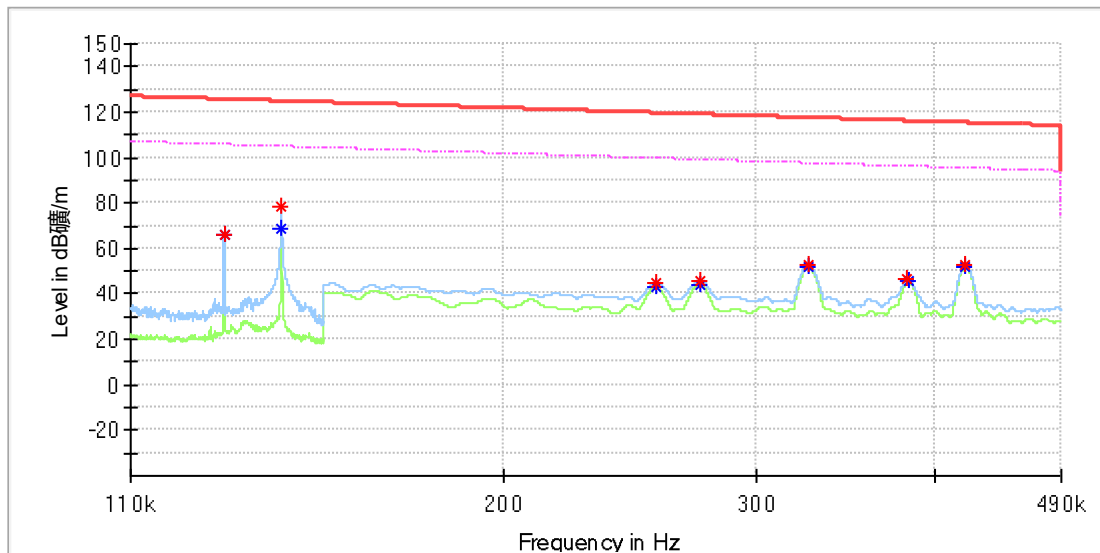


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	66.36	---	125.47	59.11	100.0	Y	112.0	20.0
0.127772	---	66.25	105.47	39.22	100.0	Y	112.0	20.0
0.140086	---	68.81	104.67	35.86	100.0	Y	263.0	20.0
0.140086	78.22	---	124.67	46.45	100.0	Y	263.0	20.0
0.255300	44.63	---	119.46	74.83	100.0	Y	344.0	20.0
0.255400	---	42.81	99.46	56.64	100.0	Y	344.0	20.0
0.274050	---	43.86	98.85	54.99	100.0	Y	152.0	20.0
0.274100	45.61	---	118.84	73.23	100.0	Y	152.0	20.0
0.326550	52.44	---	117.32	64.88	100.0	Y	260.0	20.0
0.326600	---	51.80	97.32	45.52	100.0	Y	260.0	20.0
0.383000	46.47	---	115.94	69.47	100.0	Y	131.0	20.0
0.383400	---	45.42	95.93	50.51	100.0	Y	131.0	20.0
0.420150	52.44	---	115.14	62.70	100.0	Y	64.0	20.0
0.420200	---	51.99	95.13	43.14	100.0	Y	64.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

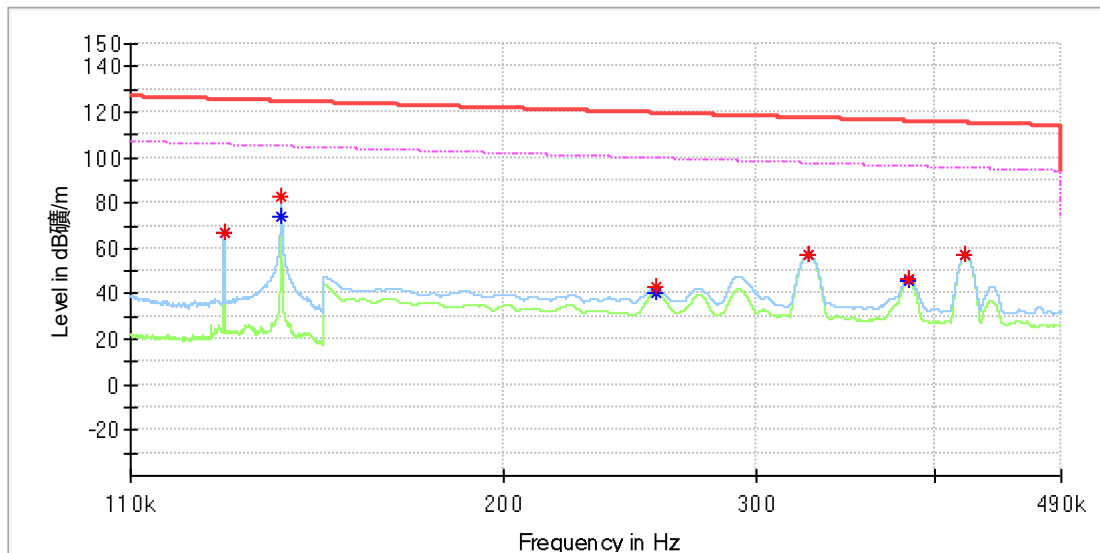


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	67.07	---	125.47	58.40	100.0	Z	69.0	20.0
0.127772	---	66.97	105.47	38.50	100.0	Z	69.0	20.0
0.140086	---	73.77	104.67	30.90	100.0	Z	348.0	20.0
0.140086	82.83	---	124.67	41.84	100.0	Z	348.0	20.0
0.255400	42.96	---	119.46	76.49	100.0	Z	214.0	20.0
0.255850	---	40.02	99.44	59.42	100.0	Z	214.0	20.0
0.326450	57.50	---	117.33	59.82	100.0	Z	299.0	20.0
0.326500	---	57.39	97.32	39.94	100.0	Z	299.0	20.0
0.383350	---	45.93	95.93	50.00	100.0	Z	48.0	20.0
0.383650	46.80	---	115.92	69.12	100.0	Z	48.0	20.0
0.420250	---	57.20	95.13	37.94	100.0	Z	1.0	20.0
0.420300	57.33	---	115.13	57.80	100.0	Z	1.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

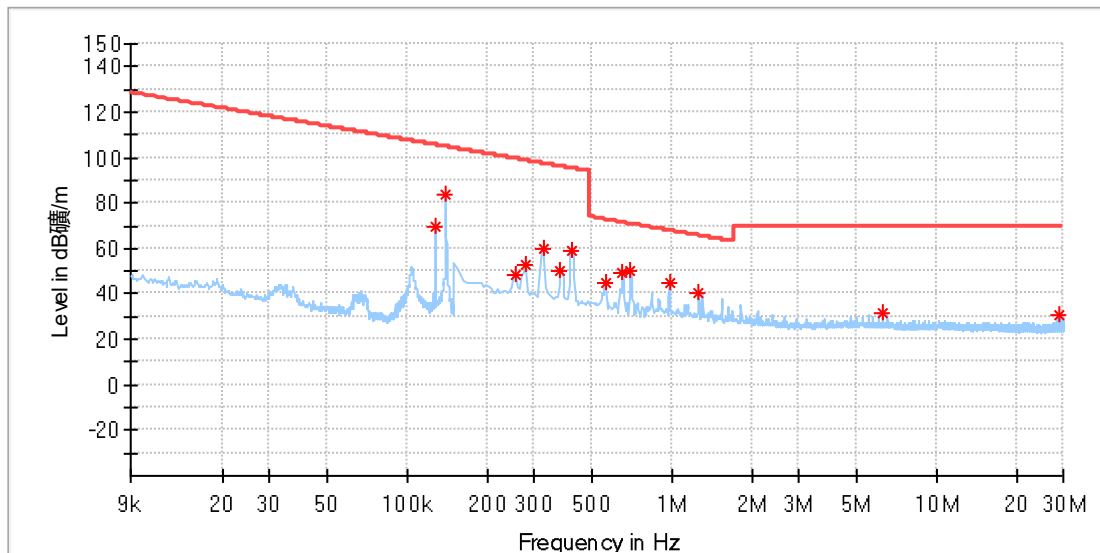

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	69.74	105.46	35.72	100.0	X	47.0	19.9
0.140130	83.87	104.67	20.80	100.0	X	320.0	19.9
0.255353	47.99	99.46	51.47	100.0	X	66.0	19.9
0.277302	52.85	98.74	45.89	100.0	X	314.0	19.9
0.325588	59.50	97.35	37.85	100.0	X	336.0	19.9
0.378265	50.34	96.05	45.71	100.0	X	52.0	19.9
0.417772	58.86	95.18	36.33	100.0	X	332.0	19.9
0.558243	44.50	72.67	28.17	100.0	X	314.0	19.9
0.650427	49.55	71.35	21.80	100.0	X	336.0	19.9
0.698713	50.18	70.73	20.54	100.0	X	0.0	19.9
0.975265	44.93	67.84	22.91	100.0	X	30.0	19.9
1.260596	40.35	65.62	25.26	100.0	X	332.0	19.9
6.260471	31.70	69.50	37.80	100.0	X	88.0	20.1
29.135228	30.64	69.50	38.86	100.0	X	217.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

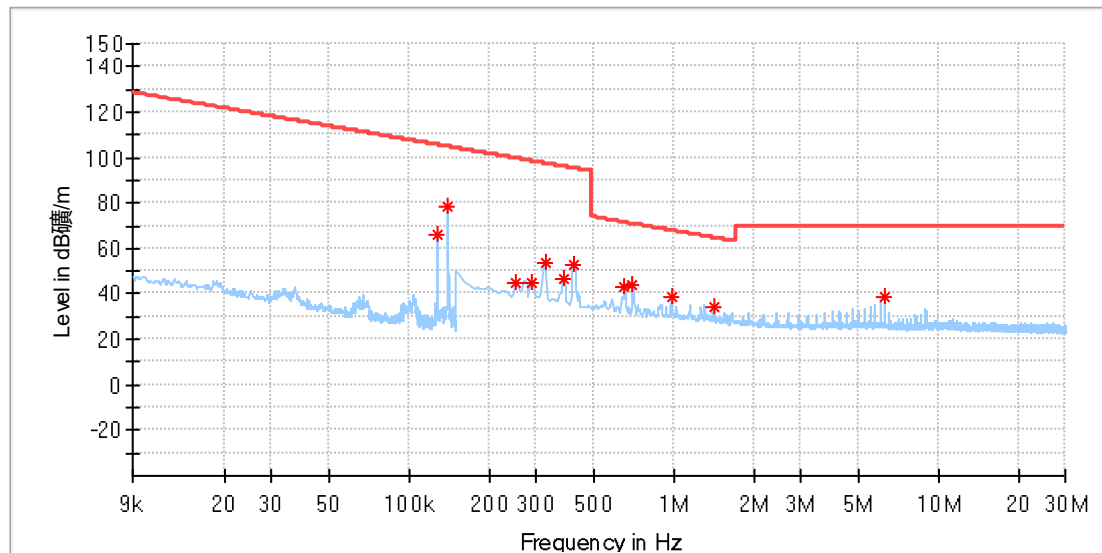

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	66.09	105.46	39.37	100.0	Y	114.0	19.9
0.140130	78.02	104.67	26.65	100.0	Y	263.0	19.9
0.250963	44.86	99.61	54.74	100.0	Y	170.0	19.9
0.290471	44.70	98.34	53.64	100.0	Y	63.0	19.9
0.325588	53.29	97.35	44.06	100.0	Y	23.0	19.9
0.382655	46.66	95.95	49.28	100.0	Y	106.0	19.9
0.417772	52.85	95.18	42.34	100.0	Y	233.0	19.9
0.650427	43.21	71.35	28.13	100.0	Y	23.0	19.9
0.698713	43.98	70.73	26.75	100.0	Y	233.0	19.9
0.975265	38.92	67.84	28.92	100.0	Y	70.0	19.9
1.405456	34.38	64.67	30.29	100.0	Y	70.0	19.9
6.260471	38.34	69.50	31.16	100.0	Y	27.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

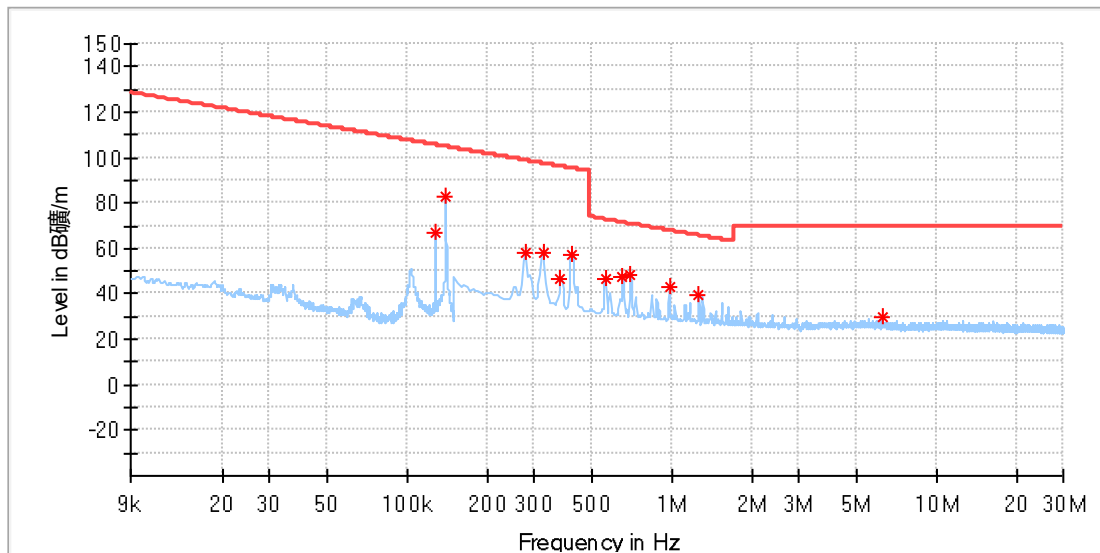

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	66.87	105.46	38.60	100.0	Z	59.0	19.9
0.140130	82.60	104.67	22.07	100.0	Z	323.0	19.9
0.277302	57.65	98.74	41.09	100.0	Z	348.0	19.9
0.325588	57.72	97.35	39.63	100.0	Z	314.0	19.9
0.378265	46.71	96.05	49.33	100.0	Z	74.0	19.9
0.417772	57.49	95.18	37.69	100.0	Z	336.0	19.9
0.558243	46.34	72.67	26.33	100.0	Z	348.0	19.9
0.650427	47.85	71.35	23.50	100.0	Z	314.0	19.9
0.698713	48.47	70.73	22.25	100.0	Z	336.0	19.9
0.979655	43.15	67.80	24.64	100.0	Z	336.0	19.9
1.260596	39.25	65.62	26.37	100.0	Z	336.0	19.9
6.260471	29.44	69.50	40.06	100.0	Z	99.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

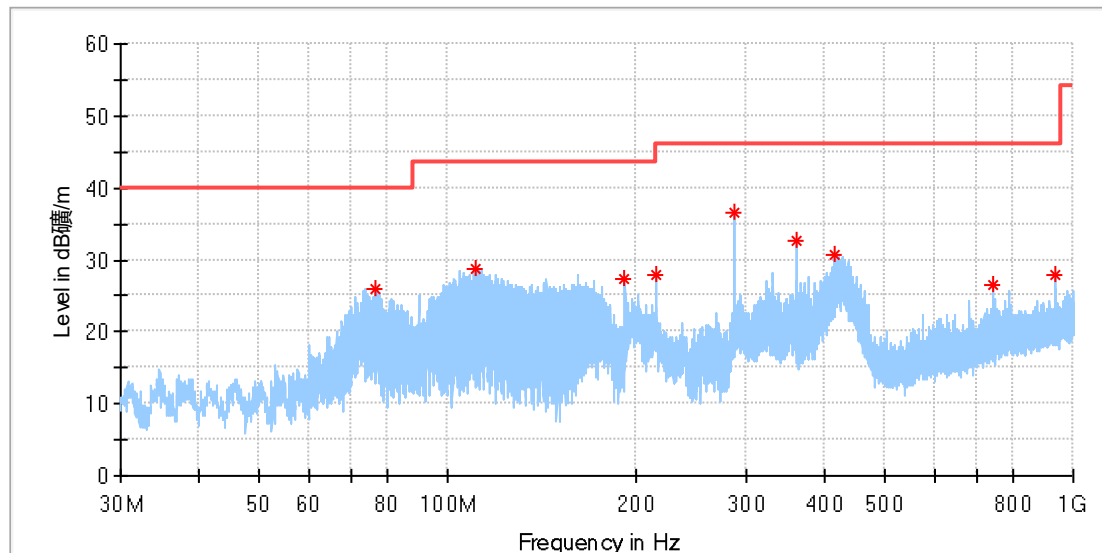

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
76.485385	26.05	40.00	13.95	100.0	H	316.0	-23.5
110.659231	28.64	43.50	14.86	100.0	H	188.0	-19.3
191.990000	27.37	43.50	16.13	100.0	H	253.0	-19.5
216.016154	27.77	46.00	18.23	100.0	H	214.0	-18.7
288.020000	36.50	46.00	9.50	100.0	H	260.0	-16.6
360.023846	32.77	46.00	13.23	100.0	H	229.0	-14.6
416.321154	30.70	46.00	15.30	100.0	H	111.0	-13.3
742.502308	26.37	46.00	19.63	100.0	H	133.0	-7.2
938.442308	27.91	46.00	18.09	100.0	H	339.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

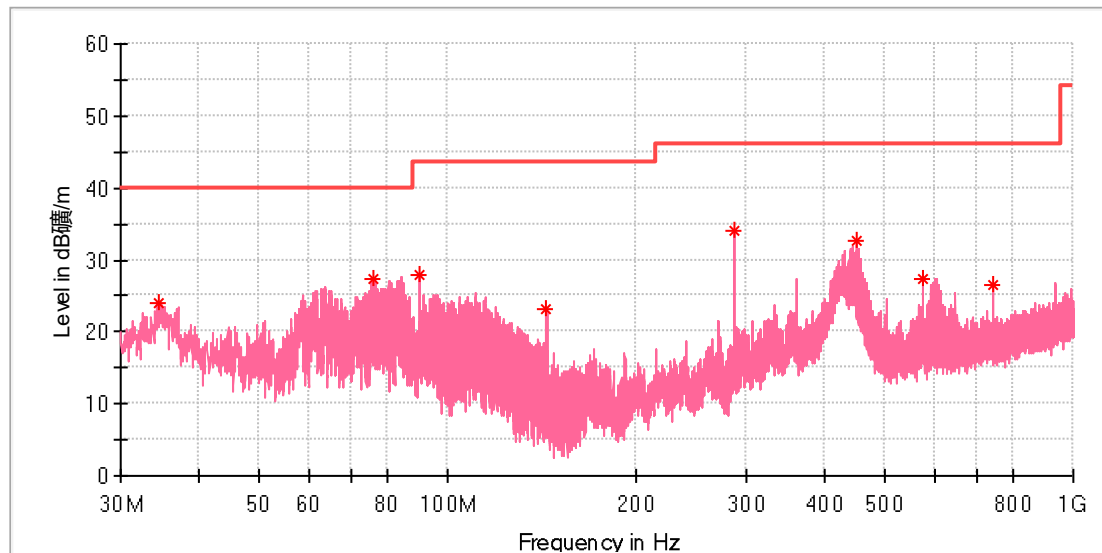

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.626154	24.14	40.00	15.86	100.0	V	97.0	-22.1
76.186923	27.48	40.00	12.52	100.0	V	233.0	-23.5
89.953462	27.94	43.50	15.56	100.0	V	233.0	-21.1
144.012308	23.28	43.50	20.22	100.0	V	281.0	-22.4
288.020000	34.16	46.00	11.84	100.0	V	78.0	-16.6
449.226539	32.64	46.00	13.36	100.0	V	346.0	-12.8
575.998077	27.48	46.00	18.52	100.0	V	265.0	-10.2
742.502308	26.58	46.00	19.42	100.0	V	313.0	-7.2


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (MPP 25W)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W711
Test Mode:	Charging
Order No/Sample No:	168573768/A004082331-004
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

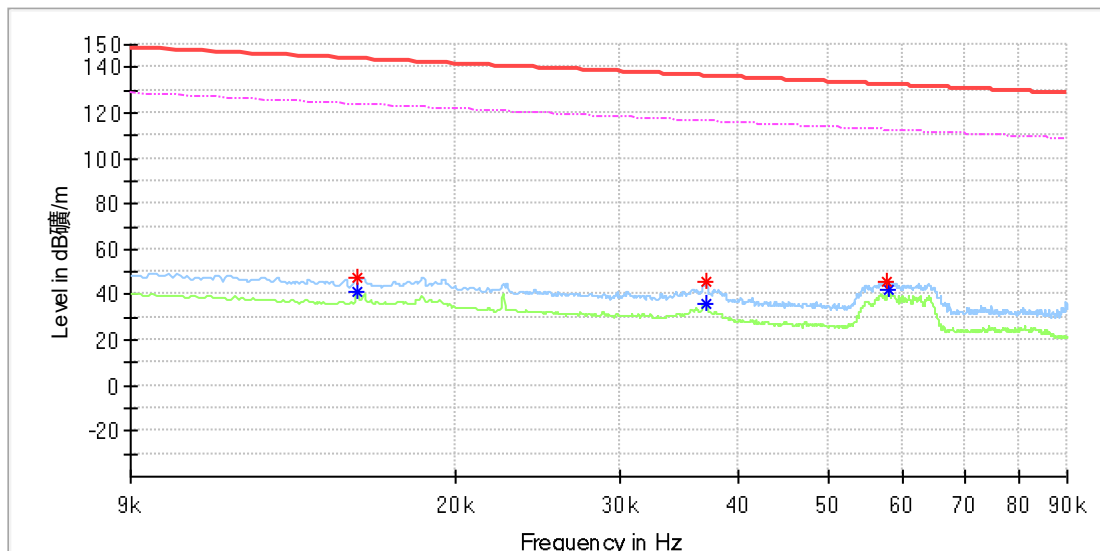


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	47.35	---	143.66	96.31	100.0	X	150.0	20.0
0.015711	---	41.23	123.66	82.43	100.0	X	150.0	20.0
0.037061	45.30	---	136.21	90.91	100.0	X	173.0	20.0
0.037061	---	36.43	116.21	79.78	100.0	X	173.0	20.0
0.057831	46.06	---	132.35	86.29	100.0	X	156.0	20.0
0.058063	---	42.04	112.32	70.28	100.0	X	47.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

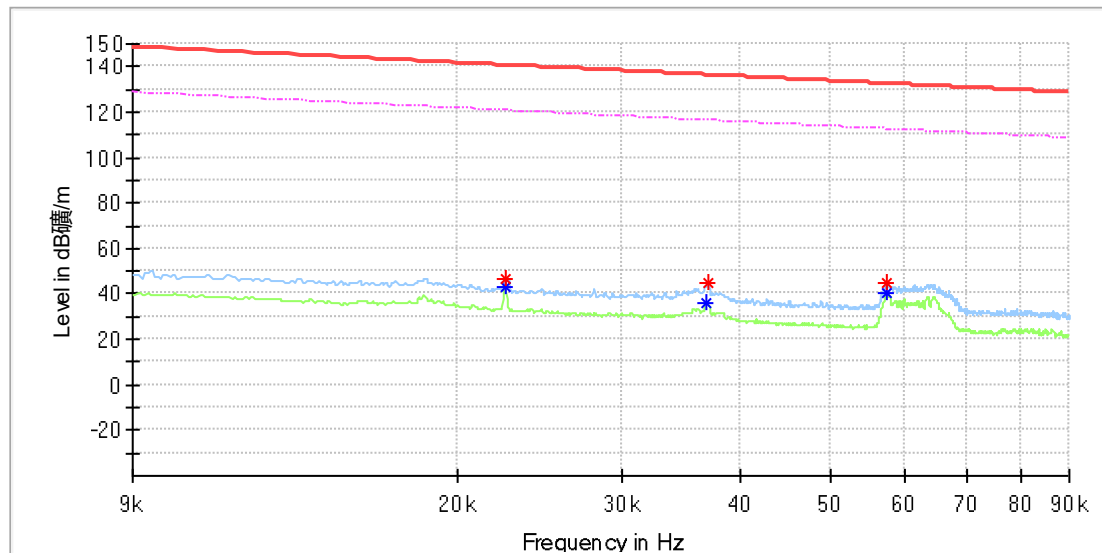


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.022481	46.98	---	140.55	93.57	100.0	Y	162.0	20.0
0.022481	---	43.35	120.55	77.20	100.0	Y	162.0	20.0
0.036887	---	36.01	116.25	80.24	100.0	Y	149.0	20.0
0.037003	44.53	---	136.23	91.69	100.0	Y	0.0	20.0
0.057600	44.61	---	132.39	87.78	100.0	Y	94.0	20.0
0.057600	---	40.44	112.39	71.95	100.0	Y	94.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

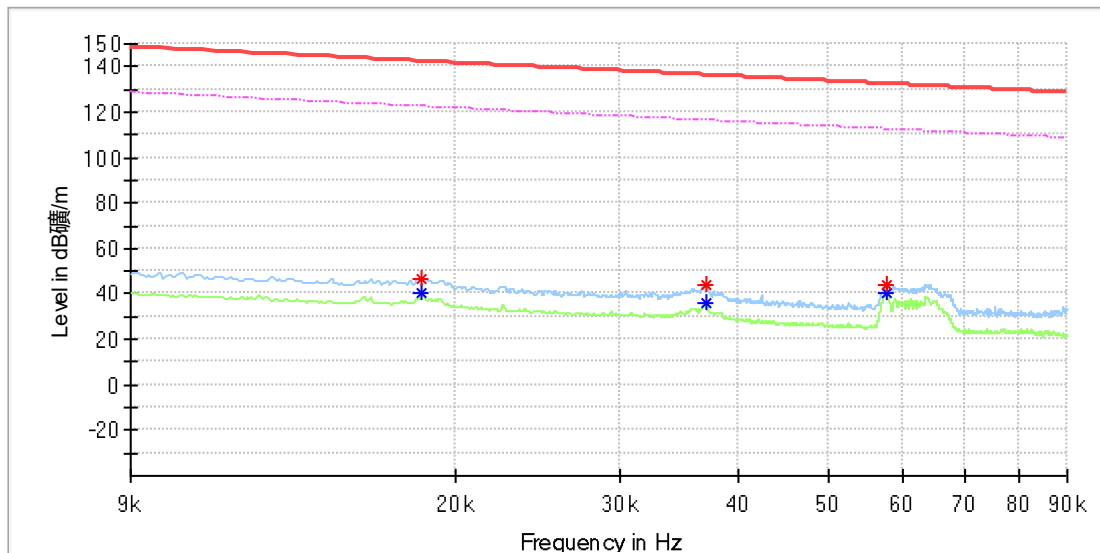


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	46.68	---	142.28	95.60	100.0	Z	16.0	20.0
0.018431	---	40.33	122.28	81.94	100.0	Z	16.0	20.0
0.037003	43.69	---	136.23	92.54	100.0	Z	103.0	20.0
0.037119	---	35.91	116.20	80.29	100.0	Z	3.0	20.0
0.057831	43.68	---	132.35	88.68	100.0	Z	98.0	20.0
0.057831	---	40.21	112.35	72.14	100.0	Z	98.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

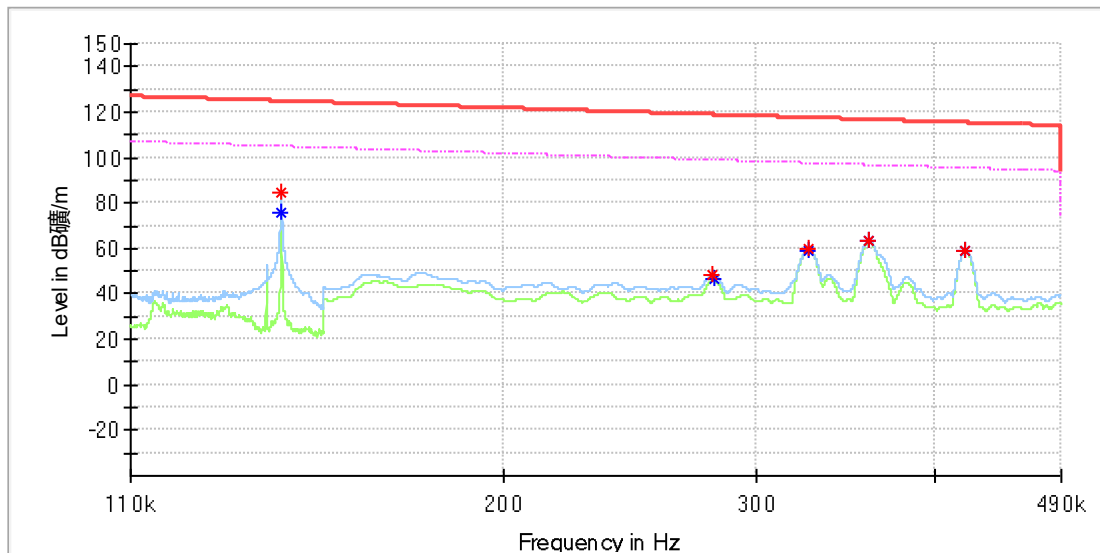


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.140086	---	75.71	104.67	28.96	100.0	X	340.0	20.0
0.140086	84.57	---	124.67	40.10	100.0	X	340.0	20.0
0.280250	48.11	---	118.65	70.54	100.0	X	139.0	20.0
0.280350	---	46.17	98.65	52.48	100.0	X	139.0	20.0
0.326600	---	59.36	97.32	37.96	100.0	X	334.0	20.0
0.326650	59.47	---	117.32	57.85	100.0	X	334.0	20.0
0.360050	63.18	---	116.48	53.29	100.0	X	71.0	20.0
0.360050	---	63.03	96.48	33.45	100.0	X	71.0	20.0
0.420250	---	58.73	95.13	36.40	100.0	X	348.0	20.0
0.420450	59.00	---	115.13	56.13	100.0	X	348.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

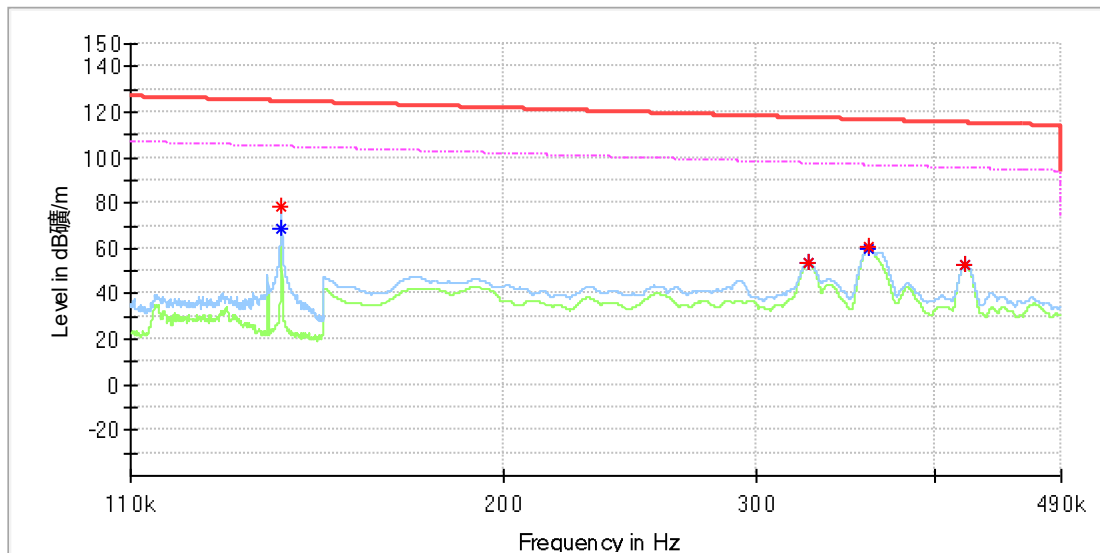


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.140086	---	69.11	104.67	35.56	100.0	Y	243.0	20.0
0.140086	78.02	---	124.67	46.65	100.0	Y	243.0	20.0
0.326550	---	53.24	97.32	44.08	100.0	Y	224.0	20.0
0.326600	53.78	---	117.32	63.54	100.0	Y	224.0	20.0
0.360050	60.33	---	116.48	56.14	100.0	Y	91.0	20.0
0.360050	---	60.01	96.48	36.46	100.0	Y	91.0	20.0
0.420300	52.92	---	115.13	62.21	100.0	Y	77.0	20.0
0.420350	---	52.51	95.13	42.62	100.0	Y	77.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

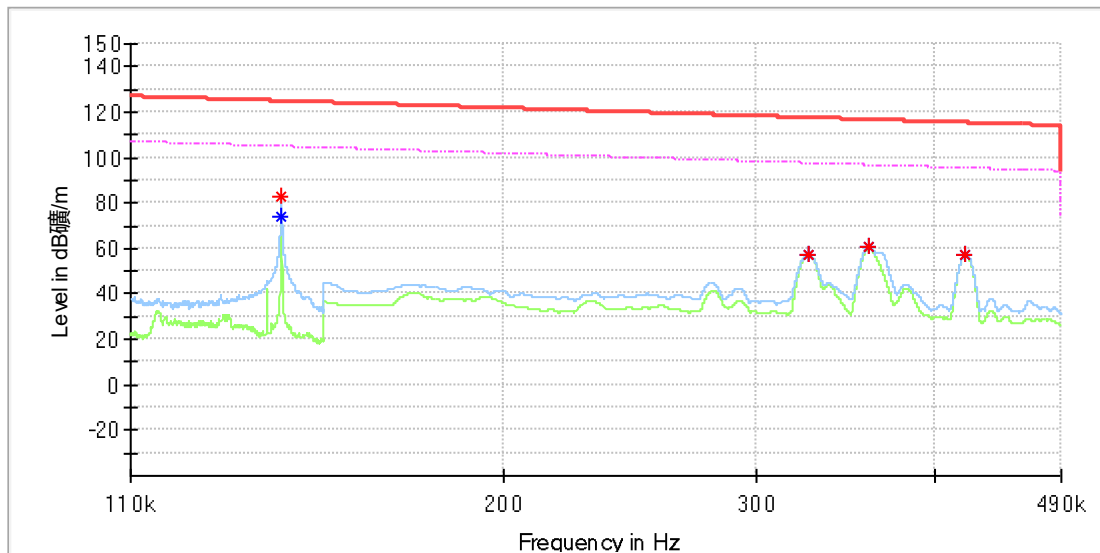


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.140086	---	73.94	104.67	30.73	100.0	Z	351.0	20.0
0.140086	82.83	---	124.67	41.84	100.0	Z	351.0	20.0
0.326500	---	57.40	97.32	39.93	100.0	Z	304.0	20.0
0.326500	57.51	---	117.32	59.81	100.0	Z	304.0	20.0
0.359950	60.64	---	116.48	55.84	100.0	Z	55.0	20.0
0.359950	---	60.44	96.48	36.04	100.0	Z	55.0	20.0
0.420250	---	57.19	95.13	37.95	100.0	Z	329.0	20.0
0.420350	57.41	---	115.13	57.72	100.0	Z	329.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

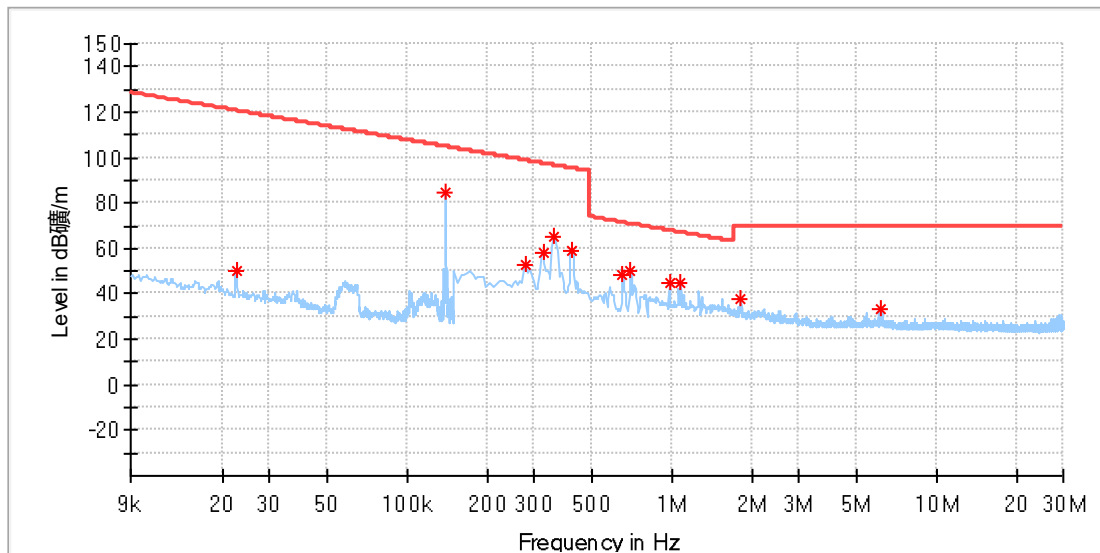

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.022496	49.77	120.55	70.77	100.0	X	247.0	19.9
0.140130	84.21	104.67	20.46	100.0	X	329.0	19.9
0.277302	52.73	98.74	46.01	100.0	X	166.0	19.9
0.325588	58.24	97.35	39.11	100.0	X	281.0	19.9
0.356316	65.18	96.57	31.39	100.0	X	15.0	19.9
0.417772	59.31	95.18	35.87	100.0	X	348.0	19.9
0.650427	48.54	71.35	22.81	100.0	X	281.0	19.9
0.698713	50.26	70.73	20.47	100.0	X	336.0	19.9
0.979655	45.05	67.80	22.75	100.0	X	336.0	19.9
1.080618	44.97	66.95	21.98	100.0	X	15.0	19.9
1.818088	38.02	69.50	31.48	100.0	X	336.0	20.0
6.120000	33.43	69.50	36.07	100.0	X	90.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

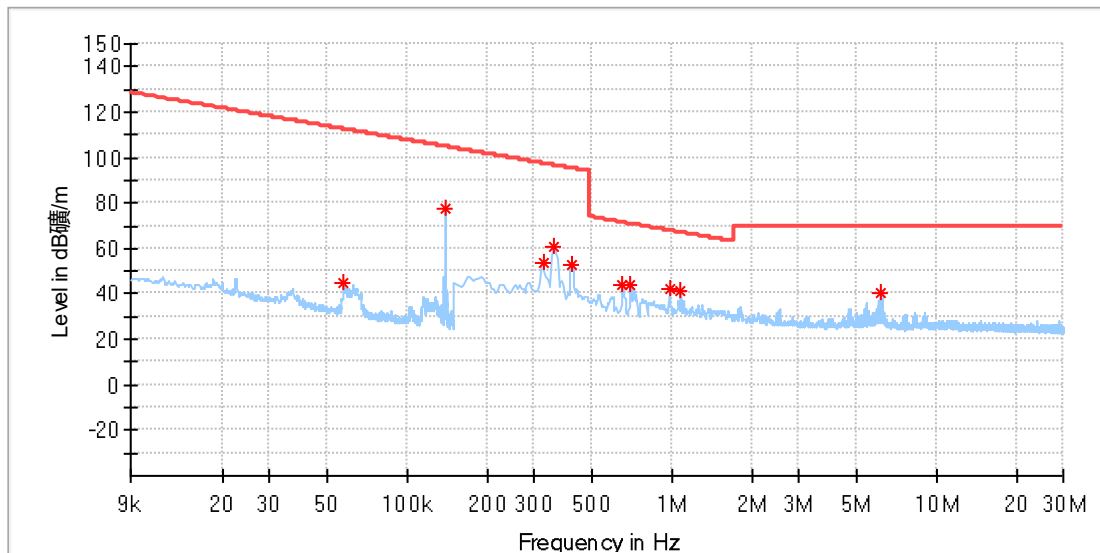

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.057444	44.50	112.41	67.91	100.0	Y	87.0	19.9
0.140130	77.86	104.67	26.81	100.0	Y	73.0	19.9
0.325588	53.85	97.35	43.50	100.0	Y	26.0	19.9
0.356316	60.63	96.57	35.94	100.0	Y	76.0	19.9
0.417772	52.90	95.18	42.29	100.0	Y	80.0	19.9
0.650427	44.17	71.35	27.17	100.0	Y	90.0	19.9
0.698713	44.29	70.73	26.44	100.0	Y	80.0	19.9
0.979655	41.90	67.80	25.90	100.0	Y	202.0	19.9
1.076228	41.72	66.99	25.26	100.0	Y	105.0	19.9
6.120000	40.13	69.50	29.37	100.0	Y	36.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

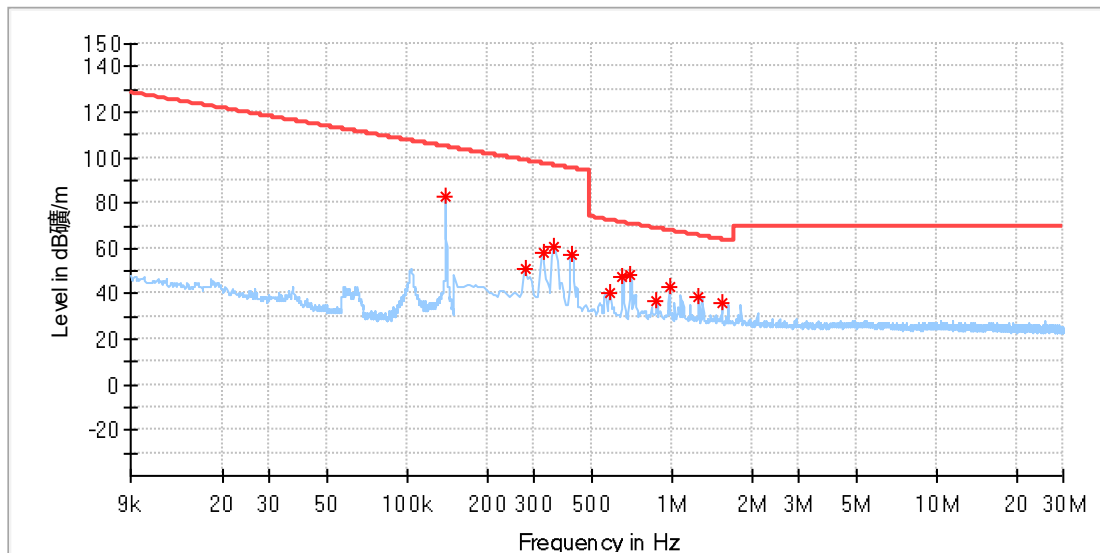

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.140130	82.55	104.67	22.12	100.0	Z	321.0	19.9
0.277302	50.75	98.74	47.99	100.0	Z	120.0	19.9
0.325588	57.73	97.35	39.62	100.0	Z	325.0	19.9
0.356316	60.63	96.57	35.94	100.0	Z	45.0	19.9
0.417772	57.33	95.18	37.85	100.0	Z	359.0	19.9
0.584581	40.61	72.27	31.66	100.0	Z	8.0	19.9
0.650427	47.72	71.35	23.63	100.0	Z	325.0	19.9
0.698713	48.43	70.73	22.30	100.0	Z	318.0	19.9
0.874302	37.22	68.79	31.57	100.0	Z	275.0	19.9
0.979655	43.03	67.80	24.77	100.0	Z	359.0	19.9
1.256206	38.66	65.65	26.99	100.0	Z	359.0	19.9
1.537147	36.03	63.90	27.87	100.0	Z	359.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

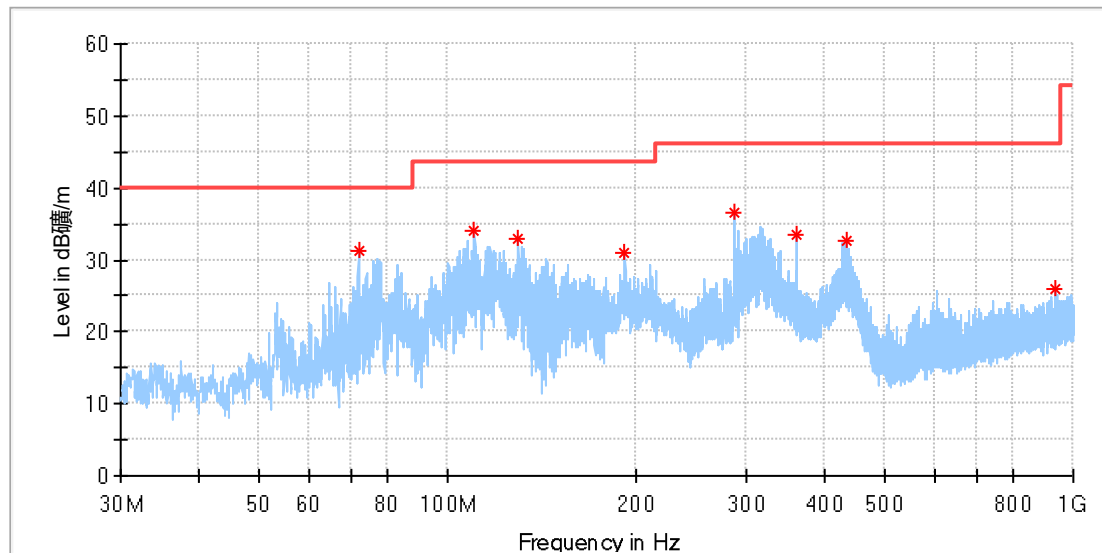

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
72.008462	31.37	40.00	8.63	100.0	H	311.0	-22.6
110.398077	34.01	43.50	9.49	100.0	H	153.0	-19.3
129.835385	33.01	43.50	10.49	100.0	H	311.0	-21.9
191.990000	31.00	43.50	12.50	100.0	H	211.0	-19.5
288.020000	36.59	46.00	9.41	100.0	H	227.0	-16.6
360.023846	33.39	46.00	12.61	100.0	H	227.0	-14.6
433.893077	32.54	46.00	13.46	100.0	H	85.0	-13.1
938.442308	25.85	46.00	20.15	100.0	H	0.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

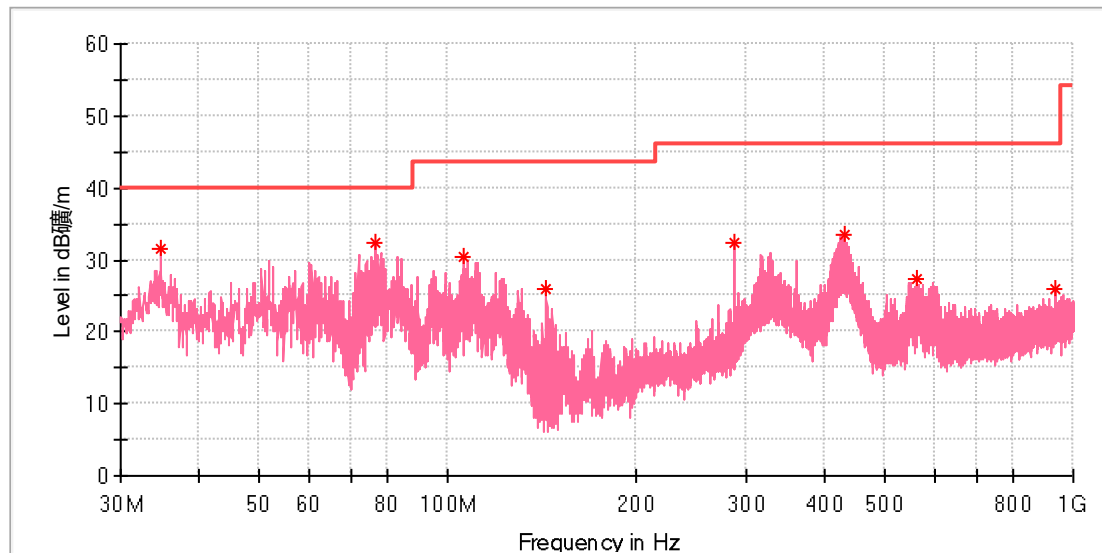

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.850000	31.48	40.00	8.52	100.0	V	30.0	-22.0
76.634615	32.43	40.00	7.57	100.0	V	181.0	-23.5
106.145000	30.47	43.50	13.03	100.0	V	307.0	-19.0
143.303462	25.87	43.50	17.63	100.0	V	276.0	-22.4
288.020000	32.39	46.00	13.61	100.0	V	129.0	-16.6
431.244231	33.53	46.00	12.47	100.0	V	244.0	-13.1
561.895769	27.43	46.00	18.57	100.0	V	324.0	-10.5
936.950000	25.93	46.00	20.07	100.0	V	332.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (TWS 5W)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W711
Test Mode:	Charging
Order No/Sample No:	168573768/A004082331-004
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

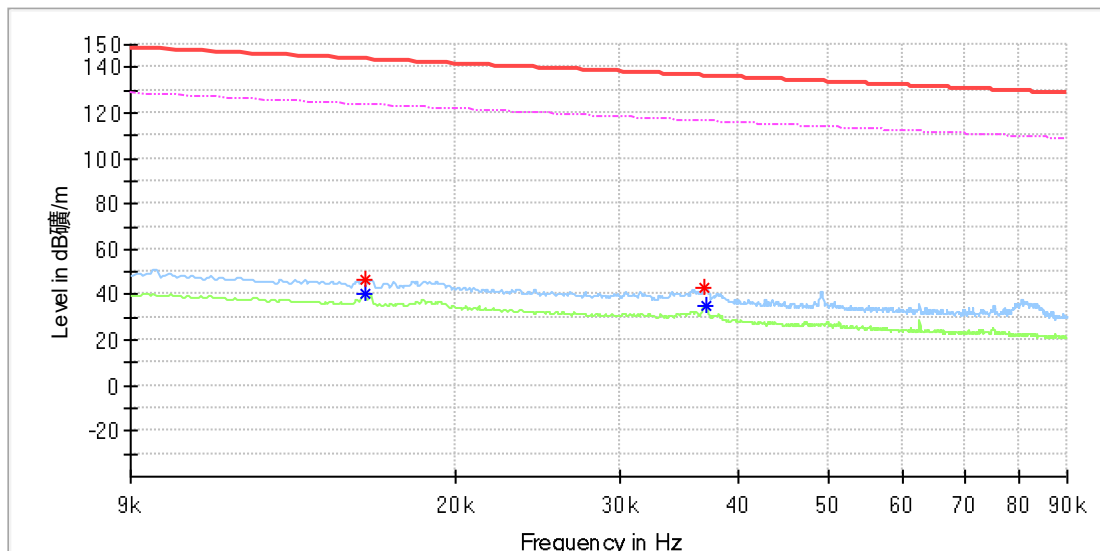


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016001	46.97	---	143.51	96.53	100.0	X	306.0	20.0
0.016001	---	40.66	123.51	82.84	100.0	X	306.0	20.0
0.036887	42.63	---	136.25	93.62	100.0	X	197.0	20.0
0.037061	---	35.22	116.21	80.99	100.0	X	106.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

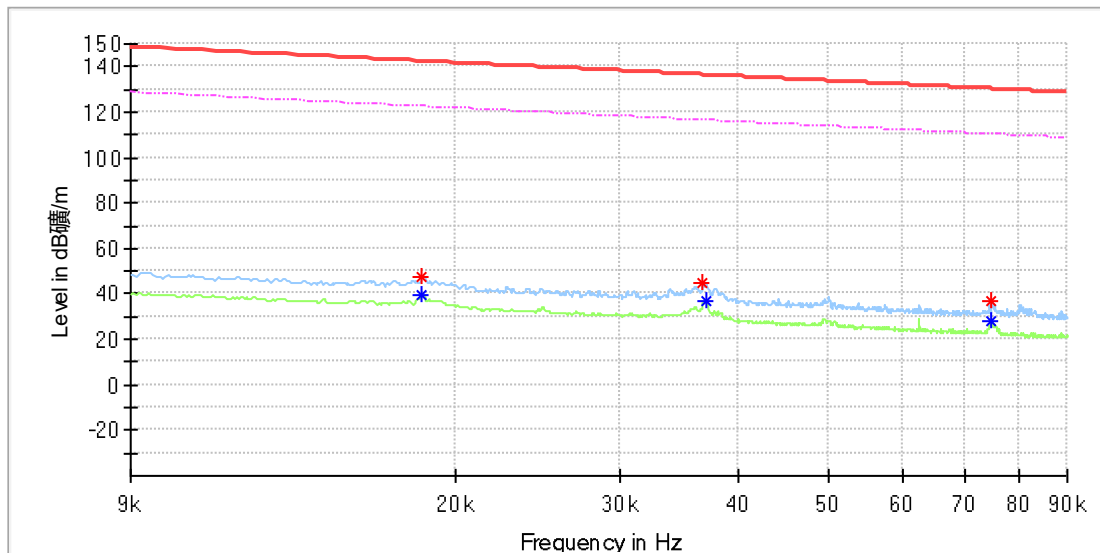


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	47.48	---	142.28	94.80	100.0	Y	143.0	20.0
0.018431	---	39.32	122.28	82.96	100.0	Y	143.0	20.0
0.036771	44.67	---	136.28	91.61	100.0	Y	22.0	20.0
0.037061	---	36.88	116.21	79.34	100.0	Y	113.0	20.0
0.074784	36.48	---	130.12	93.64	100.0	Y	89.0	20.0
0.074784	---	27.92	110.12	82.20	100.0	Y	89.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

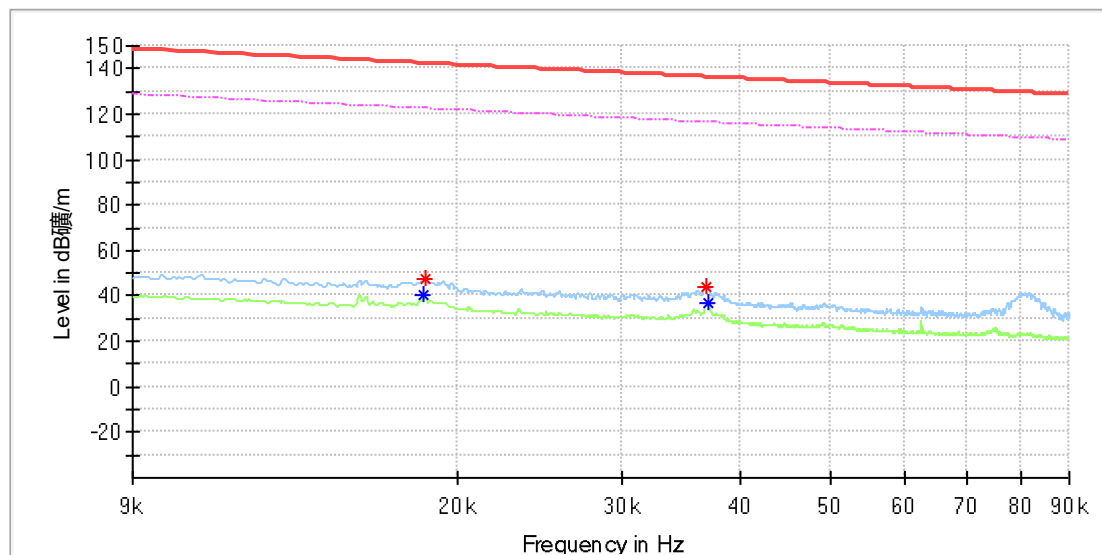


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	40.19	122.28	82.09	100.0	Z	78.0	20.0
0.018489	47.50	---	142.25	94.75	100.0	Z	78.0	20.0
0.036829	43.69	---	136.27	92.58	100.0	Z	161.0	20.0
0.037061	---	36.54	116.21	79.68	100.0	Z	358.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

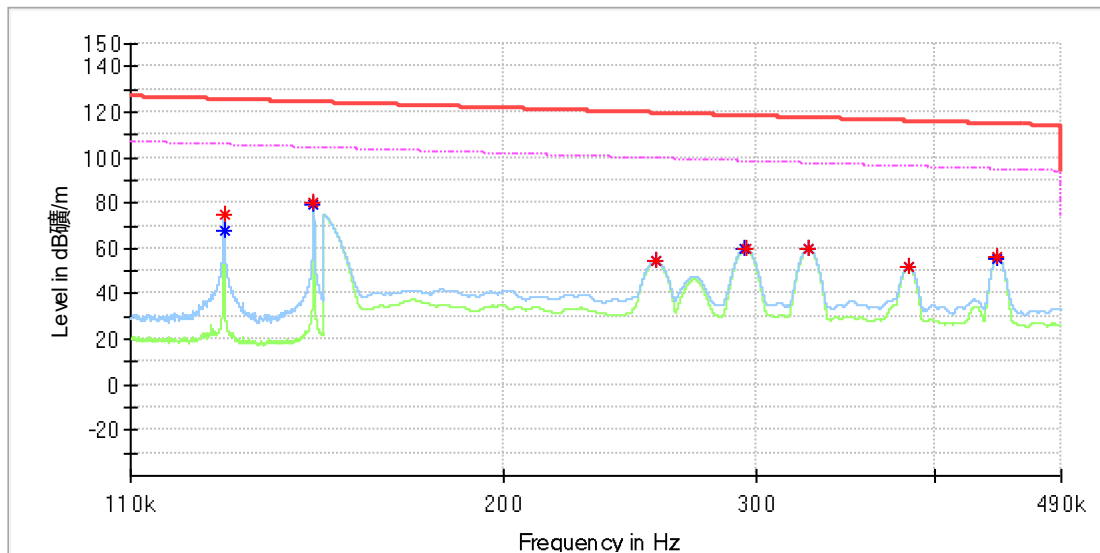


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	75.22	---	125.47	50.25	100.0	X	4.0	20.0
0.127772	---	68.13	105.47	37.33	100.0	X	4.0	20.0
0.147543	---	79.18	104.22	25.04	100.0	X	2.0	20.0
0.147543	80.11	---	124.22	44.11	100.0	X	2.0	20.0
0.255500	54.49	---	119.45	64.96	100.0	X	285.0	20.0
0.255500	---	54.15	99.45	45.31	100.0	X	285.0	20.0
0.295050	---	59.90	98.20	38.31	100.0	X	0.0	20.0
0.295100	60.11	---	118.20	58.09	100.0	X	0.0	20.0
0.326600	59.78	---	117.32	57.54	100.0	X	312.0	20.0
0.326600	---	59.71	97.32	37.61	100.0	X	312.0	20.0
0.383350	---	51.56	95.93	44.37	100.0	X	13.0	20.0
0.383450	52.14	---	115.93	63.79	100.0	X	13.0	20.0
0.442600	56.07	---	114.68	58.61	100.0	X	349.0	20.0
0.442600	---	55.84	94.68	38.84	100.0	X	349.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

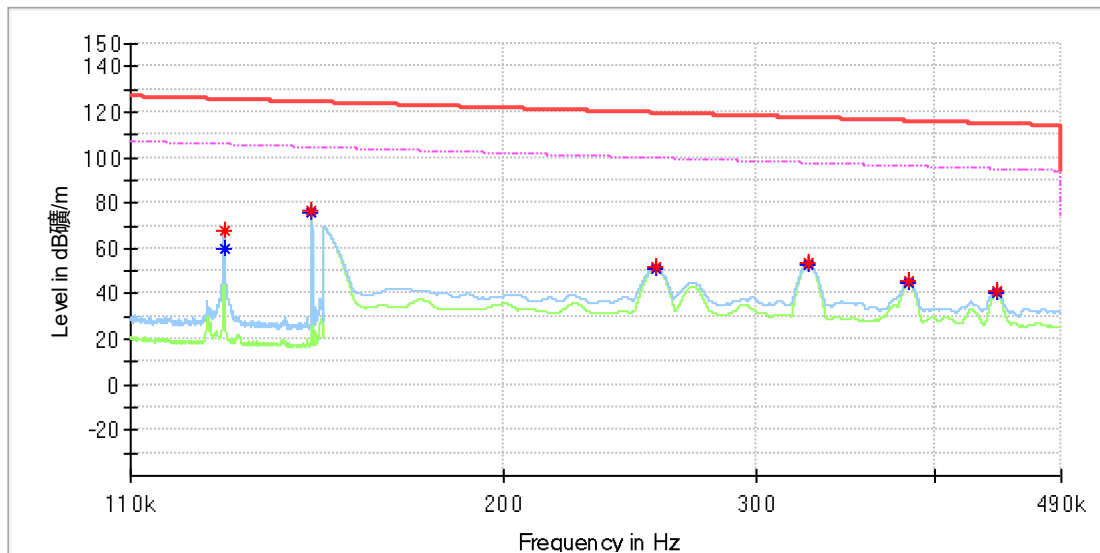


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	67.98	---	125.47	57.49	100.0	Y	58.0	20.0
0.127772	---	59.85	105.47	45.62	100.0	Y	58.0	20.0
0.147114	---	76.14	104.25	28.10	100.0	Y	261.0	20.0
0.147114	76.27	---	124.25	47.98	100.0	Y	261.0	20.0
0.255400	51.67	---	119.46	67.79	100.0	Y	242.0	20.0
0.255600	---	50.86	99.45	48.59	100.0	Y	242.0	20.0
0.326500	53.49	---	117.32	63.84	100.0	Y	228.0	20.0
0.326550	---	52.94	97.32	44.38	100.0	Y	228.0	20.0
0.383250	45.70	---	115.93	70.23	100.0	Y	95.0	20.0
0.383300	---	44.65	95.93	51.28	100.0	Y	95.0	20.0
0.441350	41.46	---	114.71	73.25	100.0	Y	271.0	20.0
0.441350	---	40.22	94.71	54.49	100.0	Y	271.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

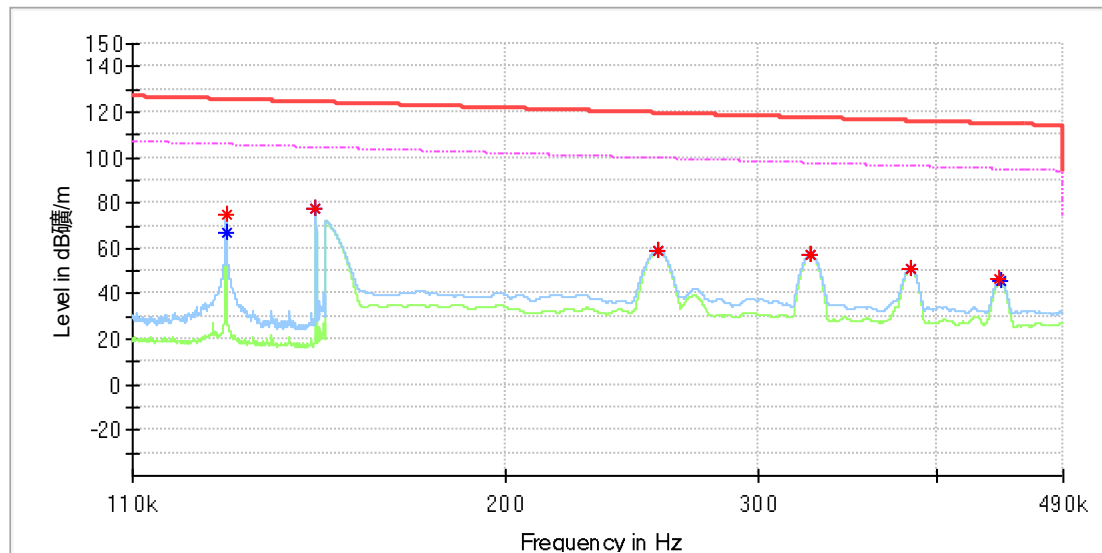


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	74.54	---	125.47	50.93	100.0	Z	353.0	20.0
0.127772	---	66.68	105.47	38.79	100.0	Z	353.0	20.0
0.147543	---	77.33	104.22	26.89	100.0	Z	348.0	20.0
0.147543	77.47	---	124.22	46.75	100.0	Z	348.0	20.0
0.255650	59.14	---	119.45	60.31	100.0	Z	2.0	20.0
0.255650	---	58.78	99.45	40.67	100.0	Z	2.0	20.0
0.326600	57.35	---	117.32	59.97	100.0	Z	287.0	20.0
0.326600	---	57.08	97.32	40.24	100.0	Z	287.0	20.0
0.383350	51.45	---	115.93	64.48	100.0	Z	32.0	20.0
0.383400	---	51.07	95.93	44.86	100.0	Z	32.0	20.0
0.442650	46.19	---	114.68	68.49	100.0	Z	324.0	20.0
0.442750	---	45.41	94.68	49.27	100.0	Z	324.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

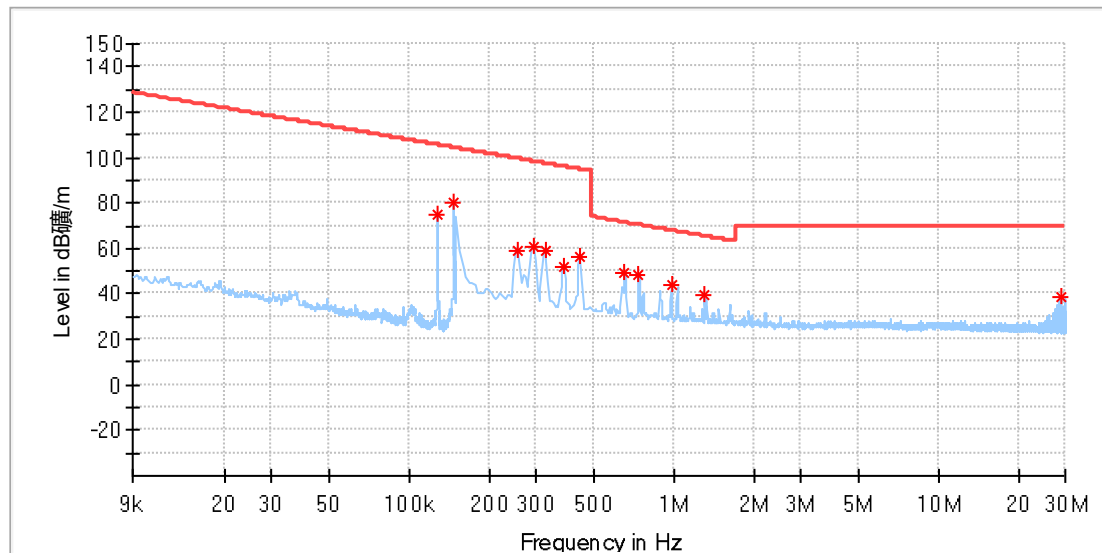

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	75.08	105.46	30.38	100.0	X	0.0	19.9
0.147583	79.99	104.22	24.23	100.0	X	353.0	19.9
0.255353	59.06	99.46	40.40	100.0	X	346.0	19.9
0.294860	60.43	98.21	37.78	100.0	X	350.0	19.9
0.325588	58.72	97.35	38.63	100.0	X	285.0	19.9
0.382655	51.76	95.95	44.18	100.0	X	339.0	19.9
0.439721	56.13	94.74	38.61	100.0	X	353.0	19.9
0.650427	48.98	71.35	22.37	100.0	X	285.0	19.9
0.733831	48.58	70.30	21.72	100.0	X	353.0	19.9
0.975265	44.04	67.84	23.79	100.0	X	285.0	19.9
1.304493	39.41	65.32	25.91	100.0	X	350.0	19.9
29.214243	38.34	69.50	31.16	100.0	X	235.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

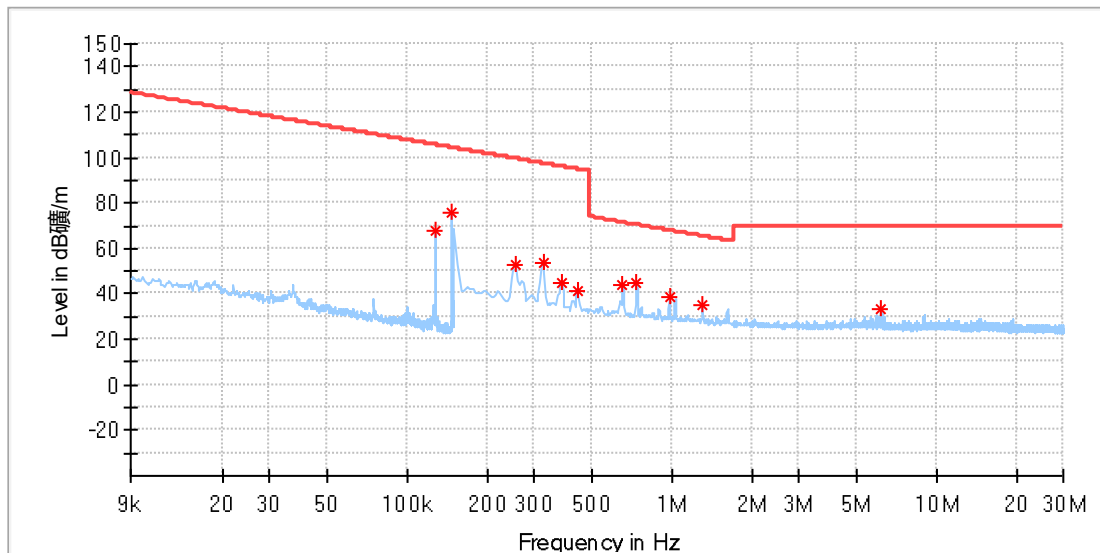

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	67.76	105.46	37.70	100.0	Y	100.0	19.9
0.147180	76.12	104.24	28.12	100.0	Y	260.0	19.9
0.255353	52.67	99.46	46.79	100.0	Y	95.0	19.9
0.325588	53.47	97.35	43.88	100.0	Y	52.0	19.9
0.382655	44.93	95.95	51.01	100.0	Y	113.0	19.9
0.439721	41.54	94.74	53.20	100.0	Y	266.0	19.9
0.650427	43.77	71.35	27.57	100.0	Y	52.0	19.9
0.733831	44.80	70.30	25.50	100.0	Y	259.0	19.9
0.975265	38.76	67.84	29.07	100.0	Y	52.0	19.9
1.304493	34.68	65.32	30.64	100.0	Y	52.0	19.9
6.177066	33.61	69.50	35.89	100.0	Y	41.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

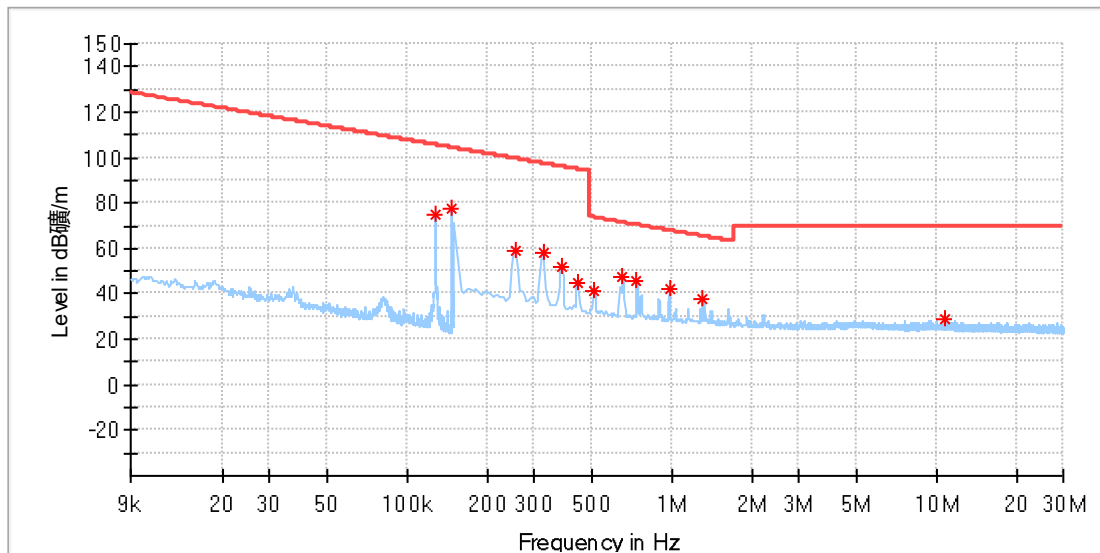

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	74.50	105.46	30.96	100.0	Z	7.0	19.9
0.147583	77.57	104.22	26.65	100.0	Z	346.0	19.9
0.255353	58.72	99.46	40.73	100.0	Z	54.0	19.9
0.325588	57.76	97.35	39.59	100.0	Z	312.0	19.9
0.382655	51.63	95.95	44.31	100.0	Z	31.0	19.9
0.439721	44.99	94.74	49.75	100.0	Z	2.0	19.9
0.509956	41.54	73.45	31.91	100.0	Z	190.0	19.9
0.650427	47.51	71.35	23.84	100.0	Z	294.0	19.9
0.733831	45.73	70.30	24.58	100.0	Z	352.0	19.9
0.979655	42.22	67.80	25.58	100.0	Z	294.0	19.9
1.304493	38.00	65.32	27.32	100.0	Z	294.0	19.9
10.729191	28.61	69.50	40.89	100.0	Z	302.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

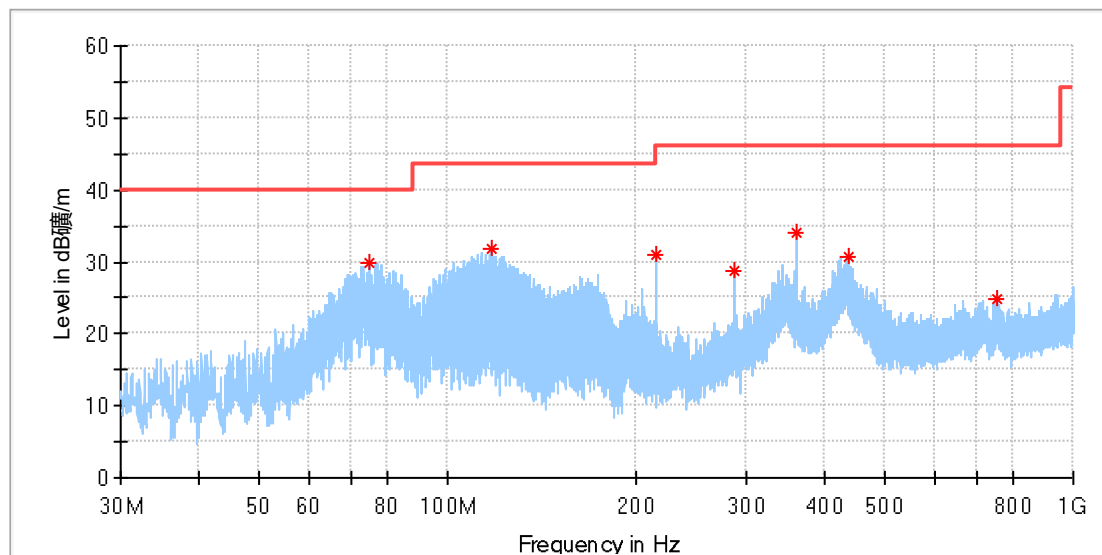

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
74.955769	29.93	40.00	10.07	100.0	H	334.0	-23.5
117.150769	31.78	43.50	11.72	100.0	H	180.0	-20.3
216.016154	30.91	46.00	15.09	100.0	H	212.0	-18.7
288.020000	28.71	46.00	17.29	100.0	H	334.0	-16.6
359.986539	34.17	46.00	11.83	100.0	H	212.0	-14.6
436.952308	30.79	46.00	15.21	100.0	H	77.0	-13.0
757.164231	24.92	46.00	21.08	100.0	H	6.0	-6.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

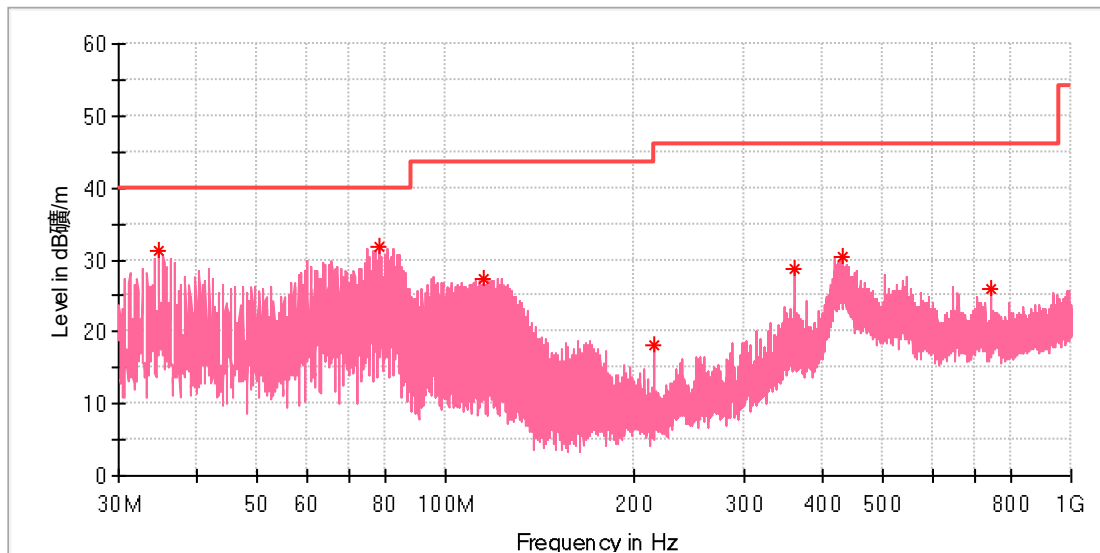

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.812692	31.19	40.00	8.81	100.0	V	342.0	-22.0
78.500000	31.94	40.00	8.06	100.0	V	178.0	-23.6
115.098846	27.28	43.50	16.22	100.0	V	301.0	-19.9
216.016154	18.08	46.00	27.92	100.0	V	0.0	-18.7
359.986539	28.86	46.00	17.14	100.0	V	226.0	-14.6
430.983077	30.55	46.00	15.45	100.0	V	0.0	-13.1
742.502308	25.90	46.00	20.10	100.0	V	71.0	-7.2


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (Watch 5W_326.5kHz)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W711
Test Mode:	Charging
Order No/Sample No:	168573768/A004082331-004
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

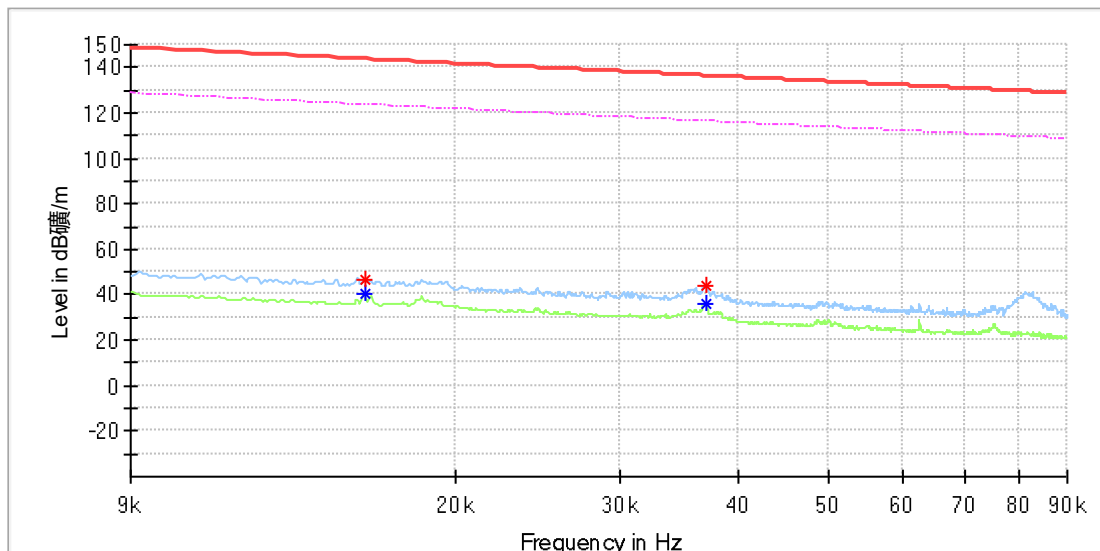


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016001	47.00	---	143.51	96.51	100.0	X	266.0	20.0
0.016001	---	40.80	123.51	82.70	100.0	X	266.0	20.0
0.037003	44.06	---	136.23	92.16	100.0	X	0.0	20.0
0.037061	---	36.30	116.21	79.92	100.0	X	0.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

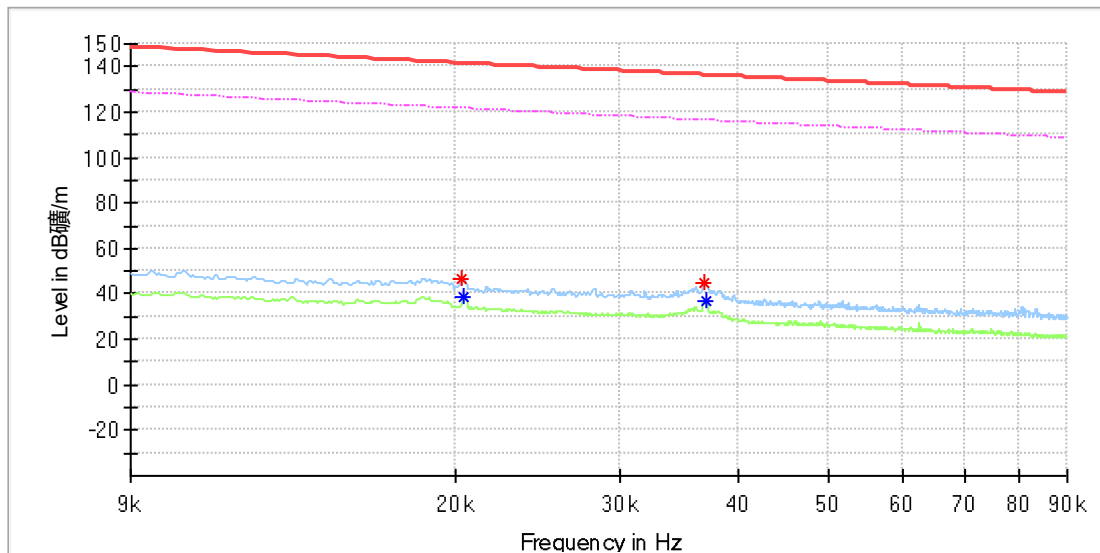


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.020340	46.18	---	141.42	95.24	100.0	Y	358.0	20.0
0.020398	---	38.34	121.40	83.05	100.0	Y	358.0	20.0
0.036829	44.85	---	136.27	91.42	100.0	Y	266.0	20.0
0.037061	---	36.64	116.21	79.58	100.0	Y	266.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

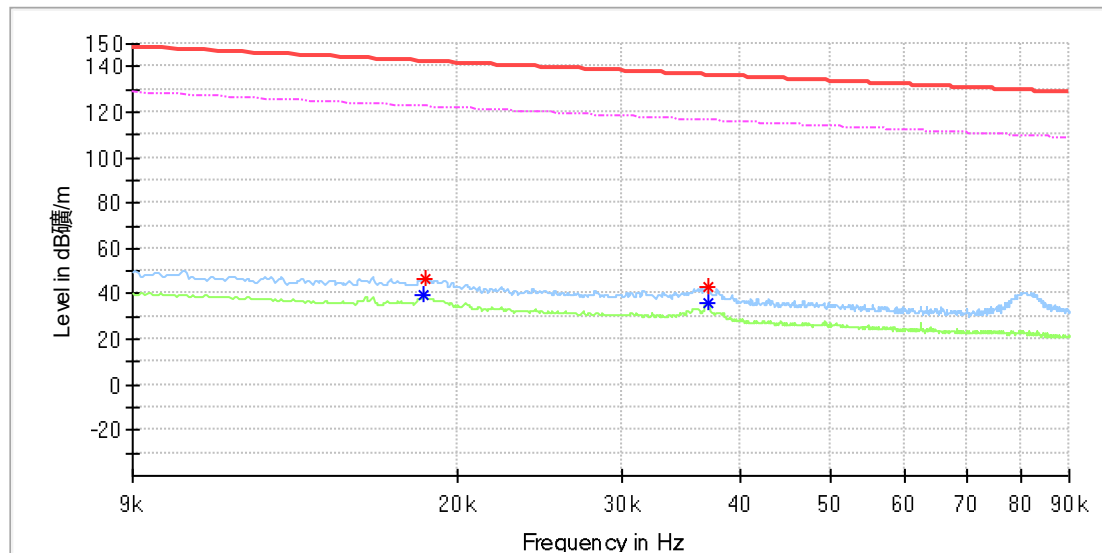


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	39.44	122.28	82.84	100.0	Z	0.0	20.0
0.018489	46.77	---	142.25	95.48	100.0	Z	2.0	20.0
0.037061	---	36.33	116.21	79.88	100.0	Z	287.0	20.0
0.037119	43.50	---	136.20	92.70	100.0	Z	212.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

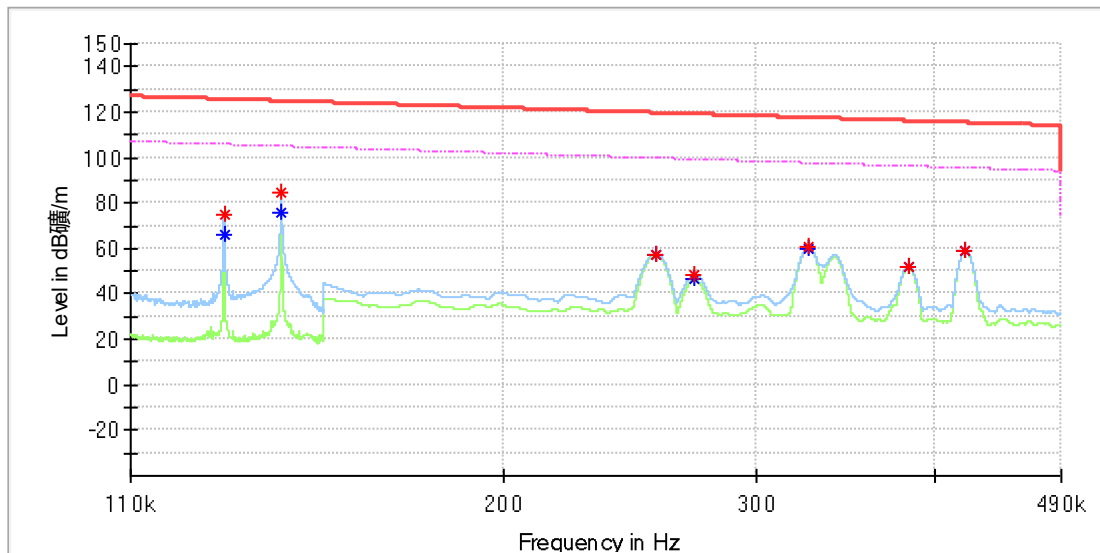


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	75.15	---	125.47	50.32	100.0	X	0.0	20.0
0.127772	---	66.49	105.47	38.98	100.0	X	0.0	20.0
0.140086	84.68	---	124.67	39.99	100.0	X	352.0	20.0
0.140086	---	75.58	104.67	29.09	100.0	X	352.0	20.0
0.255450	57.63	---	119.46	61.82	100.0	X	50.0	20.0
0.255500	---	57.33	99.45	42.13	100.0	X	50.0	20.0
0.272100	48.10	---	118.91	70.81	100.0	X	76.0	20.0
0.272150	---	46.28	98.91	52.63	100.0	X	76.0	20.0
0.326450	---	60.22	97.33	37.11	100.0	X	288.0	20.0
0.326550	60.34	---	117.32	56.98	100.0	X	288.0	20.0
0.383350	51.98	---	115.93	63.95	100.0	X	354.0	20.0
0.383350	---	51.59	95.93	44.34	100.0	X	354.0	20.0
0.420250	59.12	---	115.13	56.01	100.0	X	0.0	20.0
0.420250	---	58.90	95.13	36.23	100.0	X	0.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

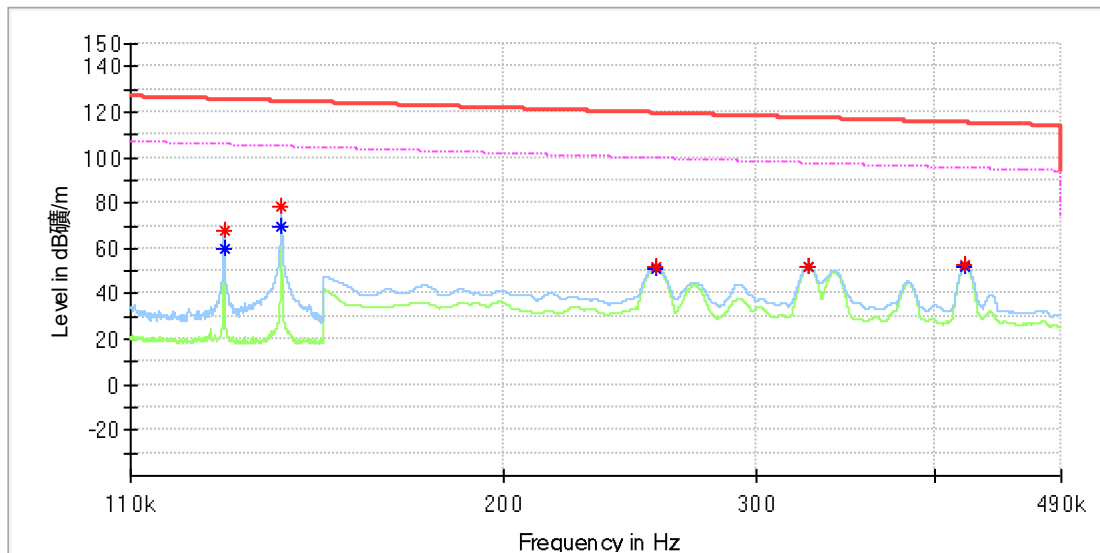


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	68.14	---	125.47	57.33	100.0	Y	88.0	20.0
0.127772	---	59.95	105.47	45.52	100.0	Y	88.0	20.0
0.140086	---	69.49	104.67	35.18	100.0	Y	254.0	20.0
0.140086	78.38	---	124.67	46.29	100.0	Y	254.0	20.0
0.255500	52.02	---	119.45	67.43	100.0	Y	273.0	20.0
0.255500	---	51.22	99.45	48.23	100.0	Y	273.0	20.0
0.326500	---	51.80	97.32	45.52	100.0	Y	0.0	20.0
0.326550	52.09	---	117.32	65.23	100.0	Y	0.0	20.0
0.420250	---	52.15	95.13	42.98	100.0	Y	234.0	20.0
0.420350	52.44	---	115.13	62.69	100.0	Y	234.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

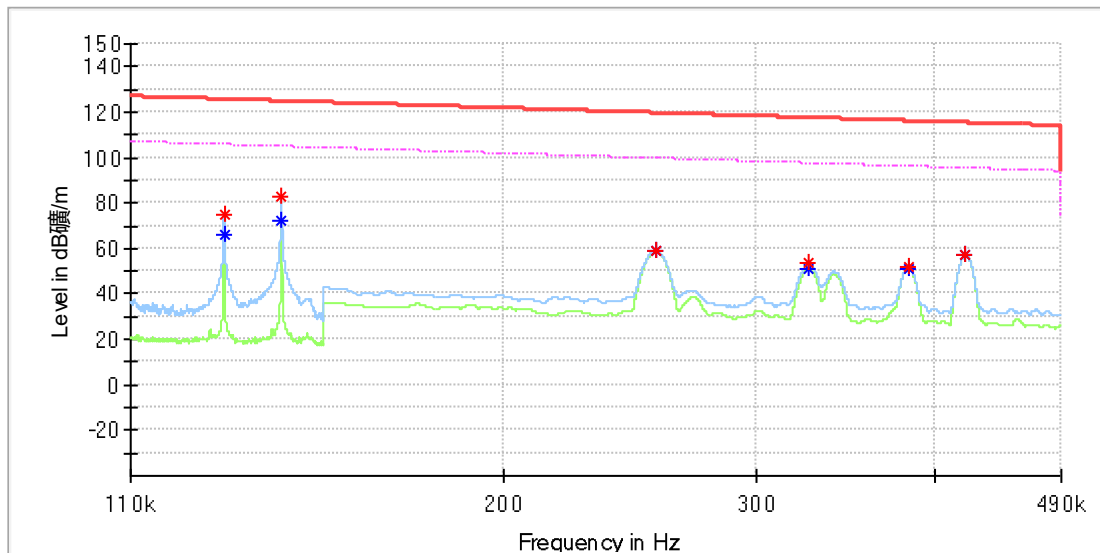


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	74.63	---	125.47	50.84	100.0	Z	26.0	20.0
0.127772	---	65.90	105.47	39.57	100.0	Z	26.0	20.0
0.140086	82.86	---	124.67	41.81	100.0	Z	349.0	20.0
0.140086	---	72.56	104.67	32.11	100.0	Z	349.0	20.0
0.255500	58.93	---	119.45	60.52	100.0	Z	19.0	20.0
0.255600	---	58.70	99.45	40.75	100.0	Z	19.0	20.0
0.326550	---	51.17	97.32	46.15	100.0	Z	156.0	20.0
0.326600	53.25	---	117.32	64.07	100.0	Z	156.0	20.0
0.383400	51.48	---	115.93	64.45	100.0	Z	1.0	20.0
0.383400	---	51.18	95.93	44.75	100.0	Z	1.0	20.0
0.420250	57.24	---	115.13	57.89	100.0	Z	15.0	20.0
0.420250	---	57.06	95.13	38.08	100.0	Z	15.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

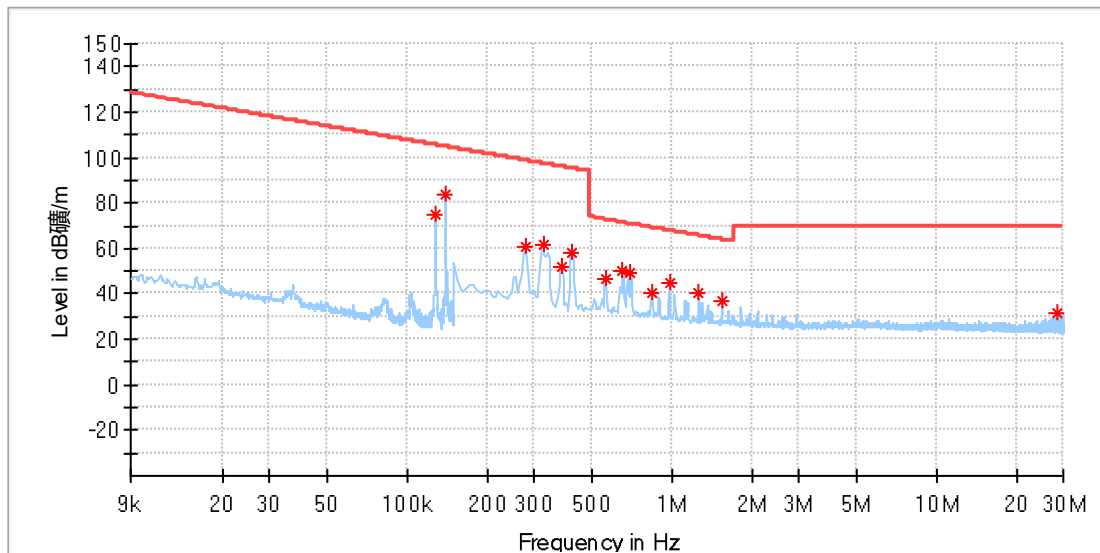

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	75.06	105.46	30.40	100.0	X	12.0	19.9
0.140130	83.84	104.67	20.83	100.0	X	318.0	19.9
0.277302	60.97	98.74	37.77	100.0	X	330.0	19.9
0.325588	61.48	97.35	35.87	100.0	X	254.0	19.9
0.382655	52.10	95.95	43.85	100.0	X	12.0	19.9
0.417772	58.21	95.18	36.98	100.0	X	21.0	19.9
0.558243	46.49	72.67	26.18	100.0	X	330.0	19.9
0.650427	49.79	71.35	21.56	100.0	X	254.0	19.9
0.698713	49.25	70.73	21.48	100.0	X	21.0	19.9
0.834794	40.65	69.19	28.54	100.0	X	330.0	19.9
0.979655	45.27	67.80	22.53	100.0	X	297.0	19.9
1.260596	40.03	65.62	25.59	100.0	X	330.0	19.9
1.537147	36.64	63.90	27.26	100.0	X	21.0	20.0
28.494331	31.21	69.50	38.29	100.0	X	207.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

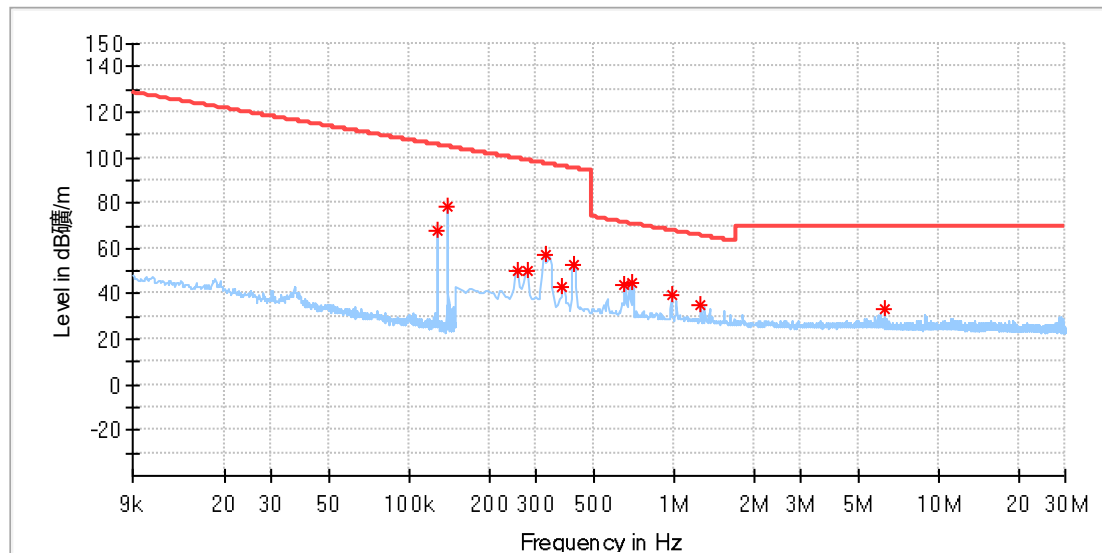

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	68.05	105.46	37.41	100.0	Y	87.0	19.9
0.140130	78.05	104.67	26.61	100.0	Y	69.0	19.9
0.255353	50.18	99.46	49.27	100.0	Y	228.0	19.9
0.277302	50.33	98.74	48.41	100.0	Y	311.0	19.9
0.325588	57.51	97.35	39.84	100.0	Y	144.0	19.9
0.378265	43.00	96.05	53.04	100.0	Y	130.0	19.9
0.417772	52.98	95.18	42.20	100.0	Y	83.0	19.9
0.650427	43.92	71.35	27.43	100.0	Y	0.0	19.9
0.698713	44.44	70.73	26.29	100.0	Y	83.0	19.9
0.979655	39.34	67.80	28.46	100.0	Y	115.0	19.9
1.260596	34.94	65.62	30.68	100.0	Y	83.0	19.9
6.260471	33.21	69.50	36.29	100.0	Y	130.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

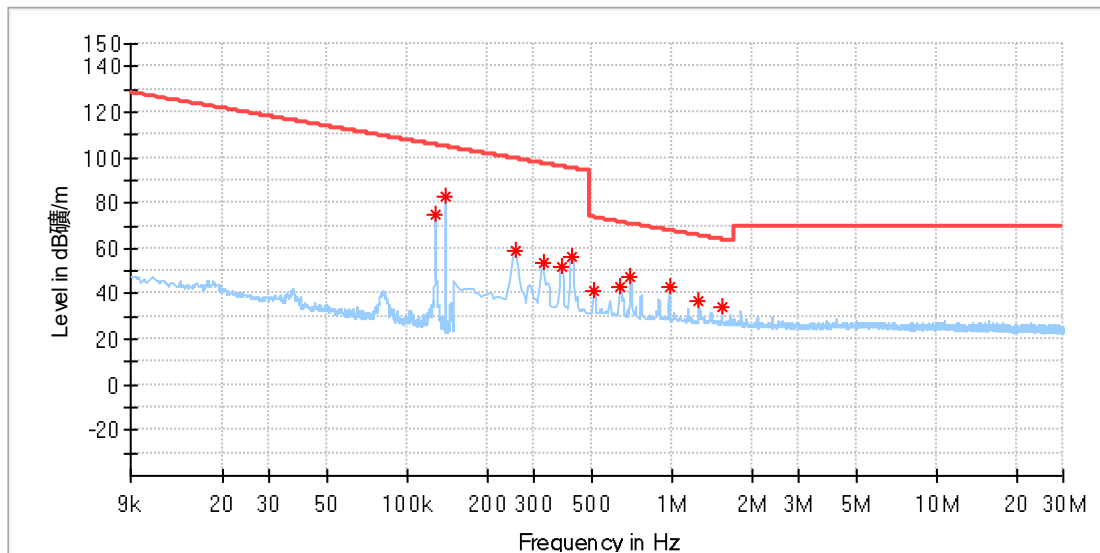

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	74.51	105.46	30.95	100.0	Z	6.0	19.9
0.140130	82.60	104.67	22.06	100.0	Z	329.0	19.9
0.255353	58.84	99.46	40.62	100.0	Z	355.0	19.9
0.325588	53.46	97.35	43.89	100.0	Z	174.0	19.9
0.382655	51.67	95.95	44.27	100.0	Z	21.0	19.9
0.417772	56.48	95.18	38.70	100.0	Z	286.0	19.9
0.509956	41.52	73.45	31.93	100.0	Z	181.0	19.9
0.637258	43.27	71.52	28.26	100.0	Z	42.0	19.9
0.698713	47.32	70.73	23.40	100.0	Z	286.0	19.9
0.975265	43.01	67.84	24.83	100.0	Z	286.0	19.9
1.256206	37.17	65.65	28.47	100.0	Z	286.0	19.9
1.541537	34.20	63.87	29.67	100.0	Z	253.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

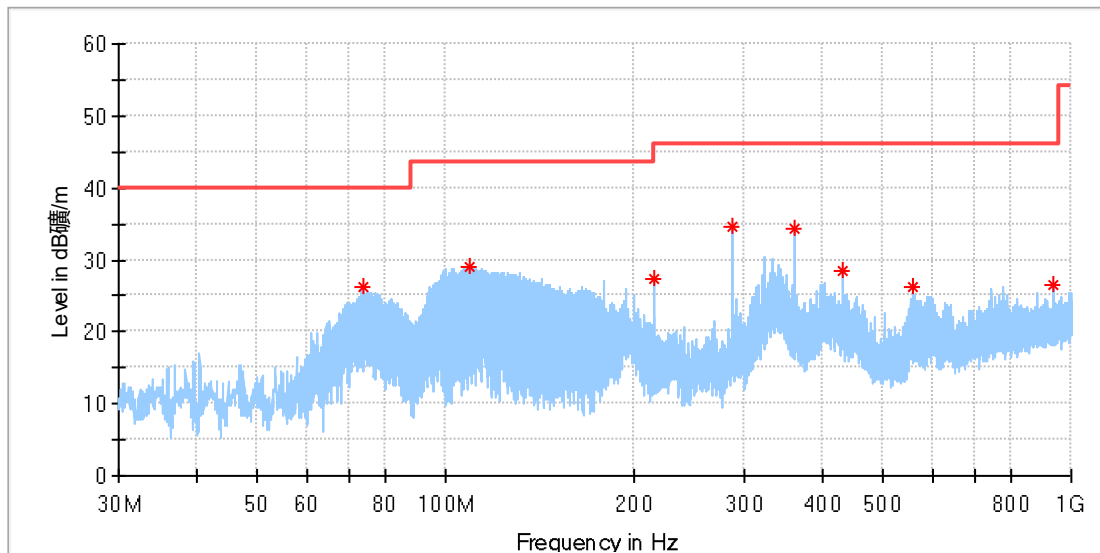

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.948462	26.10	40.00	13.90	100.0	H	341.0	-23.2
109.540000	29.03	43.50	14.47	100.0	H	122.0	-19.2
216.016154	27.24	46.00	18.76	100.0	H	207.0	-18.7
288.020000	34.55	46.00	11.45	100.0	H	225.0	-16.6
360.023846	34.25	46.00	11.75	100.0	H	190.0	-14.6
431.990385	28.60	46.00	17.40	100.0	H	99.0	-13.1
556.262308	26.16	46.00	19.84	100.0	H	324.0	-10.7
938.442308	26.45	46.00	19.55	100.0	H	0.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

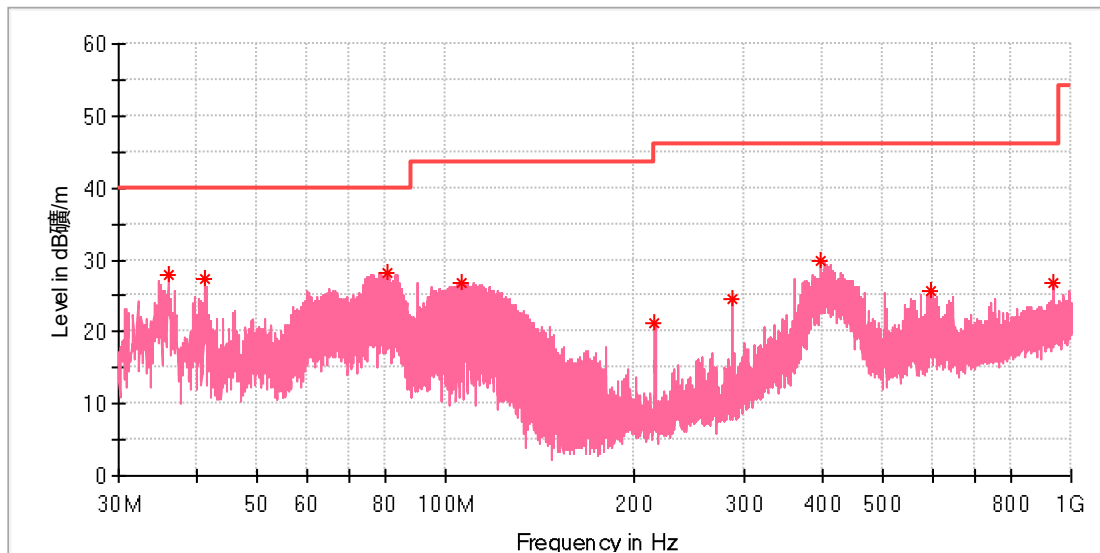

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.006539	27.84	40.00	12.16	100.0	V	0.0	-21.6
41.192308	27.25	40.00	12.75	100.0	V	351.0	-19.9
80.962308	28.23	40.00	11.77	100.0	V	320.0	-23.4
105.622692	26.80	43.50	16.70	100.0	V	304.0	-18.9
216.128077	21.25	46.00	24.75	100.0	V	206.0	-18.7
288.020000	24.67	46.00	21.33	100.0	V	190.0	-16.6
397.816539	29.75	46.00	16.25	100.0	V	0.0	-13.8
596.330769	25.80	46.00	20.20	100.0	V	0.0	-9.8
936.950000	26.90	46.00	19.10	100.0	V	344.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (Watch 5W_1.778MHz)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W711
Test Mode:	Charging
Order No/Sample No:	168573768/A004082331-004
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

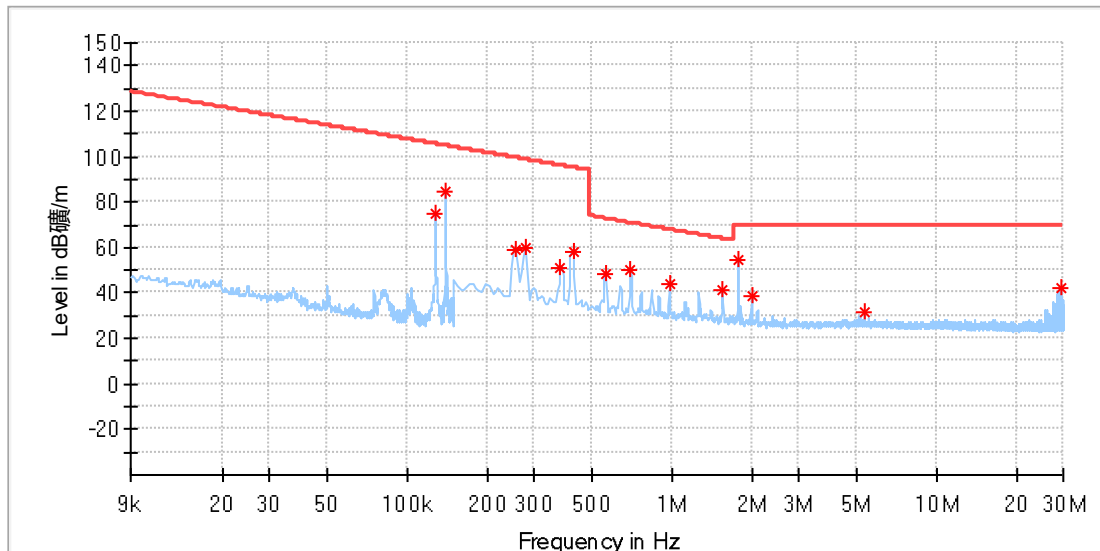

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	74.84	105.46	30.63	100.0	X	23.0	19.9
0.140130	84.57	104.67	20.10	100.0	X	339.0	19.9
0.255353	59.35	99.46	40.11	100.0	X	12.0	19.9
0.277302	60.07	98.74	38.67	100.0	X	333.0	19.9
0.378265	51.46	96.05	44.58	100.0	X	4.0	19.9
0.422162	57.73	95.09	37.36	100.0	X	17.0	19.9
0.558243	48.58	72.67	24.09	100.0	X	333.0	19.9
0.698713	49.79	70.73	20.94	100.0	X	17.0	19.9
0.979655	43.78	67.80	24.02	100.0	X	17.0	19.9
1.554706	41.36	63.80	22.44	100.0	X	261.0	20.0
1.774191	54.93	69.50	14.57	100.0	X	276.0	20.0
1.998066	38.87	69.50	30.63	100.0	X	279.0	20.0
5.329853	31.60	69.50	37.90	100.0	X	261.0	20.1
29.556640	41.83	69.50	27.67	100.0	X	236.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

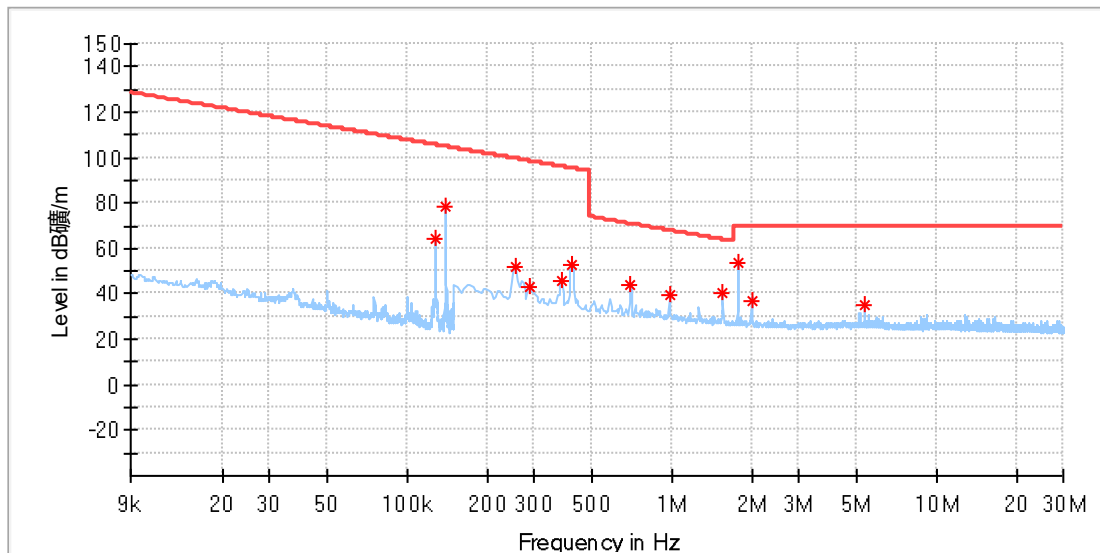

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127742	64.05	105.47	41.42	100.0	Y	311.0	19.9
0.140130	78.20	104.67	26.47	100.0	Y	72.0	19.9
0.255353	51.80	99.46	47.66	100.0	Y	257.0	19.9
0.290471	43.07	98.34	55.27	100.0	Y	120.0	19.9
0.382655	45.67	95.95	50.27	100.0	Y	257.0	19.9
0.417772	52.87	95.18	42.31	100.0	Y	58.0	19.9
0.698713	44.27	70.73	26.46	100.0	Y	58.0	19.9
0.979655	39.34	67.80	28.46	100.0	Y	58.0	19.9
1.554706	40.40	63.80	23.40	100.0	Y	189.0	20.0
1.774191	53.96	69.50	15.54	100.0	Y	174.0	20.0
1.993677	36.97	69.50	32.53	100.0	Y	189.0	20.0
5.329853	34.79	69.50	34.71	100.0	Y	40.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

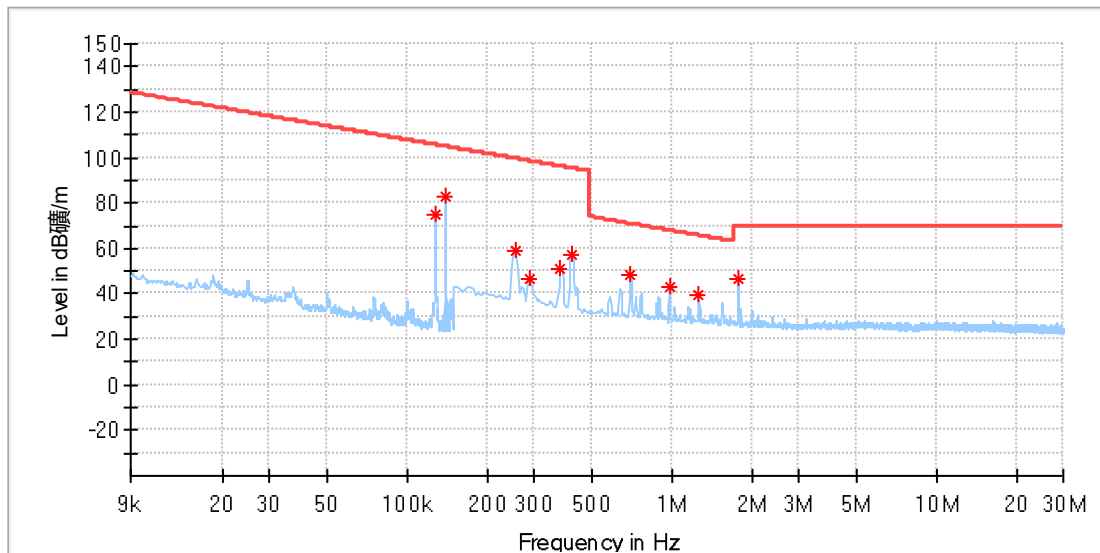

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	74.47	105.46	30.99	100.0	Z	0.0	19.9
0.140130	82.65	104.67	22.02	100.0	Z	323.0	19.9
0.255353	59.06	99.46	40.39	100.0	Z	30.0	19.9
0.290471	46.56	98.34	51.78	100.0	Z	271.0	19.9
0.378265	51.24	96.05	44.81	100.0	Z	343.0	19.9
0.417772	57.56	95.18	37.62	100.0	Z	356.0	19.9
0.698713	48.69	70.73	22.04	100.0	Z	356.0	19.9
0.979655	43.12	67.80	24.68	100.0	Z	356.0	19.9
1.256206	39.15	65.65	26.50	100.0	Z	356.0	19.9
1.774191	46.68	69.50	22.82	100.0	Z	264.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

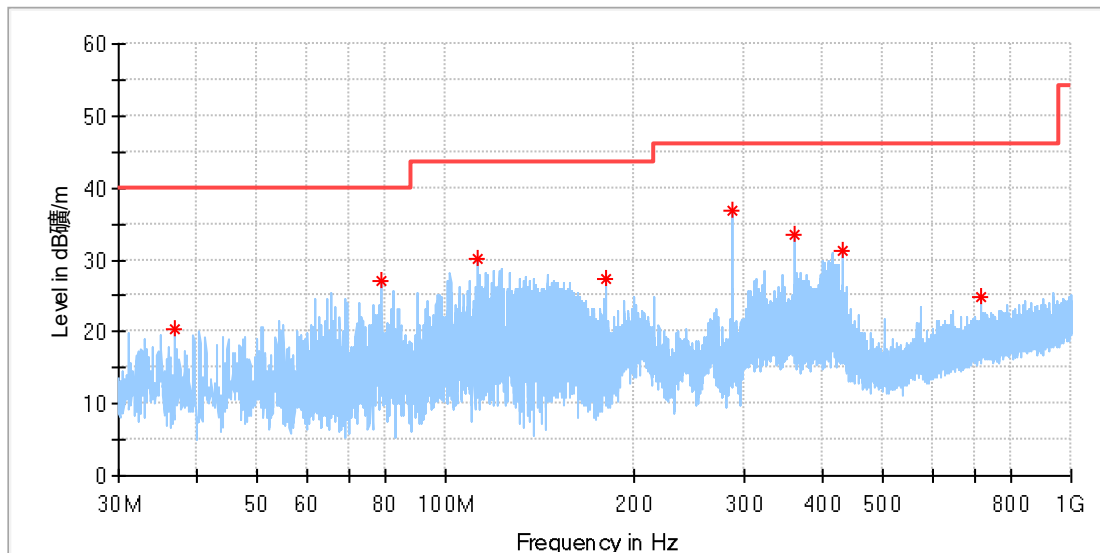

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.864615	20.42	40.00	19.58	100.0	H	30.0	-21.2
79.096923	27.18	40.00	12.82	100.0	H	203.0	-23.6
112.673846	30.16	43.50	13.34	100.0	H	41.0	-19.5
180.126154	27.48	43.50	16.02	100.0	H	79.0	-20.6
288.020000	36.84	46.00	9.16	100.0	H	266.0	-16.6
359.986539	33.37	46.00	12.63	100.0	H	134.0	-14.6
432.027692	31.35	46.00	14.65	100.0	H	79.0	-13.1
719.707308	24.97	46.00	21.03	100.0	H	203.0	-7.6

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

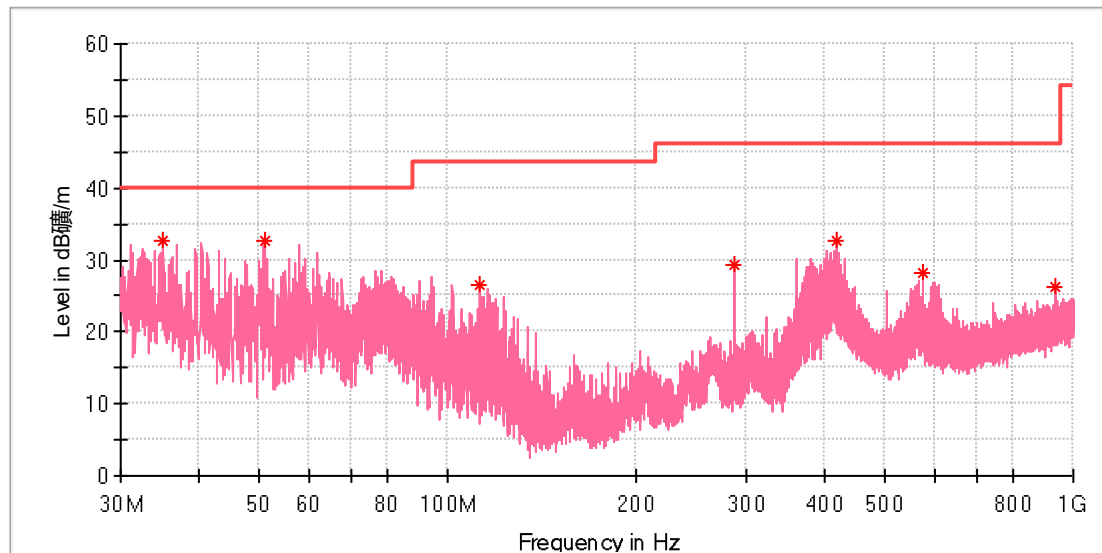

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.111154	32.52	40.00	7.48	100.0	V	359.0	-21.9
50.892308	32.73	40.00	7.27	100.0	V	238.0	-18.4
112.673846	26.39	43.50	17.11	100.0	V	16.0	-19.5
288.020000	29.44	46.00	16.56	100.0	V	185.0	-16.6
418.000000	32.60	46.00	13.40	100.0	V	355.0	-13.3
576.035385	28.15	46.00	17.85	100.0	V	185.0	-10.2
936.950000	26.28	46.00	19.72	100.0	V	254.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (Co-location)

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

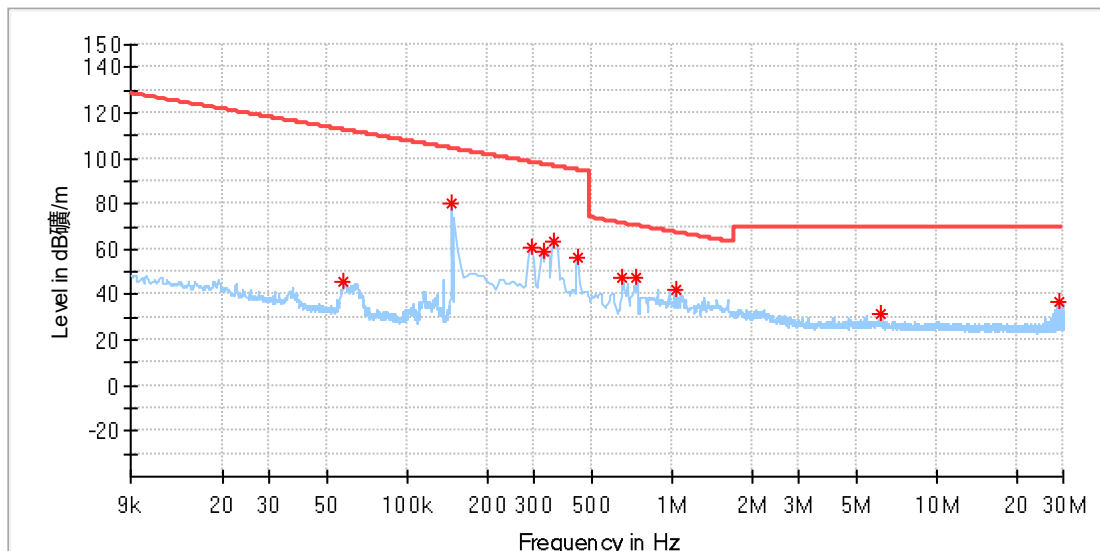

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.057444	45.63	112.41	66.78	100.0	X	44.0	19.9
0.147583	79.86	104.22	24.35	100.0	X	357.0	19.9
0.294860	60.78	98.21	37.43	100.0	X	0.0	19.9
0.325588	58.73	97.35	38.62	100.0	X	18.0	19.9
0.356316	63.68	96.57	32.88	100.0	X	94.0	19.9
0.439721	56.08	94.74	38.66	100.0	X	352.0	19.9
0.650427	47.88	71.35	23.46	100.0	X	29.0	19.9
0.733831	47.92	70.30	22.39	100.0	X	352.0	19.9
1.027941	42.31	67.38	25.07	100.0	X	352.0	19.9
6.120000	31.64	69.50	37.86	100.0	X	79.0	20.1
29.214243	36.99	69.50	32.51	100.0	X	228.0	20.5

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

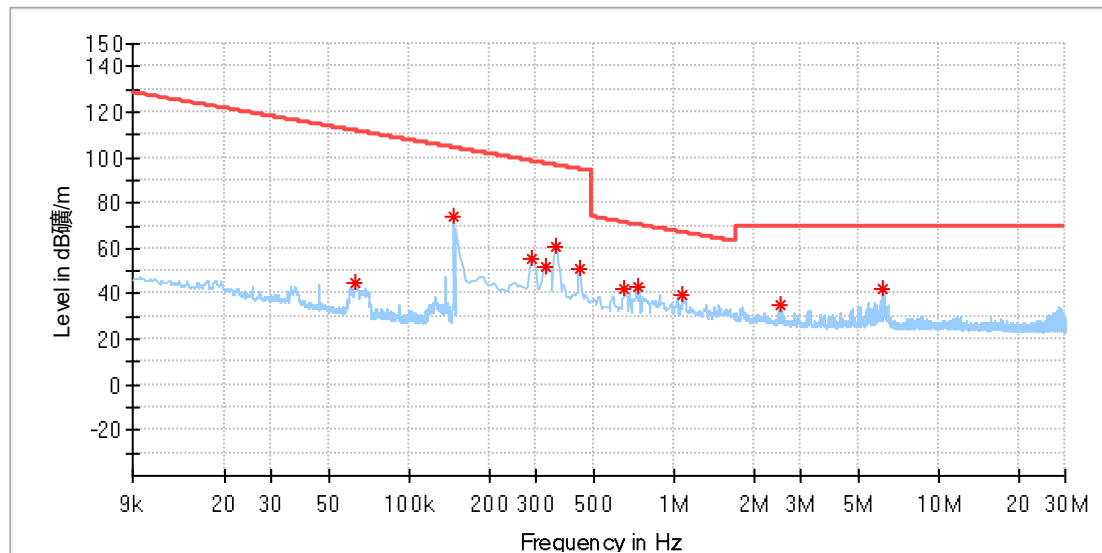

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.062479	44.46	111.68	67.22	100.0	Y	82.0	19.9
0.147583	74.33	104.22	29.89	100.0	Y	264.0	19.9
0.290471	55.71	98.34	42.63	100.0	Y	90.0	19.9
0.325588	51.65	97.35	45.69	100.0	Y	295.0	19.9
0.356316	60.59	96.57	35.98	100.0	Y	357.0	19.9
0.439721	51.28	94.74	43.46	100.0	Y	86.0	19.9
0.646037	41.90	71.41	29.50	100.0	Y	90.0	19.9
0.733831	42.93	70.30	27.37	100.0	Y	86.0	19.9
1.076228	39.67	66.99	27.32	100.0	Y	86.0	19.9
2.538000	34.81	69.50	34.69	100.0	Y	17.0	20.0
6.185846	42.11	69.50	27.39	100.0	Y	47.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

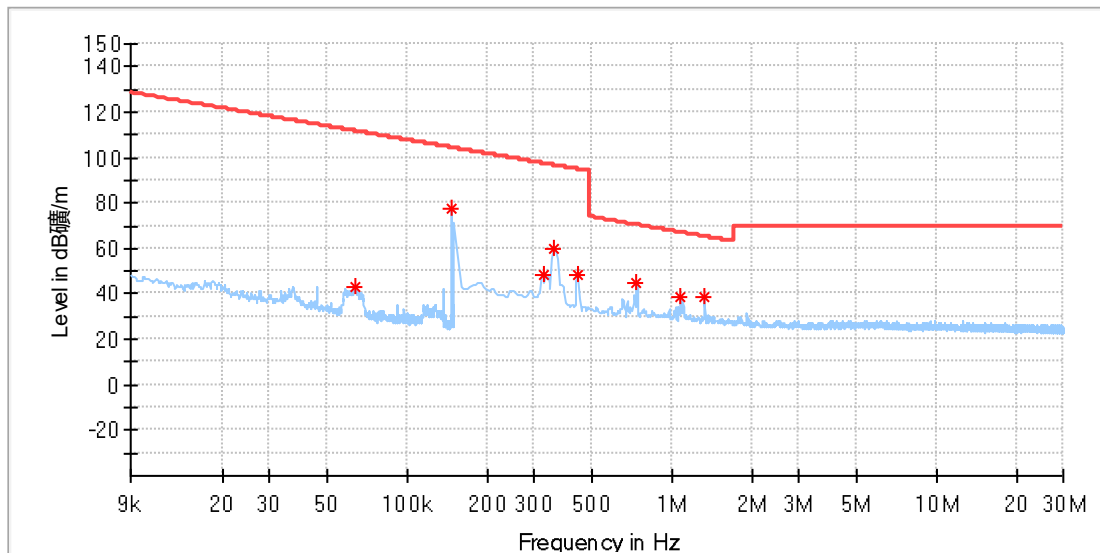

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.062983	43.02	111.61	68.59	100.0	Z	89.0	19.9
0.147583	77.13	104.22	27.09	100.0	Z	347.0	19.9
0.325588	48.79	97.35	48.56	100.0	Z	190.0	19.9
0.356316	60.20	96.57	36.37	100.0	Z	63.0	19.9
0.439721	47.97	94.74	46.77	100.0	Z	340.0	19.9
0.733831	45.03	70.30	25.27	100.0	Z	321.0	19.9
1.080618	38.77	66.95	28.18	100.0	Z	4.0	19.9
1.326441	38.47	65.18	26.70	100.0	Z	307.0	19.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

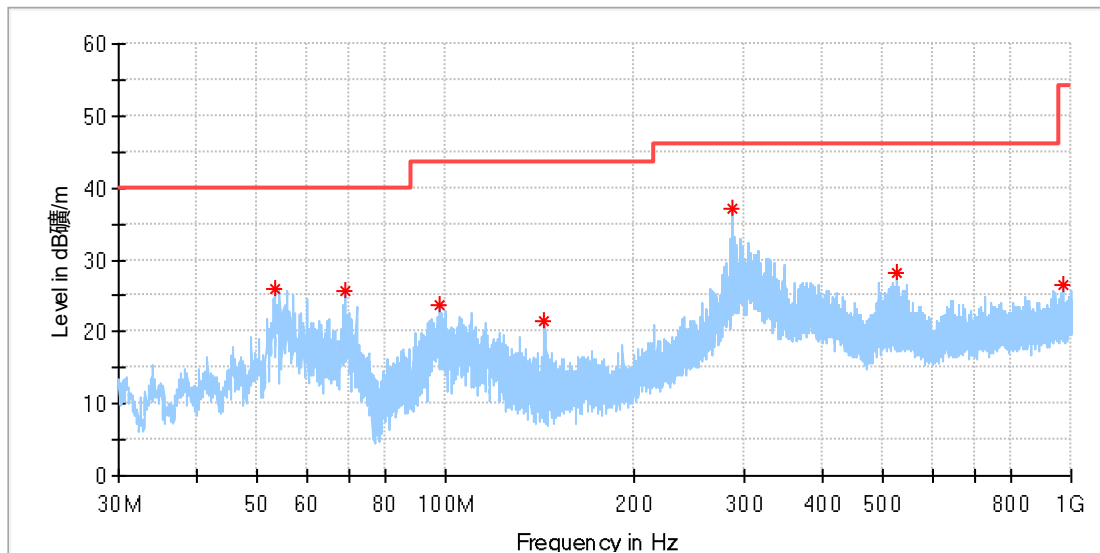

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.205385	25.90	40.00	14.10	100.0	H	151.0	-18.5
69.023846	25.57	40.00	14.43	100.0	H	0.0	-21.6
97.676154	23.84	43.50	19.66	100.0	H	112.0	-19.4
144.012308	21.37	43.50	22.13	100.0	H	0.0	-22.4
288.020000	37.19	46.00	8.81	100.0	H	42.0	-16.6
526.975769	28.11	46.00	17.89	100.0	H	0.0	-11.3
972.355000	26.57	54.00	27.43	100.0	H	112.0	-3.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Charging
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

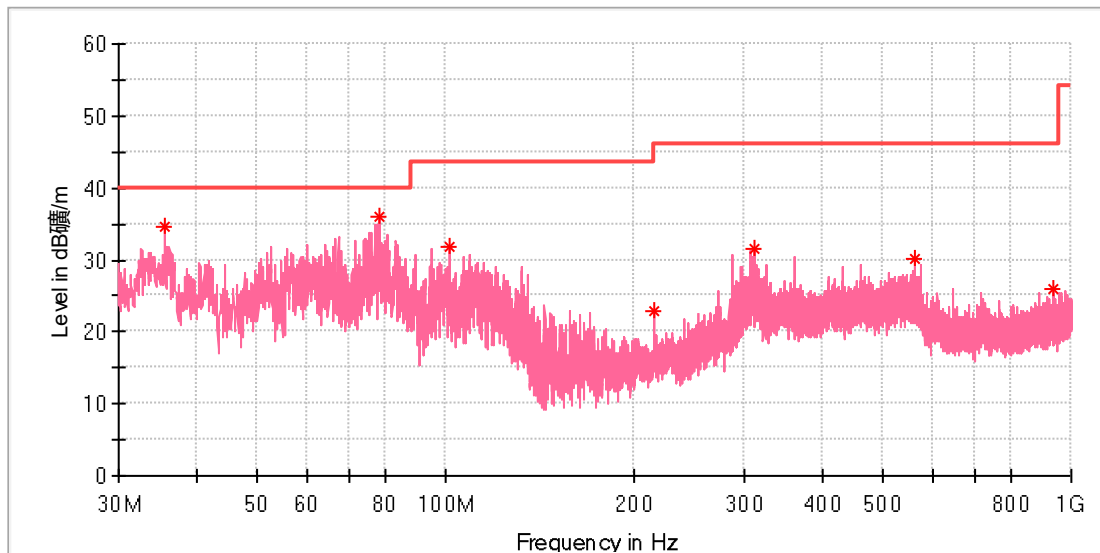

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.588846	34.54	40.00	5.46	100.0	V	335.0	-21.8
78.089615	35.92	40.00	4.08	100.0	V	195.0	-23.5
101.332308	31.71	43.50	11.79	100.0	V	202.0	-19.1
215.978846	22.94	43.50	20.56	100.0	V	218.0	-18.7
312.232692	31.61	46.00	14.39	100.0	V	327.0	-16.0
564.096923	30.17	46.00	15.83	100.0	V	273.0	-10.5
936.950000	26.02	46.00	19.98	100.0	V	131.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby mode

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W711
Test Mode:	Standby
Order No/Sample No:	168573768/A004082331-004
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

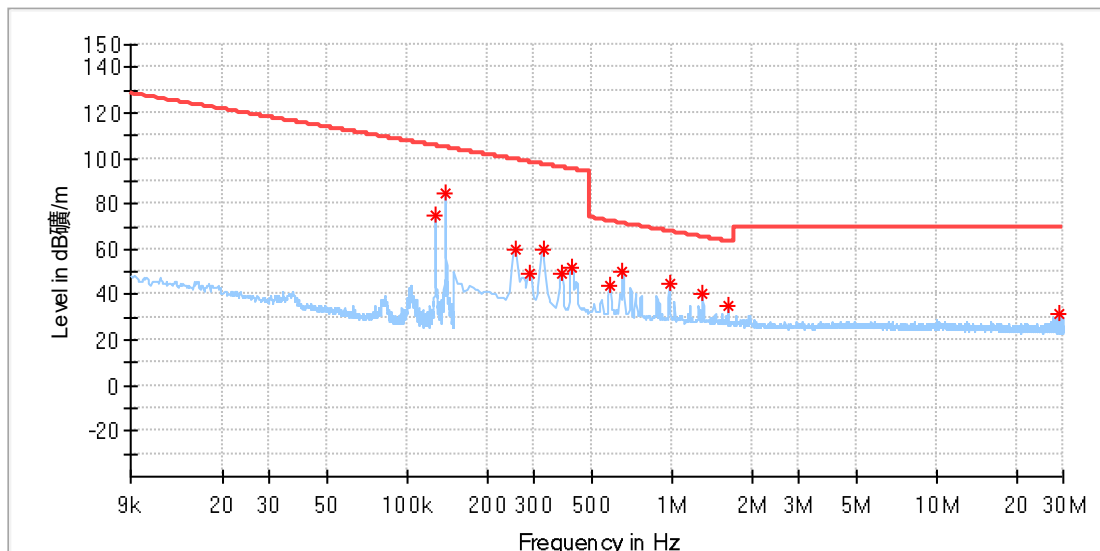

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	75.03	105.46	30.44	100.0	X	0.0	19.9
0.140130	84.45	104.67	20.22	100.0	X	349.0	19.9
0.255353	59.49	99.46	39.97	100.0	X	3.0	19.9
0.290471	49.66	98.34	48.68	100.0	X	318.0	19.9
0.325588	59.82	97.35	37.52	100.0	X	318.0	19.9
0.382655	49.54	95.95	46.40	100.0	X	3.0	19.9
0.417772	52.06	95.18	43.12	100.0	X	159.0	19.9
0.580191	43.59	72.34	28.74	100.0	X	318.0	19.9
0.650427	49.74	71.35	21.60	100.0	X	318.0	19.9
0.975265	45.11	67.84	22.73	100.0	X	318.0	19.9
1.304493	40.73	65.32	24.59	100.0	X	318.0	19.9
1.629331	35.11	63.39	28.28	100.0	X	318.0	19.9
29.007927	31.26	69.50	38.24	100.0	X	206.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Standby
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

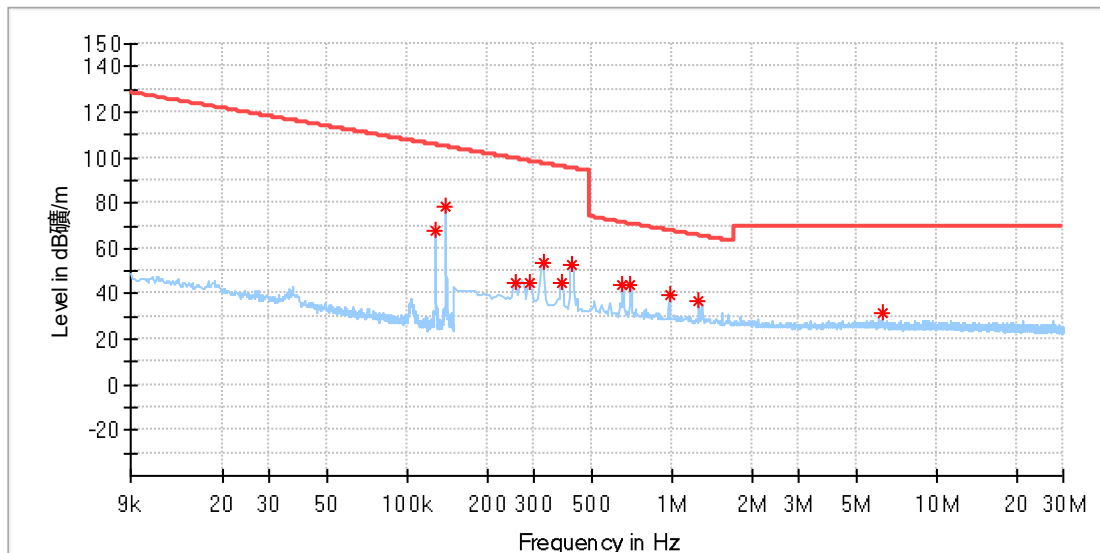

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	67.73	105.46	37.73	100.0	Y	74.0	19.9
0.140130	78.12	104.67	26.55	100.0	Y	266.0	19.9
0.255353	44.72	99.46	54.74	100.0	Y	235.0	19.9
0.290471	44.42	98.34	53.92	100.0	Y	112.0	19.9
0.325588	53.69	97.35	43.66	100.0	Y	232.0	19.9
0.382655	44.73	95.95	51.21	100.0	Y	235.0	19.9
0.417772	52.90	95.18	42.28	100.0	Y	239.0	19.9
0.650427	43.92	71.35	27.43	100.0	Y	26.0	19.9
0.698713	44.30	70.73	26.43	100.0	Y	239.0	19.9
0.979655	39.55	67.80	28.25	100.0	Y	239.0	19.9
1.260596	36.49	65.62	29.12	100.0	Y	271.0	19.9
6.260471	31.57	69.50	37.93	100.0	Y	192.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Standby
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

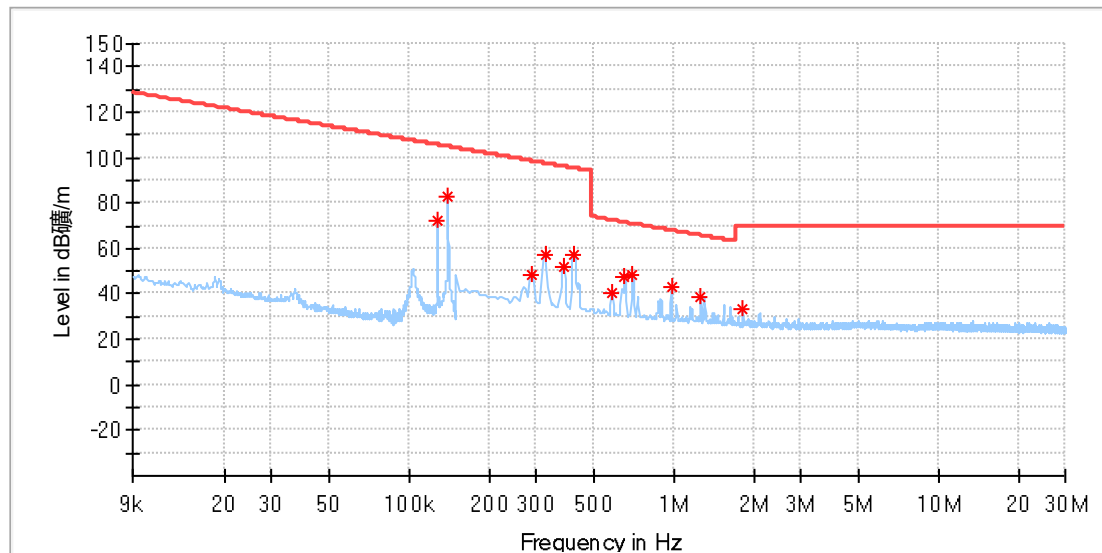

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127843	71.87	105.46	33.60	100.0	Z	265.0	19.9
0.140130	82.73	104.67	21.93	100.0	Z	343.0	19.9
0.290471	48.41	98.34	49.93	100.0	Z	8.0	19.9
0.325588	57.58	97.35	39.77	100.0	Z	342.0	19.9
0.382655	51.58	95.95	44.36	100.0	Z	359.0	19.9
0.417772	57.35	95.18	37.84	100.0	Z	4.0	19.9
0.580191	40.39	72.34	31.95	100.0	Z	8.0	19.9
0.650427	47.51	71.35	23.84	100.0	Z	342.0	19.9
0.698713	48.46	70.73	22.27	100.0	Z	4.0	19.9
0.979655	43.46	67.80	24.34	100.0	Z	4.0	19.9
1.256206	39.01	65.65	26.64	100.0	Z	4.0	19.9
1.818088	33.59	69.50	35.91	100.0	Z	4.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Standby
Order No/Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

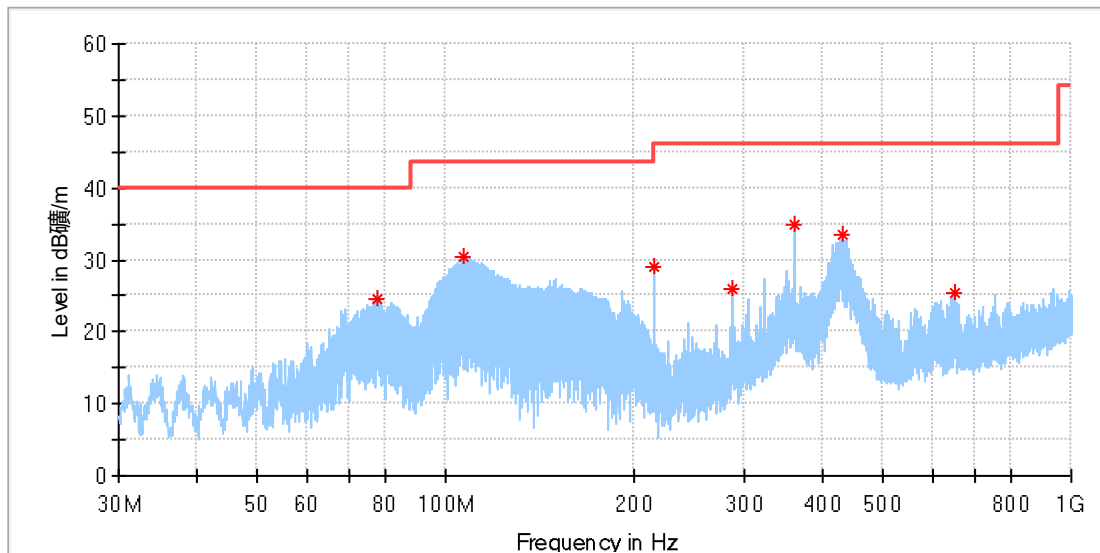

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
77.865769	24.56	40.00	15.44	100.0	H	288.0	-23.5
106.741923	30.48	43.50	13.02	100.0	H	133.0	-19.0
216.016154	28.93	46.00	17.07	100.0	H	199.0	-18.7
288.020000	25.84	46.00	20.16	100.0	H	101.0	-16.6
360.023846	34.82	46.00	11.18	100.0	H	199.0	-14.6
432.065000	33.53	46.00	12.47	100.0	H	110.0	-13.1
649.419615	25.36	46.00	20.64	100.0	H	296.0	-8.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W711
Test Mode: Standby
Order No./Sample No: 168573768/A004082331-004
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

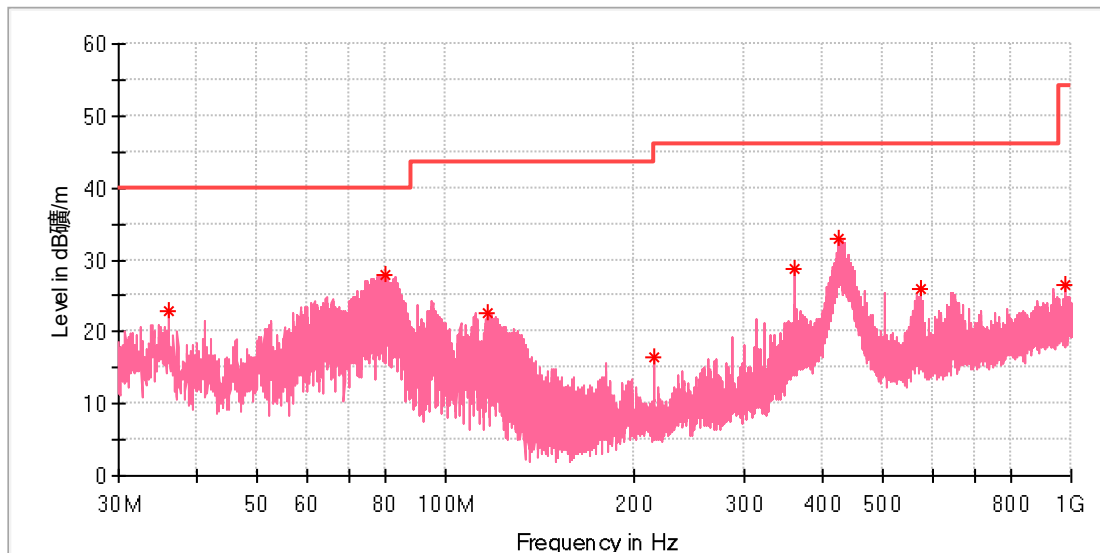

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.118462	22.79	40.00	17.21	100.0	V	128.0	-21.5
80.141539	28.01	40.00	11.99	100.0	V	128.0	-23.6
117.113462	22.50	43.50	21.00	100.0	V	160.0	-20.3
216.016154	16.34	46.00	29.66	100.0	V	287.0	-18.7
359.986539	28.83	46.00	17.17	100.0	V	0.0	-14.6
426.282308	33.02	46.00	12.98	100.0	V	135.0	-13.2
576.035385	26.05	46.00	19.95	100.0	V	135.0	-10.2
979.891154	26.39	54.00	27.61	100.0	V	160.0	-3.8


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
----	----	----	----	----	-----	----		----

EUT Information

EUT Name:	3-in-1 Wireless Charger
Order Number:	168573768(P02099178)
Model:	W711
Test Mode:	Wireless Charging, MPP, 25W + TWS 5W + Watch 5W
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15C
Test By:/Review By:	Aric Wang / Murphy Chen
Tem./Hum./Pressure:	24.0°C/52.1%/101kPa
Remark:	SR 2

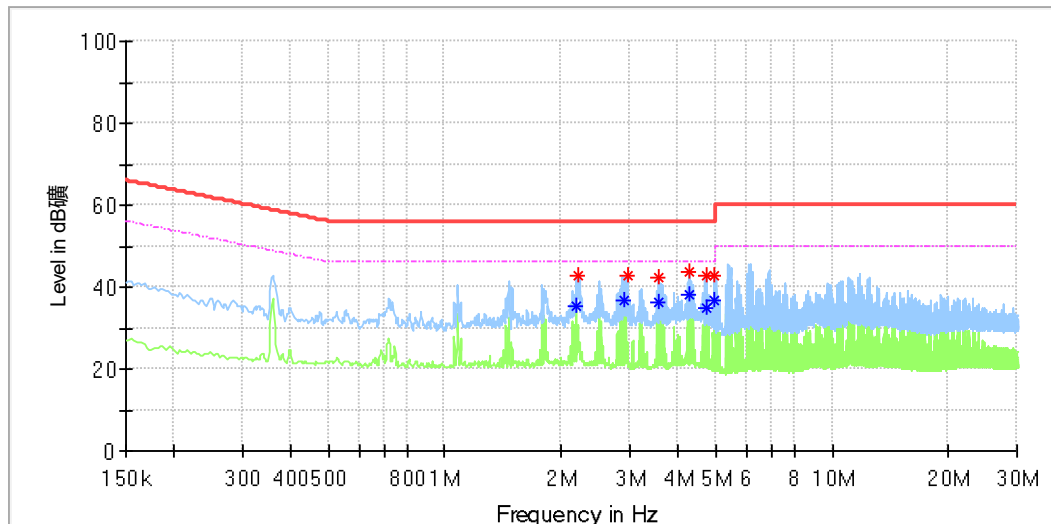

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
2.182	---	35.6	46.00	10.43	N	9.9
2.220	43.0	---	56.00	12.98	N	9.9
2.901	---	36.8	46.00	9.23	N	9.8
2.953	42.9	---	56.00	13.12	N	9.8
3.578	42.5	---	56.00	13.53	N	9.7
3.578	---	36.2	46.00	9.76	N	9.7
4.274	---	38.0	46.00	8.05	N	9.7
4.274	43.5	---	56.00	12.48	N	9.7
4.747	---	35.1	46.00	10.91	N	9.7
4.747	43.0	---	56.00	12.98	N	9.7
4.971	---	36.7	46.00	9.29	N	9.8
4.971	42.8	---	56.00	13.22	N	9.8

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
----	----	----	----	----	-----	----		----