

Prüfbericht-Nr.: Test report no.:	CN26V78H 001	Auftrags-Nr.: Order no.:	27200048	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2026-01-04	
Auftraggeber: Client:	Ugreen Group Limited UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, 518000, China			
Prüfgegenstand: Test item:	Magnetic Wireless Charger			
Bezeichnung / Typ-Nr.: Identification / Type no.:	W750			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2026-01-26	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A004192512-011~015			
Prüfzeitraum: Testing period:	2026-02-03 - 2026-02-08			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date:	2026-03-06	Ausstellungsdatum: Issue date:		2026-03-06
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:		Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2AQI5-W750			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26V78H 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26V78H 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2025-10-30	2026-10-29
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2025-10-30	2026-10-29
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2027-02-03
Artificial Mains Network	R&S	ENV216	102333	2026-07-18
Artificial Mains Network	R&S	ENV216	101445	2027-02-03
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Magnetic Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Magnetic Wireless Charger
Type Designation:	W750 Note: The product is available in two colours: white and black, only the colour is different.
Product Number (P/N) code:	85545, 85545P, 85545X, 85545A, 85545B, 85545U, 85545JP, 85545ZD, 85545T, 85314, 85314P, 85314X, 85314A, 85314B, 85314U, 85314JP, 85314ZD, 85314T, 85451, 85451P, 85451X, 85451A, 85451B, 85451U, 85451JP, 85451ZD, 85451T
FCC ID:	2AQI5-W750
Operating Voltage:	USB-C1(IN) Input: 5Vdc, 3A/ 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3A Wireless Charging Output Power: 25.0W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 360 kHz
Operating Frequency:	110.5 – 148.5 kHz & 360 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	5W / 7.5W / 10W / 15W / 25W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, MPP, 15W (Phone)
- E. On, Wireless Charging, MPP, 25W (Phone)
- F. On, Standby mode
- G. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W750 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Digital Multimeter	Fluke	18B+	N/A
Smart Phone 1	Apple	iPhone16 Plus	N/A
Smart Phone 2	Apple	iPhone8 Plus	N/A
Wireless charge Load	YBZ	YBZ-MPP25	N/A
AC/DC Adapter	HUAWEI	HW-200325CP1	Output: 5V~2A/ 9V~2A/ 12V~2A/ 15V~3A/ 20V~3.25A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

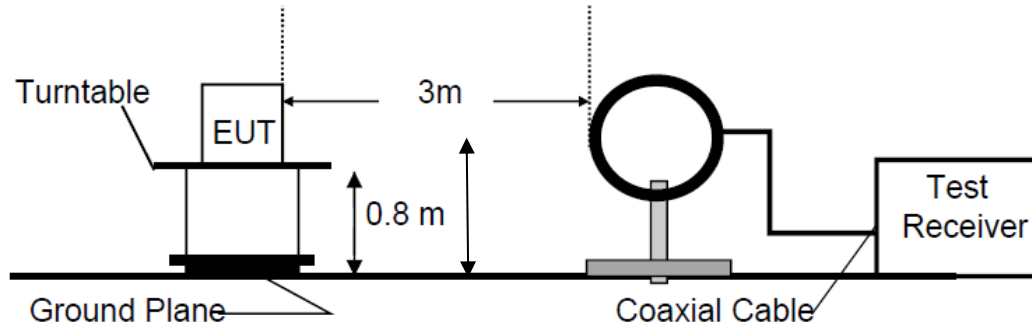


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


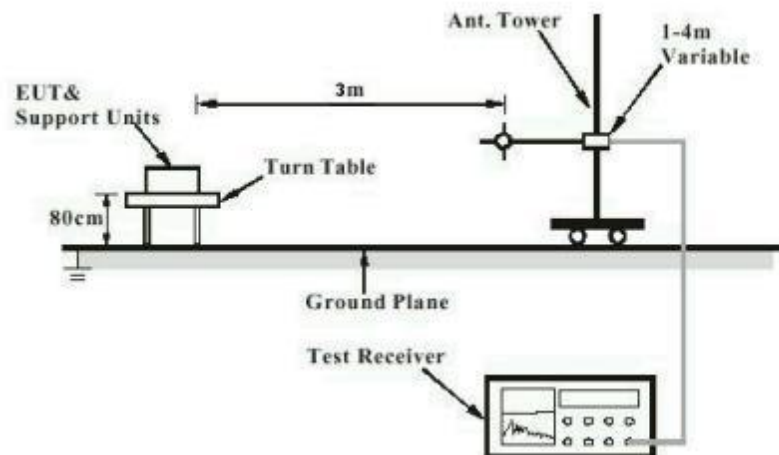


Diagram of Measurement Configuration for Mains Conduction Measurement

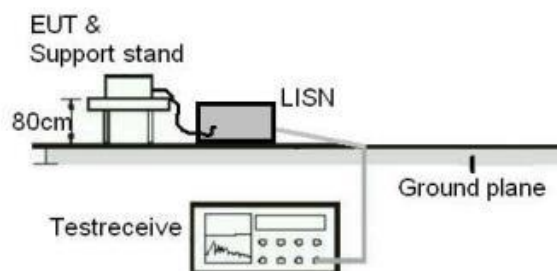

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN26V78H 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-02-06
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F
Ambient temperature	: 22 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26V78H 001
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10: 2020
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2026-02-06 to 2026-02-08
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26V78H 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-02-03 to 2026-02-06
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (10W).....	2
Wireless charging (25W).....	3
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	4
Wireless charging (10W).....	4
Wireless charging (25W).....	15
Standby mode	26
APPENDIX A.4: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	31


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (10W)

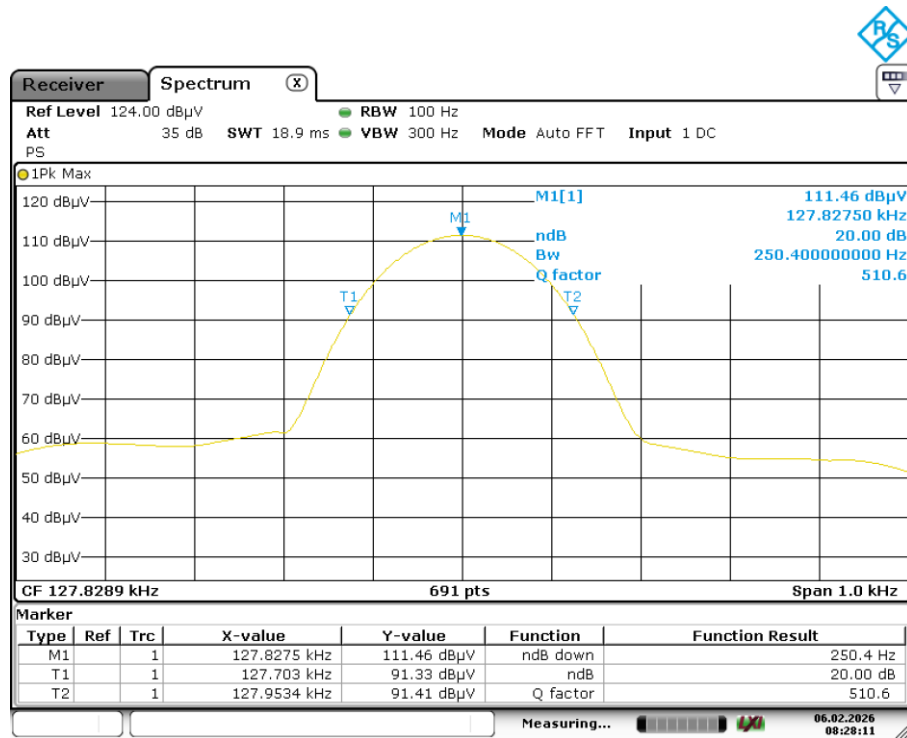

Date: 6.FEB.2026 08:28:11

Wireless charging (25W)

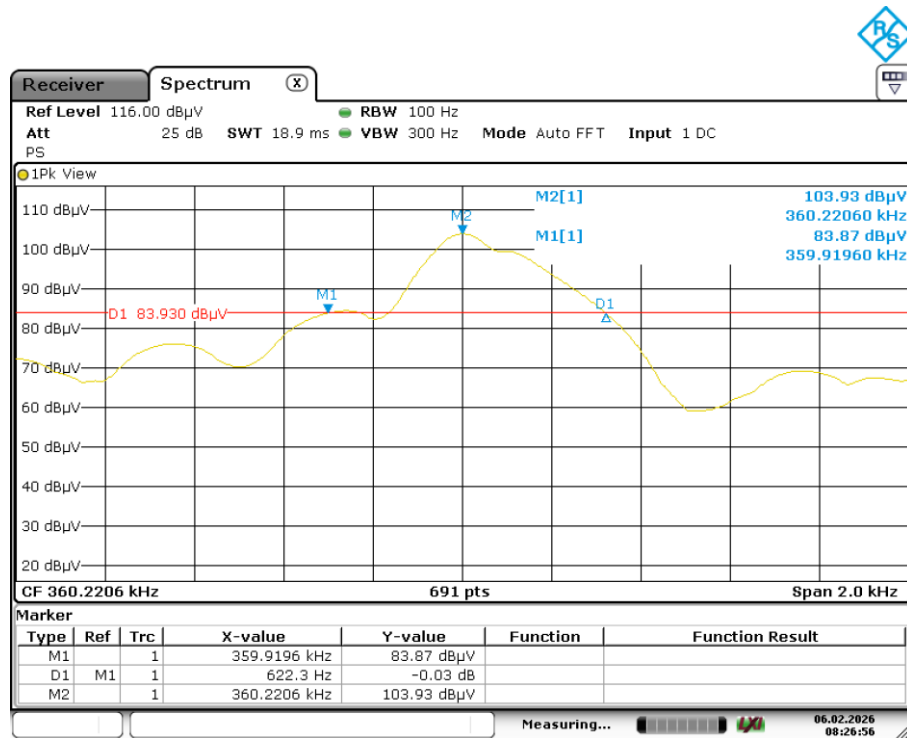

Date: 6.FEB.2026 08:26:56


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (10W)

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

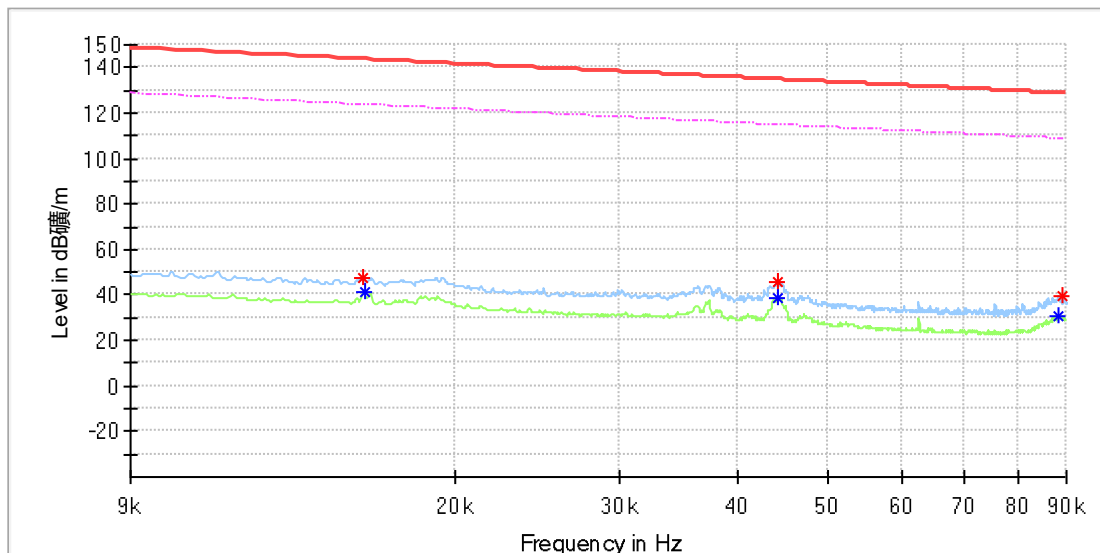


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015943	47.67	---	143.54	95.87	100.0	X	56.0	20.0
0.016001	---	41.47	123.51	82.04	100.0	X	56.0	20.0
0.044293	45.87	---	134.67	88.79	100.0	X	0.0	20.0
0.044351	---	38.89	114.65	75.77	100.0	X	85.0	20.0
0.088438	---	30.84	108.66	77.82	100.0	X	96.0	20.0
0.089074	39.70	---	128.60	88.90	100.0	X	96.0	20.0

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

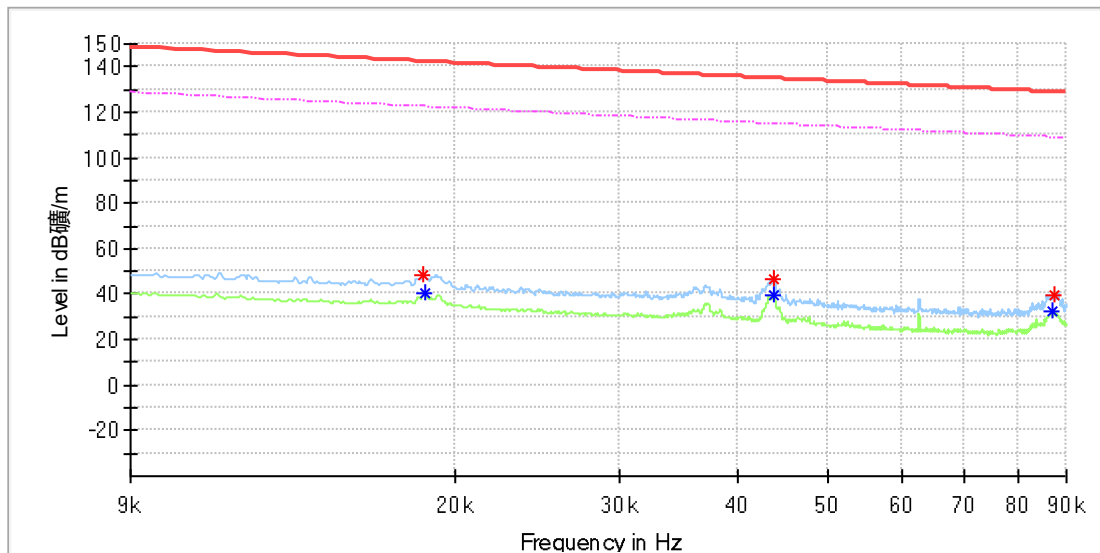


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	48.21	---	142.25	94.05	100.0	Y	217.0	20.0
0.018546	---	40.54	122.22	81.68	100.0	Y	239.0	20.0
0.043830	---	39.78	114.76	74.98	100.0	Y	37.0	20.0
0.043830	46.84	---	134.76	87.92	100.0	Y	37.0	20.0
0.086818	---	32.38	108.82	76.45	100.0	Y	30.0	20.0
0.087281	39.97	---	128.78	88.81	100.0	Y	37.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

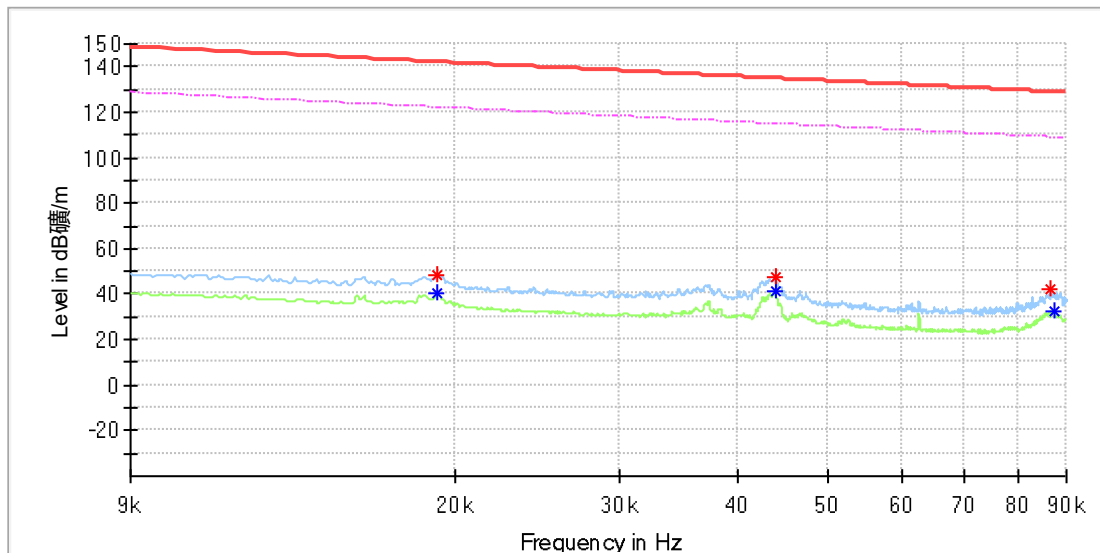


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	48.22	---	141.96	93.73	100.0	Z	294.0	20.0
0.019183	---	40.04	121.93	81.89	100.0	Z	0.0	20.0
0.044004	47.62	---	134.72	87.10	100.0	Z	37.0	20.0
0.044004	---	41.21	114.72	73.51	100.0	Z	37.0	20.0
0.086644	41.81	---	128.84	87.03	100.0	Z	30.0	20.0
0.087512	---	32.55	108.75	76.21	100.0	Z	42.0	20.0

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

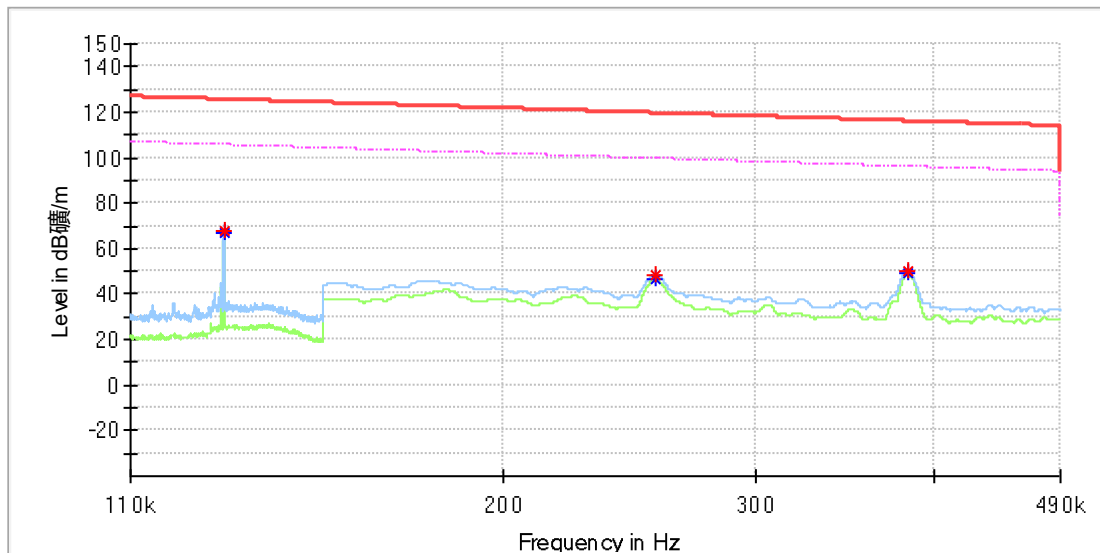


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127829	---	67.30	105.47	38.17	100.0	X	36.0	20.0
0.127829	67.41	---	125.47	58.05	100.0	X	36.0	20.0
0.255550	---	46.39	99.45	53.06	100.0	X	257.0	20.0
0.255600	48.44	---	119.45	71.01	100.0	X	257.0	20.0
0.383350	49.99	---	115.93	65.94	100.0	X	61.0	20.0
0.383600	---	48.85	95.93	47.08	100.0	X	61.0	20.0

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

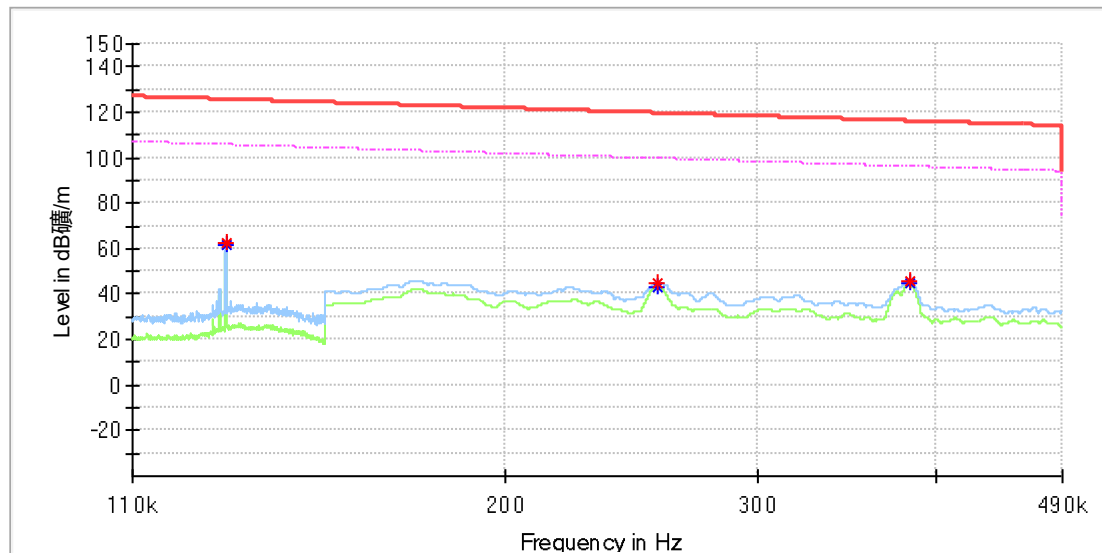


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127829	62.07	---	125.47	63.39	100.0	Y	137.0	20.0
0.127829	---	61.95	105.47	43.52	100.0	Y	137.0	20.0
0.255550	---	43.31	99.45	56.14	100.0	Y	169.0	20.0
0.256000	45.10	---	119.44	74.33	100.0	Y	169.0	20.0
0.383300	46.00	---	115.93	69.93	100.0	Y	143.0	20.0
0.383300	---	44.70	95.93	51.23	100.0	Y	143.0	20.0

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

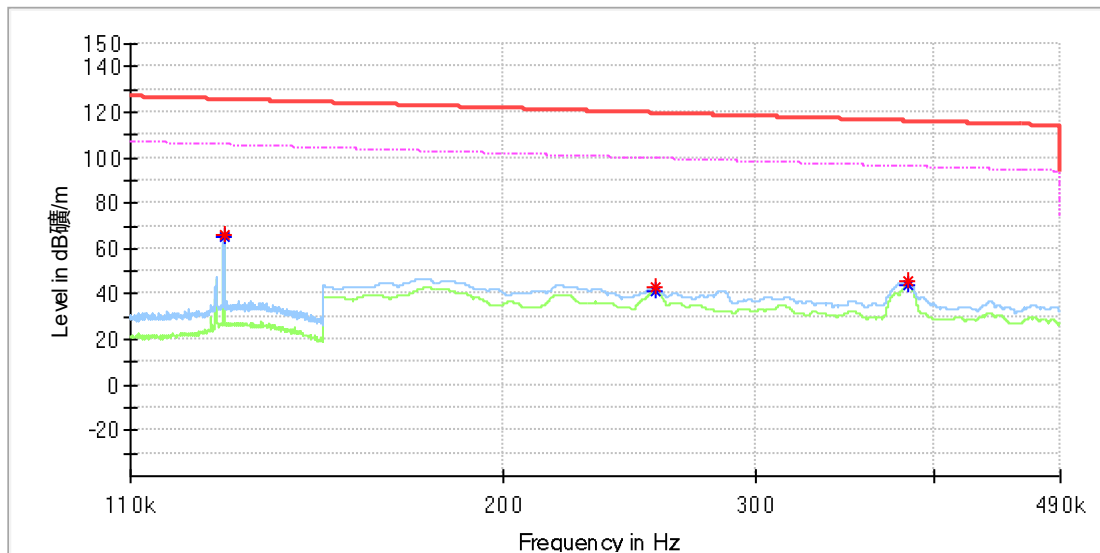


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127829	---	65.51	105.47	39.96	100.0	Z	54.0	20.0
0.127829	65.68	---	125.47	59.78	100.0	Z	54.0	20.0
0.255300	42.92	---	119.46	76.54	100.0	Z	259.0	20.0
0.255500	---	40.98	99.45	58.48	100.0	Z	259.0	20.0
0.383100	45.72	---	115.94	70.21	100.0	Z	52.0	20.0
0.383100	---	43.84	95.94	52.10	100.0	Z	52.0	20.0

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

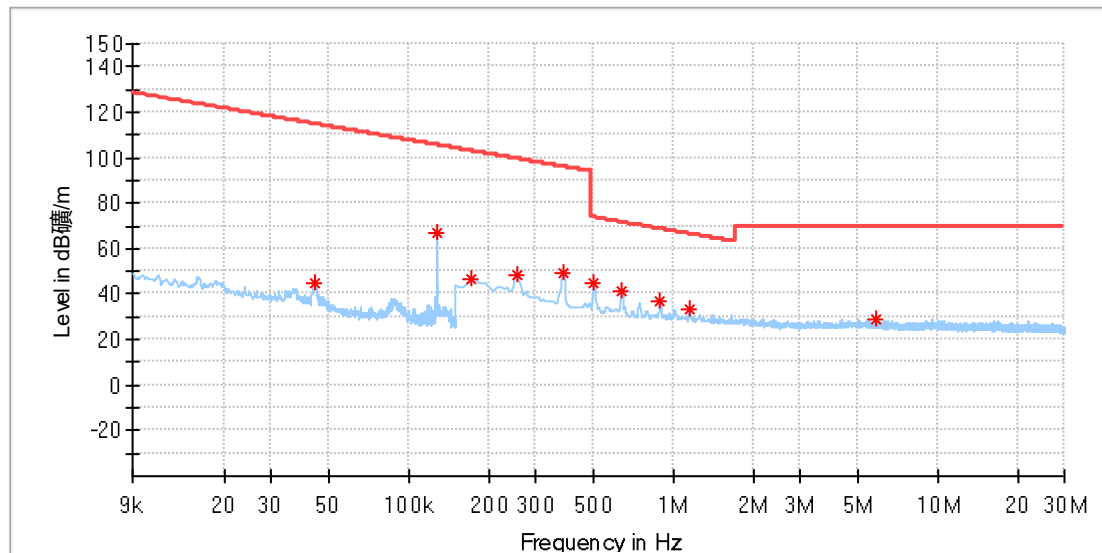

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.044351	44.62	114.65	70.04	100.0	X	95.0	19.9
0.127843	67.25	105.46	38.21	100.0	X	38.0	19.9
0.171949	46.80	102.89	56.09	100.0	X	99.0	19.8
0.255353	48.29	99.46	51.17	100.0	X	232.0	19.9
0.382655	49.58	95.95	46.37	100.0	X	66.0	19.9
0.501177	44.40	73.61	29.20	100.0	X	207.0	19.9
0.637258	41.17	71.52	30.35	100.0	X	81.0	19.9
0.891860	36.88	68.61	31.74	100.0	X	41.0	19.9
1.146463	33.55	66.44	32.88	100.0	X	8.0	19.9
5.821500	29.15	69.50	40.35	100.0	X	113.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

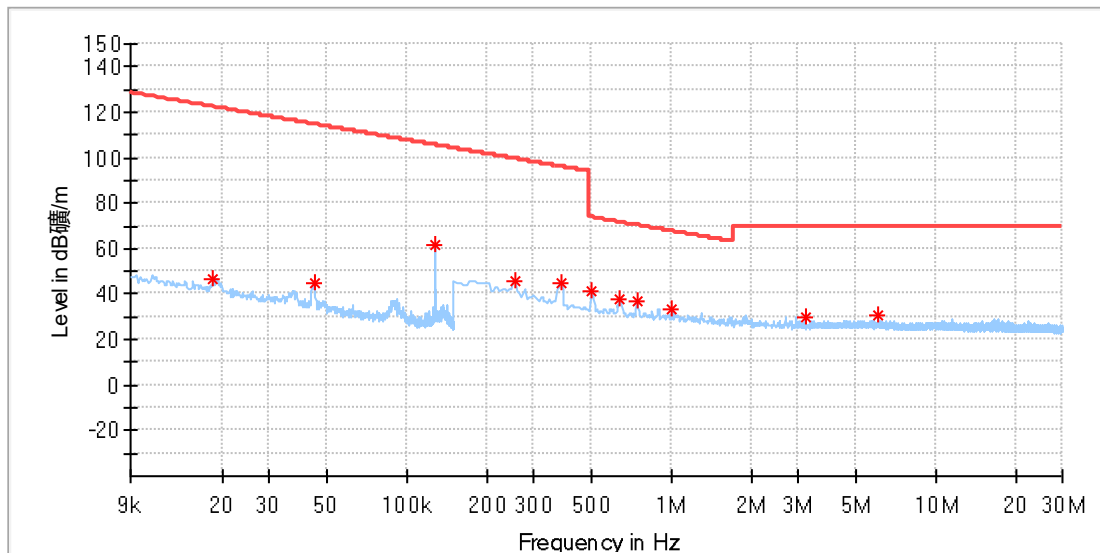

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	47.04	122.26	75.22	100.0	Y	181.0	19.9
0.044451	44.82	114.64	69.81	100.0	Y	34.0	19.9
0.127843	61.93	105.46	43.54	100.0	Y	132.0	19.9
0.255353	45.64	99.46	53.81	100.0	Y	4.0	19.9
0.382655	45.25	95.95	50.70	100.0	Y	132.0	19.9
0.501177	41.66	73.61	31.94	100.0	Y	55.0	19.9
0.637258	37.90	71.52	33.63	100.0	Y	111.0	19.9
0.742610	36.46	70.20	33.74	100.0	Y	41.0	19.9
1.005993	33.50	67.57	34.07	100.0	Y	70.0	19.9
3.192066	29.40	69.50	40.10	100.0	Y	37.0	20.0
6.049765	30.66	69.50	38.84	100.0	Y	348.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

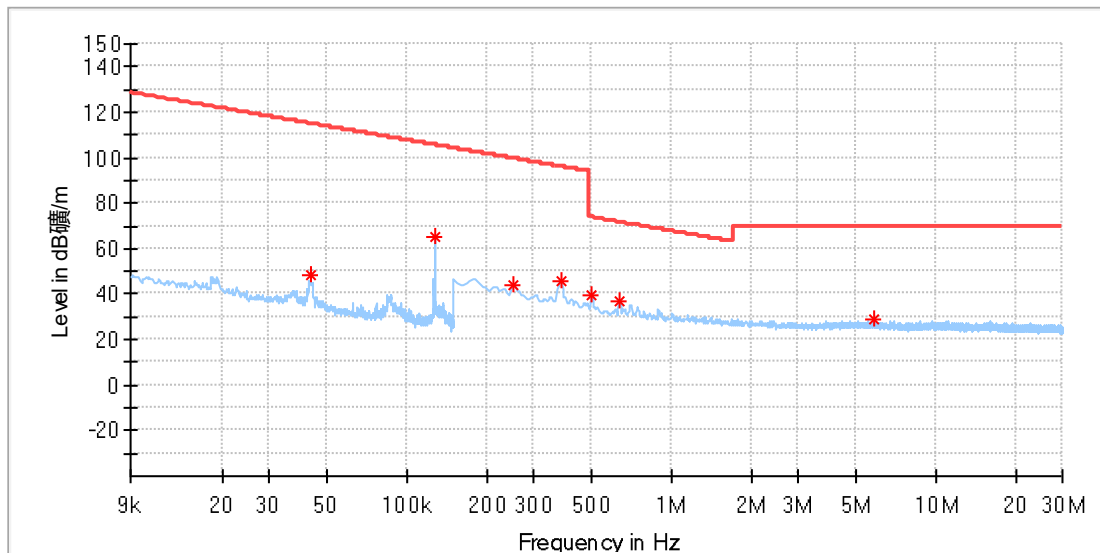

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.043243	48.33	114.87	66.54	100.0	Z	31.0	19.9
0.127843	65.55	105.46	39.92	100.0	Z	54.0	19.9
0.250963	44.17	99.61	55.44	100.0	Z	71.0	19.9
0.382655	45.61	95.95	50.34	100.0	Z	67.0	19.9
0.501177	39.19	73.61	34.41	100.0	Z	157.0	19.9
0.637258	37.22	71.52	34.30	100.0	Z	71.0	19.9
5.817110	28.50	69.50	41.00	100.0	Z	46.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

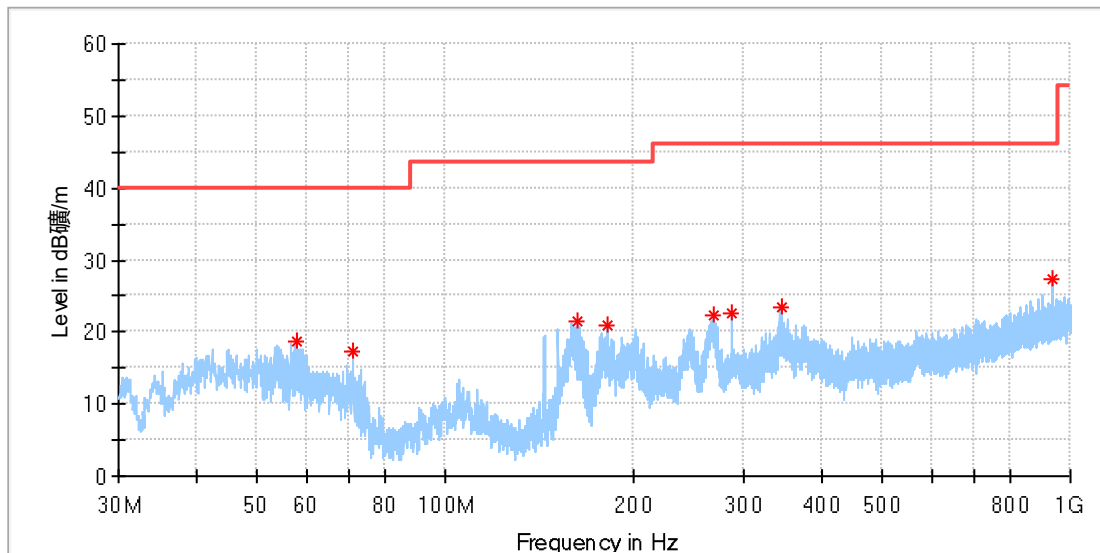

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
58.022222	18.69	40.00	21.31	100.0	H	174.0	-18.9
70.955556	17.30	40.00	22.70	100.0	H	291.0	-22.2
163.213333	21.55	43.50	21.95	100.0	H	0.0	-21.6
181.481667	20.99	43.50	22.51	100.0	H	87.0	-20.4
267.811667	22.42	46.00	23.58	100.0	H	167.0	-17.0
288.020000	22.64	46.00	23.36	100.0	H	117.0	-16.6
345.034444	23.51	46.00	22.49	100.0	H	131.0	-15.0
936.950000	27.37	46.00	18.63	100.0	H	54.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

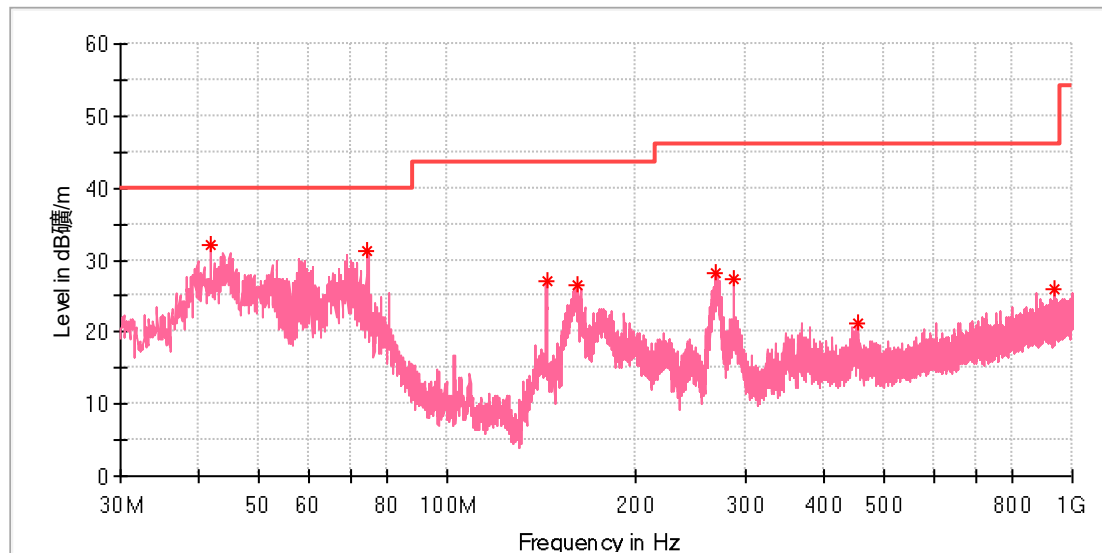

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.855556	31.99	40.00	8.01	100.0	V	145.0	-19.7
74.620000	31.24	40.00	8.76	100.0	V	173.0	-23.4
144.028889	26.98	43.50	16.52	100.0	V	187.0	-22.4
161.165556	26.39	43.50	17.11	100.0	V	230.0	-21.7
269.590000	28.24	46.00	17.76	100.0	V	209.0	-17.0
288.020000	27.49	46.00	18.51	100.0	V	238.0	-16.6
455.183333	21.16	46.00	24.84	100.0	V	151.0	-12.7
936.950000	26.07	46.00	19.93	100.0	V	261.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (25W)

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

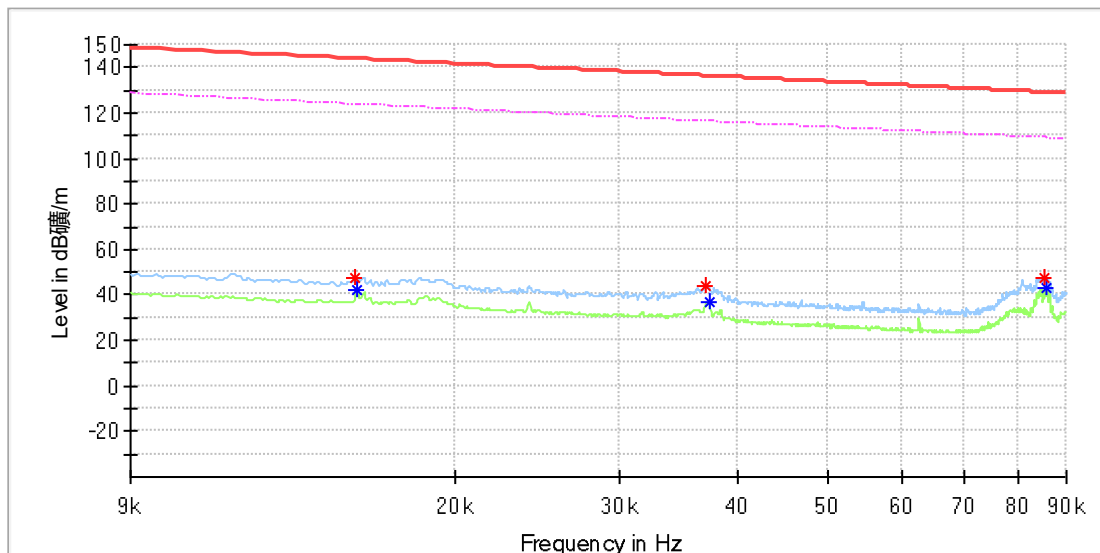


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015654	47.33	---	143.70	96.37	100.0	X	168.0	20.0
0.015711	---	42.41	123.66	81.26	100.0	X	53.0	20.0
0.037061	44.13	---	136.21	92.08	100.0	X	351.0	20.0
0.037350	---	36.80	116.15	79.35	100.0	X	226.0	20.0
0.085371	47.91	---	128.97	81.06	100.0	X	87.0	20.0
0.085834	---	42.90	108.92	66.02	100.0	X	346.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

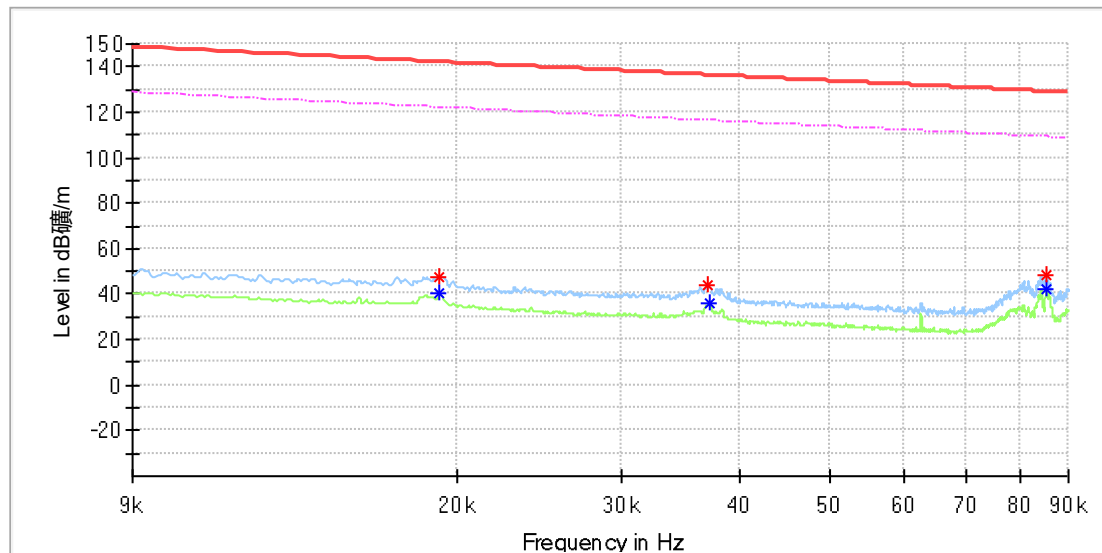


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	47.60	---	141.96	94.35	100.0	Y	359.0	20.0
0.019183	---	40.16	121.93	81.77	100.0	Y	339.0	20.0
0.037061	43.80	---	136.21	92.41	100.0	Y	270.0	20.0
0.037234	---	36.36	116.17	79.82	100.0	Y	294.0	20.0
0.085198	48.72	---	128.99	80.27	100.0	Y	49.0	20.0
0.085256	---	42.50	108.98	66.48	100.0	Y	49.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

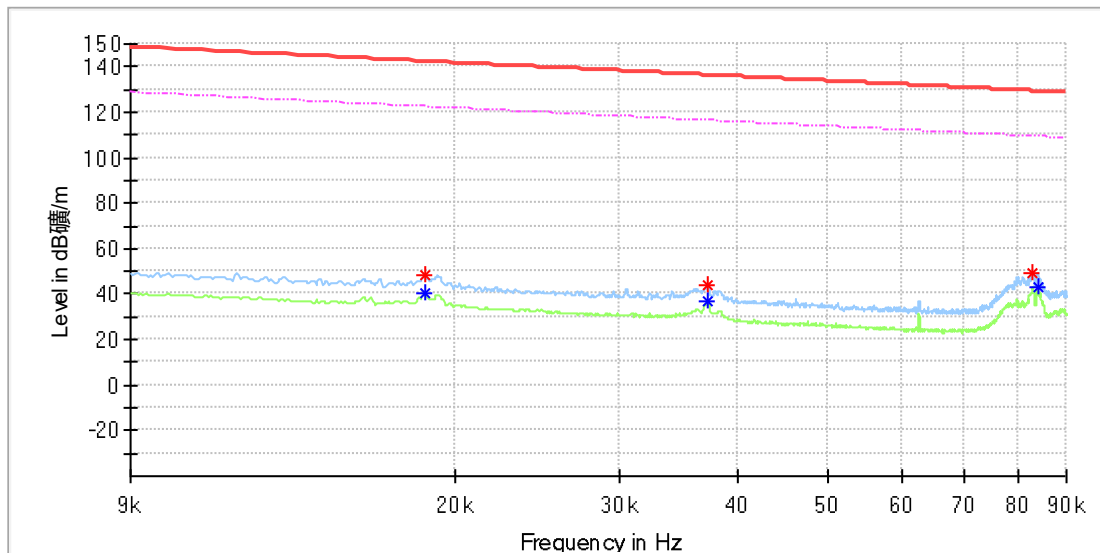


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018546	48.07	---	142.22	94.16	100.0	Z	84.0	20.0
0.018546	---	40.00	122.22	82.23	100.0	Z	84.0	20.0
0.037176	44.03	---	136.19	92.15	100.0	Z	50.0	20.0
0.037234	---	36.58	116.17	79.60	100.0	Z	50.0	20.0
0.082768	49.45	---	129.24	79.79	100.0	Z	21.0	20.0
0.083983	---	43.48	109.11	65.63	100.0	Z	10.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

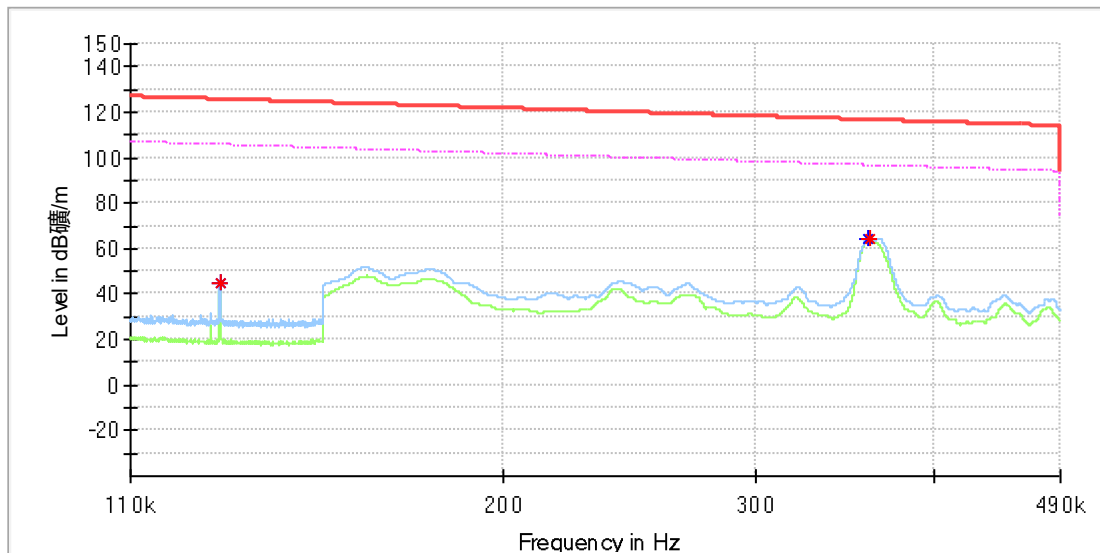


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127029	45.28	---	125.52	80.24	100.0	X	136.0	20.0
0.127029	---	44.53	105.52	60.99	100.0	X	136.0	20.0
0.360250	---	64.20	96.47	32.27	100.0	X	60.0	20.0
0.360300	64.52	---	116.47	51.95	100.0	X	60.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

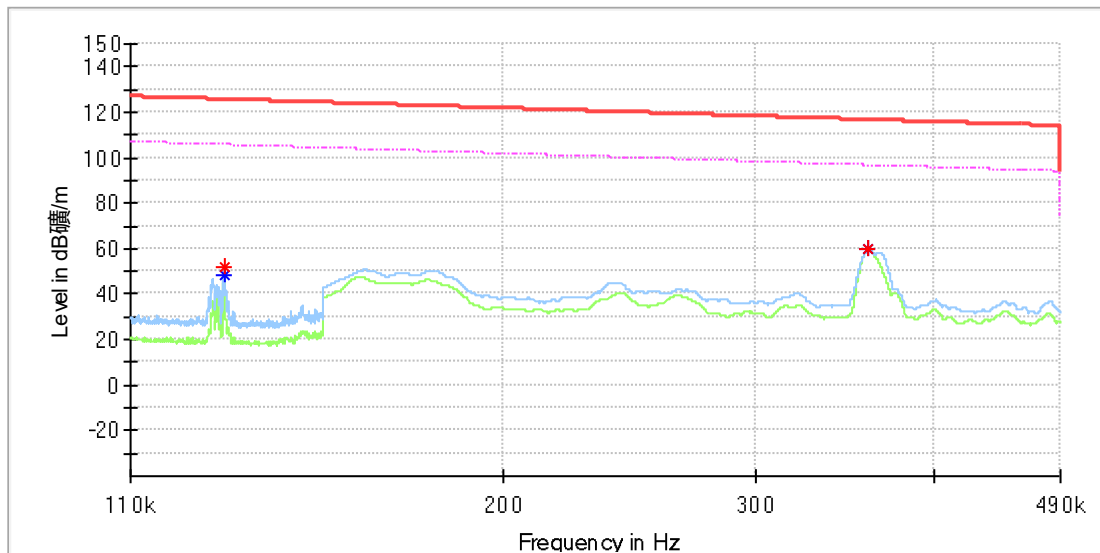


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127829	51.63	---	125.47	73.83	100.0	Y	306.0	20.0
0.127829	---	47.95	105.47	57.51	100.0	Y	306.0	20.0
0.360250	---	59.51	96.47	36.96	100.0	Y	327.0	20.0
0.360250	59.72	---	116.47	56.75	100.0	Y	327.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

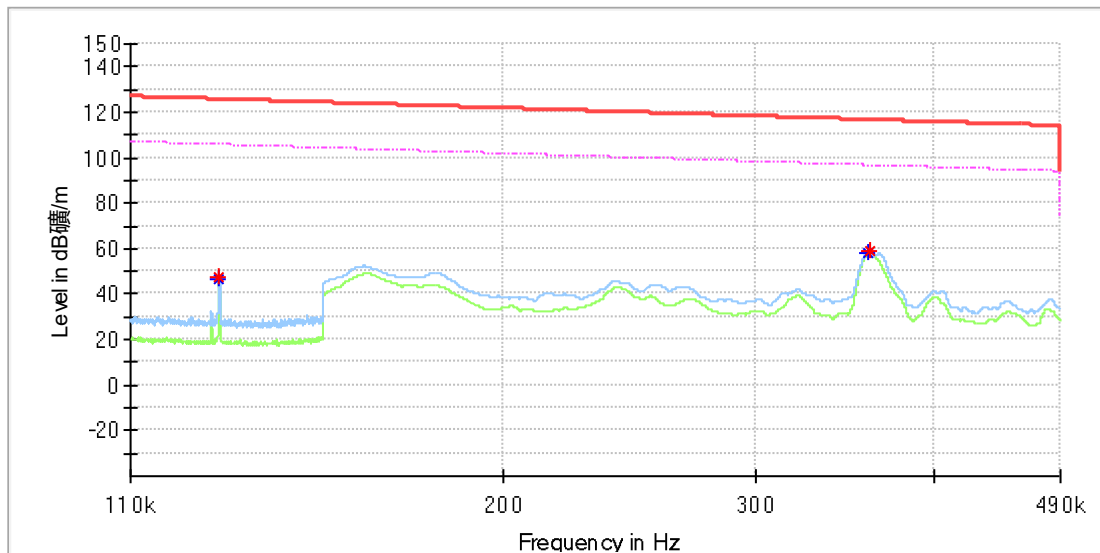


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126857	47.56	---	125.53	77.97	100.0	Z	63.0	20.0
0.126857	---	46.90	105.53	58.63	100.0	Z	63.0	20.0
0.360250	---	58.06	96.47	38.41	100.0	Z	64.0	20.0
0.360350	58.76	---	116.47	57.70	100.0	Z	64.0	20.0

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

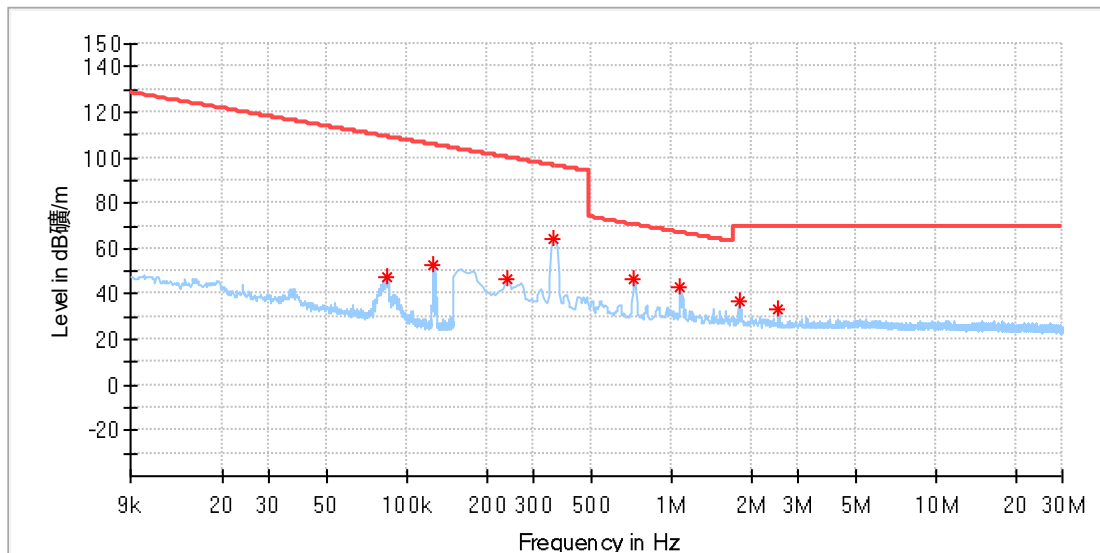

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.084536	47.26	109.06	61.79	100.0	X	343.0	19.9
0.125627	52.45	105.62	53.16	100.0	X	112.0	19.9
0.237794	46.60	100.08	53.48	100.0	X	81.0	19.9
0.356316	64.31	96.57	32.26	100.0	X	67.0	19.9
0.720662	46.72	70.46	23.74	100.0	X	250.0	19.9
1.080618	43.36	66.95	23.59	100.0	X	92.0	19.9
1.800530	36.79	69.50	32.71	100.0	X	96.0	20.0
2.520441	32.99	69.50	36.51	100.0	X	89.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

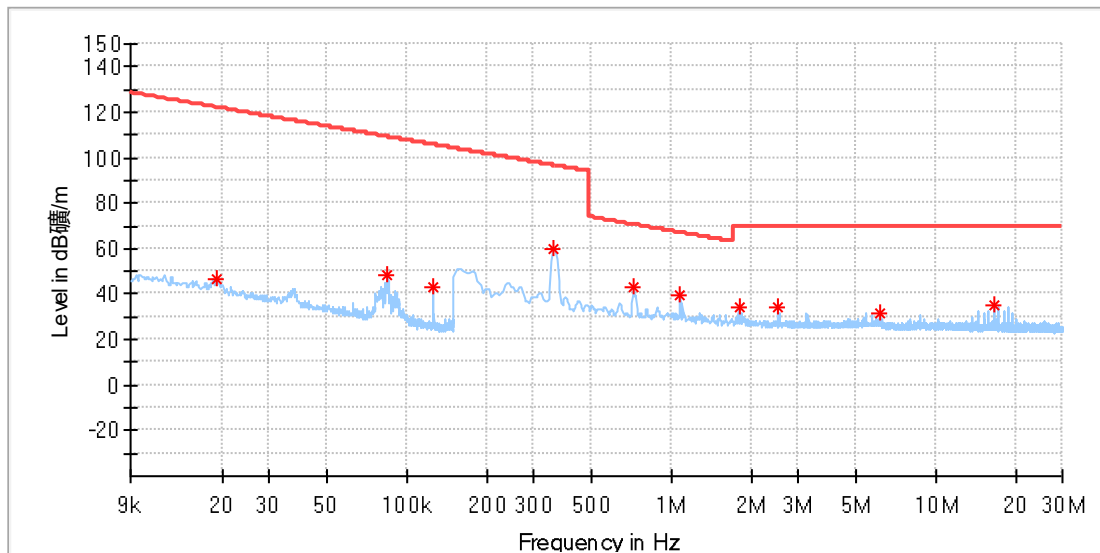

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.47	121.94	75.47	100.0	Y	232.0	19.9
0.083529	48.12	109.16	61.04	100.0	Y	40.0	19.9
0.126131	43.11	105.58	62.47	100.0	Y	70.0	19.9
0.356316	59.91	96.57	36.66	100.0	Y	330.0	19.9
0.716272	42.90	70.51	27.61	100.0	Y	28.0	19.9
1.080618	39.60	66.95	27.35	100.0	Y	136.0	19.9
1.796140	34.32	69.50	35.18	100.0	Y	31.0	20.0
2.520441	33.83	69.50	35.67	100.0	Y	67.0	20.0
6.120000	31.83	69.50	37.67	100.0	Y	57.0	20.1
16.567500	34.84	69.50	34.66	100.0	Y	75.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Charging
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

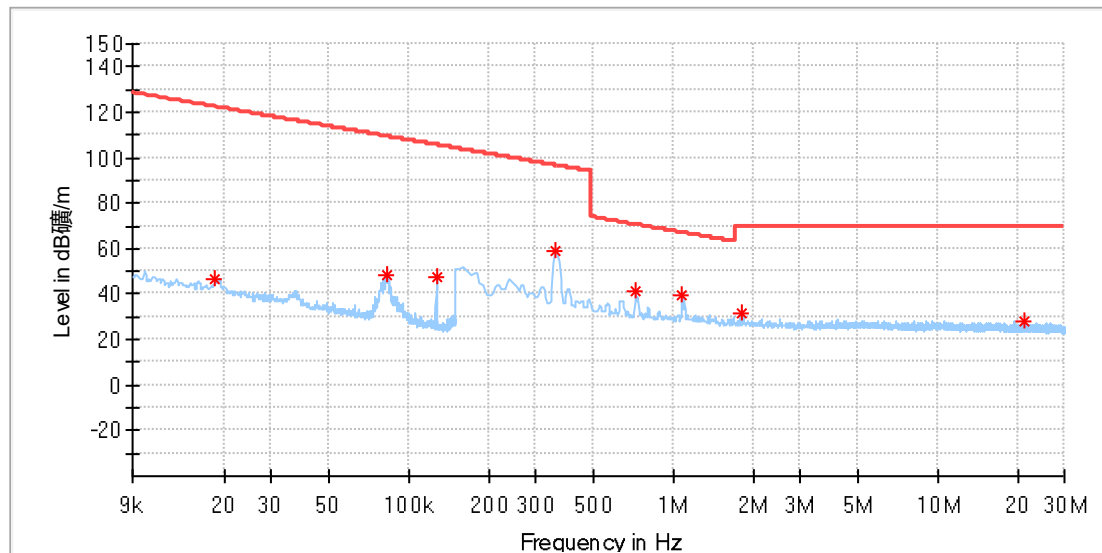

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	46.73	122.26	75.53	100.0	Z	23.0	19.9
0.083025	48.55	109.21	60.66	100.0	Z	18.0	19.9
0.126735	47.08	105.54	58.46	100.0	Z	65.0	19.9
0.356316	58.55	96.57	38.02	100.0	Z	72.0	19.9
0.716272	40.94	70.51	29.57	100.0	Z	253.0	19.9
1.080618	39.95	66.95	27.00	100.0	Z	44.0	19.9
1.796140	31.96	69.50	37.54	100.0	Z	62.0	20.0
21.119625	28.01	69.50	41.49	100.0	Z	307.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

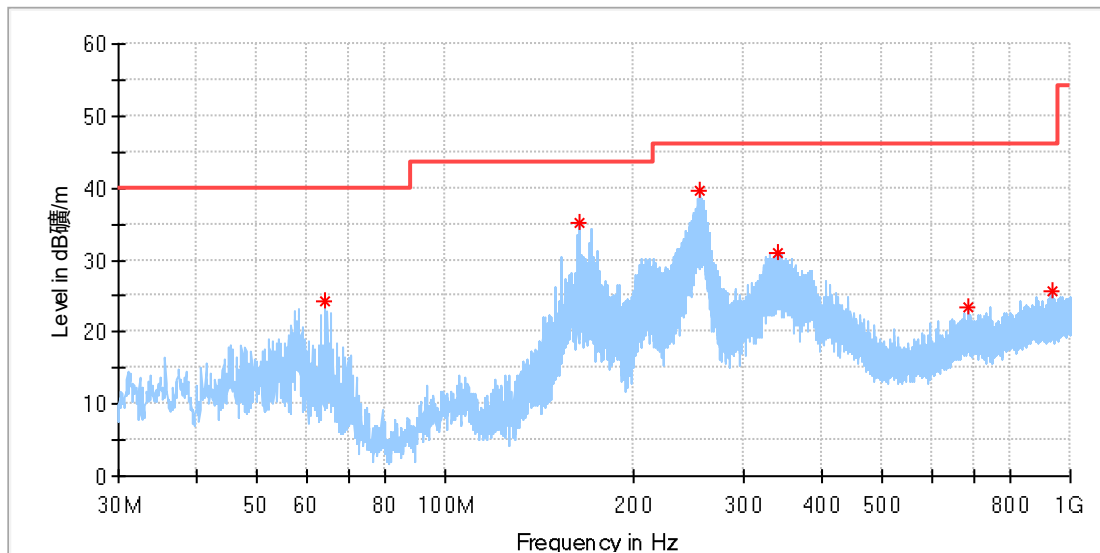

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
64.111667	24.27	40.00	15.73	100.0	H	285.0	-20.0
163.913889	35.03	43.50	8.47	100.0	H	272.0	-21.6
256.117778	39.75	46.00	6.25	100.0	H	89.0	-17.2
339.322222	31.01	46.00	14.99	100.0	H	257.0	-15.1
686.420556	23.53	46.00	22.47	100.0	H	249.0	-8.2
938.405000	25.80	46.00	20.20	100.0	H	31.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Charging
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

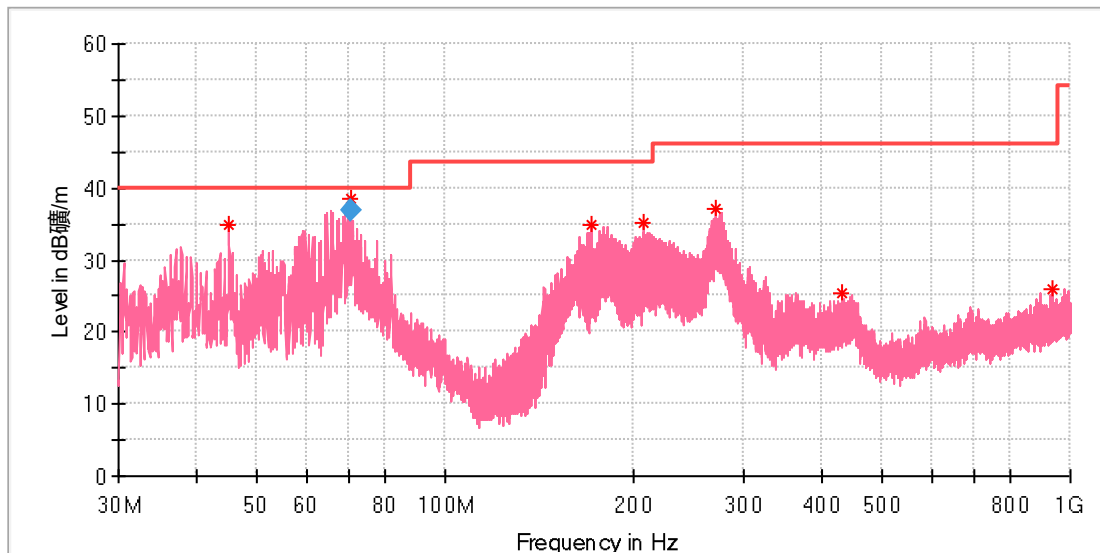

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.035000	34.75	40.00	5.25	100.0	V	76.0	-18.9
70.578333	38.52	40.00	1.48	100.0	V	68.0	-22.1
171.835556	34.76	43.50	8.74	100.0	V	358.0	-21.2
207.132778	35.08	43.50	8.42	100.0	V	119.0	-18.9
271.260556	37.20	46.00	8.80	100.0	V	281.0	-16.9
430.071111	25.29	46.00	20.71	100.0	V	218.0	-13.1
936.950000	25.89	46.00	20.11	100.0	V	275.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
70.594194	36.85	40.00	3.15	100.0	V	63.0	-22.1

Standby mode

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Standby
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

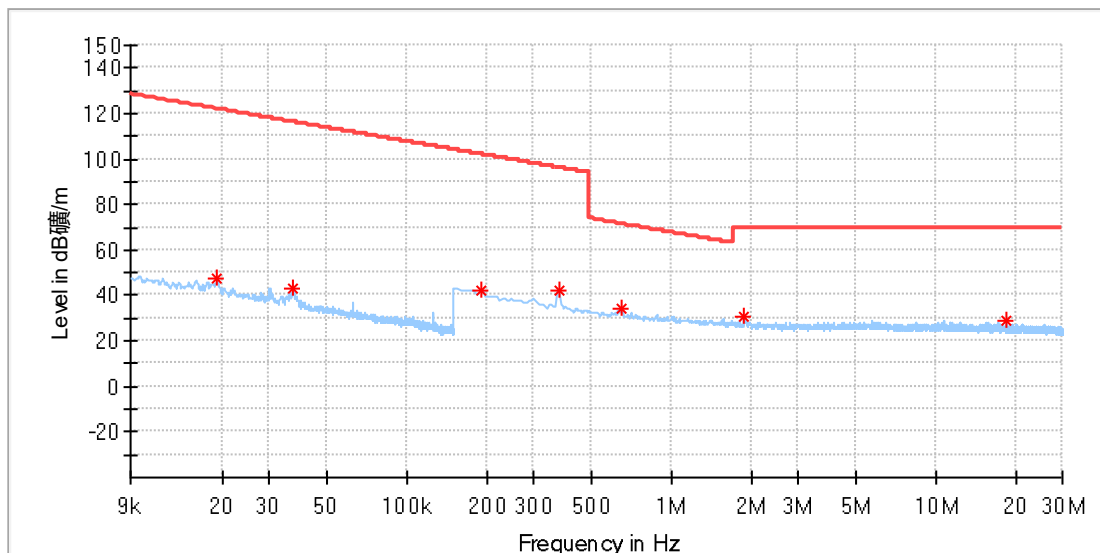

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	47.26	121.98	74.72	100.0	X	123.0	19.9
0.036999	43.17	116.23	73.06	100.0	X	357.0	19.9
0.189508	41.91	102.05	60.14	100.0	X	0.0	19.8
0.373875	42.45	96.15	53.70	100.0	X	200.0	19.9
0.641647	33.83	71.47	37.63	100.0	X	232.0	19.9
1.870765	31.00	69.50	38.50	100.0	X	20.0	20.0
18.367280	28.59	69.50	40.91	100.0	X	1.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Standby
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

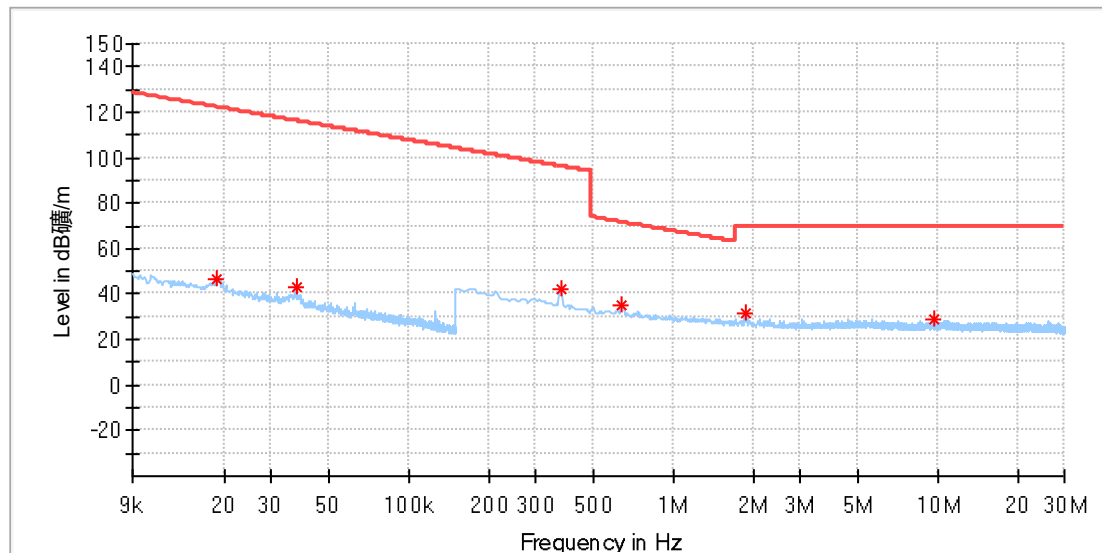

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018568	46.97	122.21	75.24	100.0	Y	189.0	19.9
0.037301	42.72	116.16	73.44	100.0	Y	127.0	19.9
0.373875	42.33	96.15	53.82	100.0	Y	56.0	19.9
0.637258	34.80	71.52	36.72	100.0	Y	125.0	19.9
1.857596	31.82	69.50	37.68	100.0	Y	236.0	20.0
9.723949	28.78	69.50	40.72	100.0	Y	45.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Standby
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

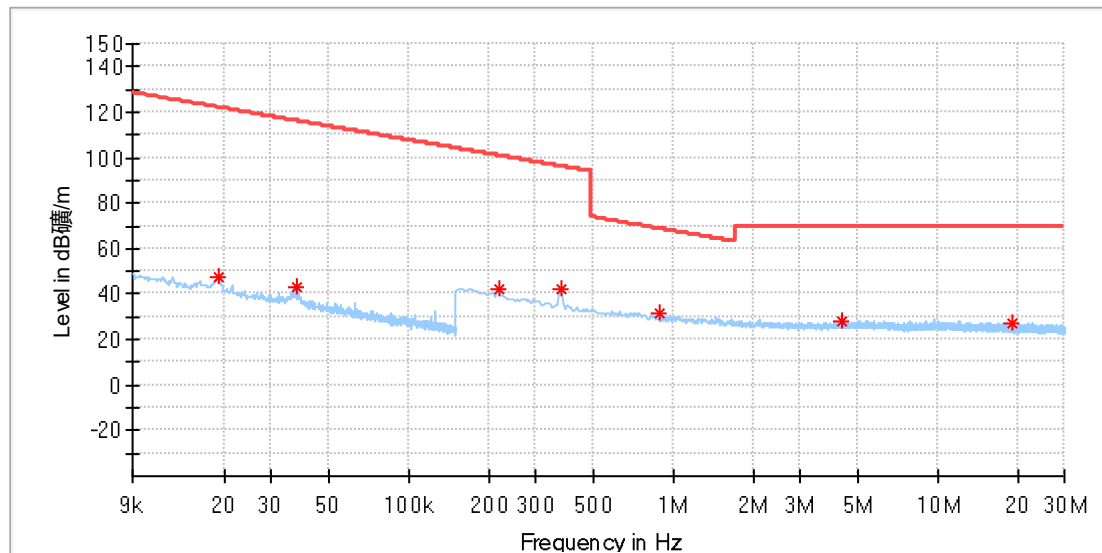

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	47.07	121.98	74.91	100.0	Z	183.0	19.9
0.037301	43.50	116.16	72.66	100.0	Z	209.0	19.9
0.220235	42.11	100.74	58.63	100.0	Z	0.0	19.8
0.373875	42.39	96.15	53.75	100.0	Z	308.0	19.9
0.883081	31.42	68.70	37.28	100.0	Z	52.0	19.9
4.359728	28.33	69.50	41.17	100.0	Z	218.0	20.1
19.196934	27.43	69.50	42.07	100.0	Z	128.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Magnetic Wireless Charger
Model:	W750
Test Mode:	Standby
Order No/Sample No:	27200048/A004192512-011
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

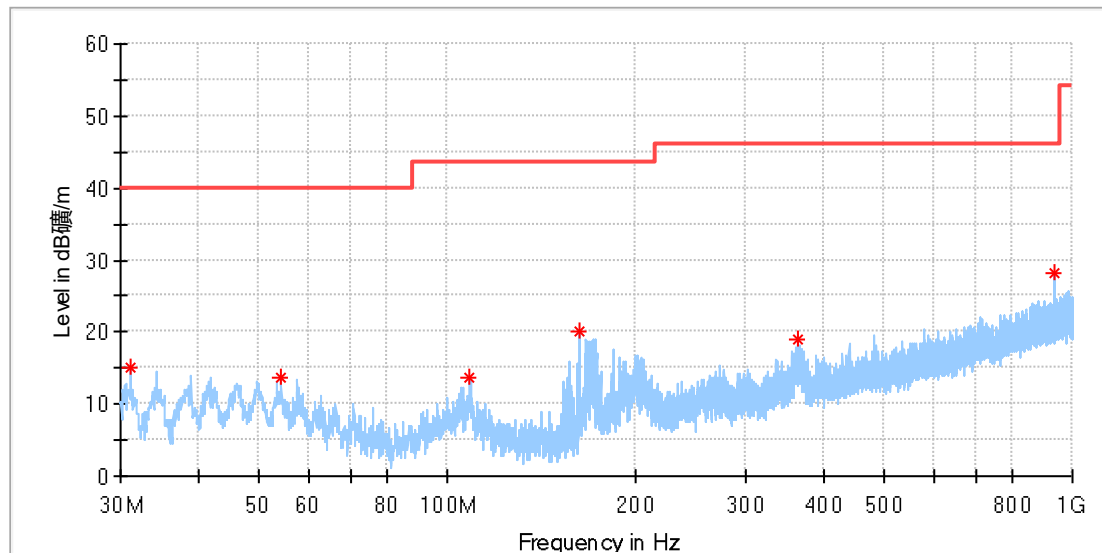

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.185556	15.12	40.00	24.88	100.0	H	129.0	-22.8
54.196111	13.61	40.00	26.39	100.0	H	159.0	-18.5
108.785556	13.72	43.50	29.78	100.0	H	45.0	-19.1
162.351111	19.99	43.50	23.51	100.0	H	356.0	-21.7
364.326667	19.09	46.00	26.91	100.0	H	305.0	-14.5
938.458889	28.07	46.00	17.93	100.0	H	0.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Charger
Model: W750
Test Mode: Standby
Order No/Sample No: 27200048/A004192512-011
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

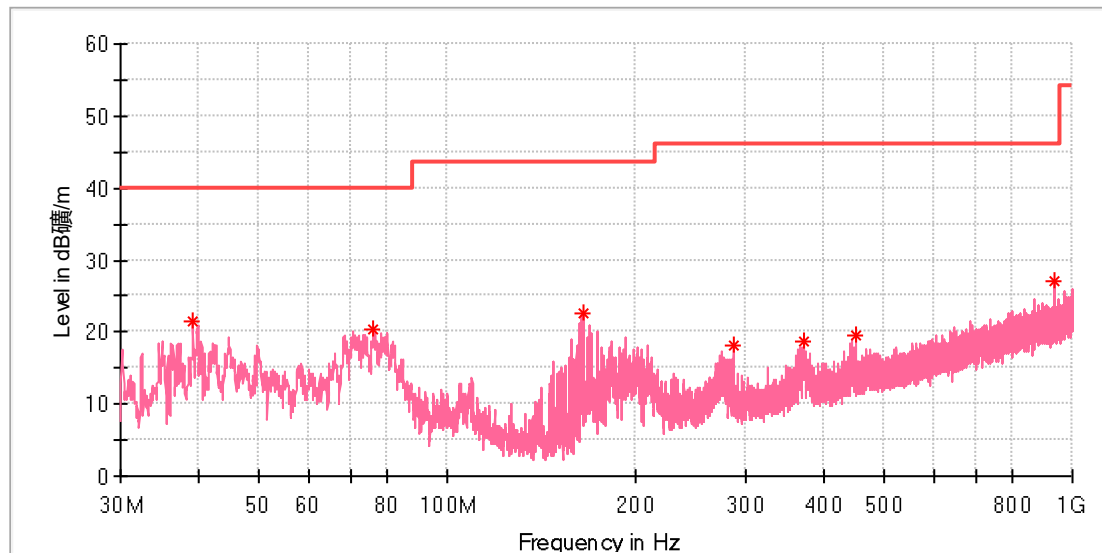

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.107222	21.54	40.00	18.46	100.0	V	259.0	-20.5
75.967222	20.27	40.00	19.73	100.0	V	231.0	-23.5
164.776111	22.59	43.50	20.91	100.0	V	288.0	-21.6
286.241667	18.03	46.00	27.97	100.0	V	231.0	-16.6
372.787222	18.57	46.00	27.43	100.0	V	103.0	-14.4
450.602778	19.61	46.00	26.39	100.0	V	157.0	-12.8
938.405000	26.96	46.00	19.04	100.0	V	325.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: Magnetic Wireless Charger
Order Number: 27200048(P02182755)
Model: W750
Test Mode: Wireless Charging only, MPP, 25W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15C
Test By:/Review By: Soloman Wu / Charlie Zha
Tem./Hum./Pressure: 24.0°C/52.1%/101kPa
Remark: SR3

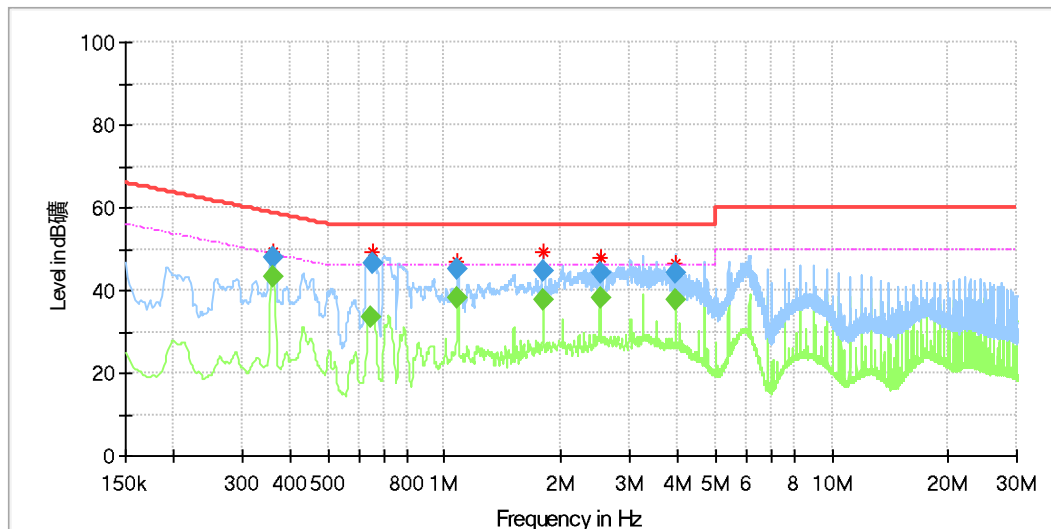

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.36	49.50	---	58.75	9.25	L1	10.25
0.36	---	43.36	48.75	5.39	L1	10.25
0.65	---	34.09	46.00	11.91	L1	10.27
0.65	49.51	---	56.00	6.49	L1	10.27
1.08	---	38.48	46.00	7.52	L1	10.28
1.08	47.03	---	56.00	8.97	L1	10.28
1.80	49.11	---	56.00	6.89	L1	10.30
1.80	---	37.84	46.00	8.16	L1	10.30
2.52	47.96	---	56.00	8.04	L1	10.32
2.52	---	38.10	46.00	7.90	L1	10.32
3.96	---	38.07	46.00	7.93	L1	10.35
3.96	46.38	---	56.00	9.62	L1	10.35


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.36	---	43.22	48.68	5.46	1000.00	9.00	L1	10.25
0.36	48.01	---	58.68	10.68	1000.00	9.00	L1	10.25
0.65	---	33.63	46.00	12.37	1000.00	9.00	L1	10.27
0.65	46.71	---	56.00	9.29	1000.00	9.00	L1	10.27
1.08	---	38.36	46.00	7.65	1000.00	9.00	L1	10.28
1.08	45.05	---	56.00	10.95	1000.00	9.00	L1	10.28
1.80	44.45	---	56.00	11.55	1000.00	9.00	L1	10.30
1.80	---	37.56	46.00	8.44	1000.00	9.00	L1	10.30
2.52	44.37	---	56.00	11.63	1000.00	9.00	L1	10.32

2.52	---	37.91	46.00	8.09	1000.00	9.00	L1	10.32
3.96	---	37.54	46.00	8.46	1000.00	9.00	L1	10.35
3.96	44.10	---	56.00	11.90	1000.00	9.00	L1	10.35

EUT Information

EUT Name: Magnetic Wireless Charger
Order Number: 27200048(P02182755)
Model: W750
Test Mode: Wireless Charging only, MPP, 25W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15C
Test By:/Review By: Solomon Wu / Charlie Zha
Tem./Hum./Pressure: 24.0°C/52.1%/101kPa
Remark: SR3

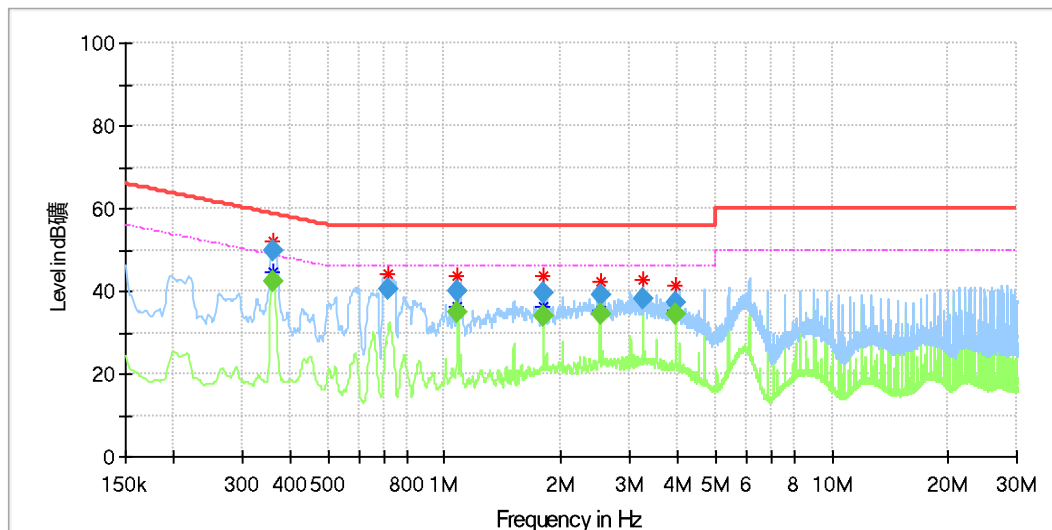

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.36	---	44.48	48.75	4.27	N	10.26
0.36	51.95	---	58.75	6.80	N	10.26
0.72	44.26	---	56.00	11.74	N	10.29
1.08	---	36.38	46.00	9.62	N	10.29
1.08	43.86	---	56.00	12.14	N	10.29
1.80	---	36.08	46.00	9.92	N	10.31
1.80	43.57	---	56.00	12.43	N	10.31
2.52	---	35.54	46.00	10.46	N	10.32
2.52	42.50	---	56.00	13.50	N	10.32
3.24	42.89	---	56.00	13.11	N	10.36
3.96	41.57	---	56.00	14.43	N	10.38
3.96	---	35.45	46.00	10.55	N	10.38

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.36	---	42.18	48.68	6.51	1000.00	9.00	N	10.26
0.36	49.94	---	58.68	8.75	1000.00	9.00	N	10.26
0.72	40.58	---	56.00	15.42	1000.00	9.00	N	10.29
1.08	---	35.09	46.00	10.91	1000.00	9.00	N	10.29
1.08	40.03	---	56.00	15.97	1000.00	9.00	N	10.29
1.80	---	33.95	46.00	12.05	1000.00	9.00	N	10.31
1.80	39.62	---	56.00	16.38	1000.00	9.00	N	10.31
2.52	---	34.63	46.00	11.37	1000.00	9.00	N	10.32
2.52	38.98	---	56.00	17.02	1000.00	9.00	N	10.32
3.24	38.24	---	56.00	17.76	1000.00	9.00	N	10.36
3.96	37.16	---	56.00	18.84	1000.00	9.00	N	10.38
3.96	---	34.30	46.00	11.70	1000.00	9.00	N	10.38