

Prüfbericht-Nr.: Test report no.:	CN2653KM 001	Auftrags-Nr.: Order no.:	168589046	Seite 1 von 16 Page 1 of 16	
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-12-15		
Auftraggeber: Client:	Ugreen Group Limited UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, 518000, China				
Prüfgegenstand: Test item:	2-in-1 Wireless Charger				
Bezeichnung / Typ-Nr.: Identification / Type no.:	W751				
Auftrags-Inhalt: Order content:	Test Report				
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209				
Wareneingangsdatum: Date of sample receipt:	2025-12-18	Please refer to Photo Document			
Prüfmuster-Nr.: Test sample no.:	A004163871-001~020				
Prüfzeitraum: Testing period:	2026-01-07 - 2026-01-14				
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: Test result*:	Pass				
geprüft von: tested by:			genehmigt von: authorized by:		
Datum: Date:	2026-01-27	Signed by: Lin Lin		Ausstellungsdatum: Issue date:	2026-01-27
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / Other:	FCC ID: 2AQI5-W751				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged				
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht-Nr.: CN2653KM 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN2653KM 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2025-10-30	2026-10-29
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2025-10-30	2026-10-29
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Prüfbericht - Nr.: CN2653KM 001
Test Report No.:Seite 7 von 16
Page 7 of 16

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2026-02-09
Artificial Mains Network	R&S	ENV216	102333	2026-07-18
Artificial Mains Network	R&S	ENV216	101445	2026-02-09
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 2-in-1 Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	2-in-1 Wireless Charger
Type Designation:	W751 Note: The W751 has two appearance colors, they are only difference in appearance color, and the other electronic and electrical parts are the same.
Product Number (P/N) code:	95748, 95748P, 95748X, 95748A, 95748B, 95748U, 95748JP, 95748ZD, 95748T, 85400, 85400P, 85400X, 85400A, 85400B, 85400U, 85400JP, 85400ZD, 85400T
FCC ID:	2AQI5-W751
Operating Voltage:	USB-C1(IN) Input: 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3.0A Wireless Charging Output Power: iPhone 25.0W Max, AirPods 5.0 Max Wireless Charging Total Output Power: 30W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Wireless charging output power:	Magnetic Wireless Charger: 5W / 7.5W / 10W / 15W / 25W Max. True Wireless Stereo (TWS) Wireless Charging: 5W Max.
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 360 kHz
Operating Frequency:	110.5 – 148.5 kHz & 360 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	5W / 7.5W / 10W / 15W / 25W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, MPP, 15W (Phone)
- E. On, Wireless Charging, MPP, 25W (Phone)
- F. On, Wireless Charging, 5W TWS
- G. On, Co-location mode (Worst case mode A~E + mode F)
- H. On, Standby mode
- I. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W751 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Digital Multimeter	Fluke	18B+	N/A
Wireless charge Load	YBZ	YBZ-MPP25	N/A
Smart Phone	Apple	iPhone16 Plus	N/A
Earphone	JBL	TWS Earbuds	N/A
Earphone	Apple	AirPods Pro2	N/A
AC/DC Adapter	Ugreen	W0452	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

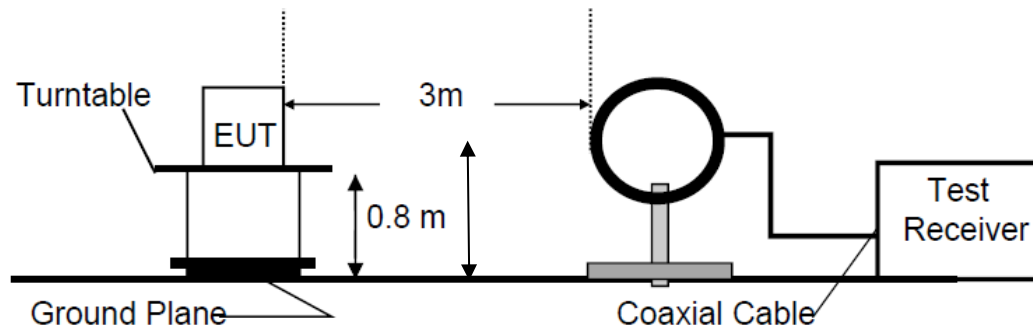


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


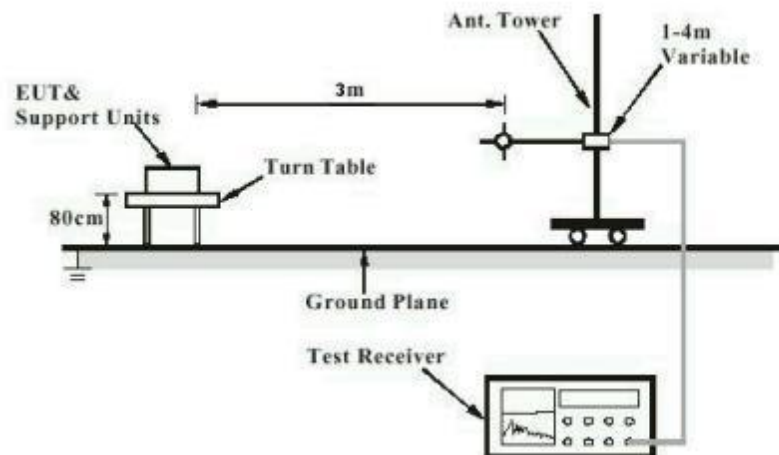


Diagram of Measurement Configuration for Mains Conduction Measurement

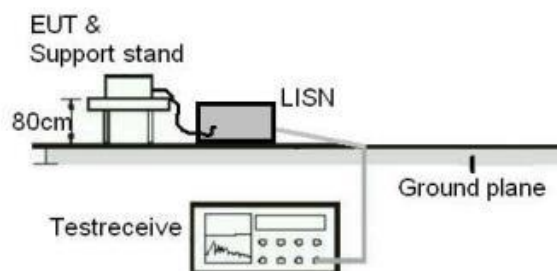

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN2653KM 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-01-09 to 2026-01-10
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, H
Ambient temperature	: 23 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2653KM 001
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10: 2020
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2026-01-09 to 2026-01-12
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H
Ambient temperature	: 23 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2653KM 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-01-07 to 2026-01-14
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (7.5W).....	2
Wireless charging (10W).....	3
Wireless charging (25W).....	4
Wireless charging (TWS 5W)	5
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	6
Wireless charging (7.5W).....	6
Wireless charging (10W).....	17
Wireless charging (25W).....	28
Wireless charging (TWS 5W)	39
Wireless charging (Co-location).....	50
Standby mode	55
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	60

Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (7.5W)

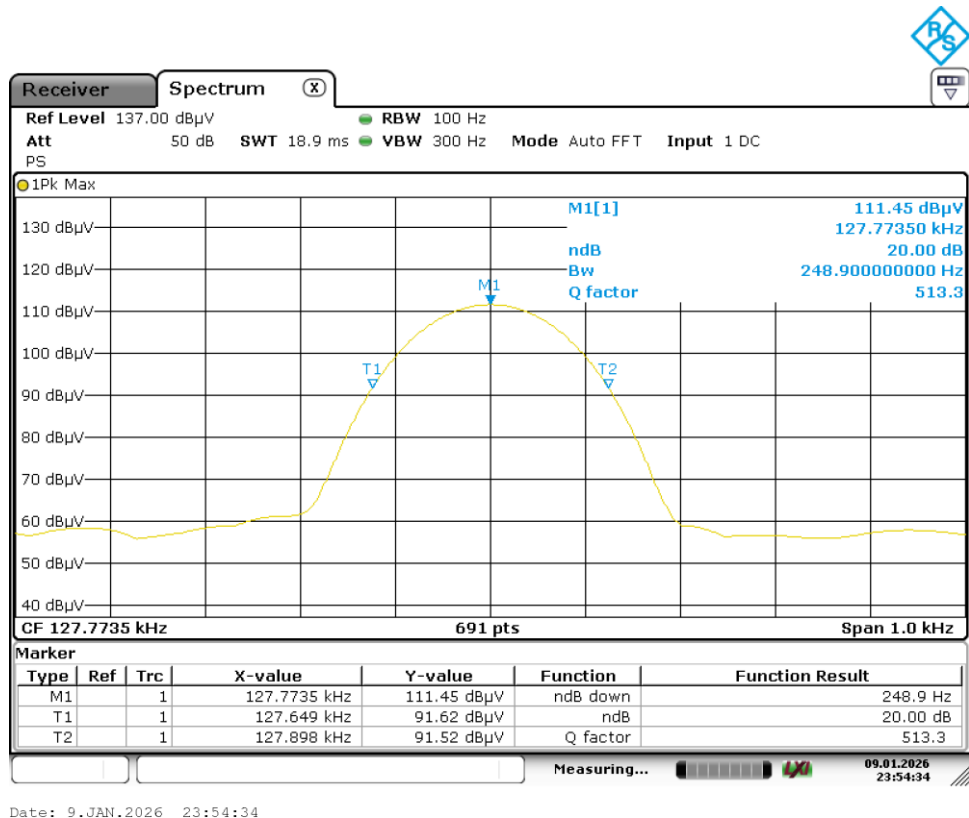


Wireless charging (10W)

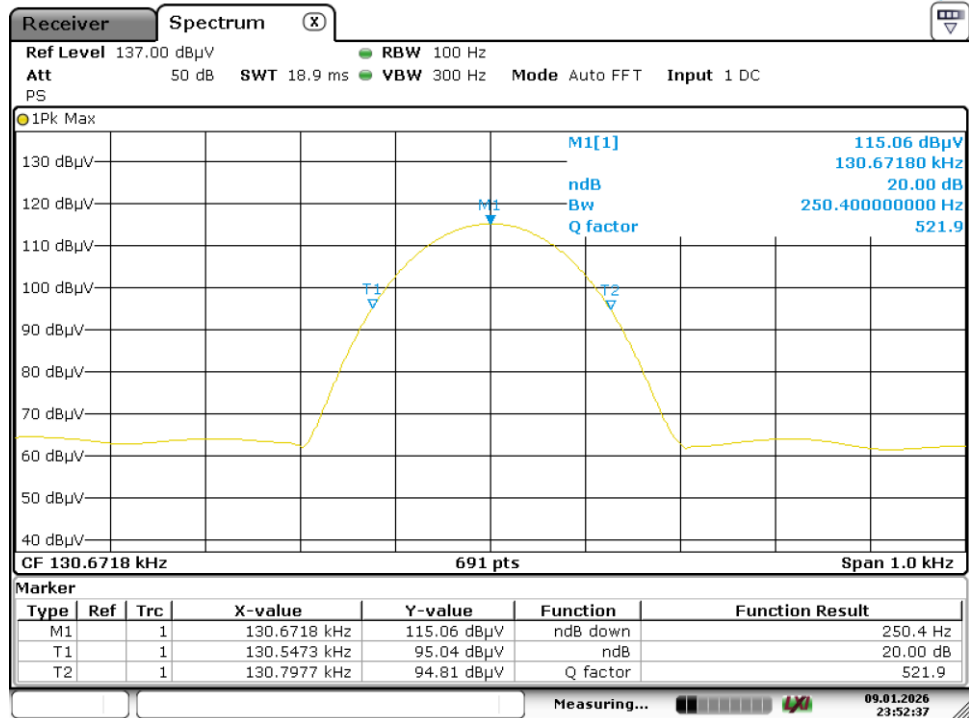


Date: 9.JAN.2026 23:52:37

Wireless charging (25W)

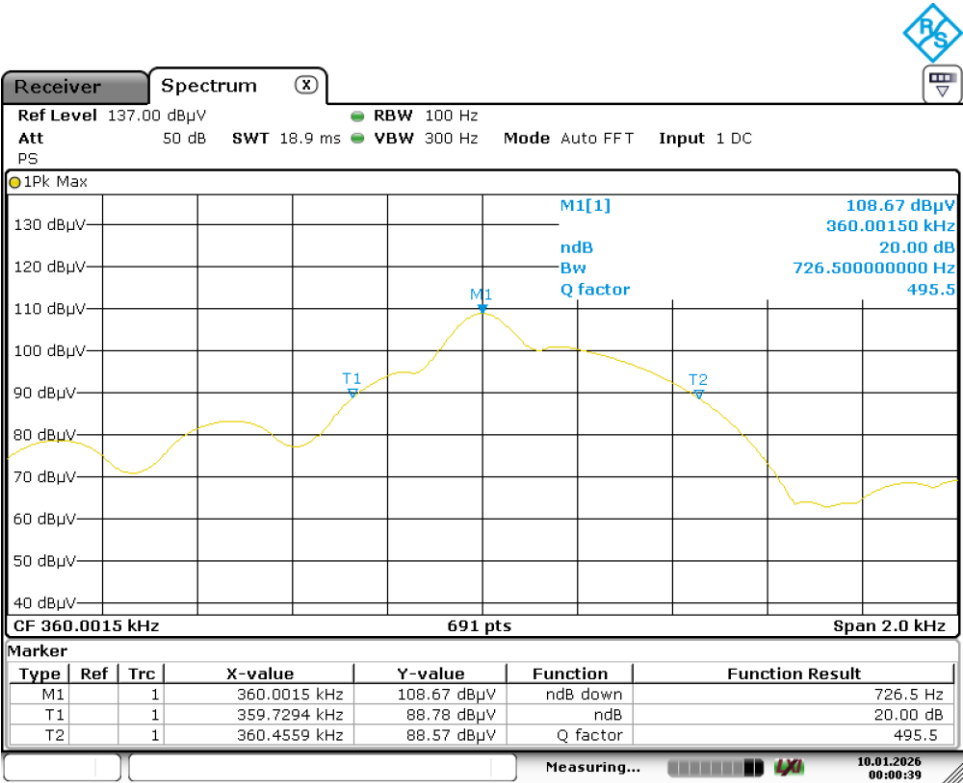

Wireless charging (TWS 5W)

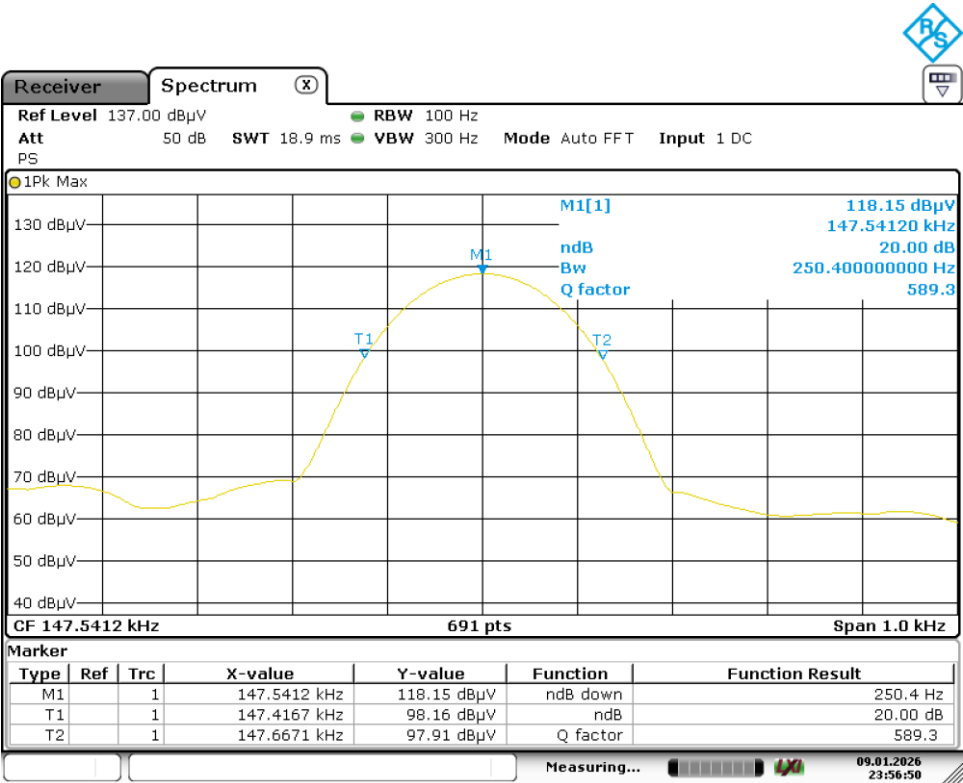


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (7.5W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W751
Test Mode:	Charging
Order No/Sample No:	168589046/A004163871-010
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

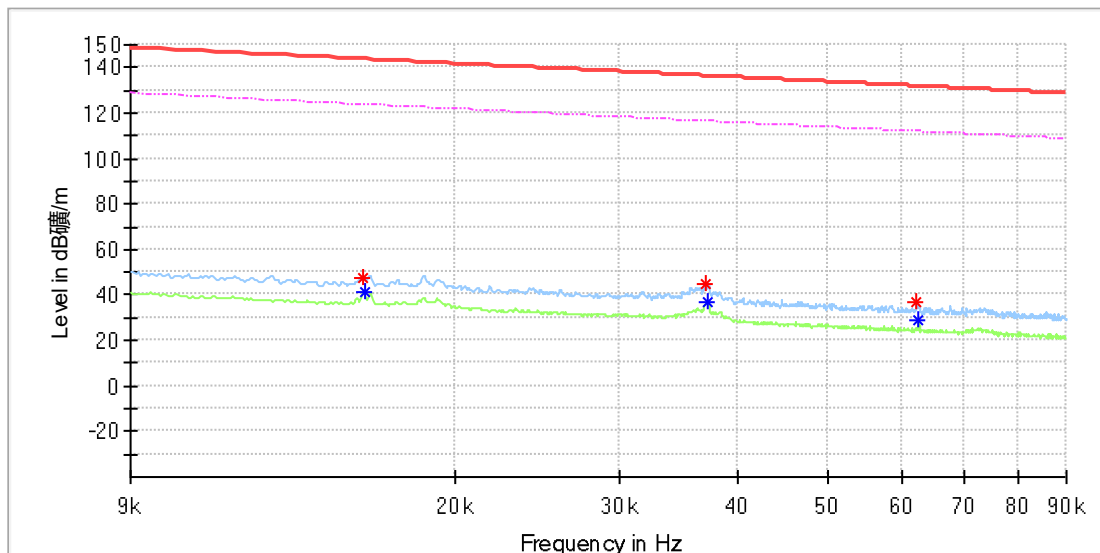


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015943	47.82	---	143.54	95.71	100.0	X	97.0	20.0
0.016001	---	41.53	123.51	81.97	100.0	X	97.0	20.0
0.037003	44.78	---	136.23	91.45	100.0	X	40.0	20.0
0.037292	---	36.70	116.16	79.46	100.0	X	74.0	20.0
0.062229	36.75	---	131.71	94.96	100.0	X	1.0	20.0
0.062576	---	29.10	111.67	82.57	100.0	X	1.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

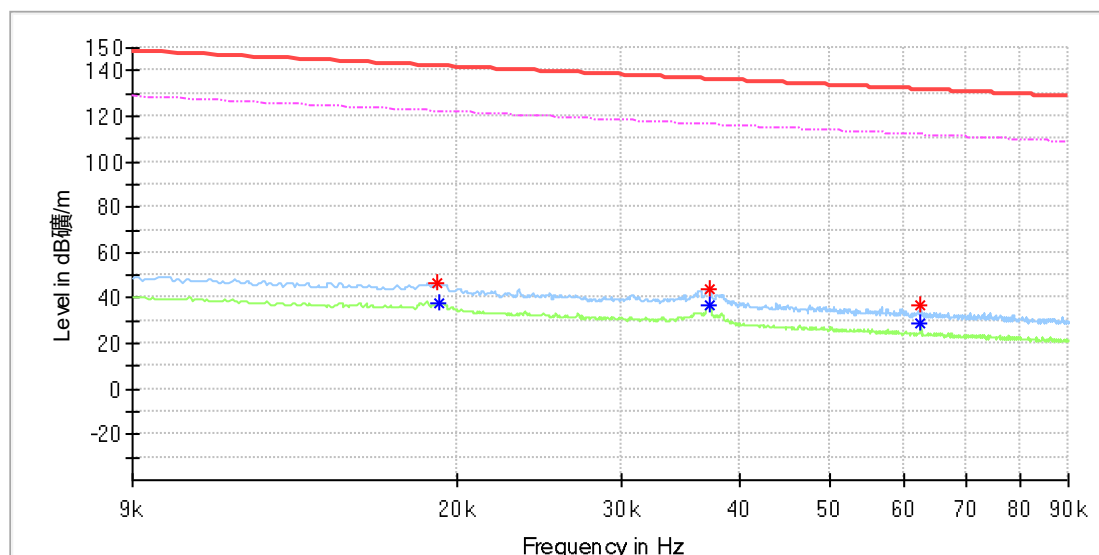


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019067	46.52	---	141.98	95.46	100.0	Y	321.0	20.0
0.019183	---	38.12	121.93	83.81	100.0	Y	159.0	20.0
0.037234	---	37.09	116.17	79.09	100.0	Y	200.0	20.0
0.037234	43.85	---	136.17	92.32	100.0	Y	200.0	20.0
0.062576	36.56	---	131.67	95.11	100.0	Y	117.0	20.0
0.062576	---	28.81	111.67	82.86	100.0	Y	117.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

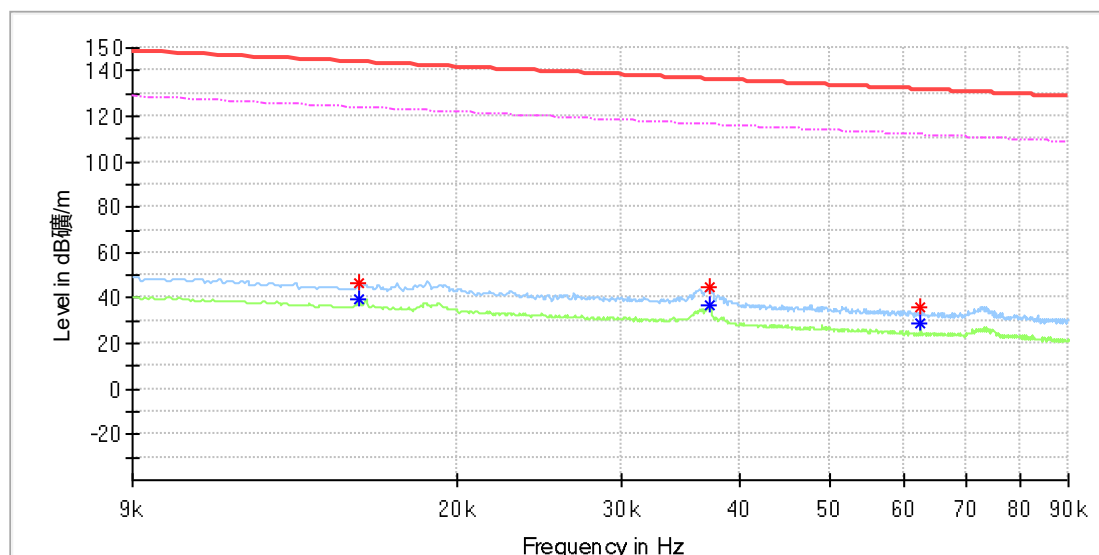


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	46.32	---	143.66	97.35	100.0	Z	323.0	20.0
0.015711	---	39.71	123.66	83.95	100.0	Z	323.0	20.0
0.037292	---	37.02	116.16	79.14	100.0	Z	0.0	20.0
0.037292	44.77	---	136.16	91.39	100.0	Z	0.0	20.0
0.062518	36.15	---	131.67	95.53	100.0	Z	153.0	20.0
0.062518	---	28.85	111.67	82.82	100.0	Z	153.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

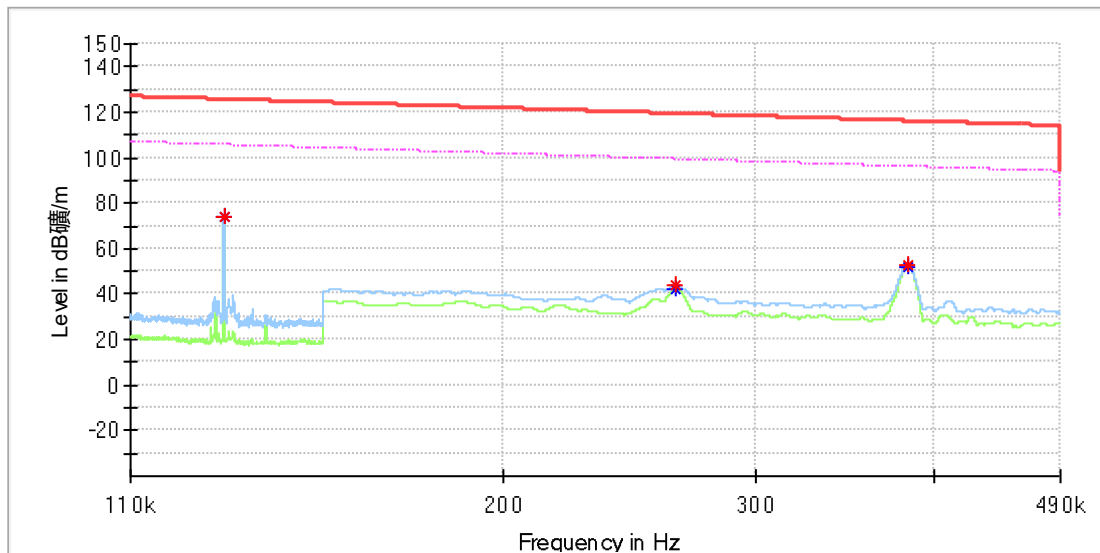


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	74.08	105.47	31.39	100.0	X	6.0	20.0
0.127772	74.16	---	125.47	51.31	100.0	X	6.0	20.0
0.264200	44.09	---	119.16	75.07	100.0	X	220.0	20.0
0.264200	---	42.08	99.16	57.08	100.0	X	220.0	20.0
0.383300	52.76	---	115.93	63.17	100.0	X	9.0	20.0
0.383350	---	52.18	95.93	43.75	100.0	X	9.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

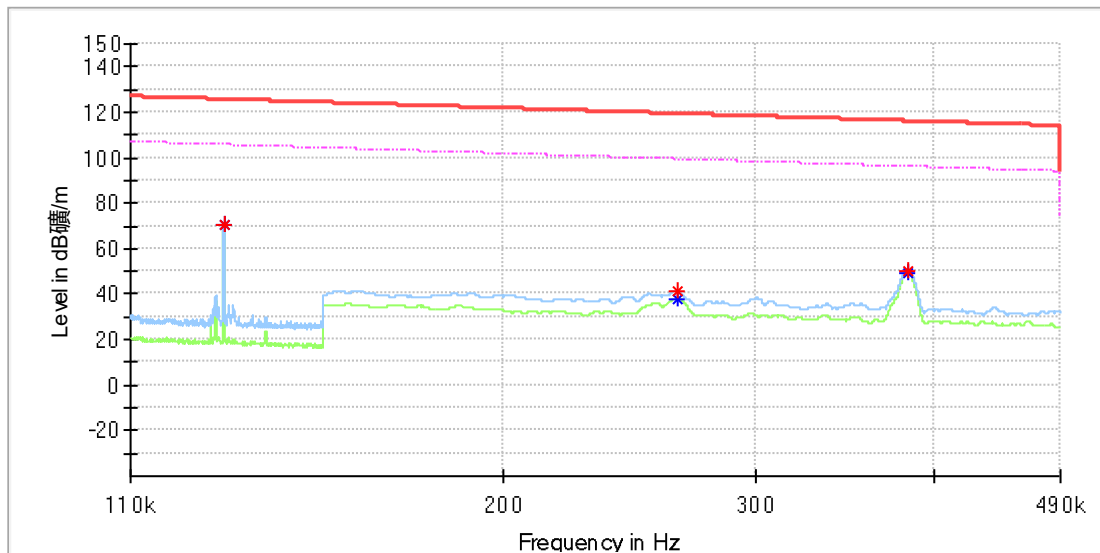


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	70.82	105.47	34.65	100.0	Y	89.0	20.0
0.127772	70.87	---	125.47	54.60	100.0	Y	89.0	20.0
0.264500	41.63	---	119.15	77.52	100.0	Y	118.0	20.0
0.264650	---	38.20	99.15	60.95	100.0	Y	118.0	20.0
0.383350	50.22	---	115.93	65.71	100.0	Y	89.0	20.0
0.383400	---	49.39	95.93	46.54	100.0	Y	89.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

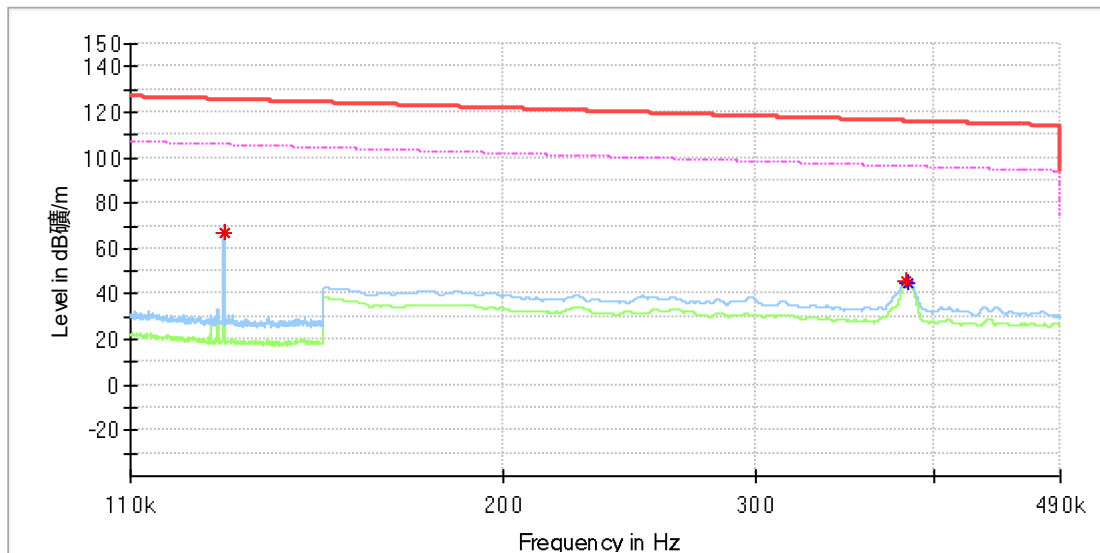


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	66.65	105.47	38.82	100.0	Z	13.0	20.0
0.127772	66.71	---	125.47	58.76	100.0	Z	13.0	20.0
0.383000	46.06	---	115.94	69.88	100.0	Z	1.0	20.0
0.383400	---	44.97	95.93	50.96	100.0	Z	1.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

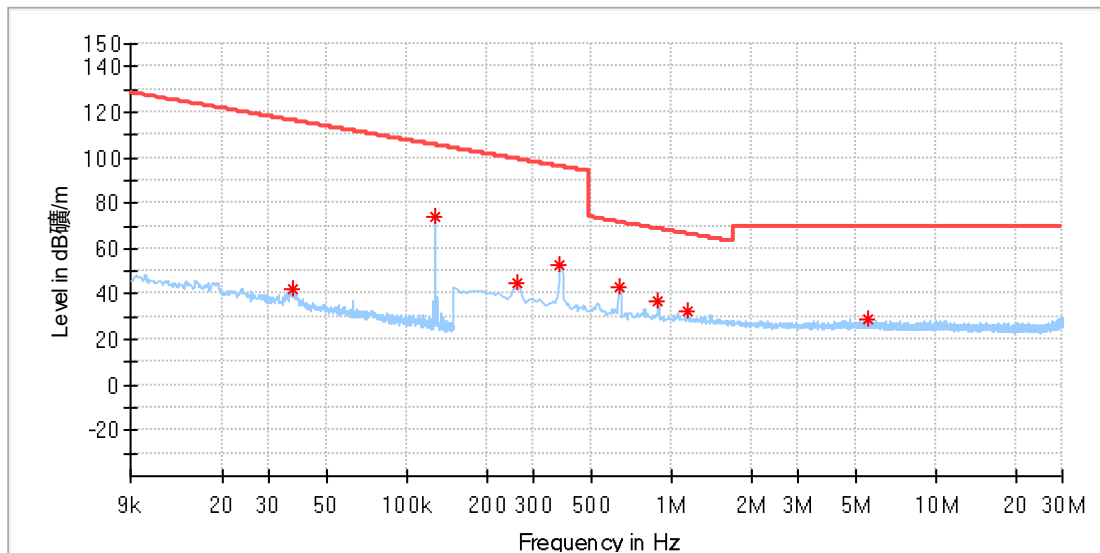

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	42.31	116.23	73.92	100.0	X	122.0	19.9
0.127843	74.00	105.46	31.47	100.0	X	0.0	19.9
0.259743	44.45	99.31	54.86	100.0	X	215.0	19.9
0.378265	52.54	96.05	43.51	100.0	X	8.0	19.9
0.637258	43.07	71.52	28.45	100.0	X	4.0	19.9
0.891860	37.17	68.61	31.44	100.0	X	165.0	19.9
1.146463	32.58	66.44	33.85	100.0	X	147.0	19.9
5.527390	28.65	69.50	40.85	100.0	X	175.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

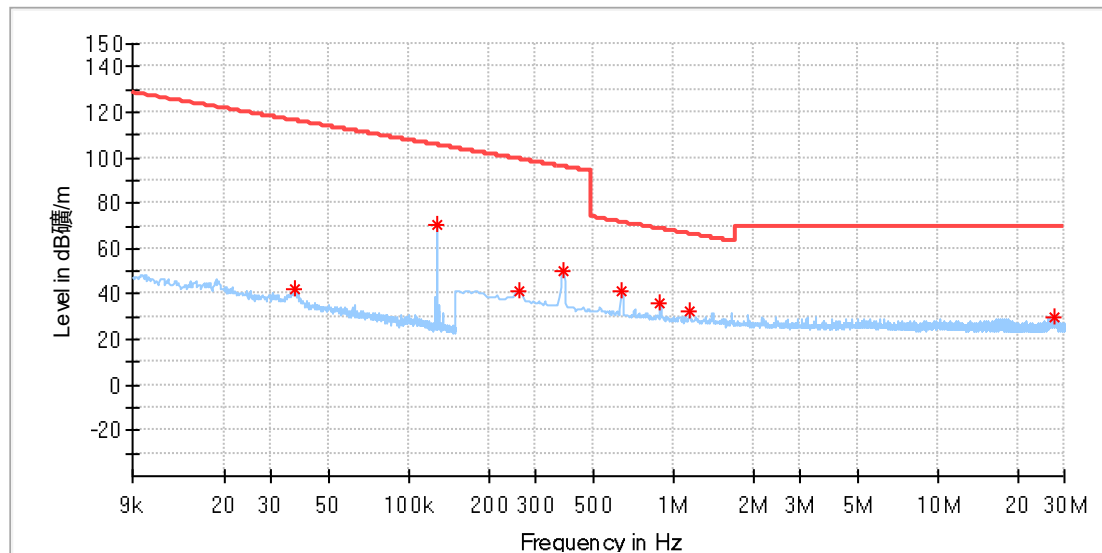

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037200	42.54	116.18	73.64	100.0	Y	40.0	19.9
0.127843	70.76	105.46	34.70	100.0	Y	89.0	19.9
0.259743	41.47	99.31	57.84	100.0	Y	297.0	19.9
0.382655	50.08	95.95	45.87	100.0	Y	103.0	19.9
0.637258	40.94	71.52	30.58	100.0	Y	89.0	19.9
0.891860	35.56	68.61	33.05	100.0	Y	99.0	19.9
1.150853	32.81	66.40	33.59	100.0	Y	99.0	19.9
27.664677	30.04	69.50	39.46	100.0	Y	146.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

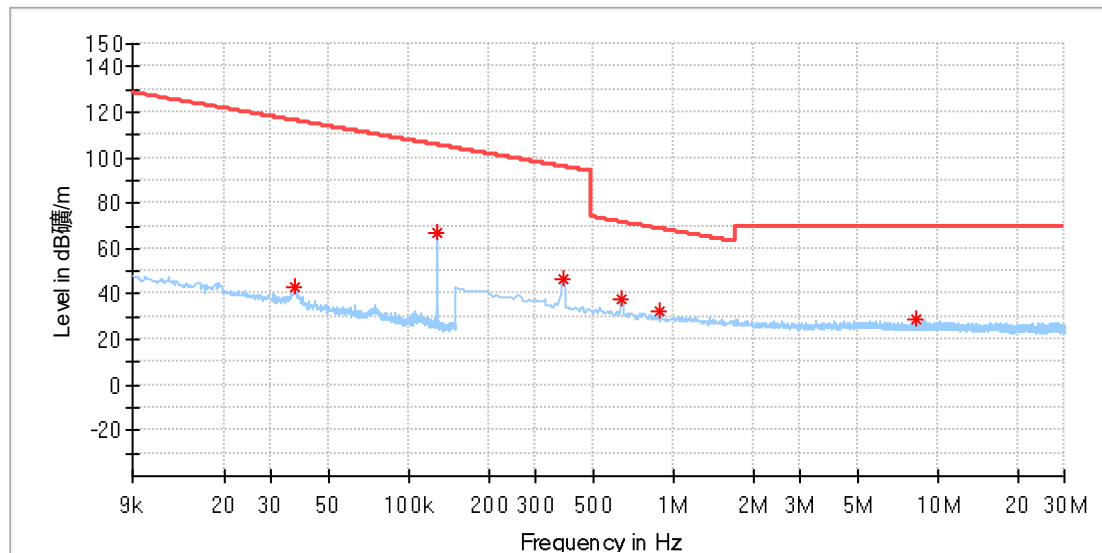

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	43.17	116.25	73.08	100.0	Z	347.0	19.9
0.127843	66.53	105.46	38.94	100.0	Z	17.0	19.9
0.382655	46.22	95.95	49.73	100.0	Z	9.0	19.9
0.637258	37.57	71.52	33.96	100.0	Z	0.0	19.9
0.891860	32.55	68.61	36.07	100.0	Z	12.0	19.9
8.231449	28.88	69.50	40.62	100.0	Z	283.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

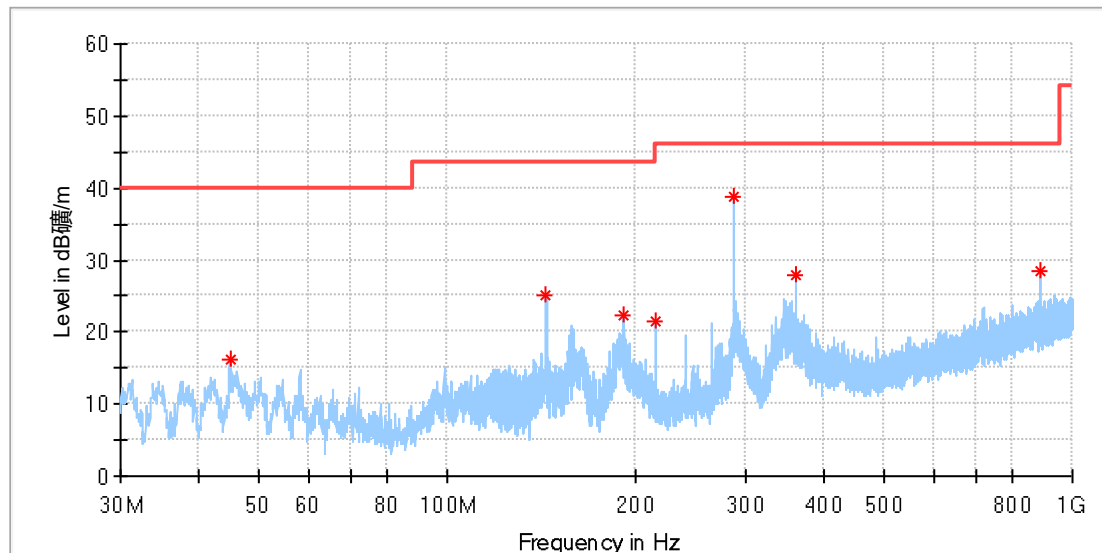

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.873333	16.31	40.00	23.69	100.0	H	111.0	-19.0
143.975000	25.13	43.50	18.37	100.0	H	7.0	-22.4
191.990000	22.39	43.50	21.11	100.0	H	32.0	-19.5
216.024444	21.40	46.00	24.60	100.0	H	224.0	-18.7
288.020000	38.87	46.00	7.13	100.0	H	224.0	-16.6
360.015556	27.99	46.00	18.01	100.0	H	232.0	-14.6
890.982778	28.49	46.00	17.51	100.0	H	24.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

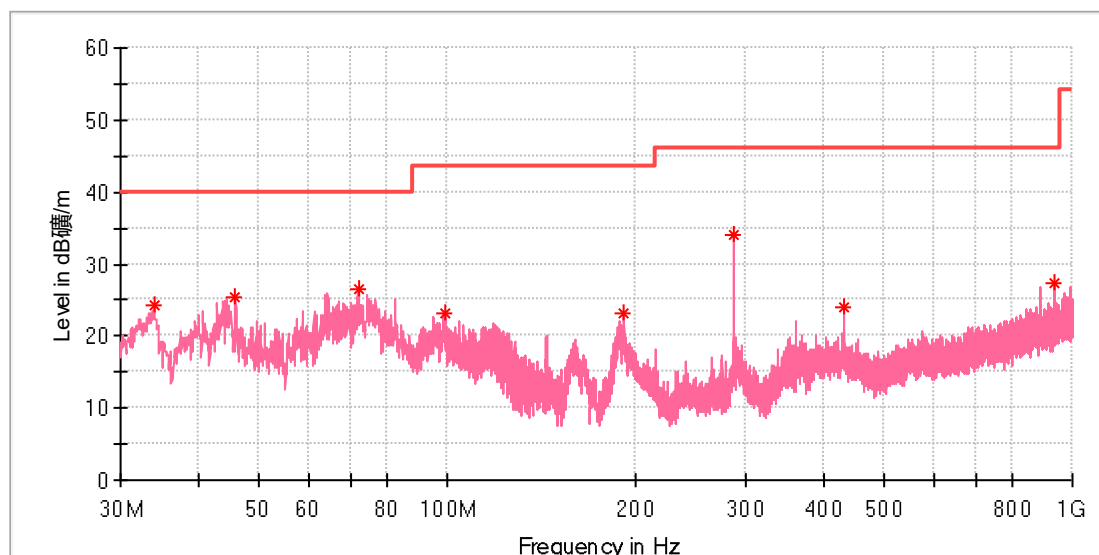

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.933889	24.23	40.00	15.77	100.0	V	103.0	-22.3
45.843333	25.32	40.00	14.68	100.0	V	306.0	-18.8
71.979444	26.56	40.00	13.44	100.0	V	31.0	-22.6
98.870000	23.03	43.50	20.47	100.0	V	209.0	-19.3
191.990000	23.08	43.50	20.42	100.0	V	246.0	-19.5
288.020000	33.96	46.00	12.04	100.0	V	328.0	-16.6
432.011111	23.99	46.00	22.01	100.0	V	351.0	-13.1
938.458889	27.21	46.00	18.79	100.0	V	156.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (10W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W751
Test Mode:	Charging
Order No/Sample No:	168589046/A004163871-010
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

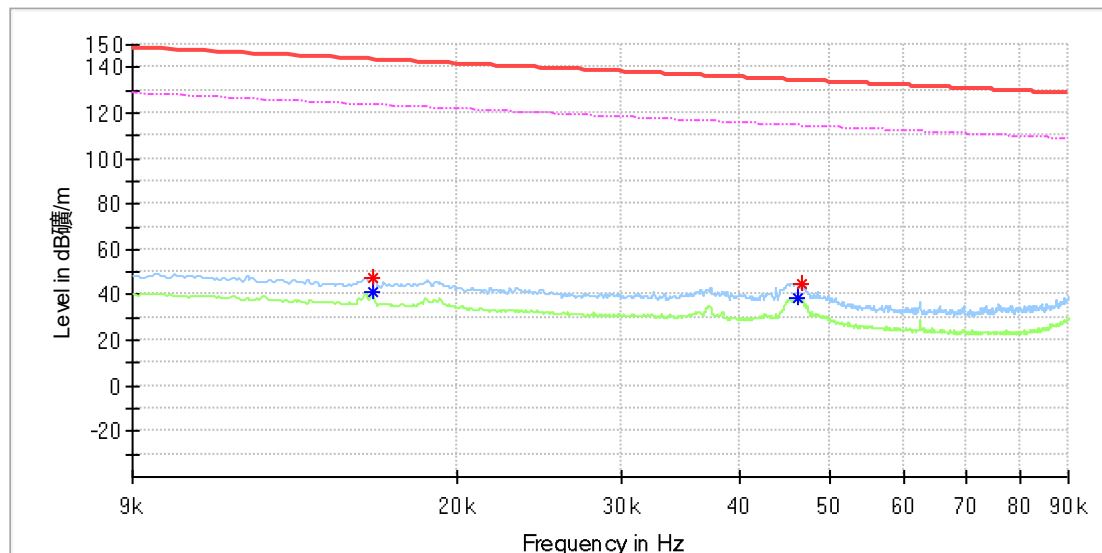


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016232	47.68	---	143.38	95.70	100.0	X	55.0	20.0
0.016232	---	41.18	123.38	82.20	100.0	X	55.0	20.0
0.046260	---	38.55	114.29	75.73	100.0	X	0.0	20.0
0.046781	45.28	---	134.19	88.91	100.0	X	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

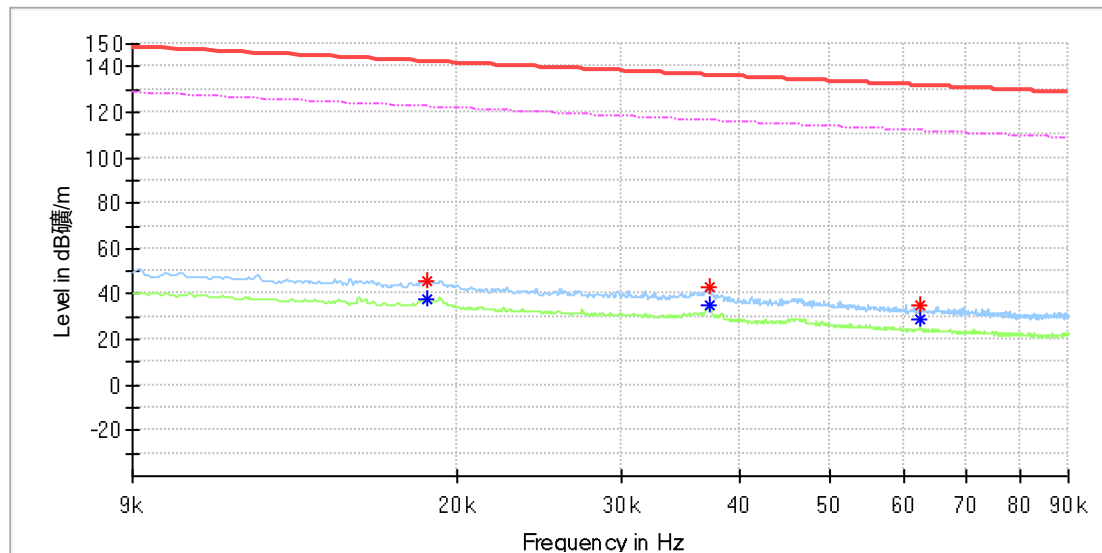


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018546	---	38.17	122.22	84.05	100.0	Y	306.0	20.0
0.018604	45.93	---	142.20	96.27	100.0	Y	306.0	20.0
0.037292	42.69	---	136.16	93.47	100.0	Y	164.0	20.0
0.037292	---	35.01	116.16	81.15	100.0	Y	164.0	20.0
0.062518	35.34	---	131.67	96.34	100.0	Y	280.0	20.0
0.062518	---	28.60	111.67	83.08	100.0	Y	280.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

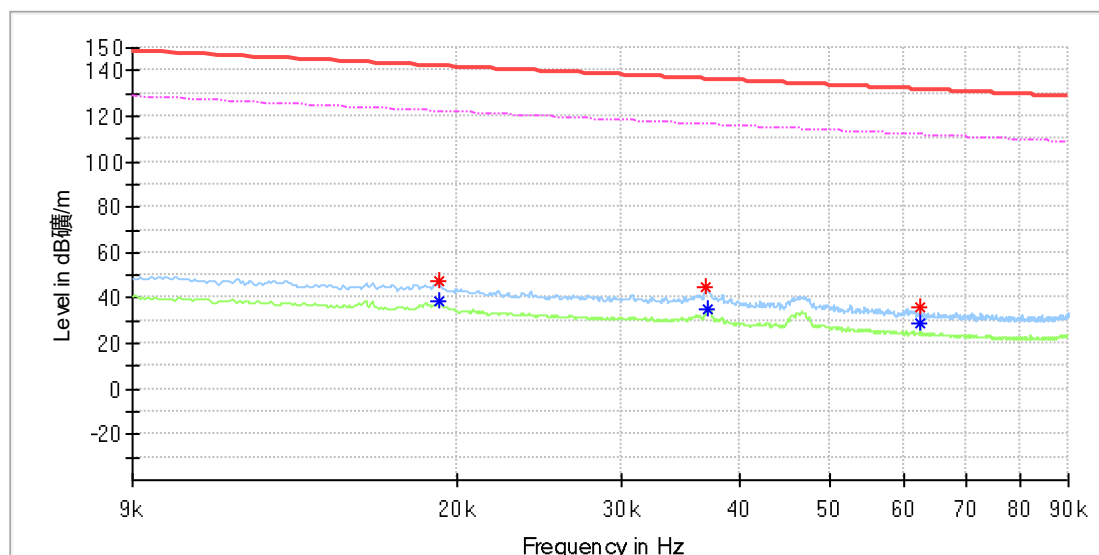


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	47.47	---	141.96	94.49	100.0	Z	174.0	20.0
0.019183	---	38.27	121.93	83.66	100.0	Z	128.0	20.0
0.036945	44.62	---	136.24	91.62	100.0	Z	72.0	20.0
0.037003	---	34.79	116.23	81.44	100.0	Z	72.0	20.0
0.062518	---	29.03	111.67	82.64	100.0	Z	229.0	20.0
0.062576	35.84	---	131.67	95.82	100.0	Z	284.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

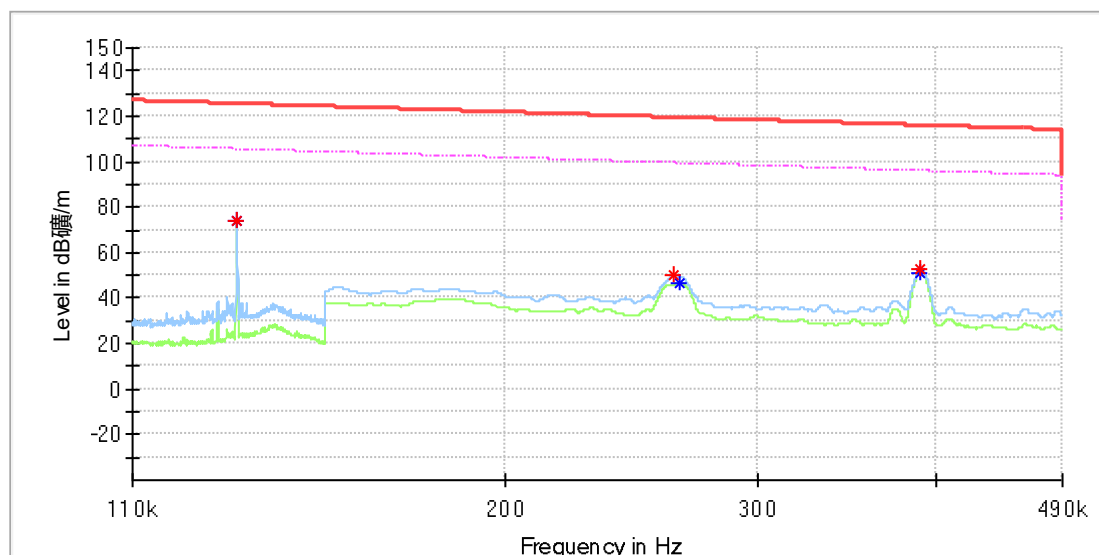


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130086	---	73.83	105.31	31.49	100.0	X	16.0	20.0
0.130086	73.89	---	125.31	51.43	100.0	X	16.0	20.0
0.262650	49.76	---	119.21	69.45	100.0	X	245.0	20.0
0.265100	---	46.92	99.13	52.21	100.0	X	238.0	20.0
0.390300	---	51.43	95.78	44.34	100.0	X	31.0	20.0
0.390400	52.37	---	115.77	63.40	100.0	X	31.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

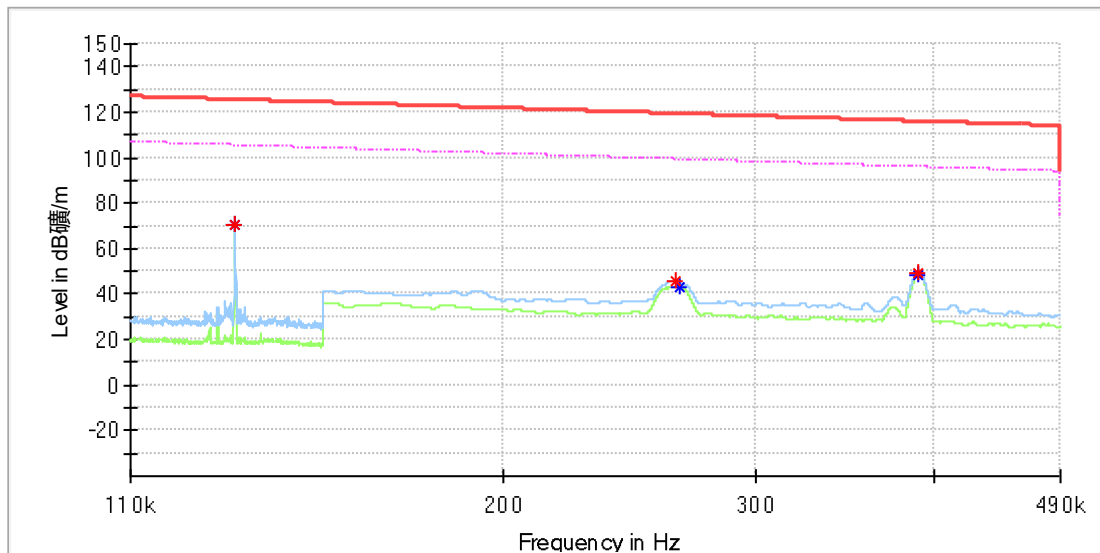


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130086	---	70.50	105.31	34.82	100.0	Y	95.0	20.0
0.130086	70.56	---	125.31	54.75	100.0	Y	95.0	20.0
0.263750	46.07	---	119.18	73.11	100.0	Y	136.0	20.0
0.265600	---	43.41	99.12	55.71	100.0	Y	131.0	20.0
0.390300	49.49	---	115.78	66.28	100.0	Y	103.0	20.0
0.390300	---	48.65	95.78	47.12	100.0	Y	103.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

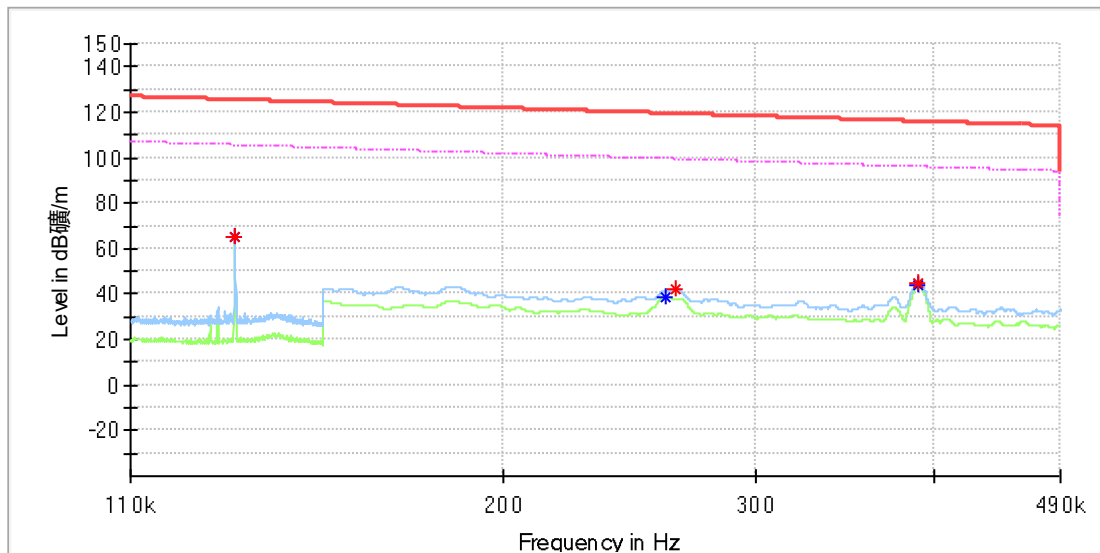


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130086	---	65.51	105.31	39.80	100.0	Z	19.0	20.0
0.130086	65.59	---	125.31	59.72	100.0	Z	19.0	20.0
0.259900	---	38.93	99.31	60.37	100.0	Z	289.0	20.0
0.264300	42.18	---	119.16	76.98	100.0	Z	240.0	20.0
0.390100	44.95	---	115.78	70.83	100.0	Z	0.0	20.0
0.390400	---	43.60	95.77	52.17	100.0	Z	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

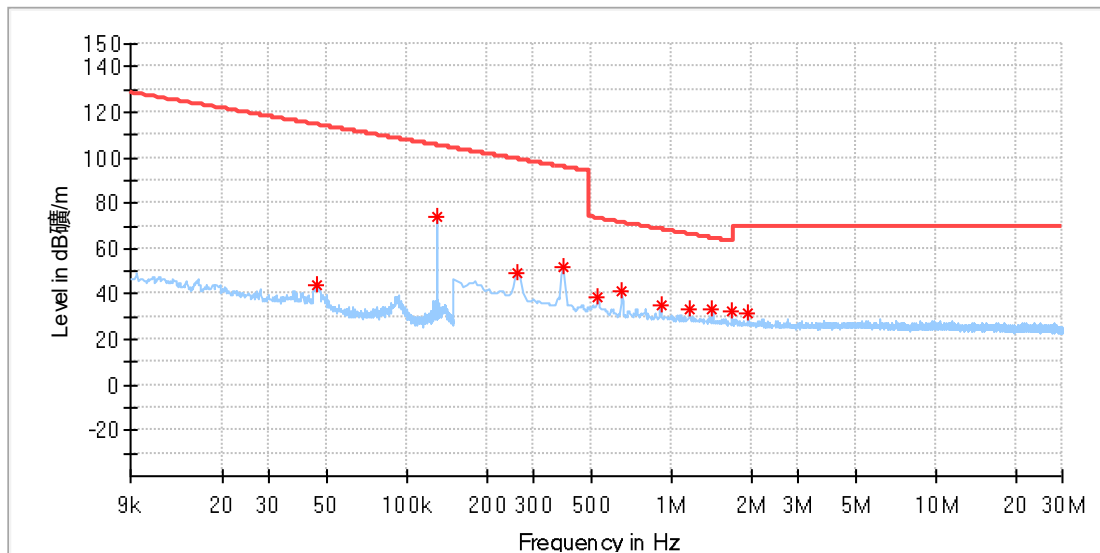

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.045660	44.39	114.40	70.01	100.0	X	152.0	19.9
0.130059	73.64	105.32	31.68	100.0	X	19.0	19.9
0.259743	49.41	99.31	49.90	100.0	X	244.0	19.9
0.387044	51.58	95.85	44.27	100.0	X	25.0	19.9
0.527515	38.49	73.16	34.68	100.0	X	21.0	19.9
0.646037	40.89	71.41	30.51	100.0	X	36.0	19.9
0.909419	35.34	68.44	33.11	100.0	X	101.0	19.9
1.168412	33.70	66.27	32.58	100.0	X	198.0	19.9
1.427405	33.28	64.54	31.26	100.0	X	359.0	19.9
1.690787	32.09	63.07	30.98	100.0	X	21.0	20.0
1.949780	31.84	69.50	37.66	100.0	X	8.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

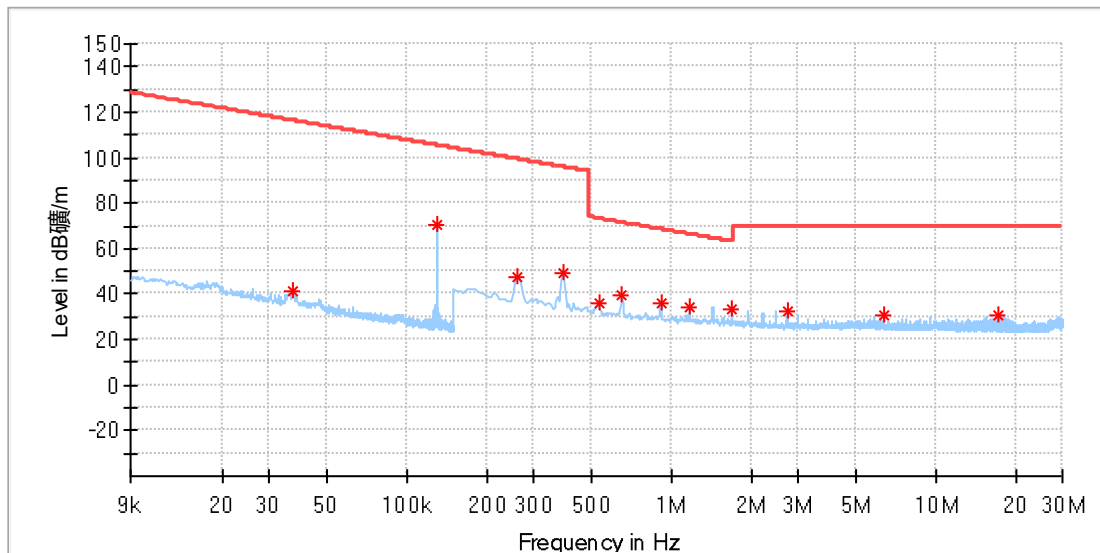

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037200	41.63	116.18	74.55	100.0	Y	246.0	19.9
0.130059	70.35	105.32	34.97	100.0	Y	94.0	19.9
0.259743	47.53	99.31	51.78	100.0	Y	149.0	19.9
0.387044	49.13	95.85	46.72	100.0	Y	124.0	19.9
0.531905	36.14	73.09	36.95	100.0	Y	149.0	19.9
0.650427	39.74	71.35	31.61	100.0	Y	153.0	19.9
0.909419	36.21	68.44	32.24	100.0	Y	120.0	19.9
1.168412	34.53	66.27	31.75	100.0	Y	135.0	19.9
1.690787	33.27	63.07	29.80	100.0	Y	90.0	20.0
2.731147	32.44	69.50	37.06	100.0	Y	11.0	20.0
6.374603	30.28	69.50	39.22	100.0	Y	79.0	20.1
17.300581	31.12	69.50	38.38	100.0	Y	189.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

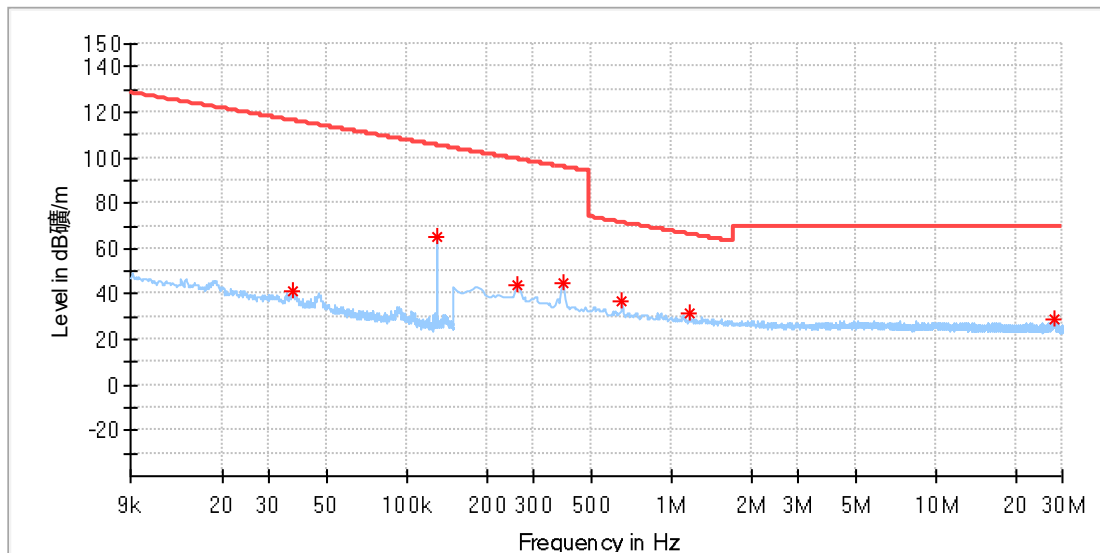

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037200	40.96	116.18	75.22	100.0	Z	129.0	19.9
0.130059	65.36	105.32	39.95	100.0	Z	21.0	19.9
0.259743	43.62	99.31	55.69	100.0	Z	249.0	19.9
0.387044	45.05	95.85	50.80	100.0	Z	20.0	19.9
0.646037	36.83	71.41	34.58	100.0	Z	61.0	19.9
1.172802	31.61	66.24	34.63	100.0	Z	333.0	19.9
27.778809	28.68	69.50	40.82	100.0	Z	343.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

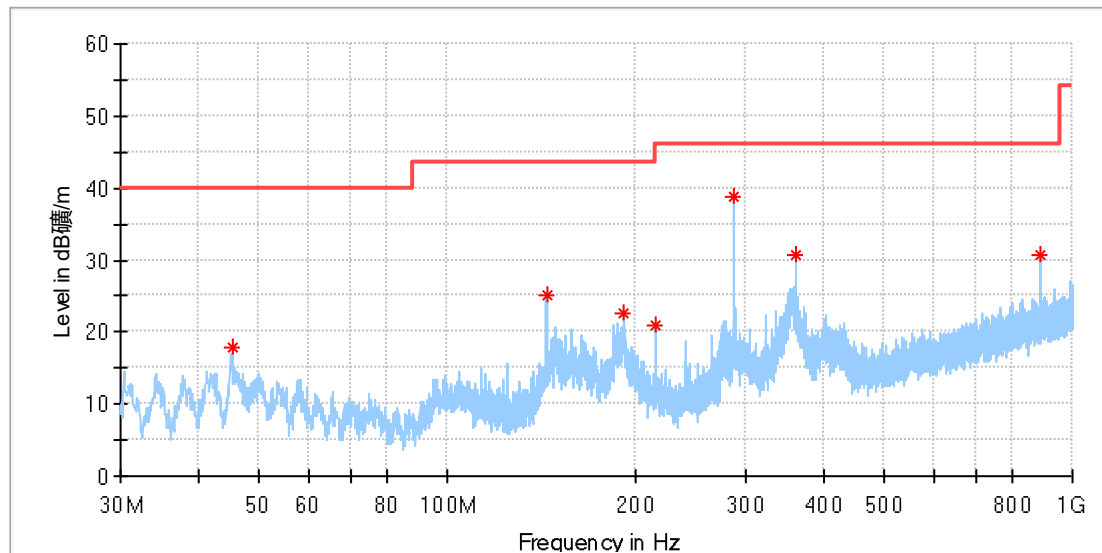

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.358333	17.79	40.00	22.21	100.0	H	35.0	-18.9
144.028889	25.10	43.50	18.40	100.0	H	76.0	-22.4
191.990000	22.60	43.50	20.90	100.0	H	76.0	-19.5
215.970556	21.00	43.50	22.50	100.0	H	158.0	-18.7
288.020000	38.66	46.00	7.34	100.0	H	240.0	-16.6
360.015556	30.82	46.00	15.18	100.0	H	196.0	-14.6
890.982778	30.66	46.00	15.34	100.0	H	115.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

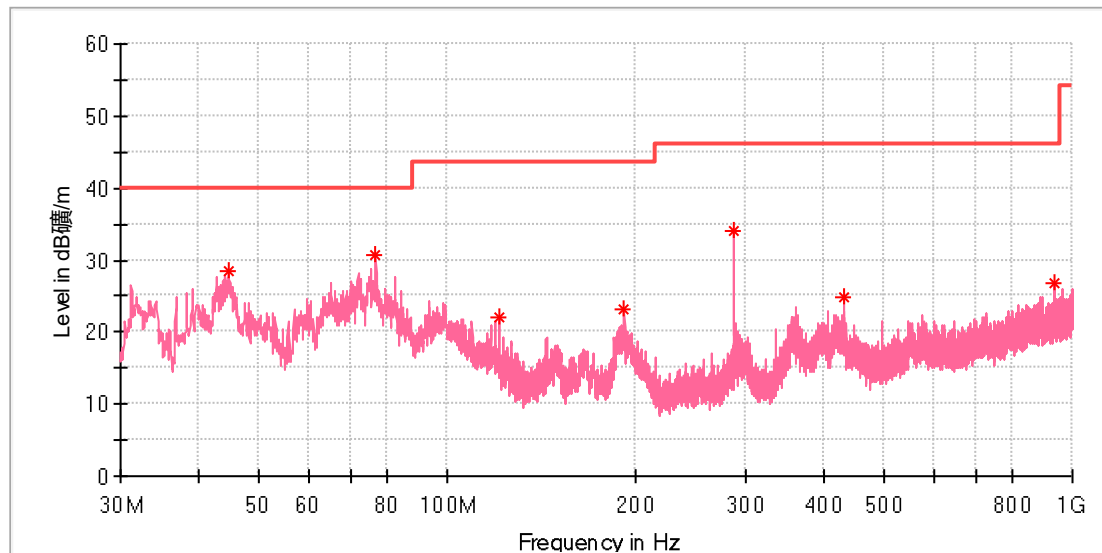

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.657778	28.40	40.00	11.60	100.0	V	225.0	-19.0
76.883333	30.65	40.00	9.35	100.0	V	359.0	-23.5
120.748889	22.18	43.50	21.32	100.0	V	311.0	-21.0
191.990000	23.22	43.50	20.28	100.0	V	255.0	-19.5
288.020000	33.92	46.00	12.08	100.0	V	263.0	-16.6
432.011111	24.70	46.00	21.30	100.0	V	149.0	-13.1
936.950000	26.75	46.00	19.25	100.0	V	79.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (25W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W751
Test Mode:	Charging
Order No/Sample No:	168589046/A004163871-010
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

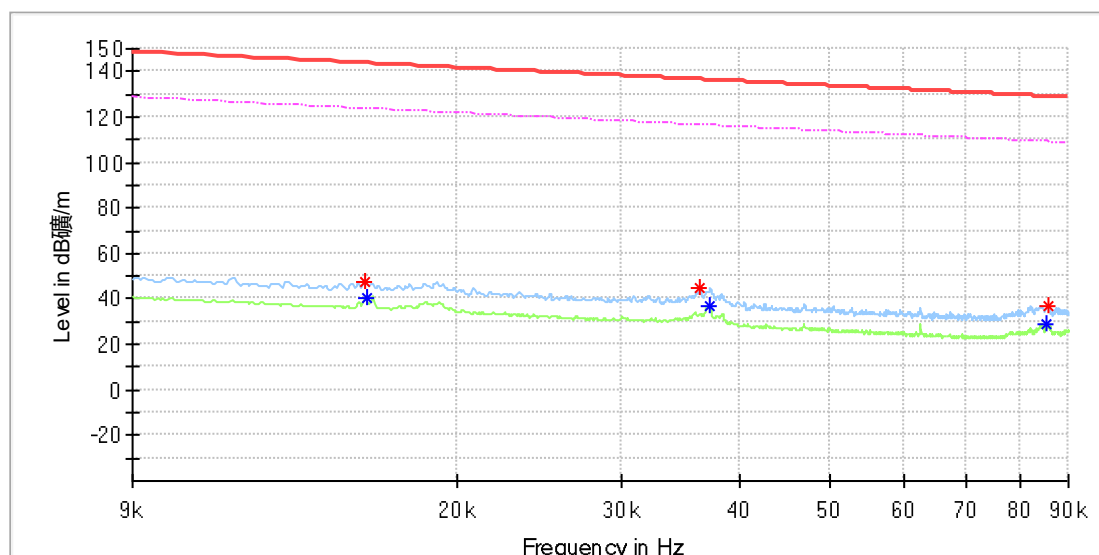


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015943	47.86	---	143.54	95.68	100.0	X	175.0	20.0
0.016001	---	40.47	123.51	83.03	100.0	X	258.0	20.0
0.036309	44.82	---	136.39	91.57	100.0	X	212.0	20.0
0.037234	---	36.69	116.17	79.49	100.0	X	31.0	20.0
0.085198	---	29.17	108.99	79.82	100.0	X	141.0	20.0
0.085487	37.16	---	128.96	91.79	100.0	X	48.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

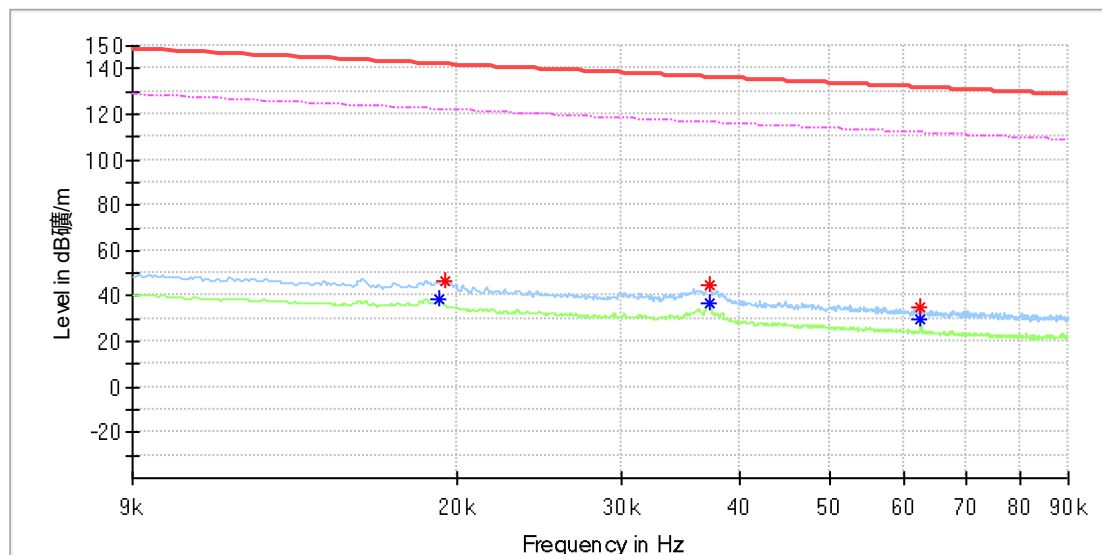


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	38.57	121.93	83.36	100.0	Y	196.0	20.0
0.019414	46.59	---	141.83	95.24	100.0	Y	354.0	20.0
0.037176	44.59	---	136.19	91.60	100.0	Y	207.0	20.0
0.037234	---	36.47	116.17	79.70	100.0	Y	354.0	20.0
0.062518	35.47	---	131.67	96.21	100.0	Y	242.0	20.0
0.062576	---	29.47	111.67	82.20	100.0	Y	41.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

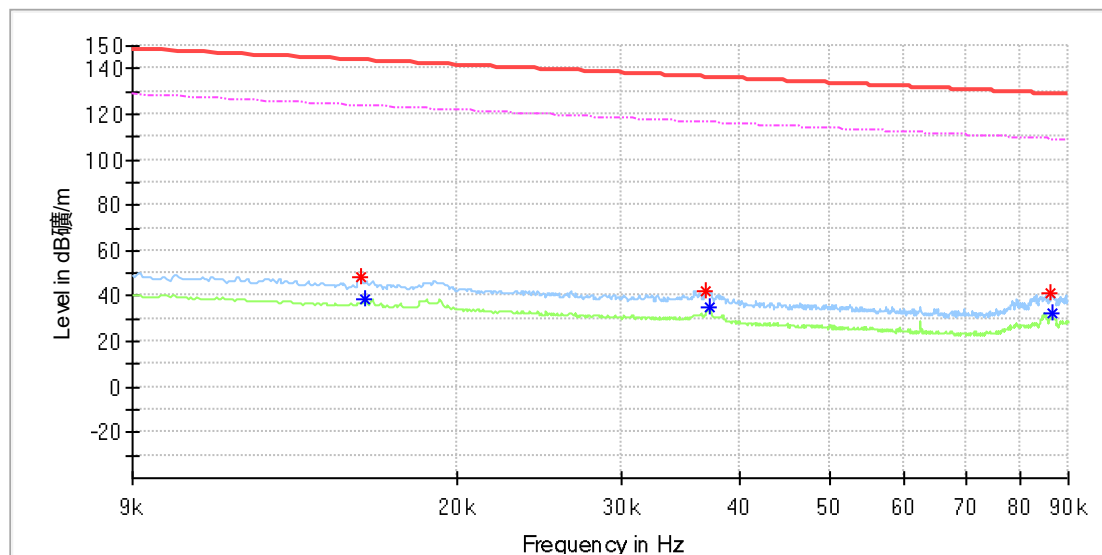


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015769	48.27	---	143.63	95.36	100.0	Z	149.0	20.0
0.015943	---	38.47	123.54	85.07	100.0	Z	172.0	20.0
0.036945	42.03	---	136.24	94.21	100.0	Z	0.0	20.0
0.037234	---	34.89	116.17	81.28	100.0	Z	103.0	20.0
0.086297	40.93	---	128.88	87.95	100.0	Z	288.0	20.0
0.086471	---	32.90	108.86	75.96	100.0	Z	57.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

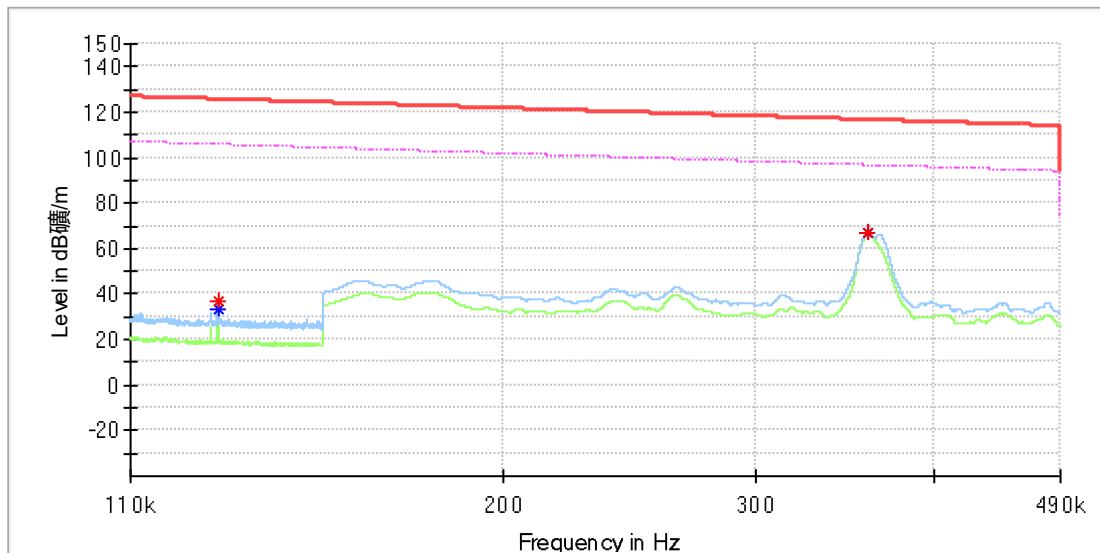


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.126600	36.66	---	125.55	88.88	100.0	X	38.0	20.0
0.126600	---	33.62	105.55	71.93	100.0	X	38.0	20.0
0.360000	66.91	---	116.48	49.56	100.0	X	17.0	20.0
0.360050	---	66.70	96.48	29.77	100.0	X	17.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

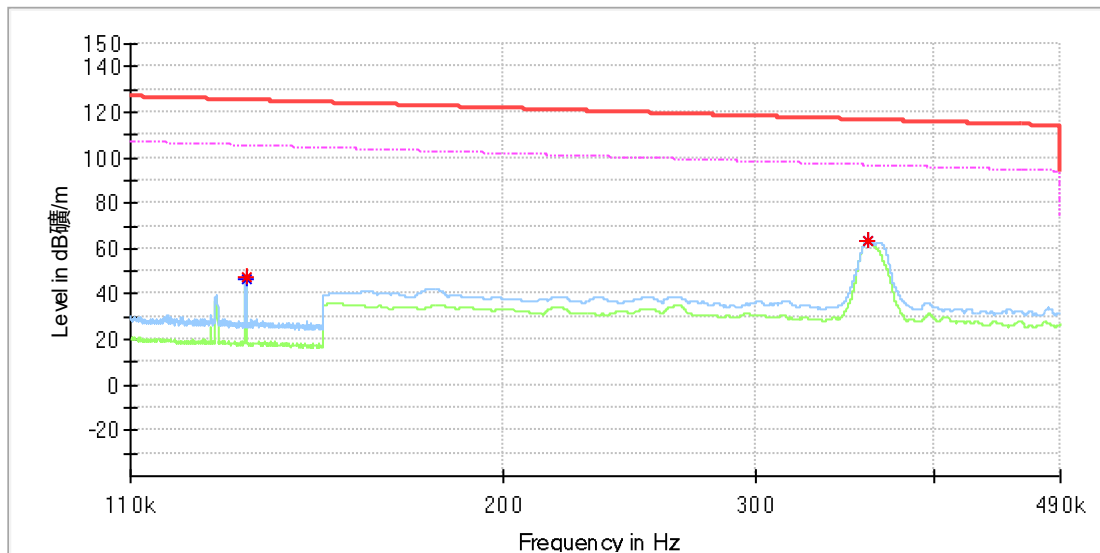


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.132400	47.35	---	125.16	77.81	100.0	Y	261.0	20.0
0.132400	---	46.93	105.16	58.23	100.0	Y	261.0	20.0
0.360050	---	63.42	96.48	33.05	100.0	Y	75.0	20.0
0.360100	63.61	---	116.47	52.87	100.0	Y	75.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

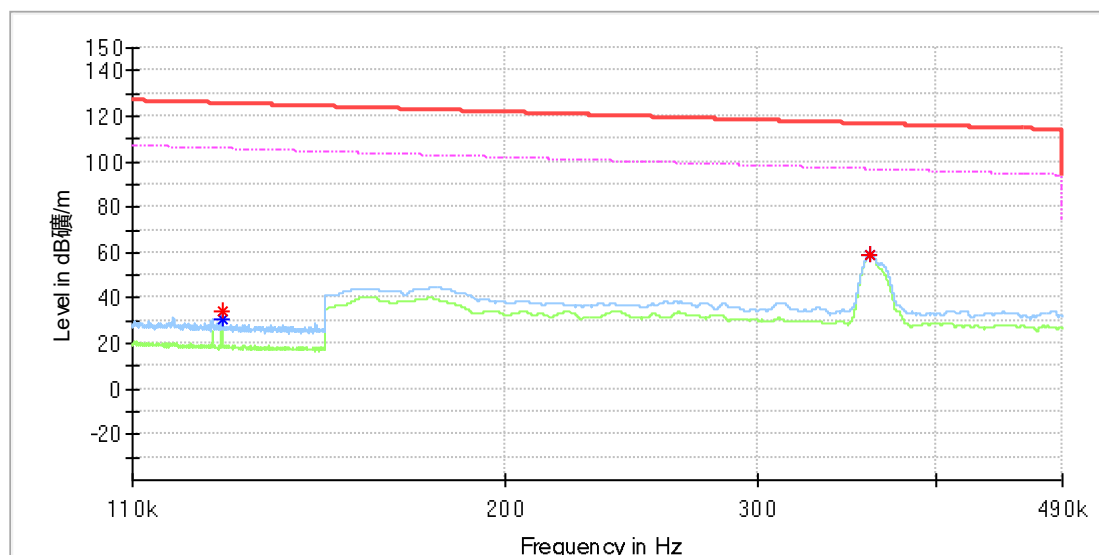


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127086	34.22	---	125.52	91.29	100.0	Z	47.0	20.0
0.127086	---	30.85	105.52	74.67	100.0	Z	47.0	20.0
0.360050	---	58.89	96.48	37.58	100.0	Z	345.0	20.0
0.360150	59.18	---	116.47	57.29	100.0	Z	345.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

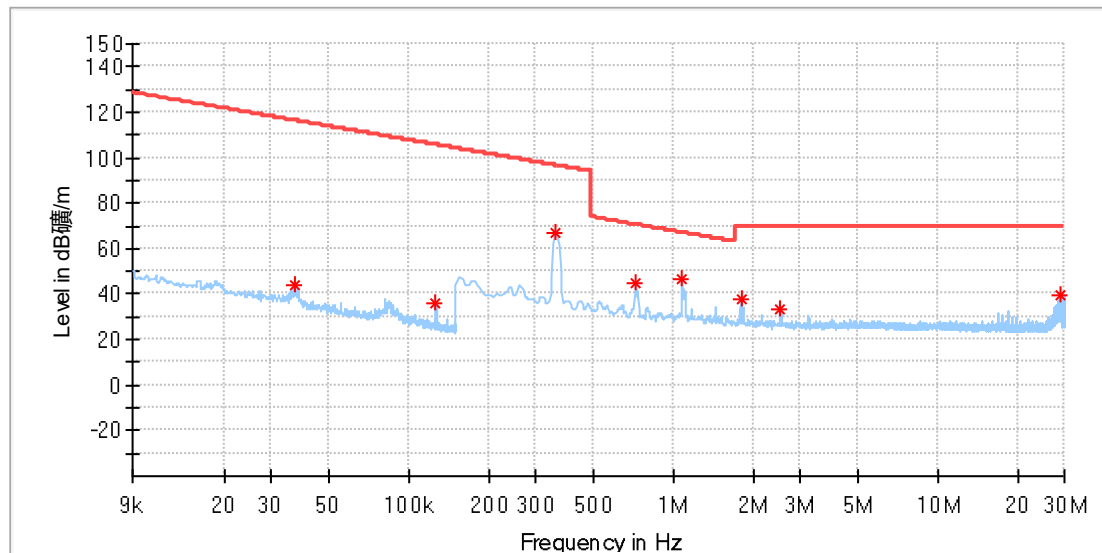

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037200	43.85	116.18	72.33	100.0	X	126.0	19.9
0.126433	35.99	105.56	69.57	100.0	X	338.0	19.9
0.356316	66.91	96.57	29.66	100.0	X	358.0	19.9
0.716272	44.72	70.51	25.79	100.0	X	303.0	19.9
1.076228	46.47	66.99	20.52	100.0	X	11.0	19.9
1.796140	37.58	69.50	31.92	100.0	X	15.0	20.0
2.516052	33.33	69.50	36.17	100.0	X	34.0	20.0
29.161566	39.72	69.50	29.78	100.0	X	26.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

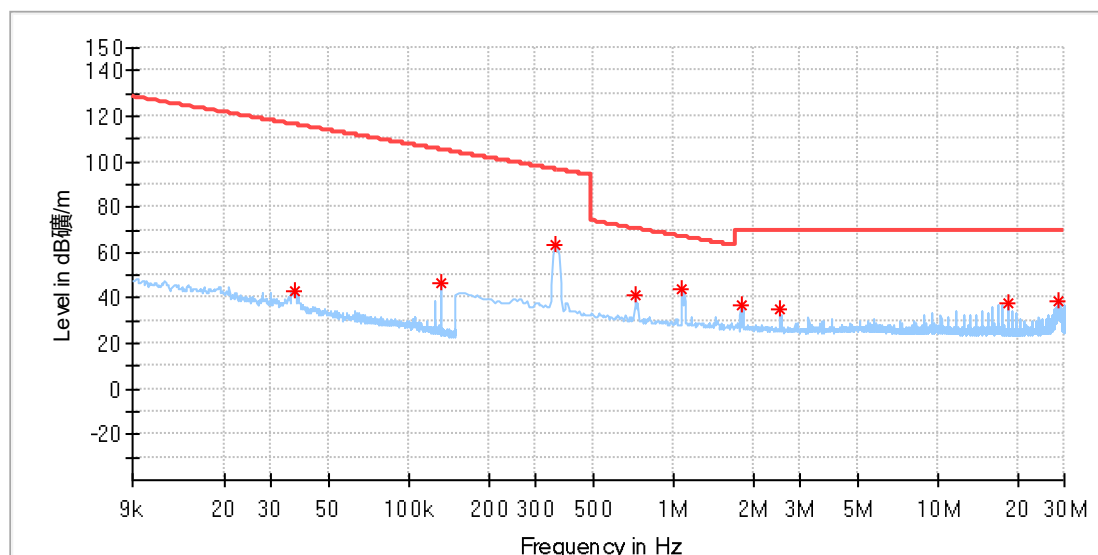

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	43.16	116.20	73.05	100.0	Y	21.0	19.9
0.132375	46.89	105.16	58.27	100.0	Y	274.0	19.9
0.356316	63.65	96.57	32.92	100.0	Y	89.0	19.9
0.716272	40.96	70.51	29.55	100.0	Y	4.0	19.9
1.076228	44.34	66.99	22.64	100.0	Y	96.0	19.9
1.796140	36.88	69.50	32.62	100.0	Y	93.0	20.0
2.516052	35.37	69.50	34.13	100.0	Y	352.0	20.0
18.318993	37.45	69.50	32.05	100.0	Y	186.0	20.3
28.441654	38.60	69.50	30.90	100.0	Y	25.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

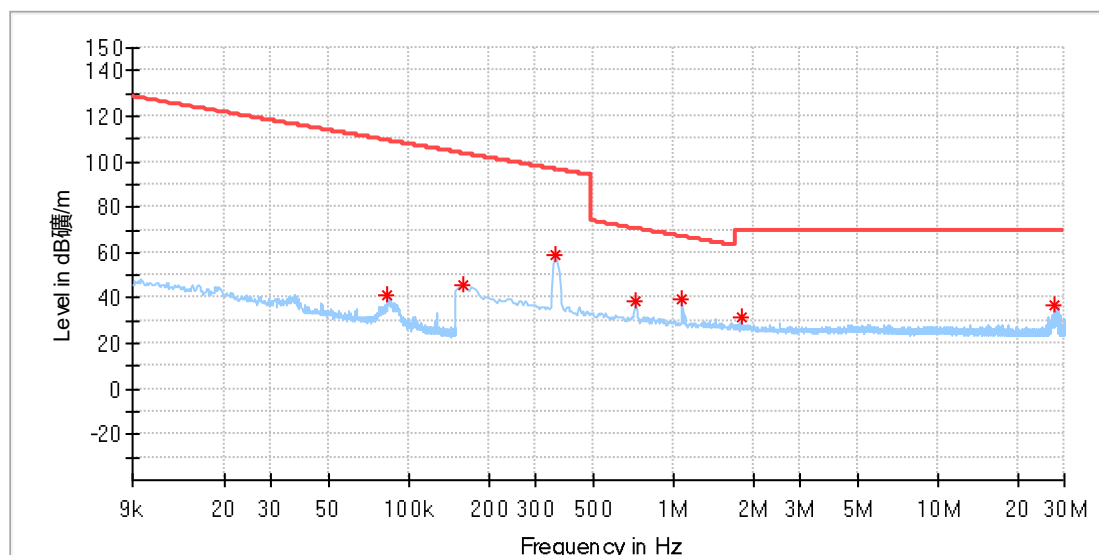

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.082018	40.93	109.32	68.38	100.0	Z	170.0	19.9
0.158780	45.72	103.58	57.86	100.0	Z	100.0	19.9
0.356316	59.29	96.57	37.27	100.0	Z	342.0	19.9
0.716272	38.83	70.51	31.68	100.0	Z	258.0	19.9
1.076228	39.11	66.99	27.88	100.0	Z	359.0	19.9
1.800530	31.15	69.50	38.35	100.0	Z	324.0	20.0
27.721743	36.56	69.50	32.94	100.0	Z	56.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

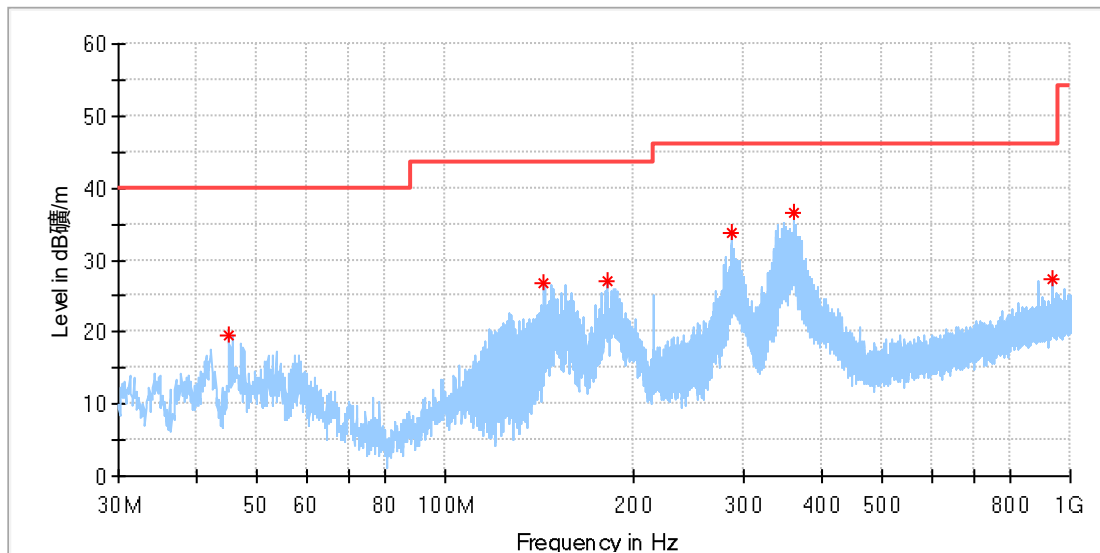

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.088889	19.62	40.00	20.38	100.0	H	106.0	-18.9
143.975000	26.77	43.50	16.73	100.0	H	239.0	-22.4
181.104444	27.21	43.50	16.29	100.0	H	223.0	-20.5
288.020000	33.65	46.00	12.35	100.0	H	4.0	-16.6
361.416667	36.55	46.00	9.45	100.0	H	0.0	-14.6
936.950000	27.30	46.00	18.70	100.0	H	0.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

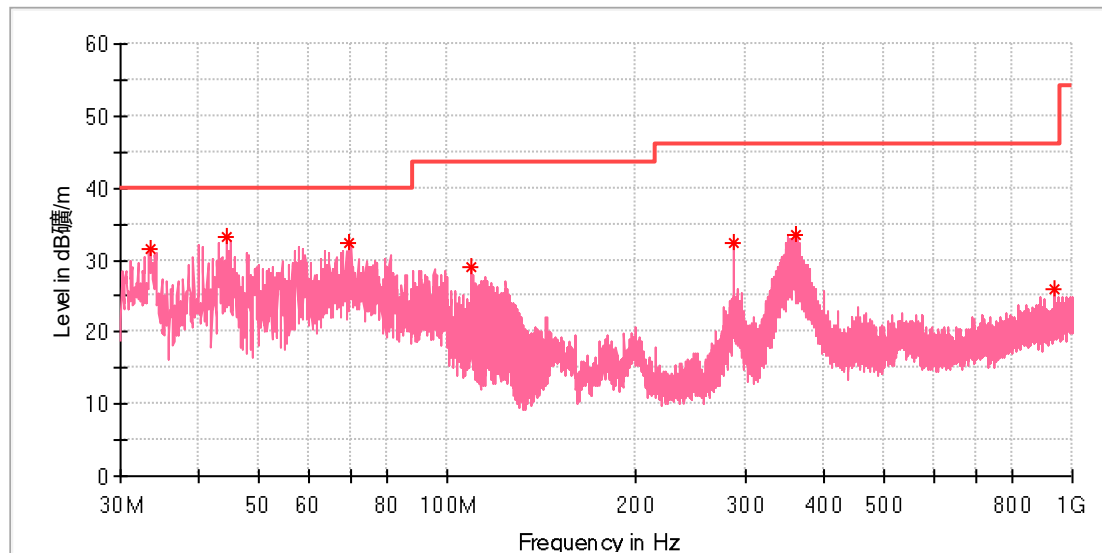

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.502778	31.56	40.00	8.44	100.0	V	62.0	-22.4
44.334444	33.23	40.00	6.77	100.0	V	320.0	-19.1
69.608333	32.29	40.00	7.71	100.0	V	334.0	-21.8
109.055000	29.11	43.50	14.39	100.0	V	151.0	-19.1
288.020000	32.42	46.00	13.58	100.0	V	117.0	-16.6
360.716111	33.50	46.00	12.50	100.0	V	151.0	-14.6
936.950000	26.01	46.00	19.99	100.0	V	203.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (TWS 5W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W751
Test Mode:	Charging
Order No/Sample No:	168589046/A004163871-010
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

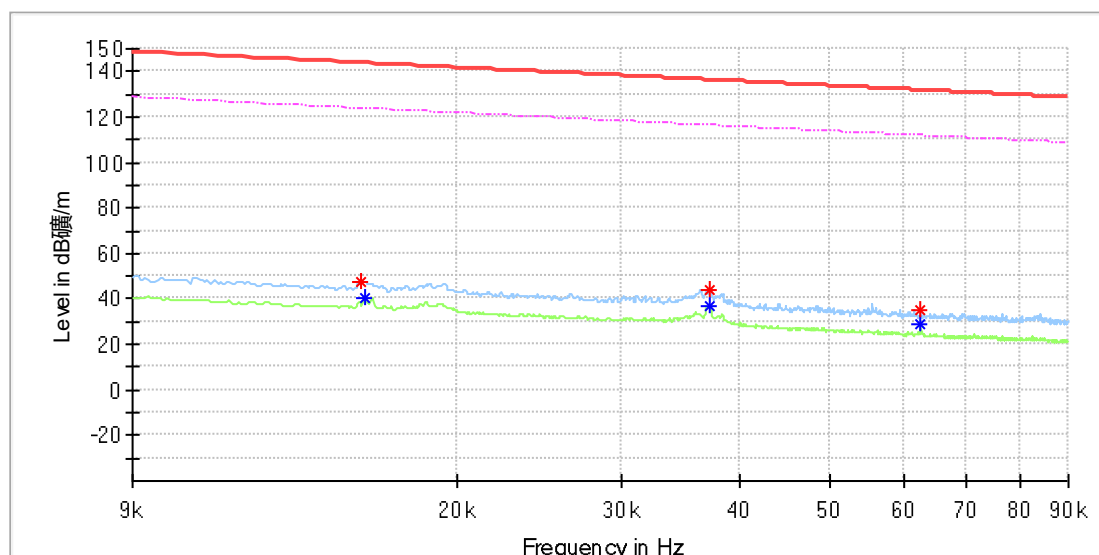


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015827	47.90	---	143.60	95.70	100.0	X	75.0	20.0
0.015943	---	40.70	123.54	82.83	100.0	X	188.0	20.0
0.037234	44.36	---	136.17	91.81	100.0	X	115.0	20.0
0.037234	---	36.86	116.17	79.31	100.0	X	115.0	20.0
0.062576	35.17	---	131.67	96.50	100.0	X	45.0	20.0
0.062576	---	28.99	111.67	82.68	100.0	X	45.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

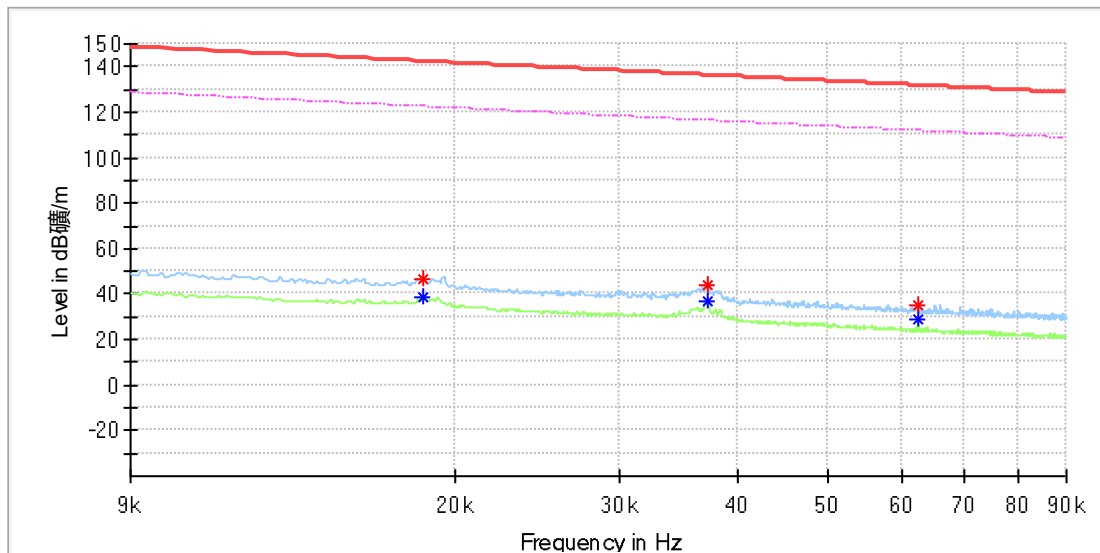


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	46.41	---	142.25	95.84	100.0	Y	164.0	20.0
0.018489	---	38.71	122.25	83.54	100.0	Y	164.0	20.0
0.037234	44.10	---	136.17	92.07	100.0	Y	206.0	20.0
0.037292	---	36.96	116.16	79.19	100.0	Y	223.0	20.0
0.062576	35.54	---	131.67	96.12	100.0	Y	335.0	20.0
0.062576	---	28.90	111.67	82.77	100.0	Y	335.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

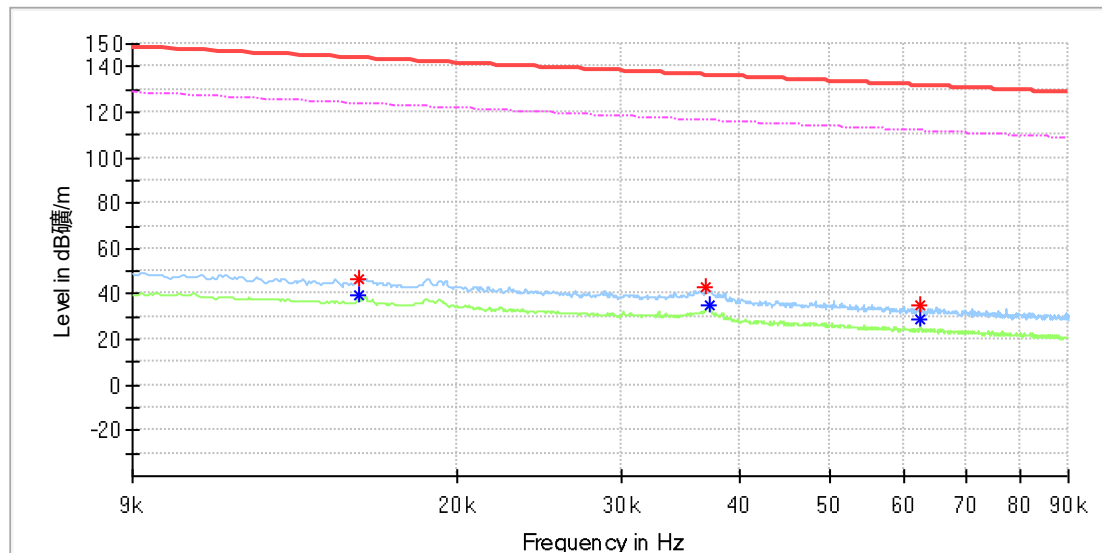


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	47.03	---	143.66	96.64	100.0	Z	138.0	20.0
0.015711	---	39.29	123.66	84.38	100.0	Z	138.0	20.0
0.036945	43.08	---	136.24	93.16	100.0	Z	163.0	20.0
0.037234	---	34.68	116.17	81.49	100.0	Z	266.0	20.0
0.062518	34.73	---	131.67	96.95	100.0	Z	252.0	20.0
0.062518	---	28.79	111.67	82.88	100.0	Z	252.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

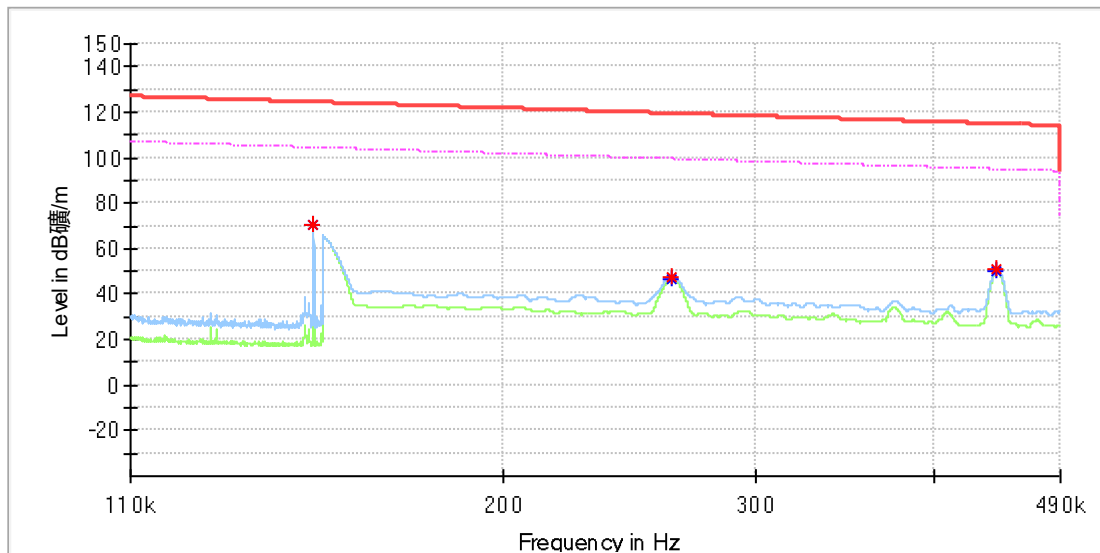


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	---	70.30	104.22	33.92	100.0	X	13.0	20.0
0.147543	70.44	---	124.22	53.78	100.0	X	13.0	20.0
0.262700	---	46.51	99.21	52.70	100.0	X	229.0	20.0
0.262800	47.62	---	119.21	71.59	100.0	X	229.0	20.0
0.442550	---	50.15	94.68	44.54	100.0	X	17.0	20.0
0.442650	50.70	---	114.68	63.99	100.0	X	17.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

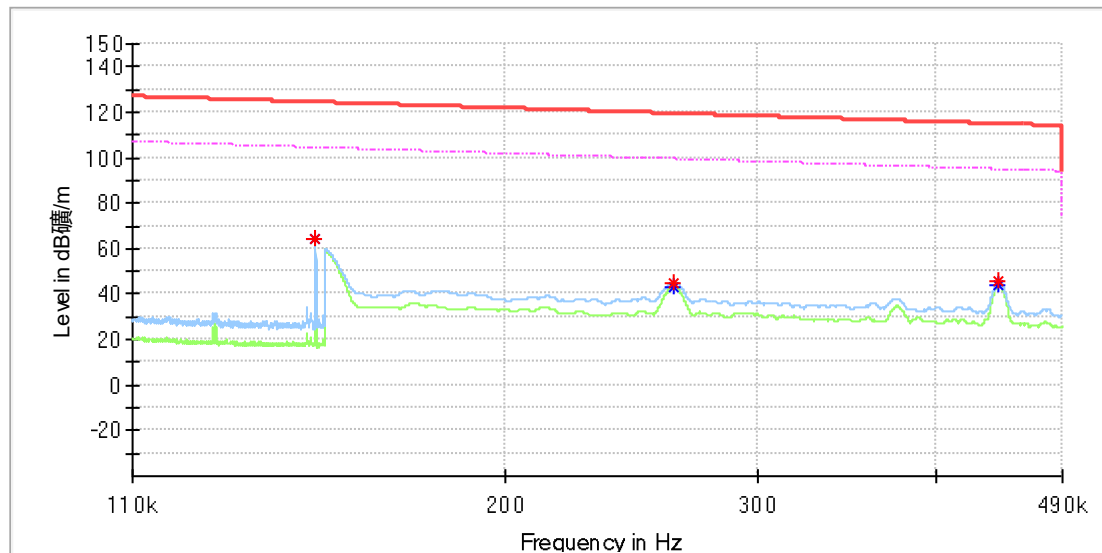


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	---	64.13	104.22	40.09	100.0	Y	273.0	20.0
0.147543	64.32	---	124.22	59.90	100.0	Y	273.0	20.0
0.262400	---	43.07	99.22	56.15	100.0	Y	129.0	20.0
0.262650	45.19	---	119.21	74.03	100.0	Y	129.0	20.0
0.442600	---	44.33	94.68	50.35	100.0	Y	117.0	20.0
0.442650	45.51	---	114.68	69.17	100.0	Y	117.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

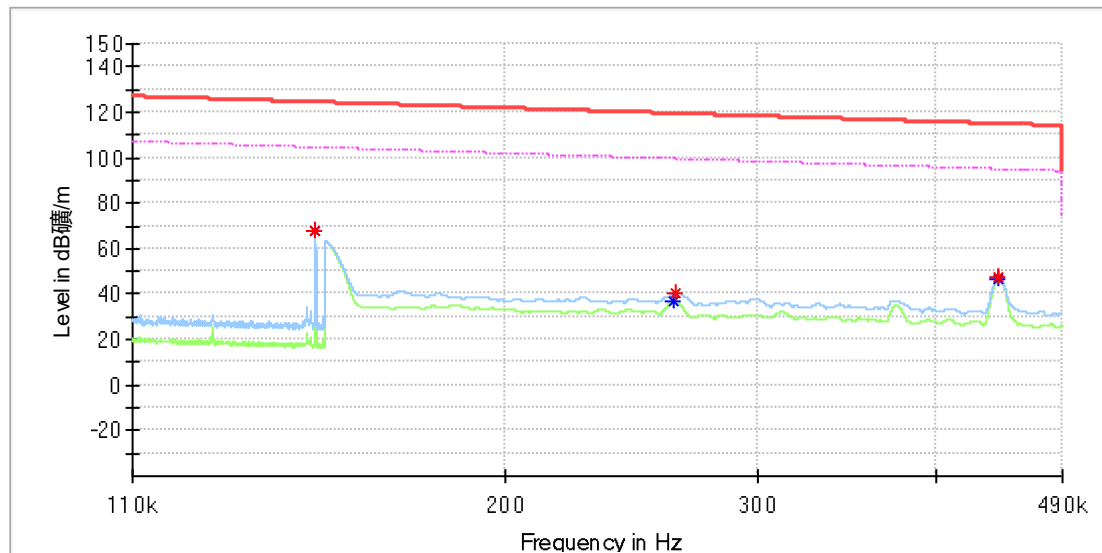


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	---	67.96	104.22	36.26	100.0	Z	0.0	20.0
0.147543	68.08	---	124.22	56.14	100.0	Z	0.0	20.0
0.262500	---	36.79	99.22	62.43	100.0	Z	199.0	20.0
0.263550	40.84	---	119.18	78.34	100.0	Z	199.0	20.0
0.442600	47.57	---	114.68	67.11	100.0	Z	14.0	20.0
0.442600	---	47.02	94.68	47.66	100.0	Z	14.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

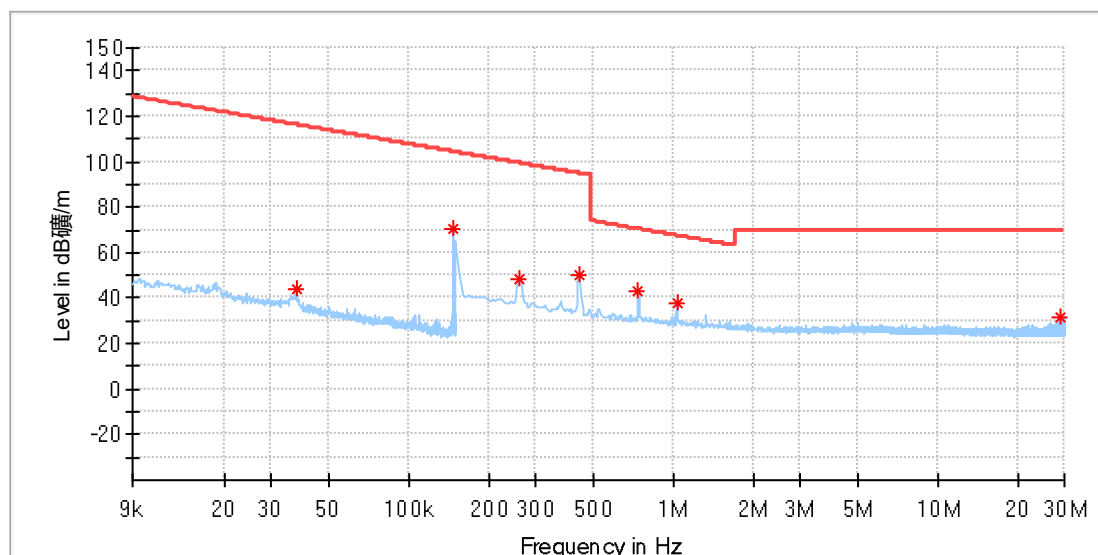

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037301	43.83	116.16	72.33	100.0	X	334.0	19.9
0.147583	70.25	104.22	33.97	100.0	X	11.0	19.9
0.259743	48.32	99.31	50.99	100.0	X	215.0	19.9
0.439721	50.57	94.74	44.17	100.0	X	0.0	19.9
0.733831	43.34	70.30	26.97	100.0	X	218.0	19.9
1.027941	38.14	67.38	29.24	100.0	X	37.0	19.9
28.920132	31.63	69.50	37.87	100.0	X	280.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

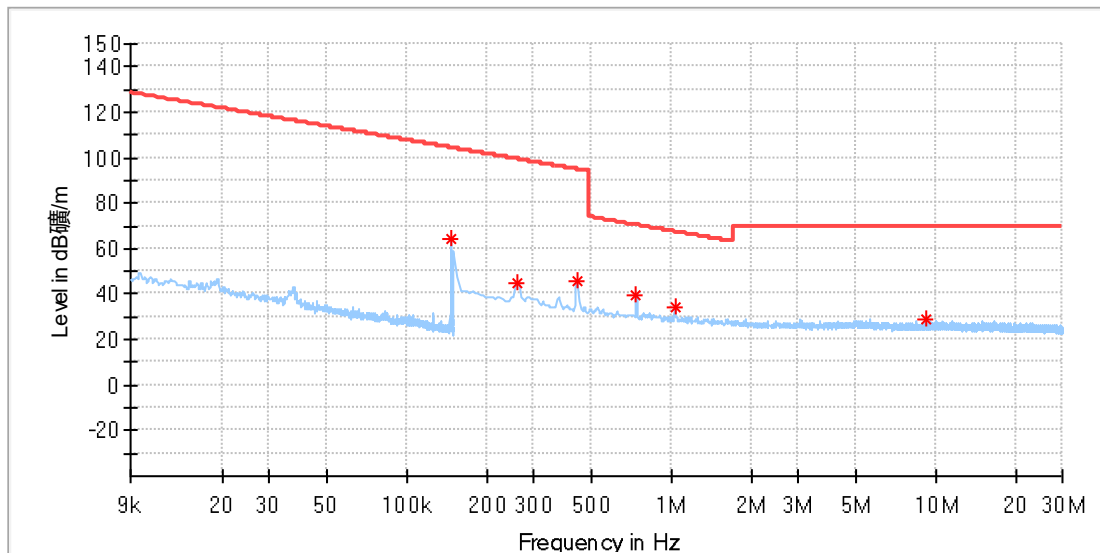

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147583	64.09	104.22	40.13	100.0	Y	276.0	19.9
0.259743	45.10	99.31	54.21	100.0	Y	337.0	19.9
0.439721	45.95	94.74	48.79	100.0	Y	265.0	19.9
0.733831	39.90	70.30	30.40	100.0	Y	272.0	19.9
1.032331	34.53	67.35	32.82	100.0	Y	287.0	19.9
9.232302	28.55	69.50	40.95	100.0	Y	55.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

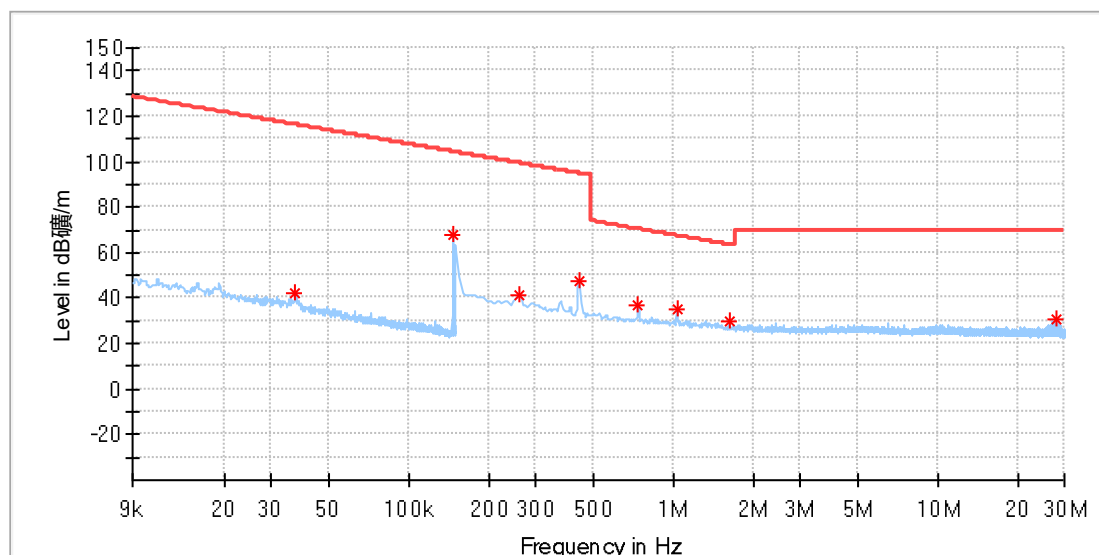

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037200	41.98	116.18	74.20	100.0	Z	248.0	19.9
0.147583	67.93	104.22	36.28	100.0	Z	349.0	19.9
0.259743	41.08	99.31	58.23	100.0	Z	191.0	19.9
0.439721	47.60	94.74	47.14	100.0	Z	356.0	19.9
0.733831	36.54	70.30	33.76	100.0	Z	14.0	19.9
1.032331	35.34	67.35	32.00	100.0	Z	22.0	19.9
1.620552	29.64	63.44	33.80	100.0	Z	58.0	19.9
27.739302	30.80	69.50	38.70	100.0	Z	259.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

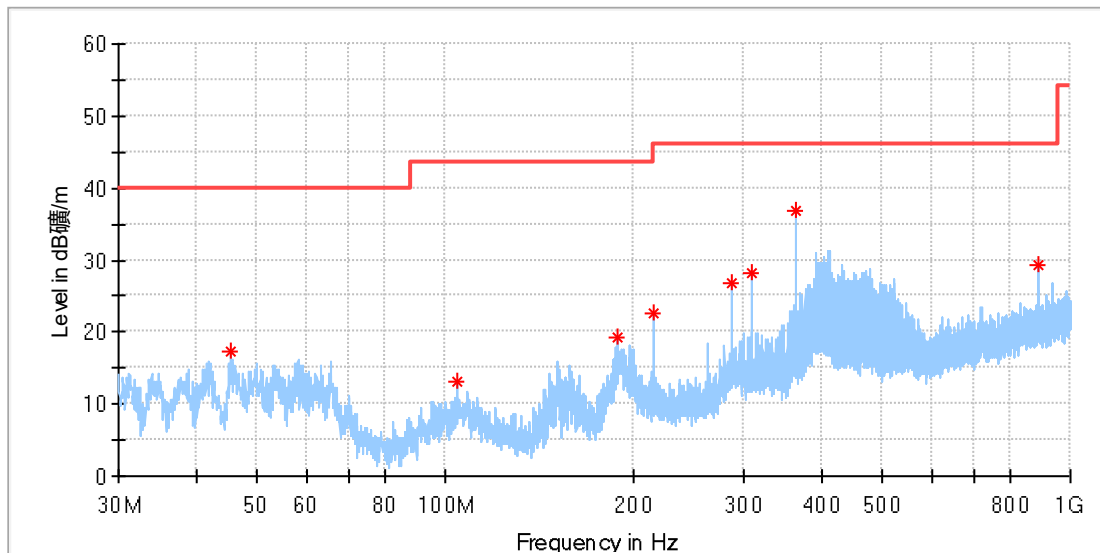

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.250556	17.26	40.00	22.74	100.0	H	275.0	-18.9
104.366667	13.07	43.50	30.43	100.0	H	160.0	-18.9
188.918333	19.17	43.50	24.33	100.0	H	252.0	-19.7
216.024444	22.70	46.00	23.30	100.0	H	181.0	-18.7
288.020000	26.92	46.00	19.08	100.0	H	5.0	-16.6
309.521667	28.12	46.00	17.88	100.0	H	174.0	-16.0
363.464444	36.84	46.00	9.16	100.0	H	207.0	-14.6
890.982778	29.33	46.00	16.67	100.0	H	36.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

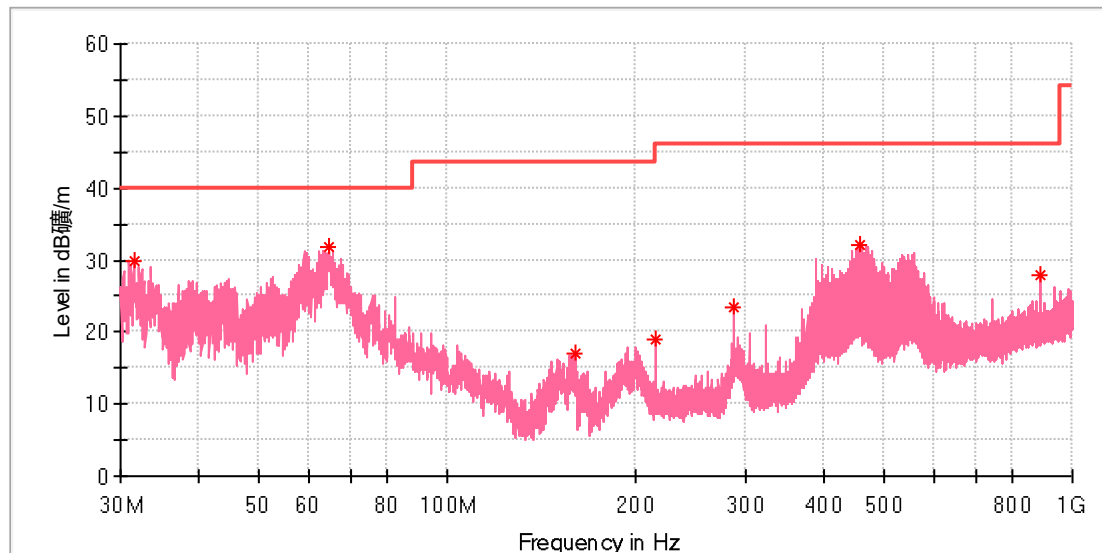

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.508889	29.86	40.00	10.14	100.0	V	167.0	-22.8
64.812222	31.78	40.00	8.22	100.0	V	279.0	-20.2
159.926111	17.00	43.50	26.50	100.0	V	327.0	-21.8
216.024444	18.97	46.00	27.03	100.0	V	43.0	-18.7
288.020000	23.53	46.00	22.47	100.0	V	133.0	-16.6
457.285000	32.14	46.00	13.86	100.0	V	0.0	-12.6
890.982778	27.84	46.00	18.16	100.0	V	0.0	-4.9


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (Co-location)

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

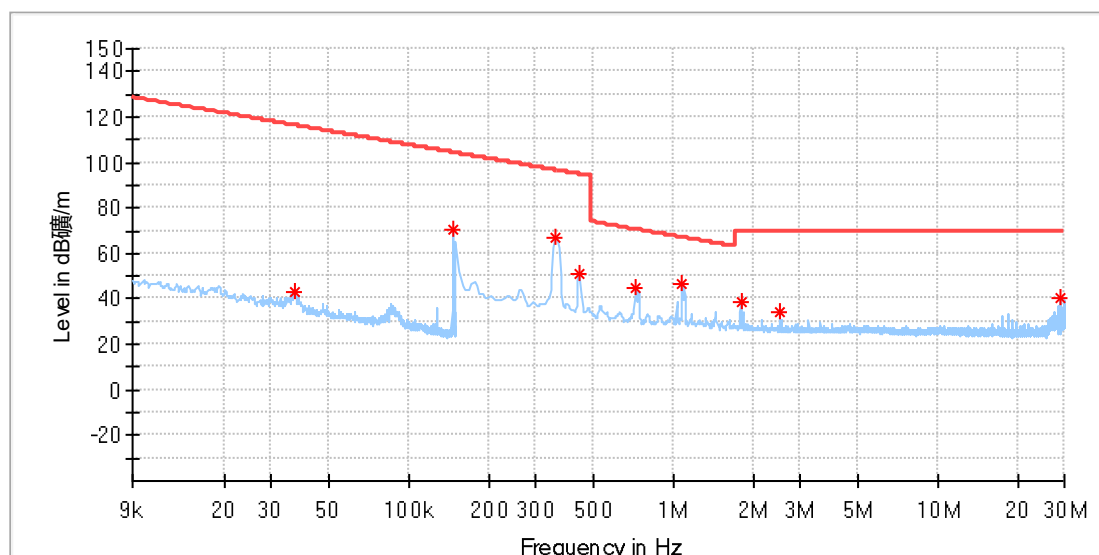

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	43.42	116.25	72.83	100.0	X	326.0	19.9
0.147583	70.15	104.22	34.07	100.0	X	8.0	19.9
0.356316	66.99	96.57	29.57	100.0	X	0.0	19.9
0.439721	50.94	94.74	43.80	100.0	X	12.0	19.9
0.716272	45.11	70.51	25.40	100.0	X	289.0	19.9
1.076228	46.87	66.99	20.12	100.0	X	185.0	19.9
1.796140	38.44	69.50	31.06	100.0	X	12.0	20.0
2.516052	34.12	69.50	35.38	100.0	X	62.0	20.0
29.161566	40.37	69.50	29.13	100.0	X	77.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

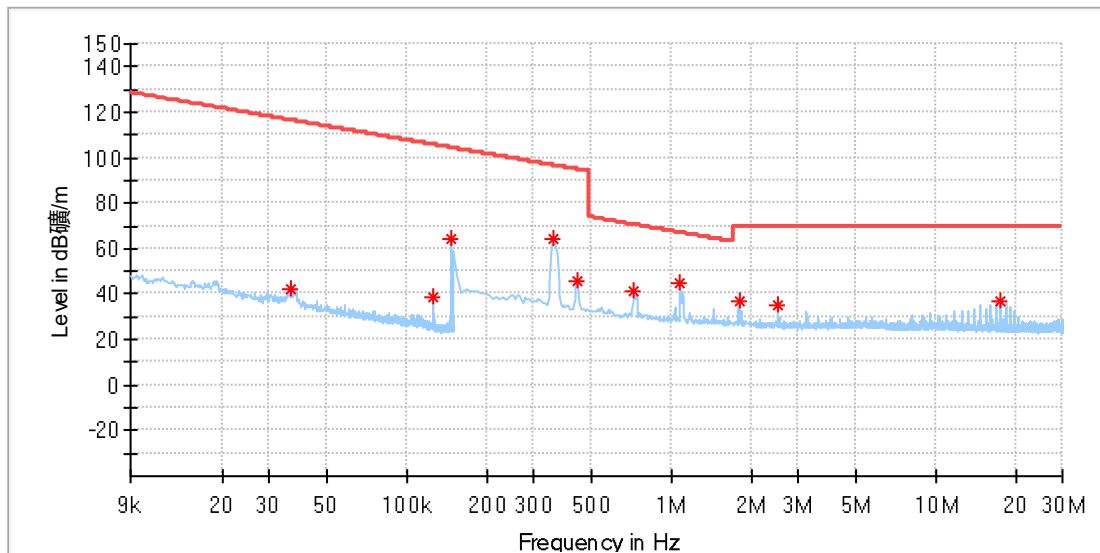

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036294	42.44	116.40	73.95	100.0	Y	54.0	19.9
0.126231	39.08	105.57	66.49	100.0	Y	201.0	19.9
0.147583	64.06	104.22	40.15	100.0	Y	272.0	19.9
0.356316	64.00	96.57	32.57	100.0	Y	73.0	19.9
0.439721	45.67	94.74	49.07	100.0	Y	269.0	19.9
0.716272	41.29	70.51	29.22	100.0	Y	177.0	19.9
1.076228	44.78	66.99	22.20	100.0	Y	102.0	19.9
1.796140	37.08	69.50	32.42	100.0	Y	84.0	20.0
2.516052	34.78	69.50	34.72	100.0	Y	312.0	20.0
17.585912	36.94	69.50	32.56	100.0	Y	330.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

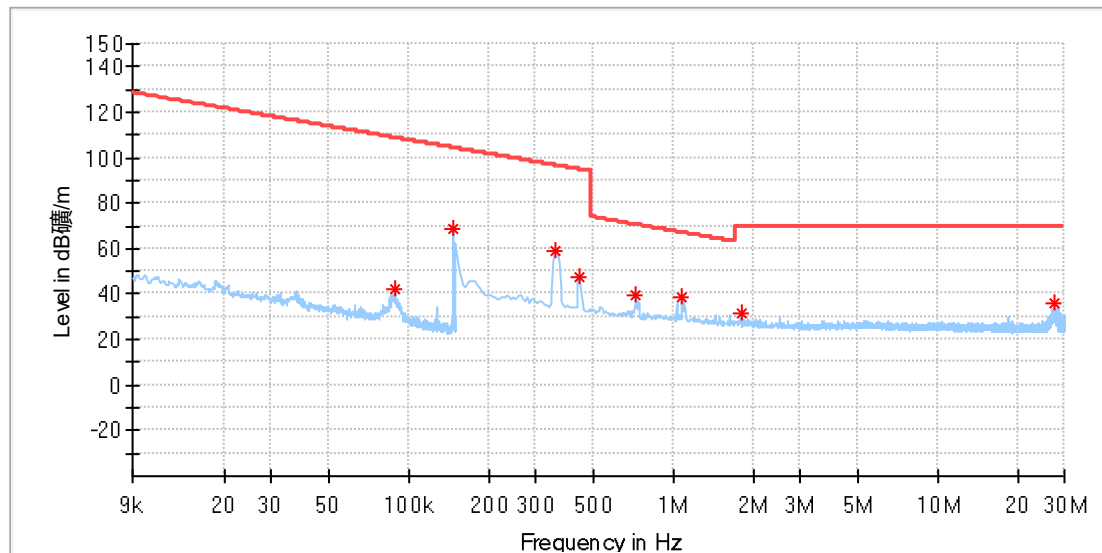

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.088262	41.81	108.68	66.87	100.0	Z	348.0	19.9
0.147583	68.26	104.22	35.96	100.0	Z	359.0	19.9
0.356316	59.25	96.57	37.32	100.0	Z	1.0	19.9
0.439721	47.68	94.74	47.06	100.0	Z	12.0	19.9
0.716272	39.63	70.51	30.88	100.0	Z	268.0	19.9
1.080618	39.09	66.95	27.86	100.0	Z	5.0	19.9
1.796140	31.66	69.50	37.84	100.0	Z	257.0	20.0
27.721743	36.24	69.50	33.26	100.0	Z	124.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

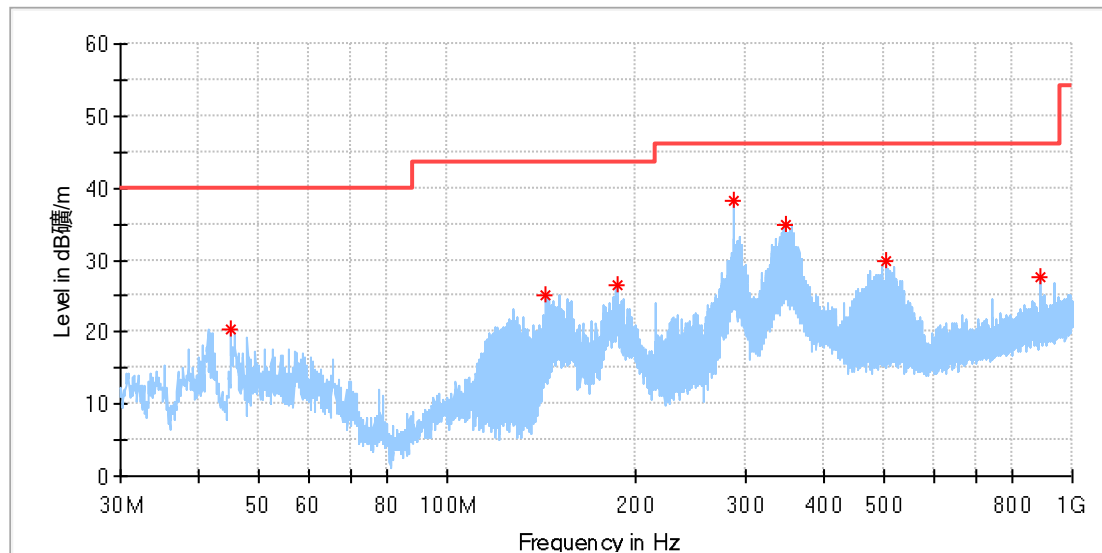

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.981111	20.36	40.00	19.64	100.0	H	157.0	-19.0
143.975000	25.09	43.50	18.41	100.0	H	219.0	-22.4
186.816667	26.46	43.50	17.04	100.0	H	254.0	-19.9
288.020000	38.28	46.00	7.72	100.0	H	30.0	-16.6
347.782778	34.99	46.00	11.01	100.0	H	0.0	-14.9
502.551667	29.80	46.00	16.20	100.0	H	311.0	-11.8
890.982778	27.58	46.00	18.42	100.0	H	289.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Charging
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

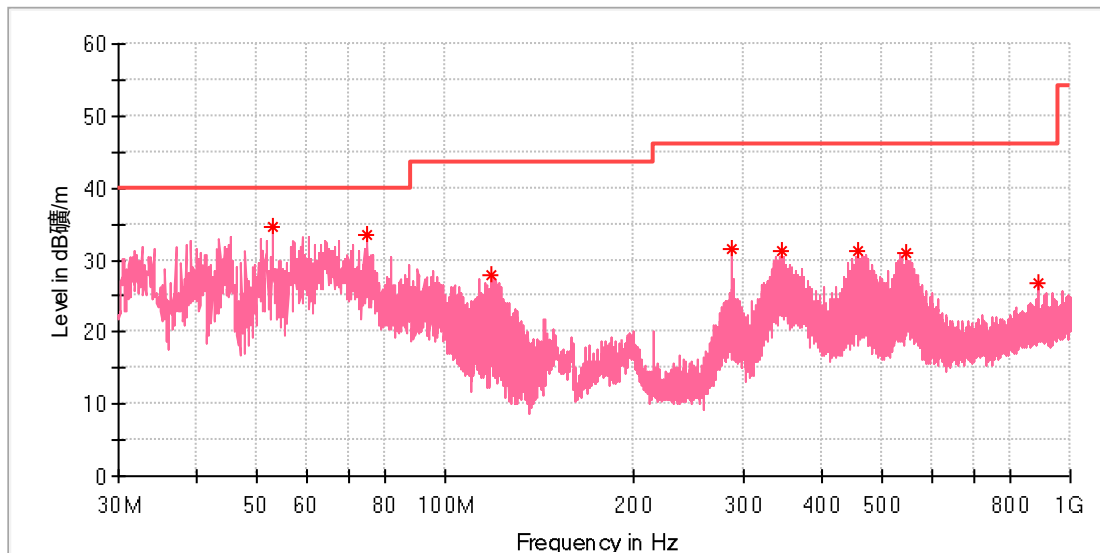

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.956667	34.72	40.00	5.28	100.0	V	118.0	-18.5
75.105000	33.59	40.00	6.41	100.0	V	275.0	-23.5
118.431667	27.89	43.50	15.61	100.0	V	221.0	-20.6
288.020000	31.41	46.00	14.59	100.0	V	84.0	-16.6
346.327778	31.12	46.00	14.88	100.0	V	325.0	-14.9
457.285000	31.20	46.00	14.80	100.0	V	351.0	-12.6
544.531111	30.97	46.00	15.03	100.0	V	199.0	-10.9
890.982778	26.76	46.00	19.24	100.0	V	282.0	-4.9


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby mode

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W751
Test Mode:	Standby
Order No/Sample No:	168589046/A004163871-010
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

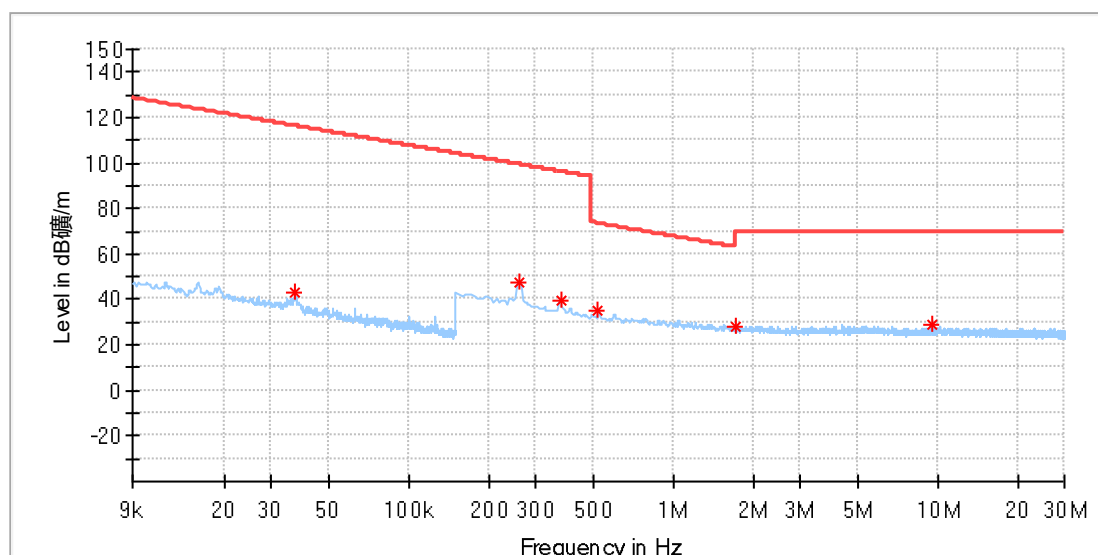

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	42.85	116.23	73.38	100.0	X	269.0	19.9
0.259743	47.88	99.31	51.43	100.0	X	236.0	19.9
0.373875	39.61	96.15	56.54	100.0	X	214.0	19.9
0.518735	35.48	73.31	37.82	100.0	X	240.0	19.9
1.703956	28.06	63.01	34.95	100.0	X	312.0	20.0
9.535191	28.86	69.50	40.64	100.0	X	261.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Standby
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

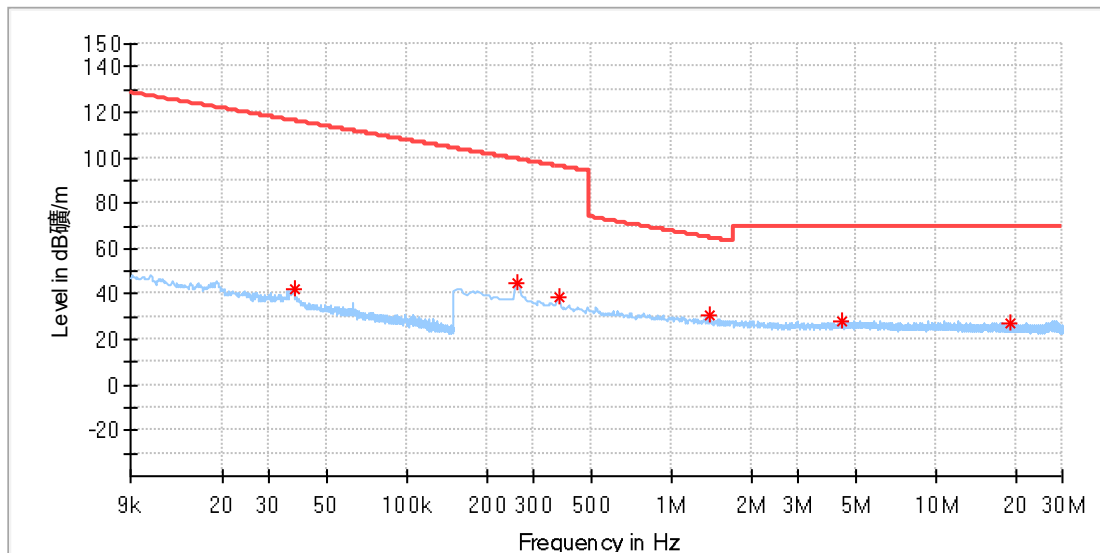

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037301	41.99	116.16	74.17	100.0	Y	158.0	19.9
0.259743	44.87	99.31	54.44	100.0	Y	289.0	19.9
0.373875	38.28	96.15	57.87	100.0	Y	300.0	19.9
1.396677	30.29	64.73	34.43	100.0	Y	264.0	19.9
4.412405	28.48	69.50	41.02	100.0	Y	81.0	20.1
19.052074	27.34	69.50	42.16	100.0	Y	48.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Standby
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

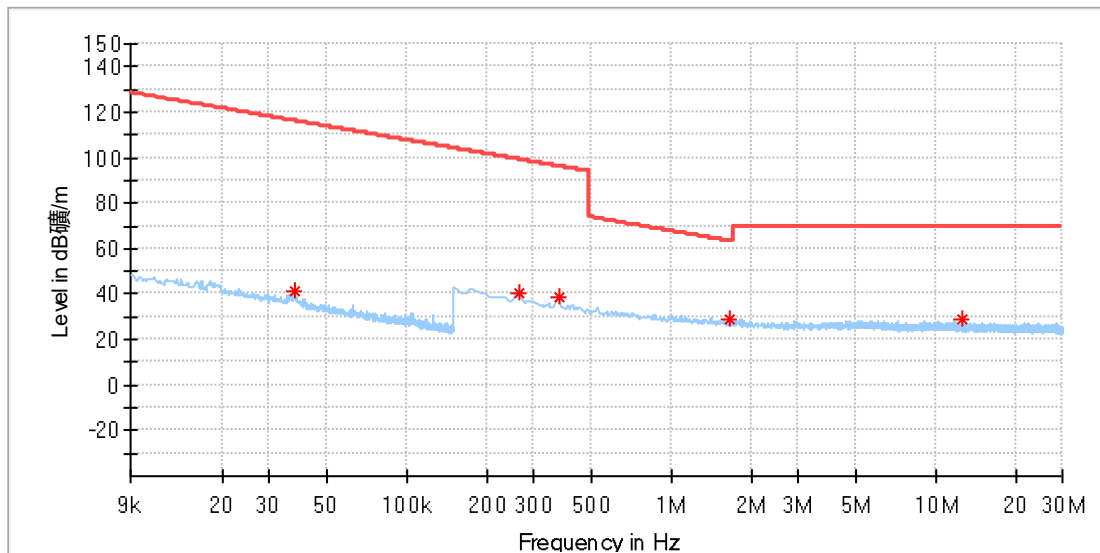

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037704	41.74	116.06	74.32	100.0	Z	4.0	19.9
0.264133	40.18	99.17	58.98	100.0	Z	254.0	19.9
0.373875	38.65	96.15	57.50	100.0	Z	53.0	19.9
1.664449	28.80	63.21	34.41	100.0	Z	136.0	20.0
12.463125	28.73	69.50	40.77	100.0	Z	64.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Standby
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

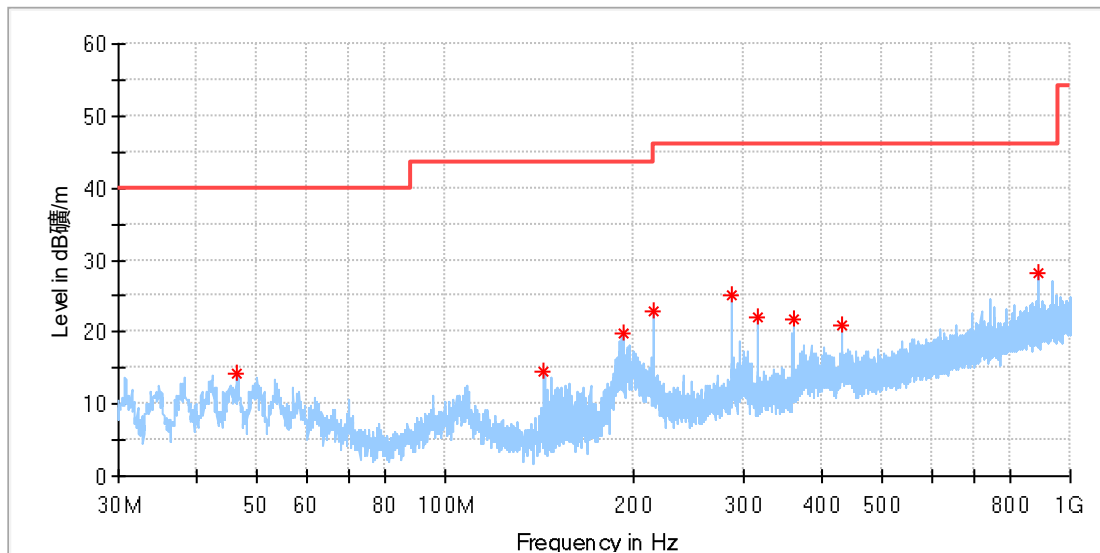

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.274444	14.23	40.00	25.77	100.0	H	61.0	-18.7
143.975000	14.43	43.50	29.07	100.0	H	342.0	-22.4
192.690556	19.70	43.50	23.80	100.0	H	286.0	-19.5
215.970556	22.81	43.50	20.69	100.0	H	151.0	-18.7
288.020000	25.20	46.00	20.80	100.0	H	215.0	-16.6
316.742778	22.16	46.00	23.84	100.0	H	31.0	-15.8
360.015556	21.85	46.00	24.15	100.0	H	356.0	-14.6
432.011111	20.87	46.00	25.13	100.0	H	184.0	-13.1
890.982778	28.06	46.00	17.94	100.0	H	294.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W751
Test Mode: Standby
Order No/Sample No: 168589046/A004163871-010
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

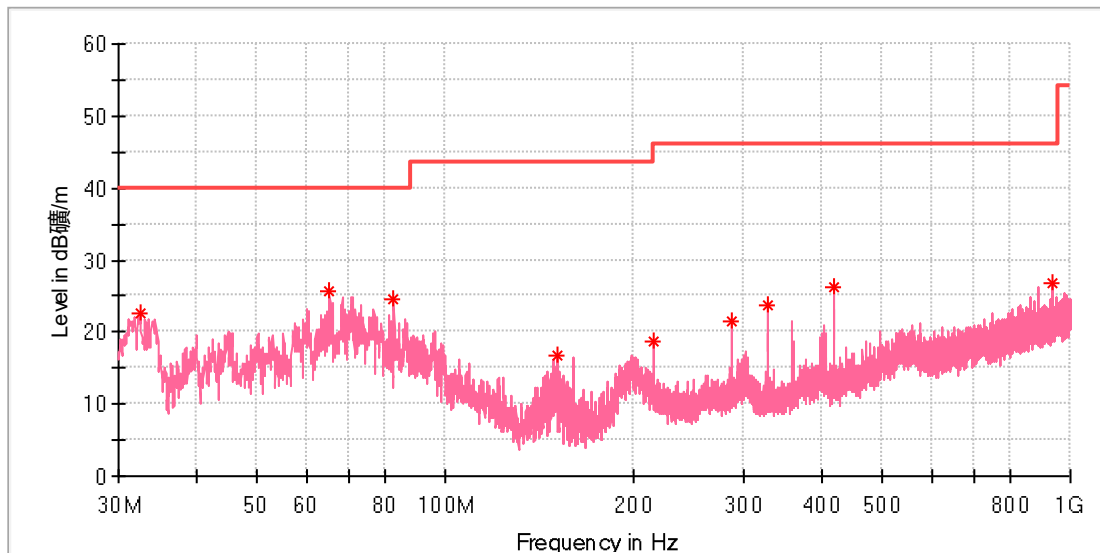

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.532778	22.51	40.00	17.49	100.0	V	341.0	-22.6
65.135556	25.62	40.00	14.38	100.0	V	152.0	-20.3
82.757222	24.58	40.00	15.42	100.0	V	245.0	-23.0
151.034444	16.69	43.50	26.81	100.0	V	359.0	-22.2
216.024444	18.82	46.00	27.18	100.0	V	40.0	-18.7
288.020000	21.37	46.00	24.63	100.0	V	144.0	-16.6
327.951667	23.82	46.00	22.18	100.0	V	193.0	-15.4
419.455000	26.14	46.00	19.86	100.0	V	76.0	-13.3
938.458889	26.86	46.00	19.14	100.0	V	284.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	2-in-1 Wireless Charger
Order Number:	168589046(P02183089)
Model:	W751
Test Mode:	Wireless Charging, MPP, 25W + TWS 5W
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Brain Zhang / Charlie Zha
Tem./Hum./Pressure:	24.0°C/49.3%/101kPa
Remark:	SR 3

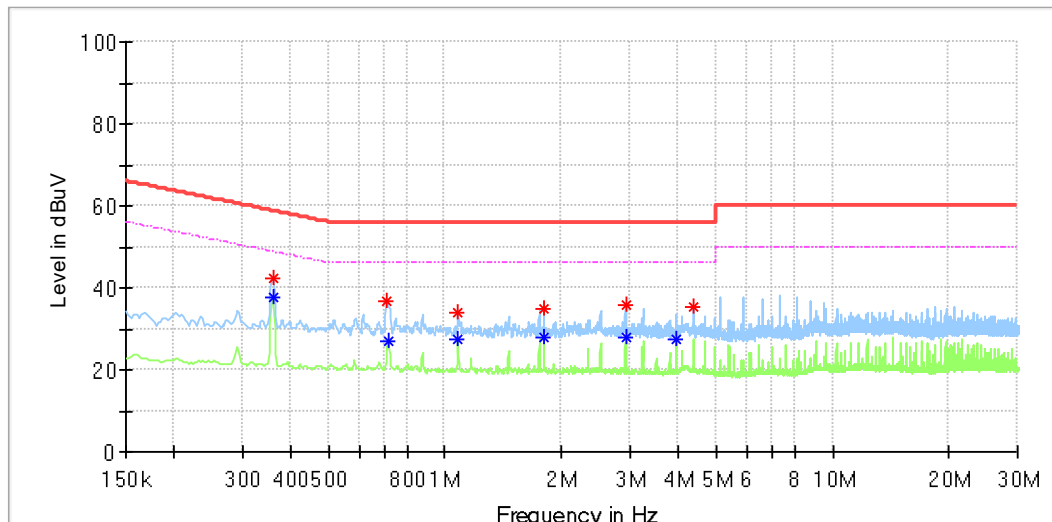

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.359	42.1	---	58.75	16.63	L1	9.6
0.359	---	37.5	48.75	11.27	L1	9.6
0.707	37.0	---	56.00	19.03	L1	9.8
0.715	---	26.8	46.00	19.18	L1	9.7
1.078	33.8	---	56.00	22.17	L1	9.6
1.078	---	27.5	46.00	18.48	L1	9.6
1.799	---	28.1	46.00	17.90	L1	9.6
1.799	34.9	---	56.00	21.14	L1	9.6
2.921	---	28.0	46.00	17.96	L1	9.6
2.921	35.9	---	56.00	20.08	L1	9.6
3.958	---	27.4	46.00	18.62	L1	9.7
4.381	35.2	---	56.00	20.77	L1	9.7

Final Result

[illegible]

EUT Information

EUT Name:	2-in-1 Wireless Charger
Order Number:	168589046(P02183089)
Model:	W751
Test Mode:	Wireless Charging, MPP, 25W + TWS 5W
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Brain Zhang / Charlie Zha
Tem./Hum./Pressure:	24.0°C/49.3%/101kPa
Remark:	SR 3

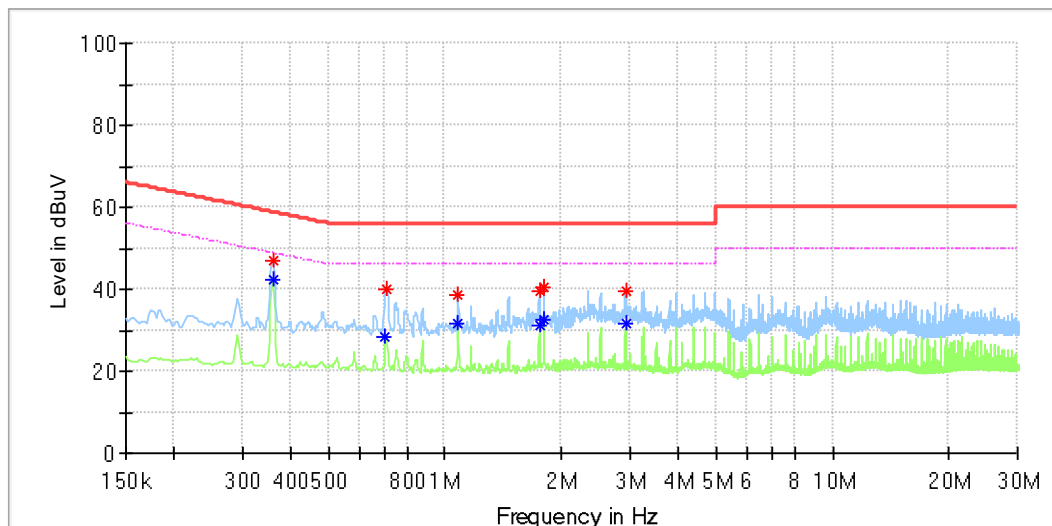

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.359	---	42.1	48.75	6.66	N	9.9
0.359	47.0	---	58.75	11.79	N	9.9
0.702	---	28.4	46.00	17.64	N	9.9
0.705	40.0	---	56.00	15.96	N	9.9
1.078	38.8	---	56.00	17.19	N	9.8
1.078	---	31.7	46.00	14.27	N	9.8
1.752	---	31.3	46.00	14.66	N	9.9
1.752	39.6	---	56.00	16.44	N	9.9
1.799	40.3	---	56.00	15.71	N	9.9
1.799	---	32.6	46.00	13.38	N	9.9
2.921	---	31.4	46.00	14.58	N	9.8
2.921	39.6	---	56.00	16.42	N	9.8

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
90.000	-100.00	-100.00	-100.00	0.00	100.00	100.00	1	0.00