

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25SPU0 002	Auftrags-Nr.: <i>Order no.:</i>	168568369	Seite 1 von 15 Page 1 of 15
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-08-05	
Auftraggeber: <i>Client:</i>	Ugreen Group Limited UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, 518000, China			
Prüfgegenstand: <i>Test item:</i>	Magnetic Wireless Car Charger			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	W758			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-08-26	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004069434-002			
Prüfzeitraum: <i>Testing period:</i>	2025-09-06 - 2025-10-14			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
	X  Lin Lin		X  Bell Hu	
Datum: <i>Date:</i>	2025-10-15		Ausstellungsdatum: <i>Issue date:</i> 2025-10-15	
Stellung / Position:	Sachverständige(r)/Expert		Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC: 2AQI5-W758A			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25SPU0 002
Test report no.:

Seite 2 von 15
Page 2 of 15

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25SPU0 002
Test Report No.:

Seite 3 von 15
Page 3 of 15

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	15
7	LIST OF TABLES.....	15

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2024-10-31	2025-10-30
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2024-10-31	2025-10-30
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	$\pm 2.08 \%$
All emissions, radiated	$\pm 4.17 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Magnetic Wireless Car Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Magnetic Wireless Car Charger
Type Designation:	W758
Product Number (P/N) code:	55967, 55967P, 55967X, 55967A, 55967B, 55967U, 55967JP, 55967ZD, 55967T
FCC ID:	2AQI5-W758A
Operating Voltage:	USB-C (IN) Input: 5Vdc, 3A/ 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3A
Operating Temperature Range:	-10 °C~ +35 °C
Technical Specification of WPT	
Frequency Range:	110.5-205 kHz, 360 kHz
Operating Frequency:	127.8 kHz, 360 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	5W / 7.5W / 10W / 15W / 25W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W
- B. On, Wireless Charging, EPP, 7.5W
- C. On, Wireless Charging, EPP, 10W
- D. On, Wireless Charging, MPP, 15W
- E. On, Wireless Charging, MPP, 25W
- F. On, Standby mode
- G. Off

Prüfbericht - Nr.: CN25SPU0 002
Test Report No.:

Seite 9 von 15
Page 9 of 15

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- Operation Description
- FCC/IC Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W758 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
AC/DC Adapter	Lenovo	LA140	N/A
Cell Phone	Apple	iPhone 16 Plus	N/A
Wireless charge Load	YBZ	YBZ-MPP25	N/A
Car Charger	Ugreen	50W Car Charger	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)


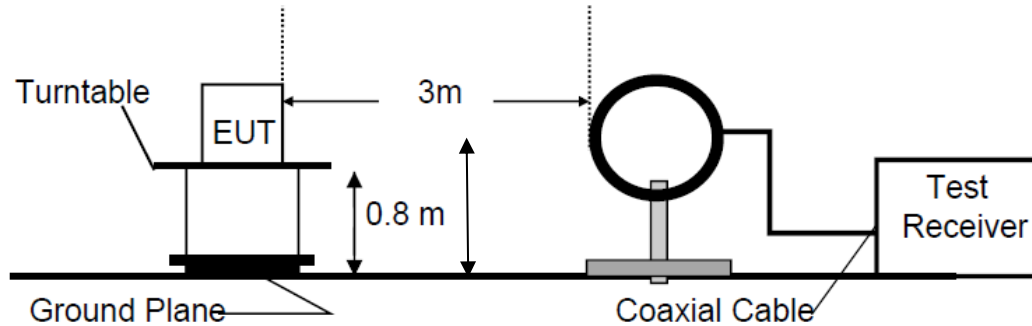


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

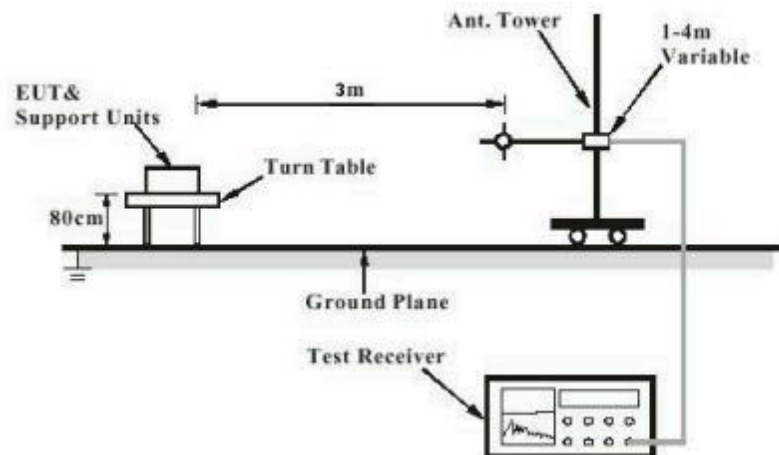

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.203
the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25SPU0 002
Test Report No.:

Seite 13 von 15
Page 13 of 15

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-09-08 to 2025-10-14
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F
Ambient temperature	: 22 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25SPU0 002
Test Report No.:

Seite 14 von 15
Page 14 of 15

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.209 & 15.205
Basic standard : ANSI C63.10: 2020
Limits : Refer to 15.209(a)
Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2025-09-06 to 2025-10-14
Input voltage : AC 120V, 60Hz
Operation mode : A, B, C, D, E, F
Ambient temperature : 22 °C
Relative humidity : 55 %
Atmospheric pressure : 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (EPP 7.5W).....	2
Wireless charging (EPP 10W).....	3
Wireless charging (MPP 25W)	4
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	5
Wireless charging (EPP 7.5W).....	5
Wireless charging (EPP 10W).....	16
Wireless charging (MPP 25W)	25
Standby mode	36

Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (EPP 7.5W)

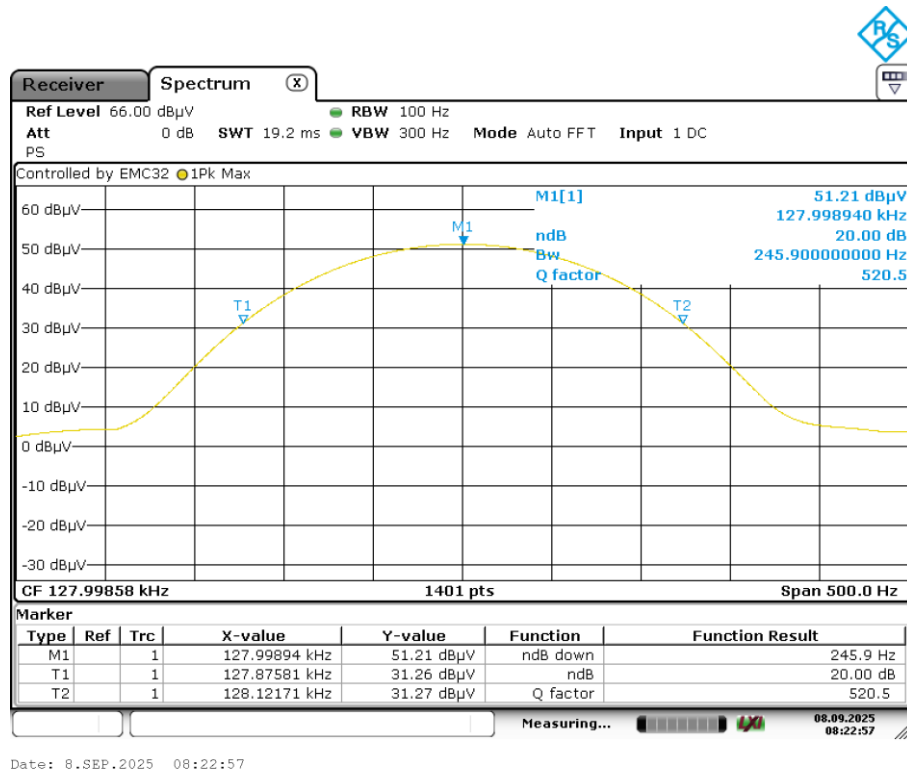


Wireless charging (EPP 10W)

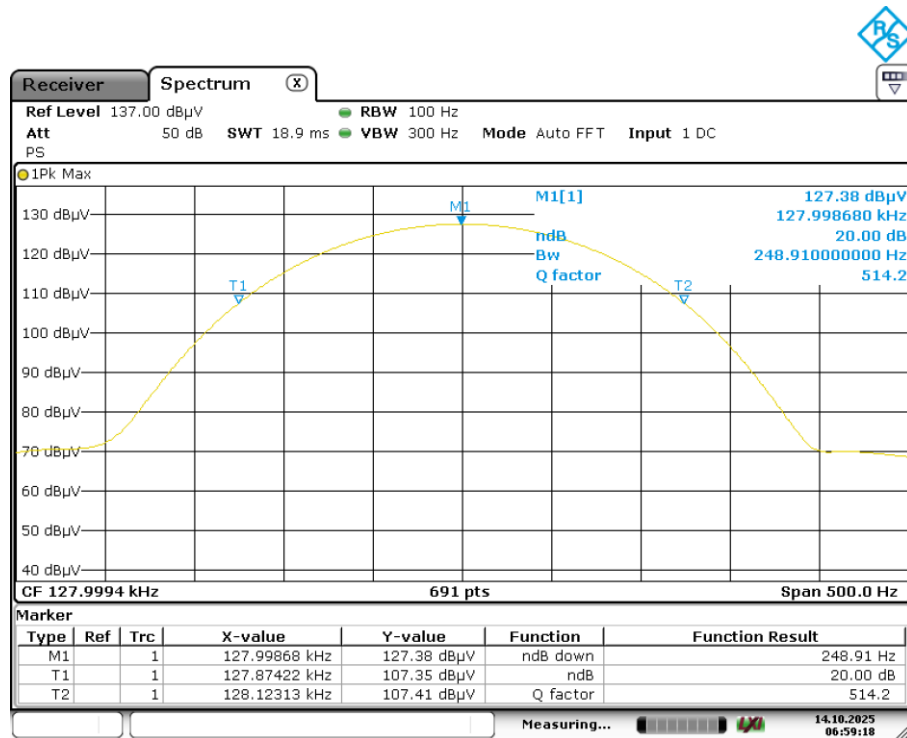

Date: 14.OCT.2025 06:59:19

Wireless charging (MPP 25W)

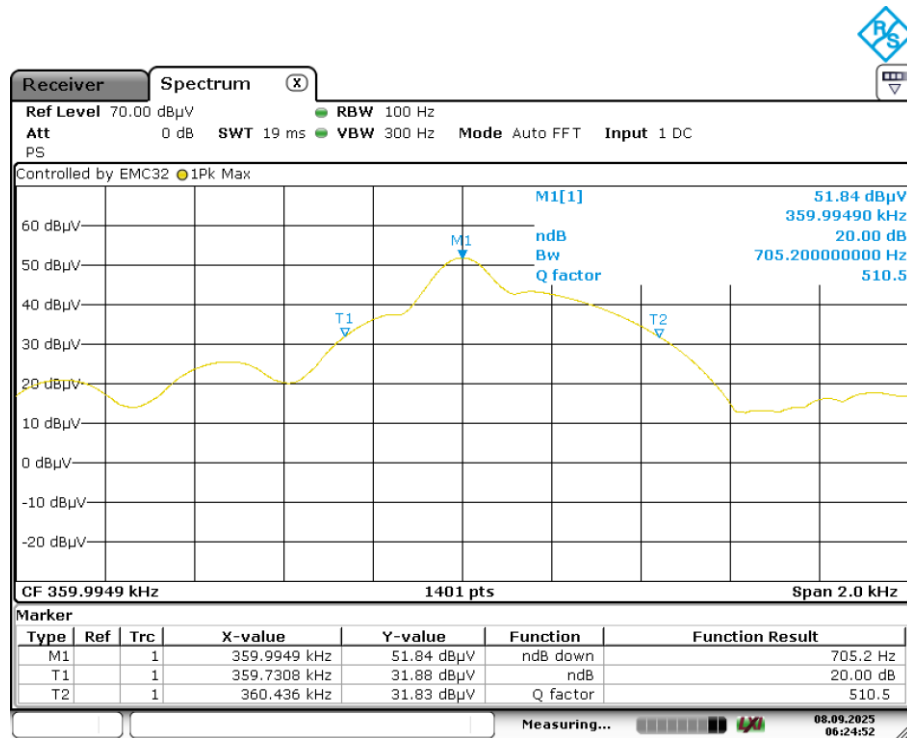

Date: 8.SEP.2025 06:24:53


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (EPP 7.5W)

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

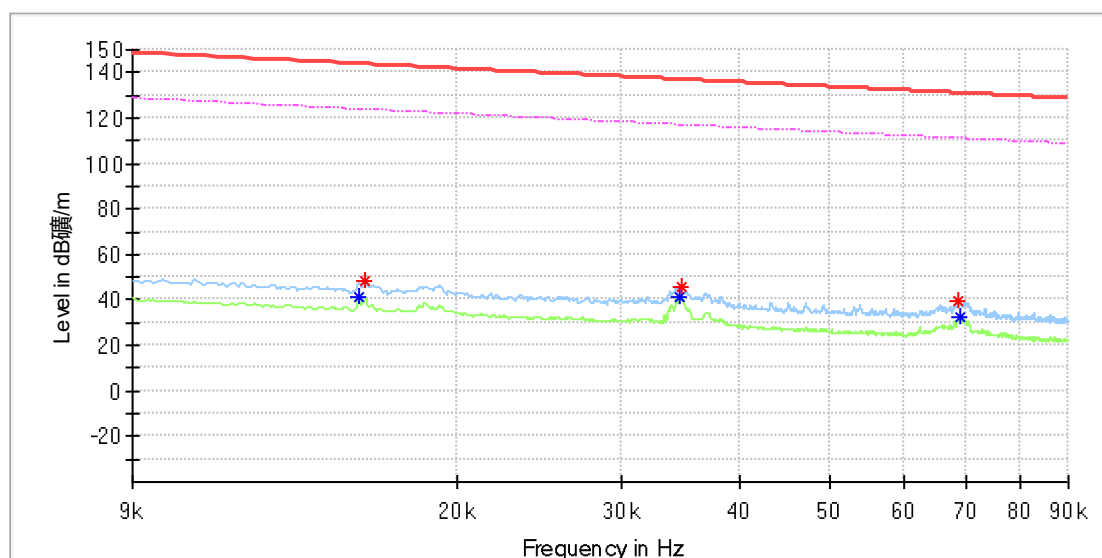


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	---	40.94	123.66	82.72	100.0	X	55.0	20.0
0.015943	48.05	---	143.54	95.49	100.0	X	37.0	20.0
0.034573	---	41.04	116.82	75.78	100.0	X	0.0	20.0
0.034804	45.95	---	136.76	90.81	100.0	X	351.0	20.0
0.068766	39.95	---	130.85	90.90	100.0	X	340.0	20.0
0.069114	---	32.57	110.80	78.23	100.0	X	351.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

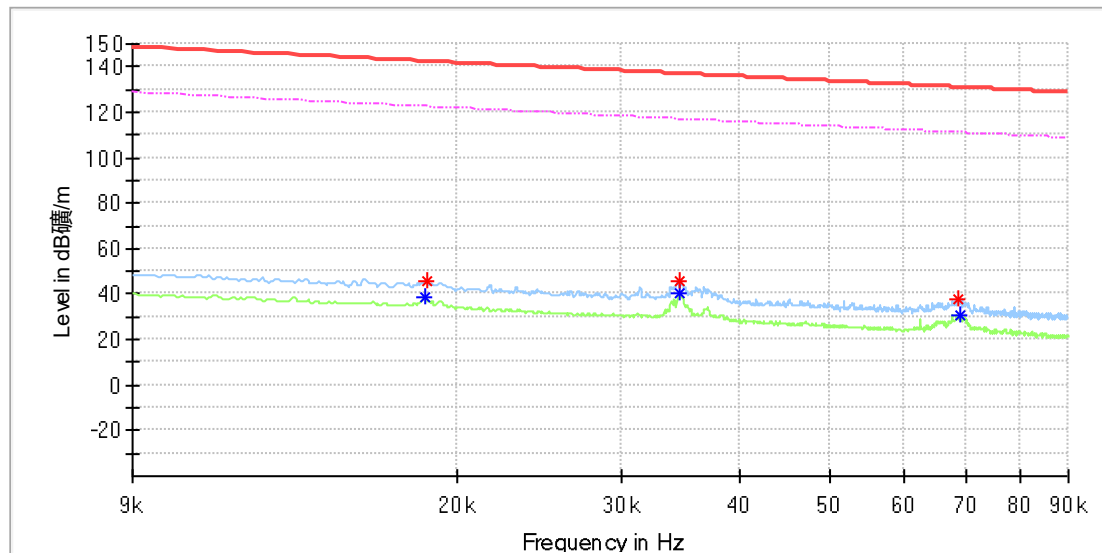


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	---	38.76	122.25	83.49	100.0	Y	341.0	20.0
0.018546	45.52	---	142.22	96.70	100.0	Y	341.0	20.0
0.034631	45.96	---	136.80	90.84	100.0	Y	43.0	20.0
0.034631	---	40.25	116.80	76.55	100.0	Y	43.0	20.0
0.068651	37.95	---	130.86	92.91	100.0	Y	43.0	20.0
0.068998	---	30.72	110.82	80.09	100.0	Y	32.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

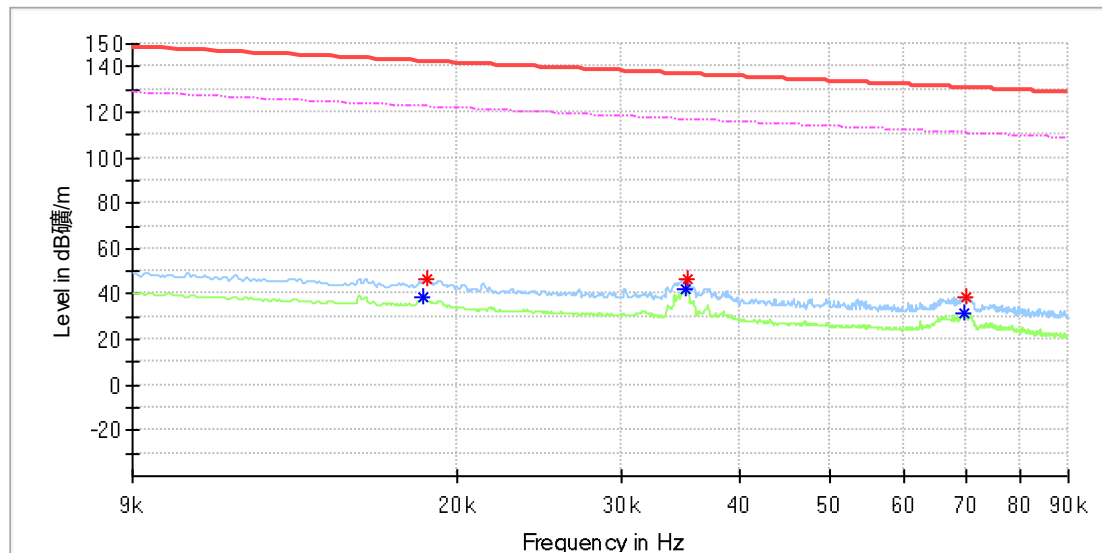


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	38.46	122.28	83.81	100.0	Z	89.0	20.0
0.018546	46.85	---	142.22	95.37	100.0	Z	197.0	20.0
0.035151	---	42.60	116.67	74.08	100.0	Z	32.0	20.0
0.035267	46.33	---	136.64	90.32	100.0	Z	25.0	20.0
0.069692	---	31.69	110.73	79.04	100.0	Z	38.0	20.0
0.069866	39.05	---	130.71	91.66	100.0	Z	32.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

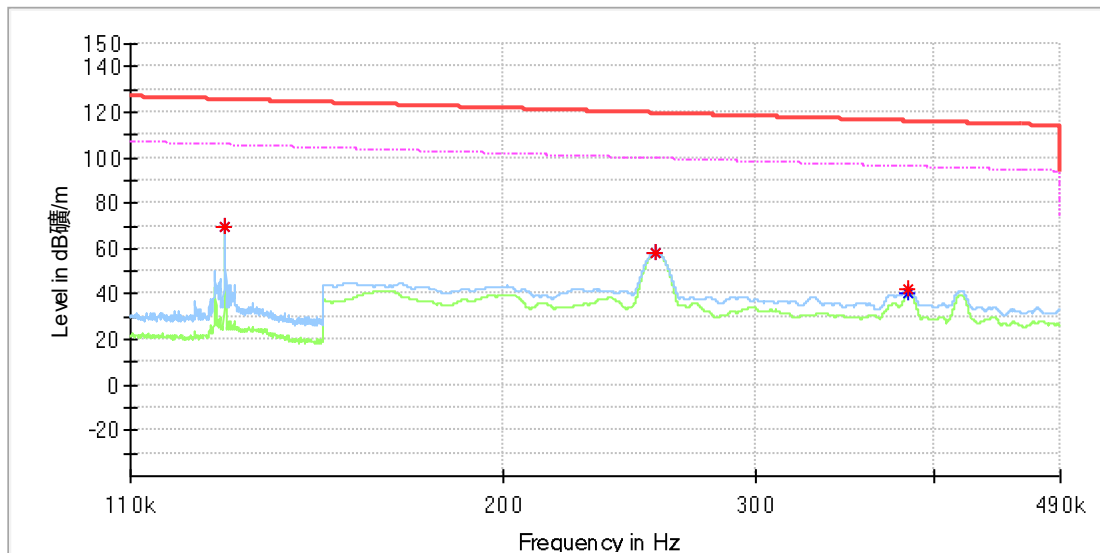


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128000	---	69.63	105.45	35.82	100.0	X	133.0	20.0
0.128000	69.72	---	125.45	55.73	100.0	X	133.0	20.0
0.255900	58.46	---	119.44	60.98	100.0	X	212.0	20.0
0.256000	---	58.13	99.44	41.31	100.0	X	212.0	20.0
0.383950	---	40.39	95.92	55.53	100.0	X	226.0	20.0
0.384100	42.33	---	115.91	73.58	100.0	X	226.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

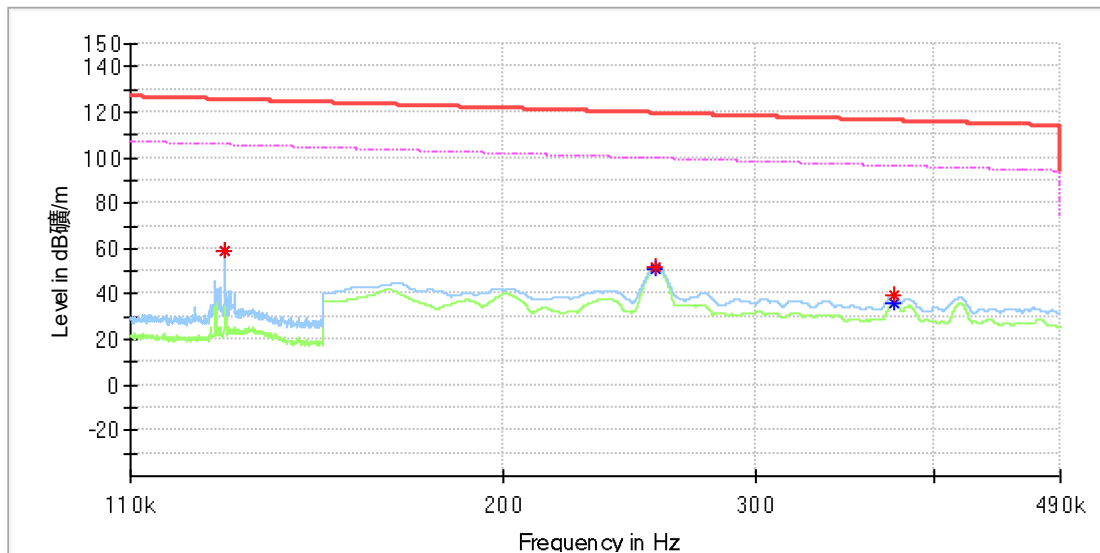


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128000	58.78	---	125.45	66.68	100.0	Y	209.0	20.0
0.128000	---	58.55	105.45	46.90	100.0	Y	209.0	20.0
0.255850	---	51.22	99.44	48.23	100.0	Y	335.0	20.0
0.255900	51.51	---	119.44	67.93	100.0	Y	335.0	20.0
0.375000	---	36.41	96.12	59.71	100.0	Y	349.0	20.0
0.375100	39.37	---	116.12	76.75	100.0	Y	349.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

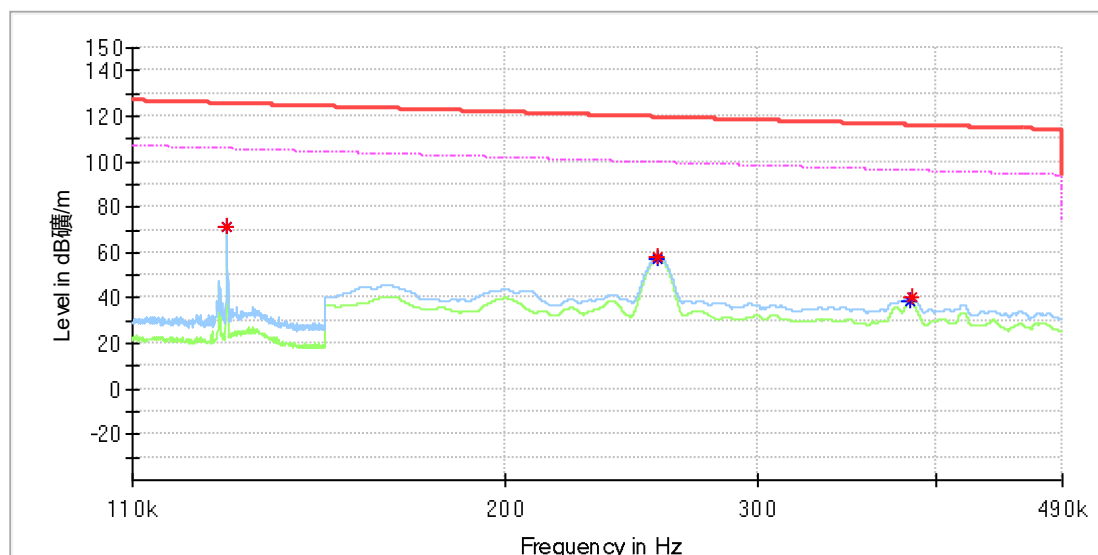


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128000	71.17	---	125.45	54.28	100.0	Z	163.0	20.0
0.128000	---	71.07	105.45	34.38	100.0	Z	163.0	20.0
0.256000	57.80	---	119.44	61.63	100.0	Z	217.0	20.0
0.256000	---	57.49	99.44	41.95	100.0	Z	217.0	20.0
0.383850	---	38.55	95.92	57.37	100.0	Z	236.0	20.0
0.384500	40.74	---	115.91	75.17	100.0	Z	236.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

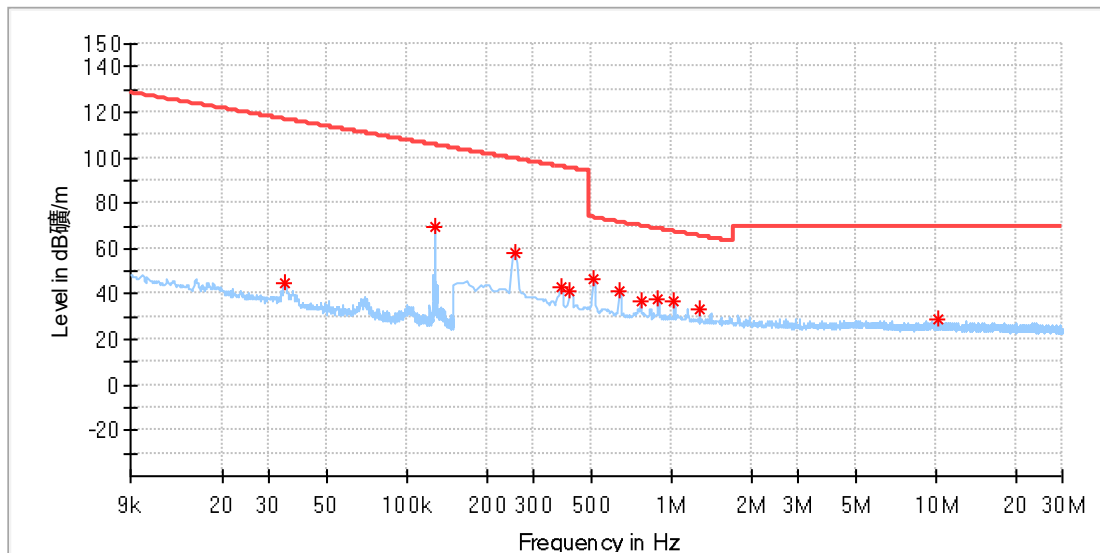

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034682	44.43	116.79	72.36	100.0	X	80.0	19.9
0.128044	69.52	105.45	35.93	100.0	X	134.0	19.9
0.255353	58.43	99.46	41.03	100.0	X	217.0	19.9
0.382655	42.86	95.95	53.08	100.0	X	225.0	19.9
0.413383	41.45	95.28	53.82	100.0	X	300.0	19.9
0.509956	46.40	73.45	27.05	100.0	X	199.0	19.9
0.637258	41.23	71.52	30.29	100.0	X	70.0	19.9
0.764559	36.60	69.95	33.35	100.0	X	228.0	19.9
0.891860	37.55	68.61	31.07	100.0	X	217.0	19.9
1.023552	36.97	67.42	30.45	100.0	X	92.0	19.9
1.278155	33.71	65.50	31.79	100.0	X	221.0	19.9
10.255103	28.76	69.50	40.74	100.0	X	225.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

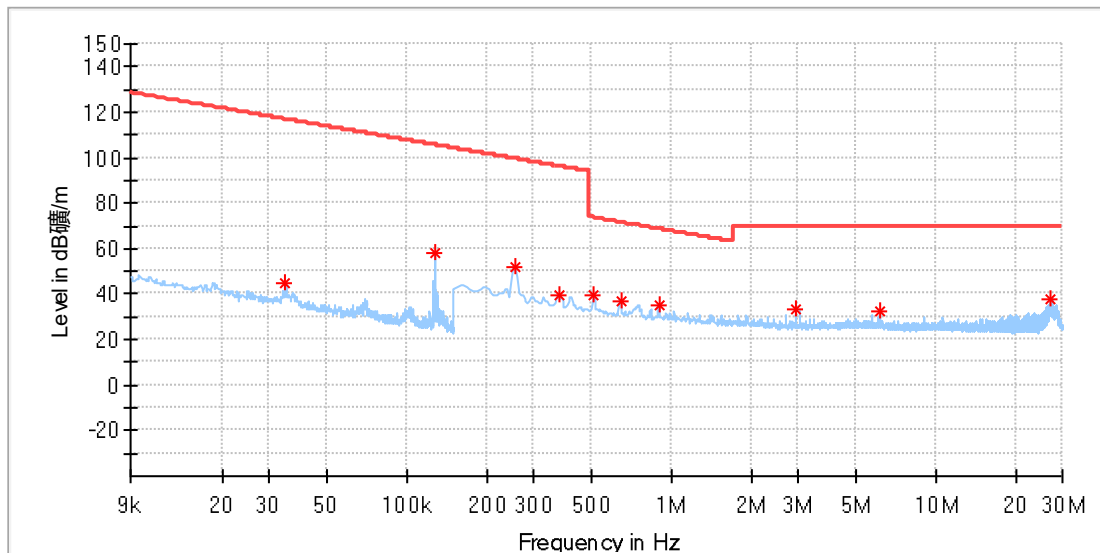

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034682	45.05	116.79	71.74	100.0	Y	46.0	19.9
0.128044	58.52	105.45	46.93	100.0	Y	209.0	19.9
0.255353	51.81	99.46	47.65	100.0	Y	149.0	19.9
0.373875	39.76	96.15	56.39	100.0	Y	188.0	19.9
0.509956	39.84	73.45	33.61	100.0	Y	293.0	19.9
0.641647	37.30	71.47	34.17	100.0	Y	325.0	19.9
0.896250	35.39	68.57	33.18	100.0	Y	318.0	19.9
2.941853	33.27	69.50	36.23	100.0	Y	45.0	20.0
6.141949	32.24	69.50	37.26	100.0	Y	0.0	20.1
27.010610	37.56	69.50	31.94	100.0	Y	16.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

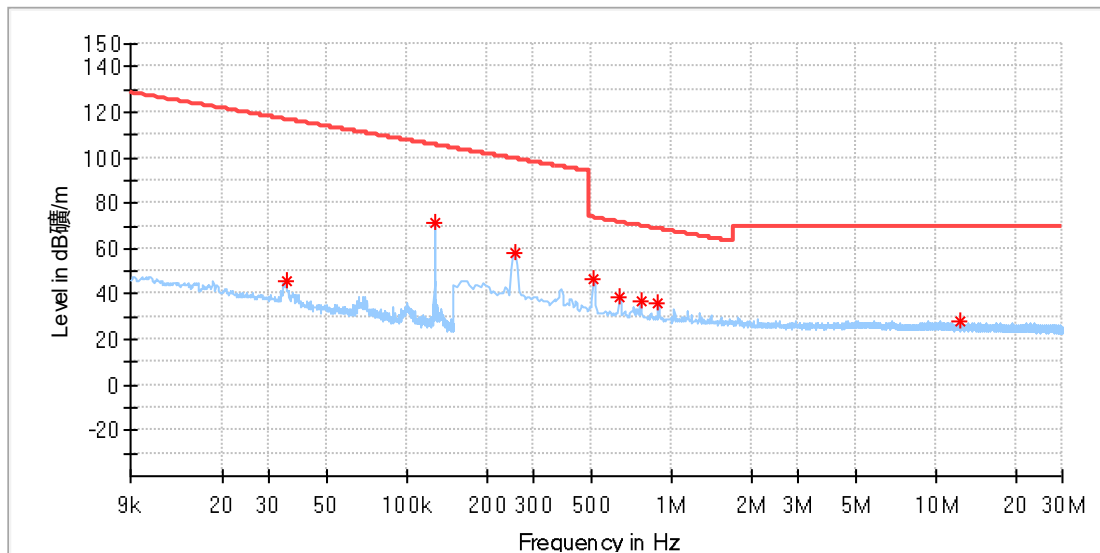

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.035085	45.73	116.69	70.96	100.0	Z	16.0	19.9
0.128044	71.02	105.45	34.43	100.0	Z	167.0	19.9
0.255353	58.09	99.46	41.37	100.0	Z	210.0	19.9
0.509956	46.65	73.45	26.80	100.0	Z	192.0	19.9
0.637258	38.78	71.52	32.74	100.0	Z	52.0	19.9
0.764559	37.01	69.95	32.93	100.0	Z	264.0	19.9
0.891860	36.41	68.61	32.20	100.0	Z	192.0	19.9
12.283147	28.42	69.50	41.08	100.0	Z	63.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

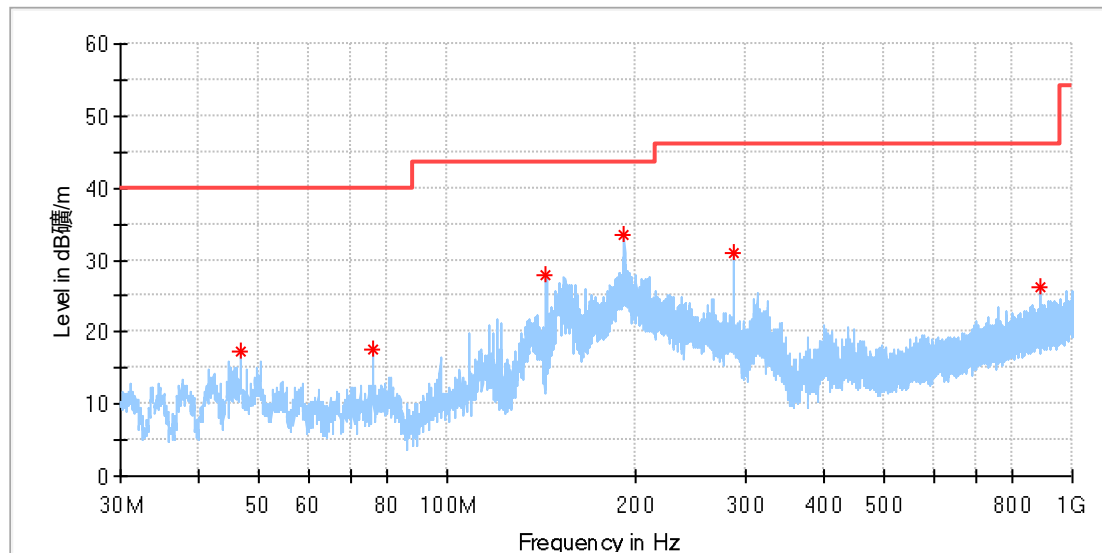

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.713846	17.16	40.00	22.84	100.0	H	302.0	-18.7
76.000385	17.48	40.00	22.52	100.0	H	153.0	-23.5
144.012308	28.03	43.50	15.47	100.0	H	95.0	-22.4
192.027308	33.61	43.50	9.89	100.0	H	354.0	-19.5
288.057308	31.01	46.00	14.99	100.0	H	269.0	-16.6
890.986923	26.21	46.00	19.79	100.0	H	134.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

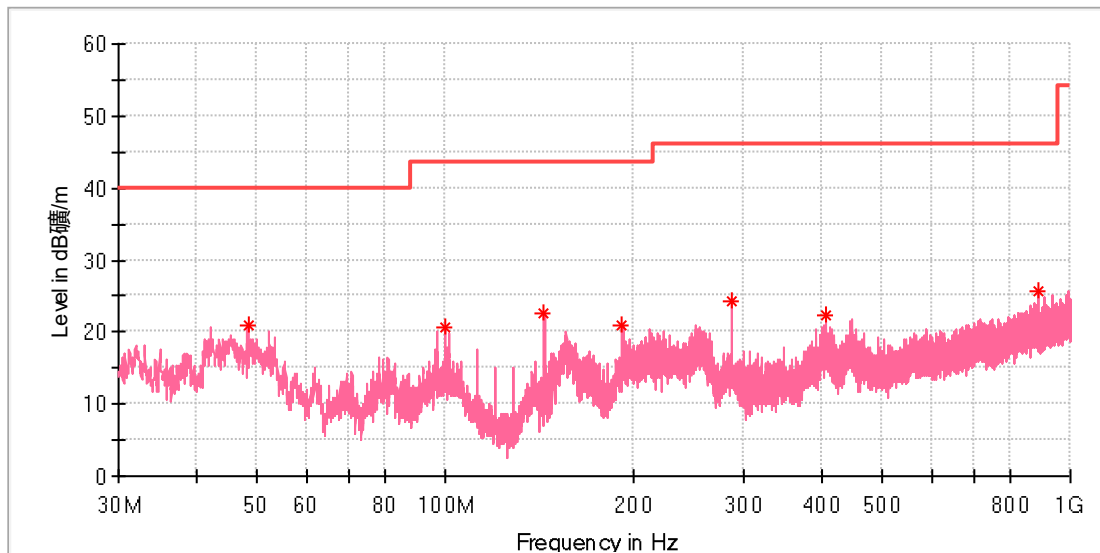

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.318077	20.89	40.00	19.11	100.0	V	34.0	-18.5
99.690769	20.72	43.50	22.78	100.0	V	160.0	-19.2
144.012308	22.71	43.50	20.79	100.0	V	68.0	-22.4
191.990000	20.95	43.50	22.55	100.0	V	343.0	-19.5
288.020000	24.39	46.00	21.61	100.0	V	127.0	-16.6
406.322692	22.42	46.00	23.58	100.0	V	179.0	-13.6
890.986923	25.78	46.00	20.22	100.0	V	225.0	-4.9


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (EPP 10W)

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

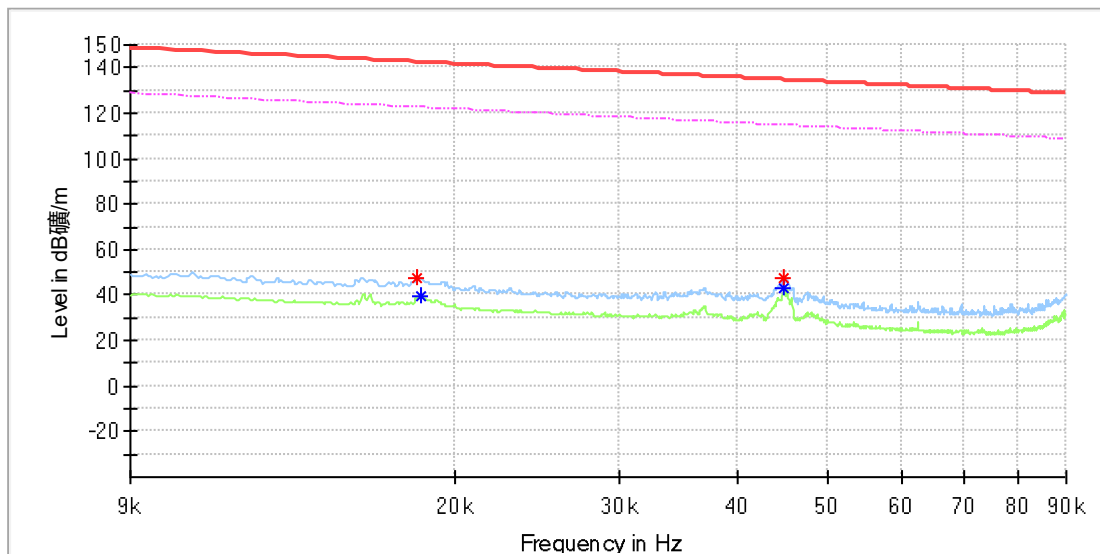


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018199	47.33	---	142.39	95.05	100.0	X	133.0	20.0
0.018373	---	39.83	122.31	82.48	100.0	X	140.0	20.0
0.044929	---	43.21	114.54	71.33	100.0	X	80.0	20.0
0.044929	47.28	---	134.54	87.26	100.0	X	80.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

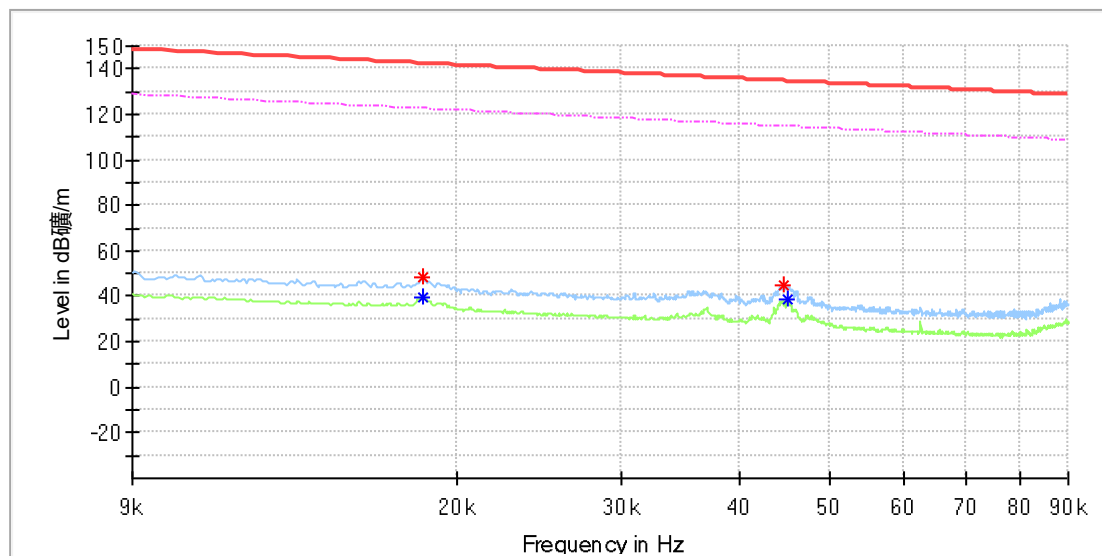


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	48.14	---	142.31	94.17	100.0	Y	195.0	20.0
0.018373	---	39.77	122.31	82.54	100.0	Y	195.0	20.0
0.044698	45.20	---	134.59	89.38	100.0	Y	39.0	20.0
0.045103	---	38.57	114.51	75.94	100.0	Y	32.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

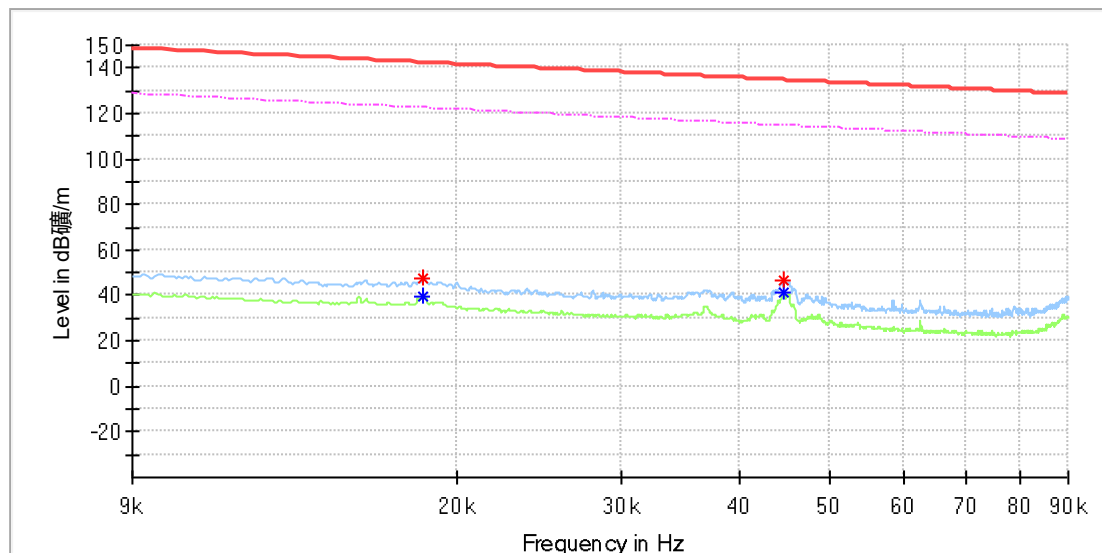


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	---	39.77	122.31	82.54	100.0	Z	290.0	20.0
0.018431	47.83	---	142.28	94.45	100.0	Z	290.0	20.0
0.044698	---	41.19	114.59	73.39	100.0	Z	48.0	20.0
0.044756	46.31	---	134.58	88.27	100.0	Z	65.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

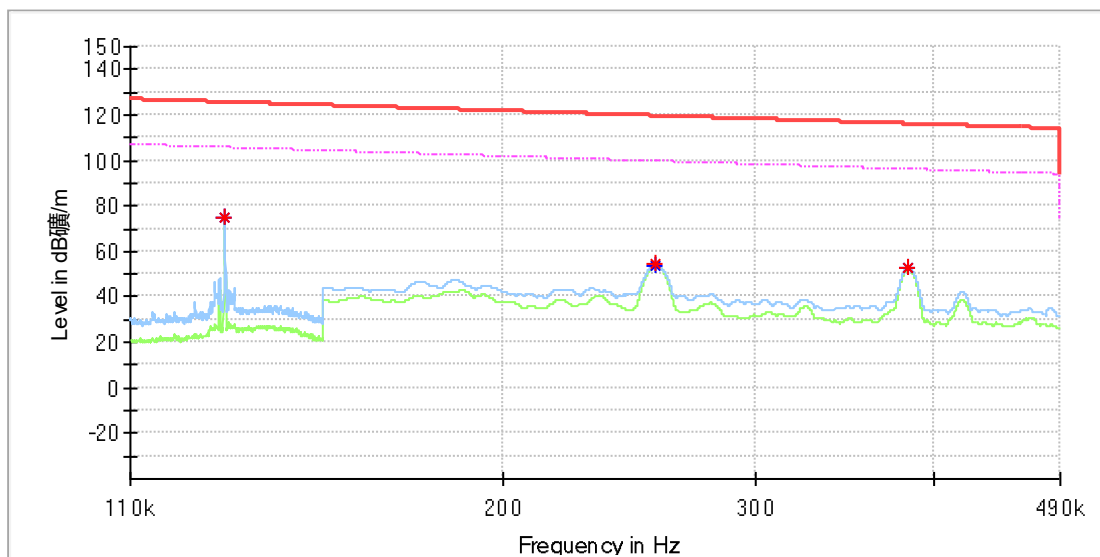


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128000	---	74.67	105.45	30.79	100.0	X	143.0	20.0
0.128000	74.73	---	125.45	50.73	100.0	X	143.0	20.0
0.255950	---	53.71	99.44	45.73	100.0	X	185.0	20.0
0.256000	54.22	---	119.44	65.21	100.0	X	185.0	20.0
0.383950	---	52.62	95.92	43.30	100.0	X	158.0	20.0
0.384000	53.10	---	115.92	62.81	100.0	X	158.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

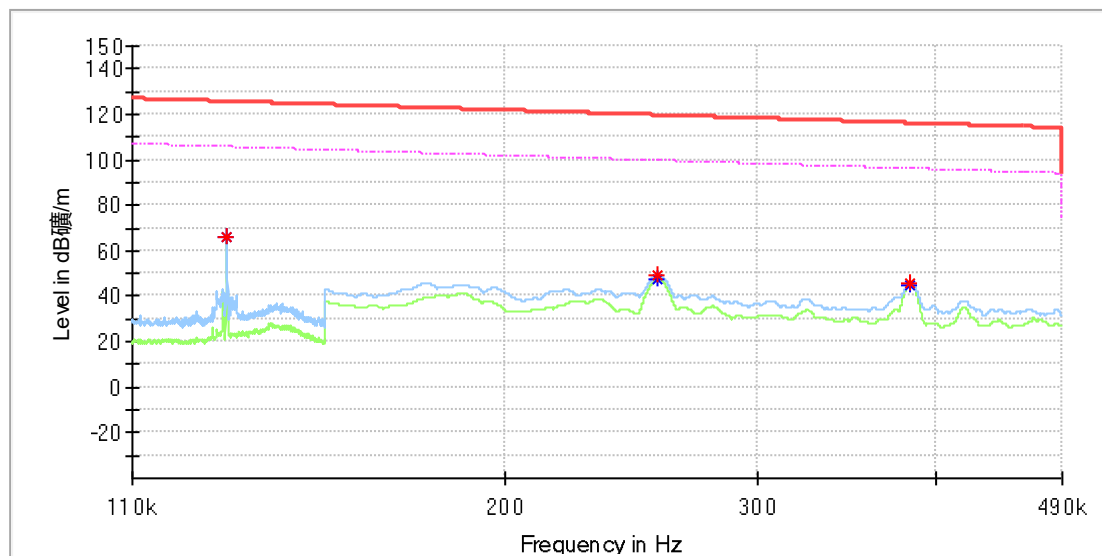


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128000	---	66.27	105.45	39.19	100.0	Y	229.0	20.0
0.128000	66.35	---	125.45	59.11	100.0	Y	229.0	20.0
0.255900	49.33	---	119.44	70.11	100.0	Y	75.0	20.0
0.256000	---	47.39	99.44	52.04	100.0	Y	75.0	20.0
0.383950	45.86	---	115.92	70.05	100.0	Y	83.0	20.0
0.384000	---	45.07	95.92	50.85	100.0	Y	83.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

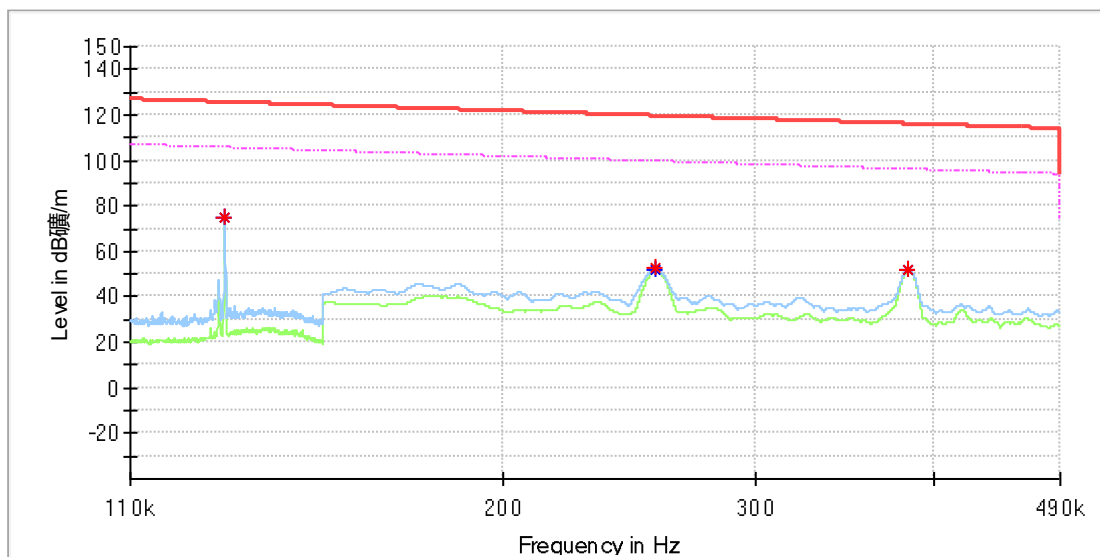


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128000	---	74.50	105.45	30.96	100.0	Z	131.0	20.0
0.128000	74.55	---	125.45	50.90	100.0	Z	131.0	20.0
0.255950	52.42	---	119.44	67.02	100.0	Z	176.0	20.0
0.256000	---	51.47	99.44	47.96	100.0	Z	176.0	20.0
0.383950	---	51.89	95.92	44.02	100.0	Z	158.0	20.0
0.384100	52.27	---	115.91	63.64	100.0	Z	158.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

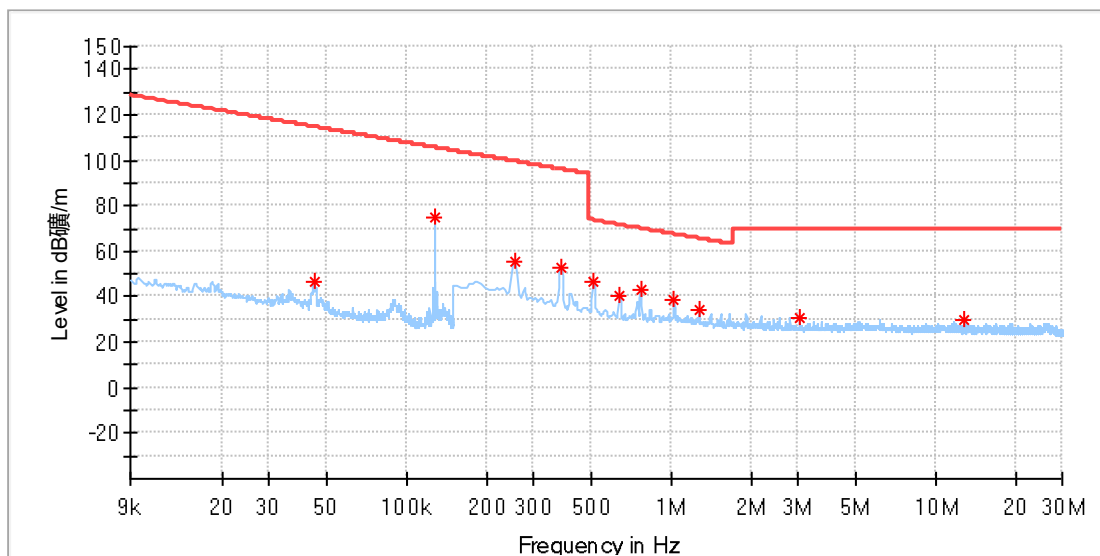

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.044653	46.68	114.60	67.91	100.0	X	76.0	19.9
0.128044	74.58	105.45	30.87	100.0	X	145.0	19.9
0.255353	55.06	99.46	44.40	100.0	X	215.0	19.9
0.382655	53.00	95.95	42.95	100.0	X	161.0	19.9
0.509956	47.01	73.45	26.44	100.0	X	154.0	19.9
0.637258	40.85	71.52	30.68	100.0	X	186.0	19.9
0.764559	43.21	69.95	26.73	100.0	X	150.0	19.9
1.023552	38.87	67.42	28.55	100.0	X	114.0	19.9
1.278155	34.48	65.50	31.02	100.0	X	139.0	19.9
3.069155	31.00	69.50	38.50	100.0	X	100.0	20.0
12.796743	29.79	69.50	39.71	100.0	X	197.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

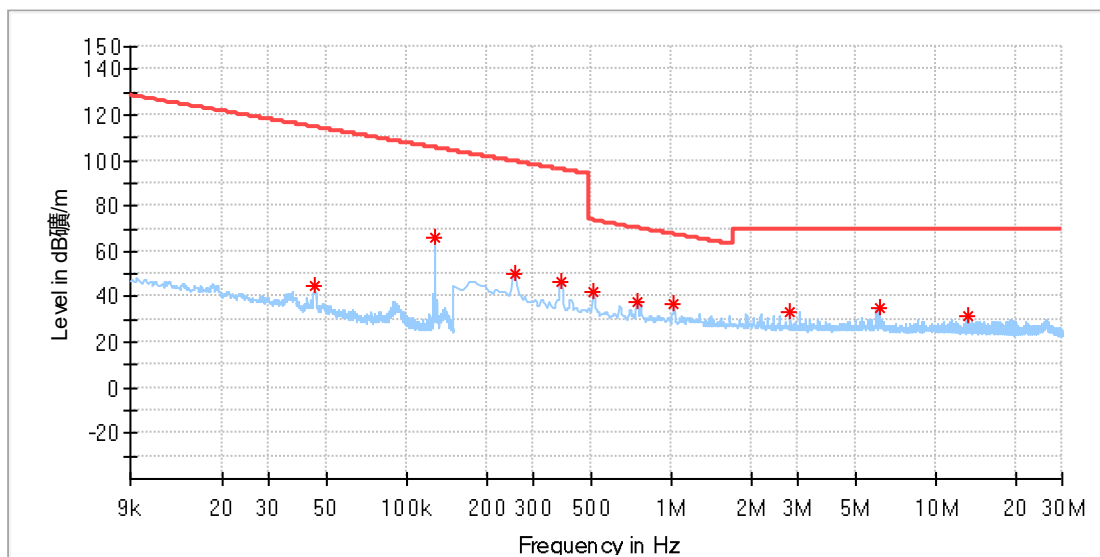

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.044955	45.17	114.54	69.37	100.0	Y	48.0	19.9
0.128044	66.24	105.45	39.22	100.0	Y	229.0	19.9
0.255353	49.80	99.46	49.66	100.0	Y	103.0	19.9
0.382655	46.17	95.95	49.78	100.0	Y	74.0	19.9
0.509956	42.49	73.45	30.97	100.0	Y	67.0	19.9
0.742610	37.77	70.20	32.43	100.0	Y	38.0	19.9
1.023552	36.46	67.42	30.96	100.0	Y	45.0	19.9
2.814552	33.09	69.50	36.41	100.0	Y	63.0	20.0
6.141949	34.86	69.50	34.64	100.0	Y	67.0	20.1
13.310338	31.33	69.50	38.17	100.0	Y	211.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

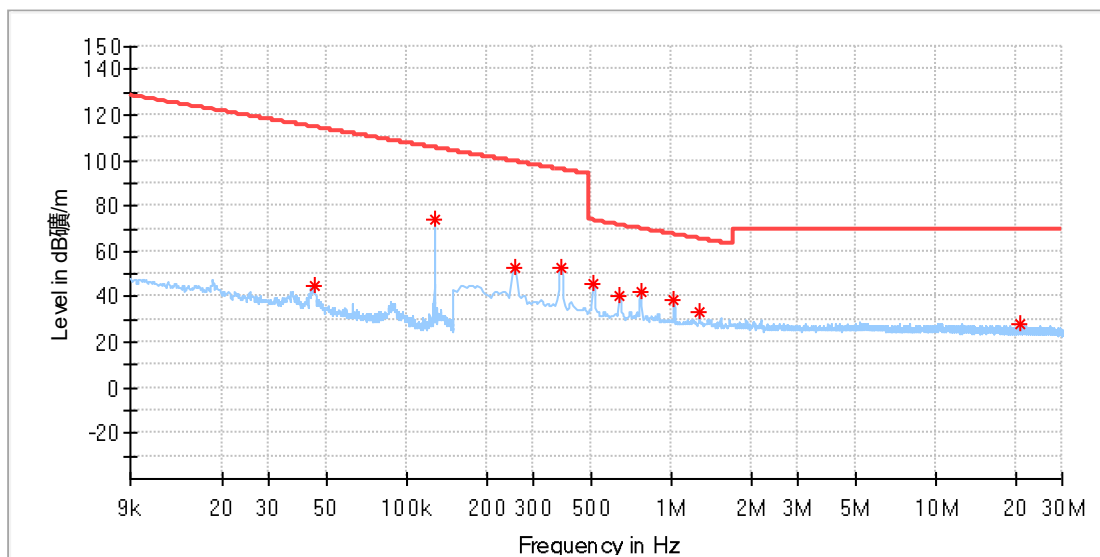

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.044451	44.99	114.64	69.65	100.0	Z	359.0	19.9
0.128044	74.36	105.45	31.09	100.0	Z	133.0	19.9
0.255353	52.36	99.46	47.10	100.0	Z	158.0	19.9
0.382655	52.36	95.95	43.59	100.0	Z	169.0	19.9
0.509956	45.69	73.45	27.76	100.0	Z	133.0	19.9
0.637258	40.30	71.52	31.22	100.0	Z	180.0	19.9
0.764559	42.23	69.95	27.71	100.0	Z	162.0	19.9
1.023552	38.23	67.42	29.19	100.0	Z	180.0	19.9
1.278155	33.67	65.50	31.83	100.0	Z	169.0	19.9
20.676265	28.35	69.50	41.15	100.0	Z	165.0	20.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (MPP 25W)

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

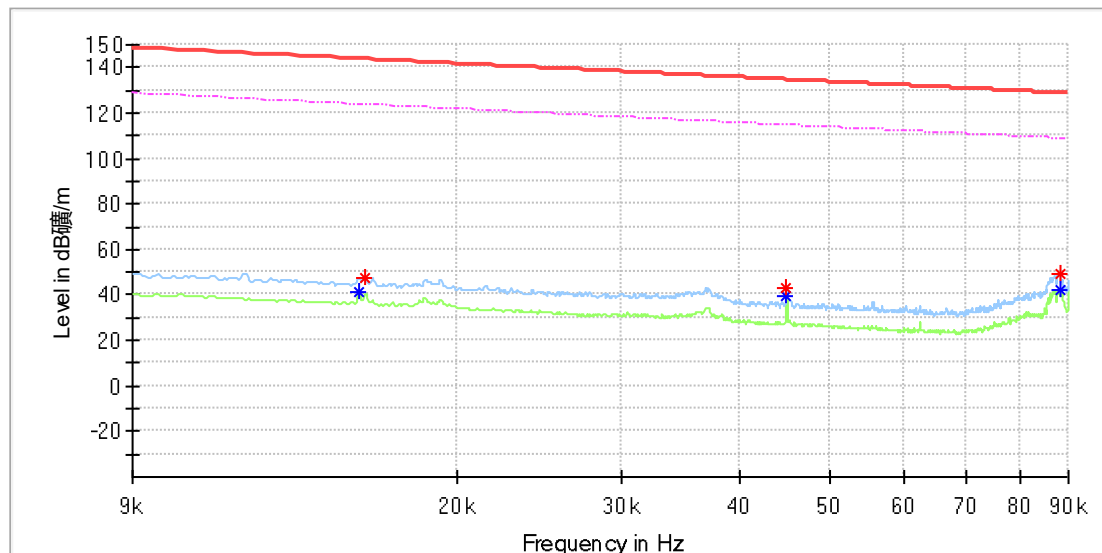


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	---	41.26	123.66	82.40	100.0	X	253.0	20.0
0.015943	47.46	---	143.54	96.08	100.0	X	43.0	20.0
0.044987	---	39.28	114.53	75.25	100.0	X	232.0	20.0
0.044987	43.04	---	134.53	91.49	100.0	X	232.0	20.0
0.088033	---	42.15	108.70	66.56	100.0	X	0.0	20.0
0.088149	48.82	---	128.69	79.87	100.0	X	355.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

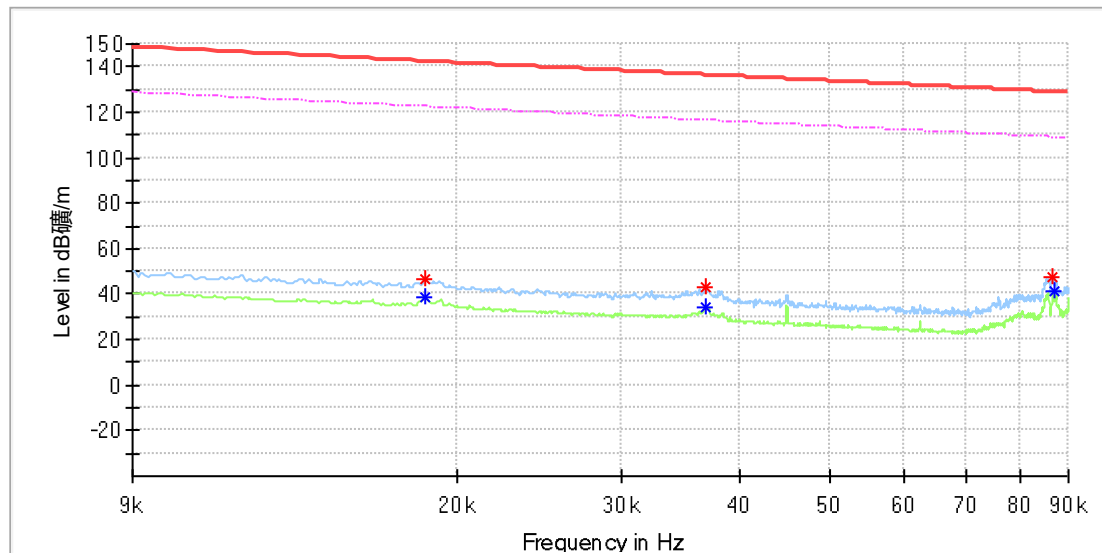


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	46.17	---	142.25	96.08	100.0	Y	8.0	20.0
0.018489	---	38.39	122.25	83.86	100.0	Y	8.0	20.0
0.036829	43.50	---	136.27	92.76	100.0	Y	151.0	20.0
0.036887	---	34.05	116.25	82.20	100.0	Y	151.0	20.0
0.086586	47.75	---	128.85	81.09	100.0	Y	32.0	20.0
0.086818	---	41.67	108.82	67.16	100.0	Y	44.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

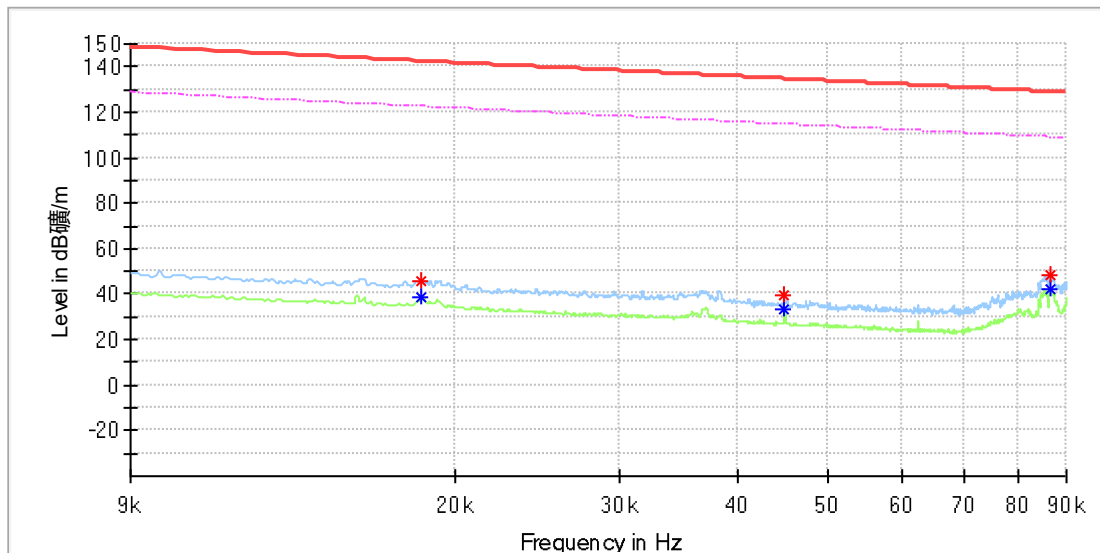


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018373	45.54	---	142.31	96.76	100.0	Z	141.0	20.0
0.018431	---	38.88	122.28	83.39	100.0	Z	343.0	20.0
0.044987	39.25	---	134.53	95.28	100.0	Z	248.0	20.0
0.044987	---	33.15	114.53	81.38	100.0	Z	248.0	20.0
0.086471	48.70	---	128.86	80.16	100.0	Z	44.0	20.0
0.086644	---	41.96	108.84	66.88	100.0	Z	31.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

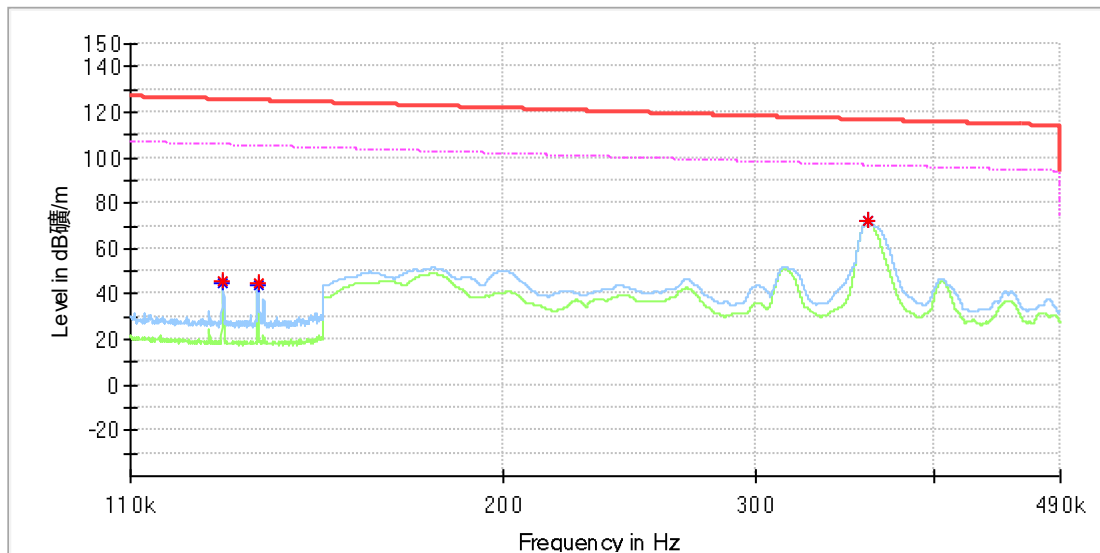


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127572	45.64	---	125.48	79.84	100.0	X	116.0	20.0
0.127600	---	44.75	105.48	60.73	100.0	X	122.0	20.0
0.135000	45.18	---	124.99	79.81	100.0	X	231.0	20.0
0.135000	---	44.09	104.99	60.91	100.0	X	231.0	20.0
0.360050	---	72.30	96.48	24.17	100.0	X	234.0	20.0
0.360050	72.54	---	116.48	43.94	100.0	X	234.0	20.0

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

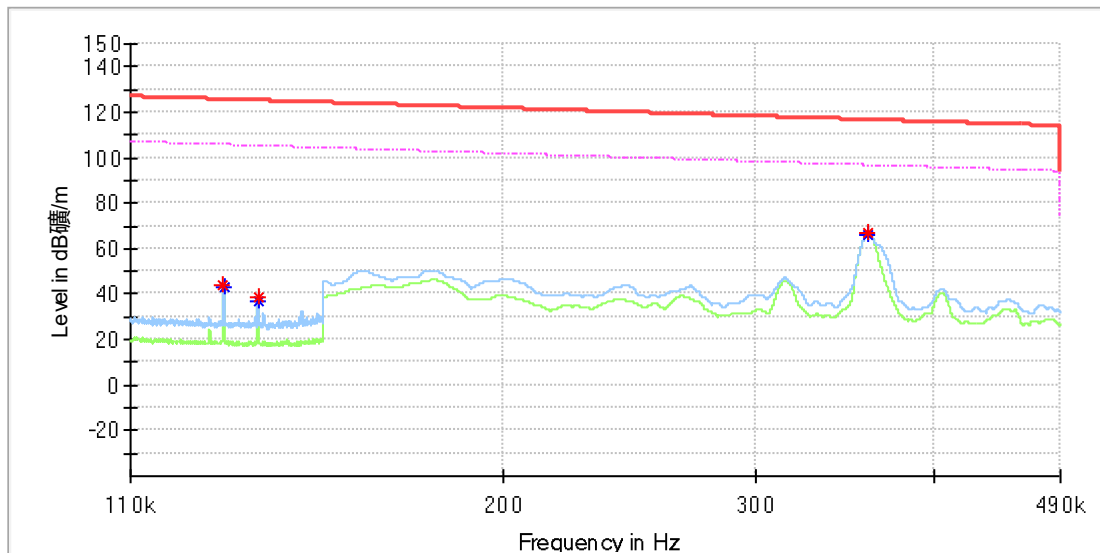


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127743	44.00	---	125.47	81.47	100.0	Y	69.0	20.0
0.127800	---	43.18	105.47	62.28	100.0	Y	73.0	20.0
0.135000	39.08	---	124.99	85.91	100.0	Y	319.0	20.0
0.135000	---	36.80	104.99	68.19	100.0	Y	319.0	20.0
0.360050	---	66.07	96.48	30.41	100.0	Y	322.0	20.0
0.360050	66.53	---	116.48	49.94	100.0	Y	322.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

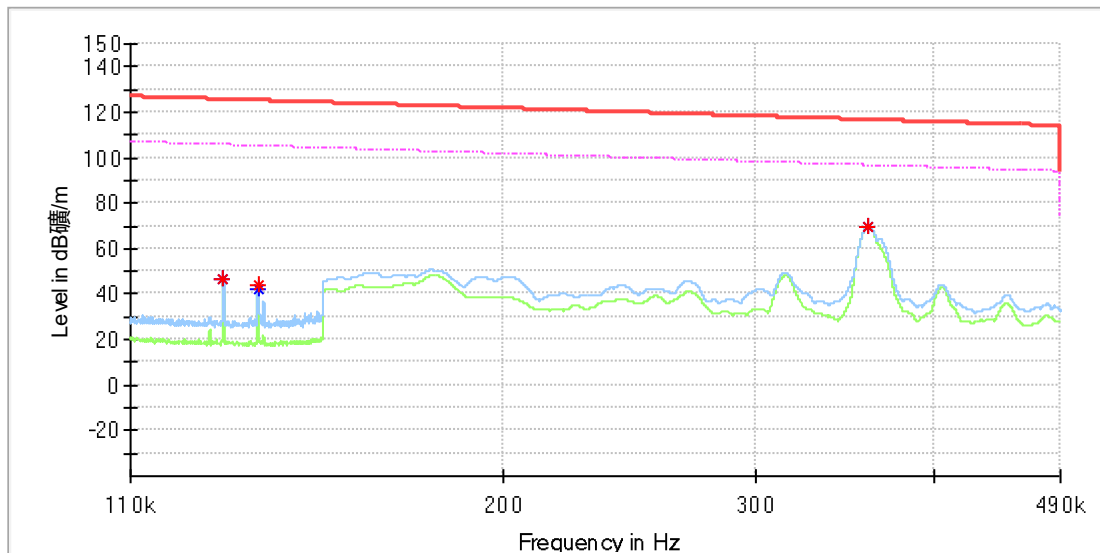


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127657	47.01	---	125.48	78.46	100.0	Z	73.0	20.0
0.127657	---	46.40	105.48	59.08	100.0	Z	73.0	20.0
0.135000	43.73	---	124.99	81.26	100.0	Z	244.0	20.0
0.135000	---	42.57	104.99	62.42	100.0	Z	244.0	20.0
0.360000	69.90	---	116.48	46.57	100.0	Z	242.0	20.0
0.360050	---	69.60	96.48	26.88	100.0	Z	242.0	20.0

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

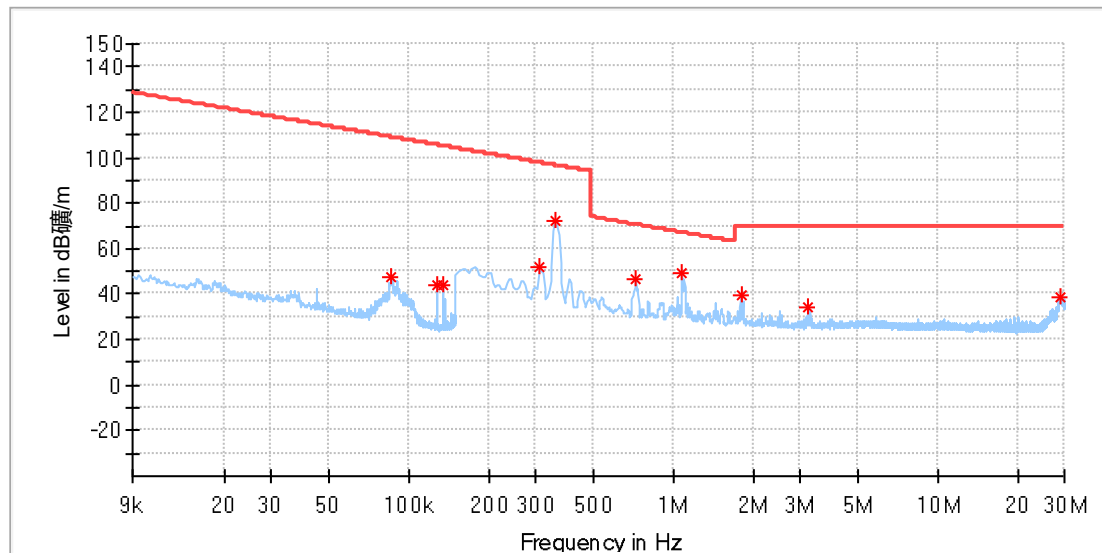

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.086046	47.51	108.90	61.39	100.0	X	0.0	19.9
0.127339	44.19	105.50	61.31	100.0	X	111.0	19.9
0.134994	44.36	104.99	60.63	100.0	X	218.0	19.9
0.312419	51.77	97.71	45.94	100.0	X	230.0	19.9
0.356316	72.35	96.57	24.21	100.0	X	241.0	19.9
0.716272	46.82	70.51	23.69	100.0	X	83.0	19.9
1.076228	49.56	66.99	17.42	100.0	X	234.0	19.9
1.796140	39.40	69.50	30.10	100.0	X	63.0	20.0
3.240353	34.34	69.50	35.16	100.0	X	183.0	20.0
28.770882	38.74	69.50	30.76	100.0	X	112.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

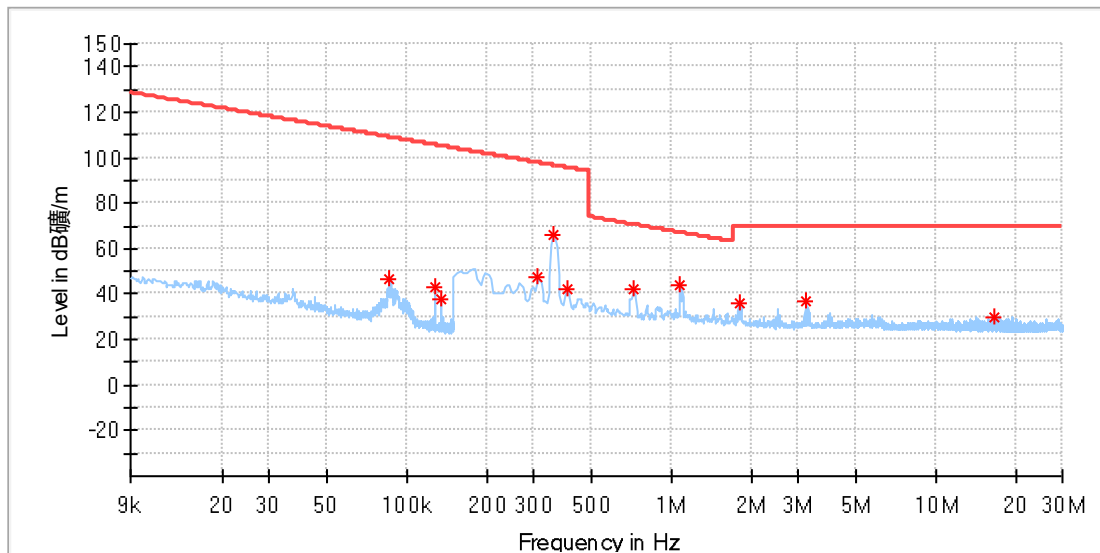

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.085543	46.48	108.95	62.47	100.0	Y	35.0	19.9
0.127742	43.46	105.47	62.01	100.0	Y	67.0	19.9
0.134994	38.04	104.99	66.96	100.0	Y	328.0	19.9
0.312419	47.28	97.71	50.42	100.0	Y	323.0	19.9
0.356316	66.46	96.57	30.10	100.0	Y	319.0	19.9
0.404603	42.55	95.46	52.91	100.0	Y	323.0	19.9
0.720662	42.61	70.46	27.85	100.0	Y	30.0	19.9
1.076228	44.31	66.99	22.68	100.0	Y	319.0	19.9
1.796140	36.10	69.50	33.40	100.0	Y	352.0	20.0
3.235963	36.47	69.50	33.03	100.0	Y	41.0	20.0
16.650905	29.99	69.50	39.51	100.0	Y	48.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

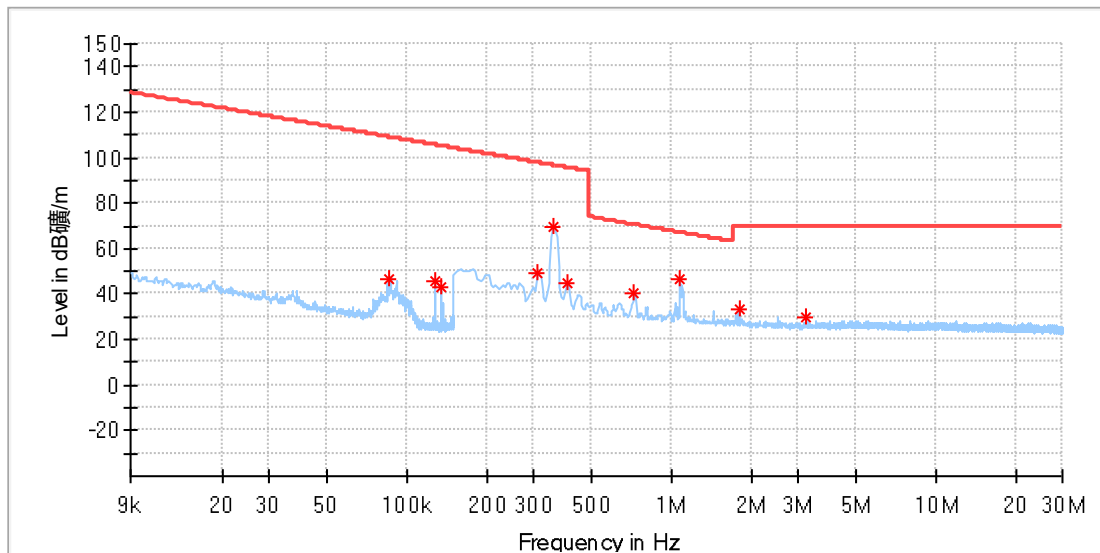

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.085644	46.87	108.94	62.07	100.0	Z	17.0	19.9
0.127641	45.70	105.48	59.78	100.0	Z	90.0	19.9
0.134994	43.12	104.99	61.87	100.0	Z	222.0	19.9
0.312419	49.13	97.71	48.58	100.0	Z	215.0	19.9
0.356316	69.83	96.57	26.74	100.0	Z	240.0	19.9
0.400213	45.05	95.56	50.51	100.0	Z	251.0	19.9
0.716272	40.04	70.51	30.47	100.0	Z	290.0	19.9
1.076228	46.55	66.99	20.43	100.0	Z	236.0	19.9
1.796140	33.60	69.50	35.90	100.0	Z	100.0	20.0
3.240353	29.46	69.50	40.04	100.0	Z	132.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Charging
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

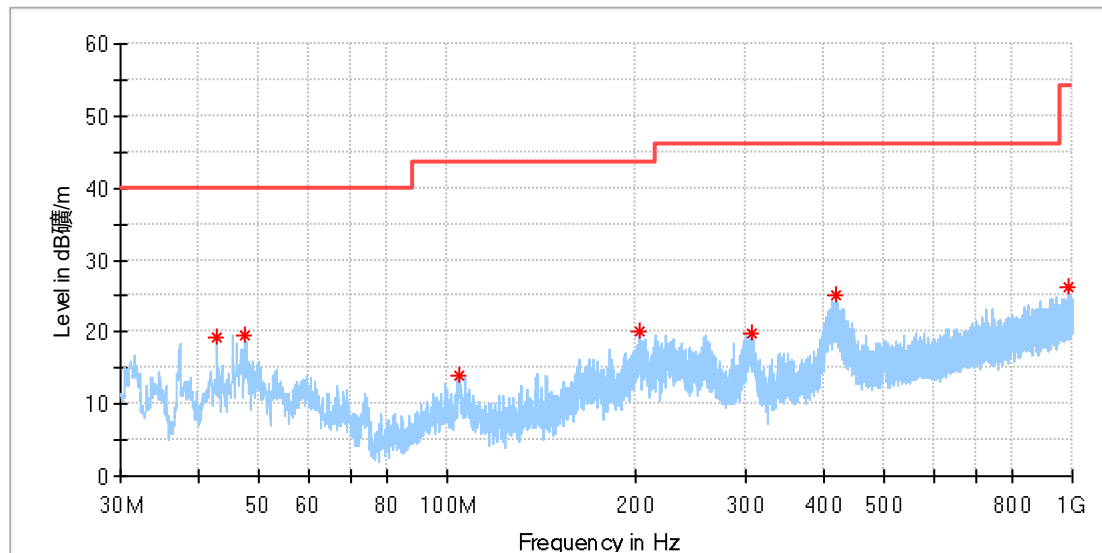

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.759231	19.32	40.00	20.68	100.0	H	56.0	-19.5
47.497308	19.46	40.00	20.54	100.0	H	110.0	-18.6
104.690000	14.09	43.50	29.41	100.0	H	128.0	-18.9
203.443462	20.03	43.50	23.47	100.0	H	94.0	-19.0
306.599231	19.92	46.00	26.08	100.0	H	119.0	-16.1
419.455000	25.20	46.00	20.80	100.0	H	94.0	-13.3
986.233462	26.24	54.00	27.76	100.0	H	15.0	-3.7

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Charging
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

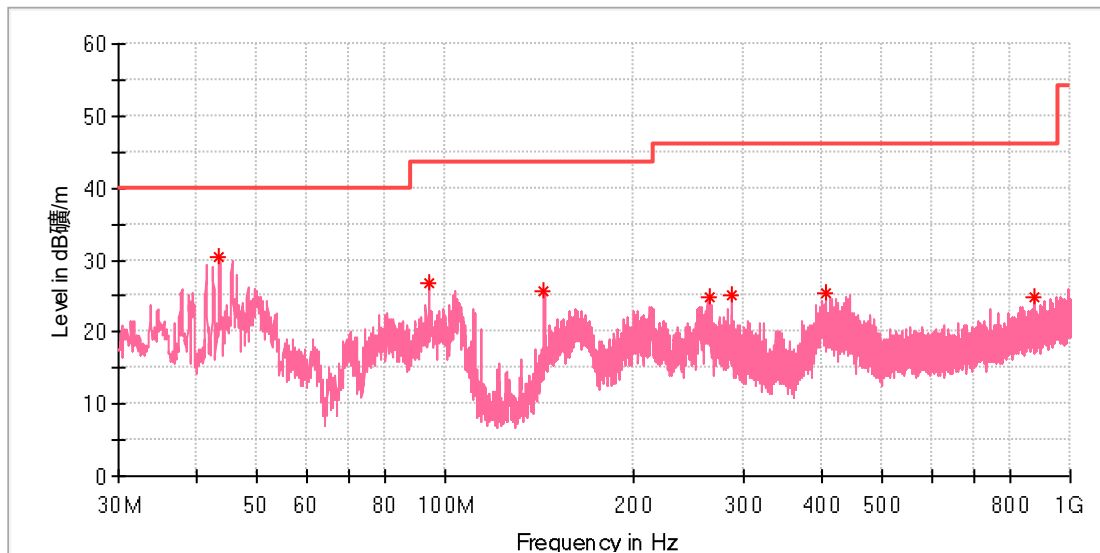

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.542692	30.53	40.00	9.47	100.0	V	0.0	-19.3
94.355769	26.83	43.50	16.67	100.0	V	256.0	-20.0
144.012308	25.79	43.50	17.71	100.0	V	72.0	-22.4
264.068462	24.78	46.00	21.22	100.0	V	0.0	-17.0
288.057308	25.04	46.00	20.96	100.0	V	146.0	-16.6
405.352692	25.29	46.00	20.71	100.0	V	170.0	-13.6
878.339615	24.80	46.00	21.20	100.0	V	193.0	-5.1


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Standby mode

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Standby
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

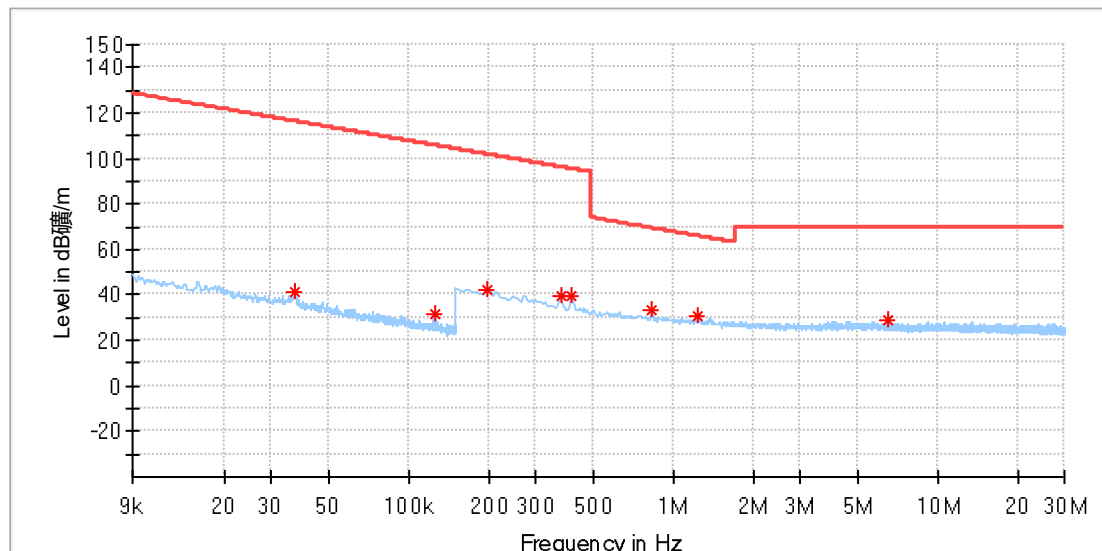

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	41.27	116.20	74.93	100.0	X	176.0	19.9
0.125526	31.34	105.62	74.29	100.0	X	167.0	19.9
0.198287	42.20	101.65	59.45	100.0	X	2.0	19.8
0.373875	39.26	96.15	56.89	100.0	X	96.0	19.9
0.413383	39.14	95.28	56.13	100.0	X	279.0	19.9
0.826015	33.17	69.28	36.11	100.0	X	272.0	19.9
1.243037	30.44	65.74	35.30	100.0	X	279.0	19.9
6.414110	28.53	69.50	40.97	100.0	X	356.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Standby
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

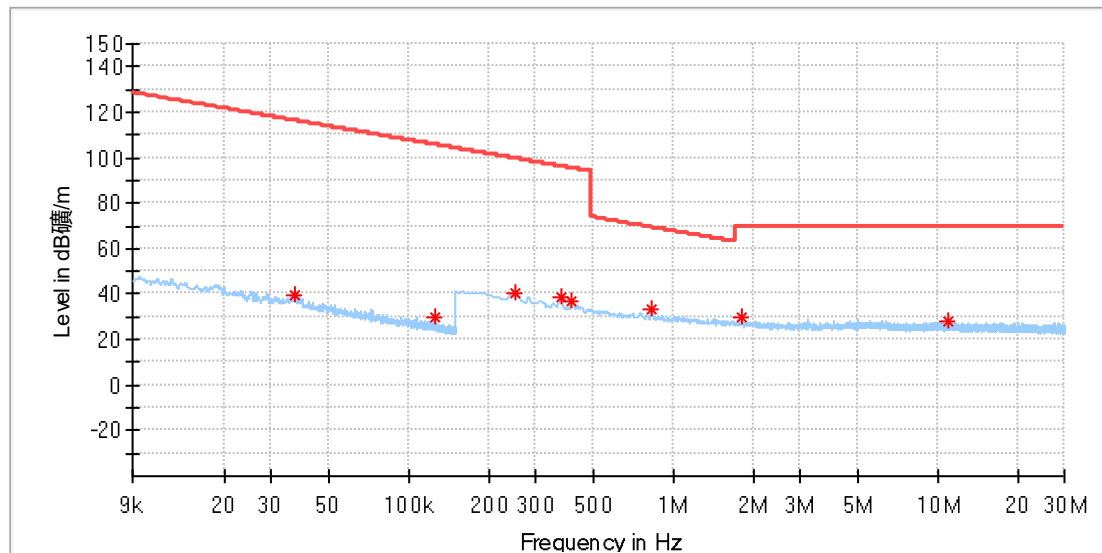

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036696	39.88	116.30	76.42	100.0	Y	187.0	19.9
0.125124	30.04	105.65	75.61	100.0	Y	348.0	19.9
0.250963	40.41	99.61	59.20	100.0	Y	269.0	19.9
0.373875	38.78	96.15	57.36	100.0	Y	1.0	19.9
0.413383	37.31	95.28	57.97	100.0	Y	172.0	19.9
0.826015	33.08	69.28	36.19	100.0	Y	168.0	19.9
1.818088	29.63	69.50	39.87	100.0	Y	204.0	20.0
10.922338	28.34	69.50	41.16	100.0	Y	326.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Standby
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

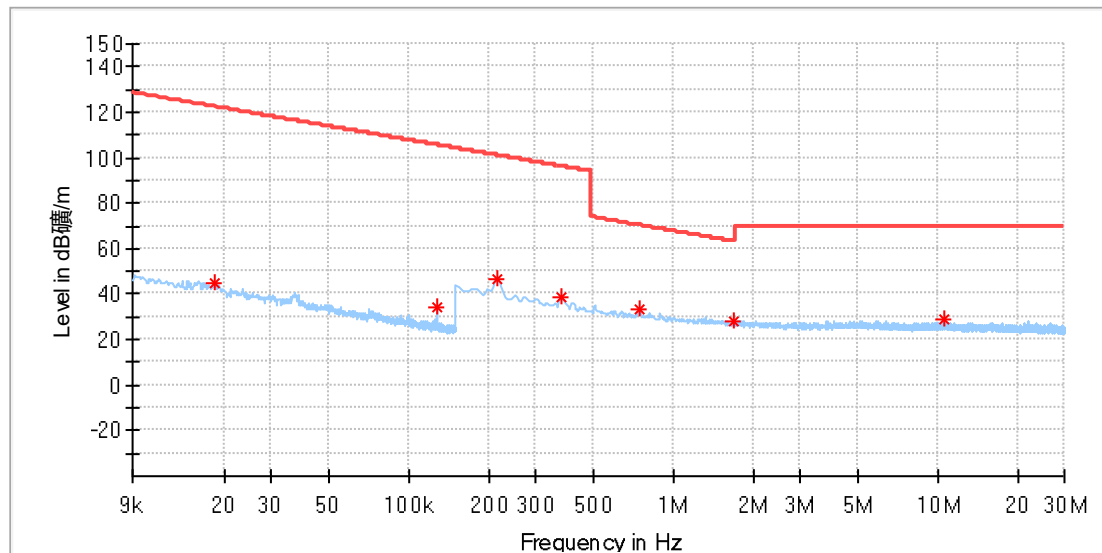

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	45.16	122.26	77.10	100.0	Z	100.0	19.9
0.126836	34.15	105.53	71.38	100.0	Z	73.0	19.9
0.215846	46.39	100.92	54.53	100.0	Z	298.0	19.8
0.373875	38.29	96.15	57.85	100.0	Z	218.0	19.9
0.742610	33.55	70.20	36.64	100.0	Z	48.0	19.9
1.673228	27.98	63.16	35.18	100.0	Z	247.0	20.0
10.566772	28.49	69.50	41.01	100.0	Z	114.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Magnetic Wireless Car Charger
Model: W758
Test Mode: Standby
Order No/Sample No: 168568369/A004069434-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

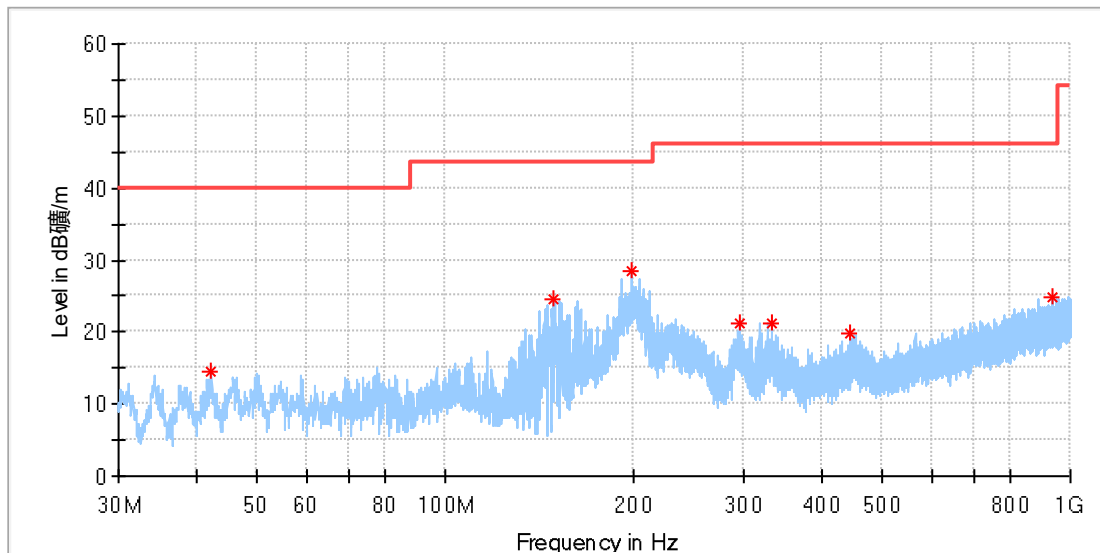

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.236923	14.55	40.00	25.45	100.0	H	237.0	-19.6
149.160769	24.61	43.50	18.89	100.0	H	320.0	-22.3
198.817308	28.49	43.50	15.01	100.0	H	0.0	-19.1
295.071154	21.26	46.00	24.74	100.0	H	277.0	-16.4
331.931154	21.35	46.00	24.65	100.0	H	261.0	-15.3
445.271923	19.85	46.00	26.15	100.0	H	253.0	-12.9
936.912692	24.93	46.00	21.07	100.0	H	59.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Magnetic Wireless Car Charger
Model:	W758
Test Mode:	Standby
Order No/Sample No:	168568369/A004069434-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

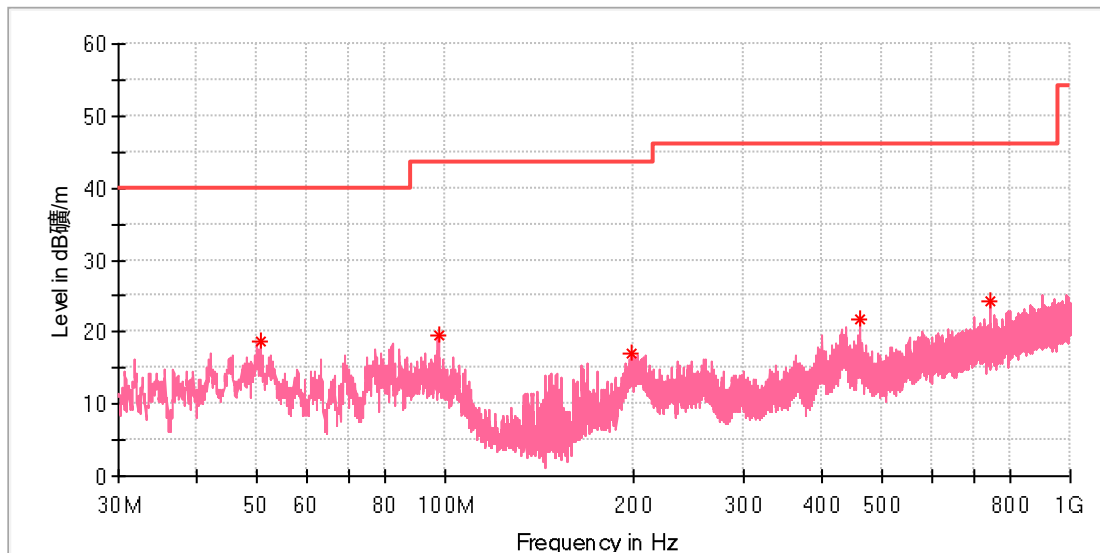

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.668462	18.66	40.00	21.34	100.0	V	37.0	-18.4
97.452308	19.47	43.50	24.03	100.0	V	303.0	-19.5
198.369615	17.10	43.50	26.40	100.0	V	201.0	-19.1
462.097692	21.68	46.00	24.32	100.0	V	161.0	-12.5
742.465000	24.20	46.00	21.80	100.0	V	153.0	-7.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---