

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26IGVZ 001	Auftrags-Nr.: <i>Order no.:</i>	27240502	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-06-15	
Auftraggeber: <i>Client:</i>	Ugreen Group Limited Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, China			
Prüfgegenstand: <i>Test item:</i>	2-in-1 Wireless Charger			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	W759			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-07-10	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004328958-001~007			
Prüfzeitraum: <i>Testing period:</i>	2026-07-15 - 2026-08-04			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2026-08-19	Ausstellungsdatum: <i>Issue date:</i>		2026-08-19
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:		Sachverständige(r)/Expert
Sonstiges / <i>Other:</i>	FCC ID: 2AQI5-W759			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26IGVZ 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26IGVZ 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2025-10-30	2026-10-29
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2025-10-30	2026-10-29
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2027-07-20
Artificial Mains Network	R&S	ENV432	101546	2027-02-03
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 2-in-1 Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	2-in-1 Wireless Charger
Type Designation:	W759 Note: The W759 has two appearance colors, they are only difference in appearance color, and the other electronic and electrical parts are the same.
Product Number (P/N) code:	95000, 95000P, 95000X, 95000A, 95000B, 95000U, 95000JP, 95000ZD, 95000T, 55313, 55313P, 55313X, 55313A, 55313B, 55313U, 55313JP, 55313ZD, 55313T
FCC ID:	2AQI5-W759
Operating Voltage:	USB-C1(IN) Input: 9Vdc, 3A/ 12Vdc, 3A / 15dc, 3A Wireless Charging Total Output Power: 30W Max Wireless Charging Output Power: iPhone 25.0W Max, AirPods 5.0W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Wireless charging output power:	Magnetic Wireless Charger: 5W / 7.5W / 10W / 15W / 25W Max. True Wireless Stereo (TWS) Wireless Charging: 5W Max.
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 360kHz
Operating Frequency:	Coil1: 110.5 - 148.5 kHz, 360 kHz Coil2: 110.5 - 148.5 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	Coil1: 5W / 7.5W / 10W for 110.5 - 148.5 kHz, 15W / 25W for 360 kHz Coil2: 5W for 110.5 - 148.5 kHz

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, MPP, 15W (Phone)
- E. On, Wireless Charging, MPP, 25W (Phone)
- F. On, Wireless Charging, 5W [True Wireless Stereo (TWS)]
- G. On, Co-location mode (Worst case mode A~E + mode F)
- H. Standby1 (EUT Open)
- I. Standby2 (EUT Fold)

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W759 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
AirPods	Apple	Airpods Pro2	N/A
Smart Phone	Apple	iPhone 16 Plus	N/A
Wireless charging load1	Ugreen	---	Provided by client
Wireless charging load2	Ugreen	---	Provided by client
AC/DC Adapter	Ugreen	W0453	Output: 5V~3A/ 9V~3A/ 12V~3A/ 15V~3A/ 20V~2.25A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

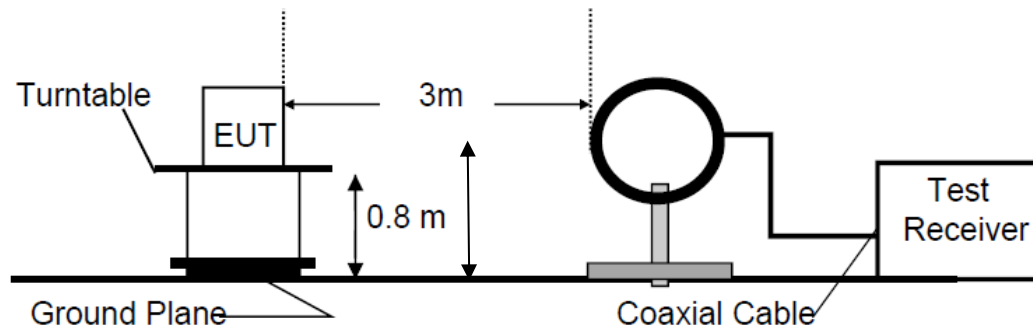


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


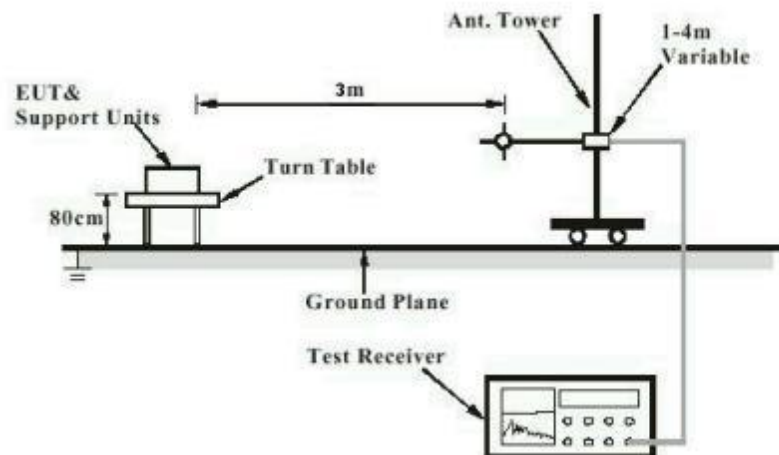


Diagram of Measurement Configuration for Mains Conduction Measurement

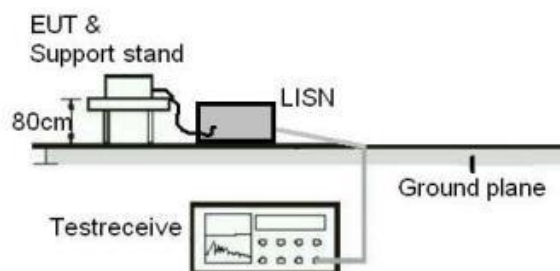

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN26IGVZ 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-07-15 to 2026-07-20
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H, I
Ambient temperature	: 21.8 °C
Relative humidity	: 49 %
Atmospheric pressure	: 101 kPa

This testing was carried out on all operation modes, but only the worst case and representative cases was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26IGVZ 001
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.209 & 15.205
Basic standard : ANSI C63.10: 2020
Limits : Refer to 15.209(a)
Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2026-07-25 to 2026-07-29
Input voltage : AC 120V, 60Hz
Operation mode : A, B, C, D, E, F, G, H, I
Ambient temperature : Refer to test result
Relative humidity : Refer to test result
Atmospheric pressure : 101 kPa

This testing was carried out on all operation modes, but only the worst case and representative cases was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26IGVZ 001
Test Report No.:Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-08-02 to 2026-08-04
Input voltage	: AC 120V, 60Hz
Input voltage	: A, B, C, D, E, F, G, H, I
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

This testing was carried out on all operation modes, but only the worst case and representative cases was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (10W).....	2
Wireless charging (25W).....	3
Wireless charging (TWS 5W)	4
Standby mode	5
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	6
Wireless charging (10W).....	6
Wireless charging (25W).....	17
Wireless charging (TWS 5W)	28
Wireless charging (Co-location).....	39
Standby1 mode	44
Standby2 mode	49
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	54


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (10W)

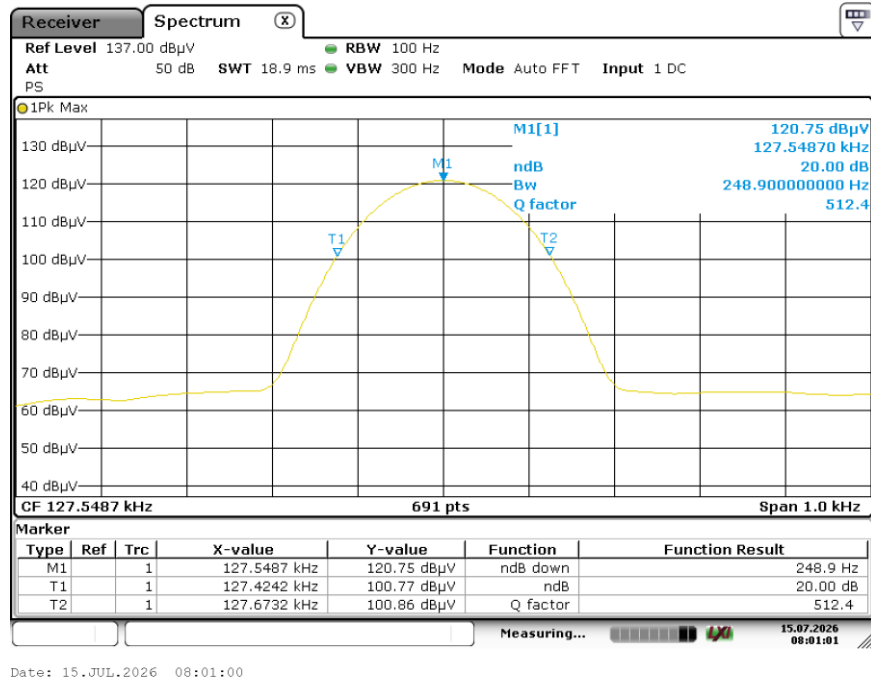


Date: 15.JUL.2026 08:01:00

Wireless charging (25W)

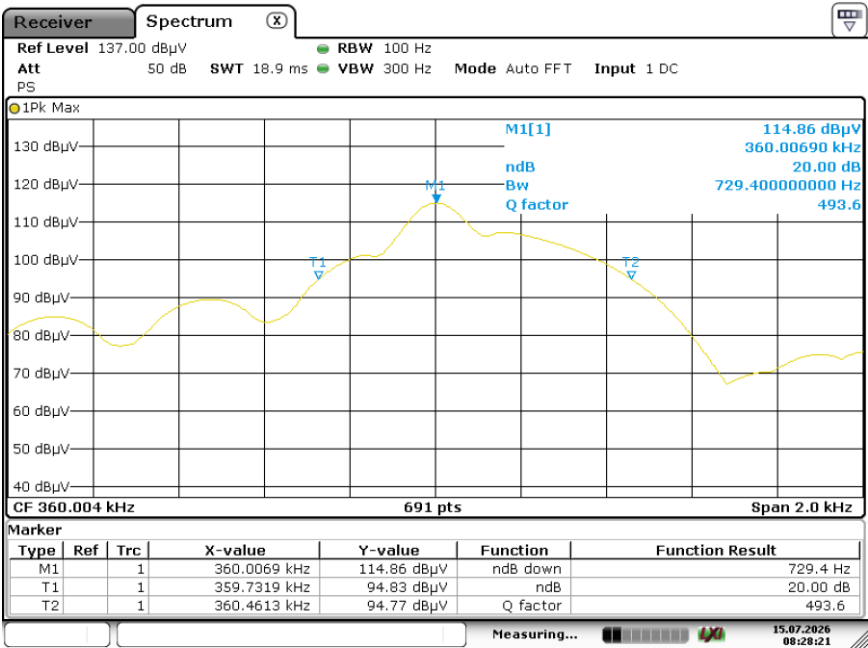


Date: 15.JUL.2026 08:28:20

Wireless charging (TWS 5W)

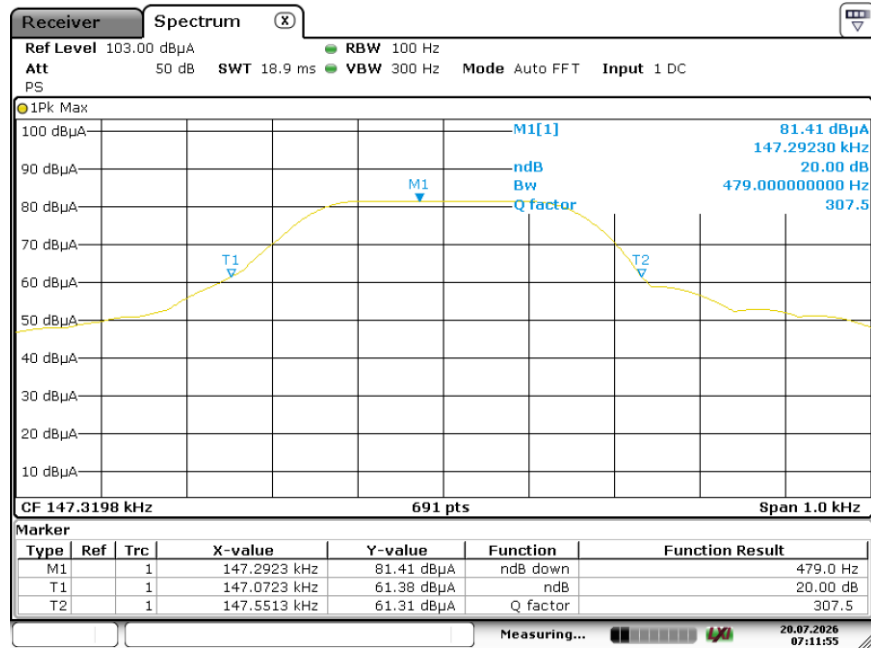

Date: 20.JUL.2026 07:11:55

Standby mode

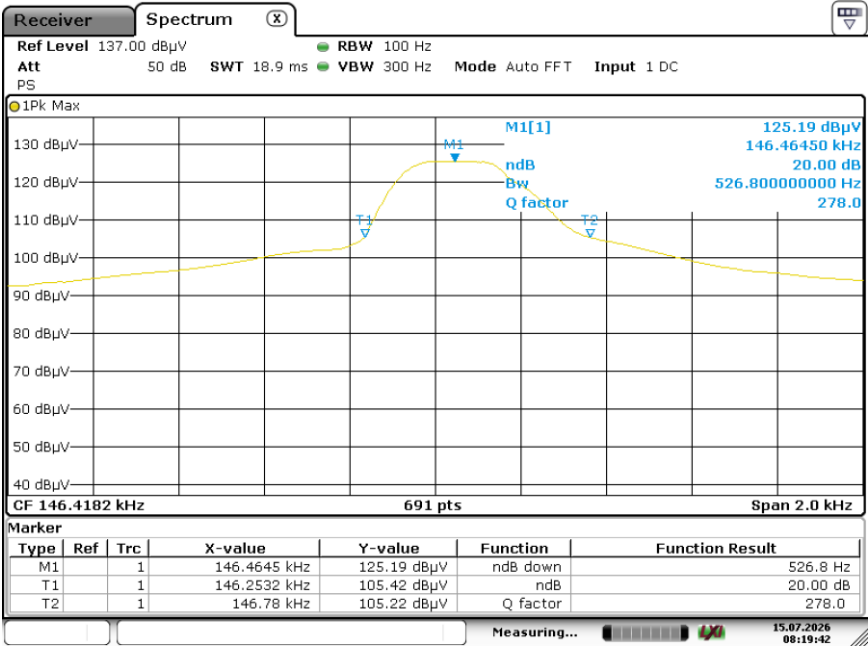

Date: 15.JUL.2026 08:19:41


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (10W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Charging
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

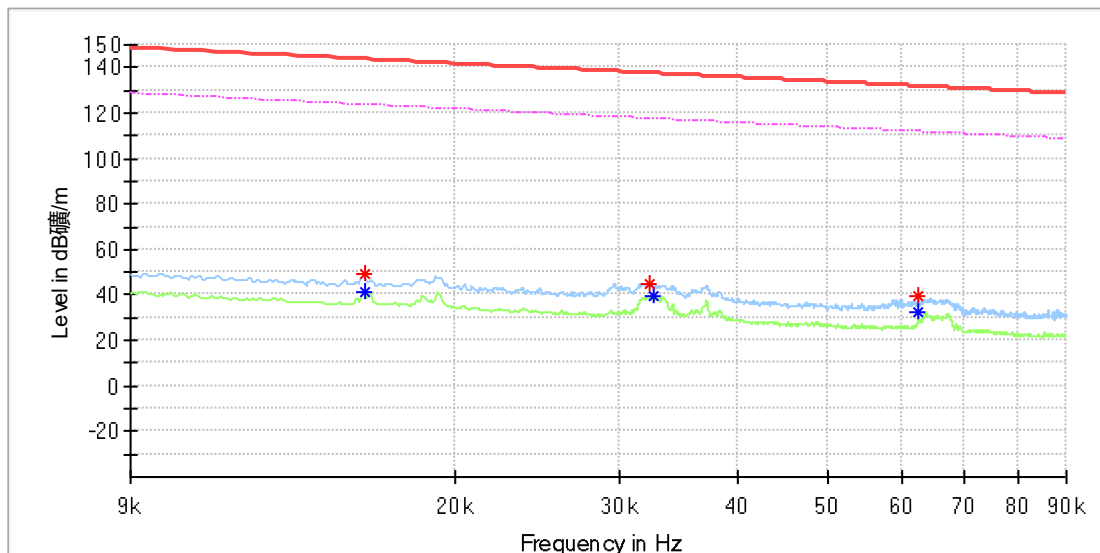


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016001	48.87	---	143.51	94.64	100.0	X	232.0	20.0
0.016001	---	41.74	123.51	81.76	100.0	X	232.0	20.0
0.032316	44.91	---	137.40	92.49	100.0	X	293.0	20.0
0.032548	---	39.38	117.34	77.96	100.0	X	0.0	20.0
0.062460	39.19	---	131.68	92.49	100.0	X	45.0	20.0
0.062460	---	32.66	111.68	79.02	100.0	X	45.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

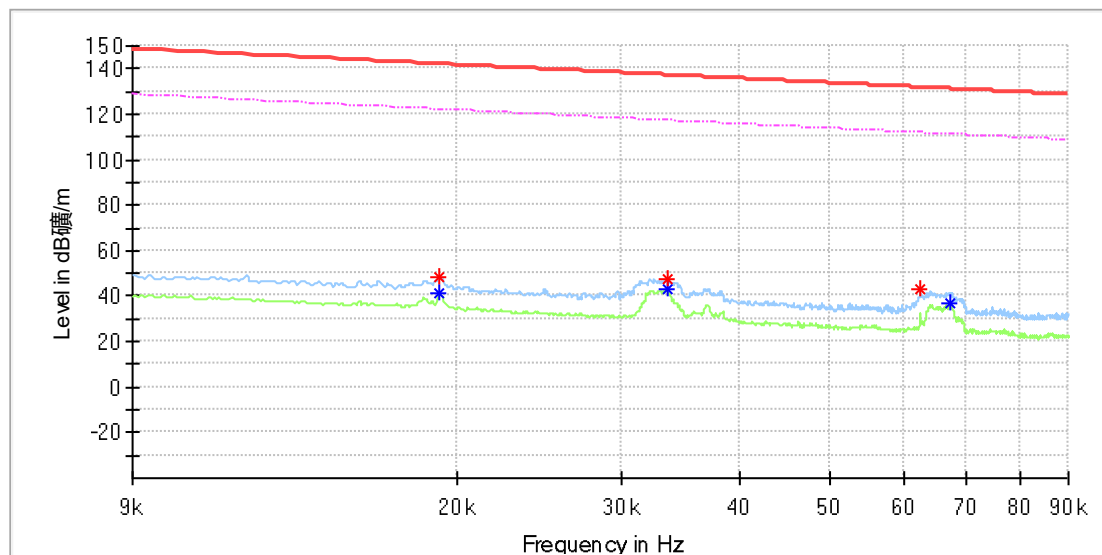


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	48.46	---	141.93	93.47	100.0	Y	154.0	20.0
0.019183	---	41.58	121.93	80.35	100.0	Y	154.0	20.0
0.033531	---	42.77	117.08	74.31	100.0	Y	351.0	20.0
0.033589	47.26	---	137.07	89.80	100.0	Y	261.0	20.0
0.062460	42.73	---	131.68	88.95	100.0	Y	334.0	20.0
0.067378	---	37.22	111.02	73.80	100.0	Y	358.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

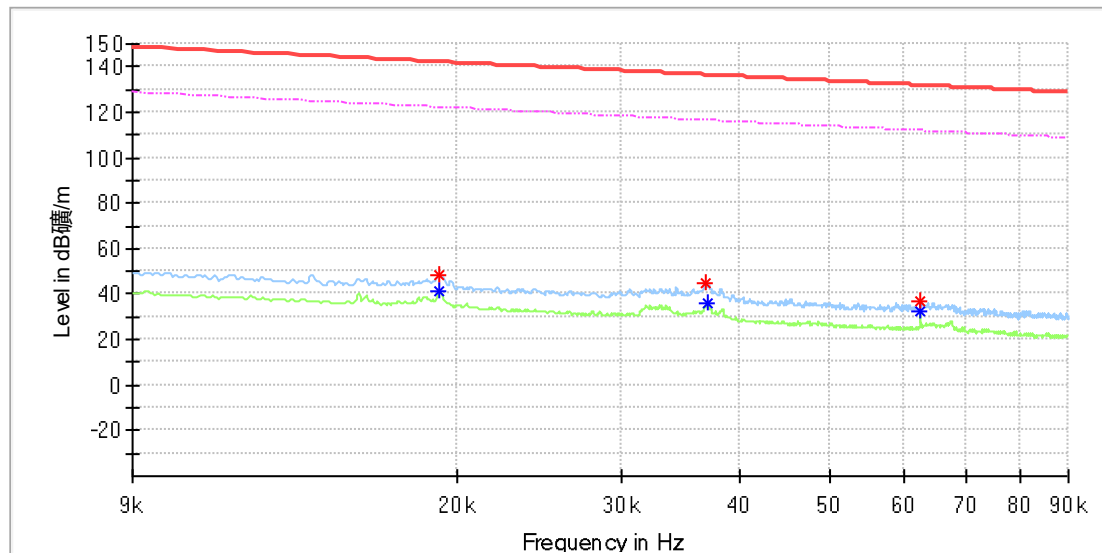


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	48.25	---	141.96	93.71	100.0	Z	125.0	20.0
0.019183	---	41.01	121.93	80.92	100.0	Z	125.0	20.0
0.036829	45.00	---	136.27	91.27	100.0	Z	211.0	20.0
0.037119	---	35.73	116.20	80.47	100.0	Z	211.0	20.0
0.062518	37.06	---	131.67	94.62	100.0	Z	358.0	20.0
0.062518	---	32.24	111.67	79.44	100.0	Z	358.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
 Model: W759
 Test Mode: Charging
 Order No/Sample No: 27240502/A004328958-005
 Test Voltage: AC 120V, 60Hz
 Remark: Temp 21.8°C Humi:49%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

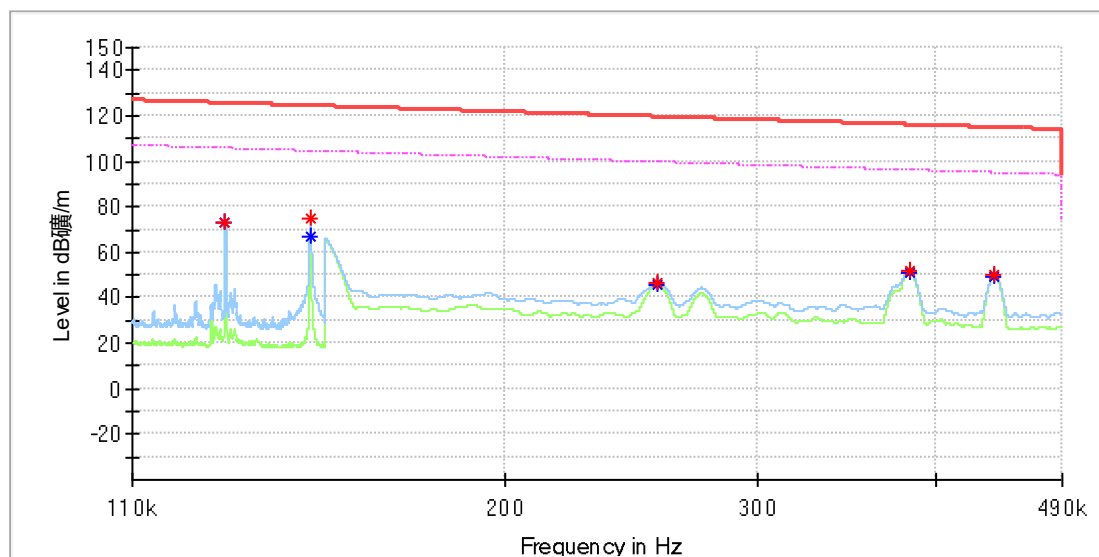


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127714	72.85	---	125.47	52.62	100.0	X	125.0	20.0
0.127714	---	72.79	105.47	32.68	100.0	X	125.0	20.0
0.146429	---	67.12	104.29	37.17	100.0	X	228.0	20.0
0.146486	74.54	---	124.28	49.74	100.0	X	203.0	20.0
0.255500	---	45.59	99.45	53.87	100.0	X	242.0	20.0
0.255750	46.94	---	119.45	72.51	100.0	X	242.0	20.0
0.383200	51.92	---	115.93	64.01	100.0	X	119.0	20.0
0.383250	---	51.46	95.93	44.47	100.0	X	119.0	20.0
0.439500	50.02	---	114.74	64.73	100.0	X	217.0	20.0
0.439600	---	49.65	94.74	45.09	100.0	X	217.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

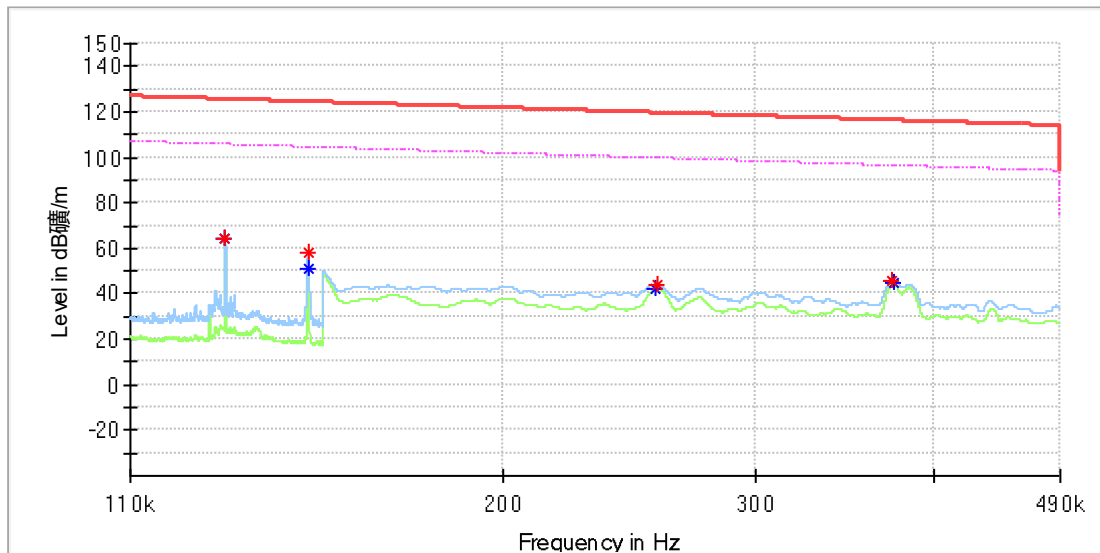


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128114	64.15	---	125.45	61.30	100.0	Y	204.0	20.0
0.128114	---	63.96	105.45	41.49	100.0	Y	204.0	20.0
0.146343	58.38	---	124.29	65.91	100.0	Y	316.0	20.0
0.146400	---	50.95	104.29	53.34	100.0	Y	316.0	20.0
0.255950	---	42.25	99.44	57.19	100.0	Y	313.0	20.0
0.256700	44.01	---	119.41	75.40	100.0	Y	313.0	20.0
0.374100	45.85	---	116.14	70.29	100.0	Y	32.0	20.0
0.374750	---	44.48	96.13	51.65	100.0	Y	32.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

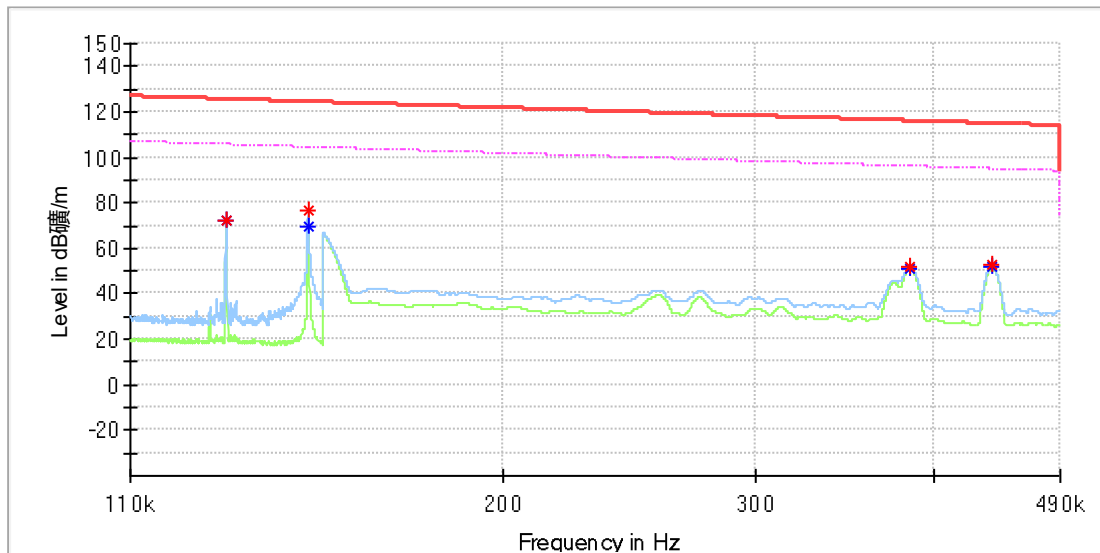


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128343	72.35	---	125.43	53.08	100.0	Z	168.0	20.0
0.128343	---	72.31	105.43	33.12	100.0	Z	168.0	20.0
0.146400	76.40	---	124.29	47.89	100.0	Z	162.0	20.0
0.146400	---	69.23	104.29	35.06	100.0	Z	162.0	20.0
0.384950	51.61	---	115.90	64.29	100.0	Z	148.0	20.0
0.385100	---	51.12	95.89	44.77	100.0	Z	148.0	20.0
0.439150	52.41	---	114.75	62.34	100.0	Z	205.0	20.0
0.439200	---	51.66	94.75	43.09	100.0	Z	205.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

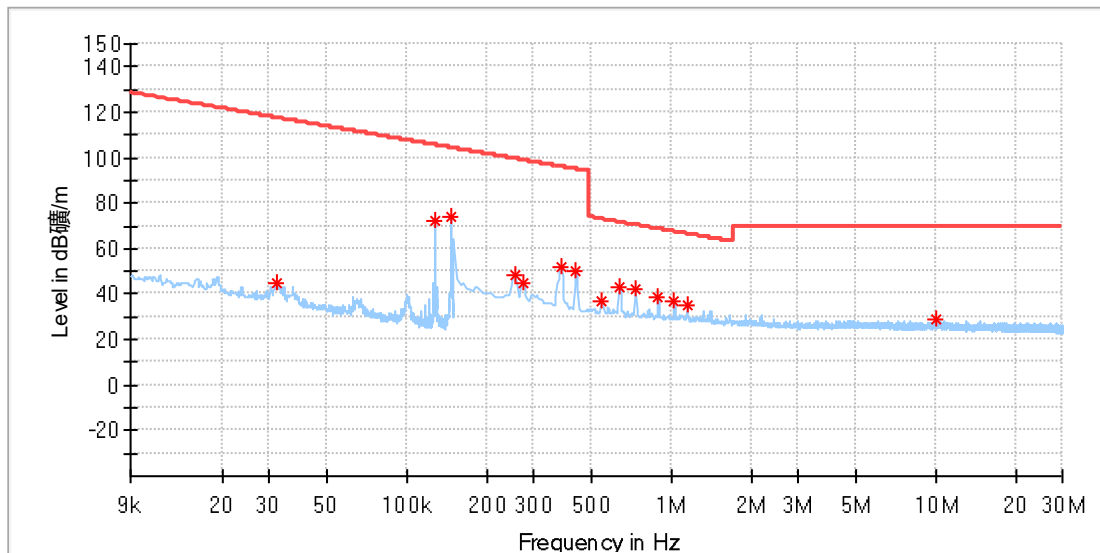

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.032265	44.54	117.42	72.87	100.0	X	326.0	19.9
0.127641	72.57	105.48	32.91	100.0	X	120.0	19.9
0.146475	74.36	104.28	29.92	100.0	X	216.0	19.9
0.255353	48.20	99.46	51.26	100.0	X	251.0	19.9
0.272912	44.56	98.88	54.32	100.0	X	45.0	19.9
0.382655	52.27	95.95	43.68	100.0	X	113.0	19.9
0.435331	49.74	94.83	45.09	100.0	X	262.0	19.9
0.545074	37.28	72.88	35.59	100.0	X	48.0	19.9
0.637258	42.98	71.52	28.54	100.0	X	106.0	19.9
0.729441	41.84	70.35	28.52	100.0	X	262.0	19.9
0.891860	38.53	68.61	30.08	100.0	X	102.0	19.9
1.023552	36.99	67.42	30.43	100.0	X	294.0	19.9
1.146463	35.10	66.44	31.33	100.0	X	272.0	19.9
9.996110	28.76	69.50	40.74	100.0	X	178.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

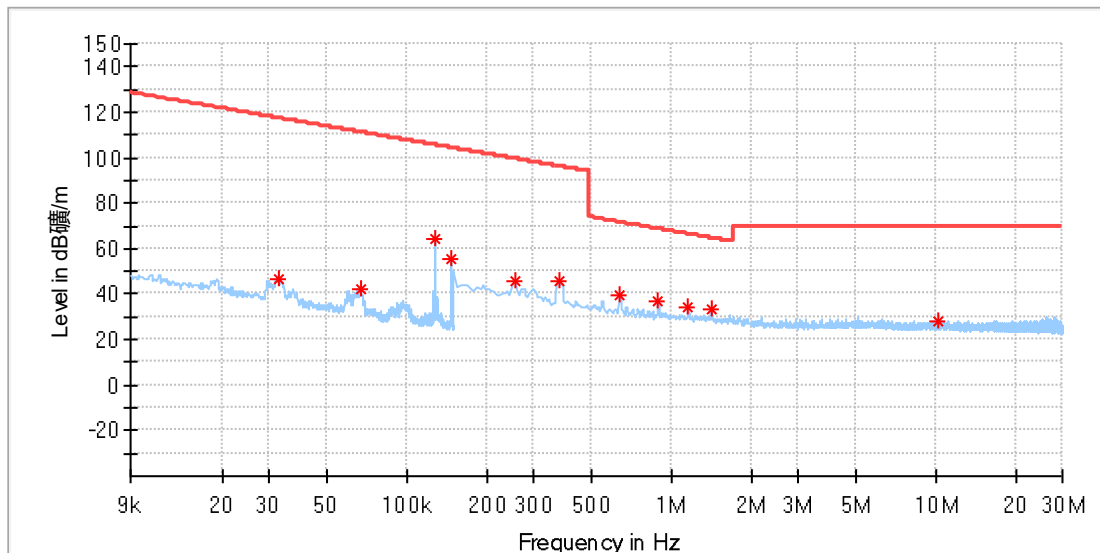

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.032466	46.79	117.36	70.57	100.0	Y	343.0	19.9
0.066810	42.57	111.10	68.53	100.0	Y	173.0	19.9
0.128145	63.96	105.44	41.49	100.0	Y	205.0	19.9
0.146576	55.80	104.28	48.48	100.0	Y	287.0	19.9
0.255353	45.37	99.46	54.09	100.0	Y	320.0	19.9
0.373875	45.89	96.15	50.25	100.0	Y	237.0	19.9
0.637258	39.54	71.52	31.99	100.0	Y	182.0	19.9
0.891860	36.48	68.61	32.13	100.0	Y	160.0	19.9
1.150853	34.37	66.40	32.03	100.0	Y	168.0	19.9
1.405456	33.49	64.67	31.18	100.0	Y	186.0	19.9
10.176088	28.37	69.50	41.13	100.0	Y	302.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

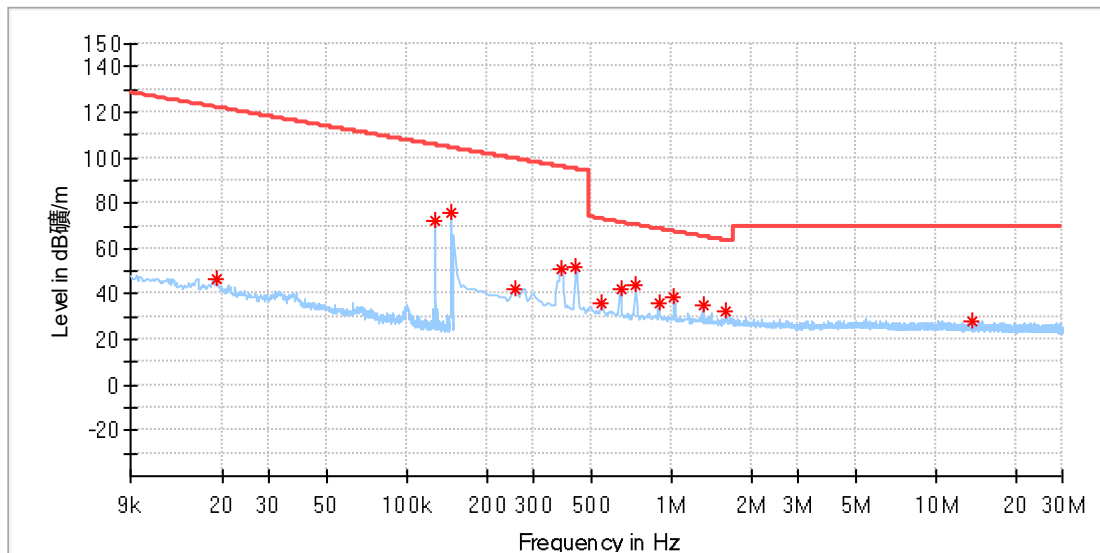

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.57	121.94	75.36	100.0	Z	200.0	19.9
0.128346	72.22	105.43	33.21	100.0	Z	169.0	19.9
0.146374	76.01	104.29	28.28	100.0	Z	137.0	19.9
0.255353	42.62	99.46	56.84	100.0	Z	266.0	19.9
0.382655	51.45	95.95	44.49	100.0	Z	155.0	19.9
0.435331	52.15	94.83	42.68	100.0	Z	241.0	19.9
0.545074	36.00	72.88	36.88	100.0	Z	32.0	19.9
0.641647	41.87	71.47	29.59	100.0	Z	133.0	19.9
0.729441	43.69	70.35	26.66	100.0	Z	241.0	19.9
0.896250	36.09	68.57	32.48	100.0	Z	94.0	19.9
1.023552	38.75	67.42	28.67	100.0	Z	183.0	19.9
1.313272	34.71	65.26	30.55	100.0	Z	1.0	19.9
1.607382	32.86	63.51	30.65	100.0	Z	119.0	19.9
13.727360	28.39	69.50	41.11	100.0	Z	165.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

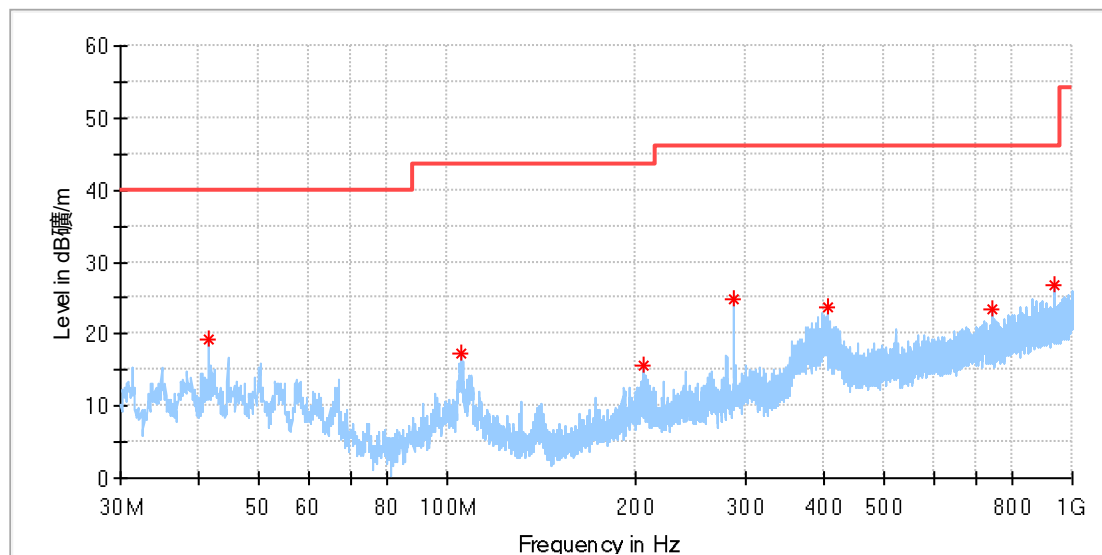

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.478333	19.21	40.00	20.80	100.0	H	105.0	-19.8
105.067222	17.18	43.50	26.32	100.0	H	205.0	-18.9
205.408333	15.51	43.50	27.99	100.0	H	352.0	-19.0
288.020000	24.86	46.00	21.14	100.0	H	42.0	-16.6
404.905000	23.73	46.00	22.27	100.0	H	352.0	-13.6
742.518889	23.41	46.00	22.59	100.0	H	27.0	-7.2
938.405000	26.76	46.00	19.24	100.0	H	228.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

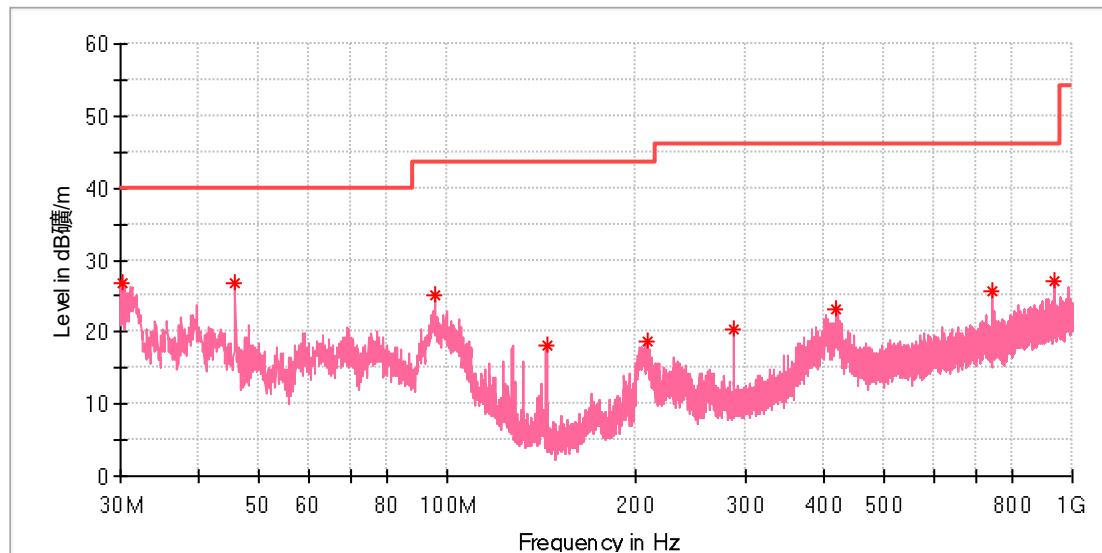

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.269444	26.88	40.00	13.12	100.0	V	245.0	-23.0
45.789444	26.75	40.00	13.25	100.0	V	62.0	-18.8
95.690556	25.01	43.50	18.49	100.0	V	354.0	-19.7
144.028889	18.22	43.50	25.28	100.0	V	290.0	-22.4
208.318333	18.78	43.50	24.72	100.0	V	252.0	-18.9
288.020000	20.38	46.00	25.62	100.0	V	229.0	-16.6
418.161667	23.16	46.00	22.84	100.0	V	348.0	-13.3
742.518889	25.70	46.00	20.30	100.0	V	214.0	-7.2
936.950000	27.20	46.00	18.80	100.0	V	274.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (25W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Charging
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

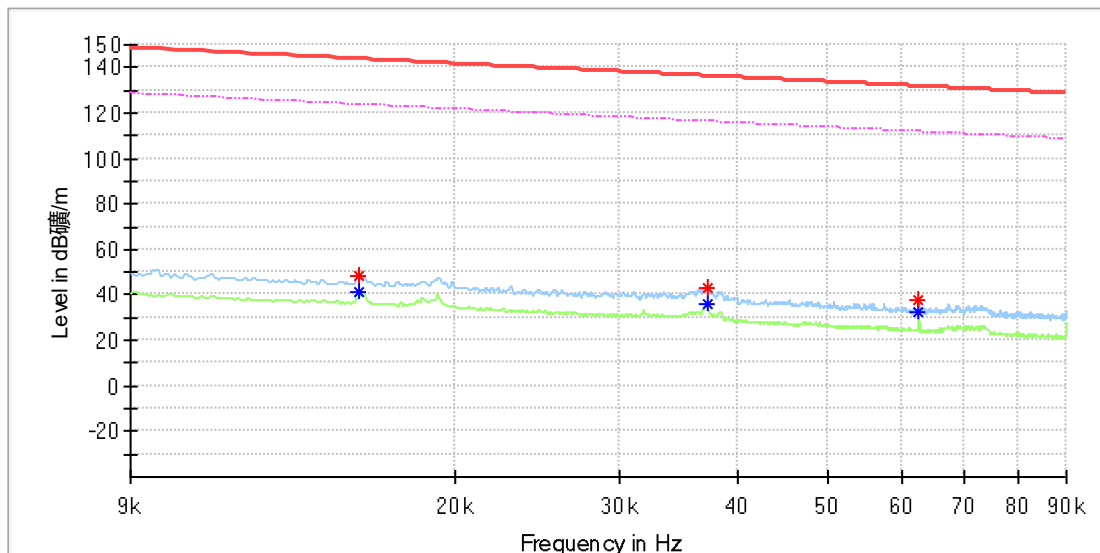


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015769	47.99	---	143.63	95.64	100.0	X	108.0	20.0
0.015769	---	41.03	123.63	82.61	100.0	X	108.0	20.0
0.037176	---	36.00	116.19	80.19	100.0	X	316.0	20.0
0.037234	43.43	---	136.17	92.75	100.0	X	340.0	20.0
0.062576	38.15	---	131.67	93.52	100.0	X	287.0	20.0
0.062576	---	32.43	111.67	79.24	100.0	X	287.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

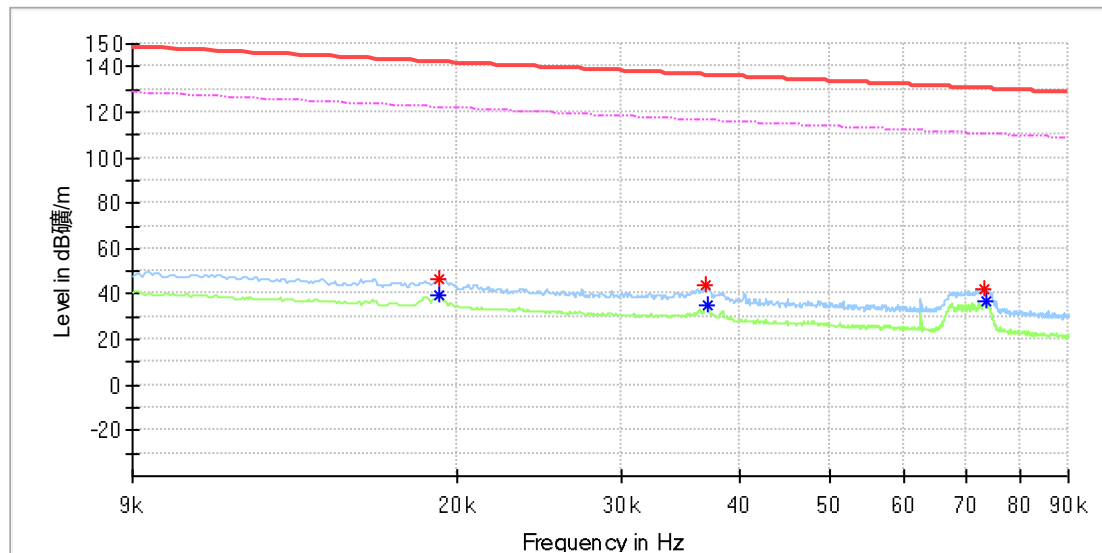


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	47.02	---	141.96	94.93	100.0	Y	103.0	20.0
0.019183	---	39.41	121.93	82.52	100.0	Y	103.0	20.0
0.036945	43.51	---	136.24	92.73	100.0	Y	114.0	20.0
0.037003	---	34.78	116.23	81.45	100.0	Y	114.0	20.0
0.073279	42.49	---	130.30	87.81	100.0	Y	0.0	20.0
0.073453	---	36.57	110.28	73.71	100.0	Y	132.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

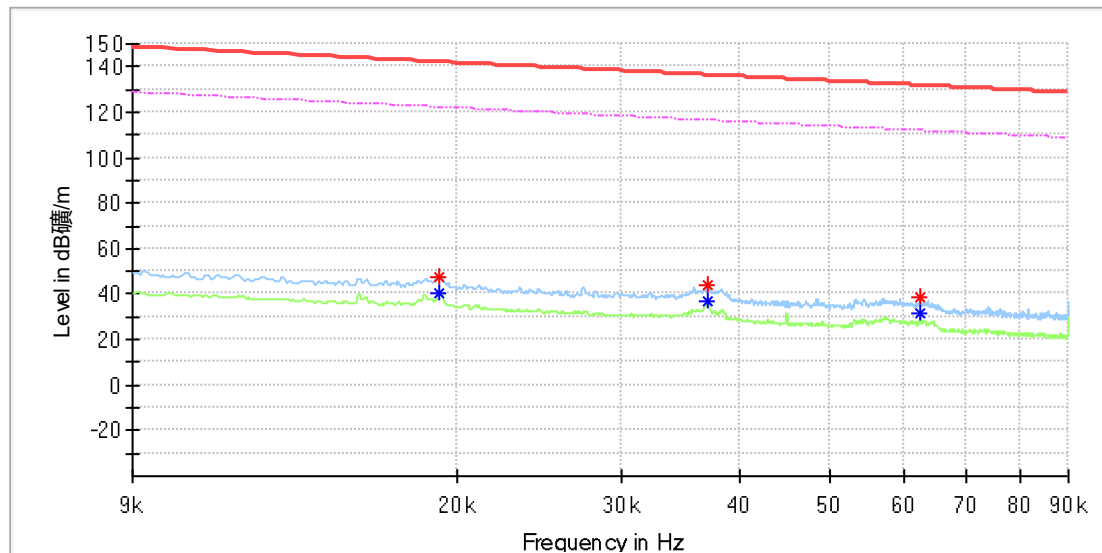


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	47.48	---	141.96	94.47	100.0	Z	334.0	20.0
0.019183	---	40.71	121.93	81.22	100.0	Z	307.0	20.0
0.037061	43.90	---	136.21	92.31	100.0	Z	147.0	20.0
0.037119	---	36.73	116.20	79.47	100.0	Z	282.0	20.0
0.062518	39.03	---	131.67	92.64	100.0	Z	176.0	20.0
0.062518	---	31.94	111.67	79.74	100.0	Z	176.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
 Model: W759
 Test Mode: Charging
 Order No/Sample No: 27240502/A004328958-005
 Test Voltage: AC 120V, 60Hz
 Remark: Temp 21.8°C Humi:49%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

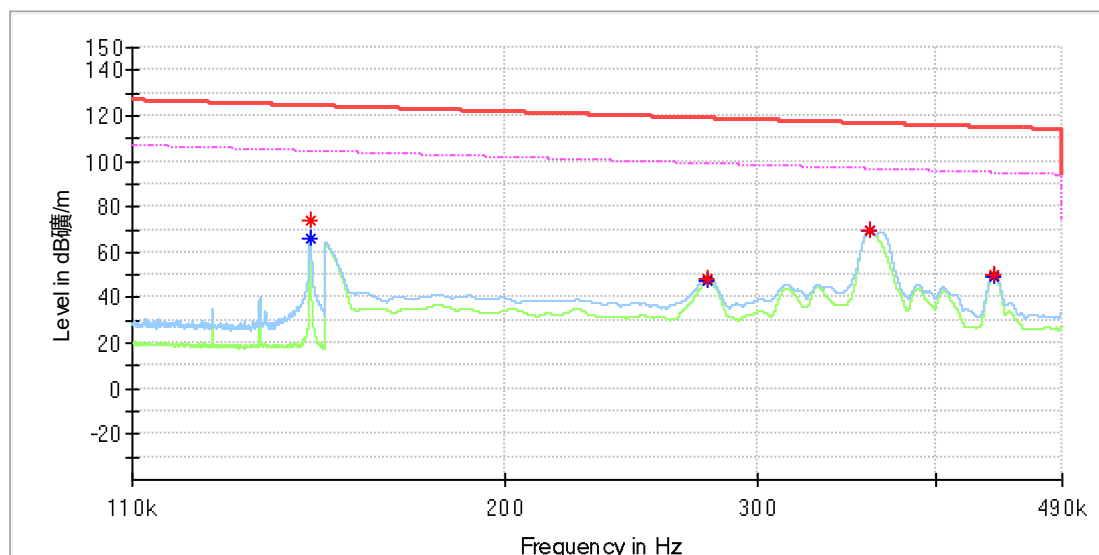


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.146429	73.97	---	124.29	50.32	100.0	X	186.0	20.0
0.146457	---	65.97	104.28	38.31	100.0	X	251.0	20.0
0.277450	---	47.33	98.74	51.41	100.0	X	39.0	20.0
0.277550	48.54	---	118.73	70.20	100.0	X	39.0	20.0
0.360050	---	69.66	96.48	26.81	100.0	X	75.0	20.0
0.360050	69.73	---	116.48	46.75	100.0	X	75.0	20.0
0.439050	---	49.34	94.75	45.42	100.0	X	189.0	20.0
0.439100	49.92	---	114.75	64.83	100.0	X	189.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

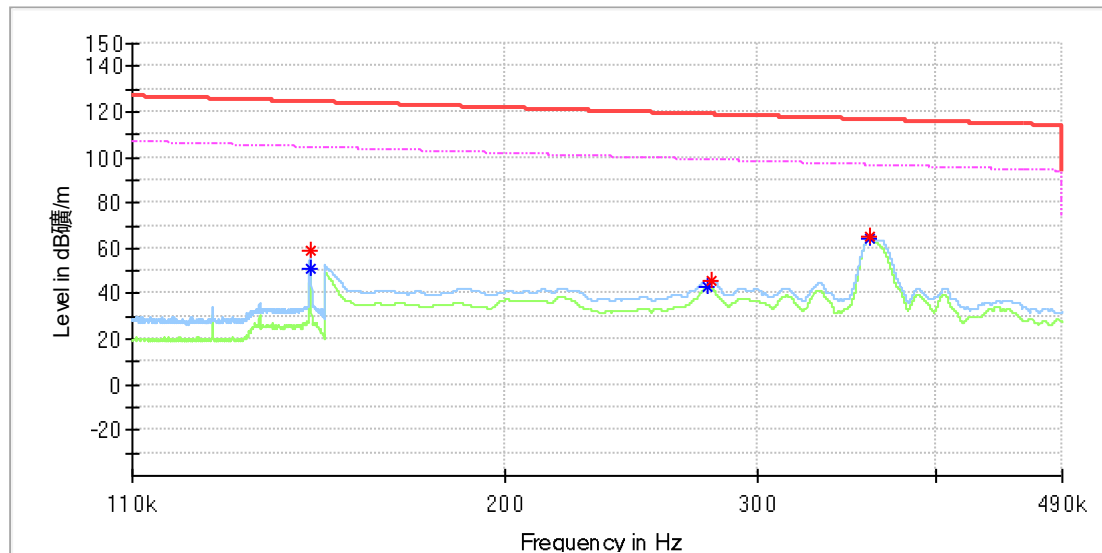


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.146400	59.32	---	124.29	64.97	100.0	Y	105.0	20.0
0.146429	---	50.82	104.29	53.46	100.0	Y	120.0	20.0
0.277450	---	43.04	98.74	55.70	100.0	Y	326.0	20.0
0.278750	45.93	---	118.70	72.77	100.0	Y	326.0	20.0
0.360050	64.84	---	116.48	51.63	100.0	Y	180.0	20.0
0.360100	---	64.62	96.47	31.85	100.0	Y	180.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

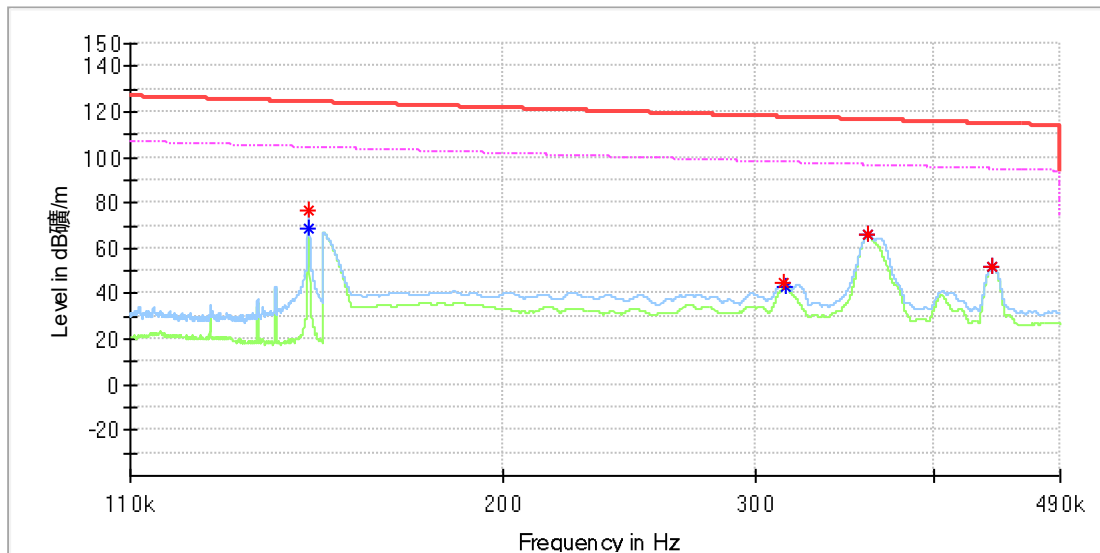


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.146457	76.37	---	124.28	47.91	100.0	Z	209.0	20.0
0.146486	---	68.96	104.28	35.32	100.0	Z	160.0	20.0
0.314250	44.70	---	117.66	72.95	100.0	Z	51.0	20.0
0.315050	---	42.96	97.63	54.67	100.0	Z	51.0	20.0
0.360000	65.89	---	116.48	50.58	100.0	Z	58.0	20.0
0.360050	---	65.74	96.48	30.74	100.0	Z	58.0	20.0
0.439600	52.07	---	114.74	62.67	100.0	Z	125.0	20.0
0.439700	---	51.81	94.74	42.93	100.0	Z	125.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

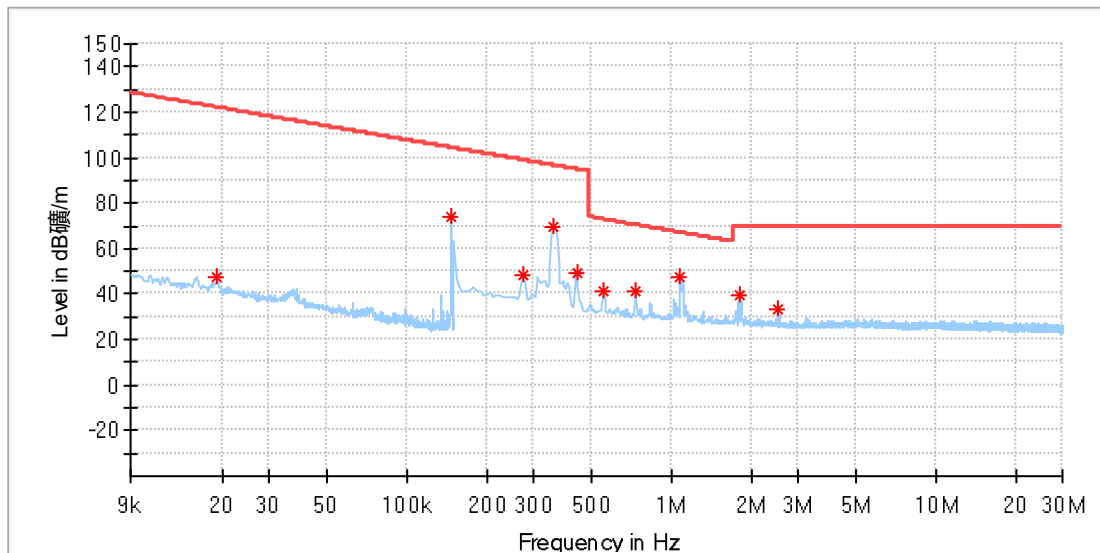

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	47.29	121.98	74.69	100.0	X	37.0	19.9
0.146374	73.83	104.29	30.46	100.0	X	181.0	19.9
0.272912	48.38	98.88	50.50	100.0	X	68.0	19.9
0.356316	69.70	96.57	26.87	100.0	X	79.0	19.9
0.439721	49.61	94.74	45.13	100.0	X	179.0	19.9
0.553853	40.97	72.74	31.77	100.0	X	72.0	19.9
0.729441	41.11	70.35	29.24	100.0	X	212.0	19.9
1.076228	47.84	66.99	19.15	100.0	X	32.0	19.9
1.796140	39.32	69.50	30.18	100.0	X	50.0	20.0
2.516052	33.29	69.50	36.21	100.0	X	39.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

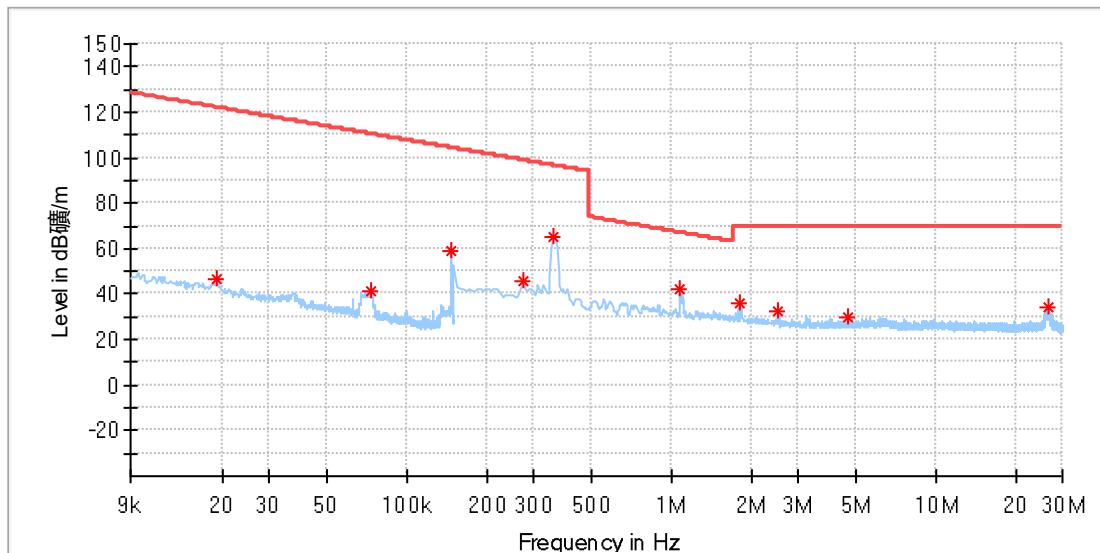

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.29	121.94	75.64	100.0	Y	142.0	19.9
0.073256	41.45	110.30	68.85	100.0	Y	0.0	19.9
0.146374	59.17	104.29	45.11	100.0	Y	107.0	19.9
0.272912	45.61	98.88	53.27	100.0	Y	142.0	19.9
0.356316	64.76	96.57	31.80	100.0	Y	179.0	19.9
1.080618	42.51	66.95	24.44	100.0	Y	142.0	19.9
1.796140	36.31	69.50	33.19	100.0	Y	142.0	20.0
2.516052	32.84	69.50	36.66	100.0	Y	96.0	20.0
4.675787	29.93	69.50	39.57	100.0	Y	193.0	20.1
26.597978	33.80	69.50	35.70	100.0	Y	46.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

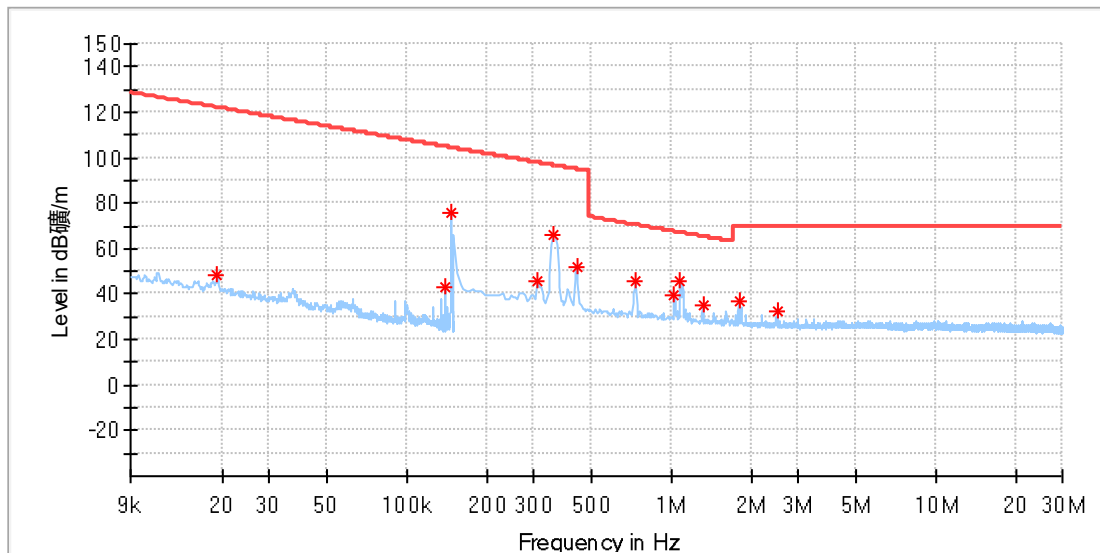

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	47.95	121.94	73.99	100.0	Z	315.0	19.9
0.138619	42.97	104.76	61.79	100.0	Z	34.0	19.9
0.146576	76.16	104.28	28.11	100.0	Z	132.0	19.9
0.312419	45.51	97.71	52.20	100.0	Z	102.0	19.9
0.356316	65.79	96.57	30.78	100.0	Z	59.0	19.9
0.439721	51.99	94.74	42.75	100.0	Z	95.0	19.9
0.729441	45.96	70.35	24.40	100.0	Z	217.0	19.9
1.023552	39.15	67.42	28.27	100.0	Z	62.0	19.9
1.076228	45.88	66.99	21.10	100.0	Z	48.0	19.9
1.313272	35.00	65.26	30.27	100.0	Z	95.0	19.9
1.796140	37.22	69.50	32.28	100.0	Z	30.0	20.0
2.516052	32.60	69.50	36.90	100.0	Z	98.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

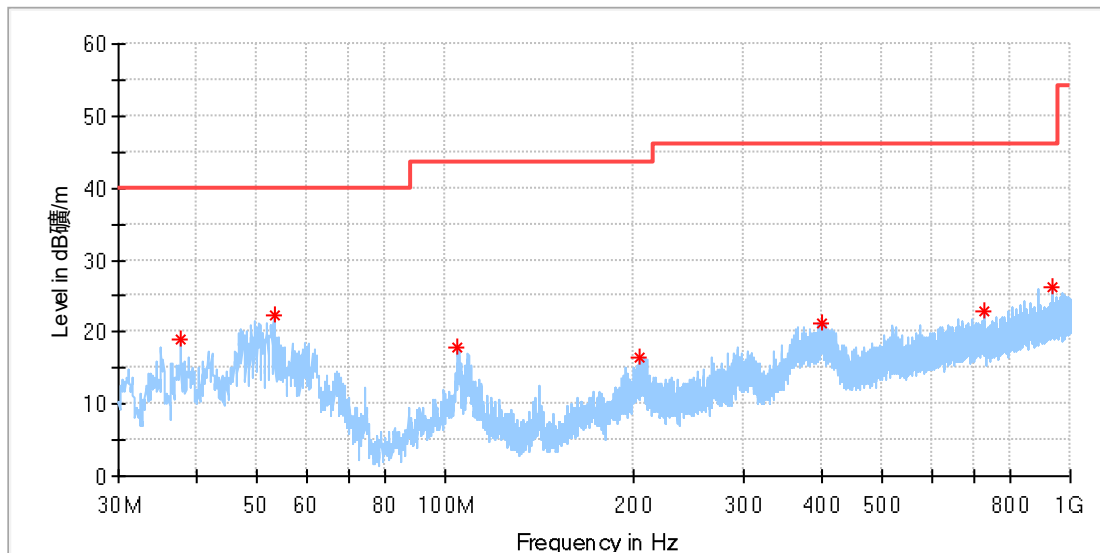

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.706111	18.90	40.00	21.10	100.0	H	101.0	-20.9
53.172222	22.21	40.00	17.79	100.0	H	43.0	-18.5
104.690000	17.77	43.50	25.73	100.0	H	282.0	-18.9
204.276667	16.47	43.50	27.03	100.0	H	343.0	-19.0
400.809444	21.34	46.00	24.66	100.0	H	336.0	-13.7
729.639444	22.82	46.00	23.18	100.0	H	224.0	-7.4
938.405000	26.32	46.00	19.68	100.0	H	321.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

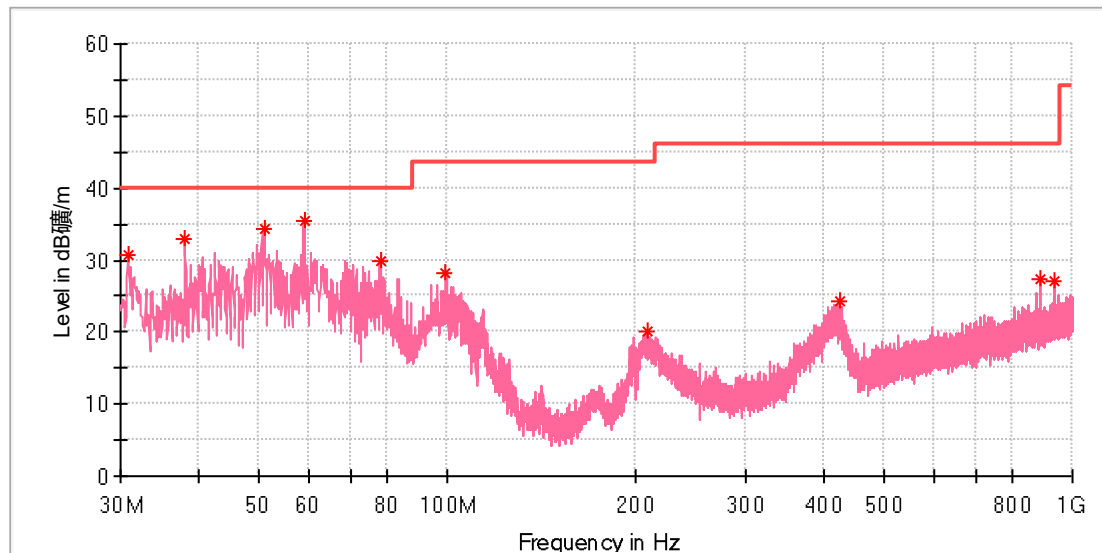

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.862222	30.60	40.00	9.40	100.0	V	315.0	-22.9
38.029444	32.98	40.00	7.02	100.0	V	70.0	-20.8
51.070556	34.37	40.00	5.63	100.0	V	322.0	-18.4
58.992222	35.31	40.00	4.69	100.0	V	315.0	-19.0
78.068889	29.76	40.00	10.24	100.0	V	62.0	-23.5
99.516667	28.07	43.50	15.43	100.0	V	87.0	-19.2
208.318333	20.16	43.50	23.34	100.0	V	308.0	-18.9
423.281111	24.41	46.00	21.59	100.0	V	331.0	-13.2
891.036667	27.48	46.00	18.52	100.0	V	155.0	-4.9
936.950000	27.20	46.00	18.80	100.0	V	21.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (TWS 5W)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Charging
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

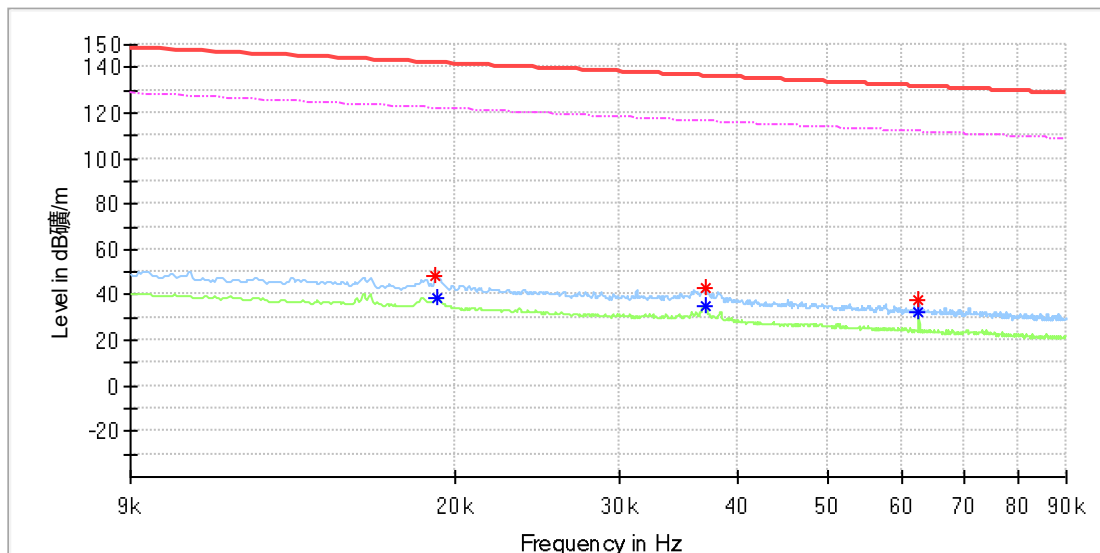


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019067	48.67	---	141.98	93.31	100.0	X	79.0	20.0
0.019183	---	38.85	121.93	83.08	100.0	X	206.0	20.0
0.037061	---	35.21	116.21	81.00	100.0	X	8.0	20.0
0.037061	43.46	---	136.21	92.75	100.0	X	8.0	20.0
0.062576	---	32.42	111.67	79.24	100.0	X	72.0	20.0
0.062576	37.39	---	131.67	94.27	100.0	X	72.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

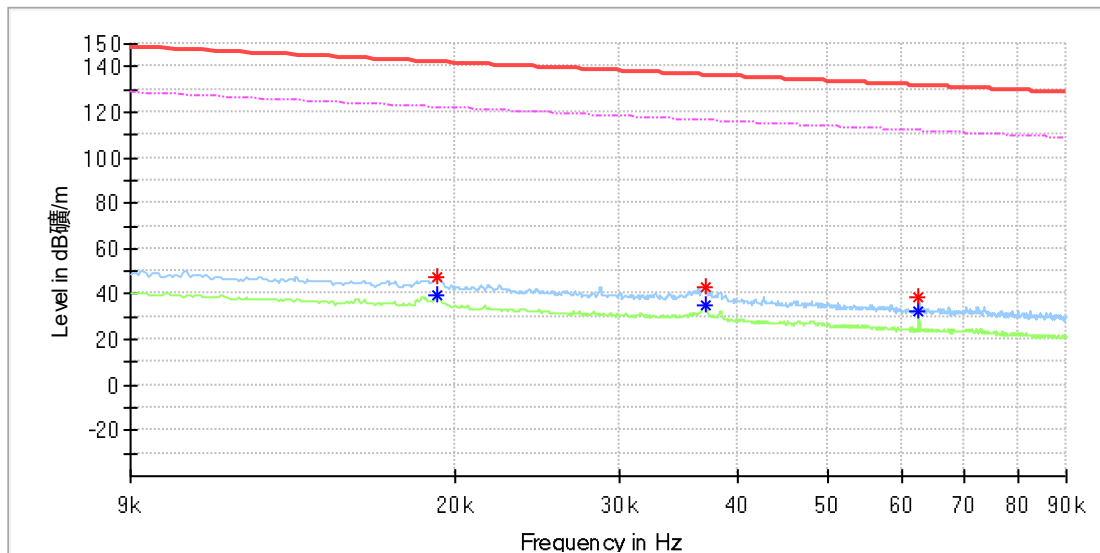


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	47.62	---	141.93	94.31	100.0	Y	358.0	20.0
0.019183	---	39.92	121.93	82.01	100.0	Y	358.0	20.0
0.037119	42.68	---	136.20	93.52	100.0	Y	0.0	20.0
0.037119	---	35.50	116.20	80.70	100.0	Y	0.0	20.0
0.062576	---	32.49	111.67	79.17	100.0	Y	183.0	20.0
0.062576	38.51	---	131.67	93.16	100.0	Y	183.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

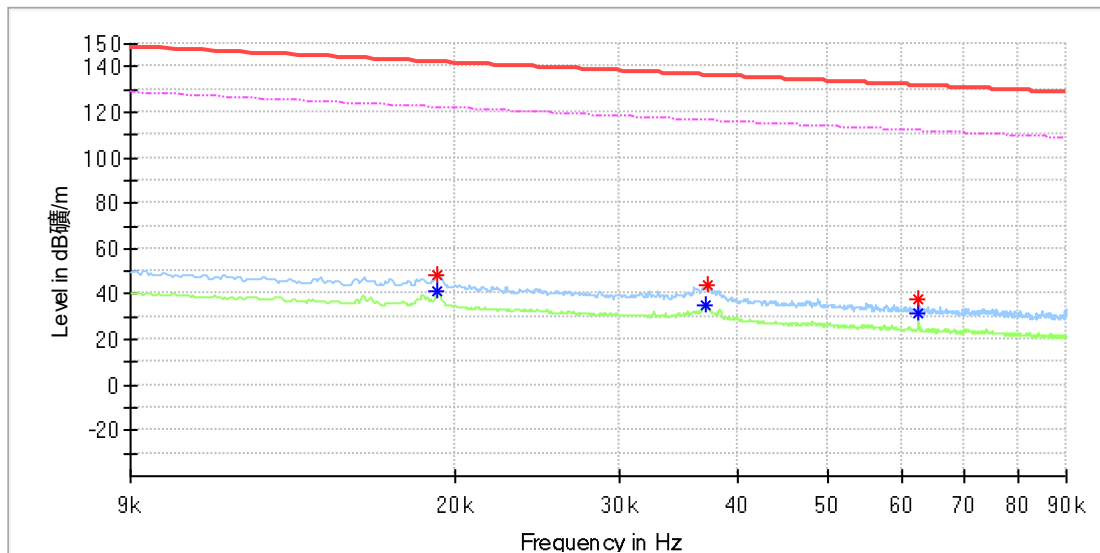


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	48.77	---	141.96	93.19	100.0	Z	351.0	20.0
0.019183	---	40.92	121.93	81.01	100.0	Z	351.0	20.0
0.037119	---	35.27	116.20	80.93	100.0	Z	23.0	20.0
0.037176	43.69	---	136.19	92.49	100.0	Z	129.0	20.0
0.062518	37.87	---	131.67	93.81	100.0	Z	237.0	20.0
0.062518	---	32.02	111.67	79.65	100.0	Z	237.0	20.0

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Charging
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

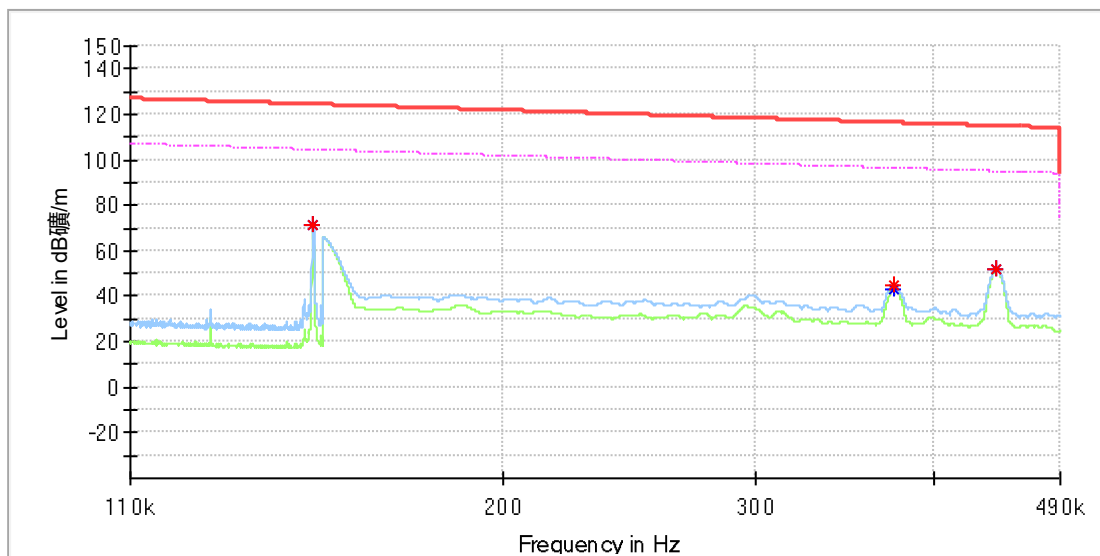


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	71.37	---	124.22	52.85	100.0	X	352.0	20.0
0.147543	---	71.09	104.22	33.13	100.0	X	352.0	20.0
0.374850	45.06	---	116.13	71.07	100.0	X	349.0	20.0
0.375550	---	43.42	96.11	52.69	100.0	X	349.0	20.0
0.442350	---	51.84	94.69	42.84	100.0	X	0.0	20.0
0.442400	52.27	---	114.69	62.42	100.0	X	0.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

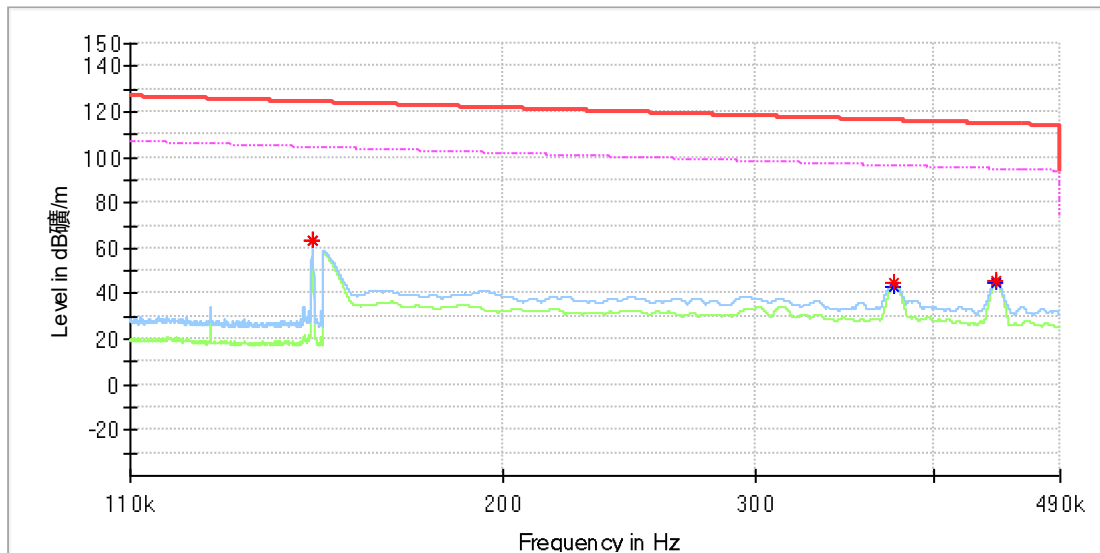


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147371	---	63.18	104.23	41.05	100.0	Y	63.0	20.0
0.147429	63.52	---	124.23	60.70	100.0	Y	75.0	20.0
0.375550	---	43.45	96.11	52.66	100.0	Y	300.0	20.0
0.375650	44.69	---	116.11	71.41	100.0	Y	300.0	20.0
0.442300	45.35	---	114.69	69.34	100.0	Y	62.0	20.0
0.442350	---	44.58	94.69	50.11	100.0	Y	62.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

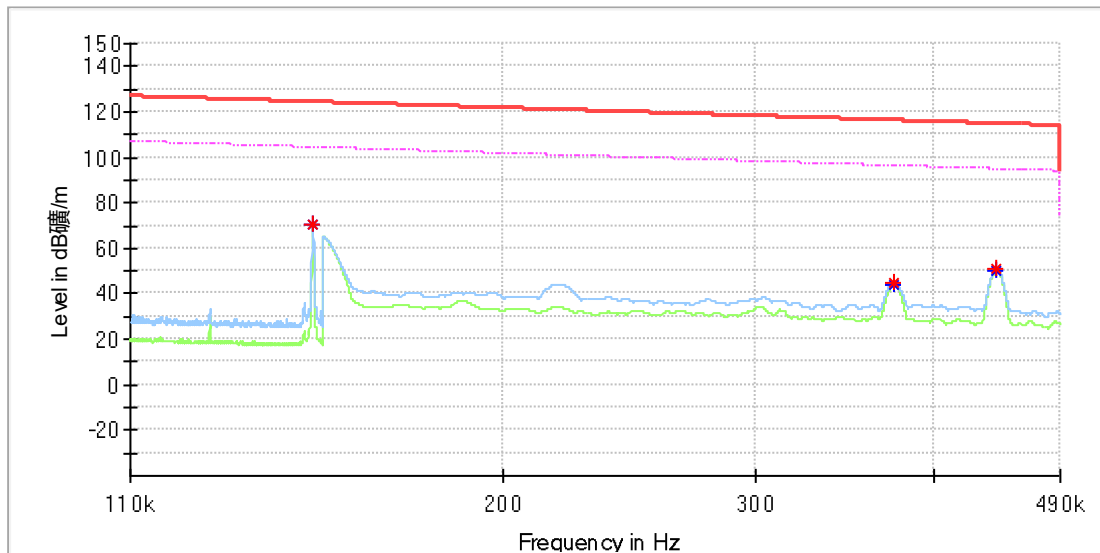


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147429	---	70.12	104.23	34.10	100.0	Z	9.0	20.0
0.147429	70.31	---	124.23	53.91	100.0	Z	9.0	20.0
0.375100	45.21	---	116.12	70.91	100.0	Z	273.0	20.0
0.375100	---	44.07	96.12	52.05	100.0	Z	273.0	20.0
0.442400	50.82	---	114.69	63.86	100.0	Z	359.0	20.0
0.442400	---	50.38	94.69	44.31	100.0	Z	359.0	20.0

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

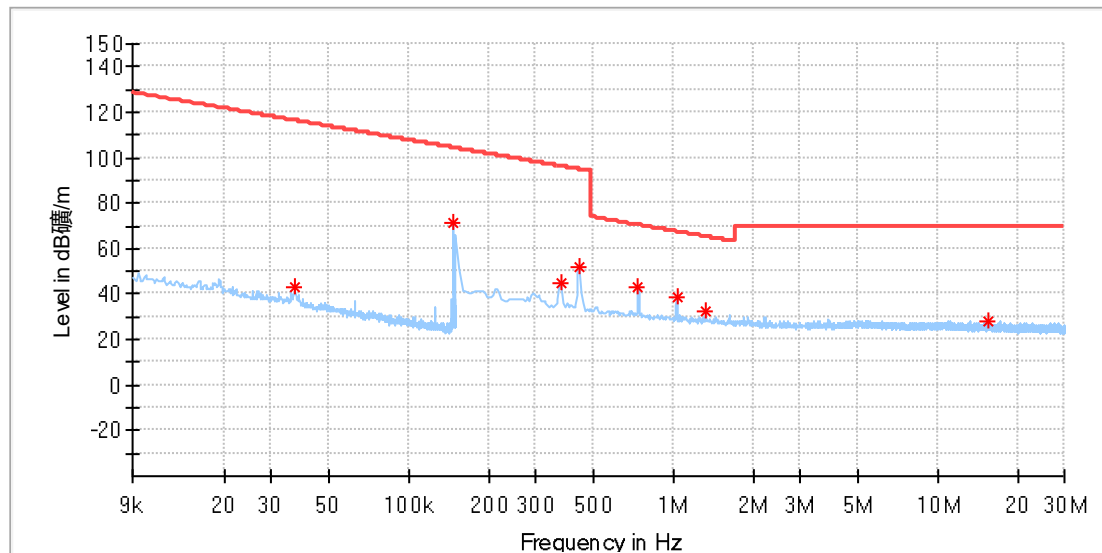

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	42.92	116.25	73.34	100.0	X	218.0	19.9
0.147381	71.17	104.23	33.06	100.0	X	352.0	19.9
0.373875	44.68	96.15	51.47	100.0	X	241.0	19.9
0.439721	52.15	94.74	42.59	100.0	X	0.0	19.9
0.733831	43.46	70.30	26.84	100.0	X	348.0	19.9
1.032331	39.02	67.35	28.32	100.0	X	338.0	19.9
1.326441	32.39	65.18	32.78	100.0	X	345.0	19.9
15.452515	28.05	69.50	41.45	100.0	X	129.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

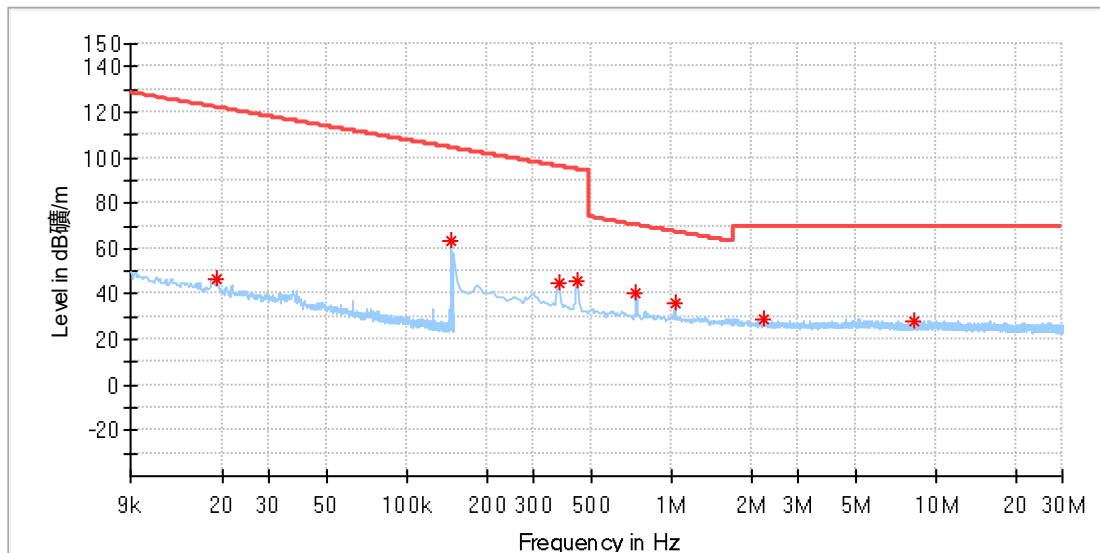

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.38	121.94	75.55	100.0	Y	108.0	19.9
0.147482	63.21	104.22	41.01	100.0	Y	72.0	19.9
0.373875	44.87	96.15	51.28	100.0	Y	124.0	19.9
0.439721	46.03	94.74	48.71	100.0	Y	69.0	19.9
0.733831	40.76	70.30	29.54	100.0	Y	249.0	19.9
1.032331	35.66	67.35	31.69	100.0	Y	98.0	19.9
2.248280	29.19	69.50	40.31	100.0	Y	260.0	20.0
8.297294	28.30	69.50	41.20	100.0	Y	239.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

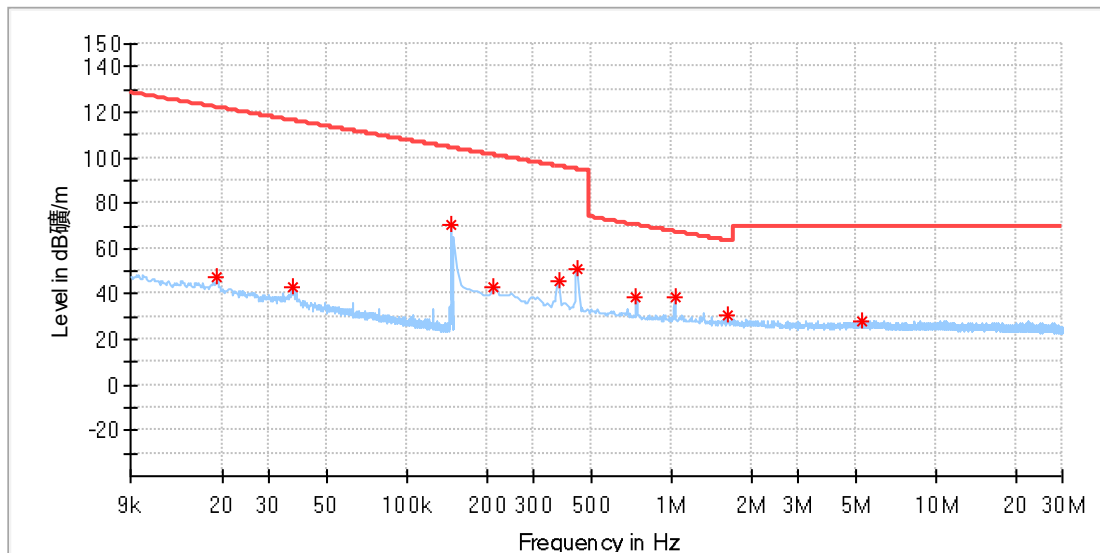

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	47.64	121.94	74.30	100.0	Z	185.0	19.9
0.036898	42.69	116.25	73.56	100.0	Z	101.0	19.9
0.147381	70.13	104.23	34.10	100.0	Z	14.0	19.9
0.211456	42.81	101.10	58.29	100.0	Z	359.0	19.8
0.373875	45.68	96.15	50.46	100.0	Z	184.0	19.9
0.439721	50.79	94.74	43.95	100.0	Z	0.0	19.9
0.733831	38.82	70.30	31.48	100.0	Z	0.0	19.9
1.027941	38.46	67.38	28.92	100.0	Z	8.0	19.9
1.620552	31.03	63.44	32.41	100.0	Z	47.0	19.9
5.233280	28.31	69.50	41.19	100.0	Z	349.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

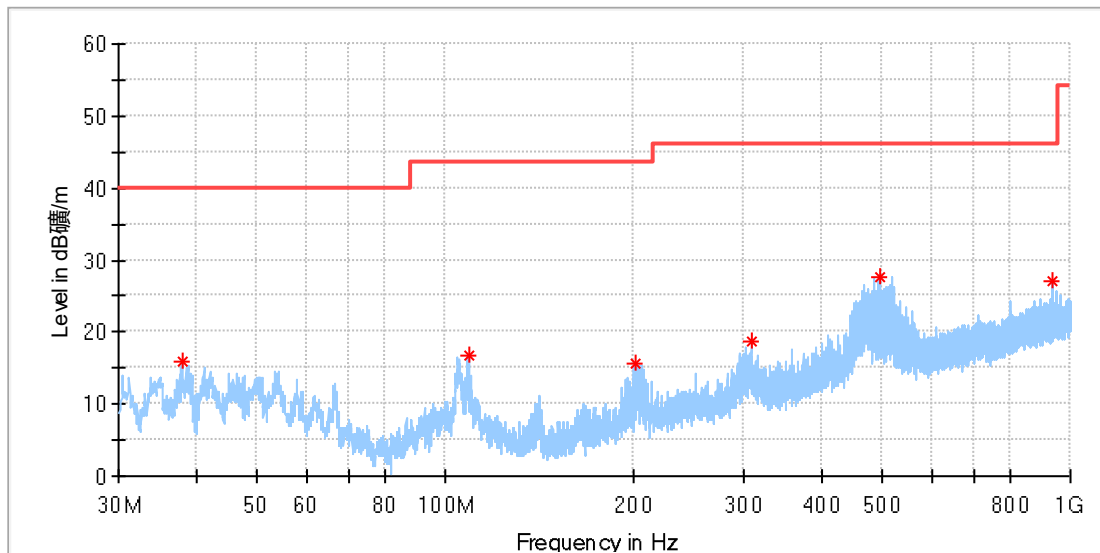

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.867778	15.83	40.00	24.17	100.0	H	217.0	-20.9
108.839444	16.70	43.50	26.80	100.0	H	177.0	-19.1
202.067222	15.56	43.50	27.94	100.0	H	0.0	-19.0
308.120556	18.79	46.00	27.21	100.0	H	129.0	-16.1
496.785556	27.52	46.00	18.48	100.0	H	169.0	-11.9
938.405000	27.02	46.00	18.98	100.0	H	209.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

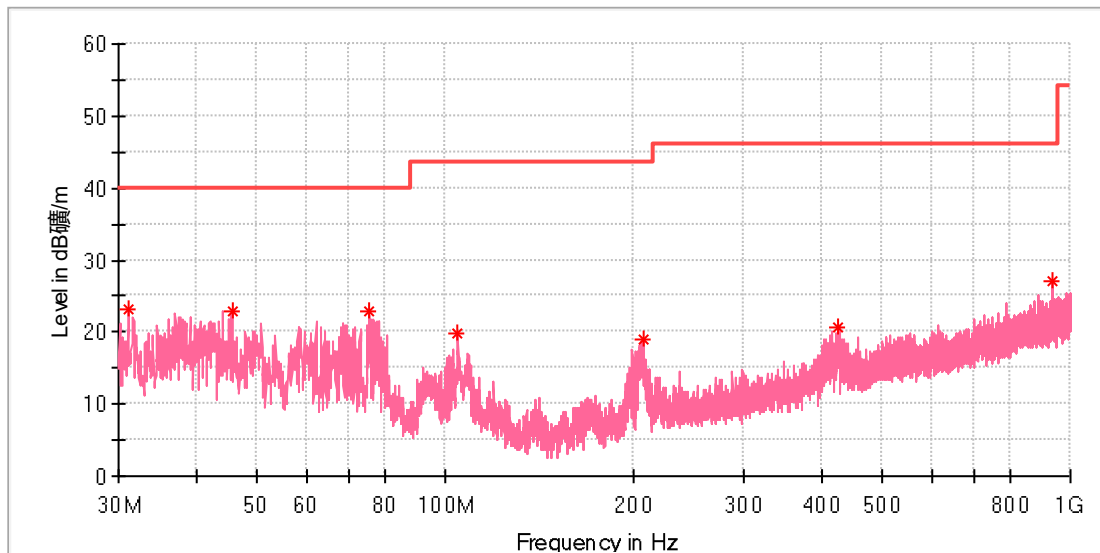

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.077778	23.04	40.00	16.96	100.0	V	139.0	-22.9
45.573889	22.94	40.00	17.06	100.0	V	356.0	-18.8
75.482222	23.01	40.00	16.99	100.0	V	356.0	-23.5
104.743889	19.89	43.50	23.61	100.0	V	356.0	-18.9
207.186667	19.03	43.50	24.47	100.0	V	244.0	-18.9
426.245000	20.79	46.00	25.21	100.0	V	349.0	-13.2
936.950000	27.00	46.00	19.00	100.0	V	183.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (Co-location)

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Charging
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

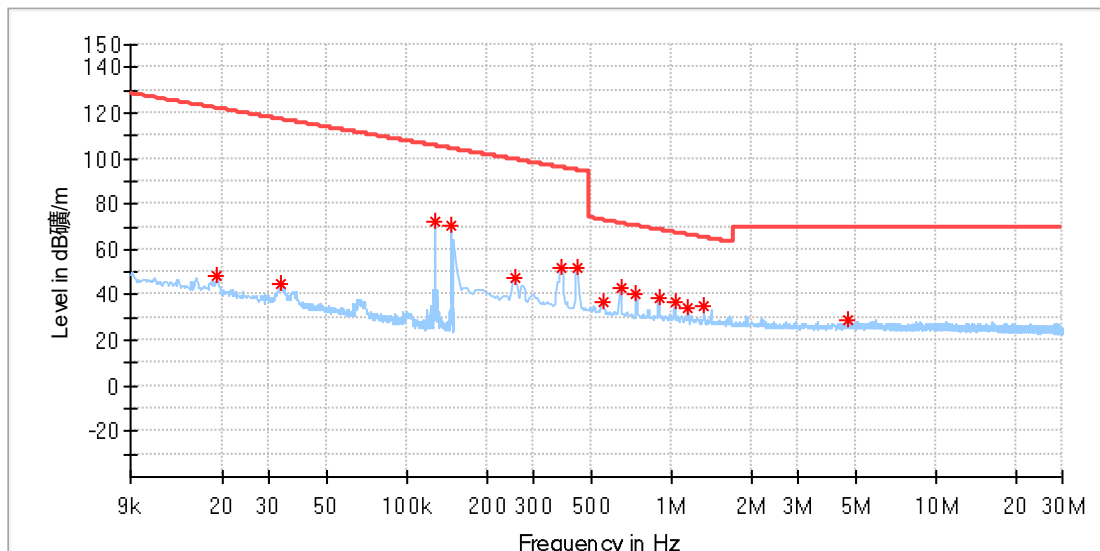

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	48.36	121.98	73.62	100.0	X	173.0	19.9
0.033272	45.27	117.15	71.88	100.0	X	324.0	19.9
0.128246	72.65	105.44	32.79	100.0	X	120.0	19.9
0.147381	70.29	104.23	33.94	100.0	X	328.0	19.9
0.255353	47.80	99.46	51.65	100.0	X	266.0	19.9
0.382655	52.09	95.95	43.86	100.0	X	165.0	19.9
0.439721	52.19	94.74	42.55	100.0	X	338.0	19.9
0.549463	37.31	72.81	35.50	100.0	X	72.0	19.9
0.641647	43.03	71.47	28.44	100.0	X	93.0	19.9
0.733831	40.40	70.30	29.90	100.0	X	151.0	19.9
0.896250	38.46	68.57	30.11	100.0	X	86.0	19.9
1.027941	37.15	67.38	30.23	100.0	X	0.0	19.9
1.150853	34.46	66.40	31.95	100.0	X	93.0	19.9
1.326441	34.79	65.18	30.38	100.0	X	327.0	19.9
4.675787	28.71	69.50	40.79	100.0	X	32.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

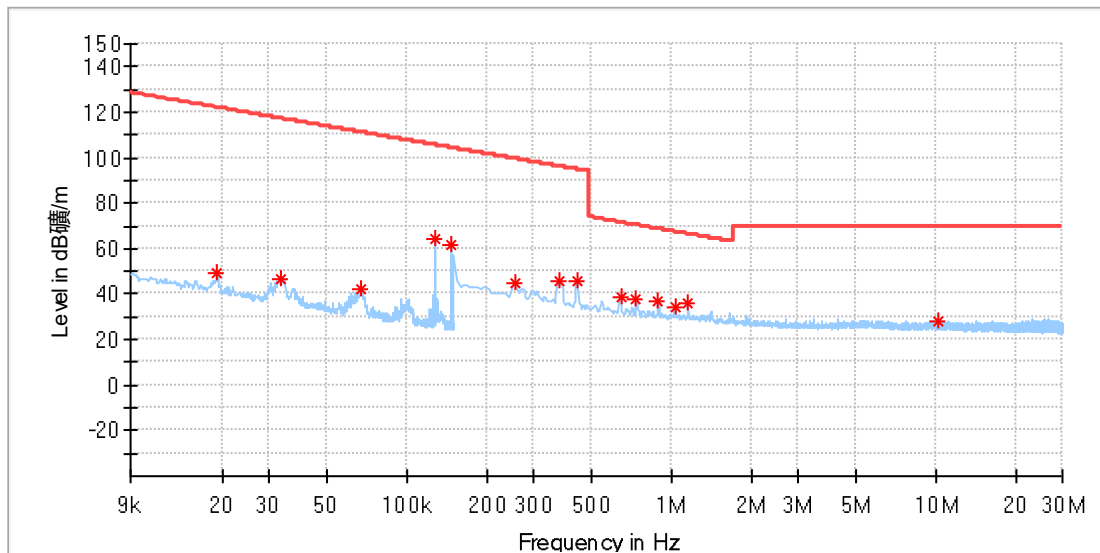

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	48.85	121.94	73.09	100.0	Y	258.0	19.9
0.033574	47.01	117.07	70.06	100.0	Y	314.0	19.9
0.066911	41.83	111.09	69.25	100.0	Y	244.0	19.9
0.128145	63.90	105.44	41.55	100.0	Y	208.0	19.9
0.147381	61.94	104.23	42.29	100.0	Y	62.0	19.9
0.255353	44.73	99.46	54.73	100.0	Y	156.0	19.9
0.373875	45.52	96.15	50.63	100.0	Y	1.0	19.9
0.439721	45.76	94.74	48.98	100.0	Y	41.0	19.9
0.641647	39.09	71.47	32.38	100.0	Y	196.0	19.9
0.733831	37.57	70.30	32.73	100.0	Y	242.0	19.9
0.891860	36.66	68.61	31.95	100.0	Y	196.0	19.9
1.027941	34.66	67.38	32.73	100.0	Y	92.0	19.9
1.150853	35.57	66.40	30.83	100.0	Y	156.0	19.9
10.176088	28.29	69.50	41.21	100.0	Y	178.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

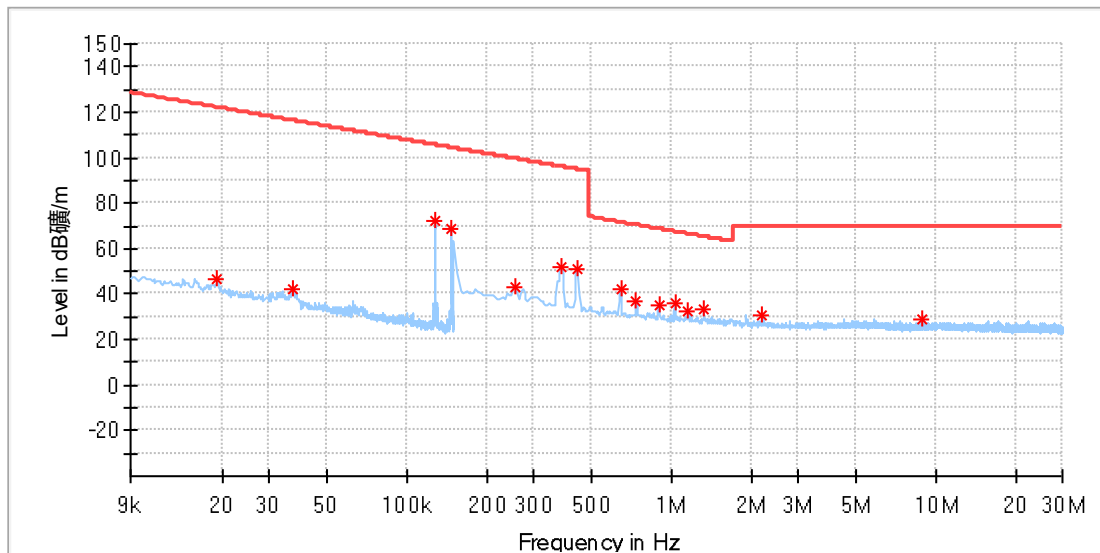

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	46.91	121.98	75.07	100.0	Z	172.0	19.9
0.036797	42.56	116.28	73.71	100.0	Z	89.0	19.9
0.128346	72.23	105.43	33.20	100.0	Z	151.0	19.9
0.147381	68.91	104.23	35.32	100.0	Z	332.0	19.9
0.255353	43.23	99.46	56.23	100.0	Z	257.0	19.9
0.382655	51.59	95.95	44.36	100.0	Z	191.0	19.9
0.439721	51.17	94.74	43.57	100.0	Z	348.0	19.9
0.641647	41.79	71.47	29.68	100.0	Z	112.0	19.9
0.733831	36.82	70.30	33.49	100.0	Z	34.0	19.9
0.896250	35.45	68.57	33.12	100.0	Z	108.0	19.9
1.027941	35.80	67.38	31.59	100.0	Z	55.0	19.9
1.155243	32.87	66.37	33.51	100.0	Z	101.0	19.9
1.326441	33.73	65.18	31.44	100.0	Z	26.0	19.9
2.208772	30.36	69.50	39.14	100.0	Z	257.0	20.0
8.806500	29.02	69.50	40.48	100.0	Z	52.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

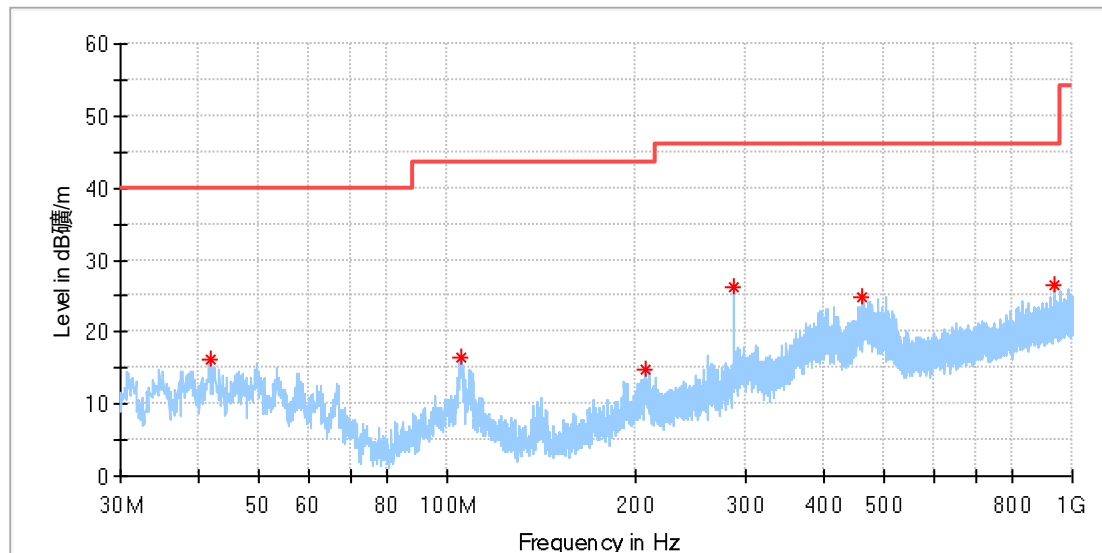

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.747778	16.23	40.00	23.77	100.0	H	69.0	-19.7
104.959444	16.51	43.50	26.99	100.0	H	311.0	-18.9
208.156667	14.79	43.50	28.71	100.0	H	339.0	-18.9
288.020000	26.23	46.00	19.77	100.0	H	12.0	-16.6
460.841667	24.78	46.00	21.22	100.0	H	12.0	-12.5
938.405000	26.54	46.00	19.46	100.0	H	78.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Charging
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

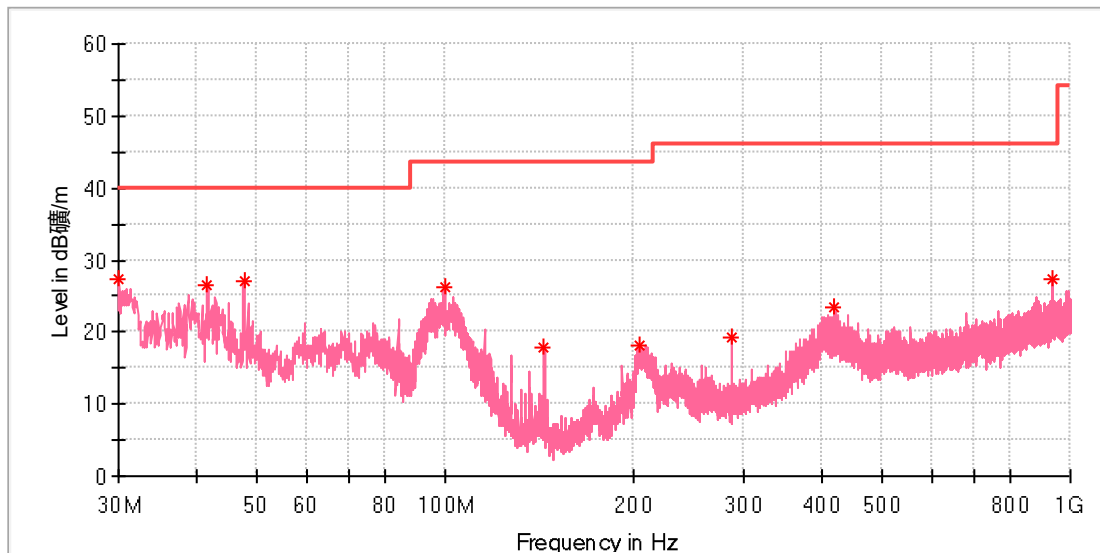

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.107778	27.35	40.00	12.65	100.0	V	254.0	-23.0
41.640000	26.56	40.00	13.44	100.0	V	318.0	-19.8
47.621667	27.04	40.00	12.96	100.0	V	203.0	-18.5
99.786111	26.22	43.50	17.28	100.0	V	60.0	-19.1
143.975000	17.79	43.50	25.71	100.0	V	233.0	-22.4
204.761667	18.09	43.50	25.41	100.0	V	340.0	-19.0
288.020000	19.36	46.00	26.64	100.0	V	211.0	-16.6
419.562778	23.31	46.00	22.69	100.0	V	354.0	-13.3
936.950000	27.21	46.00	18.79	100.0	V	0.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby1 mode

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Standby
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

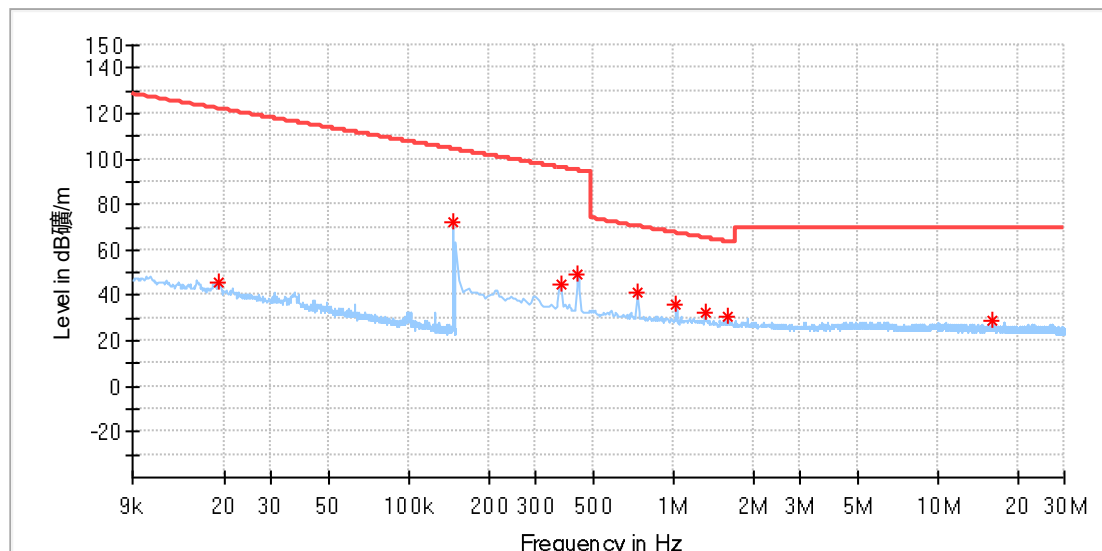

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	45.94	121.98	76.04	100.0	X	186.0	19.9
0.146475	72.55	104.28	31.73	100.0	X	131.0	19.9
0.373875	44.51	96.15	51.64	100.0	X	149.0	19.9
0.435331	49.53	94.83	45.30	100.0	X	217.0	19.9
0.729441	41.64	70.35	28.71	100.0	X	159.0	19.9
1.023552	35.85	67.42	31.57	100.0	X	159.0	19.9
1.313272	32.43	65.26	32.83	100.0	X	159.0	19.9
1.611772	30.98	63.49	32.51	100.0	X	159.0	19.9
16.102191	29.07	69.50	40.43	100.0	X	27.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

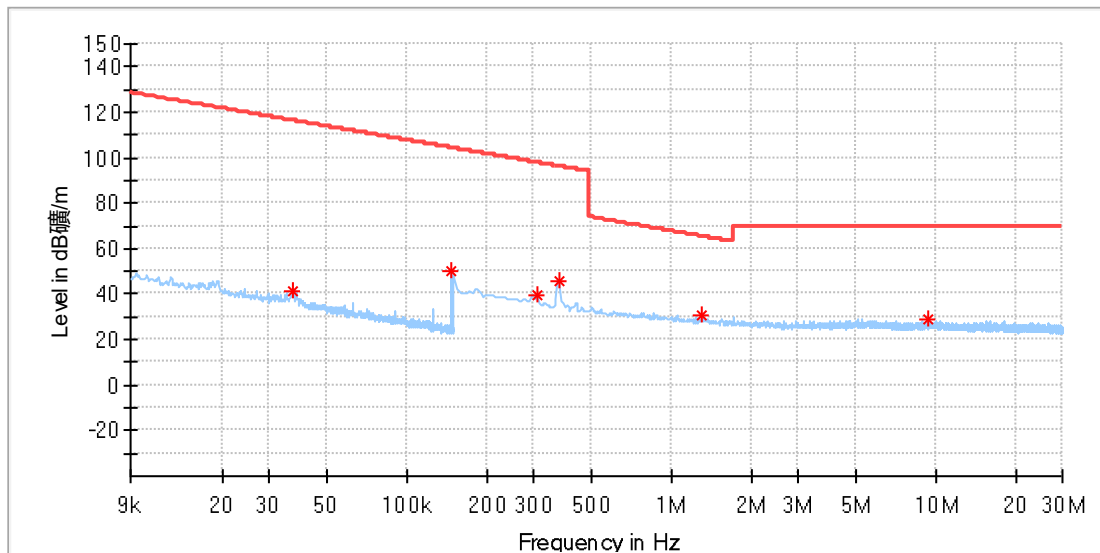

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036696	41.25	116.30	75.05	100.0	Y	38.0	19.9
0.146576	50.36	104.28	53.92	100.0	Y	226.0	19.9
0.312419	39.64	97.71	58.07	100.0	Y	48.0	19.9
0.373875	45.95	96.15	50.20	100.0	Y	233.0	19.9
1.308882	30.39	65.29	34.90	100.0	Y	200.0	19.9
9.390331	29.12	69.50	40.38	100.0	Y	236.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

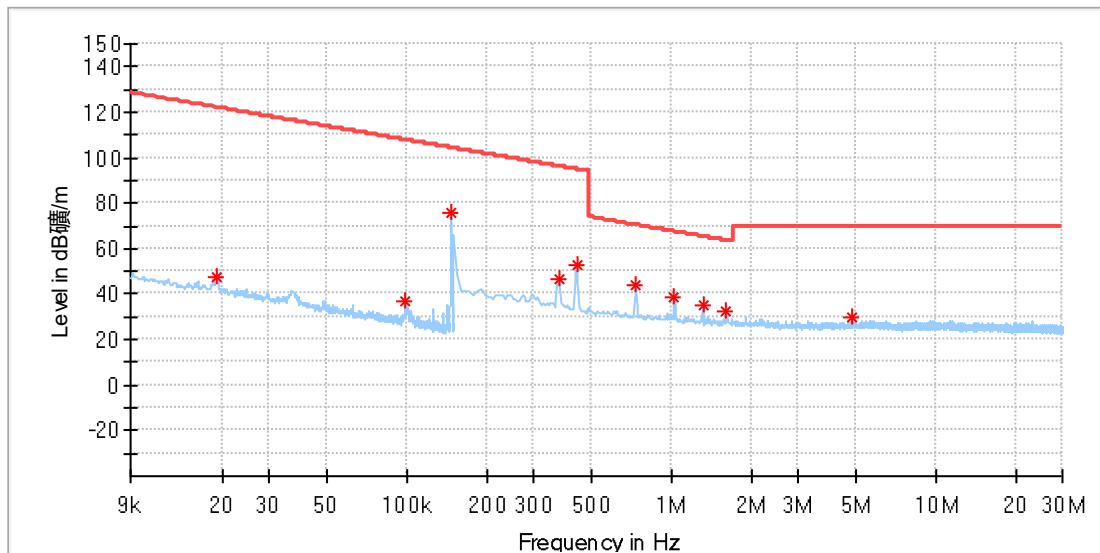

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	47.87	121.98	74.11	100.0	Z	345.0	19.9
0.098334	37.04	107.74	70.70	100.0	Z	26.0	19.9
0.146475	75.78	104.28	28.50	100.0	Z	229.0	19.9
0.373875	46.40	96.15	49.75	100.0	Z	228.0	19.9
0.439721	52.38	94.74	42.36	100.0	Z	142.0	19.9
0.729441	43.62	70.35	26.73	100.0	Z	142.0	19.9
1.023552	38.27	67.42	29.15	100.0	Z	109.0	19.9
1.313272	34.82	65.26	30.44	100.0	Z	142.0	19.9
1.607382	32.32	63.51	31.19	100.0	Z	232.0	19.9
4.825037	29.59	69.50	39.91	100.0	Z	124.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

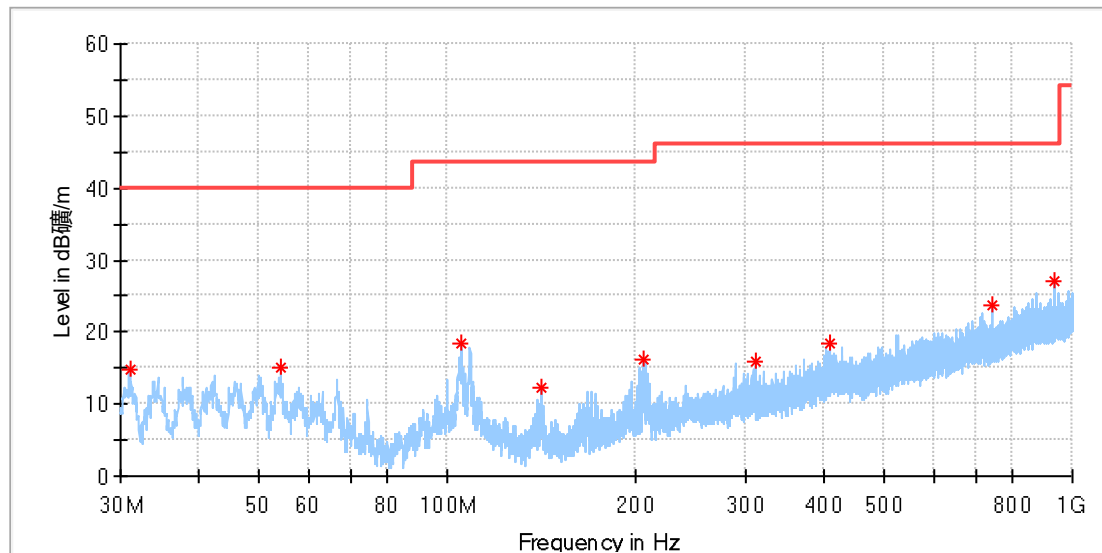

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.023889	14.75	40.00	25.25	100.0	H	94.0	-22.9
54.034444	15.20	40.00	24.80	100.0	H	15.0	-18.5
105.282778	18.32	43.50	25.18	100.0	H	125.0	-18.9
141.172778	12.22	43.50	31.28	100.0	H	248.0	-22.4
206.486111	16.17	43.50	27.33	100.0	H	336.0	-18.9
310.761111	16.03	46.00	29.97	100.0	H	156.0	-16.0
409.323889	18.34	46.00	27.66	100.0	H	0.0	-13.5
742.518889	23.79	46.00	22.21	100.0	H	319.0	-7.2
938.405000	27.06	46.00	18.94	100.0	H	49.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

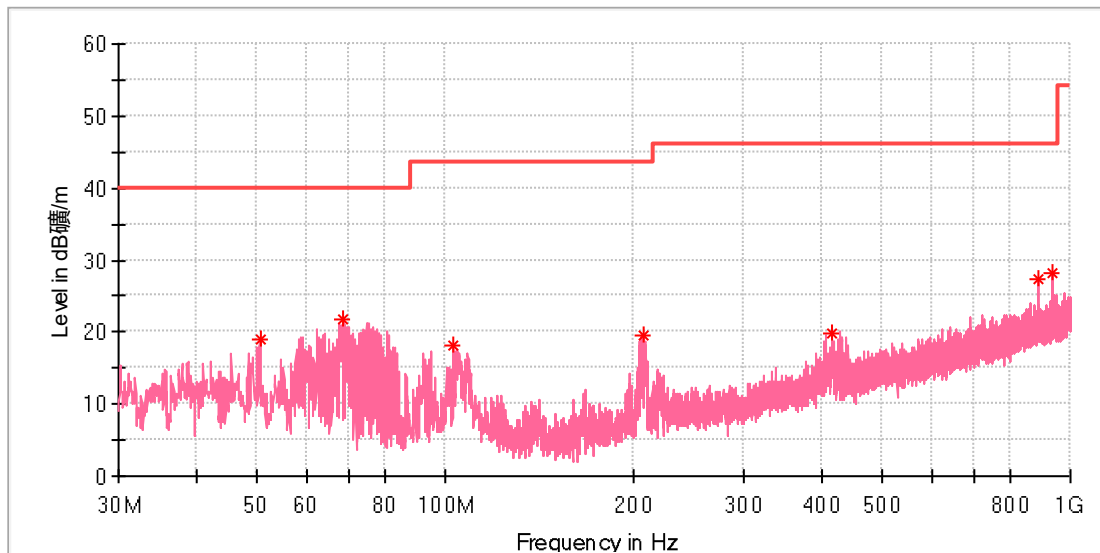

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.531667	19.09	40.00	20.91	100.0	V	188.0	-18.4
68.692222	21.75	40.00	18.25	100.0	V	188.0	-21.5
103.019444	18.02	43.50	25.48	100.0	V	0.0	-19.0
207.078889	19.60	43.50	23.90	100.0	V	316.0	-18.9
416.060000	19.81	46.00	26.19	100.0	V	286.0	-13.3
890.982778	27.34	46.00	18.66	100.0	V	36.0	-4.9
936.950000	28.09	46.00	17.91	100.0	V	188.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Standby2 mode

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Test Mode:	Standby
Order No/Sample No:	27240502/A004328958-005
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

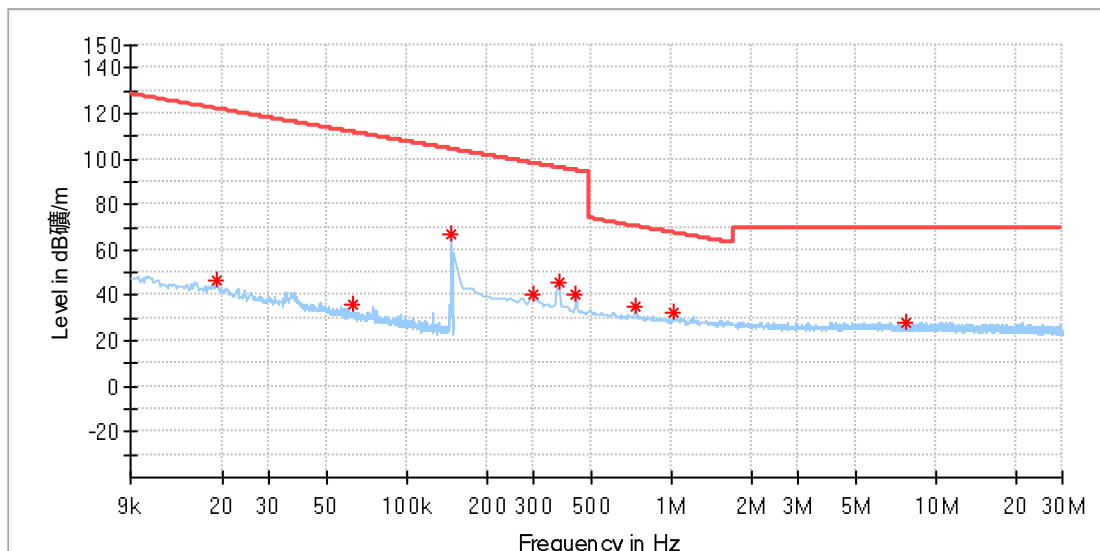

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.90	121.94	75.03	100.0	X	44.0	19.9
0.062580	36.32	111.67	75.35	100.0	X	186.0	19.9
0.146475	66.92	104.28	37.37	100.0	X	284.0	19.9
0.299250	40.64	98.08	57.45	100.0	X	308.0	19.9
0.373875	45.48	96.15	50.67	100.0	X	49.0	19.9
0.435331	40.45	94.83	54.38	100.0	X	128.0	19.9
0.729441	35.22	70.35	35.14	100.0	X	301.0	19.9
1.023552	32.08	67.42	35.34	100.0	X	301.0	19.9
7.638838	28.15	69.50	41.35	100.0	X	75.0	20.1

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

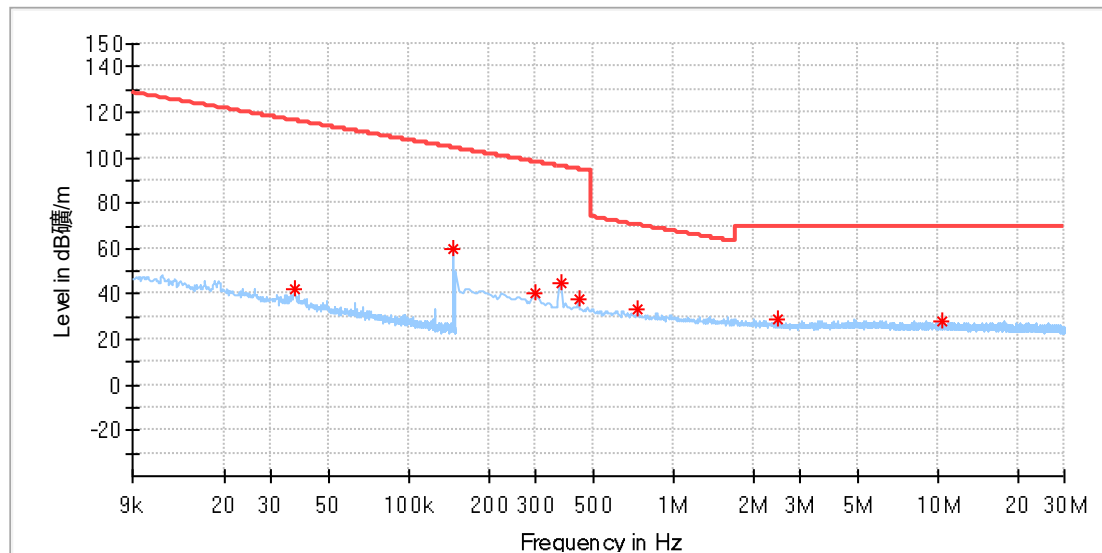

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	41.77	116.23	74.46	100.0	Y	12.0	19.9
0.146475	59.74	104.28	44.54	100.0	Y	197.0	19.9
0.299250	40.23	98.08	57.85	100.0	Y	90.0	19.9
0.373875	44.90	96.15	51.25	100.0	Y	309.0	19.9
0.439721	38.02	94.74	56.72	100.0	Y	219.0	19.9
0.729441	33.07	70.35	37.28	100.0	Y	219.0	19.9
2.480934	29.14	69.50	40.36	100.0	Y	309.0	20.0
10.382405	28.17	69.50	41.33	100.0	Y	291.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

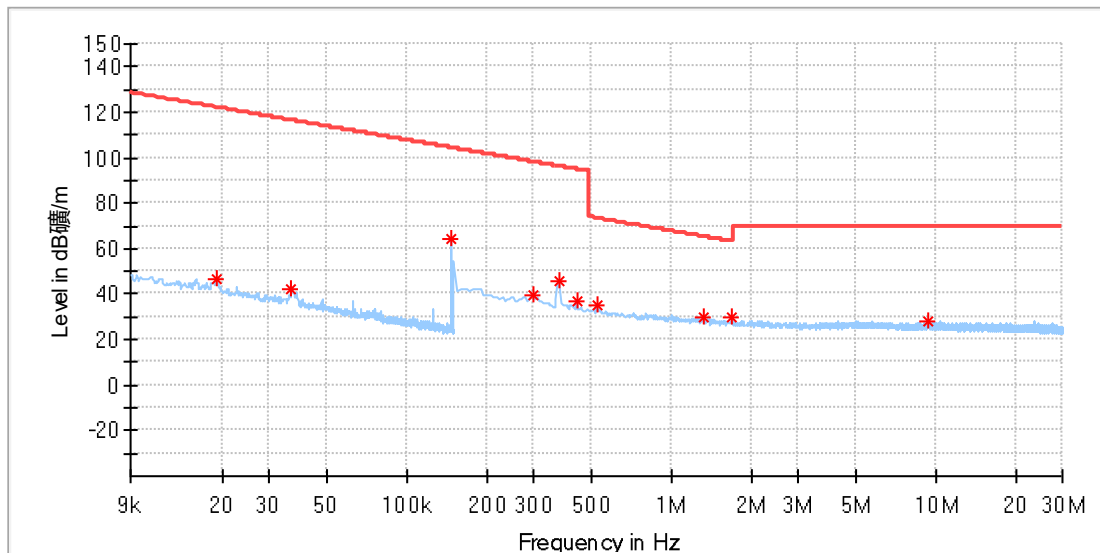

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.78	121.94	75.16	100.0	Z	0.0	19.9
0.036596	42.00	116.32	74.32	100.0	Z	264.0	19.9
0.146576	64.00	104.28	40.28	100.0	Z	282.0	19.9
0.299250	39.59	98.08	58.49	100.0	Z	126.0	19.9
0.373875	45.62	96.15	50.53	100.0	Z	80.0	19.9
0.439721	36.68	94.74	58.06	100.0	Z	187.0	19.9
0.523125	35.14	73.23	38.09	100.0	Z	11.0	19.9
1.322052	29.69	65.20	35.51	100.0	Z	87.0	19.9
1.677618	29.45	63.14	33.69	100.0	Z	263.0	20.0
9.333265	28.15	69.50	41.35	100.0	Z	336.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

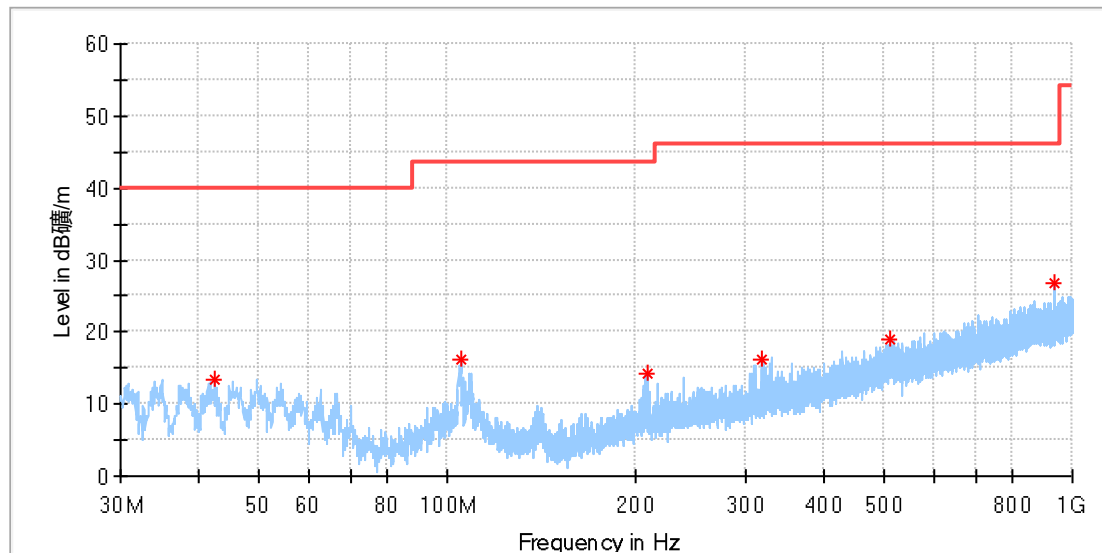

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.448333	13.46	40.00	26.54	100.0	H	275.0	-19.6
105.282778	16.17	43.50	27.33	100.0	H	60.0	-18.9
208.372222	14.17	43.50	29.33	100.0	H	354.0	-18.9
319.598889	16.28	46.00	29.72	100.0	H	233.0	-15.7
511.227778	18.96	46.00	27.04	100.0	H	86.0	-11.7
936.950000	26.66	46.00	19.34	100.0	H	209.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Wireless Charger
Model: W759
Test Mode: Standby
Order No/Sample No: 27240502/A004328958-005
Test Voltage: AC 120V, 60Hz
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

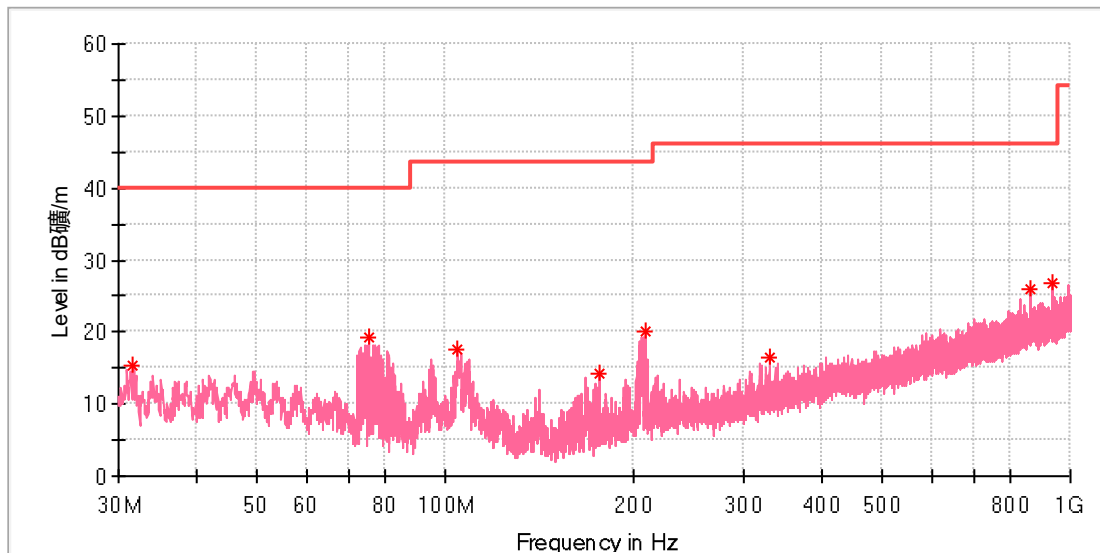

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.670556	15.48	40.00	24.52	100.0	V	306.0	-22.8
75.266667	19.19	40.00	20.81	100.0	V	0.0	-23.5
104.743889	17.49	43.50	26.01	100.0	V	100.0	-18.9
176.793333	14.35	43.50	29.15	100.0	V	314.0	-20.9
208.480000	20.19	43.50	23.31	100.0	V	266.0	-18.9
329.298889	16.39	46.00	29.61	100.0	V	6.0	-15.3
863.122222	25.96	46.00	20.04	100.0	V	76.0	-5.2
936.950000	26.90	46.00	19.10	100.0	V	356.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	2-in-1 Wireless Charger
Model:	W759
Sample No:	A004328958-001~007
Test Mode:	Wireless charging (Co-location)
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15C
Tem./Hum./Pressure:	24.4°C/50.2%/101kPa
Tested By:	Kai Chen
Reviewed by	Charlie Zha

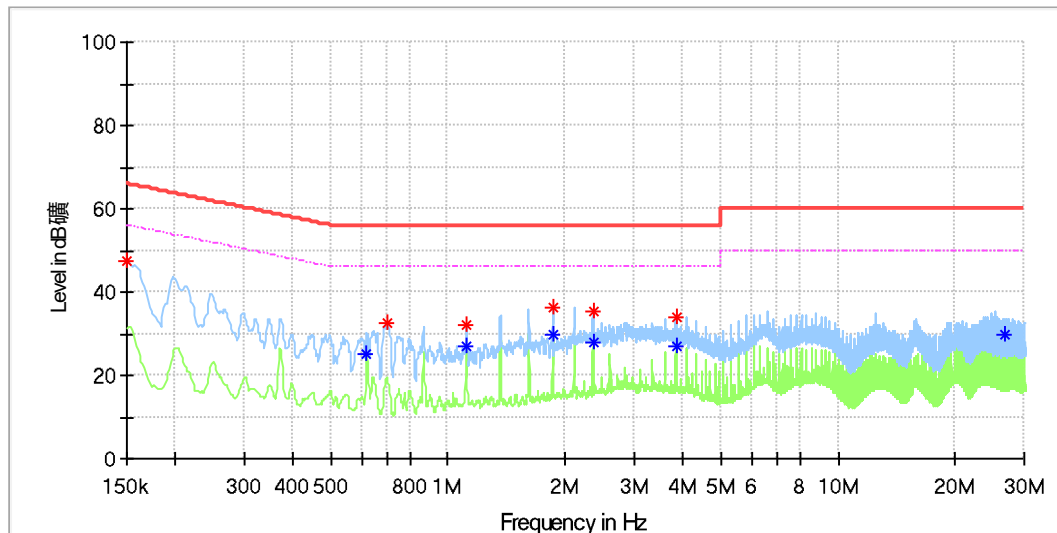

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.15	47.49	---	66.00	18.51	N	10.25
0.62	---	24.89	46.00	21.11	N	10.28
0.70	32.58	---	56.00	23.42	N	10.29
1.11	32.21	---	56.00	23.79	N	10.29
1.11	---	26.78	46.00	19.22	N	10.29
1.86	---	29.74	46.00	16.26	N	10.31
1.86	36.30	---	56.00	19.70	N	10.31
2.35	---	27.73	46.00	18.27	N	10.32
2.35	35.29	---	56.00	20.71	N	10.32
3.84	33.82	---	56.00	22.18	N	10.38
3.84	---	27.07	46.00	18.93	N	10.38
26.75	---	29.64	50.00	20.36	N	11.36

Final_Result

[illegible]