

Prüfbericht-Nr.: Test report no.:	CN26VDQ4 001	Auftrags-Nr.: Order no.:	27200037	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2026-01-04	
Auftraggeber: Client:	Ugreen Group Limited UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, 518000, China			
Prüfgegenstand: Test item:	3-in-1 Wireless Charger			
Bezeichnung / Typ-Nr.: Identification / Type no.:	W777			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2026-02-27	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A004214252-001~026 A004214202-001~006			
Prüfzeitraum: Testing period:	2026-03-10 - 2026-04-17			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2026-04-17	Signed by: Lin Lin		Ausstellungsdatum: Issue date: 2026-04-17	Signed by: Bell Hu
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2AQI5-W777			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26VDQ4 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26VDQ4 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

Prüfbericht - Nr.: CN26VDQ4 001
Test Report No.:

Seite 5 von 16
Page 5 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
OSP	R&S	OSP 150	101017	2025-10-30	2026-10-29
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2025-10-30	2026-10-29
Wideband Power Sensor	R&S	NRP-Z81	105677	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2027-02-03
Artificial Mains Network	R&S	ENV216	102333	2026-07-18
Artificial Mains Network	R&S	ENV216	101445	2027-02-03
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 3-in-1 Wireless Charger which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	3-in-1 Wireless Charger
Type Designation:	W777
Product Number (P/N) code:	75249, 75249P, 75249X, 75249A, 75249B, 75249U, 75249JP, 75249T, 75249ZD
FCC ID:	2AQI5-W777
Operating Voltage:	USB-C1(IN) Input: 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3A Wireless Charging Output Power: iPhone 25.0W Max, Apple Watch 5.0W Max, AirPods 5.0 Max Wireless Charging Total Output Power: 32.5W Max
Operating Temperature Range:	-10 °C ~ +35 °C
Wireless charging output power:	Magnetic Wireless Charger: 5W / 7.5W / 10W / 15W / 25WMax. True Wireless Stereo (TWS) Wireless Charging: 5W Max. Watch Charging: 5W Max.
AC/DC Adapter:	Model: W0452 Input: 100-240Vac, 50/60Hz, 1.2A Output: 5Vdc, 3A/ 9Vdc, 3A/ 12Vdc, 3A/ 15Vdc, 3A/ 20Vdc, 2.25A
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 326.5 kHz & 360kHz & 1.778MHz
Operating Frequency:	Coil1: 110 - 148.5 kHz, 360 kHz Coil2: 110 - 148.5 kHz Coil3: 326.5 kHz, 1.778MHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless output power:	Coil1: 5W/7.5W/10W for 110 - 148.5 kHz, 15W/25W for 360 kHz Coil2: 5W for 110 - 148.5 kHz Coil3: 5W for 326.5 kHz, 1.778MHz

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W (Phone)
- B. On, Wireless Charging, EPP, 7.5W (Phone)
- C. On, Wireless Charging, EPP, 10W (Phone)
- D. On, Wireless Charging, MPP, 15W (Phone)
- E. On, Wireless Charging, MPP, 25W (Phone)
- F. On, Wireless Charging, 5W [True Wireless Stereo (TWS)]
- G. On, Wireless Charging, 5W (Watch)
- H. On, Co-location mode (Worst case mode A~E + mode F + mode G)
- I. On, Standby mode
- J. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - FCC/IC Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model W777 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Wireless charge Load	YBZ	YBZ-MPP25	N/A
Watch	Apple	iWatch	N/A
Earphone	Apple	Airpods Pro2	N/A
Cell Phone	Apple	iPhone 16 Plus	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

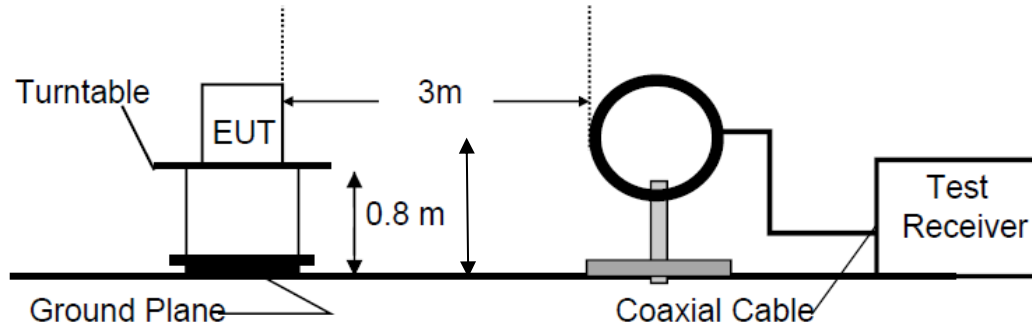


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


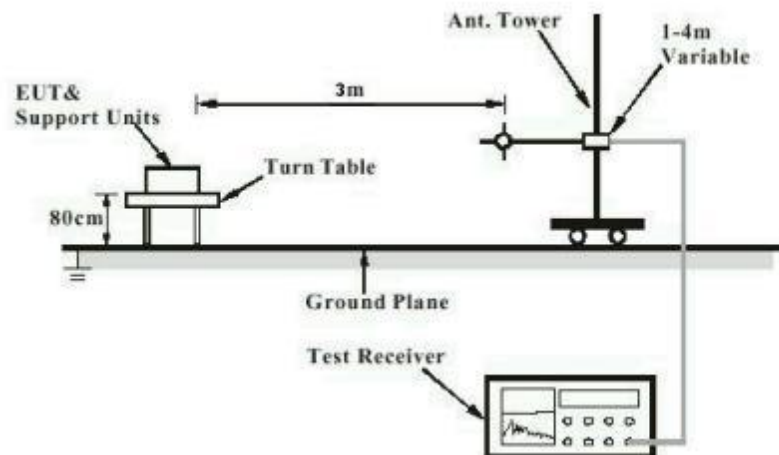


Diagram of Measurement Configuration for Mains Conduction Measurement

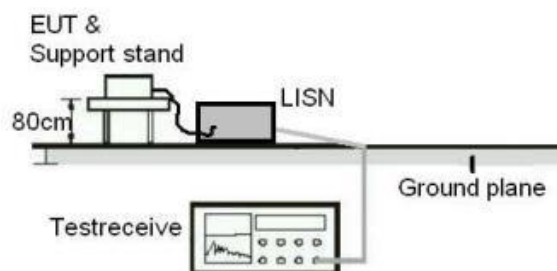

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.203

The following describes the three ways that can be used to demonstrate compliance to Section 15.203

1. Antenna permanently attached
2. Unique (non-standard) antenna connector
3. Professional installation

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN26VDQ4 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-03-16 to 2026-04-02
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H, I
Ambient temperature	: 22 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

This testing was carried out on all operation modes, but only the worst case and representative cases was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26VDQ4 001
Test Report No.:

Seite 14 von 16
Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10: 2020
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2026-03-18 to 2026-04-02
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H, I
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

This testing was carried out on all operation modes, but only the worst case and representative cases was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26VDQ4 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-03-10 to 2026-04-17
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C, D, E, F, G, H, I
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

This testing was carried out on all operation modes, but only the worst case and representative cases was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (10W).....	2
Wireless charging (25W).....	3
Wireless charging (TWS 5W)	4
Wireless charging (Watch 5W_326.5kHz)	5
Wireless charging (Watch 5W_1.778MHz).....	6
Standby mode	7
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	8
Wireless charging (10W).....	8
Wireless charging (25W).....	19
Wireless charging (TWS 5W)	30
Wireless charging (Watch 5W_326.5kHz)	41
Wireless charging (Watch 5W_1.778MHz).....	52
Wireless charging (Co-location).....	57
Standby mode	62
APPENDIX A.4: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	67


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (10W)

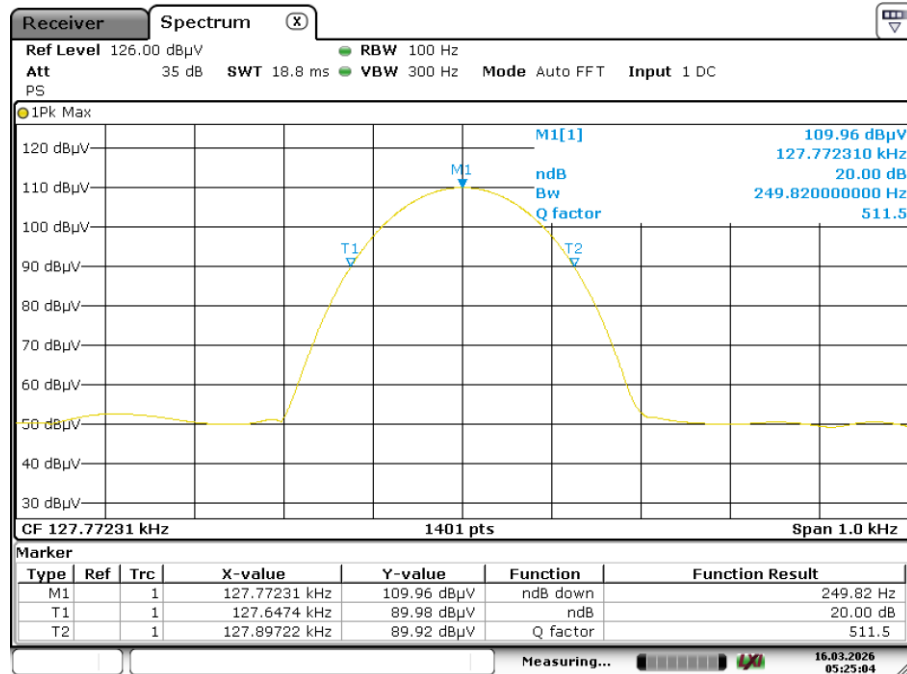


Date: 16.MAR.2026 05:25:04

Wireless charging (25W)

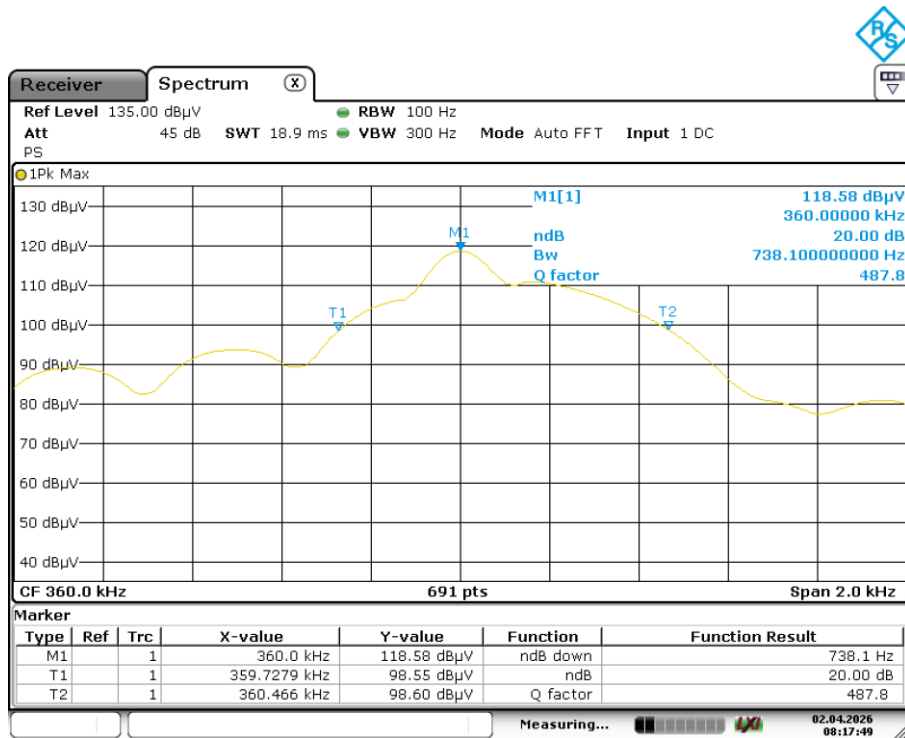


Date: 2.APR.2026 08:17:49

Wireless charging (TWS 5W)

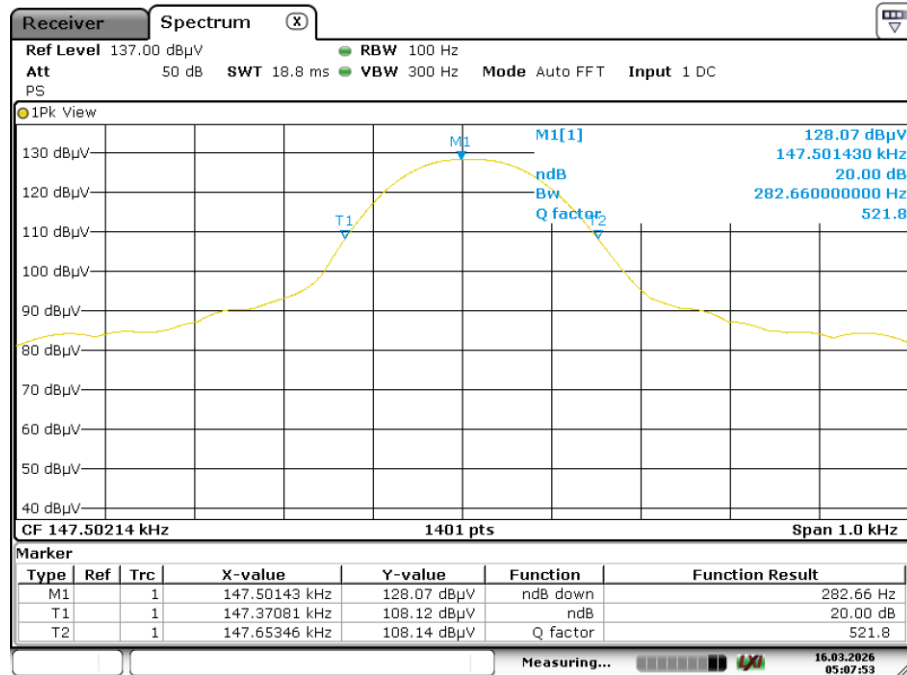


Date: 16.MAR.2026 05:07:53

Wireless charging (Watch 5W_326.5kHz)

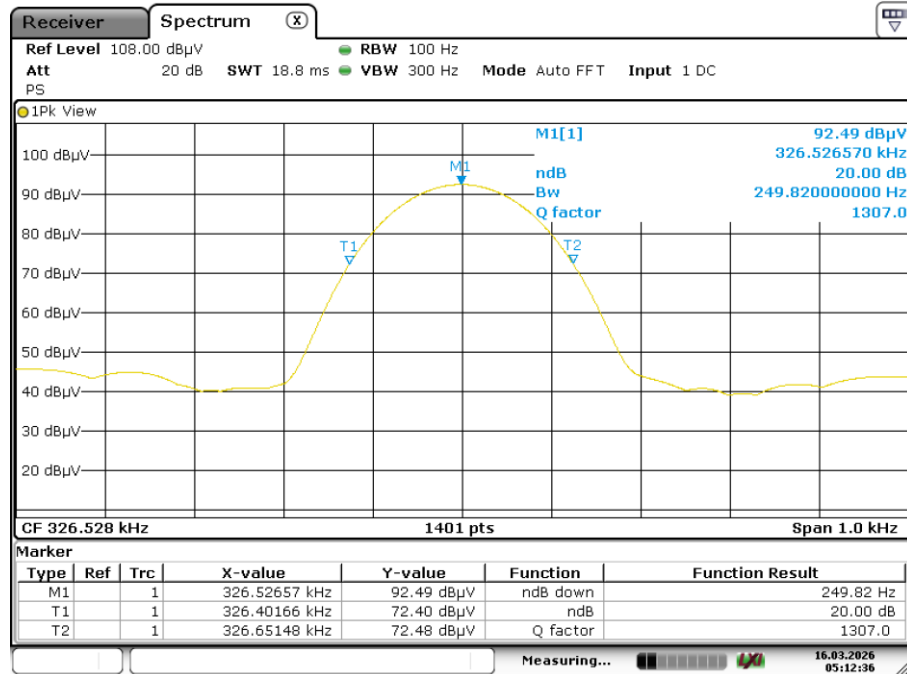


Date: 16.MAR.2026 05:12:36

Wireless charging (Watch 5W_1.778MHz)

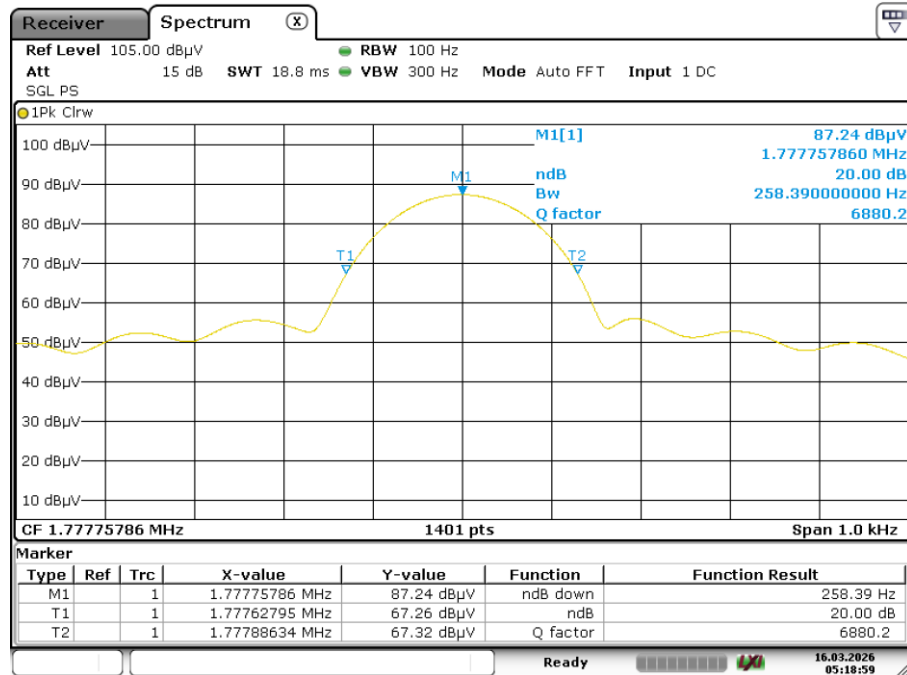

Date: 16.MAR.2026 05:18:59

Standby mode

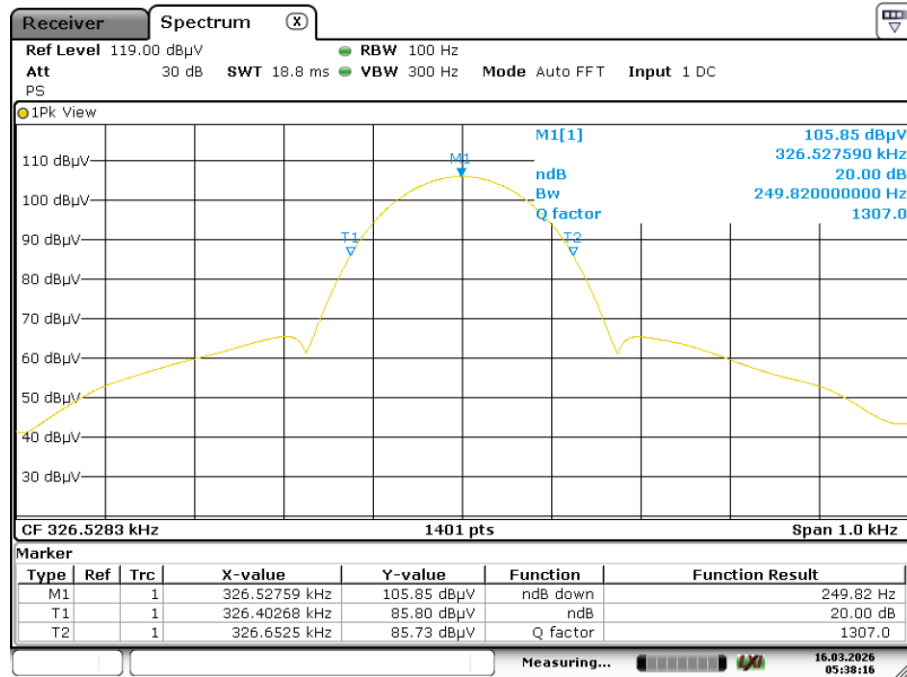

Date: 16.MAR.2026 05:38:16


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (10W)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Charging
Order No/Sample No:	27200037/A004214252-009
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

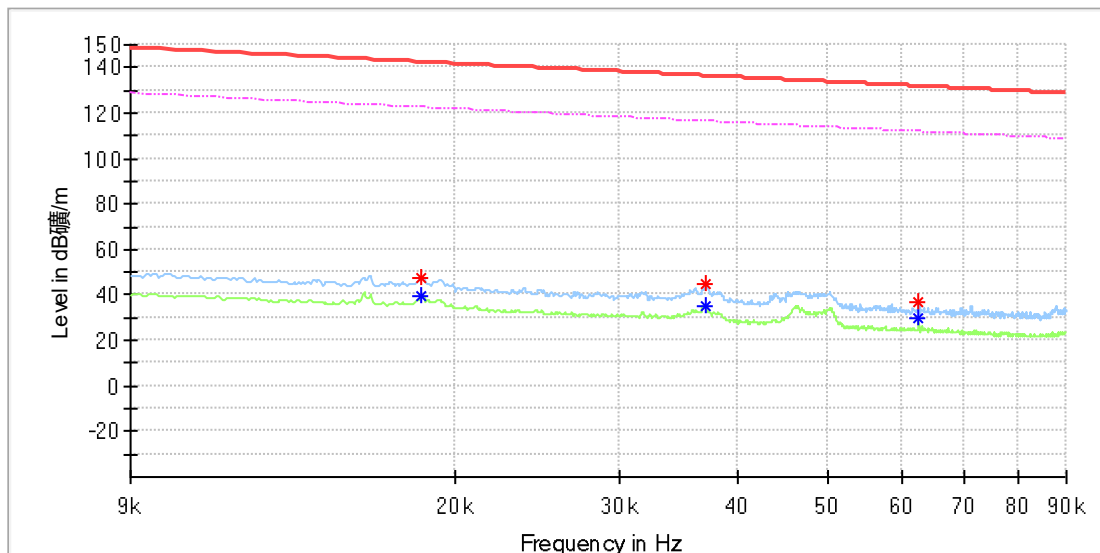


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	47.56	---	142.28	94.72	100.0	X	48.0	20.0
0.018431	---	39.52	122.28	82.76	100.0	X	48.0	20.0
0.037061	44.79	---	136.21	91.42	100.0	X	109.0	20.0
0.037119	---	35.41	116.20	80.79	100.0	X	109.0	20.0
0.062576	36.83	---	131.67	94.84	100.0	X	97.0	20.0
0.062576	---	29.44	111.67	82.23	100.0	X	97.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

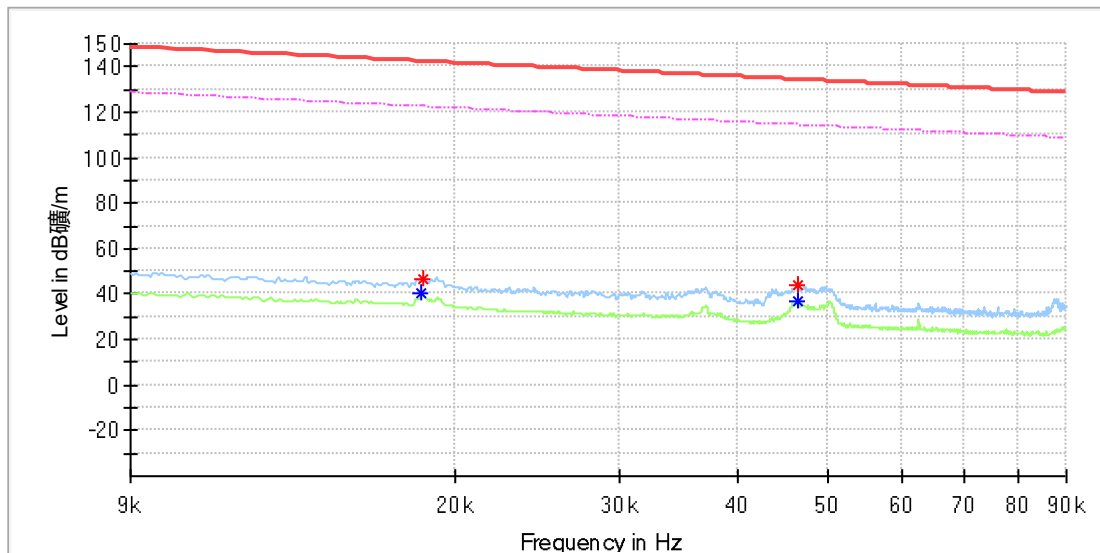


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	40.44	122.28	81.83	100.0	Y	0.0	20.0
0.018489	46.88	---	142.25	95.37	100.0	Y	163.0	20.0
0.046376	43.92	---	134.27	90.34	100.0	Y	292.0	20.0
0.046376	---	37.32	114.27	76.94	100.0	Y	292.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

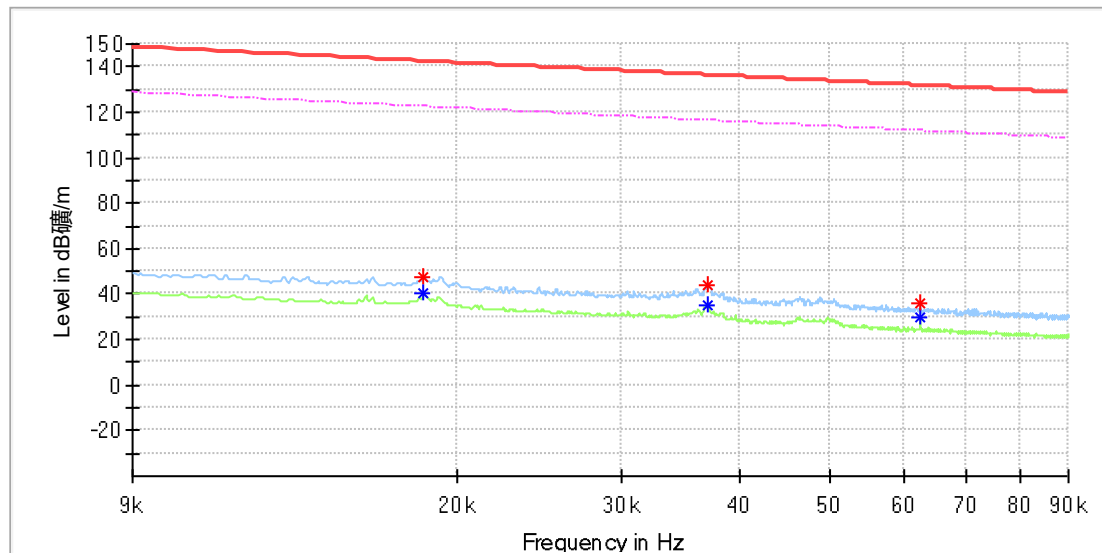


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	47.79	---	142.28	94.49	100.0	Z	14.0	20.0
0.018431	---	40.21	122.28	82.07	100.0	Z	14.0	20.0
0.037119	---	35.52	116.20	80.68	100.0	Z	25.0	20.0
0.037119	43.57	---	136.20	92.63	100.0	Z	25.0	20.0
0.062460	35.83	---	131.68	95.85	100.0	Z	208.0	20.0
0.062460	---	29.95	111.68	81.73	100.0	Z	208.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

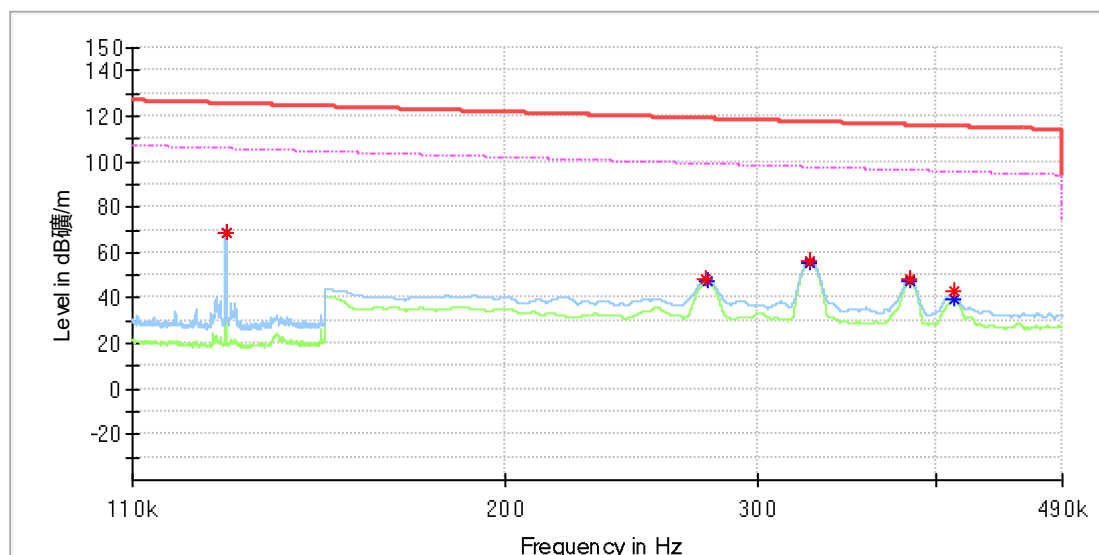


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	68.90	---	125.47	56.56	100.0	X	124.0	20.0
0.127772	---	68.81	105.47	36.66	100.0	X	124.0	20.0
0.276450	48.71	---	118.77	70.06	100.0	X	267.0	20.0
0.276700	---	47.22	98.76	51.54	100.0	X	267.0	20.0
0.326600	---	55.76	97.32	41.56	100.0	X	231.0	20.0
0.326650	56.00	---	117.32	61.32	100.0	X	231.0	20.0
0.383100	48.05	---	115.94	67.89	100.0	X	107.0	20.0
0.383450	---	47.15	95.93	48.78	100.0	X	107.0	20.0
0.411300	42.71	---	115.32	72.61	100.0	X	350.0	20.0
0.412000	---	39.43	95.31	55.87	100.0	X	350.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

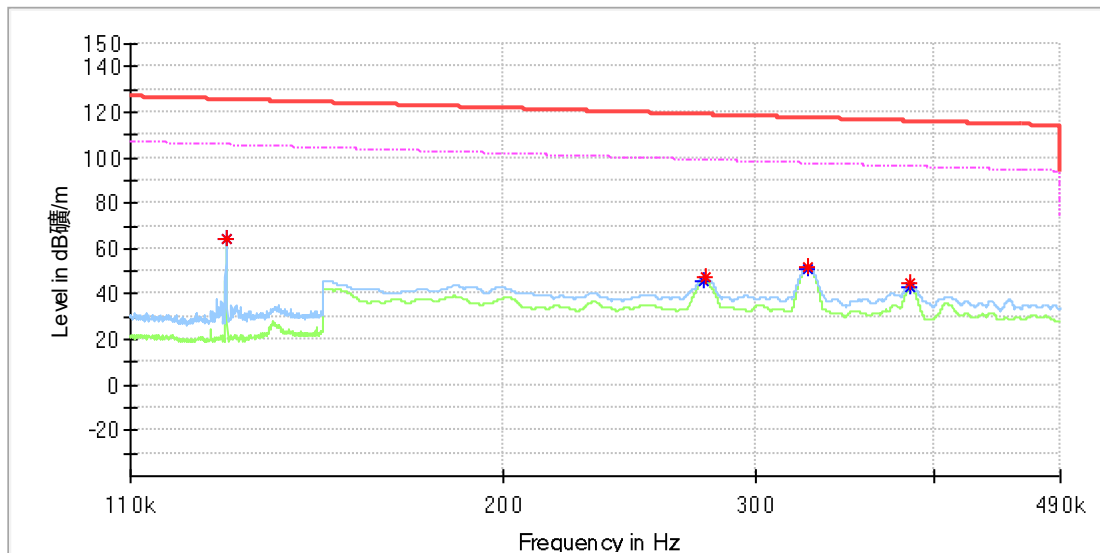


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128343	64.12	---	125.43	61.31	100.0	Y	204.0	20.0
0.128343	---	63.99	105.43	41.44	100.0	Y	204.0	20.0
0.276600	---	45.73	98.76	53.03	100.0	Y	0.0	20.0
0.276900	47.45	---	118.76	71.30	100.0	Y	0.0	20.0
0.326450	---	51.42	97.33	45.91	100.0	Y	0.0	20.0
0.326600	52.09	---	117.32	65.23	100.0	Y	0.0	20.0
0.384850	44.42	---	115.90	71.48	100.0	Y	16.0	20.0
0.385200	---	42.82	95.89	53.07	100.0	Y	16.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

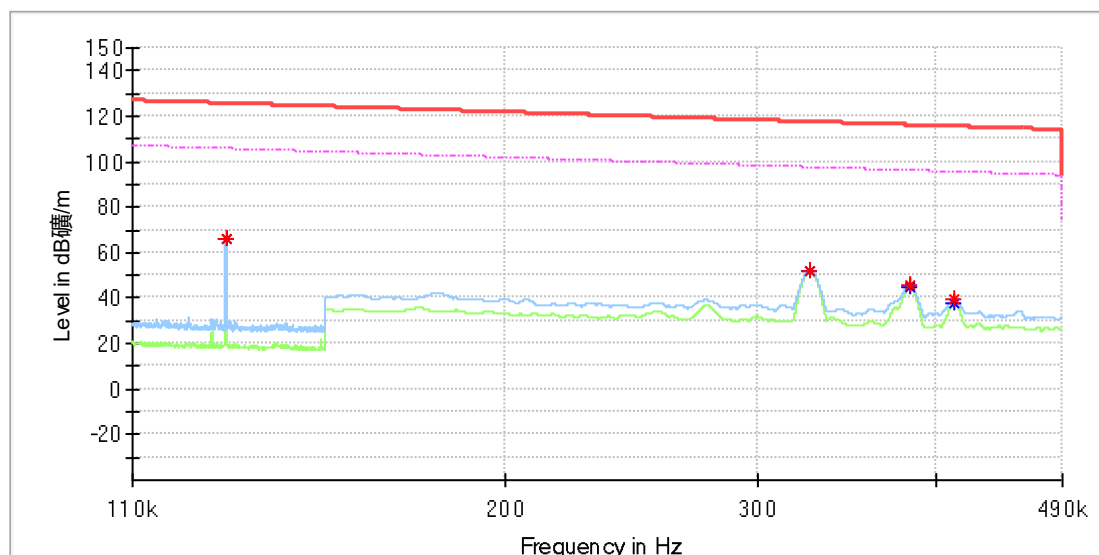


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127772	---	66.29	105.47	39.18	100.0	Z	108.0	20.0
0.127772	66.37	---	125.47	59.10	100.0	Z	108.0	20.0
0.326550	---	51.67	97.32	45.65	100.0	Z	280.0	20.0
0.326750	52.08	---	117.32	65.24	100.0	Z	280.0	20.0
0.383200	---	44.50	95.93	51.43	100.0	Z	118.0	20.0
0.383250	45.87	---	115.93	70.06	100.0	Z	118.0	20.0
0.411800	39.53	---	115.31	75.78	100.0	Z	357.0	20.0
0.411950	---	37.37	95.31	57.94	100.0	Z	357.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

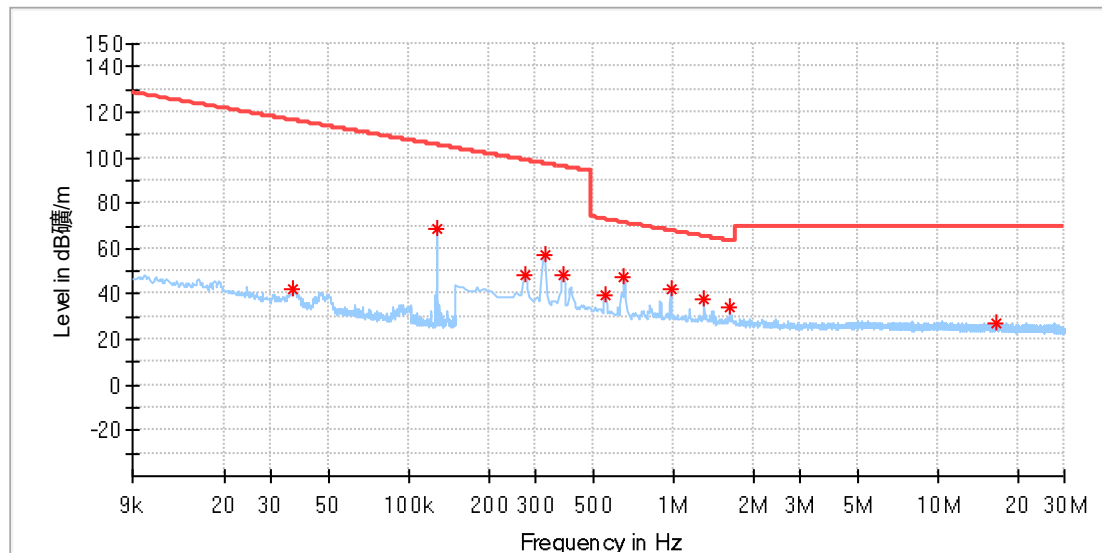

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036092	42.38	116.44	74.06	100.0	X	82.0	19.9
0.127843	68.76	105.46	36.70	100.0	X	126.0	19.9
0.272912	48.48	98.88	50.41	100.0	X	72.0	19.9
0.325588	56.89	97.35	40.46	100.0	X	274.0	19.9
0.382655	48.34	95.95	47.61	100.0	X	112.0	19.9
0.549463	39.91	72.81	32.90	100.0	X	101.0	19.9
0.650427	47.08	71.35	24.27	100.0	X	274.0	19.9
0.979655	42.33	67.80	25.47	100.0	X	274.0	19.9
1.304493	37.98	65.32	27.34	100.0	X	274.0	19.9
1.633721	33.90	63.37	29.47	100.0	X	274.0	20.0
16.624566	27.34	69.50	42.16	100.0	X	266.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

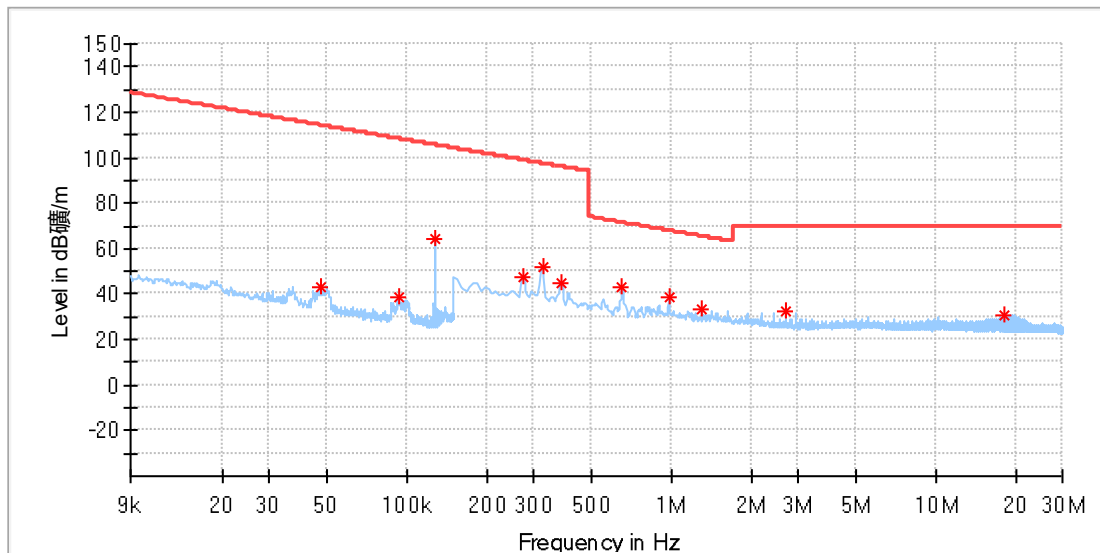

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.047070	43.39	114.14	70.75	100.0	Y	36.0	19.9
0.092492	38.57	108.27	69.70	100.0	Y	346.0	19.9
0.128346	63.94	105.43	41.49	100.0	Y	205.0	19.9
0.272912	47.85	98.88	51.03	100.0	Y	4.0	19.9
0.325588	52.20	97.35	45.15	100.0	Y	0.0	19.9
0.382655	44.45	95.95	51.50	100.0	Y	32.0	19.9
0.650427	42.66	71.35	28.69	100.0	Y	0.0	19.9
0.979655	38.48	67.80	29.32	100.0	Y	0.0	19.9
1.304493	33.73	65.32	31.59	100.0	Y	0.0	19.9
2.691640	32.26	69.50	37.24	100.0	Y	313.0	20.0
18.226809	30.65	69.50	38.85	100.0	Y	306.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

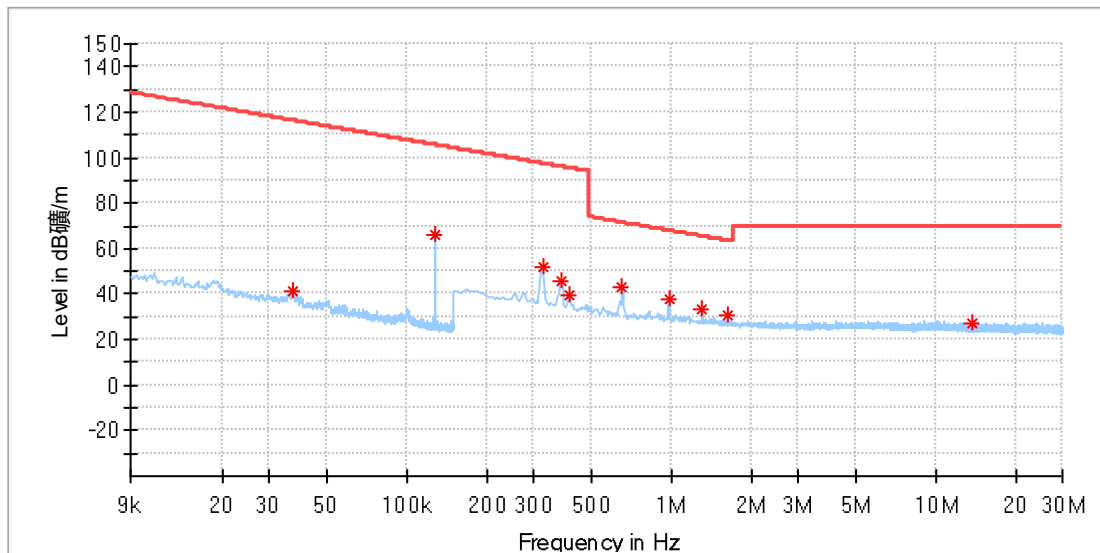

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	41.44	116.25	74.81	100.0	Z	1.0	19.9
0.127843	66.18	105.46	39.28	100.0	Z	105.0	19.9
0.325588	52.13	97.35	45.21	100.0	Z	254.0	19.9
0.382655	45.82	95.95	50.13	100.0	Z	91.0	19.9
0.408993	39.77	95.37	55.60	100.0	Z	357.0	19.9
0.650427	43.40	71.35	27.95	100.0	Z	254.0	19.9
0.979655	37.91	67.80	29.89	100.0	Z	254.0	19.9
1.304493	33.64	65.32	31.68	100.0	Z	254.0	19.9
1.633721	30.31	63.37	33.06	100.0	Z	301.0	20.0
13.753699	27.35	69.50	42.15	100.0	Z	147.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

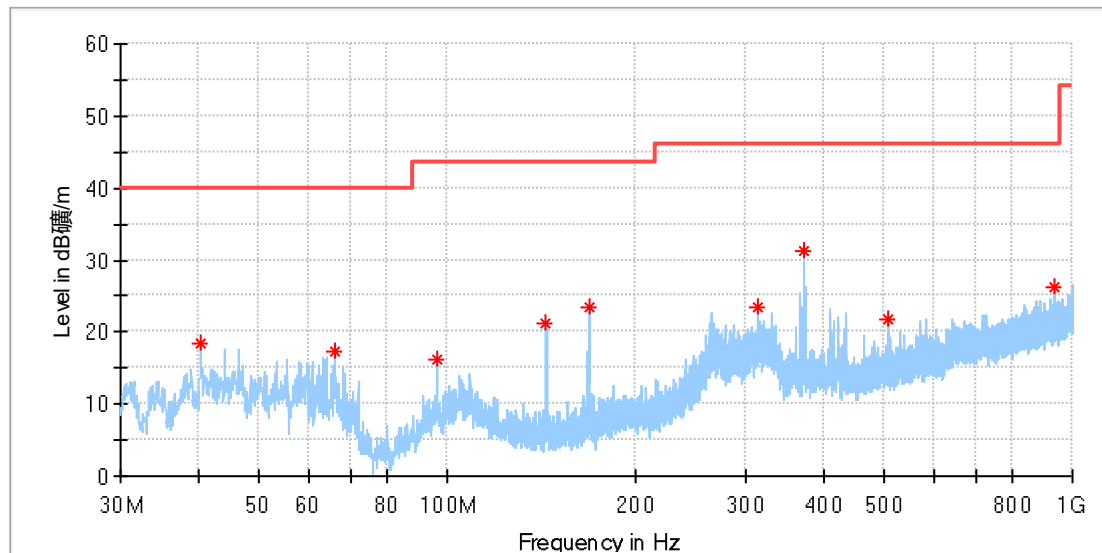

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.346667	18.36	40.00	21.64	100.0	H	178.0	-20.1
65.943889	17.26	40.00	22.74	100.0	H	310.0	-20.6
96.229444	16.20	43.50	27.30	100.0	H	273.0	-19.7
143.975000	21.19	43.50	22.31	100.0	H	216.0	-22.4
168.332778	23.34	43.50	20.16	100.0	H	267.0	-21.4
312.862778	23.46	46.00	22.54	100.0	H	310.0	-15.9
372.841111	31.26	46.00	14.74	100.0	H	267.0	-14.4
506.323889	21.74	46.00	24.26	100.0	H	208.0	-11.8
938.458889	26.33	46.00	19.67	100.0	H	338.0	-4.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

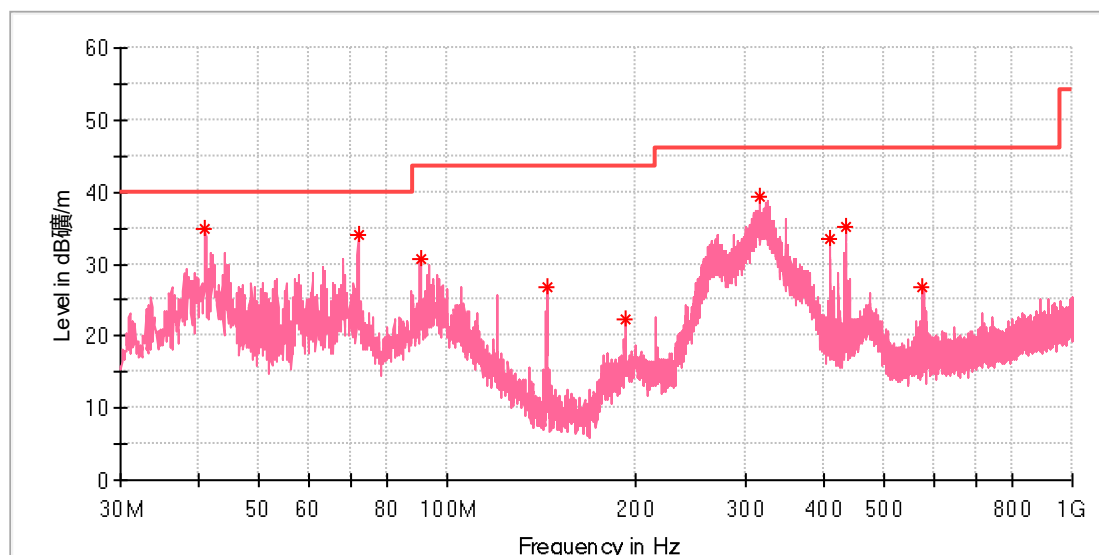

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.993333	34.76	40.00	5.24	100.0	V	232.0	-19.9
71.979444	34.07	40.00	5.93	100.0	V	96.0	-22.6
90.463333	30.76	43.50	12.74	100.0	V	0.0	-21.0
144.352222	26.65	43.50	16.85	100.0	V	64.0	-22.4
192.475000	22.40	43.50	21.10	100.0	V	207.0	-19.5
315.233889	39.25	46.00	6.75	100.0	V	130.0	-15.9
408.946667	33.40	46.00	12.60	100.0	V	169.0	-13.5
433.142778	35.06	46.00	10.94	100.0	V	169.0	-13.1
576.648889	26.81	46.00	19.19	100.0	V	275.0	-10.2


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (25W)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Charging
Order No/Sample No:	27200037/A004214252-026
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

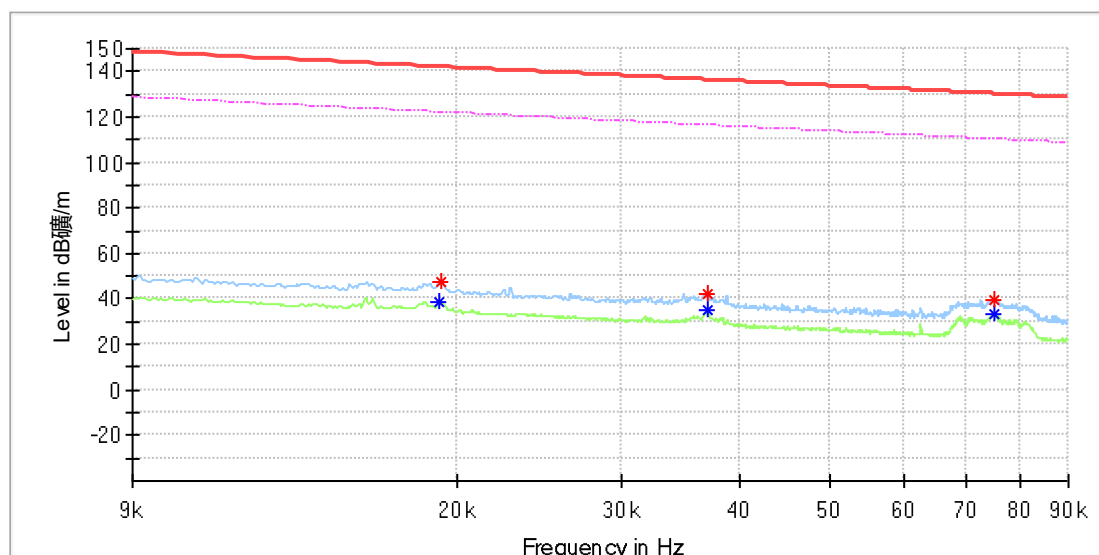


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	---	38.42	121.96	83.53	100.0	X	76.0	20.0
0.019241	47.20	---	141.90	94.71	100.0	X	0.0	20.0
0.037061	42.31	---	136.21	93.90	100.0	X	124.0	20.0
0.037061	---	34.74	116.21	81.48	100.0	X	124.0	20.0
0.074841	---	33.39	110.11	76.73	100.0	X	0.0	20.0
0.074899	39.95	---	130.11	90.16	100.0	X	0.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

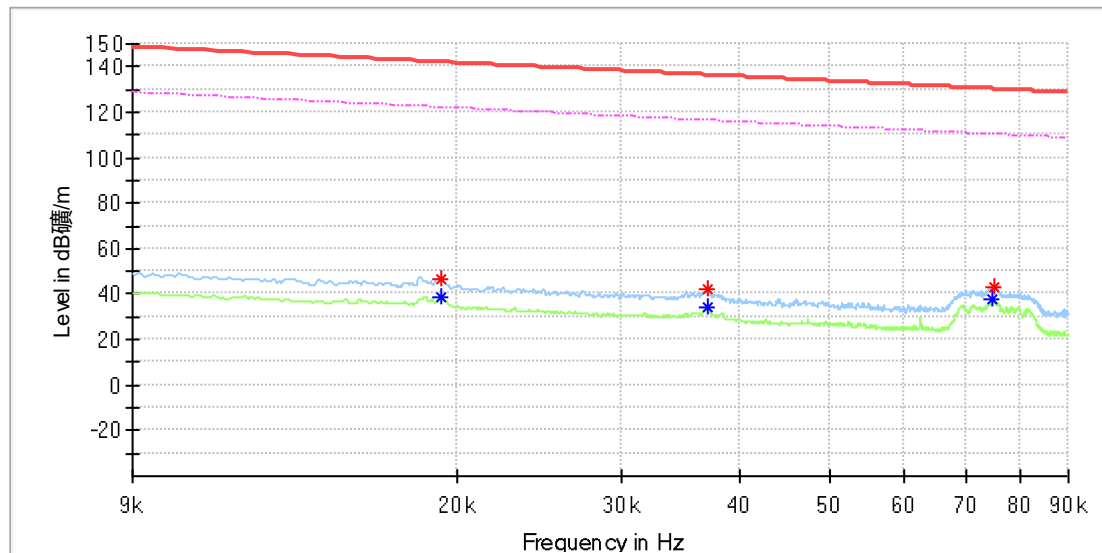


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019241	47.03	---	141.90	94.87	100.0	Y	338.0	20.0
0.019241	---	38.99	121.90	82.92	100.0	Y	338.0	20.0
0.037061	42.19	---	136.21	94.02	100.0	Y	0.0	20.0
0.037061	---	33.89	116.21	82.32	100.0	Y	0.0	20.0
0.074784	---	37.75	110.12	72.37	100.0	Y	288.0	20.0
0.074957	43.42	---	130.10	86.68	100.0	Y	288.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

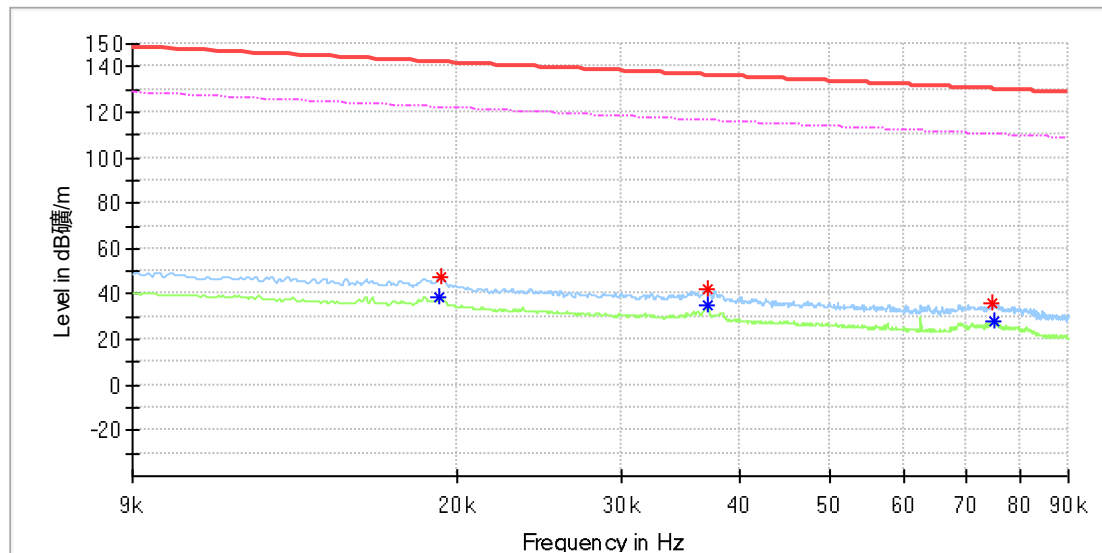


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	38.91	121.93	83.02	100.0	Z	0.0	20.0
0.019241	47.47	---	141.90	94.44	100.0	Z	0.0	20.0
0.037061	---	34.80	116.21	81.41	100.0	Z	112.0	20.0
0.037061	42.03	---	136.21	94.19	100.0	Z	112.0	20.0
0.074610	35.61	---	130.14	94.53	100.0	Z	212.0	20.0
0.075131	---	28.43	110.08	81.65	100.0	Z	212.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

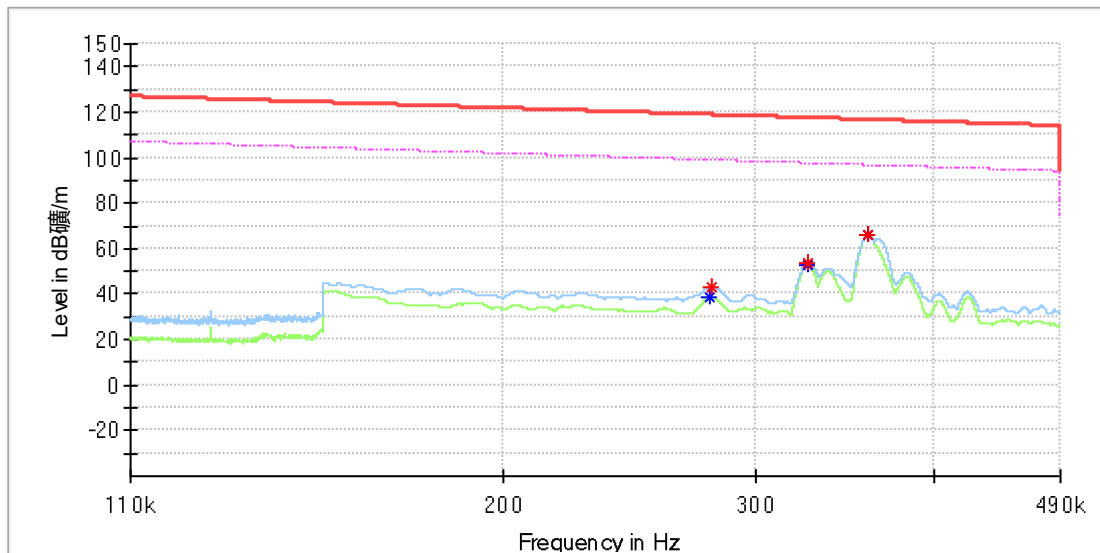


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.279100	---	38.94	98.69	59.75	100.0	X	285.0	20.0
0.279850	43.22	---	118.66	75.44	100.0	X	285.0	20.0
0.326550	---	52.55	97.32	44.77	100.0	X	239.0	20.0
0.326800	53.66	---	117.32	63.66	100.0	X	239.0	20.0
0.360000	---	66.05	96.48	30.43	100.0	X	274.0	20.0
0.360100	66.26	---	116.47	50.21	100.0	X	274.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

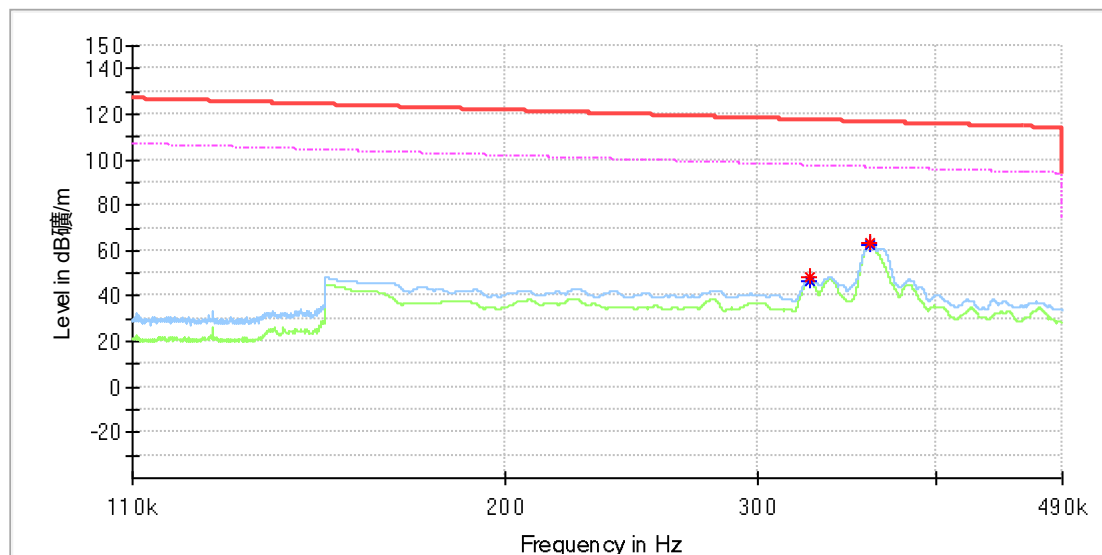


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.326450	---	46.23	97.33	51.09	100.0	Y	146.0	20.0
0.326900	48.11	---	117.31	69.20	100.0	Y	146.0	20.0
0.360050	---	62.77	96.48	33.71	100.0	Y	167.0	20.0
0.360100	63.00	---	116.47	53.48	100.0	Y	167.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

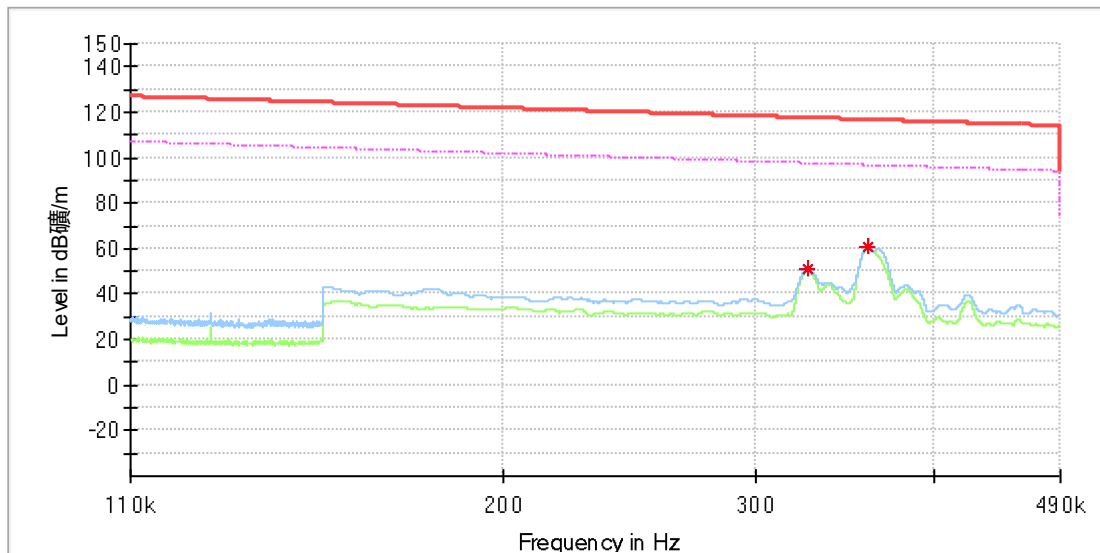


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.326650	51.04	---	117.32	66.28	100.0	Z	219.0	20.0
0.326650	---	50.71	97.32	46.61	100.0	Z	219.0	20.0
0.360050	---	60.67	96.48	35.80	100.0	Z	255.0	20.0
0.360050	61.05	---	116.48	55.42	100.0	Z	255.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

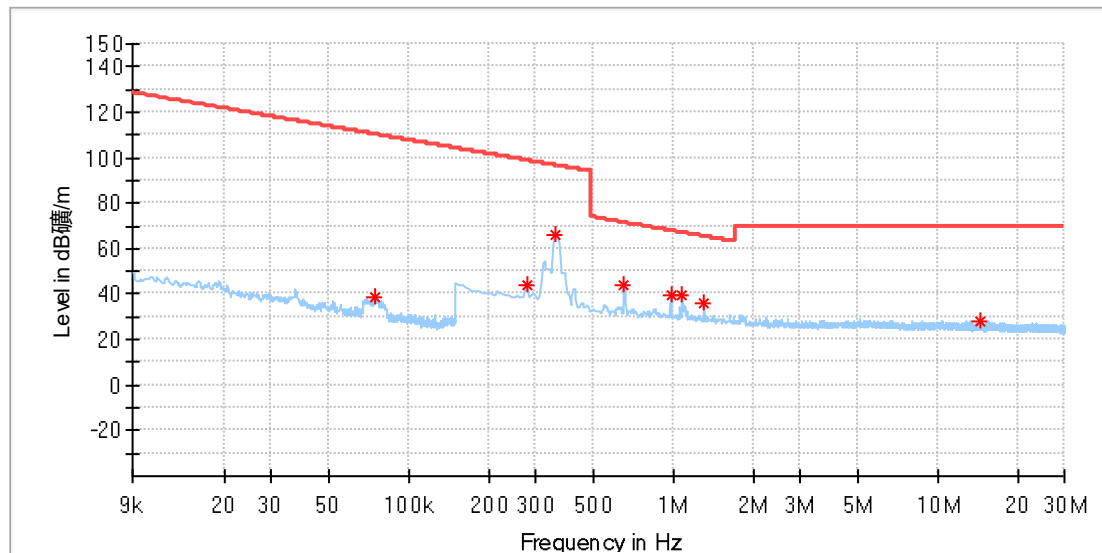

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.074766	38.92	110.12	71.20	100.0	X	305.0	19.9
0.277302	43.87	98.74	54.87	100.0	X	107.0	19.9
0.356316	66.27	96.57	30.29	100.0	X	250.0	19.9
0.650427	44.19	71.35	27.15	100.0	X	222.0	19.9
0.975265	39.38	67.84	28.46	100.0	X	204.0	19.9
1.080618	39.11	66.95	27.84	100.0	X	164.0	19.9
1.304493	35.87	65.32	29.45	100.0	X	204.0	19.9
14.372647	28.02	69.50	41.48	100.0	X	186.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

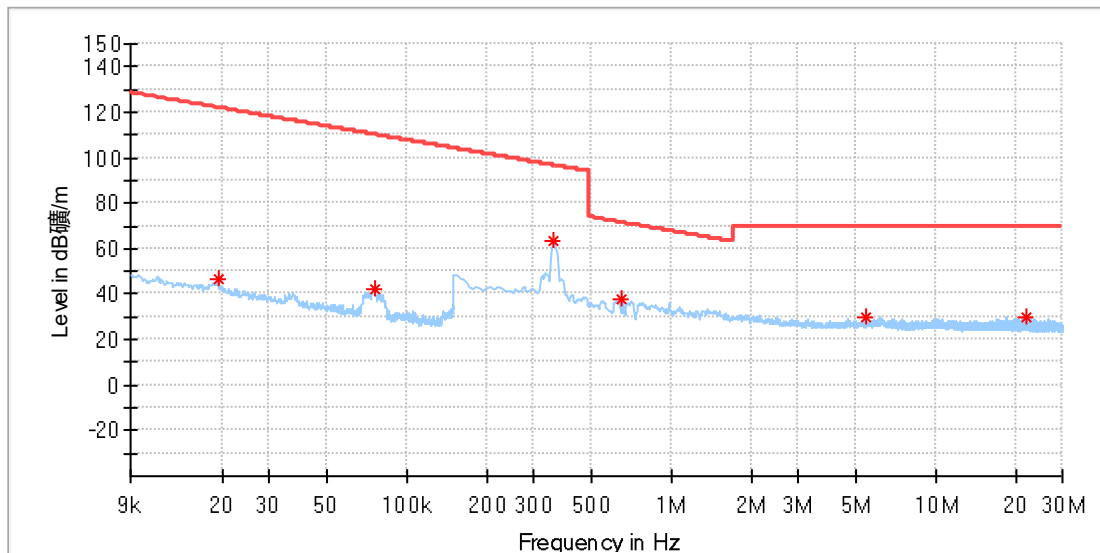

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019273	46.72	121.89	75.17	100.0	Y	135.0	19.9
0.075169	42.30	110.07	67.77	100.0	Y	78.0	19.9
0.356316	62.97	96.57	33.60	100.0	Y	170.0	19.9
0.650427	38.13	71.35	33.22	100.0	Y	116.0	19.9
5.400088	29.91	69.50	39.59	100.0	Y	222.0	20.1
21.962449	30.08	69.50	39.42	100.0	Y	301.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

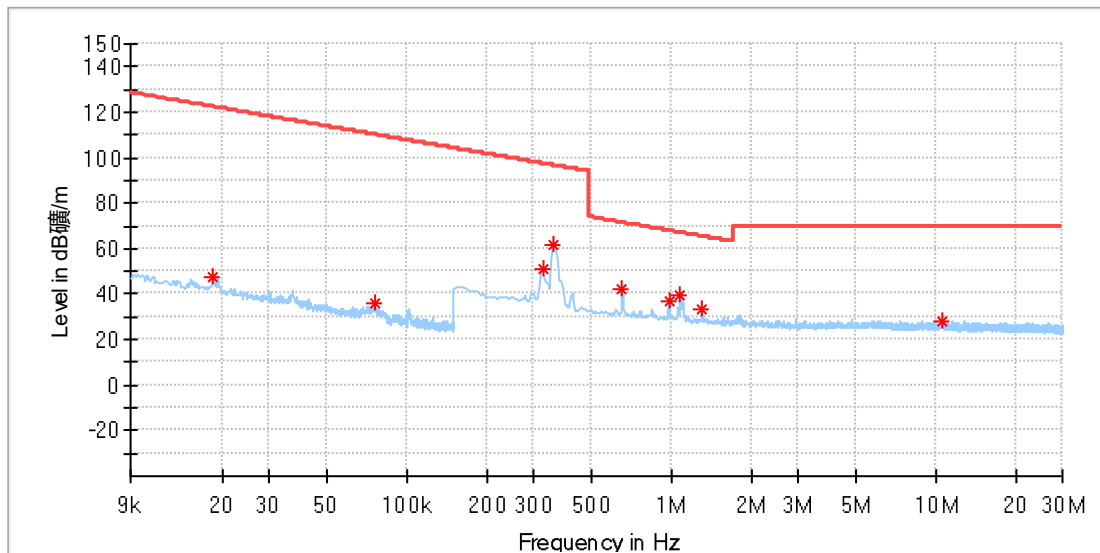

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	47.47	122.26	74.79	100.0	Z	148.0	19.9
0.075069	35.59	110.09	74.49	100.0	Z	331.0	19.9
0.325588	51.44	97.35	45.90	100.0	Z	195.0	19.9
0.356316	61.19	96.57	35.37	100.0	Z	242.0	19.9
0.650427	41.84	71.35	29.50	100.0	Z	195.0	19.9
0.979655	36.96	67.80	30.84	100.0	Z	260.0	19.9
1.080618	39.53	66.95	27.42	100.0	Z	181.0	19.9
1.304493	33.53	65.32	31.79	100.0	Z	260.0	19.9
10.492147	28.24	69.50	41.26	100.0	Z	123.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

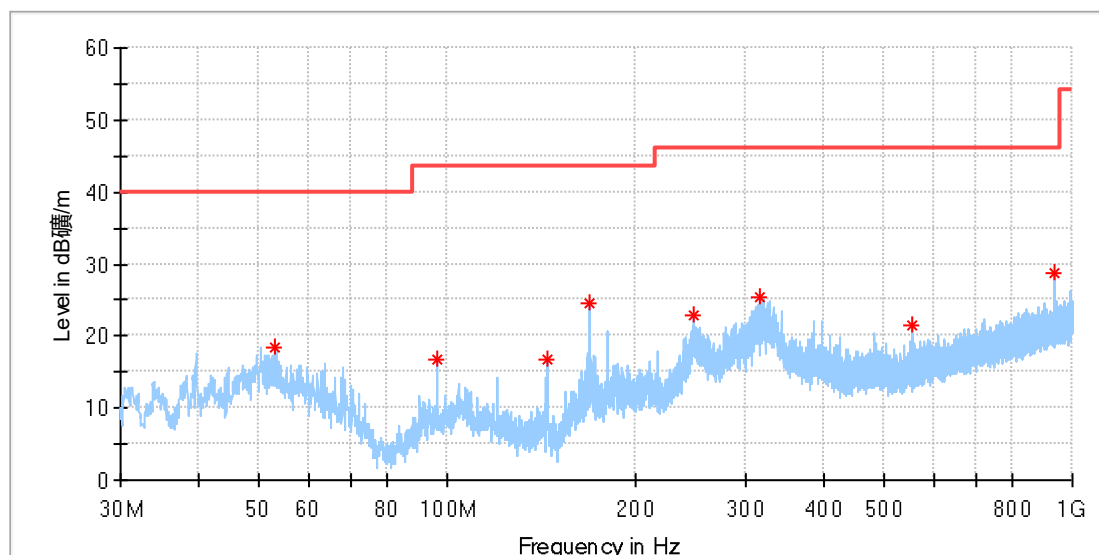

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.118333	18.54	40.00	21.46	100.0	H	328.0	-18.5
96.337222	16.65	43.50	26.85	100.0	H	30.0	-19.6
144.460000	16.65	43.50	26.85	100.0	H	136.0	-22.4
168.332778	24.60	43.50	18.90	100.0	H	102.0	-21.4
248.357778	22.85	46.00	23.15	100.0	H	341.0	-17.4
316.742778	25.37	46.00	20.63	100.0	H	232.0	-15.8
553.530556	21.54	46.00	24.46	100.0	H	172.0	-10.7
936.950000	28.76	46.00	17.24	100.0	H	328.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

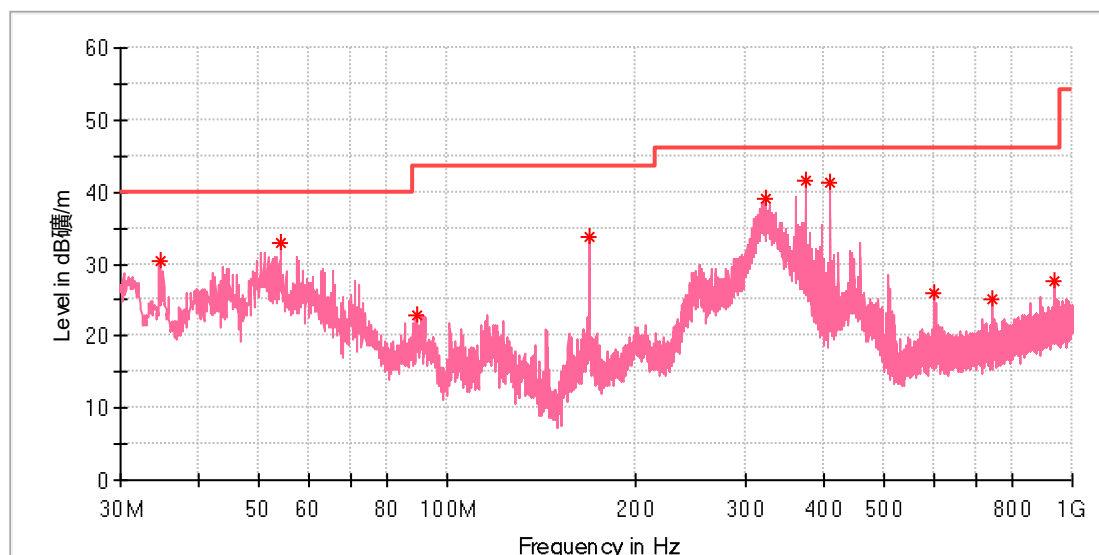

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.688333	30.55	40.00	9.45	100.0	V	3.0	-22.1
54.142222	33.04	40.00	6.96	100.0	V	336.0	-18.5
89.170000	22.99	43.50	20.51	100.0	V	0.0	-21.3
168.548333	33.87	43.50	9.63	100.0	V	118.0	-21.4
323.478889	39.14	46.00	6.86	100.0	V	118.0	-15.5
373.380000	41.48	46.00	4.52	100.0	V	118.0	-14.4
409.216111	41.19	46.00	4.81	100.0	V	132.0	-13.5
602.246111	25.95	46.00	20.05	100.0	V	274.0	-9.6
742.518889	25.04	46.00	20.96	100.0	V	91.0	-7.2
938.405000	27.76	46.00	18.24	100.0	V	0.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (TWS 5W)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Charging
Order No/Sample No:	27200037/A004214252-009
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

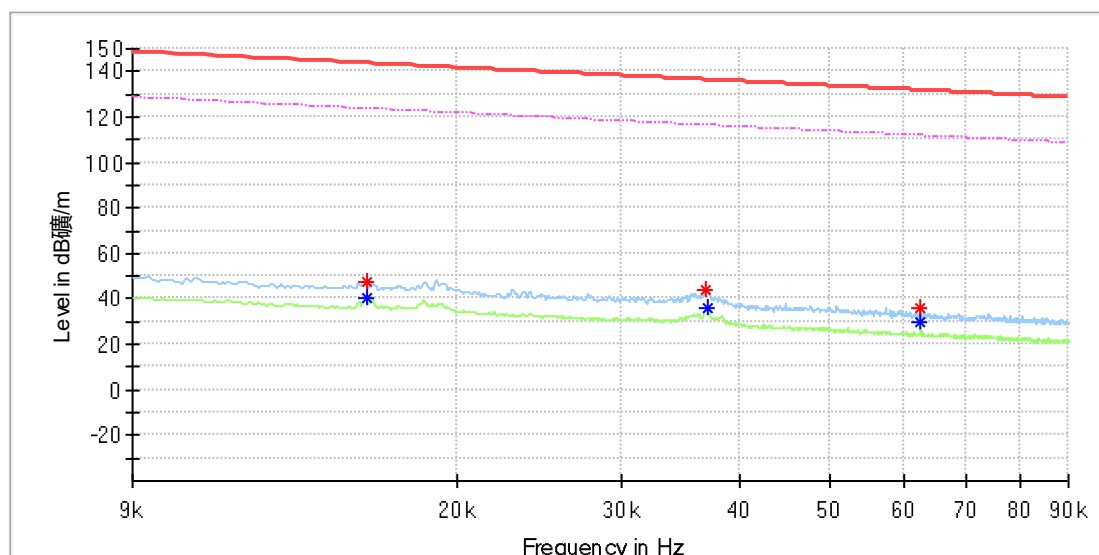


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016001	47.80	---	143.51	95.70	100.0	X	68.0	20.0
0.016001	---	40.78	123.51	82.73	100.0	X	68.0	20.0
0.036829	43.54	---	136.27	92.73	100.0	X	187.0	20.0
0.037119	---	35.67	116.20	80.53	100.0	X	56.0	20.0
0.062518	35.89	---	131.67	95.78	100.0	X	162.0	20.0
0.062576	---	29.46	111.67	82.20	100.0	X	162.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

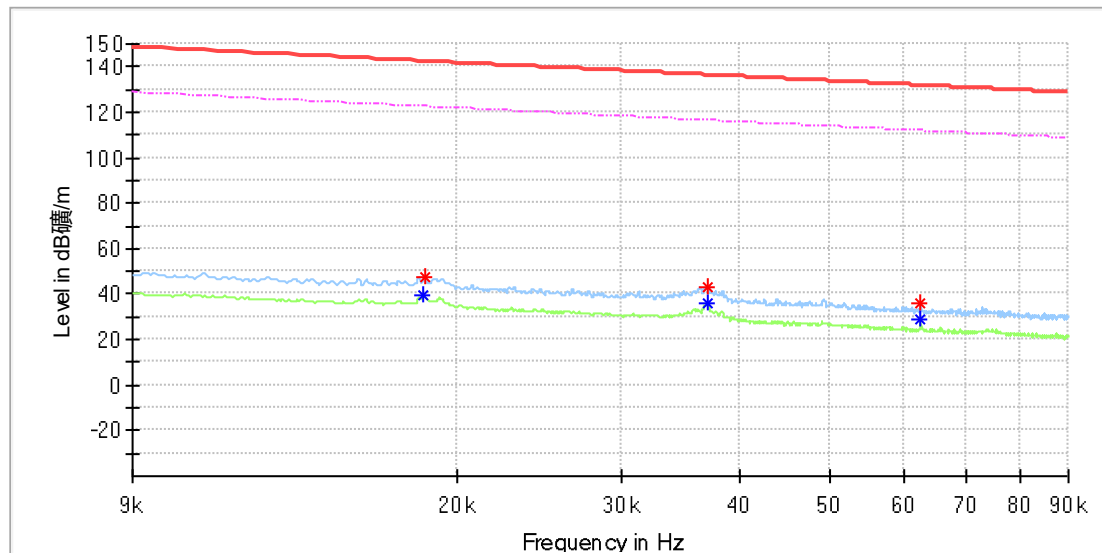


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	---	39.76	122.28	82.52	100.0	Y	290.0	20.0
0.018489	47.31	---	142.25	94.94	100.0	Y	290.0	20.0
0.037119	---	35.63	116.20	80.57	100.0	Y	337.0	20.0
0.037119	43.06	---	136.20	93.14	100.0	Y	337.0	20.0
0.062576	36.06	---	131.67	95.60	100.0	Y	250.0	20.0
0.062576	---	29.23	111.67	82.44	100.0	Y	250.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

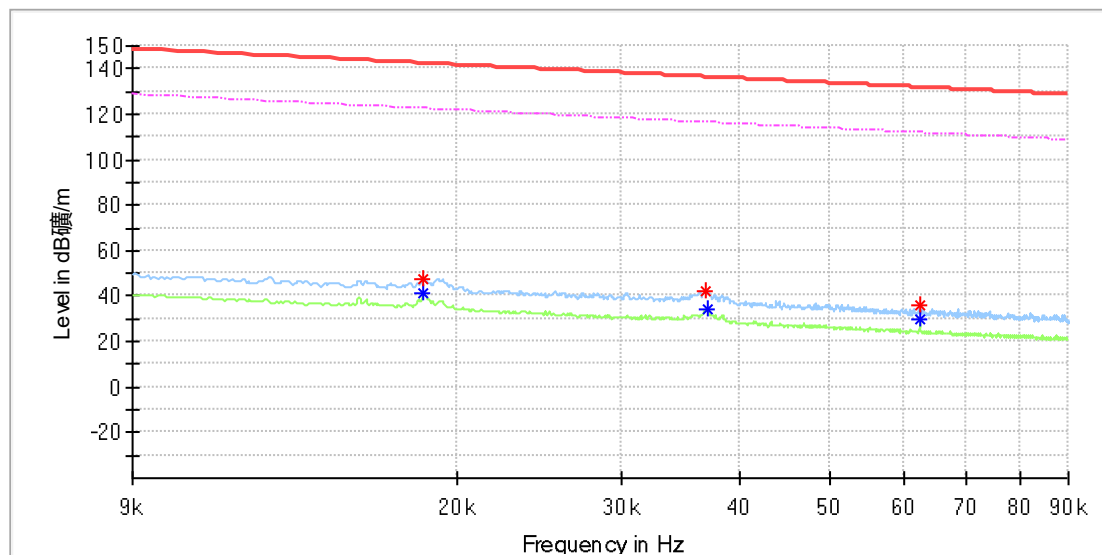


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	47.14	---	142.28	95.14	100.0	Z	0.0	20.0
0.018431	---	41.02	122.28	81.26	100.0	Z	0.0	20.0
0.036829	42.54	---	136.27	93.73	100.0	Z	282.0	20.0
0.037003	---	34.23	116.23	81.99	100.0	Z	328.0	20.0
0.062402	35.58	---	131.69	96.11	100.0	Z	346.0	20.0
0.062460	---	29.75	111.68	81.94	100.0	Z	346.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

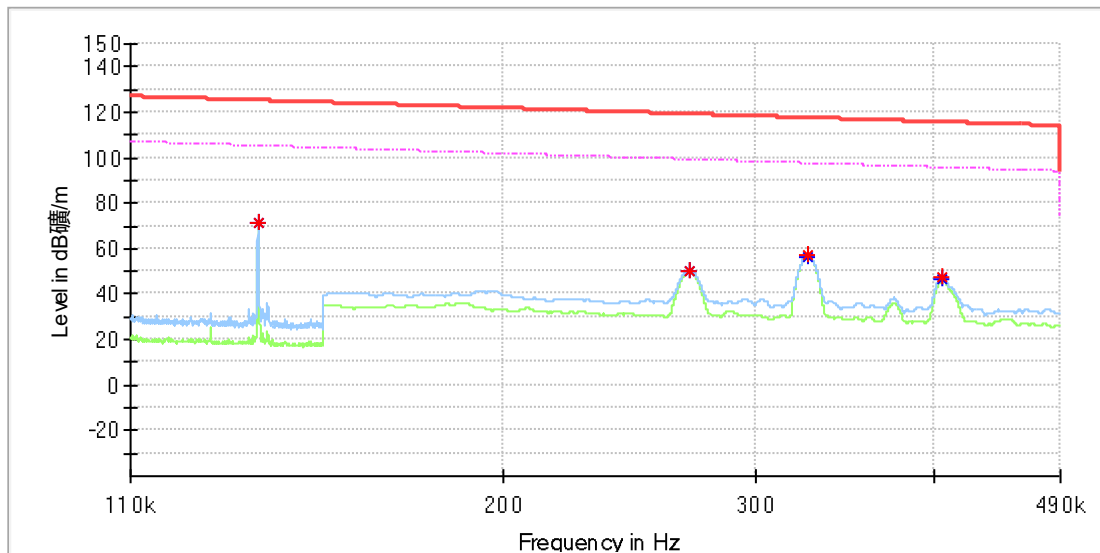


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.135086	---	71.37	104.99	33.62	100.0	X	274.0	20.0
0.135086	71.49	---	124.99	53.50	100.0	X	274.0	20.0
0.270100	---	49.80	98.97	49.17	100.0	X	231.0	20.0
0.270150	50.33	---	118.97	68.64	100.0	X	231.0	20.0
0.326500	56.90	---	117.32	60.43	100.0	X	274.0	20.0
0.326500	---	56.67	97.32	40.66	100.0	X	274.0	20.0
0.405200	47.19	---	115.45	68.26	100.0	X	260.0	20.0
0.405250	---	46.26	95.45	49.19	100.0	X	260.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

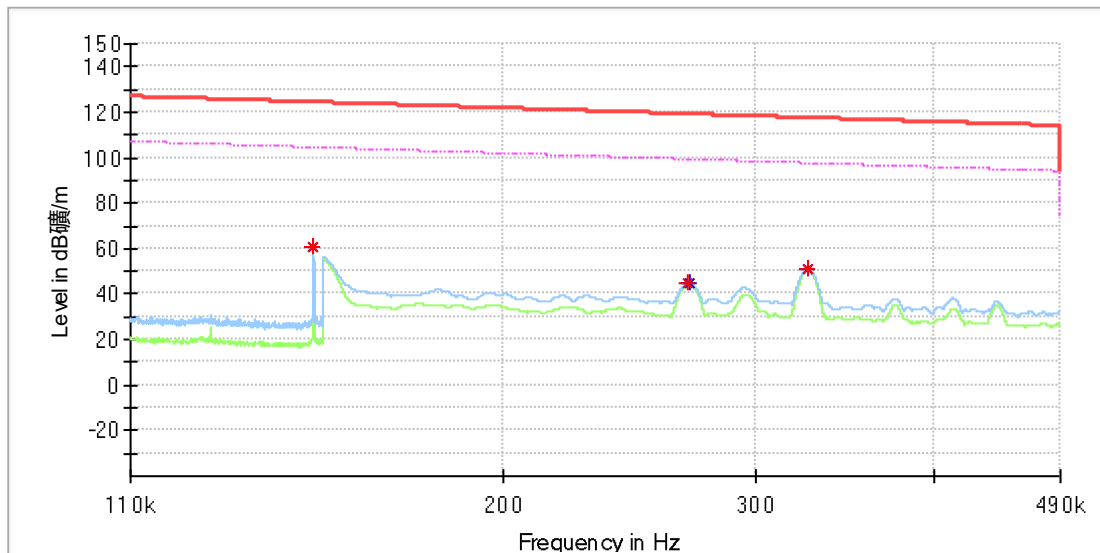


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147543	60.59	---	124.22	63.63	100.0	Y	0.0	20.0
0.147543	---	60.38	104.22	43.84	100.0	Y	0.0	20.0
0.269550	45.03	---	118.99	73.96	100.0	Y	0.0	20.0
0.269750	---	44.40	98.98	54.58	100.0	Y	0.0	20.0
0.326400	51.04	---	117.33	66.29	100.0	Y	148.0	20.0
0.326550	---	50.77	97.32	46.56	100.0	Y	148.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

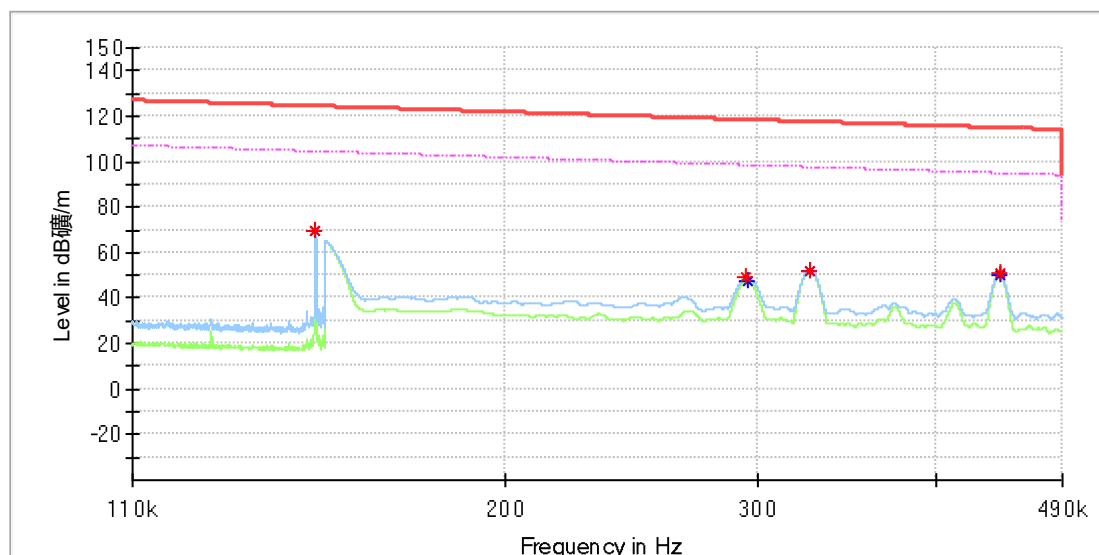


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.147600	69.45	---	124.22	54.77	100.0	Z	268.0	20.0
0.147600	---	69.32	104.22	34.89	100.0	Z	268.0	20.0
0.295000	48.89	---	118.21	69.32	100.0	Z	222.0	20.0
0.295150	---	47.84	98.20	50.36	100.0	Z	222.0	20.0
0.326550	52.15	---	117.32	65.17	100.0	Z	262.0	20.0
0.326550	---	51.95	97.32	45.37	100.0	Z	262.0	20.0
0.442800	---	49.84	94.68	44.84	100.0	Z	100.0	20.0
0.442900	50.66	---	114.68	64.02	100.0	Z	100.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

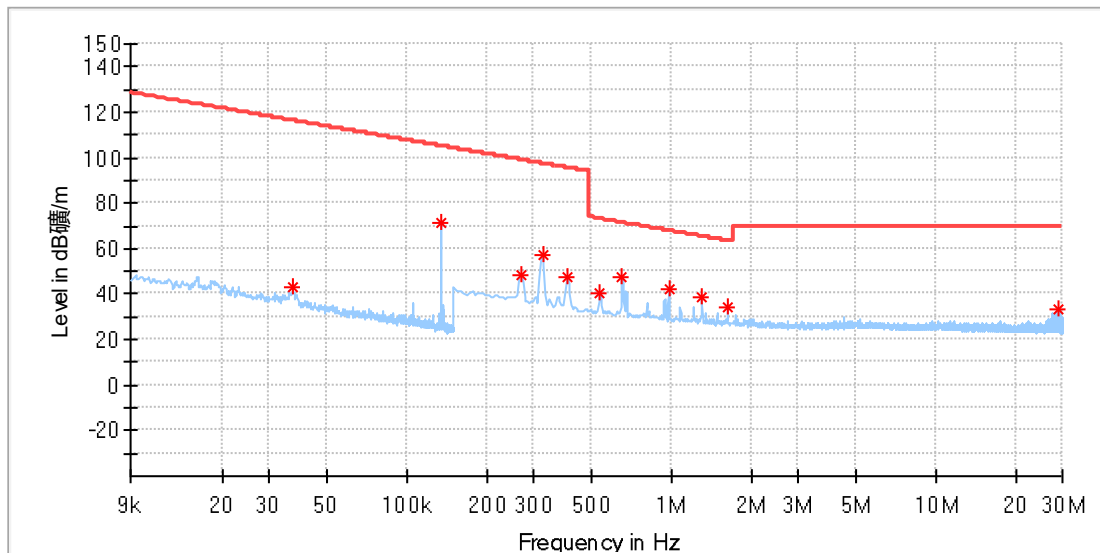

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	42.99	116.23	73.24	100.0	X	178.0	19.9
0.135094	71.30	104.99	33.69	100.0	X	274.0	19.9
0.268522	48.24	99.02	50.78	100.0	X	266.0	19.9
0.325588	57.05	97.35	40.29	100.0	X	266.0	19.9
0.404603	47.33	95.46	48.13	100.0	X	259.0	19.9
0.536294	40.26	73.02	32.76	100.0	X	259.0	19.9
0.650427	47.16	71.35	24.18	100.0	X	266.0	19.9
0.979655	41.83	67.80	25.96	100.0	X	266.0	19.9
1.304493	38.40	65.32	26.92	100.0	X	266.0	19.9
1.629331	34.54	63.39	28.85	100.0	X	266.0	19.9
29.064993	33.64	69.50	35.86	100.0	X	62.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

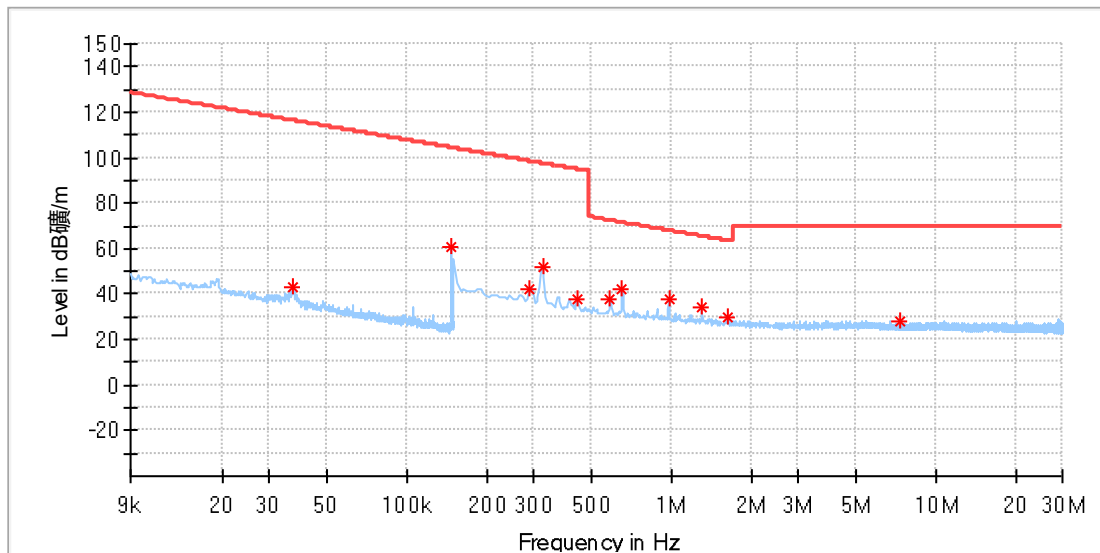

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	43.32	116.20	72.89	100.0	Y	246.0	19.9
0.147583	60.36	104.22	43.86	100.0	Y	8.0	19.9
0.290471	42.61	98.34	55.73	100.0	Y	204.0	19.9
0.325588	52.16	97.35	45.19	100.0	Y	344.0	19.9
0.439721	38.03	94.74	56.71	100.0	Y	315.0	19.9
0.584581	37.68	72.27	34.60	100.0	Y	185.0	19.9
0.650427	42.35	71.35	29.00	100.0	Y	344.0	19.9
0.979655	38.14	67.80	29.66	100.0	Y	344.0	19.9
1.304493	33.95	65.32	31.37	100.0	Y	9.0	19.9
1.629331	29.97	63.39	33.42	100.0	Y	9.0	19.9
7.265713	27.96	69.50	41.54	100.0	Y	181.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

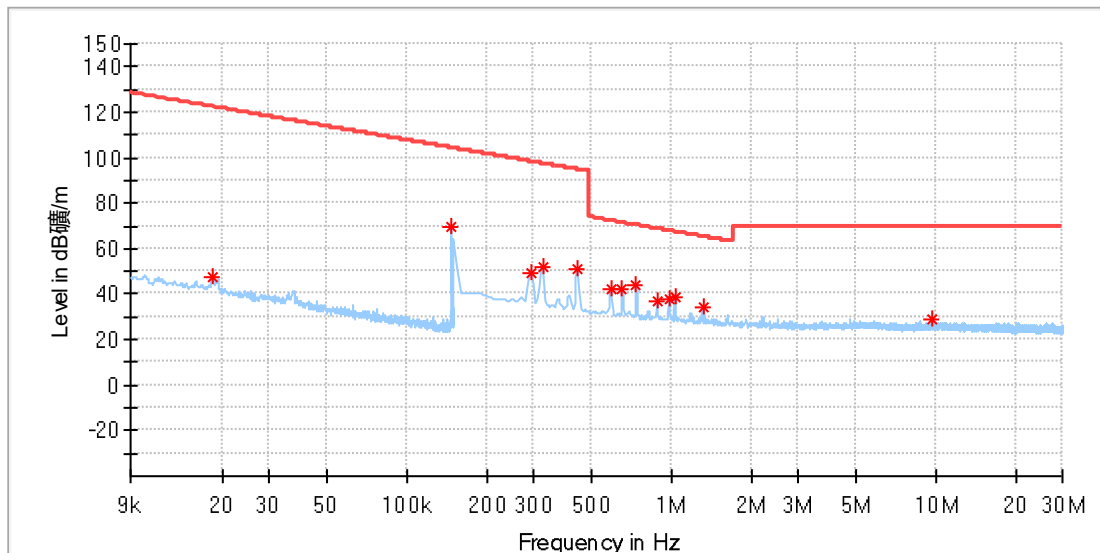

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018366	47.78	122.31	74.53	100.0	Z	26.0	19.9
0.147583	69.27	104.22	34.94	100.0	Z	282.0	19.9
0.294860	48.84	98.21	49.37	100.0	Z	240.0	19.9
0.325588	52.30	97.35	45.05	100.0	Z	272.0	19.9
0.439721	50.81	94.74	43.93	100.0	Z	118.0	19.9
0.588971	41.76	72.21	30.44	100.0	Z	111.0	19.9
0.650427	42.54	71.35	28.81	100.0	Z	272.0	19.9
0.733831	44.03	70.30	26.27	100.0	Z	136.0	19.9
0.883081	36.80	68.70	31.89	100.0	Z	48.0	19.9
0.975265	37.49	67.84	30.35	100.0	Z	254.0	19.9
1.032331	38.83	67.35	28.51	100.0	Z	132.0	19.9
1.326441	34.17	65.18	31.00	100.0	Z	66.0	19.9
9.658103	28.77	69.50	40.73	100.0	Z	84.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

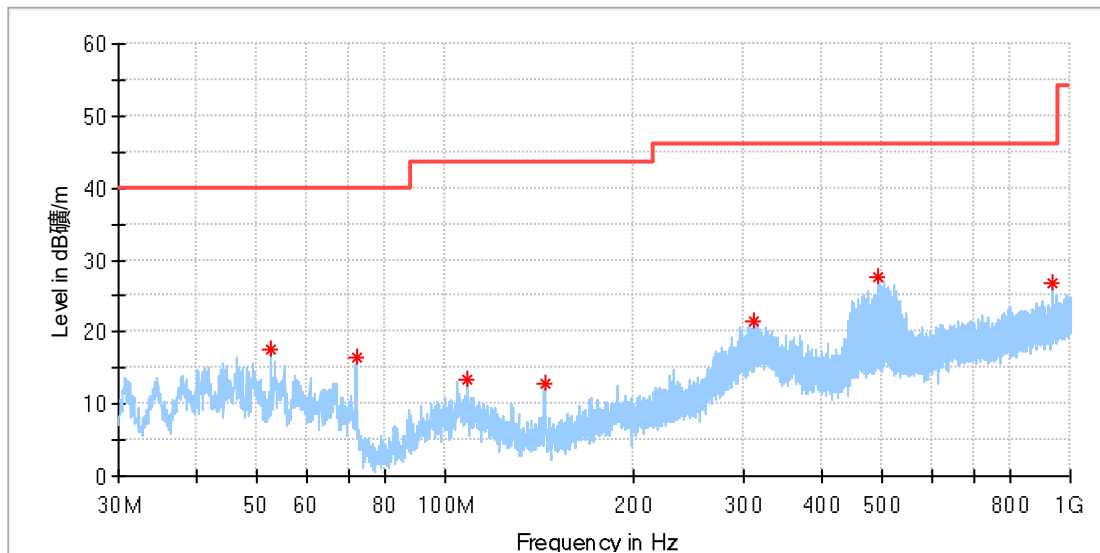

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.579444	17.64	40.00	22.36	100.0	H	62.0	-18.5
71.979444	16.49	40.00	23.51	100.0	H	310.0	-22.6
108.731667	13.43	43.50	30.07	100.0	H	160.0	-19.1
144.028889	12.82	43.50	30.68	100.0	H	21.0	-22.4
310.491667	21.38	46.00	24.62	100.0	H	293.0	-16.0
493.552222	27.58	46.00	18.42	100.0	H	21.0	-11.9
938.458889	26.82	46.00	19.18	100.0	H	137.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

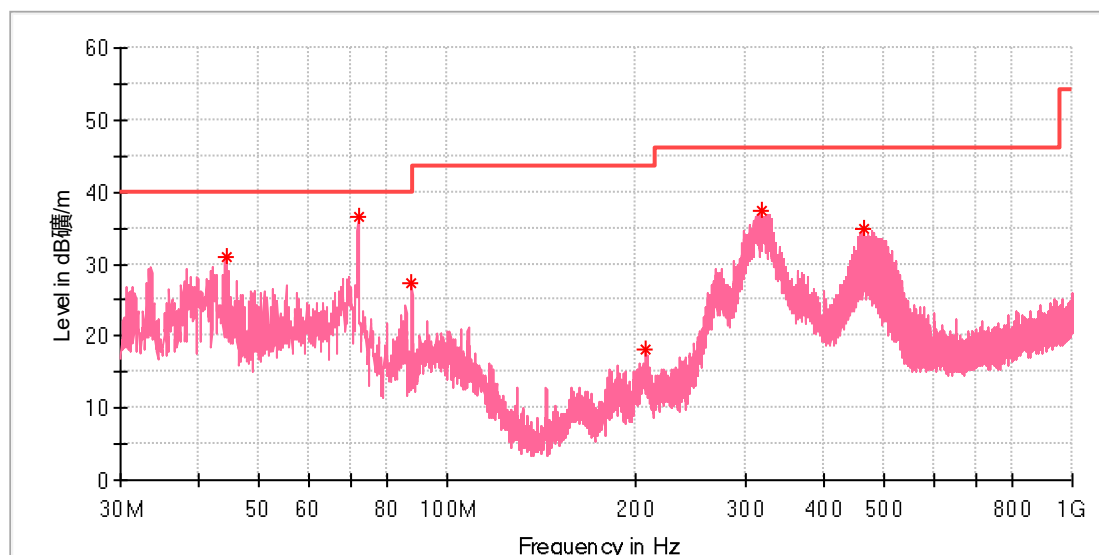

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.388333	31.01	40.00	8.99	100.0	V	181.0	-19.1
71.979444	36.60	40.00	3.40	100.0	V	335.0	-22.6
87.715000	27.28	40.00	12.72	100.0	V	218.0	-21.7
208.102778	18.13	43.50	25.37	100.0	V	0.0	-18.9
319.545000	37.39	46.00	8.61	100.0	V	81.0	-15.7
463.428333	34.80	46.00	11.20	100.0	V	111.0	-12.5


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (Watch 5W_326.5kHz)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Charging
Order No/Sample No:	27200037/A004214252-009
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

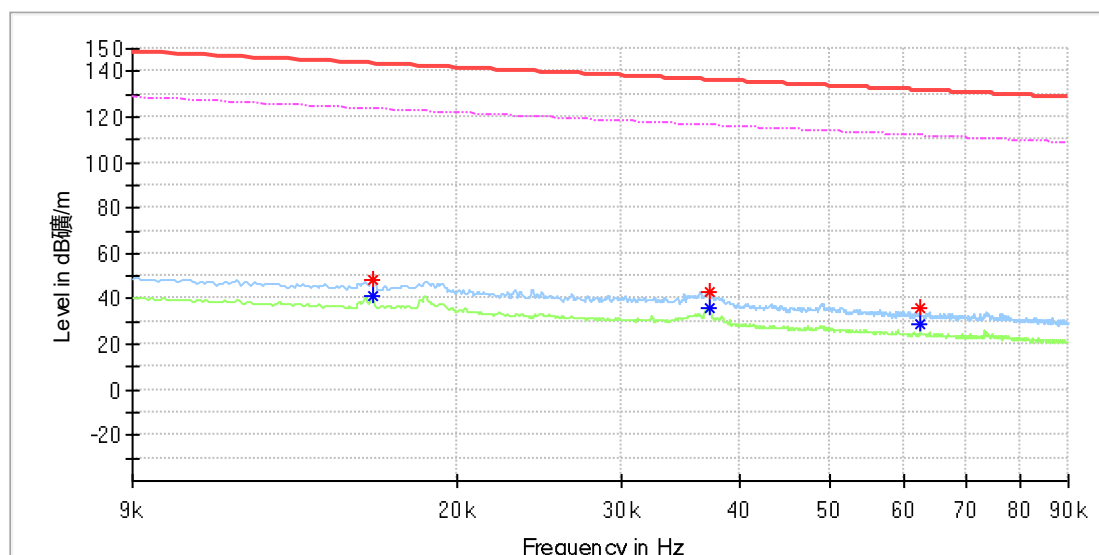


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016232	48.54	---	143.38	94.84	100.0	X	27.0	20.0
0.016232	---	41.36	123.38	82.02	100.0	X	27.0	20.0
0.037176	---	35.83	116.19	80.36	100.0	X	45.0	20.0
0.037234	43.45	---	136.17	92.72	100.0	X	45.0	20.0
0.062518	35.78	---	131.67	95.90	100.0	X	104.0	20.0
0.062518	---	29.03	111.67	82.65	100.0	X	104.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

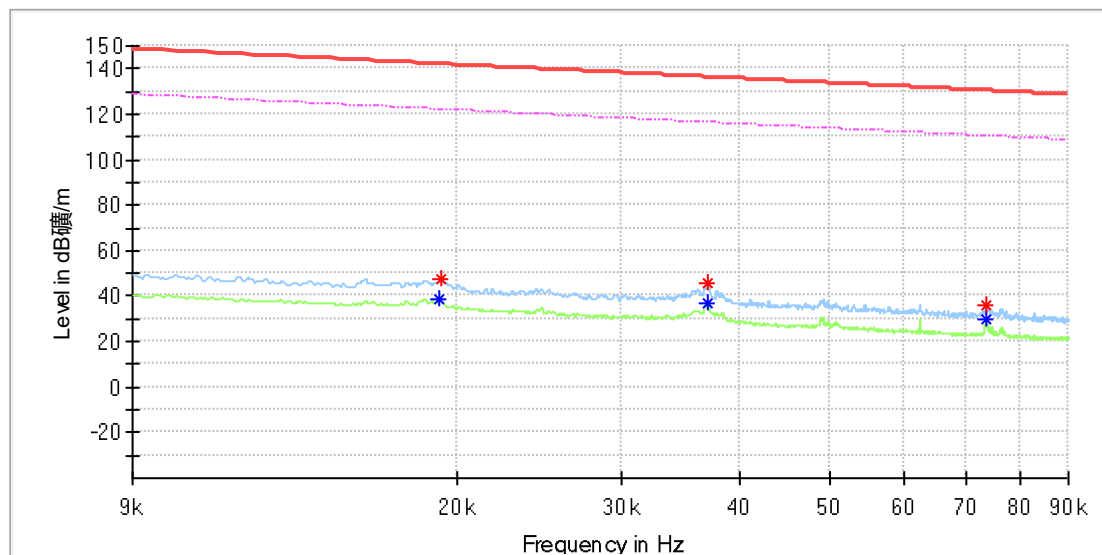


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	38.77	121.93	83.16	100.0	Y	302.0	20.0
0.019241	47.50	---	141.90	94.41	100.0	Y	302.0	20.0
0.037119	---	36.87	116.20	79.33	100.0	Y	62.0	20.0
0.037119	45.38	---	136.20	90.82	100.0	Y	62.0	20.0
0.073626	35.84	---	130.25	94.42	100.0	Y	14.0	20.0
0.073626	---	29.92	110.25	80.33	100.0	Y	14.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

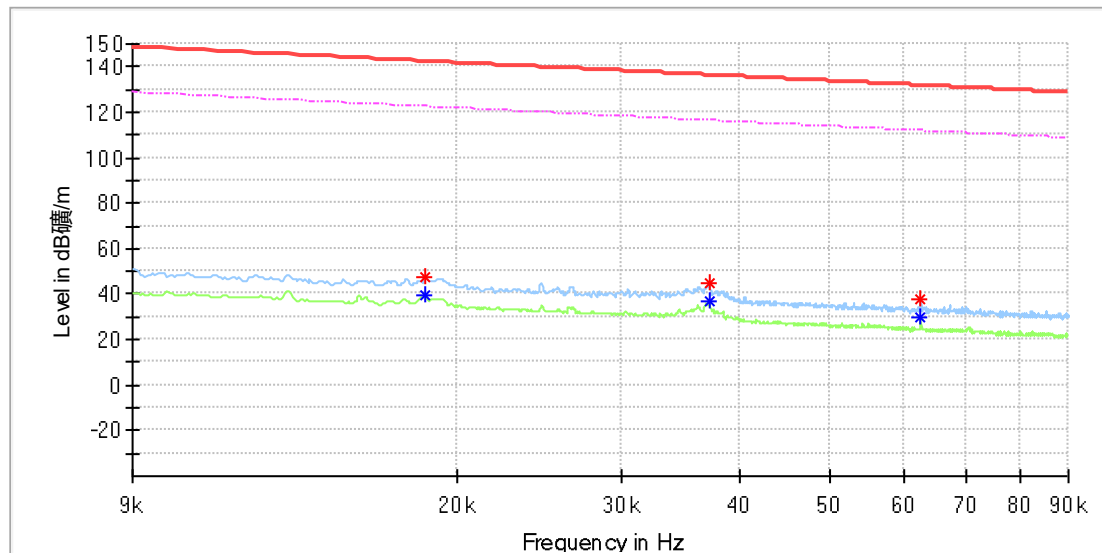


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	47.86	---	142.25	94.39	100.0	Z	298.0	20.0
0.018489	---	39.62	122.25	82.63	100.0	Z	298.0	20.0
0.037176	---	36.67	116.19	79.51	100.0	Z	209.0	20.0
0.037176	44.56	---	136.19	91.63	100.0	Z	209.0	20.0
0.062576	38.05	---	131.67	93.61	100.0	Z	275.0	20.0
0.062576	---	29.46	111.67	82.20	100.0	Z	275.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

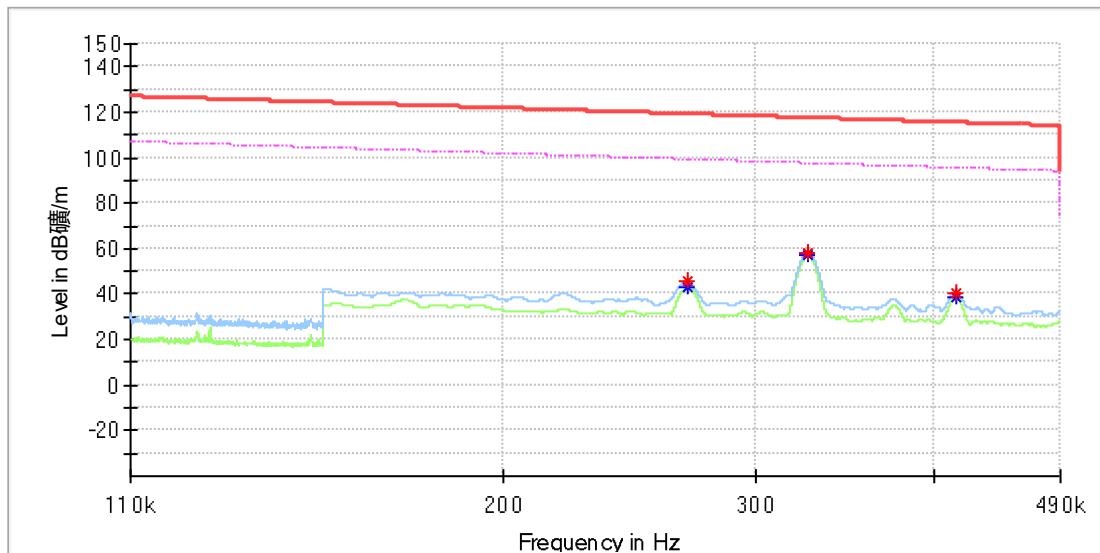


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.268850	45.50	---	119.01	73.51	100.0	X	52.0	20.0
0.269400	---	43.08	98.99	55.91	100.0	X	52.0	20.0
0.326550	---	56.83	97.32	40.50	100.0	X	33.0	20.0
0.326700	57.92	---	117.32	59.40	100.0	X	33.0	20.0
0.413900	40.31	---	115.27	74.96	100.0	X	21.0	20.0
0.414050	---	38.81	95.26	56.45	100.0	X	21.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

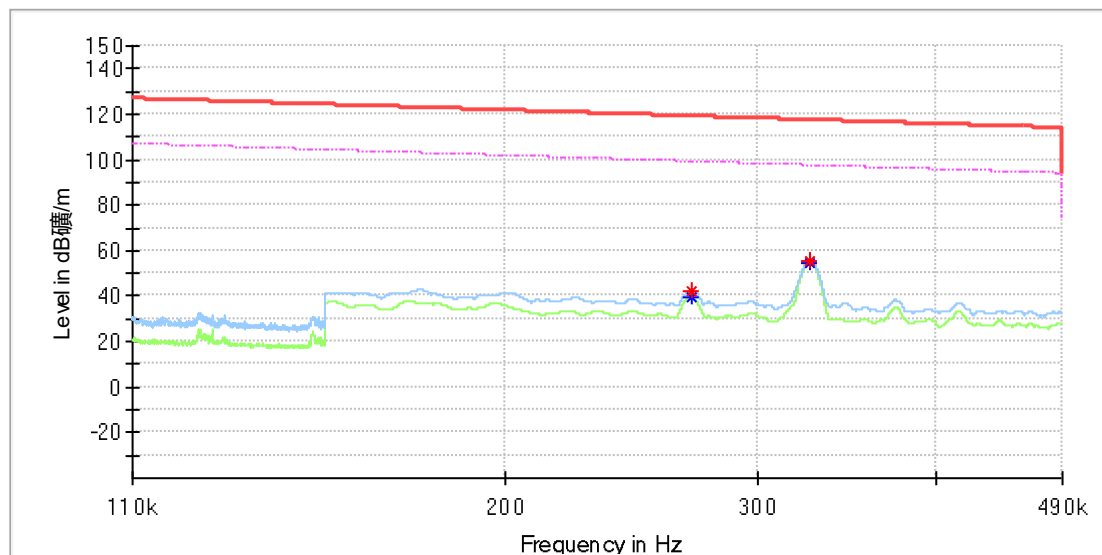


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.269700	---	39.65	98.98	59.33	100.0	Y	34.0	20.0
0.269850	42.43	---	118.98	76.55	100.0	Y	34.0	20.0
0.326500	---	54.70	97.32	42.62	100.0	Y	301.0	20.0
0.326500	55.61	---	117.32	61.72	100.0	Y	301.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

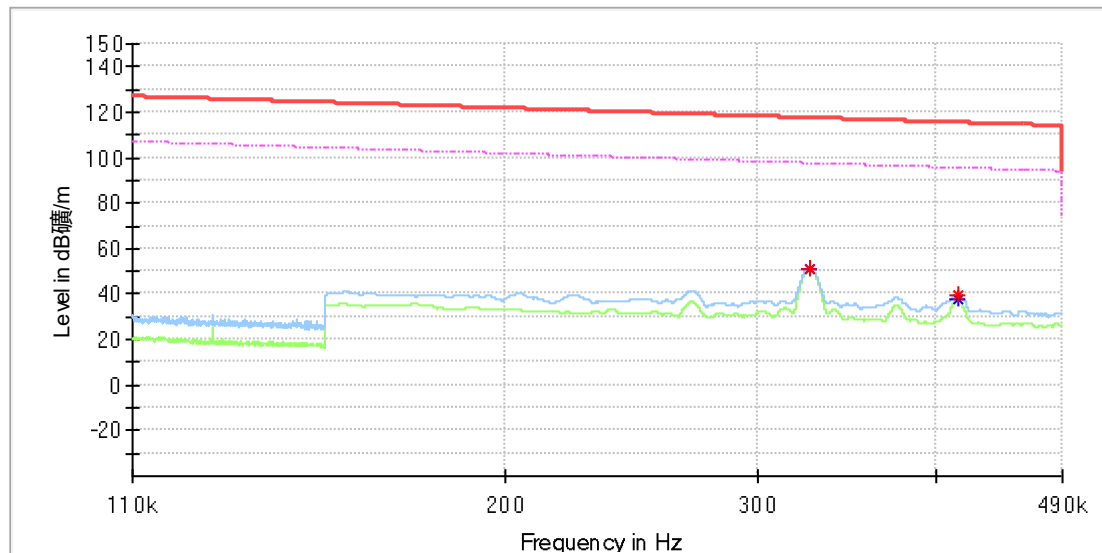


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.326400	51.41	---	117.33	65.91	100.0	Z	356.0	20.0
0.326500	---	51.04	97.32	46.28	100.0	Z	356.0	20.0
0.414200	39.45	---	115.26	75.81	100.0	Z	0.0	20.0
0.414600	---	37.54	95.25	57.72	100.0	Z	0.0	20.0

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

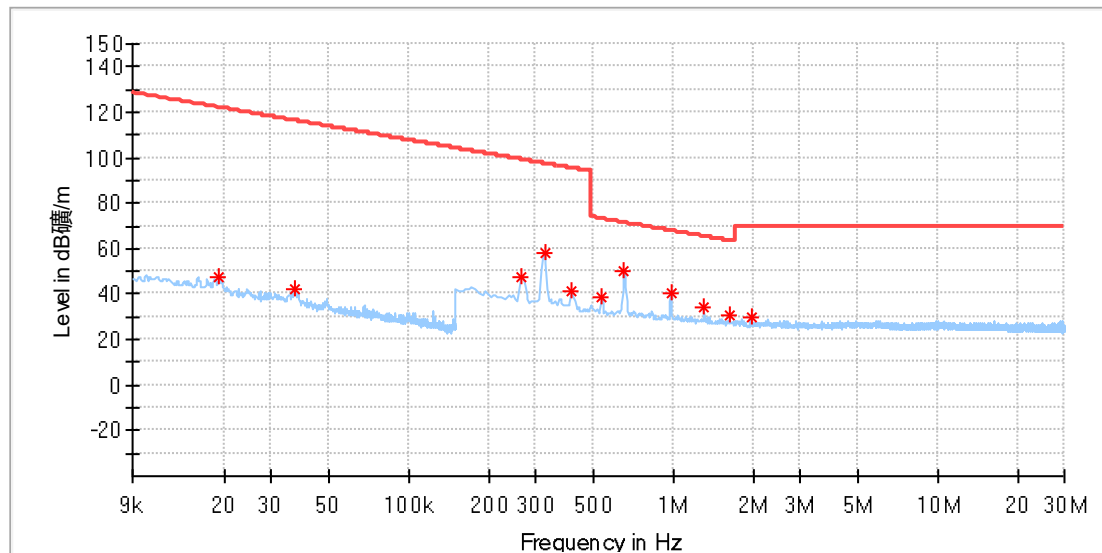

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	47.64	121.94	74.29	100.0	X	238.0	19.9
0.037200	42.55	116.18	73.63	100.0	X	199.0	19.9
0.264133	47.53	99.17	51.64	100.0	X	250.0	19.9
0.325588	58.04	97.35	39.30	100.0	X	23.0	19.9
0.413383	41.07	95.28	54.21	100.0	X	353.0	19.9
0.536294	38.66	73.02	34.35	100.0	X	261.0	19.9
0.650427	50.56	71.35	20.79	100.0	X	61.0	19.9
0.975265	40.73	67.84	27.11	100.0	X	12.0	19.9
1.304493	34.39	65.32	30.93	100.0	X	18.0	19.9
1.633721	30.97	63.37	32.40	100.0	X	199.0	20.0
1.958559	30.18	69.50	39.32	100.0	X	18.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

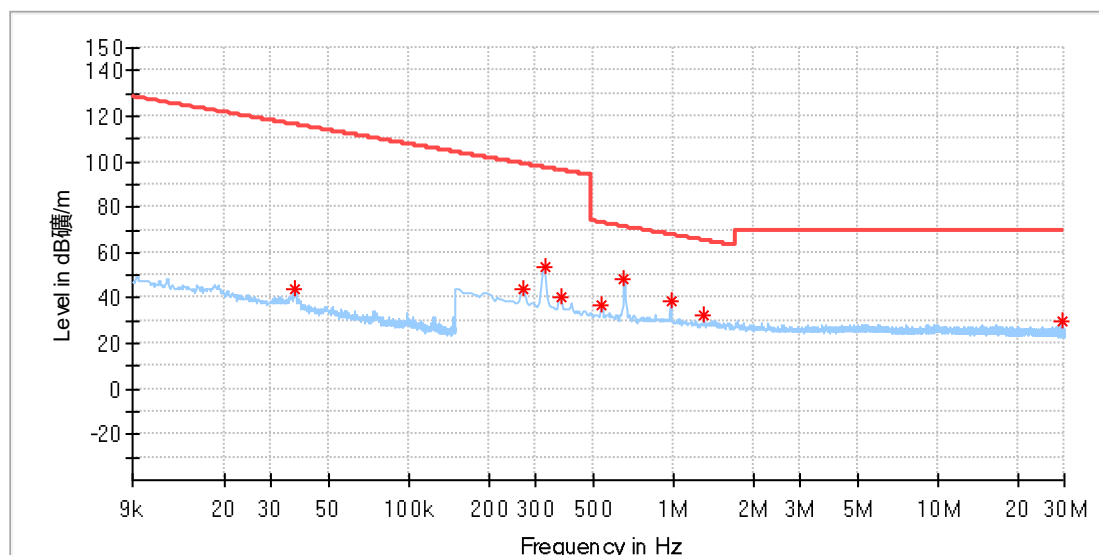

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	43.97	116.20	72.23	100.0	Y	342.0	19.9
0.268522	44.36	99.02	54.66	100.0	Y	3.0	19.9
0.325588	53.92	97.35	43.43	100.0	Y	300.0	19.9
0.373875	40.83	96.15	55.32	100.0	Y	135.0	19.9
0.536294	36.98	73.02	36.03	100.0	Y	0.0	19.9
0.650427	48.03	71.35	23.31	100.0	Y	311.0	19.9
0.979655	38.47	67.80	29.33	100.0	Y	290.0	19.9
1.304493	32.75	65.32	32.57	100.0	Y	124.0	19.9
29.714669	29.59	69.50	39.92	100.0	Y	124.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

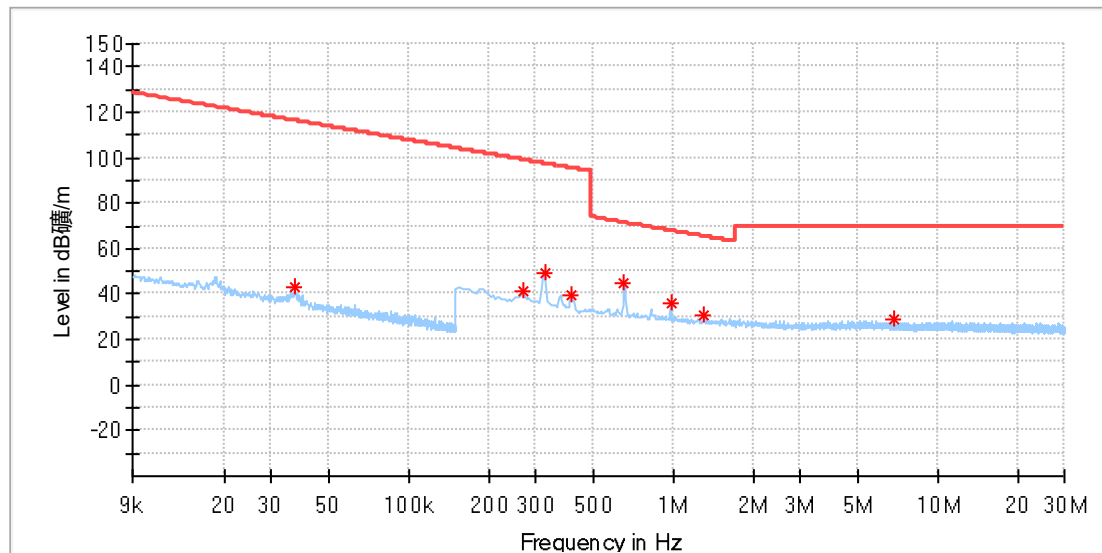

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	42.77	116.25	73.48	100.0	Z	246.0	19.9
0.268522	41.35	99.02	57.67	100.0	Z	47.0	19.9
0.325588	49.47	97.35	47.87	100.0	Z	5.0	19.9
0.413383	39.95	95.28	55.32	100.0	Z	18.0	19.9
0.650427	44.69	71.35	26.66	100.0	Z	18.0	19.9
0.975265	35.58	67.84	32.26	100.0	Z	36.0	19.9
1.304493	30.90	65.32	34.42	100.0	Z	198.0	19.9
6.804794	29.10	69.50	40.40	100.0	Z	173.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

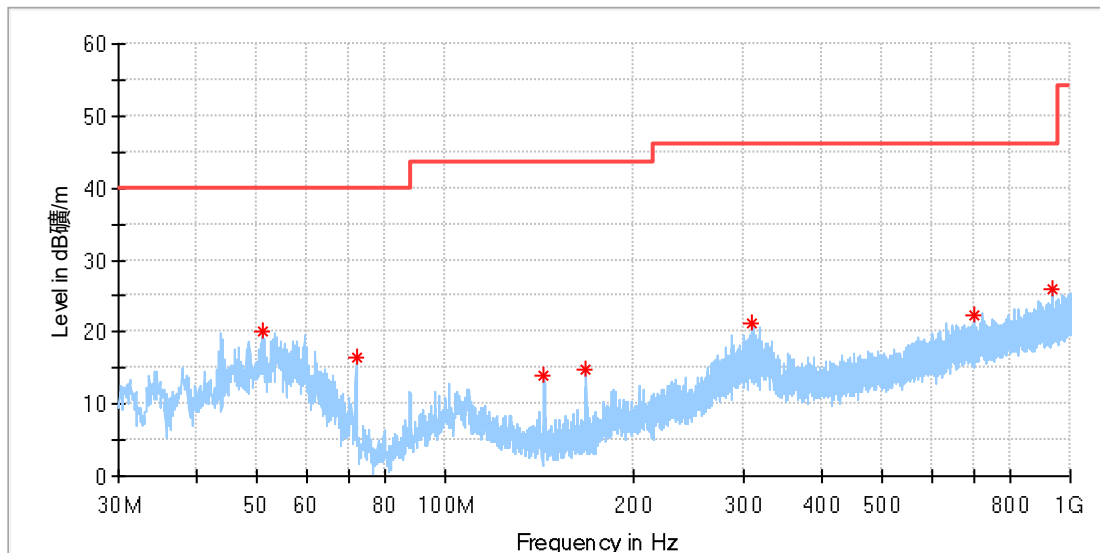

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.908889	20.01	40.00	19.99	100.0	H	208.0	-18.4
71.979444	16.36	40.00	23.64	100.0	H	208.0	-22.6
143.975000	13.87	43.50	29.63	100.0	H	22.0	-22.4
168.063333	14.83	43.50	28.67	100.0	H	53.0	-21.4
308.282222	21.23	46.00	24.77	100.0	H	280.0	-16.1
702.317778	22.42	46.00	23.58	100.0	H	185.0	-7.9
936.950000	25.85	46.00	20.15	100.0	H	137.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: RSS-216
Tested By: Kei Zhang
Reviewed By: Terry Yin

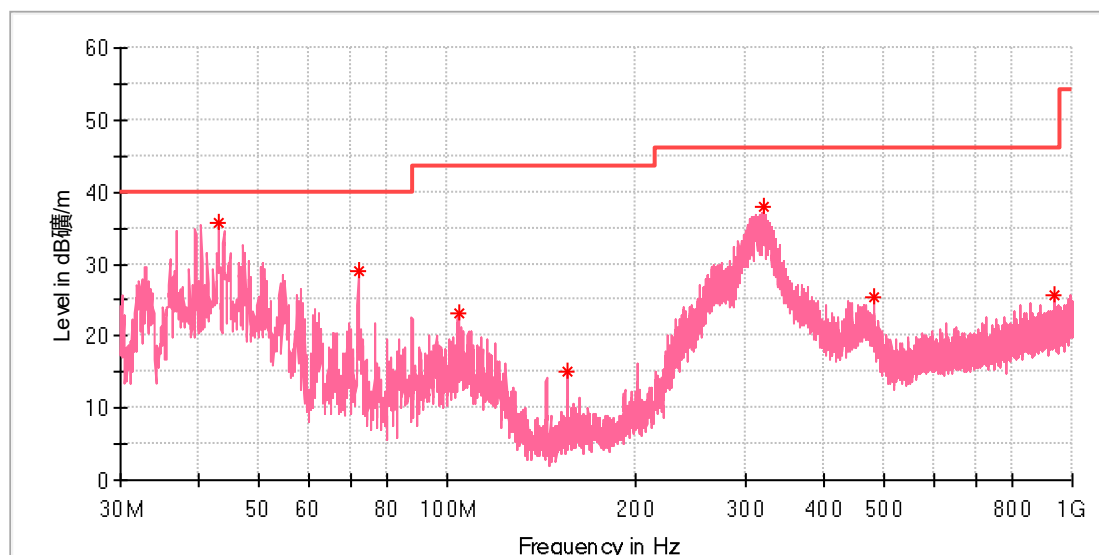

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.095000	35.84	40.00	4.16	100.0	V	100.0	-19.4
72.033333	29.06	40.00	10.94	100.0	V	93.0	-22.6
104.097222	23.06	43.50	20.44	100.0	V	277.0	-18.9
155.992222	15.15	43.50	28.35	100.0	V	114.0	-22.0
320.299444	37.85	46.00	8.15	100.0	V	251.0	-15.7
480.026111	25.33	46.00	20.67	100.0	V	186.0	-12.1
936.950000	25.60	46.00	20.40	100.0	V	114.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (Watch 5W_1.778MHz)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Charging
Order No/Sample No:	27200037/A004214252-009
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

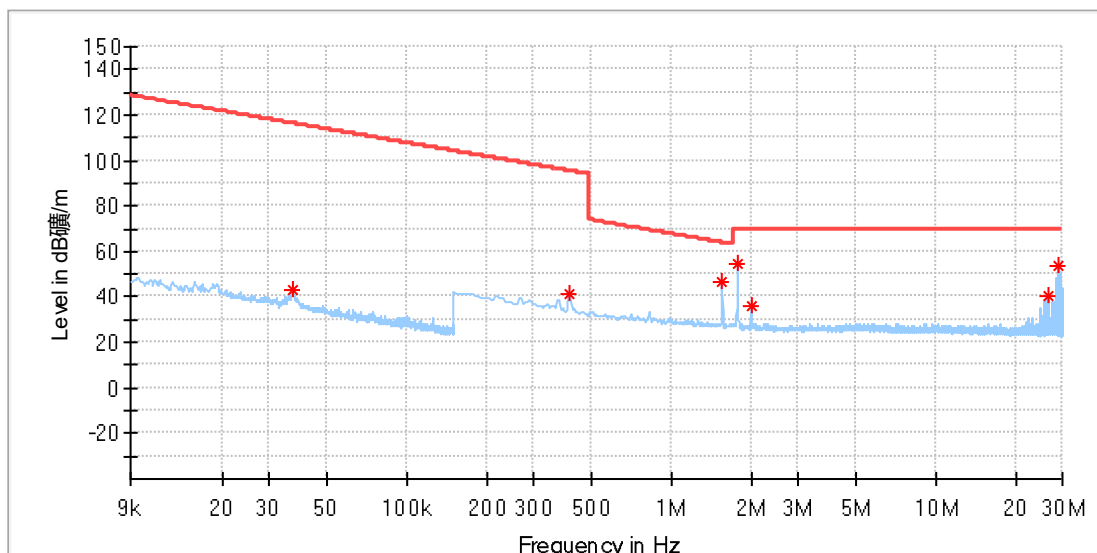

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	43.01	116.23	73.22	100.0	X	358.0	19.9
0.408993	41.47	95.37	53.90	100.0	X	17.0	19.9
1.554706	46.73	63.80	17.07	100.0	X	21.0	20.0
1.774191	54.12	69.50	15.38	100.0	X	21.0	20.0
1.998066	36.40	69.50	33.10	100.0	X	21.0	20.0
26.668213	40.35	69.50	29.15	100.0	X	261.0	20.5
29.113279	53.39	69.50	16.11	100.0	X	168.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

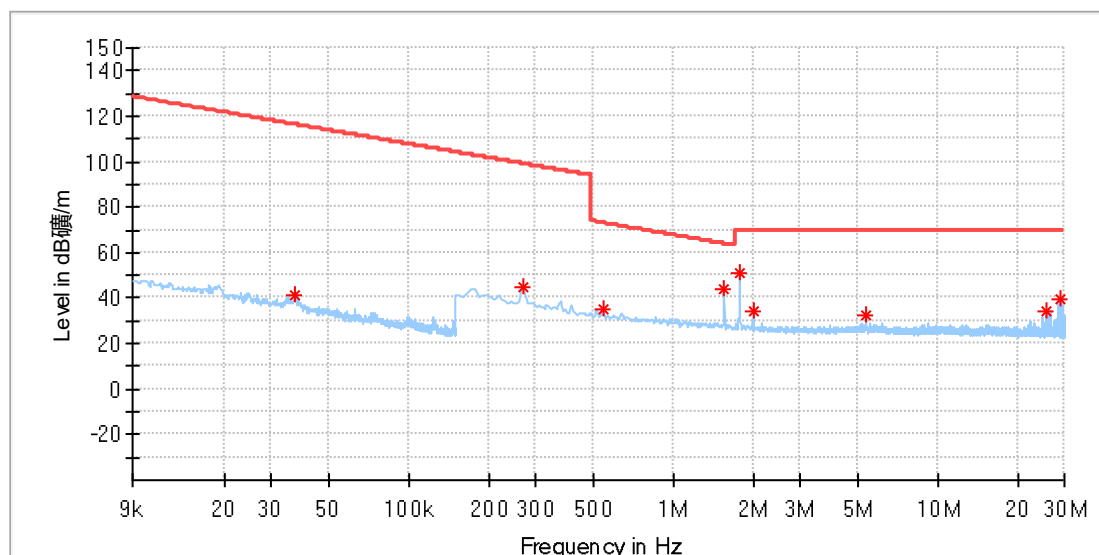

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036797	41.59	116.28	74.68	100.0	Y	48.0	19.9
0.268522	44.64	99.02	54.38	100.0	Y	182.0	19.9
0.540684	35.34	72.95	37.61	100.0	Y	344.0	19.9
1.554706	44.09	63.80	19.71	100.0	Y	75.0	20.0
1.774191	51.26	69.50	18.24	100.0	Y	75.0	20.0
1.998066	34.41	69.50	35.09	100.0	Y	75.0	20.0
5.334243	32.39	69.50	37.11	100.0	Y	57.0	20.1
25.557618	34.14	69.50	35.36	100.0	Y	269.0	20.5
29.113279	39.53	69.50	29.97	100.0	Y	315.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

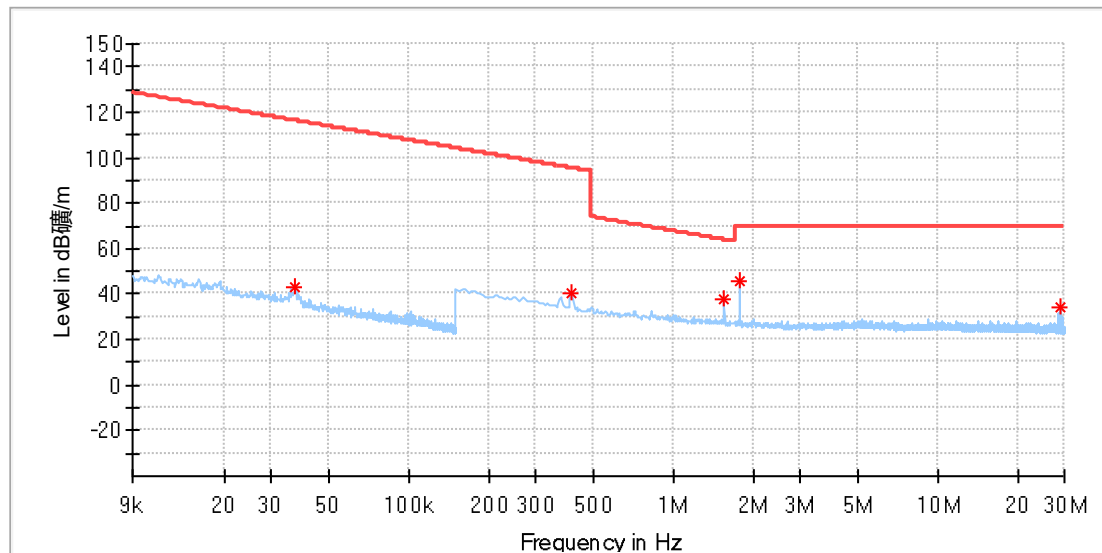

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	42.75	116.20	73.45	100.0	Z	92.0	19.9
0.413383	40.11	95.28	55.17	100.0	Z	338.0	19.9
1.550316	37.83	63.82	26.00	100.0	Z	39.0	20.0
1.774191	45.50	69.50	24.00	100.0	Z	39.0	20.0
29.113279	34.34	69.50	35.16	100.0	Z	186.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: RSS-216
Tested By: Kei Zhang
Reviewed By: Terry Yin

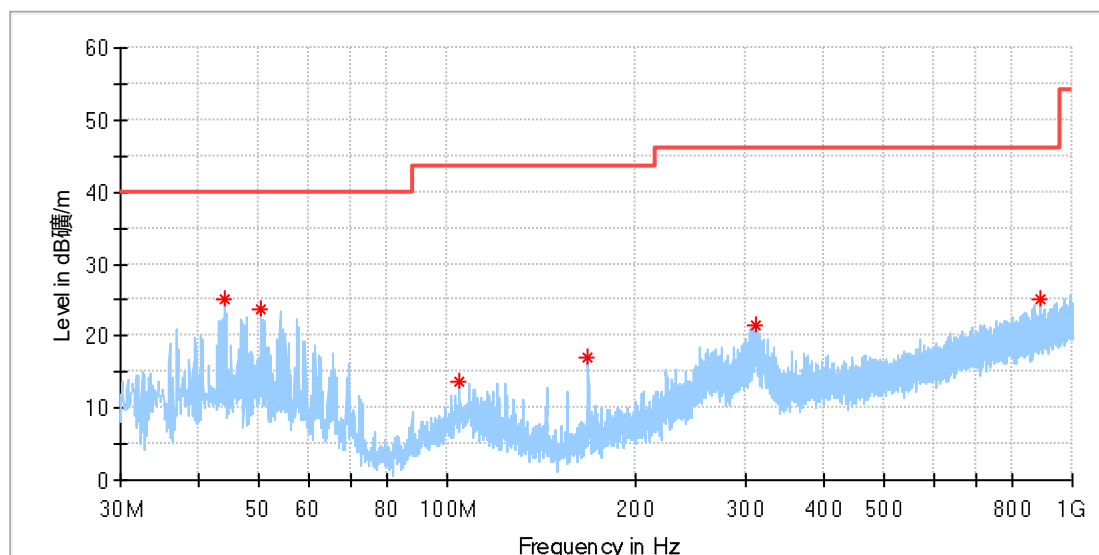

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.011111	25.16	40.00	14.84	100.0	H	87.0	-19.1
50.423889	23.83	40.00	16.17	100.0	H	157.0	-18.4
104.743889	13.57	43.50	29.93	100.0	H	47.0	-18.9
168.009444	17.16	43.50	26.34	100.0	H	0.0	-21.4
310.707222	21.49	46.00	24.51	100.0	H	290.0	-16.0
890.982778	25.18	46.00	20.82	100.0	H	101.0	-4.9

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: RSS-216
Tested By: Kei Zhang
Reviewed By: Terry Yin

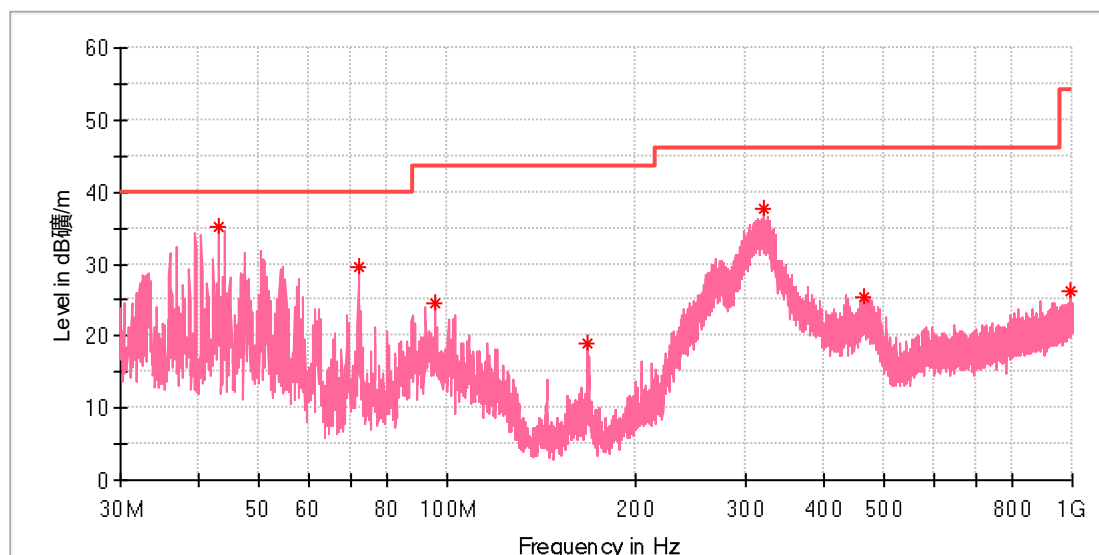

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.095000	35.04	40.00	4.96	100.0	V	212.0	-19.4
72.033333	29.56	40.00	10.44	100.0	V	54.0	-22.6
95.744444	24.51	43.50	18.99	100.0	V	358.0	-19.7
167.847778	19.03	43.50	24.47	100.0	V	354.0	-21.4
321.754444	37.62	46.00	8.38	100.0	V	153.0	-15.6
463.967222	25.44	46.00	20.56	100.0	V	199.0	-12.5
995.527222	26.14	54.00	27.86	100.0	V	70.0	-3.5


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (Co-location)

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Charging
Order No/Sample No:	27200037/A004214252-009
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

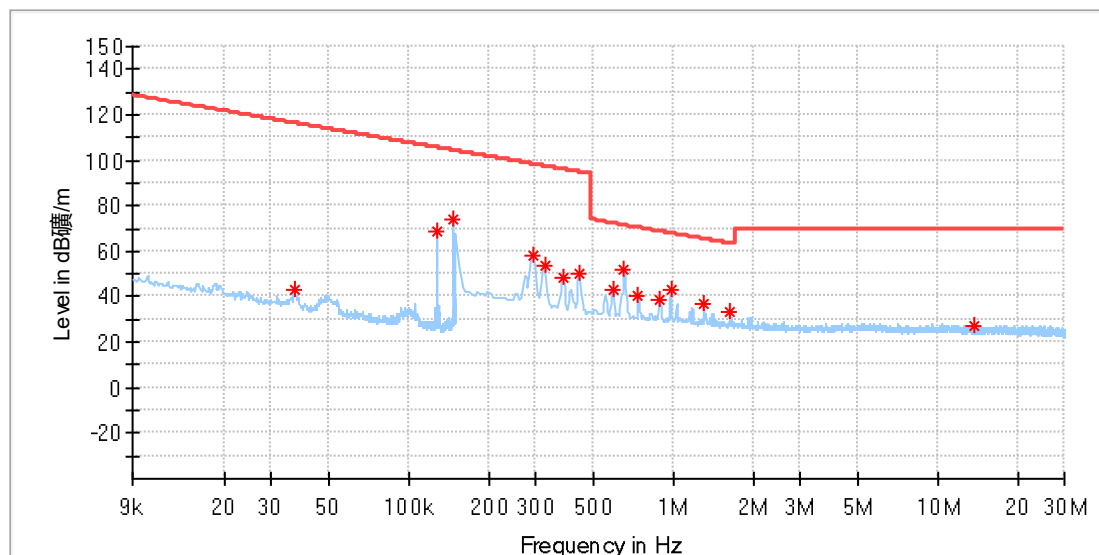

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	42.77	116.25	73.48	100.0	X	142.0	19.9
0.127843	68.53	105.46	36.94	100.0	X	110.0	19.9
0.147583	73.66	104.22	30.55	100.0	X	286.0	19.9
0.294860	58.22	98.21	39.99	100.0	X	297.0	19.9
0.325588	53.73	97.35	43.62	100.0	X	10.0	19.9
0.382655	47.94	95.95	48.00	100.0	X	118.0	19.9
0.439721	50.25	94.74	44.49	100.0	X	272.0	19.9
0.588971	43.48	72.21	28.73	100.0	X	103.0	19.9
0.650427	52.18	71.35	19.16	100.0	X	14.0	19.9
0.733831	40.79	70.30	29.51	100.0	X	258.0	19.9
0.883081	39.04	68.70	29.66	100.0	X	279.0	19.9
0.975265	43.21	67.84	24.63	100.0	X	14.0	19.9
1.304493	37.26	65.32	28.06	100.0	X	21.0	19.9
1.629331	33.43	63.39	29.97	100.0	X	24.0	19.9
13.727360	27.35	69.50	42.15	100.0	X	301.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

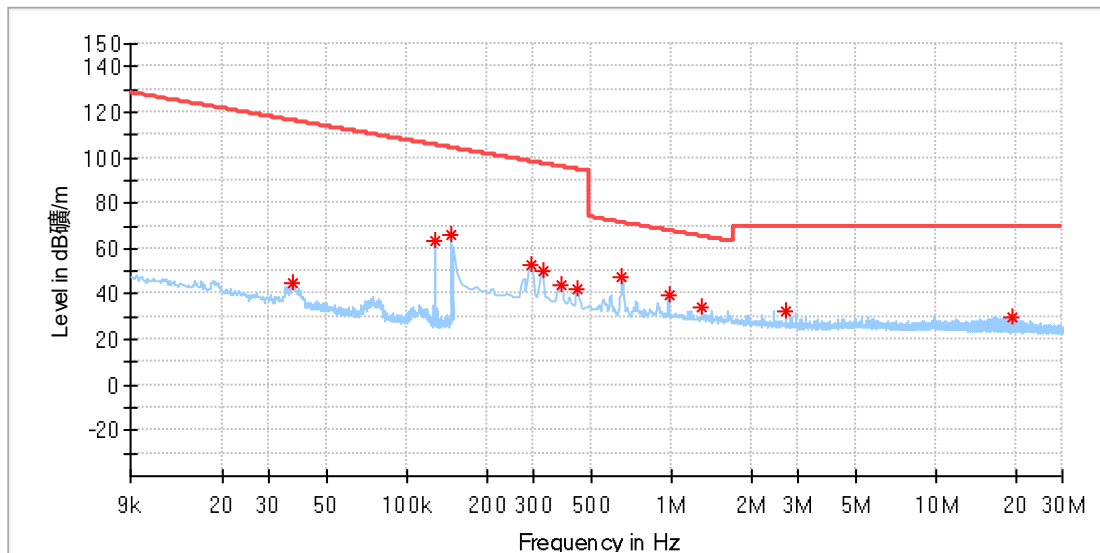

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036797	44.53	116.28	71.75	100.0	Y	281.0	19.9
0.128346	63.14	105.43	42.29	100.0	Y	204.0	19.9
0.147583	65.94	104.22	38.28	100.0	Y	20.0	19.9
0.294860	53.02	98.21	45.19	100.0	Y	30.0	19.9
0.325588	50.39	97.35	46.96	100.0	Y	283.0	19.9
0.382655	43.98	95.95	51.97	100.0	Y	199.0	19.9
0.439721	42.21	94.74	52.53	100.0	Y	5.0	19.9
0.650427	47.69	71.35	23.66	100.0	Y	120.0	19.9
0.979655	39.95	67.80	27.85	100.0	Y	269.0	19.9
1.304493	34.10	65.32	31.22	100.0	Y	98.0	19.9
2.691640	32.75	69.50	36.75	100.0	Y	0.0	20.0
19.249610	29.61	69.50	39.89	100.0	Y	66.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

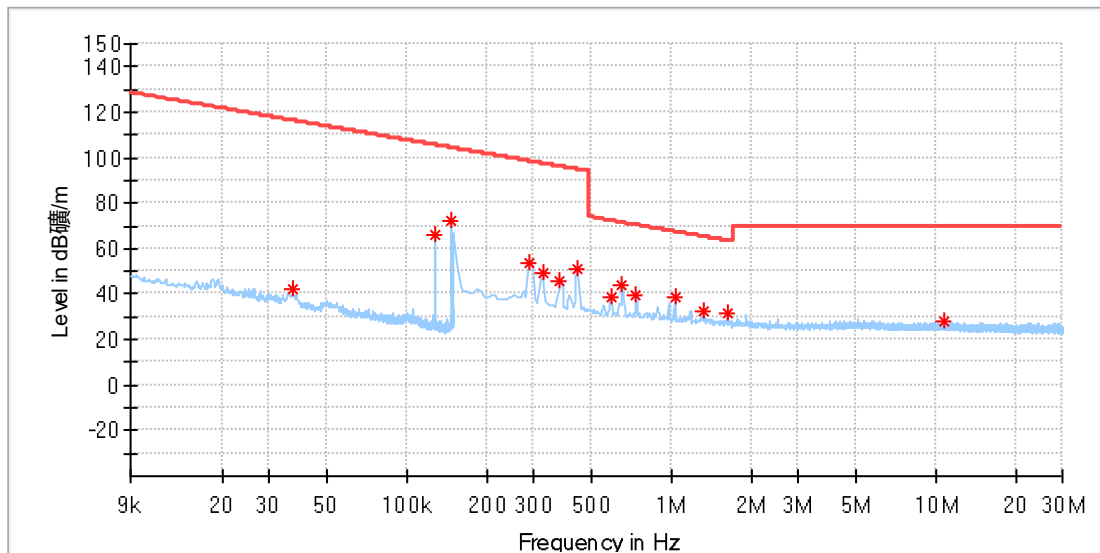

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	41.76	116.25	74.49	100.0	Z	250.0	19.9
0.127843	66.24	105.46	39.23	100.0	Z	115.0	19.9
0.147583	72.59	104.22	31.62	100.0	Z	295.0	19.9
0.290471	53.94	98.34	44.40	100.0	Z	304.0	19.9
0.325588	49.25	97.35	48.09	100.0	Z	0.0	19.9
0.378265	46.01	96.05	50.04	100.0	Z	101.0	19.9
0.439721	50.72	94.74	44.02	100.0	Z	333.0	19.9
0.588971	38.96	72.21	33.24	100.0	Z	94.0	19.9
0.650427	44.21	71.35	27.14	100.0	Z	16.0	19.9
0.733831	39.73	70.30	30.57	100.0	Z	320.0	19.9
1.032331	38.22	67.35	29.13	100.0	Z	251.0	19.9
1.326441	32.82	65.18	32.36	100.0	Z	135.0	19.9
1.620552	31.36	63.44	32.08	100.0	Z	67.0	19.9
10.702853	28.02	69.50	41.48	100.0	Z	202.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: RSS-216
Tested By: Kei Zhang
Reviewed By: Terry Yin

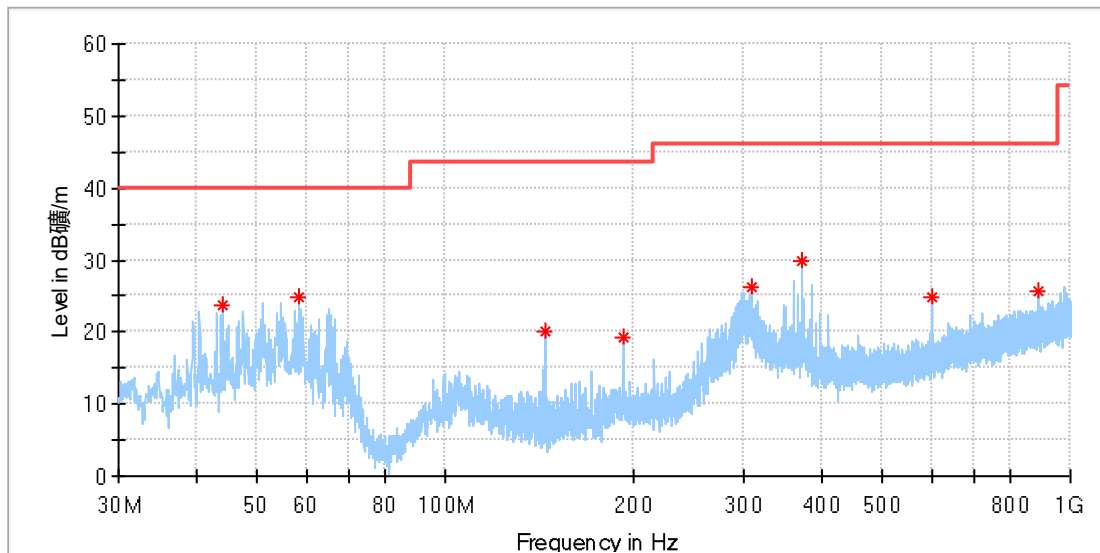

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.011111	23.74	40.00	16.26	100.0	H	341.0	-19.1
58.237778	24.83	40.00	15.17	100.0	H	285.0	-18.9
144.352222	20.13	43.50	23.37	100.0	H	240.0	-22.4
192.367222	19.17	43.50	24.33	100.0	H	144.0	-19.5
308.390000	26.17	46.00	19.83	100.0	H	307.0	-16.1
372.787222	29.94	46.00	16.06	100.0	H	6.0	-14.4
601.599444	24.91	46.00	21.09	100.0	H	183.0	-9.6
890.982778	25.77	46.00	20.23	100.0	H	292.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Charging
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: RSS-216
Tested By: Kei Zhang
Reviewed By: Terry Yin

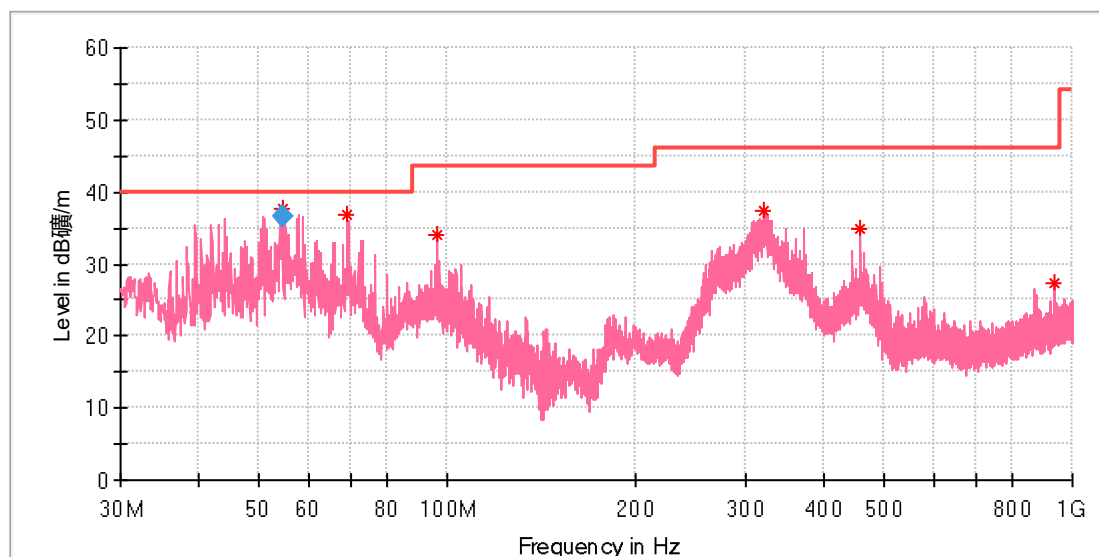

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.411667	37.72	40.00	2.28	100.0	V	15.0	-18.5
69.123333	36.70	40.00	3.30	100.0	V	92.0	-21.7
96.175556	33.96	43.50	9.54	100.0	V	293.0	-19.7
320.784444	37.43	46.00	8.57	100.0	V	300.0	-15.7
456.746111	34.96	46.00	11.04	100.0	V	78.0	-12.6
936.950000	27.23	46.00	18.77	100.0	V	202.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.436256	36.54	40.00	3.46	100.0	V	10.0	-18.5

Standby mode

EUT Information

EUT Name:	3-in-1 Wireless Charger
Model:	W777
Test Mode:	Standby
Order No/Sample No:	27200037/A004214252-009
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 22 Humi:55%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

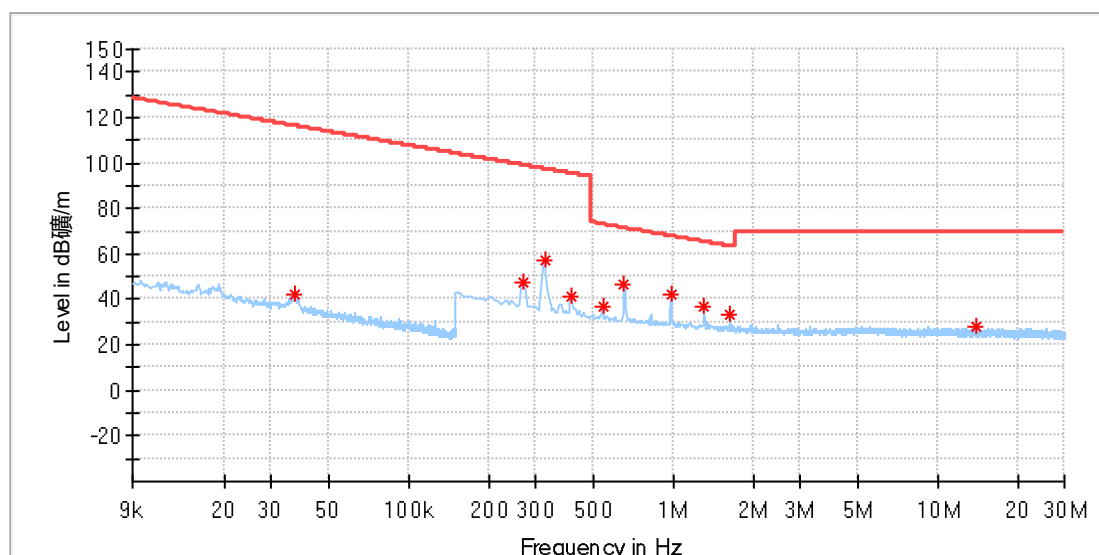

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	42.40	116.23	73.83	100.0	X	213.0	19.9
0.268522	47.66	99.02	51.37	100.0	X	100.0	19.9
0.325588	56.89	97.35	40.46	100.0	X	277.0	19.9
0.408993	41.02	95.37	54.35	100.0	X	4.0	19.9
0.540684	37.30	72.95	35.65	100.0	X	100.0	19.9
0.650427	46.80	71.35	24.55	100.0	X	277.0	19.9
0.975265	42.04	67.84	25.80	100.0	X	277.0	19.9
1.304493	37.19	65.32	28.13	100.0	X	277.0	19.9
1.629331	33.70	63.39	29.69	100.0	X	230.0	19.9
14.008302	27.93	69.50	41.57	100.0	X	67.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Standby
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

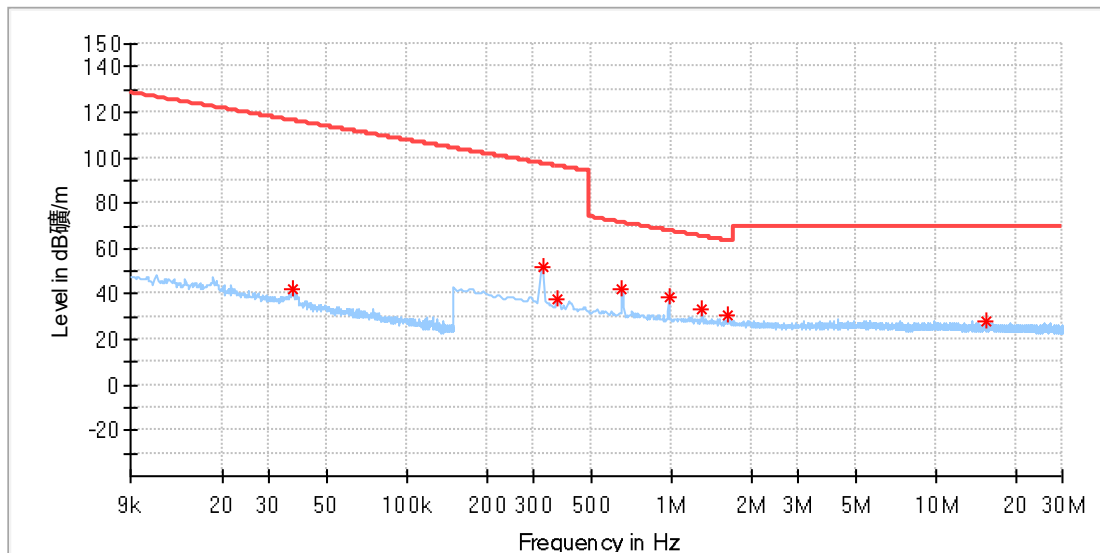

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036797	41.98	116.28	74.30	100.0	Y	236.0	19.9
0.325588	51.98	97.35	45.37	100.0	Y	4.0	19.9
0.369485	37.92	96.25	58.33	100.0	Y	38.0	19.9
0.650427	42.30	71.35	29.04	100.0	Y	4.0	19.9
0.979655	38.26	67.80	29.54	100.0	Y	338.0	19.9
1.304493	33.78	65.32	31.54	100.0	Y	20.0	19.9
1.633721	30.62	63.37	32.75	100.0	Y	162.0	20.0
15.518360	28.00	69.50	41.50	100.0	Y	291.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Standby
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

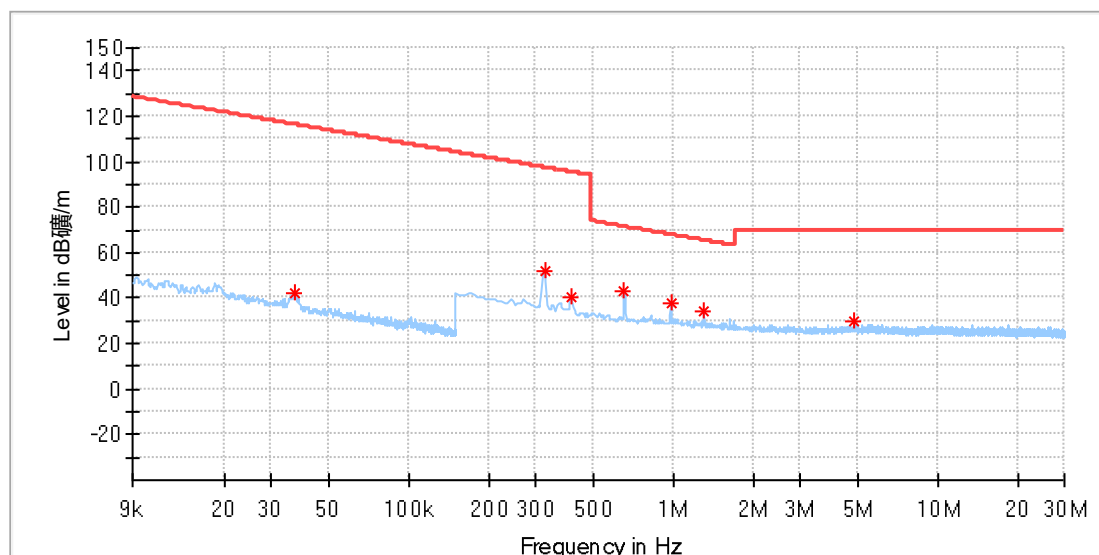

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	41.89	116.20	74.31	100.0	Z	159.0	19.9
0.325588	51.93	97.35	45.42	100.0	Z	283.0	19.9
0.408993	40.08	95.37	55.29	100.0	Z	52.0	19.9
0.650427	42.87	71.35	28.47	100.0	Z	301.0	19.9
0.975265	37.52	67.84	30.32	100.0	Z	301.0	19.9
1.304493	34.26	65.32	31.06	100.0	Z	283.0	19.9
4.776750	29.53	69.50	39.97	100.0	Z	81.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Standby
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

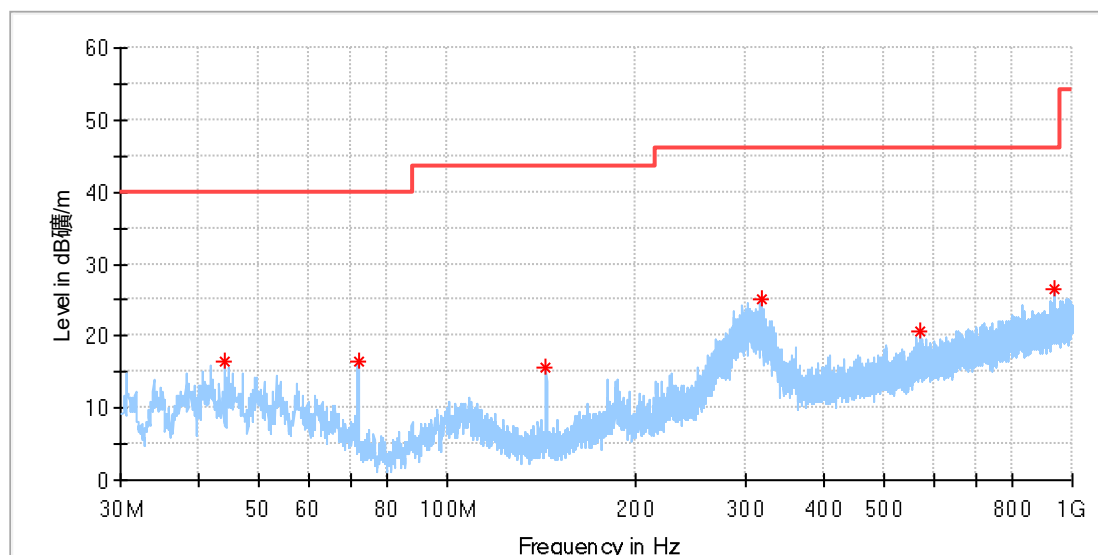

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.065000	16.33	40.00	23.67	100.0	H	296.0	-19.1
71.979444	16.50	40.00	23.50	100.0	H	192.0	-22.6
143.975000	15.51	43.50	27.99	100.0	H	28.0	-22.4
319.545000	25.07	46.00	20.93	100.0	H	270.0	-15.7
569.266111	20.71	46.00	25.29	100.0	H	205.0	-10.4
936.950000	26.46	46.00	19.54	100.0	H	317.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 3-in-1 Wireless Charger
Model: W777
Test Mode: Standby
Order No/Sample No: 27200037/A004214252-009
Test Voltage: AC 120V, 60Hz
Remark: Temp 22 Humi:55%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

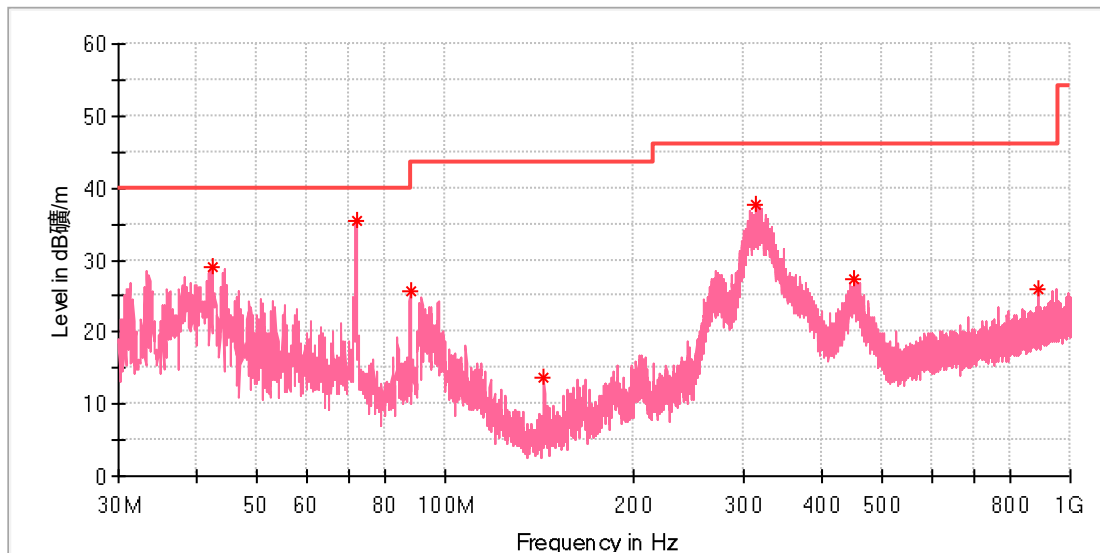

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.448333	29.02	40.00	10.98	100.0	V	287.0	-19.6
71.979444	35.36	40.00	4.64	100.0	V	53.0	-22.6
87.822778	25.65	40.00	14.35	100.0	V	107.0	-21.7
143.975000	13.59	43.50	29.91	100.0	V	351.0	-22.4
313.401667	37.71	46.00	8.29	100.0	V	198.0	-15.9
452.165556	27.22	46.00	18.78	100.0	V	136.0	-12.7
890.982778	26.00	46.00	20.00	100.0	V	84.0	-4.9


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: 3-in-1 Wireless Charger
Order Number: 27200037(P02234641)
Model: W777
Test Mode: MPP, 25W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15 C
Test By:/Review By: Steve Lan / Charlie Zha
Tem./Hum./Pressure: 24.0°C/51.1%/101kPa
Remark: SR 3

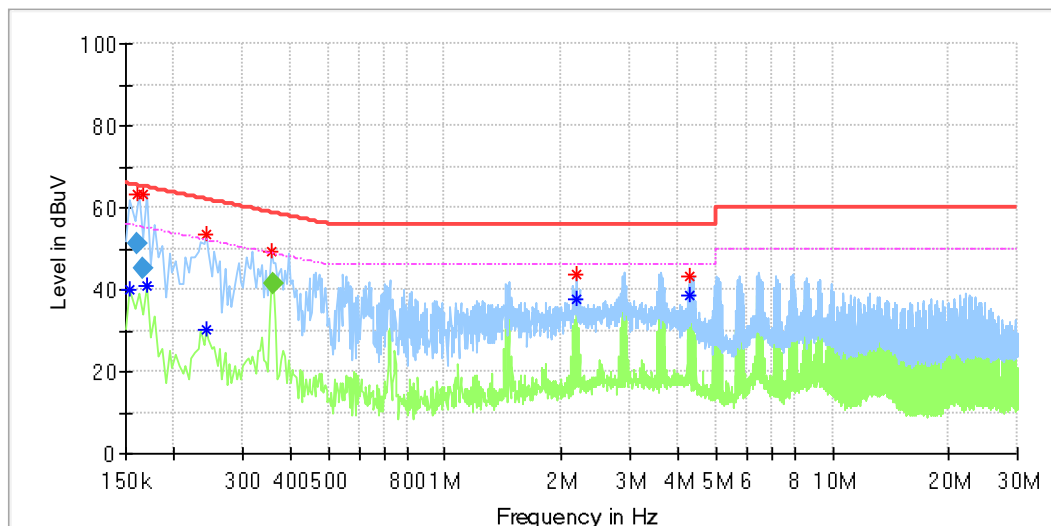

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.154	---	40.0	55.78	15.74	L1	9.6
0.162	63.2	---	65.36	2.11	L1	9.6
0.166	63.2	---	64.96	1.81	L1	9.6
0.170	---	40.9	54.96	14.02	L1	9.6
0.242	---	30.3	52.03	21.76	L1	9.7
0.242	53.5	---	62.03	8.50	L1	9.7
0.358	49.1	---	58.78	9.66	L1	9.6
0.362	---	41.8	48.68	6.85	L1	9.6
2.182	---	37.7	46.00	8.26	L1	9.6
2.182	43.8	---	56.00	12.20	L1	9.6
4.274	---	38.4	46.00	7.61	L1	9.7
4.274	43.5	---	56.00	12.53	L1	9.7

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.162	51.0	---	65.39	14.35	1000.0	9.0	L1	9.6
0.166	45.3	---	65.18	19.87	1000.0	9.0	L1	9.6
0.362	---	41.3	48.69	7.44	1000.0	9.0	L1	9.6

EUT Information

EUT Name: 3-in-1 Wireless Charger
Order Number: 27200037(P02234641)
Model: W777
Test Mode: MPP, 25W
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15 C
Test By:/Review By: Steve Lan / Charlie Zha
Tem./Hum./Pressure: 24.0°C/51.1%/101kPa
Remark: SR 3

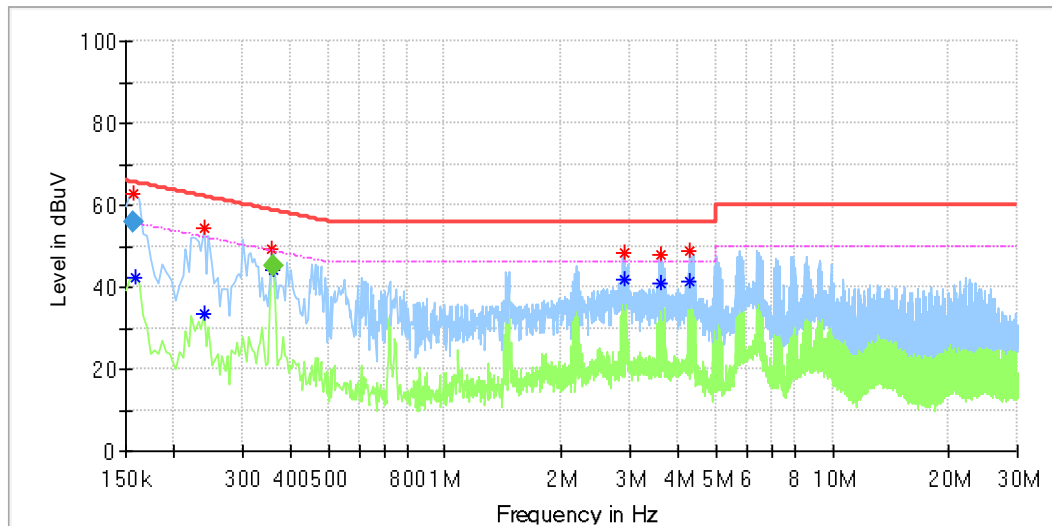

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.158	62.7	---	65.57	2.83	N	9.8
0.158	---	42.3	55.57	13.27	N	9.8
0.238	54.4	---	62.17	7.72	N	9.9
0.238	---	33.5	52.17	18.64	N	9.9
0.358	49.4	---	58.78	9.37	N	9.9
0.362	---	44.1	48.68	4.62	N	9.9
2.902	---	41.8	46.00	4.19	N	9.8
2.902	48.3	---	56.00	7.73	N	9.8
3.622	---	41.2	46.00	4.85	N	9.7
3.622	47.8	---	56.00	8.23	N	9.7
4.274	---	41.5	46.00	4.46	N	9.7
4.274	48.7	---	56.00	7.35	N	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.158	55.6	---	65.60	9.97	1000.0	9.0	N	9.8
0.362	---	44.9	48.69	3.75	1000.0	9.0	N	9.9