

Federal Communications Commission
Authorization and Evaluation Division
Equipment Authorization Branch
7435 Oakland Mills Road
Columbia, MD 21046

2018-09-05

Re: RF exposure information for:

Product name: BP01 with 2AQQN-BP01

To Whom It May Concern:


BP01 is a portable device intended for use within 20 cm of humans and must demonstrate compliance to the either relevant SAR limits or demonstrate a maximum conducted output power less than the SAR exclusion thresholds pursuant to "KDB 447498 D01 General RF Exposure Guidance v06" at the specified distance to user and frequency range.

The properties of BP01 are as follows:

Maximum average conducted output power:	0.8 mW
Distance to user:	< 5 mm
Frequency range:	2400 to 2480 MHz
Power threshold according to KDB 447498 §§4.3.1:	9 mW

The power threshold for SAR exclusion is respected hence BP01 is compliant.

Sincerely,

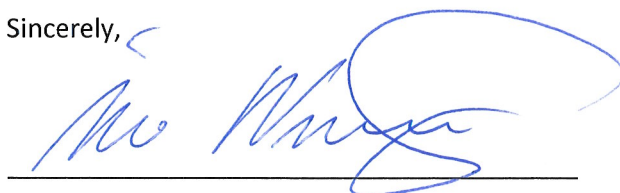

Signature of contact person registered with FCC

Åke Wernelind, CEO

TR:TECH

Tritech Technology AB > Järnvägsgatan 10, Box 1094 SE-172 22 Sundbyberg, Sweden
Phone +46 (0) 8 410 120 00 > Fax +46 (0) 8 410 120 01 > info@tritech.se > www.tritech.se
Org-nr 556858-5847 > BG-nr 5163-8070