

APPENDIX A

MAXIMUM TRANSMITTER POWER TEST DATA


Operation Mode	Channel	Frequency (MHz)	ERP (dBm)	ERP (W)	Limits (W)	Margin (W)	Pass/Fail
FRS	1	462.6525	22.65	0.1841	2.00	-1.8159	Pass
	4	462.6375	22.61	0.1824	2.00	-1.8176	Pass
	7	462.7125	22.68	0.1854	2.00	-1.8146	Pass
	8	467.5625	22.82	0.1914	0.50	-0.3086	Pass
	11	467.6375	22.81	0.1910	0.50	-0.3090	Pass
	14	467.7125	22.81	0.1910	0.50	-0.3090	Pass
	15	462.5500	22.79	0.1901	2.00	-1.8099	Pass
	19	462.6500	22.80	0.1905	2.00	-1.8095	Pass
	22	462.7250	22.68	0.1854	2.00	-1.8146	Pass

APPENDIX B

MODULATION LIMIT TEST DATA

GMRS/FRS: Channel 4						
Modulation Level (dB)	Peak frequency deviation (kHz)				Limit (kHz)	Pass / Fail
	300Hz	1000Hz	2500Hz	3125Hz		
-20	0.23	0.58	0.58	0.51	2.50	Pass
-15	0.24	0.73	0.58	0.52	2.50	Pass
-10	0.27	0.88	0.86	0.91	2.50	Pass
-5	0.32	1.22	1.23	1.42	2.50	Pass
0	0.54	1.56	1.52	1.57	2.50	Pass
5	0.58	1.57	1.61	1.81	2.50	Pass
10	0.63	1.74	1.89	1.92	2.50	Pass
15	0.74	1.77	1.93	2.21	2.50	Pass
20	0.75	1.80	2.12	2.32	2.50	Pass

The test plot as follows:

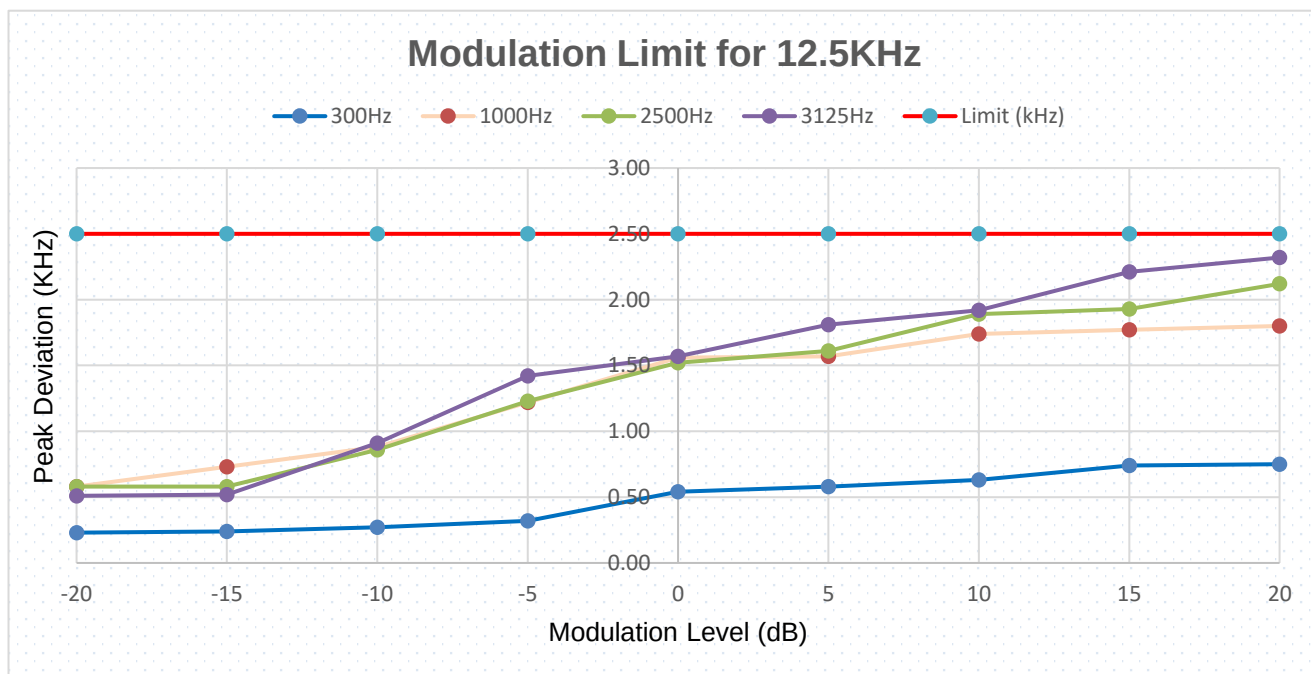


APPENDIX B

MODULATION LIMIT TEST DATA

FRS: Channel 11						
Modulation Level (dB)	Peak frequency deviation (kHz)				Limit (kHz)	Pass / Fail
	300Hz	1000Hz	2500Hz	3125Hz		
-20	0.23	0.22	0.32	0.12	2.50	Pass
-15	0.24	0.33	0.33	0.48	2.50	Pass
-10	0.28	0.66	0.62	0.71	2.50	Pass
-5	0.33	1.11	1.27	1.31	2.50	Pass
0	0.46	1.55	1.69	1.73	2.50	Pass
5	0.55	1.67	1.79	1.84	2.50	Pass
10	0.61	1.84	1.97	2.01	2.50	Pass
15	0.77	1.97	2.09	2.19	2.50	Pass
20	0.81	2.21	2.17	2.26	2.50	Pass

The test plot as follows:

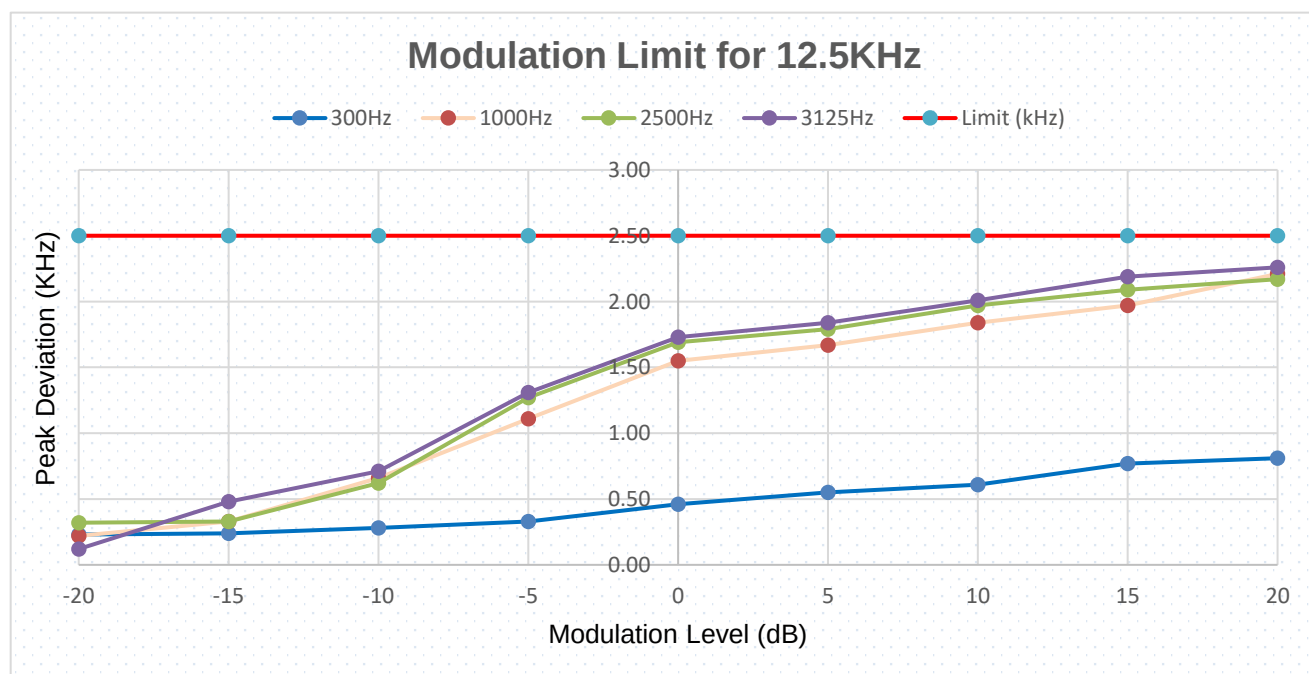


APPENDIX B

MODULATION LIMIT TEST DATA

GMRS: Channel 19						
Modulation Level (dB)	Peak frequency deviation (kHz)				Limit (kHz)	Pass / Fail
	300Hz	1000Hz	2500Hz	3125Hz		
-20	0.17	0.22	0.27	0.22	5.00	Pass
-15	0.19	0.33	0.29	0.38	5.00	Pass
-10	0.29	0.66	0.61	0.78	5.00	Pass
-5	0.31	1.11	1.27	1.43	5.00	Pass
0	0.49	1.55	1.53	1.73	5.00	Pass
5	0.55	1.55	1.71	1.89	5.00	Pass
10	0.89	1.68	1.92	2.01	5.00	Pass
15	1.72	1.77	2.09	2.05	5.00	Pass
20	1.81	2.13	2.17	2.11	5.00	Pass

The test plot as follows:

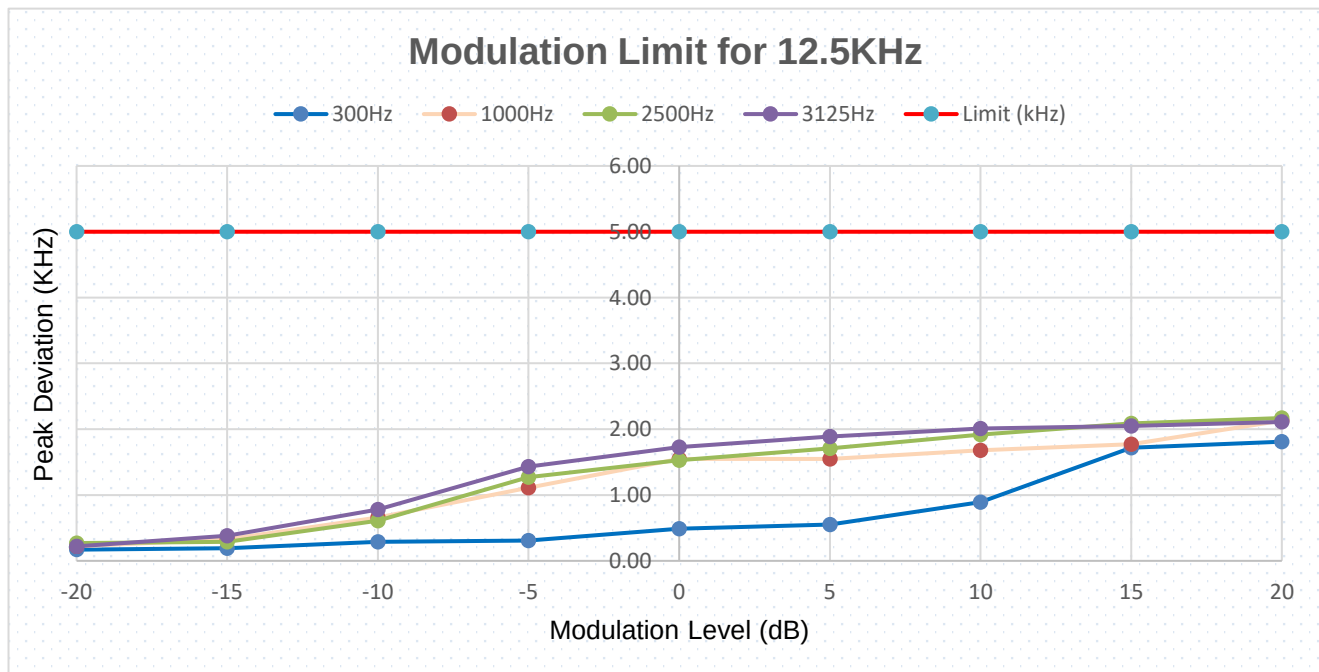

APPENDIX C



AUDIO FREQUENCY RESPONSE TEST DATA

Audio Frequency (Hz)	Frequency Deviation			Audio Frequency Response (dB)			Limit-1	Limit-2
	Channel 4	Channel 11	Channel 19	Channel 4	Channel 11	Channel 19		
100	0.05	0.08	0.07	-20.83	-17.79	-19.75		
200	0.08	0.09	0.08	-16.75	-16.76	-18.59		
300	0.15	0.18	0.20	-11.29	-10.74	-10.63	-9.40	-17.80
400	0.19	0.22	0.26	-9.23	-9.00	-8.35	-6.90	-12.90
500	0.24	0.31	0.33	-7.20	-6.02	-6.28	-5.00	-9.00
600	0.32	0.36	0.36	-4.70	-4.72	-5.52	-3.40	-7.40
700	0.32	0.40	0.44	-4.70	-3.81	-3.78	-2.10	-6.10
800	0.41	0.51	0.57	-2.55	-1.70	-1.53	-0.90	-4.90
900	0.43	0.57	0.60	-2.14	-0.73	-1.09	0.10	-3.90
1000	0.55	0.62	0.68	0.00	0.00	0.00	1.00	-3.00
1200	0.59	0.67	0.71	0.61	0.67	0.37	2.60	-1.40
1400	0.62	0.70	0.82	1.04	1.05	1.63	3.90	-0.10
1600	0.73	0.76	0.88	2.46	1.77	2.24	5.10	1.10
1800	0.89	0.92	0.96	4.18	3.43	3.00	6.10	2.10
2000	1.04	1.16	1.22	5.53	5.44	5.08	7.00	3.00
2100	1.08	1.22	1.31	5.86	5.88	5.70	7.40	3.40
2200	1.10	1.25	1.34	6.02	6.09	5.89	7.80	3.80
2300	1.13	1.34	1.37	6.25	6.69	6.08	8.20	4.20
2400	1.22	1.33	1.41	6.92	6.63	6.33	8.60	4.60
2500	1.23	1.38	1.42	6.99	6.95	6.40	8.90	4.90
2600	1.27	1.41	1.44	7.27	7.14	6.52	9.30	4.60
2700	1.25	1.43	1.47	7.13	7.26	6.70	9.60	4.30
2800	1.30	1.44	1.52	7.47	7.32	6.99	9.90	4.00
2900	1.40	1.50	1.55	8.12	7.67	7.16	10.20	3.60
3000	1.42	1.53	1.58	8.24	7.85	7.32	10.50	3.40
3500	0.87	0.88	0.89	3.98	3.04	2.34		
4000	0.86	0.86	0.85	3.88	2.84	1.94		
4500	0.08	0.08	0.08	-16.75	-17.79	-18.59		
5000	0.08	0.08	0.08	-16.75	-17.79	-18.59		
Pass/Fail	Pass							

APPENDIX C


AUDIO FREQUENCY RESPONSE TEST DATA

The test plot as follows:

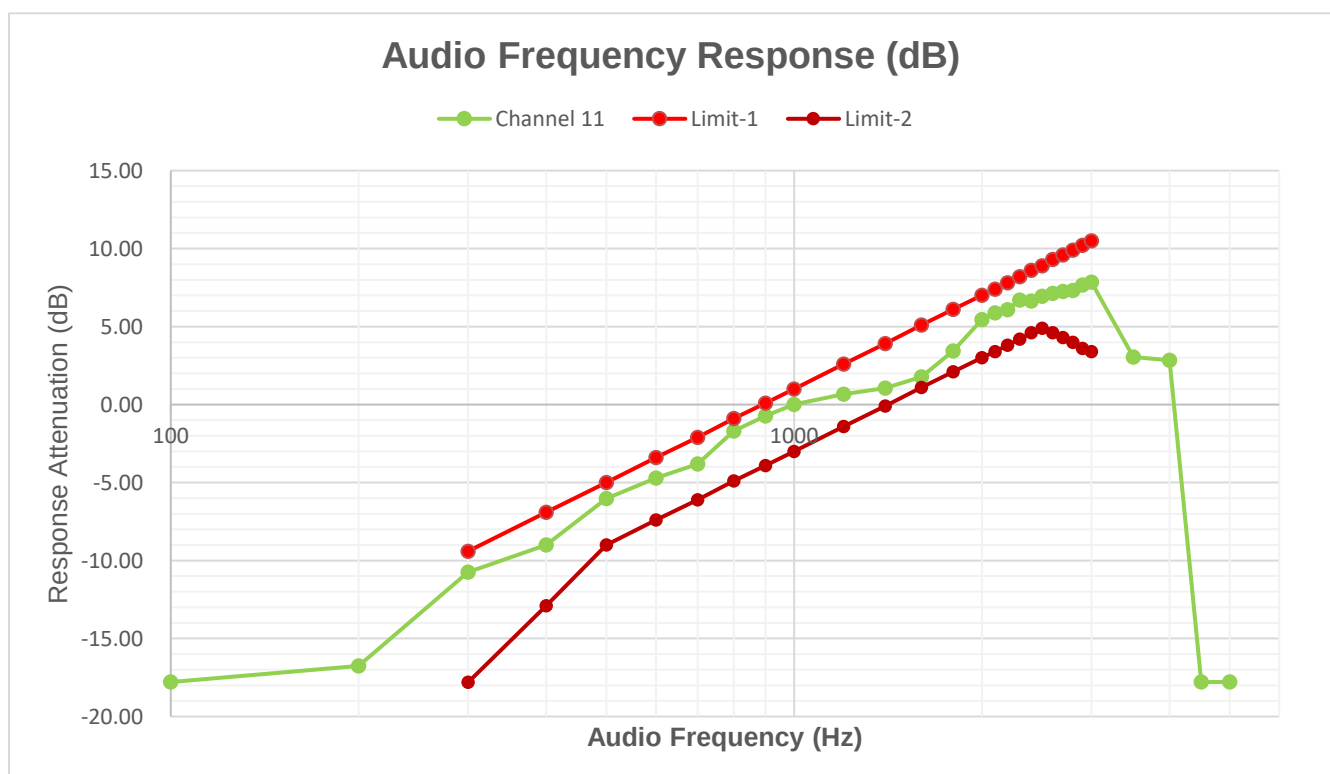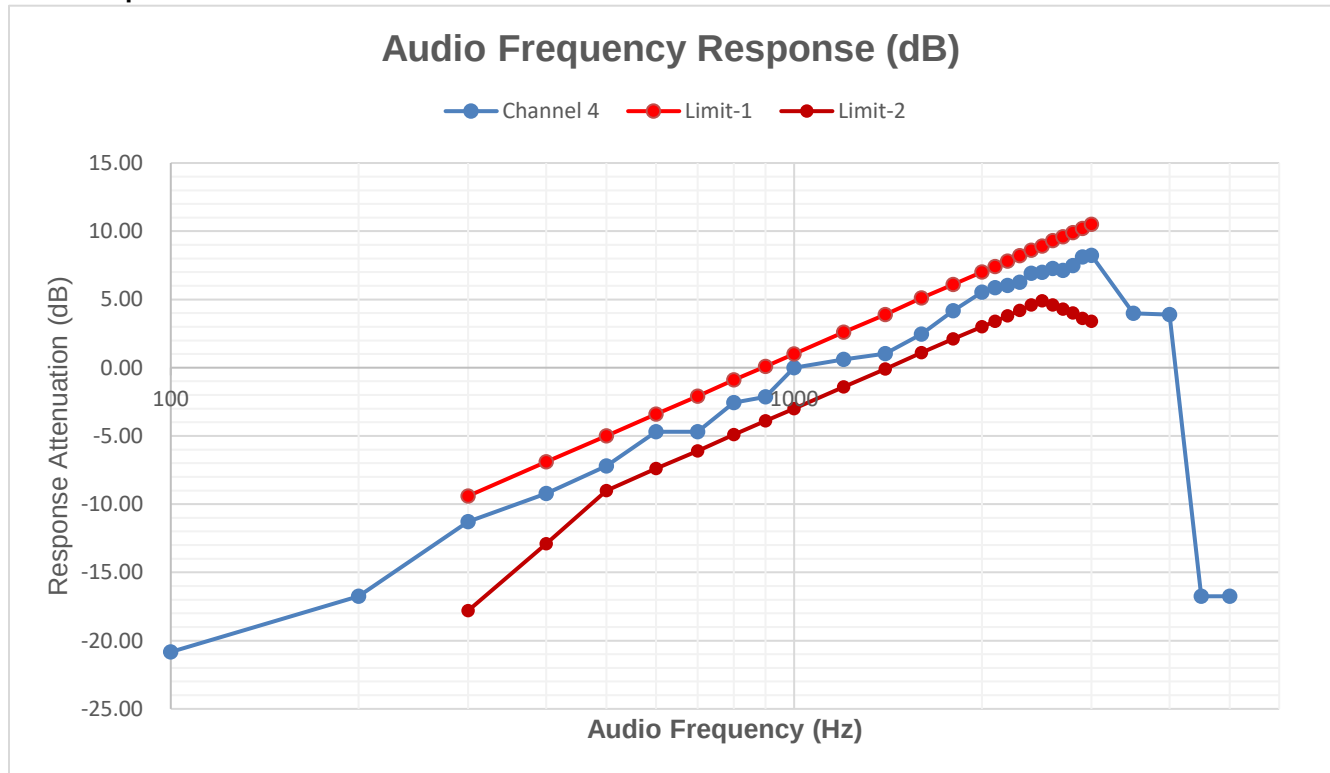

APPENDIX C

AUDIO FREQUENCY RESPONSE TEST DATA

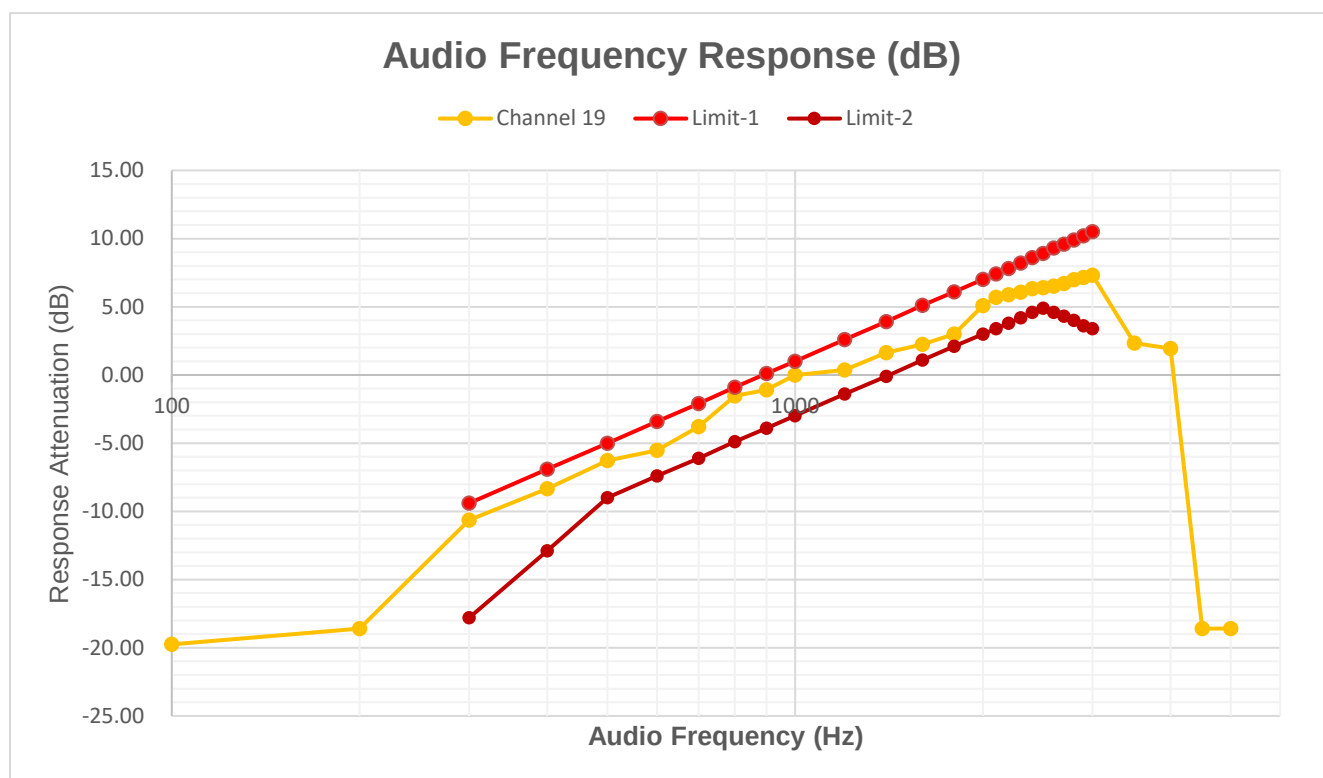


APPENDIX D

AUDIO LOW PASS FILTER RESPONSE TEST DATA



Audio Frequency (Hz)	Measured value (dB)			Response Attenuation (dB)			Limit	Pass/Fail
	Channel 4	Channel 11	Channel 19	Channel 4	Channel 11	Channel 19		
1000	-0.14	-0.35	-0.49	0.00	0.00	0.00	0.00	Pass
3000	-10.45	-9.69	-9.96	-10.32	-9.34	-9.47	0.00	Pass
4000	-21.05	-21.83	-22.83	-20.91	-21.48	-22.34	-7.50	Pass
5000	-31.48	-31.67	-31.09	-31.34	-31.32	-30.60	-13.30	Pass
6000	-45.46	-45.42	-45.60	-45.32	-45.07	-45.11	-18.10	Pass
8000	-59.12	-59.16	-59.04	-58.99	-58.81	-58.55	-25.60	Pass
10000	-60.15	-59.40	-60.15	-60.02	-59.05	-59.66	-31.40	Pass
15000	-61.55	-61.74	-61.88	-61.41	-61.39	-61.39	-41.90	Pass
20000	-61.58	-61.75	-61.84	-61.44	-61.40	-61.35	-50.00	Pass
30000	-62.18	-61.50	-61.81	-62.04	-61.15	-61.32	-50.00	Pass
40000	-62.40	-61.59	-62.18	-62.26	-61.24	-61.69	-50.00	Pass
50000	-62.15	-62.20	-61.86	-62.01	-61.85	-61.37	-50.00	Pass
60000	-62.34	-62.49	-61.96	-62.20	-62.14	-61.47	-50.00	Pass
70000	-62.43	-62.39	-61.72	-62.29	-62.04	-61.23	-50.00	Pass
80000	-62.48	-61.61	-61.61	-62.34	-61.26	-61.12	-50.00	Pass
90000	-61.87	-62.07	-61.57	-61.73	-61.72	-61.08	-50.00	Pass
100000	-62.01	-61.84	-61.54	-61.87	-61.48	-61.05	-50.00	Pass

The test plot as follows:

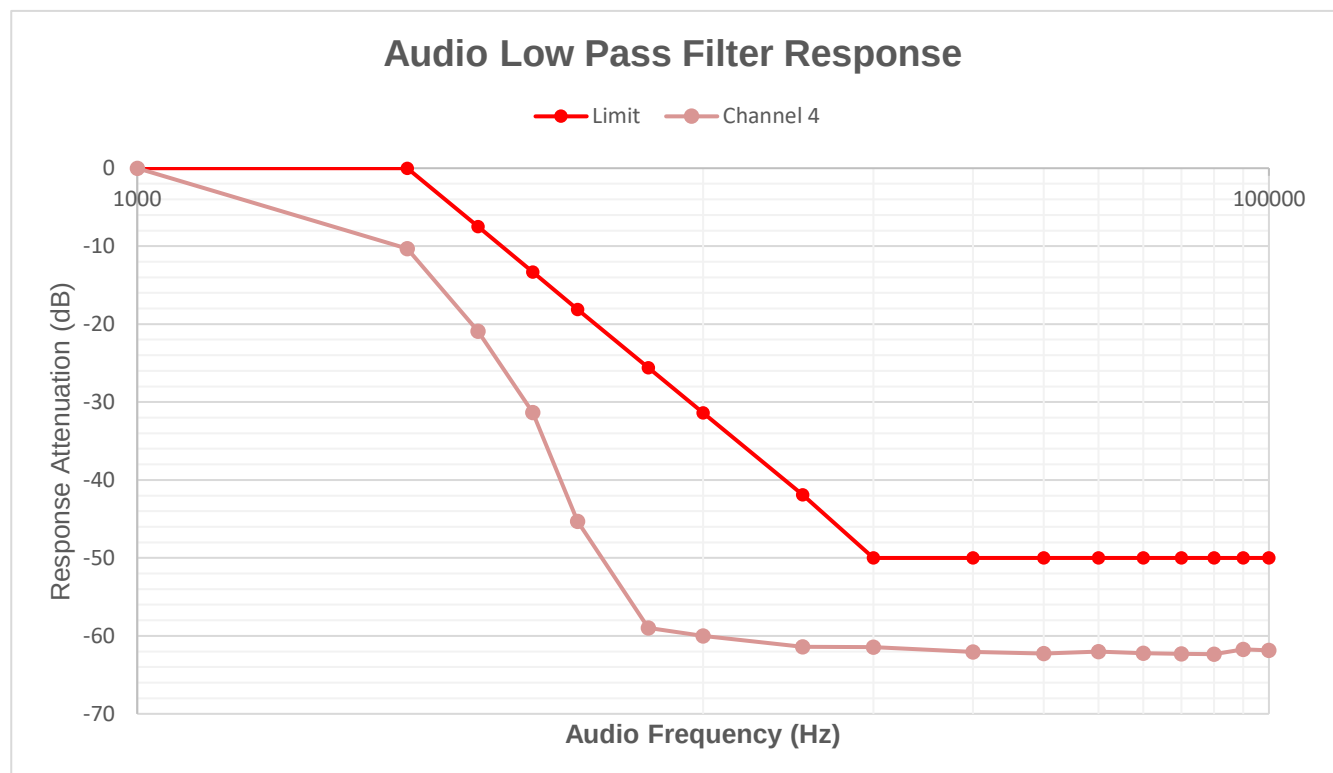

APPENDIX D

AUDIO LOW PASS FILTER RESPONSE TEST DATA

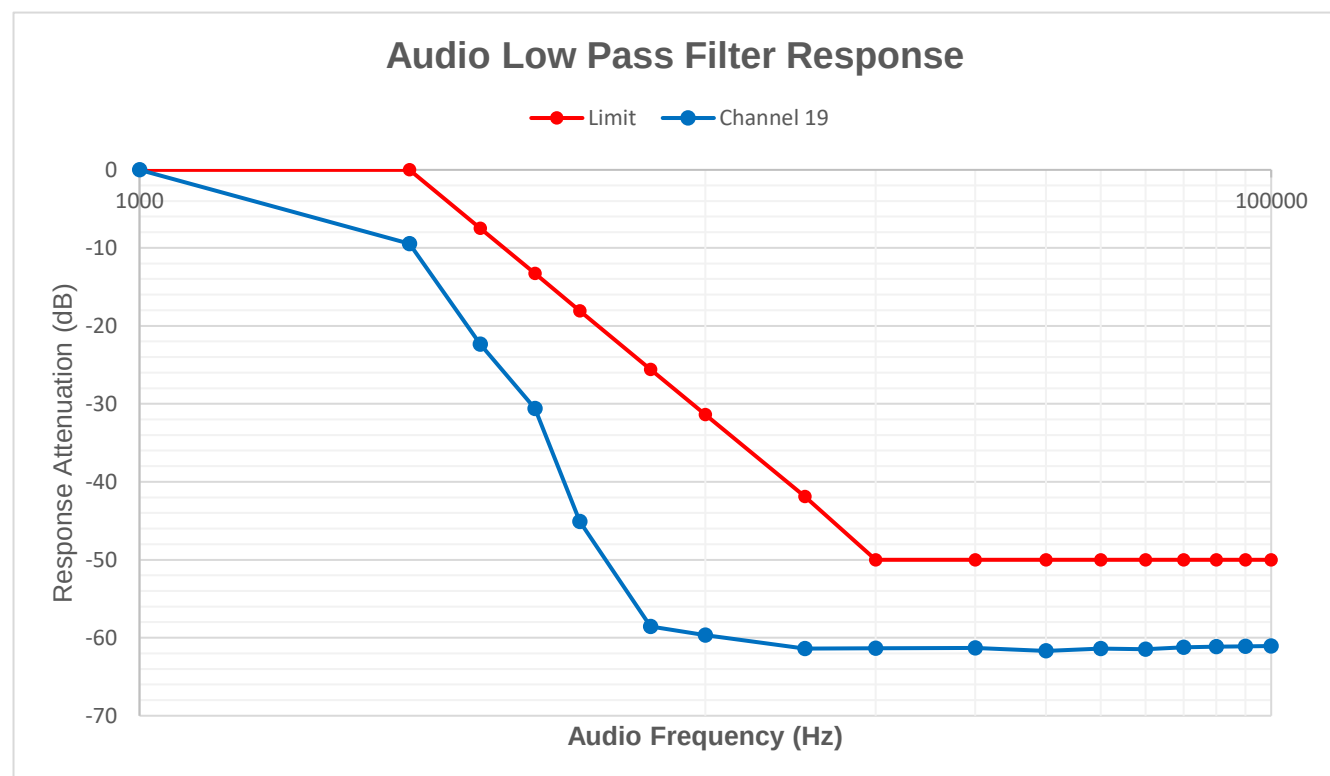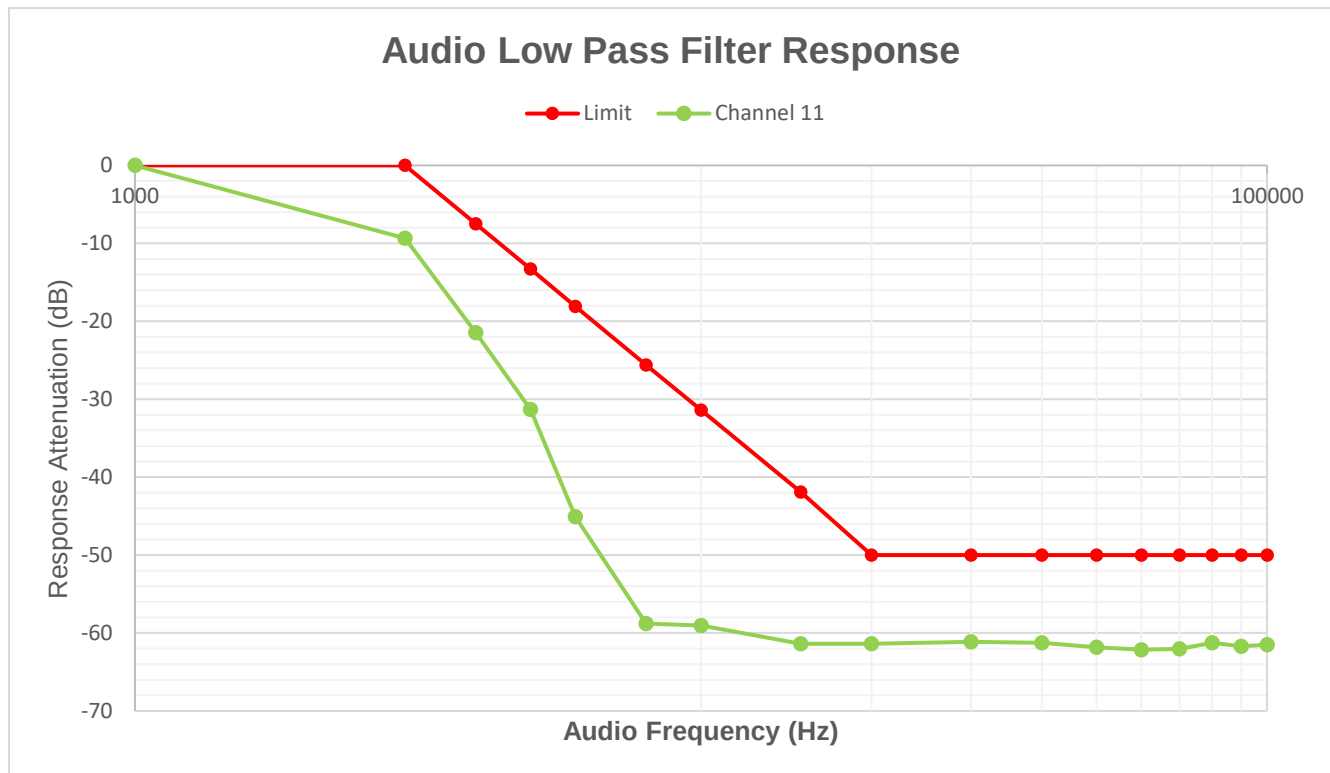

APPENDIX E

FREQUENCY STABILITY TEST DATA

GMRS/FRS_ Channel 4 (462.637500 MHz)					
Temp.	Voltage	Measured Frequency	Frequency Drift	Limit	Pass/Fail
(°C)		(MHz)	(ppm)	(ppm)	
50	VN	462.636532	-2.0924	2.5	Pass
40		462.636629	-1.8827	2.5	Pass
30		462.636641	-1.8567	2.5	Pass
20		462.636611	-1.9216	2.5	Pass
10		462.636658	-1.8200	2.5	Pass
0		462.636645	-1.8481	2.5	Pass
-10		462.636588	-1.9713	2.5	Pass
-20		462.636576	-1.9972	2.5	Pass
TN	VL	462.636647	-1.8438	2.5	Pass
	VH	462.636651	-1.8351	2.5	Pass

FRS_ Channel 11 (467.637500 MHz)					
Temp.	Voltage	Measured Frequency	Frequency Drift	Limit	Pass/Fail
(°C)		(MHz)	(ppm)	(ppm)	
50	VN	467.636873	-1.3408	2.5	Pass
40		467.637031	-1.0029	2.5	Pass
30		467.637048	-0.9666	2.5	Pass
20		467.637030	-1.0051	2.5	Pass
10		467.636932	-1.2146	2.5	Pass
0		467.636893	-1.2980	2.5	Pass
-10		467.636887	-1.3108	2.5	Pass
-20		467.636876	-1.3344	2.5	Pass
TN	VL	467.637050	-0.9623	2.5	Pass
	VH	467.637044	-0.9751	2.5	Pass

APPENDIX E

FREQUENCY STABILITY TEST DATA

FRS_ Channel 19 (462.650000 MHz)					
Temp.	Voltage	Measured Frequency	Frequency Drift	Limit	Pass/Fail
(°C)		(MHz)	(ppm)	(ppm)	
50	VN	462.649221	-1.6838	5.00	Pass
40		462.649689	-0.6722	5.00	Pass
30		462.649535	-1.0051	5.00	Pass
20		462.649961	-0.0843	5.00	Pass
10		462.649579	-0.9100	5.00	Pass
0		462.649357	-1.3898	5.00	Pass
-10		462.649890	-0.2378	5.00	Pass
-20		462.649356	-1.3920	5.00	Pass
TN	VL	462.649356	-1.3920	5.00	Pass
	VH	462.649689	-0.6722	5.00	Pass