



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC Part 95

Report Reference No.: **CTL1903118091-WF**

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name.....: Wireless Intercom Doorbell

Model/Type reference: T1810

List Model(s).....: WL-W1T1, LD-T1810, T1810 In door

FCC ID: 2AQQS-T1810

Trade Mark.....: N/A

Applicant's name: **Shenzhen Todakj Co., Ltd.**

Address of applicant: No. 40 Huan Dong Road, Tie Gang, Industrial District, Baoan, Shenzhen, China

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: **FCC Part 95**

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of receipt of test item.....: Mar. 11, 2019

Date of sampling.....: Mar. 11, 2019

Date of Test Date.....: Mar. 11, 2019–Mar. 27, 2019

Data of Issue.....: Mar. 27, 2019

Result.....: **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL1903118091-WF	Mar. 27, 2019 Date of issue
---	--------------------------------

Equipment under Test : Wireless Intercom Doorbell

Model /Type : T1810

Listed Models : WL-W1T1, LD-T1810, T1810 In door

Applicant : **Shenzhen Todakj Co., Ltd.**

Address : No. 40 Huan Dong Road, Tie Gang, Industrial District, Baoan, Shenzhen, China

Manufacturer : **Shenzhen Todakj Co., Ltd.**

Address : No. 40 Huan Dong Road, Tie Gang, Industrial District, Baoan, Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

[illegible]

Table of Contents

Page

1. SUMMARY	
1.1. TEST STANDARDS	
1.2. TEST DESCRIPTION	
1.3. TEST FACILITY	
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	
2. GENERAL INFORMATION	
2.1. ENVIRONMENTAL CONDITIONS	
2.2. GENERAL DESCRIPTION OF EUT	
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	
2.4. MEASUREMENT INSTRUMENTS LIST	
2.5. RELATED SUBMITTAL(S) / GRANT(S)	
2.6. MODIFICATIONS	
3. TEST CONDITIONS AND RESULTS	
3.1. MAXIMUM TRANSMITTER POWER	
3.2. OCCUPIED BANDWIDTH AND EMISSION MASK	
3.3. MODULATION CHARACTERISTIC	
3.4. FREQUENCY STABILITY	
3.5. TRANSMITTER RADIATED SPURIOUS EMISSION	
4. TEST SETUP PHOTOS OF THE EUT	
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 95](#) : PERSONAL RADIO SERVICES

[TIA/EIA 603 D:June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

1.2. Test Description

Description of Test Item	Standard clause	Verdict
Maximum Transmitter Power	FCC Part 95.567	PASS
Modulation Characteristic	FCC Part 2.1047 FCC Part 95.575	PASS
Occupied Bandwidth and Emission Mask	FCC Part 95.573 FCC Part 95.579	PASS
Radiated Spurious Emission	FCC Part 95.579	PASS
Frequency Stability	FCC Part 2.1055 FCC Part 95.565	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9518B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9518B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTL Testing Technology Co., Ltd. is reported

Test Items	Measurement Uncertainty	Notes
Frequency error	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Adjacent and alternate channel power Conducted	1.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Intermodulation attenuation	1.00 dB	(1)

Maximum useable receiver sensitivity	2.80 dB	(1)
Co-channel rejection	2.80 dB	(1)
Adjacent channel selectivity	2.80 dB	(1)
Spurious response rejection	2.80 dB	(1)
Intermodulation response rejection	2.80 dB	(1)
Blocking or desensitization	2.80 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Name of EUT	Wireless Intercom Doorbell
Model Number	T1810
Power Supply	DC 3.70V from battery
Adapter information	Model :JHD-AP006U-050100BB-2 Input : AC 100-240V 50/60Hz 0.2A Output :DC 5V 1000mA
Charger base information	Model :T1810 Input : DC 5V 1000mA Output :DC 4.2V 1000mA
Frequency Range	462.5875MHz-462.7250MHz
Rate Power	0.5W
Modulation Type	F3E
Channel Separation	12.5KHz
Antenna Type	Integral antenna
Antennal Gain	2.0dBi

Note 1: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

Modulation Type	Description
UM	Un-modulation
AM2	Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
AM6	Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB
AM5	Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.

Test item	Modulation Type	Test mode
Output Power(ERP)	UM	TX-FRS
99% Occupied Bandwidth & 26dB bandwidth	AM6	TX-FRS
Emission Mask	AM5	TX-FRS
Modulation Limit	AM6	TX-FRS
Audio Frequency Response	AM2	TX-FRS
Frequency Stability VS Temperature	UM	TX-FRS
Frequency Stability VS Voltage	UM	TX-FRS
Transmit Radiated Spurious Emission	AM5	TX-FRS

Frequency list

Channel	Frequency(MHz)	Type
2	462.5875	FRS
3	462.6125	FRS
22	462.7250	FRS

Note1: In section 15.31(m), regards to the operating frequency range less than 1MHz, only one point centered in the frequency range of operation selected to measure.

Note2: The line display in grey was the channel selected for test.

Note3: This Product only use 3 FRS channels.

2.4. Measurement Instruments List

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2018/05/25	2019/05/24
LISN	R&S	ESH2-Z5	860014/010	2018/05/25	2019/05/24
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2018/05/25	2019/05/24
EMI Test Receiver	R&S	ESCI	1166.5950.03	2018/05/25	2019/05/24
Spectrum Analyzer	Agilent	E4407B	MY41440676	2018/05/25	2019/05/24
Spectrum Analyzer	Agilent	N9020	US46220290	2018/05/25	2019/05/24
Controller	EM Electronics	EM 1000	060859	2018/05/21	2019/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2018/05/25	2019/05/24
Active Loop Antenna	Da Ze	ZN30900A	/	2018/05/25	2019/05/24
Amplifier	Agilent	8449B	3008A02306	2018/05/25	2019/05/24
Amplifier	Agilent	8447D	2944A10176	2018/05/25	2019/05/24
Temperature/Humidity Meter	Gangxing	CTH-608	02	2018/05/25	2019/05/24
High-Pass Filter	micro-tranics	HPM50108	G174	2018/05/25	2019/05/24
High-Pass Filter	micro-tranics	HPM50111	G142	2018/05/25	2019/05/24
Climate Chamber	ESPEC	EL-10KA	A20120523	2018/05/25	2019/05/24
SIGNAL GENERATOR	Wiltron	68347B	657001	2018/05/25	2019/05/24
Radio Communication Tester	HP	8920A	116250	2018/05/25	2019/05/24
Storage Oscilloscope	Tektronix	TDS3054B	B033027	2018/10/11	2019/10/10
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2018/05/17	2019/05/16
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/05/17	2019/05/16
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/05/17	2019/05/16
RF Cable	Megalon	RF-A303	N/A	2018/05/17	2019/05/16

The calibration interval was one year

2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with FCC Part 95 Rules.


2.6. Modifications

No modifications were implemented to meet testing criteria.

3.1. Maximum Transmitter Power

According to FCC Part 95.567:

TEST CONFIGURATION

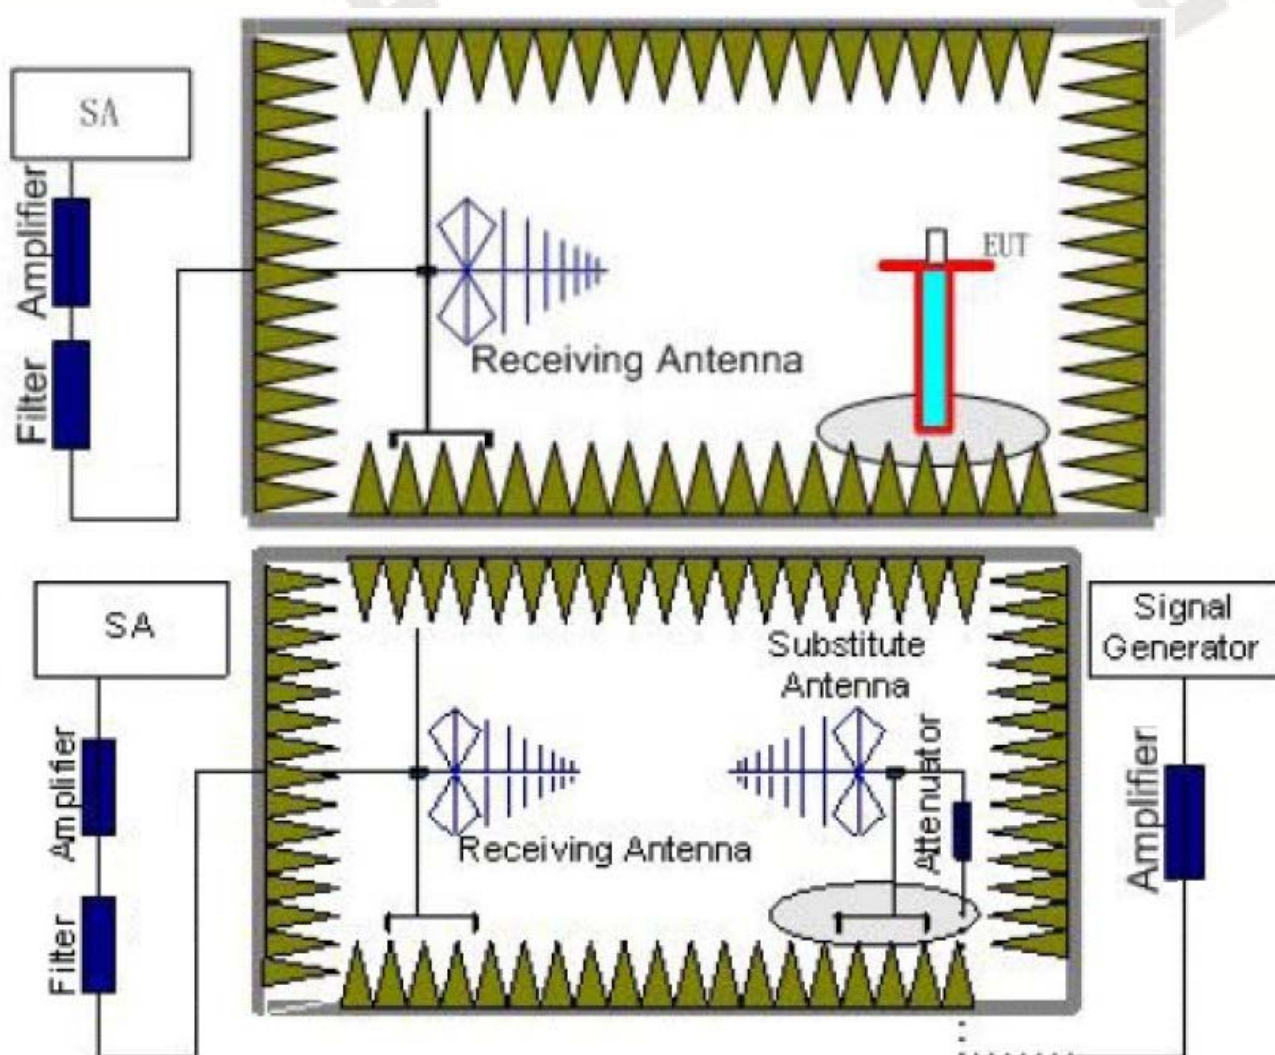

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization.

The radiated emission measurements of all test transmit frequencies were measured with peak detector.

2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier may be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST RESULTS

Remark;

The field strength of radiation emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis was reported.

Test Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dBi)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	ERP (W)	Limit (W)	Polarization
462.6125	-10.98	2.08	7.69	2.15	34.59	27.07	0.51	2	V
	-11.26	2.08	7.69	2.15	34.59	26.79	0.48		H

Remarks

1. $EIRP = P_{Mea}(dBm) + P_{Ag}(dB) - P_{cl}(dB) + G_a(dBi)$

2. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.

3.2. Occupied Bandwidth and Emission Mask

LIMITS

According to FCC 95.573:

Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

According to FCC 95.579:

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.


(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) Measurement bandwidths. The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) Measurement conditions. The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

TEST CONFIGURATION

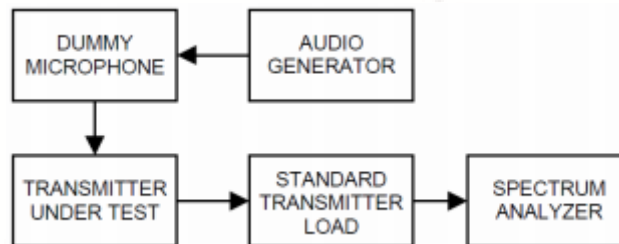


TEST PROCEDURE

- 1 The EUT was modulated by 2.5 KHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing).
- 2 Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 3 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.


TEST RESULTS

Occupied Bandwidth:

Modulation	Channel	99% OBW (kHz)	26dB bandwidth (kHz)	Limit (KHz)	Result
F3E	CH3	7.510	7.883	12.5	Pass

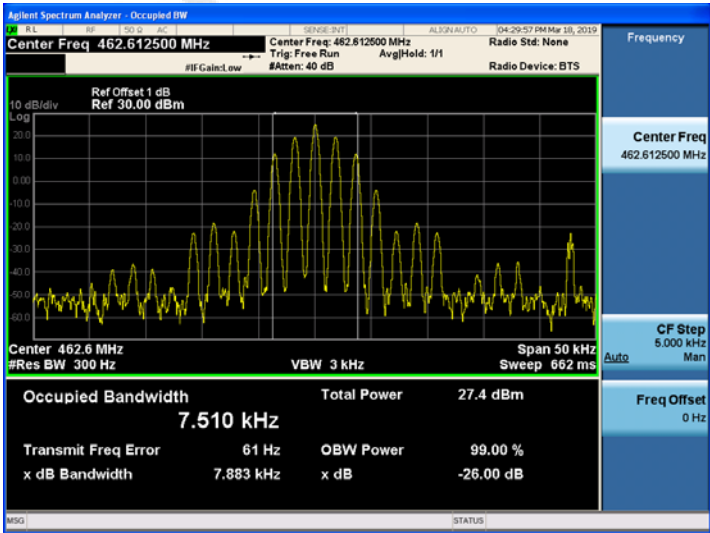

Emission Mask:

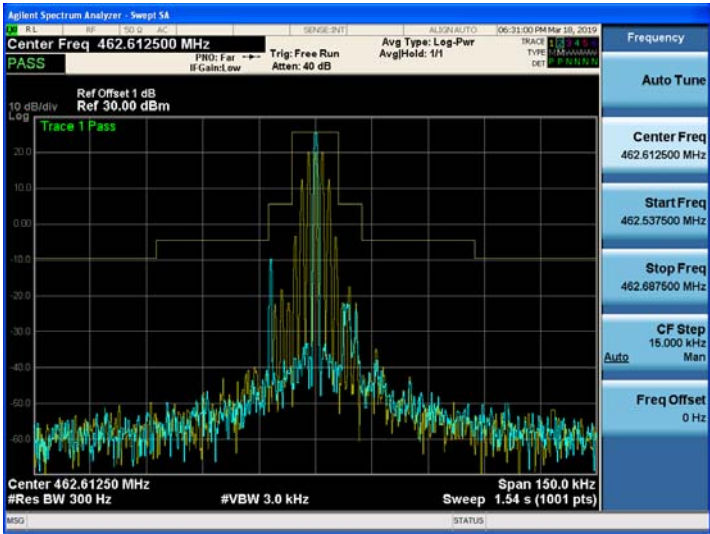

3.3. Modulation Limit

LIMITS


FCC Part 95.575, FCC Part 2.1047(b) Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

TEST PROCEDURE

Modulation Limit


- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4 and vary the input level from -20 to $+20$ dB.
- 5) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 6) Repeat step 4-5 with input frequency changing to 300Hz, 1004Hz, 1500Hz and 2500Hz in sequence

TEST CONFIGURATION

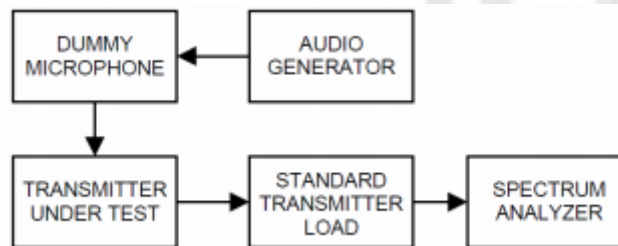

TEST RESULTS


Modulation Level(dB)	Peak Freq. Deviation At 300 Hz(KHz)	Peak Freq. Deviation At 1004 Hz(KHz)	Peak Freq. Deviation At 1500 Hz(KHz)	Peak Freq. Deviation At 2500 Hz(KHz)
-20	0.09	0.19	0.27	0.42
-15	0.10	0.30	0.45	0.67
-10	0.19	0.49	0.75	1.20
-5	0.30	0.85	1.34	1.78
0	0.49	1.51	1.86	1.91
+5	0.73	1.84	1.94	1.90
+10	0.79	1.83	1.95	1.90
+15	0.80	1.85	1.98	1.91
+20	0.86	1.85	1.99	1.91

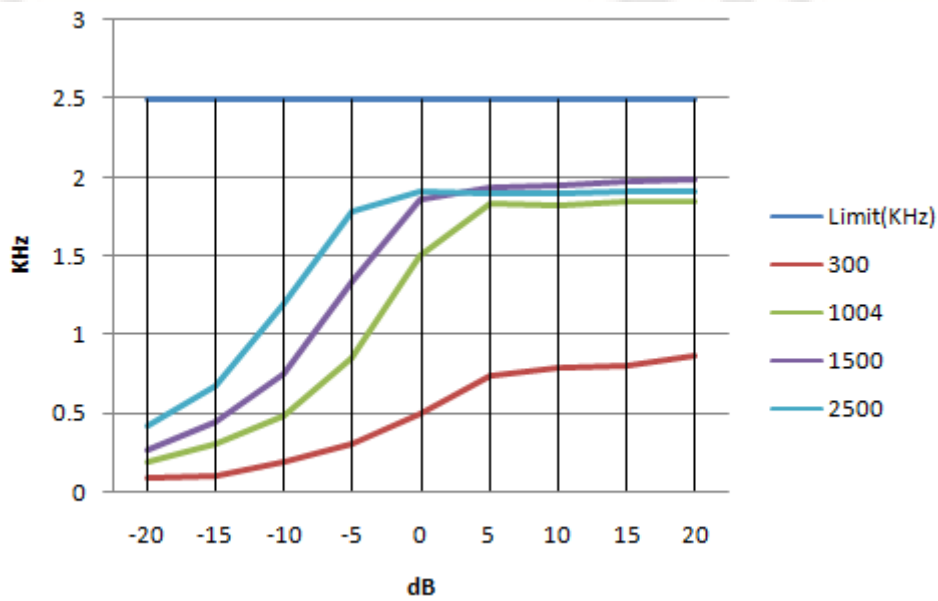


3.4. Audio Frequency Response

LIMIT

FCC Part 95.575), FCC Part 2.1047(a): Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz. Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

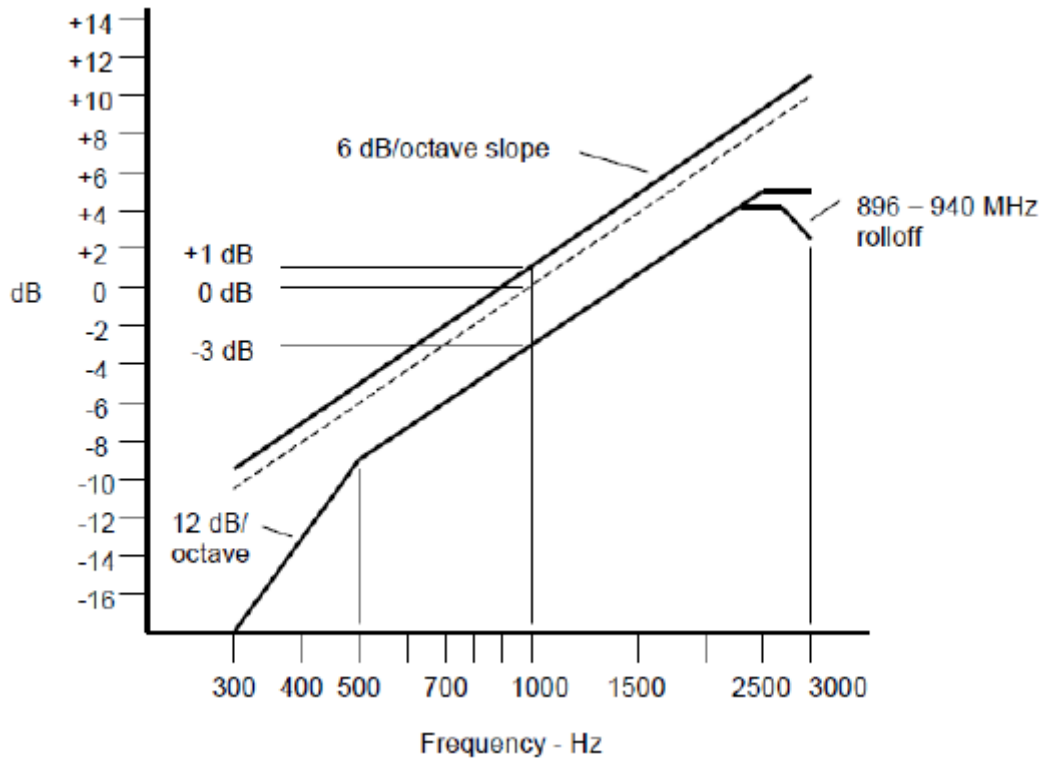


An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

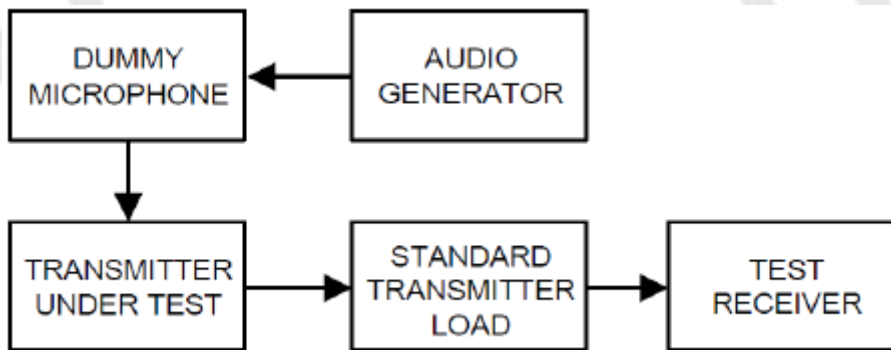TEST CONFIGURATION**TEST PROCEDURE**

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply Input Modulation Signal to EUT according to Section 3.4
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as V_{REF} .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as V_{FREQ}
- 11) Calculate the audio frequency response at the present frequency as: audio frequency response = $20 \log_{10} (V_{FREQ}/V_{REF})$.
- 12) Repeat steps 8) through 11) for all the desired test frequencies

Frequency (KHz)	Frequency Deviation (KHz)	1KHz Reference Deviation (KHz)	Audio Frequency Response (dB)
0.1	0.06	0.52	-18.70
0.2	0.05	0.52	-20.94
0.3	0.09	0.52	-15.11
0.4	0.14	0.52	-11.25
0.5	0.18	0.52	-9.19
0.6	0.27	0.52	-5.40
0.7	0.34	0.52	-3.49
0.8	0.38	0.52	-2.53
0.9	0.40	0.52	-2.14
1.0	0.51	0.52	0.00
1.2	0.59	0.52	1.29
1.4	0.69	0.52	2.62
1.6	0.76	0.52	3.44
1.8	0.91	0.52	5.05
2.0	0.95	0.52	5.41
2.2	1.03	0.52	6.16
2.4	1.16	0.52	7.15
2.6	1.21	0.52	7.52
2.7	1.23	0.52	7.64
2.8	1.36	0.52	8.50
3.0	1.29	0.52	8.09
3.5	0.05	0.52	-20.13
4.0	0.05	0.52	-20.13
4.5	0.05	0.52	-20.13

5.0	0.05	0.52	-20.13
-----	------	------	--------

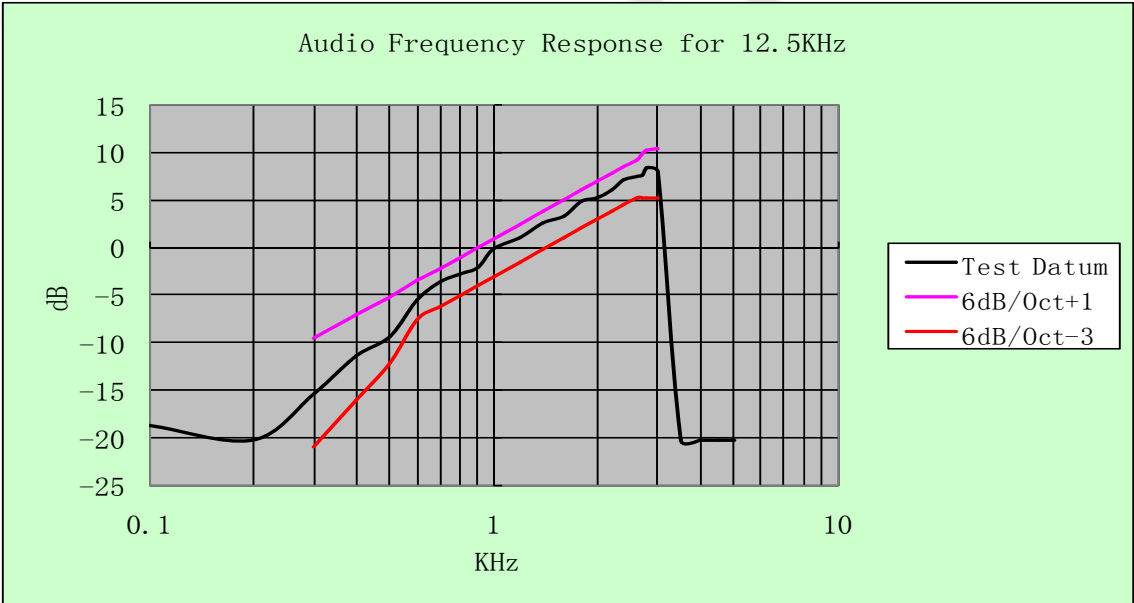


3.5. Frequency Stability

LIMITS

According to FCC 95.565

FCC Part 95.565: Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

TEST CONFIGURATION

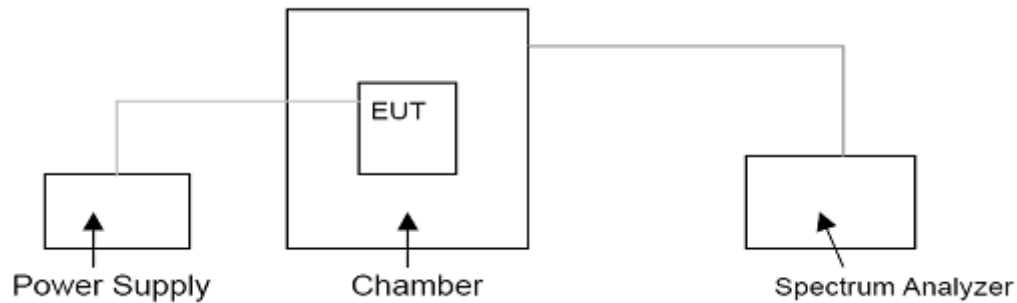

TEST PROCEDURE

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

TEST RESULTS


Reference Frequency: 462.6125MHz					
Voltage (V)	Temperature (°C)	Frequency error (Hz)	Frequency drift (ppm)	Limit (ppm)	Result
3.70	-30	1043	2.25	±2.5	Pass
	-20	984	2.13		
	-10	750	1.62		
	0	694	1.50		
	10	449	0.97		
	20	332	0.72		
	30	420	0.91		
	40	621	1.34		
	50	1036	2.24		
4.26	25	942	2.04	±2.5	Pass
3.15	25	899	1.94		

3.6. Transmitter Radiated Spurious Emission

Limit

The unwanted emission should be attenuated below TP by at least $43+10\log(\text{Transmit Power})$ dB and unwanted emissions falling within the restricted bands of RSS-Gen shall be attenuated to the limits provided in this section or to the general field strength limits shown in RSS-Gen, whichever are less stringent.

TEST CONFIGURATION

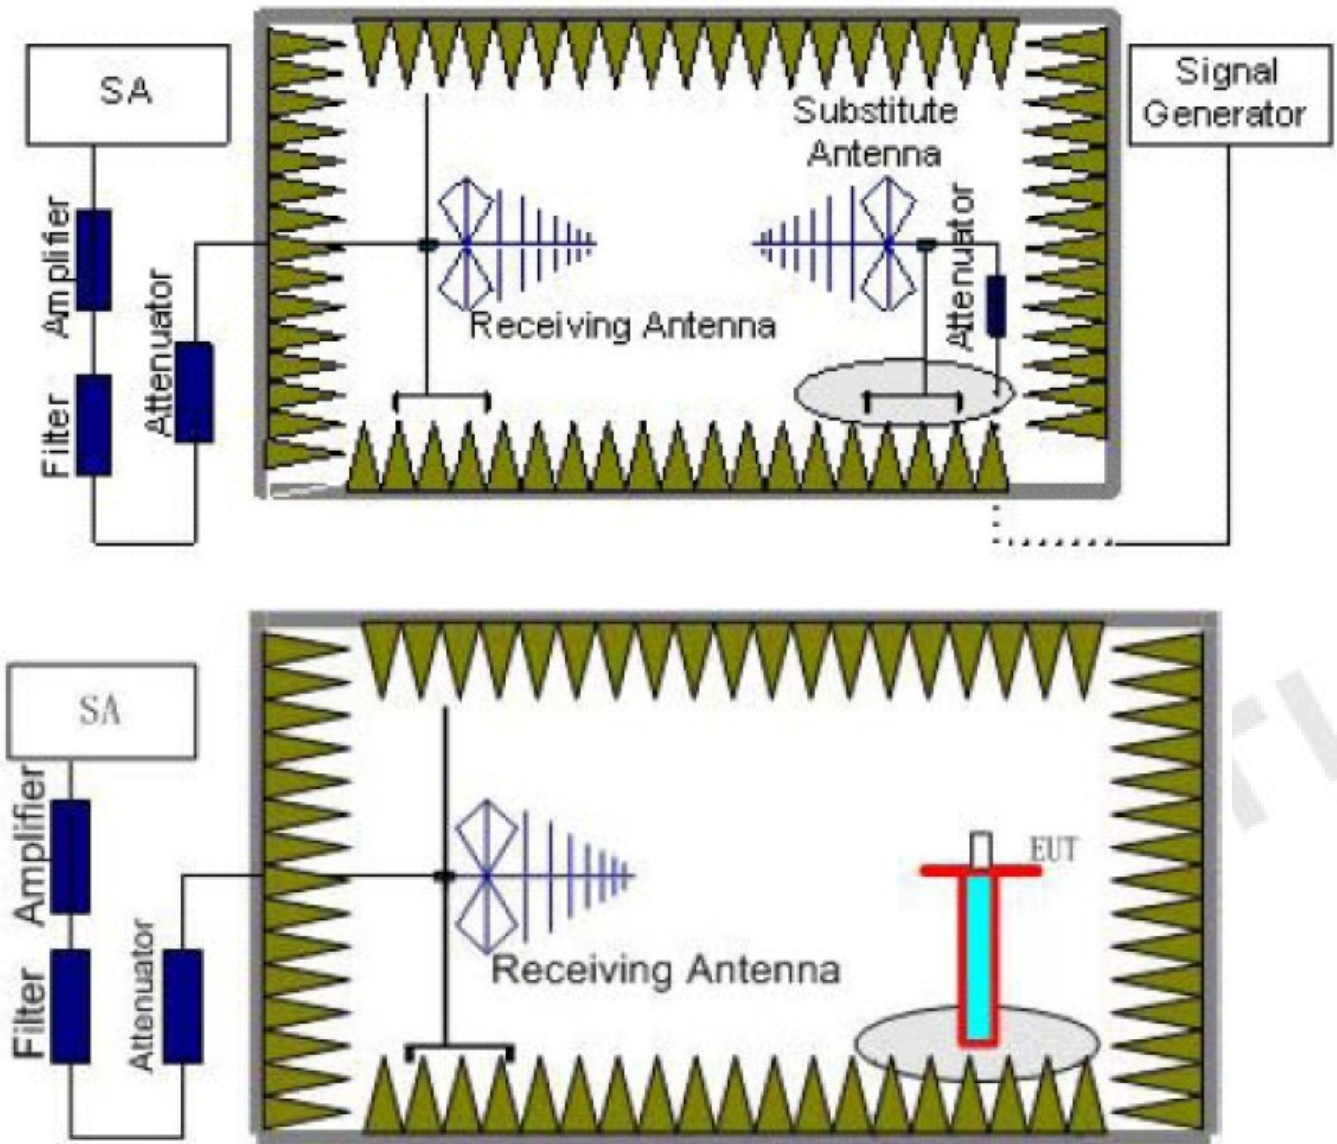

TEST PROCEDURE

- a. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all test transmit frequencies were measured with peak detector.
- b. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- c. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum 100 kHz below 1GHz and 1MHz above 1GHz, Sweep from 30MHz to the 10th harmonic of the fundamental frequency; and recorded the level of the concerned spurious emission point as (P_r).
- d. The EUT then replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization. The measurement results are obtained as described below:

$$\text{Power}_{(EIRP)} = P_{Mea} - P_{cl} + G_a$$


Where;

- P_{Mea} is the recorded signal generator level
 P_{cl} is the cable loss connect between instruments
 G_a Substitution Antenna Gain


- e. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- f. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
- g. Test site anechoic chamber refer to ANSI C63.

TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency; and worst spurious emissions recorded as below:

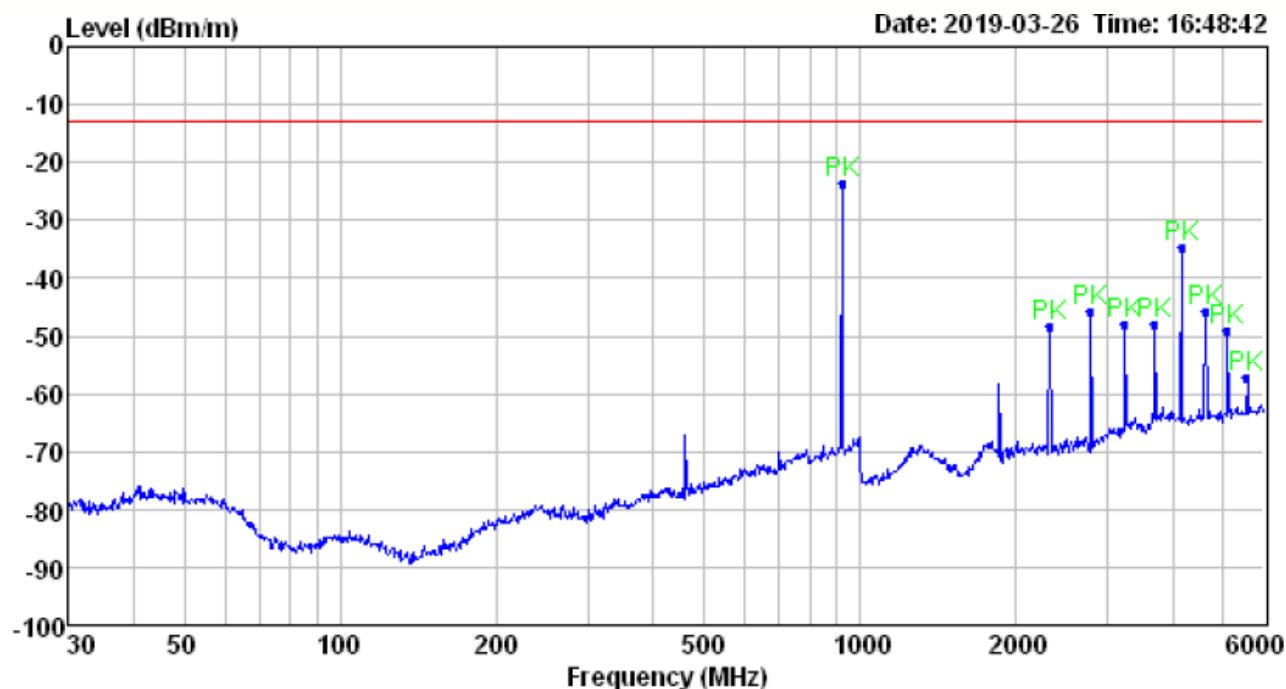


Mark	Frequency MHz	Level dBm	Factor dB	Reading dBm	Limit dB	Margin dB	Det.	Polarization
1	925.76	-23.59	6.66	-30.25	-13.00	10.59	Peak	HORIZONTAL
2	2310.98	-48.16	-3.62	-44.54	-13.00	35.16	Peak	HORIZONTAL
3	2775.82	-45.81	-2.02	-43.79	-13.00	32.81	Peak	HORIZONTAL
4	3239.66	-47.79	0.41	-48.20	-13.00	34.79	Peak	HORIZONTAL
5	3700.35	-47.86	2.38	-50.24	-13.00	34.86	Peak	HORIZONTAL
6	4166.24	-34.85	3.38	-38.23	-13.00	21.85	Peak	HORIZONTAL
7	4632.17	-45.84	4.30	-50.14	-13.00	32.84	Peak	HORIZONTAL
8	5094.97	-48.94	5.75	-54.69	-13.00	35.94	Peak	HORIZONTAL
9	5553.89	-57.02	6.06	-63.08	-13.00	44.02	Peak	HORIZONTAL

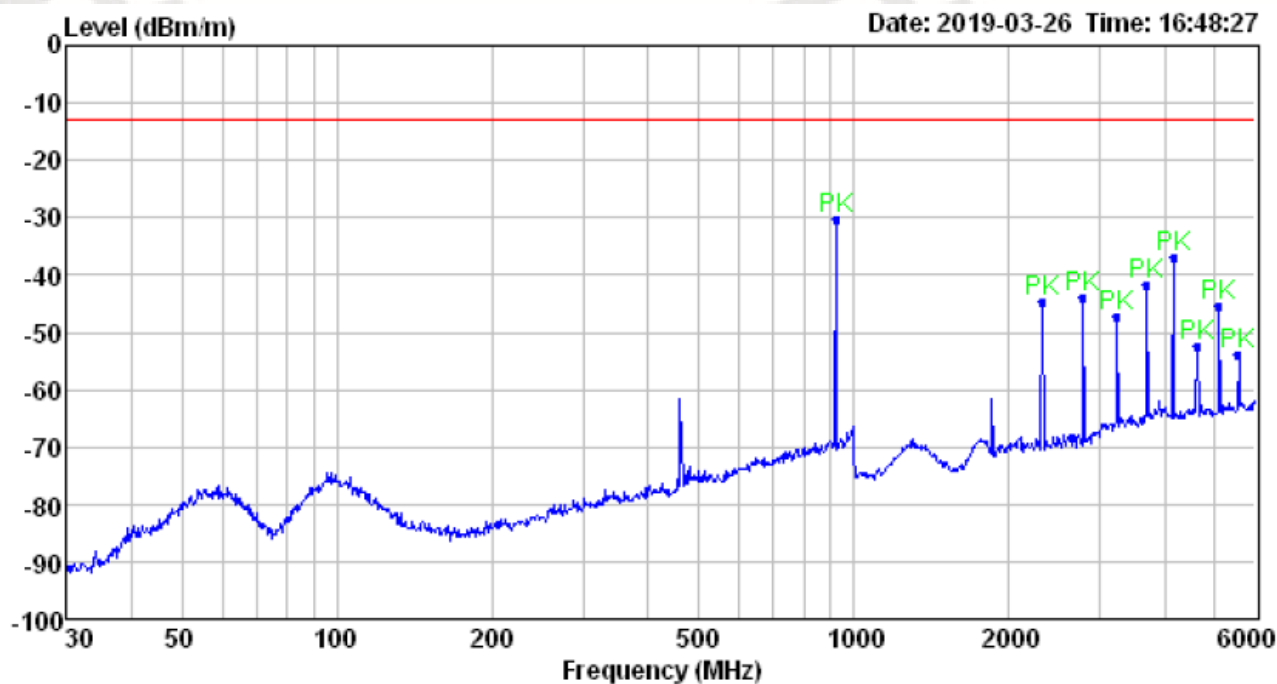

Mark	Frequency MHz	Level dBm	Factor dB	Reading dBm	Limit dB	Margin dB	Det.	Polarization
1	925.76	-30.32	6.52	-36.84	-13.00	17.32	Peak	VERTICAL
2	2310.98	-44.59	-3.62	-40.97	-13.00	31.59	Peak	VERTICAL
3	2775.82	-44.04	-2.02	-42.02	-13.00	31.04	Peak	VERTICAL
4	3239.66	-47.26	0.41	-47.67	-13.00	34.26	Peak	VERTICAL
5	3700.35	-41.74	2.38	-44.12	-13.00	28.74	Peak	VERTICAL
6	4166.24	-36.99	3.38	-40.37	-13.00	23.99	Peak	VERTICAL
7	4632.17	-52.48	4.30	-56.78	-13.00	39.48	Peak	VERTICAL
8	5094.97	-45.27	5.75	-51.02	-13.00	32.27	Peak	VERTICAL
9	5553.89	-54.01	6.06	-60.07	-13.00	41.01	Peak	VERTICAL

4. Test Setup Photos of the EUT

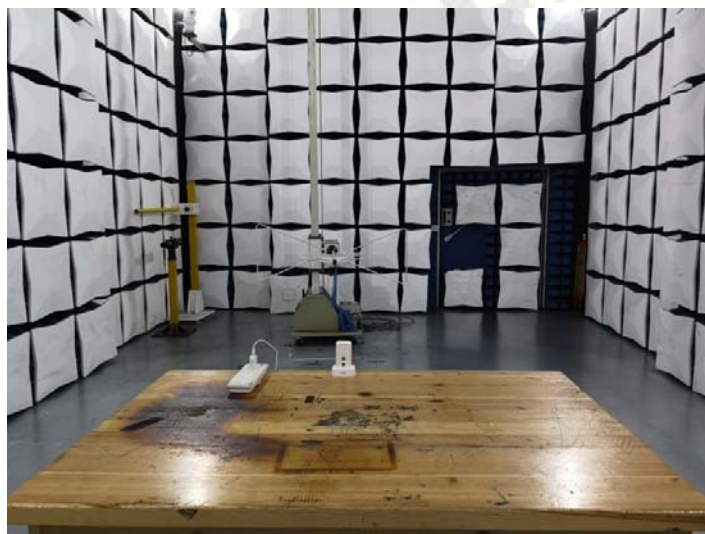

5. External and Internal Photos of the EUT


External Photos of EUT









Internal Photos of EUT

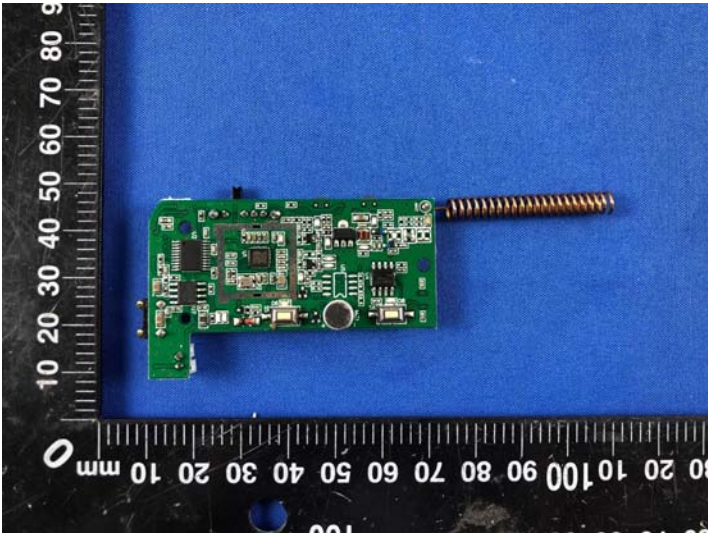

Antenna

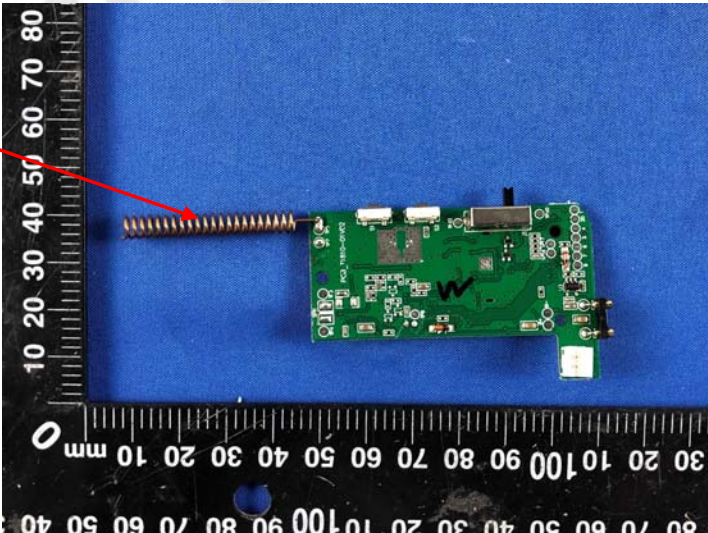

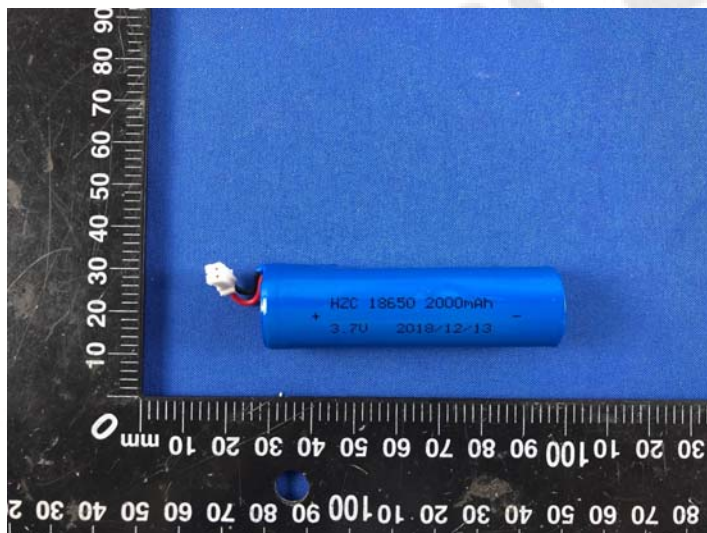

***** End of Report *****