



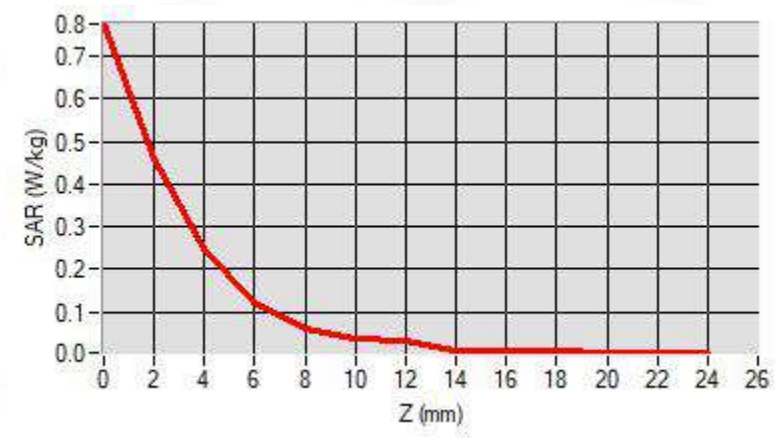

F. 3D Image

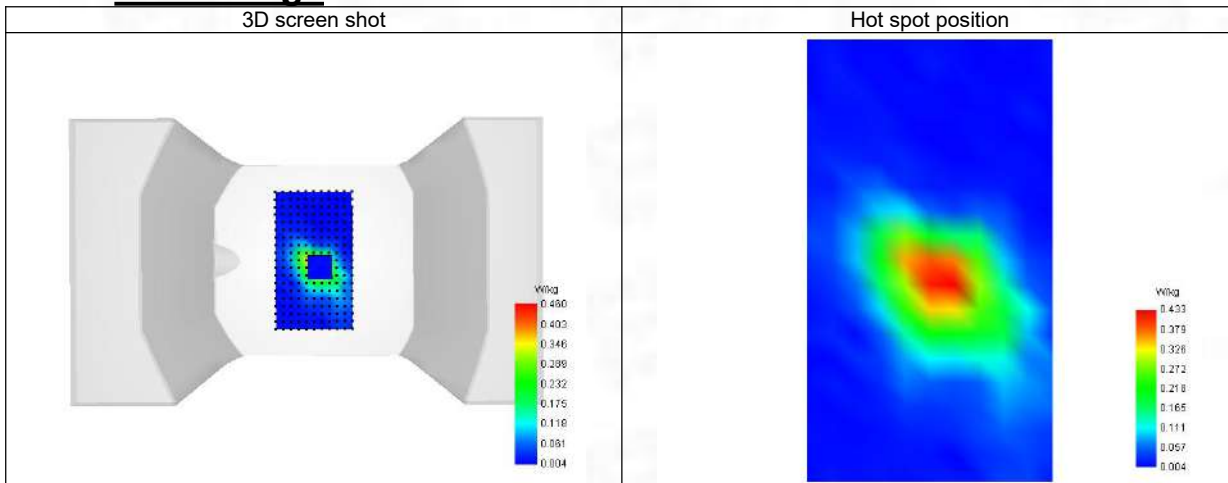

73-Head with front position in dist. 0mm on Channel 39 in Bluetooth

SAR Measurement at Bluetooth (Cheek, Right)

Date of measurement: 14/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Right head
Device Position	Cheek
Band	Bluetooth
Channels/Frequency	Middle (39)/ frequency 2441.000 Mhz
Signal	Bluetooth

B. Permittivity

Middle TX Frequency (MHz)	2441.000
Relative permittivity (real part)	38.759
Relative permittivity (imaginary part)	13.383
Conductivity (S/m)	1.735

C. SAR Surface and Volume

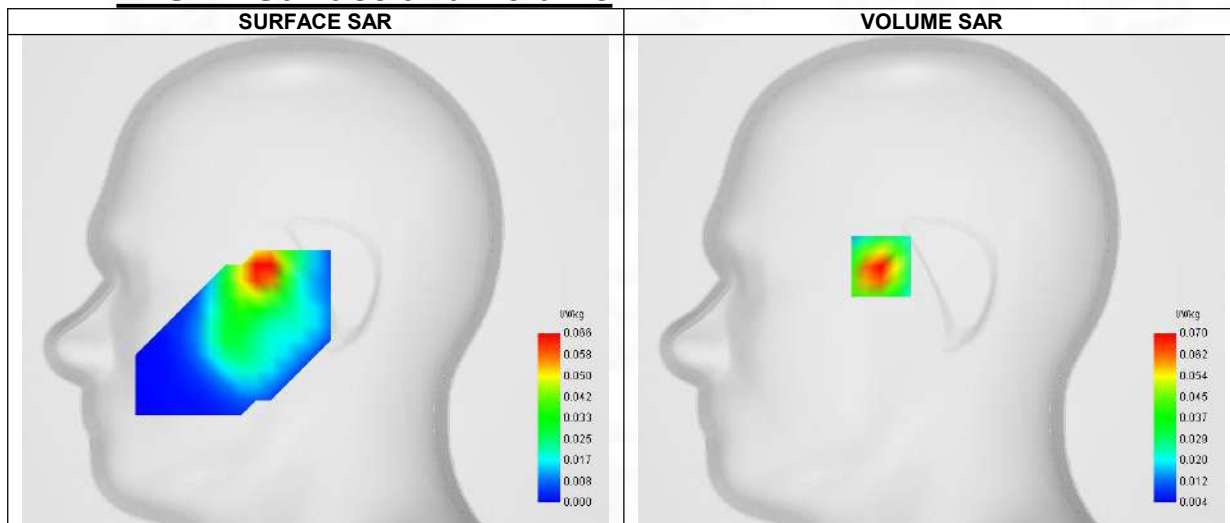


Maximum location: X=-27.00, Y=7.00 ; SAR Peak: 0.10 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.066
Variation (%)	-0.180
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	65.714

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.098	0.070	0.046	0.029	0.019	0.010	0.005

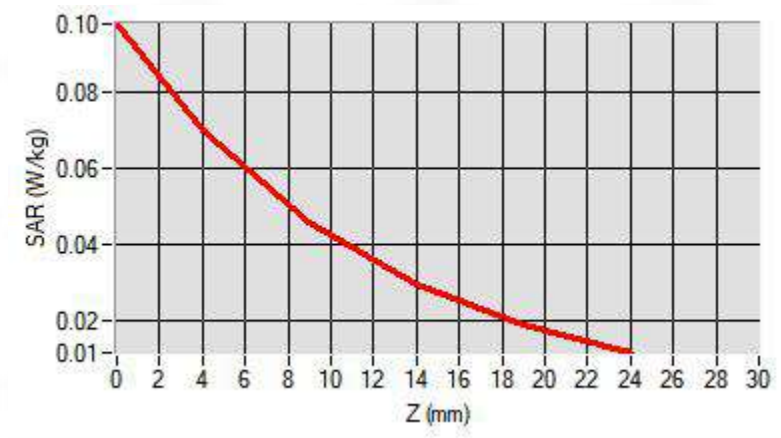

F. 3D Image

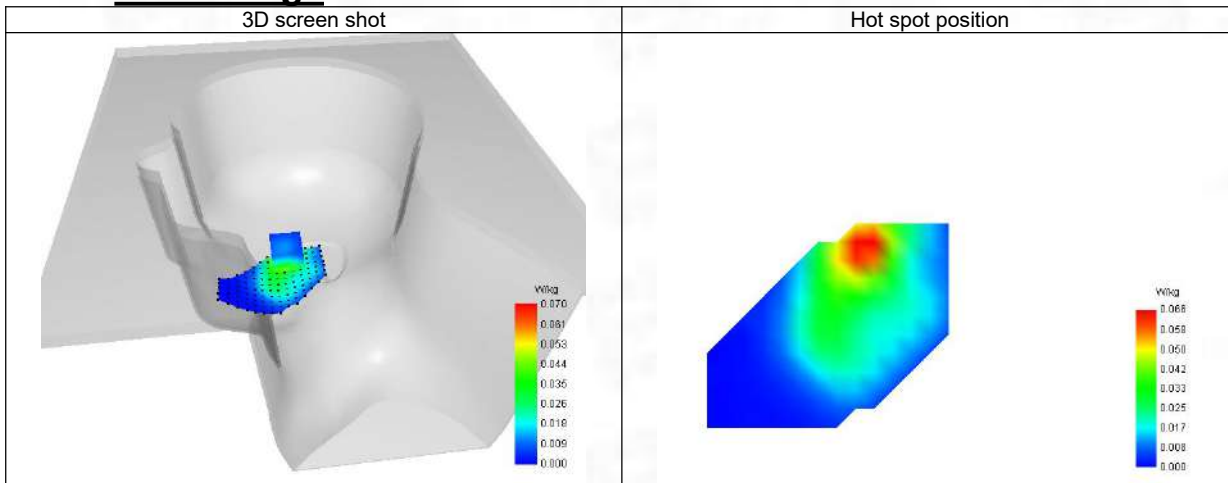

74-Body with back position in dist. 10mm on Channel 39 in Bluetooth

SAR Measurement at Bluetooth (Body, Validation Plane)

Date of measurement: 14/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels/Frequency	Middle (39)/ frequency 2441.000 Mhz
Signal	Bluetooth

B. Permittivity

Middle TX Frequency (MHz)	2441.000
Relative permittivity (real part)	38.759
Relative permittivity (imaginary part)	13.383
Conductivity (S/m)	1.735

C. SAR Surface and Volume

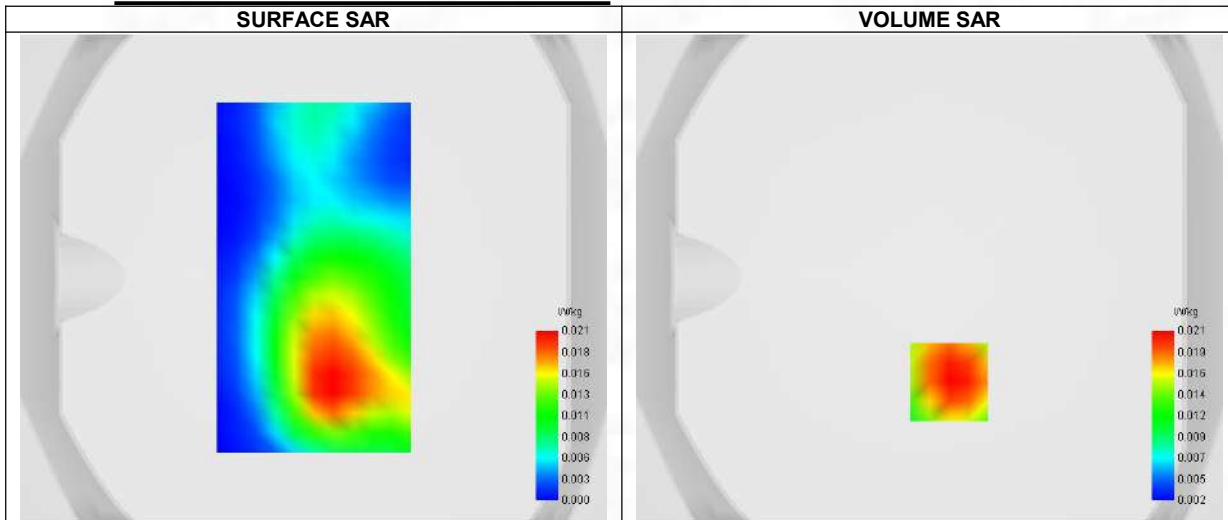


Maximum location: X=8.00, Y=-43.00 ; SAR Peak: 0.03 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.013
SAR 1g (W/Kg)	0.020
Variation (%)	0.540
Horizontal validation criteria: minimum distance (mm)	22.627
Vertical validation criteria: SAR ratio M2/M1 (%)	66.667

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.028	0.021	0.014	0.010	0.007	0.003	0.001

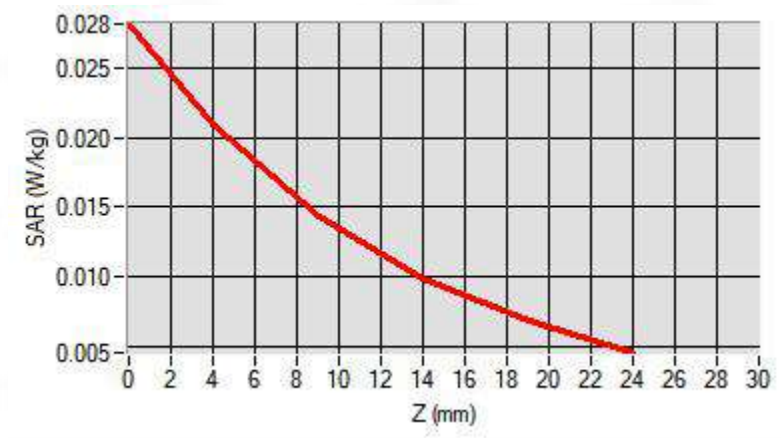

F. 3D Image

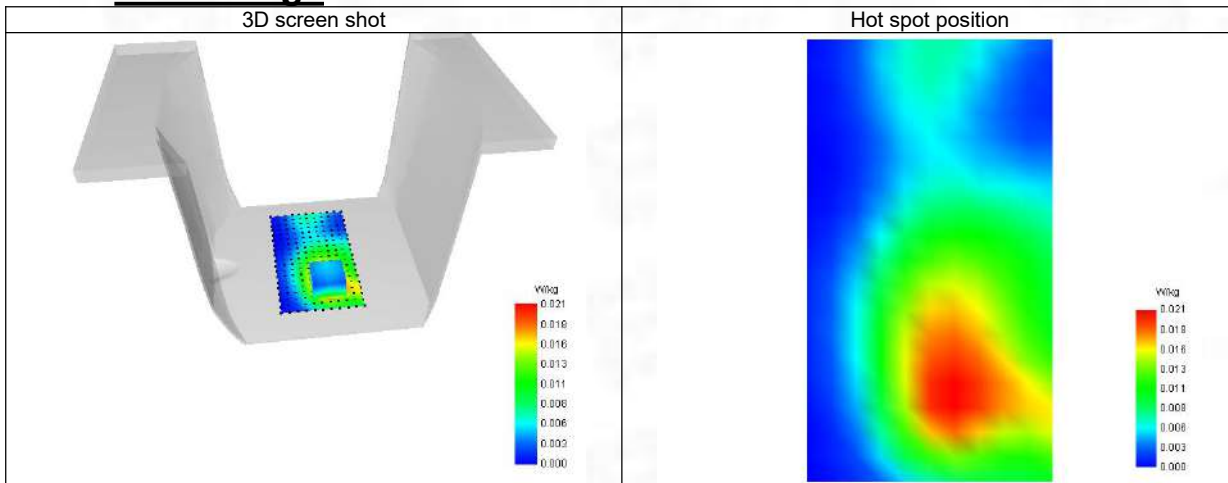

ANNEX D SAR Test Setup Photos


Reference Photo: simulation liquid depth 15.9cm




Reference Photos



Left Head - Cheek

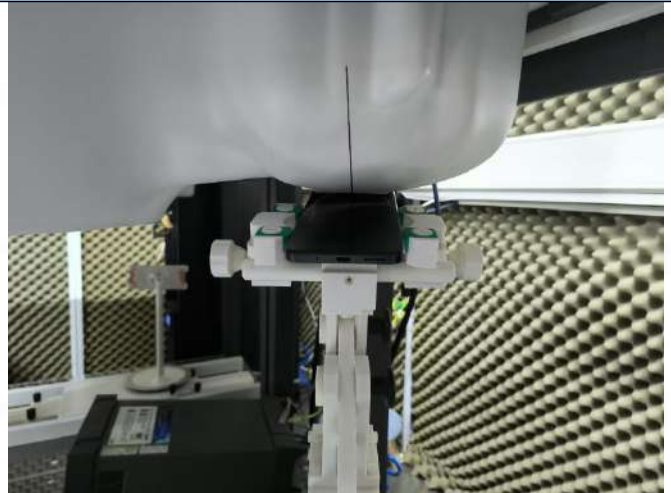


Left Head - Tilt

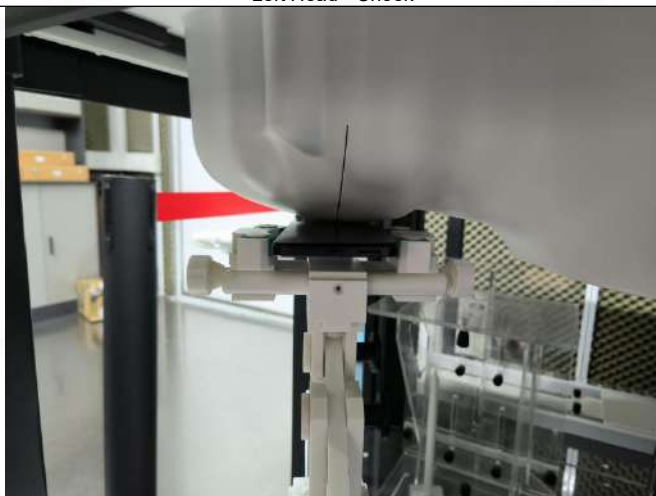


Right Head - Cheek




Right Head - Tilt

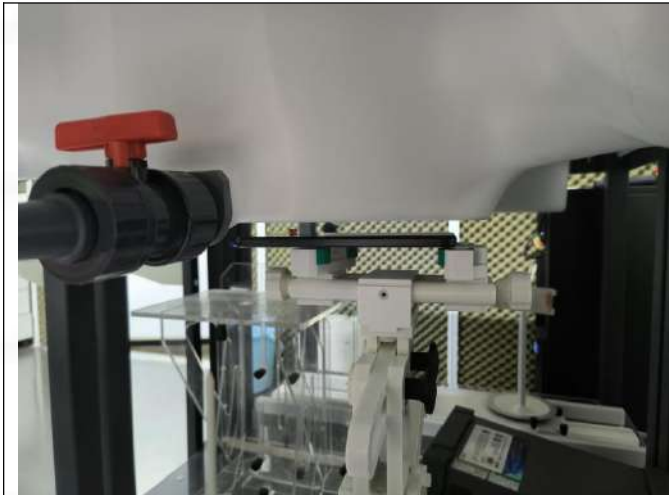


Front (dist. 10mm)

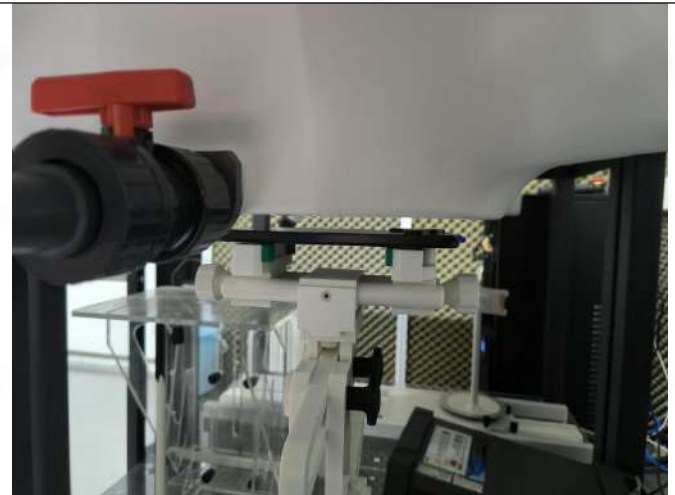

Back (dist. 10mm)

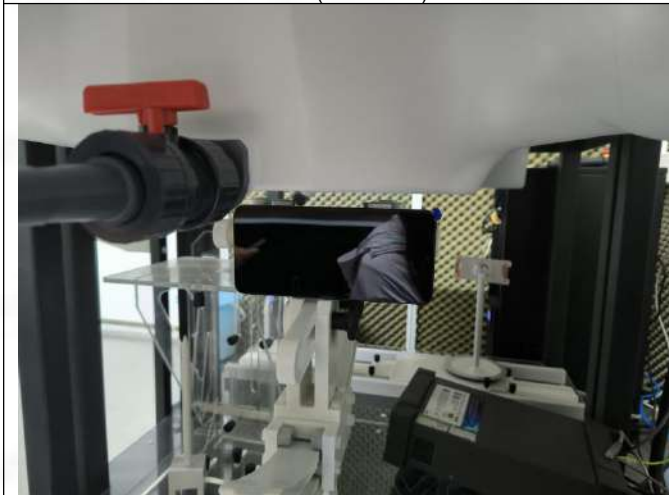

Left (dist. 10mm)

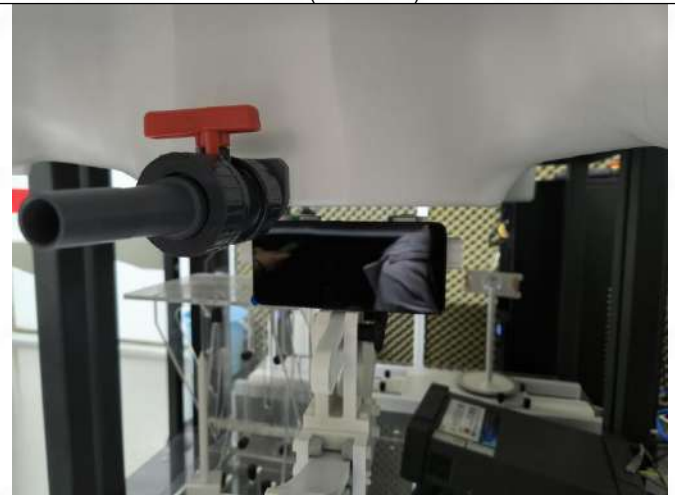

Top (dist. 10mm)



Top (dist. 10mm)



Bottom (dist. 10mm)

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--