


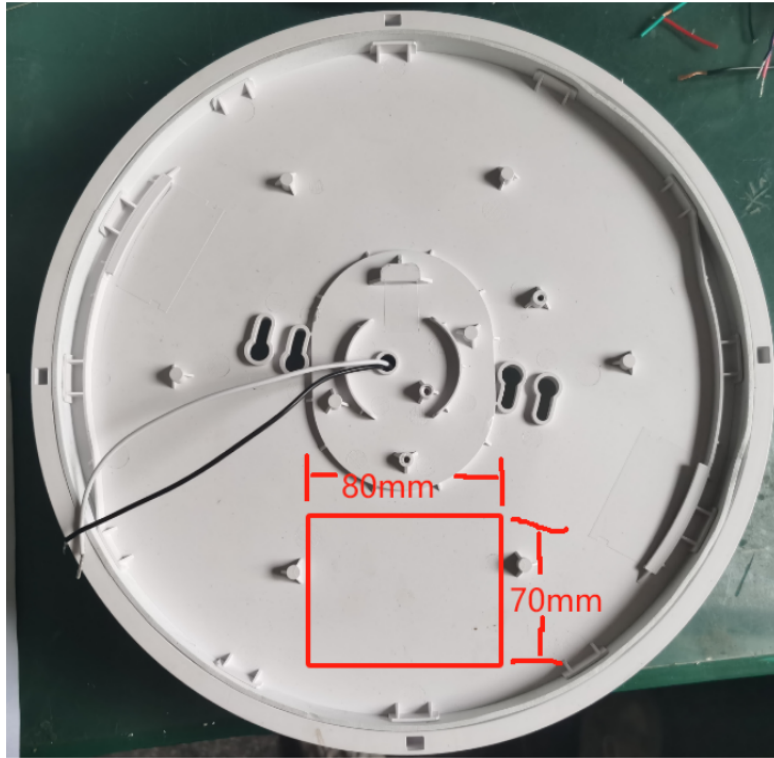

Intertek

5027767
Conforms to
UL Std. 1598
Cert.to CSA Std.
C22.2 No.250.0

LED MOTION SENSOR FLUSH MOUNT WITH FLEXINSTALL 32000342
120Vac 60Hz 170mA 15W 90CRI 1080LUMENS Non-dimmable JA8-2022
2700K/3000K/3500K/4000K/5000K Globe Electric Company Inc.
FCCID: 2AQUQGB32342 IC: 8290A-GB32342 BZT3525

CAN ICES (B) / NMB (B) Made in Thailand/Produit de Thaïlande

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION:-TYPE IC-INHERENTLY PROTECTED-AIR TIGHT-SUITABLE FOR WET LOCATIONS

-ACCESS ABOVE CEILING REQUIRED-VAPOR BARRIER MUST BE SUITABLE FOR 90 °C

-BLINKING LIGHT OF THIS THERMALLY PROTECTED LUMINAIRE MAY INDICATE OVERHEATING-FOR USE IN NON-FIRE-RATED INSTALLATIONS ONLY-COVERED CEILING MOUNT ONLY

ATTENTION:- TYPE IC-PROTECTION INHÉRENTE-HERMÉTIQUE

-CONVIENT AUX EMPLACEMENTS MOUILLÉS-ACCÈS REQUIS AU-DESSUS DU PLAFOND-LE PARE-VAPEUR DOIT CONVENIR POUR 90°C-SI L'AMPOULE DE CE LUMINAIRE À PROTECTION THERMIQUE CLIGNOTE, CELA PEUT SIGNIFIER UNE SURCHAUFFE-UTILISER SEULEMENT DANS DES INSTALLATIONS OÙ LE DEGRÉ DE RÉSISTANCE AU FEU N'EST PAS ÉTABLI

-INSTALLATION SUR PLAFOND COUVERT SEULEMENT