

Test Report

Applicant : Globe Electric Company Inc.
Address : 150 Oneida, Montreal, Quebec, Canada, H9R 1A8
Product Name : Remote
Brand Mark : Globe
Model : GE31462
FCC ID : 2AQUQGE31462
Series model : N/A
Report Number : BLA-EMC-202605-A7401
Date of Receipt : May 22, 2026
Date of Test : May 22, 2026 to May 26, 2026
Test Standard : 47 CFR Part 15, Subpart C 15.231
Test Result : Pass

Compiled by: Mark Chen

Review by: Xavier

Approved by:

Blue Zheng

Issued Date: Jun. 09, 2026



BlueAsia Technical Services(Shenzhen) Co.,Ltd.

Address: No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	4
1.1 General information	4
1.2 General description of EUT	4
2 Test summary	5
3 Test Configuration	6
3.1 Test mode	6
3.2 Test channel	6
3.3 Auxiliary equipment	7
3.4 Test environment	7
4 Laboratory information	8
4.1 Laboratory and accreditations	8
4.2 Measurement uncertainty	8
5 Test equipment	9
6 Test result	11
6.1 Antenna requirement	11
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	12
6.3 Field strength of the fundamental signal	14
6.4 20dB bandwidth	19
6.5 Dwell time	21
6.6 Radiated spurious emissions	23
7 Appendix A photographs of test setup	30
8 Appendix B: photographs of EUT	31

Revise Record

Version No.	Date	Description
01	Jun. 09, 2026	Original

1 General information

1.1 General information

Applicant	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
Manufacturer	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
Factory	Globe Electric Company Inc.
Address	150 Oneida, Montreal, Quebec, Canada, H9R 1A8

1.2 General description of EUT

Product Name	Remote
Model No.	GE31462
Operation Frequency	433.92MHz
Modulation Type	OOK
Channel numbers	1
Antenna Type	PCB antenna
Antenna Gain	3dBi(Provided by customer)
Power supply	Battery DC 3.0V
Test Voltage	DC 3.0V
Hardware Version	N/A
Software Version	N/A

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC Part Section(s)	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.2	N/A
3	Field strength of the fundamental signal	§15.231(b)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.5	Pass
4	20dB Bandwidth	§15.215(c)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.9	Pass
5	Dwell time	§15.231(a)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 7.8.4	Pass
6	Spurious emissions	§15.209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.4,6.5,6.6	Pass

N/A: Not applicable, The product is powered by DC 3.0V Battery.

3 Test Configuration

3.1 Test mode

Test Mode	Description
TX	Normal Working ,operate according to the user manual

3.2 Test channel

Channel	Frequency
01	433.92MHz

3.3 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
/	/	/	/	/
Note: “--” mean no any auxiliary device during testing.				

3.4 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 3.0V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia Technical Services(Shenzhen) Co., Ltd.
Address:	No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
A2LA Cert. No.:	5071.01
FCC Registration Number:	923526
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
IC Registration Number:	24243
CNAS accredited No.:	L9788
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2025/06/09	2026/06/08
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2025/11/12	2026/11/11
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2025/08/05	2026/08/04
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA2018043003	2025/08/05	2026/08/04
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2025/06/09	2026/06/08
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2025/06/09	2026/06/08
BLA-EMC-066	Amplifier	LNPA_30M01G-30	SKET	SK2021060801	2025/06/09	2026/06/08
BLA-EMC-086	Amplifier	LNPA_18G40G-50dB	SKET	SK2022071301	2025/06/09	2026/06/08
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2025/11/12	2026/11/11
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2025/06/09	2026/06/08
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2025/08/05	2026/08/04
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2025/08/05	2026/08/04
BLA-EMC-044	Radio communication	CMW500	R&S	132429	2025/08/05	2026/08/04

	tester					
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY581088 92	2025/06/09	2026/06/08
BLA-EMC-079	Spectrum	N9020A	Agilent	MY544201 61	2025/08/05	2026/08/04
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS14109 4	2025/06/09	2026/06/08

Test Software Record:

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement


Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is PCB antenna. The best case gain of the antenna is 3dBi.

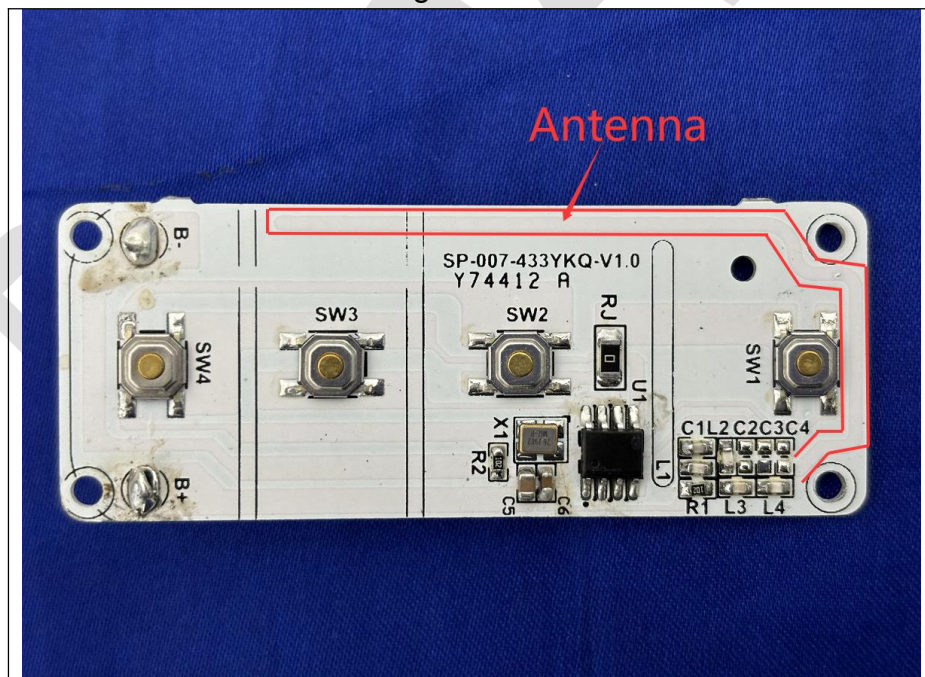

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.207
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

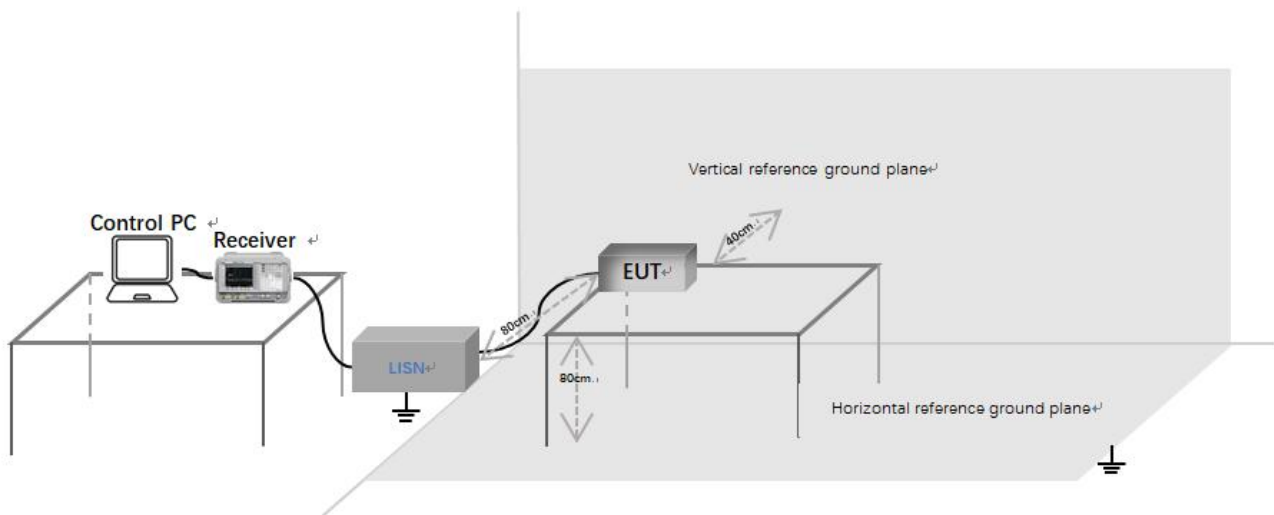

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.

6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

6.2.4 Test data

N/A: Not applicable.

6.3 Field strength of the fundamental signal

Test Standard	47 CFR Part 15, Subpart C 15.231(b)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.3.1 Limit

Fundamental frequency(MHz)	Field strength of fundamental(microvolts/meter)	Field strength of spurious emissions(microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750	125 to 375
174-260	3750	375
260-470	3750 to 12500	375 to 1250
Above 470	12500	1250


Remark: the emission limit is based on measurement instrumentation employing an average detector at a distance of 3 meters. The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.3.2 Test setup


Below 1GHz:

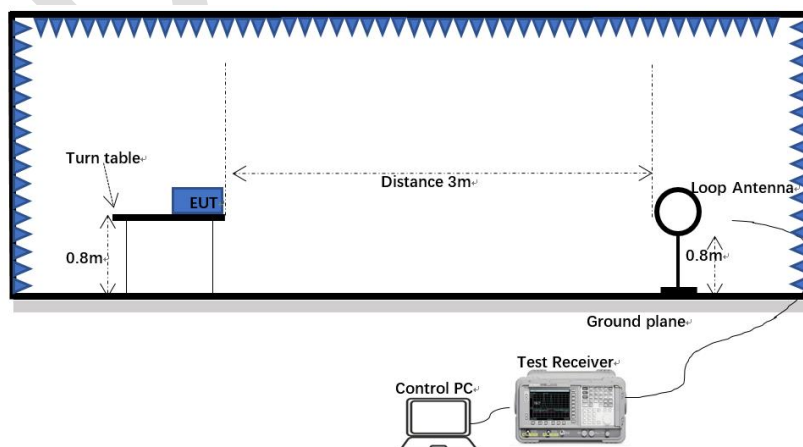

30MHz-1GHz:

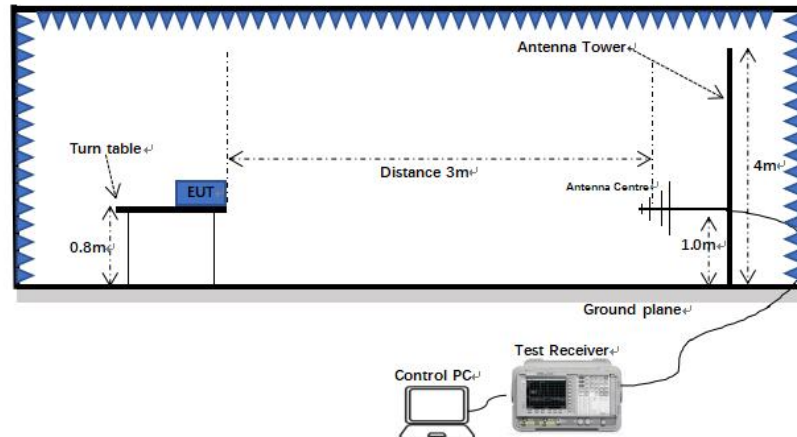

Above 1GHz:

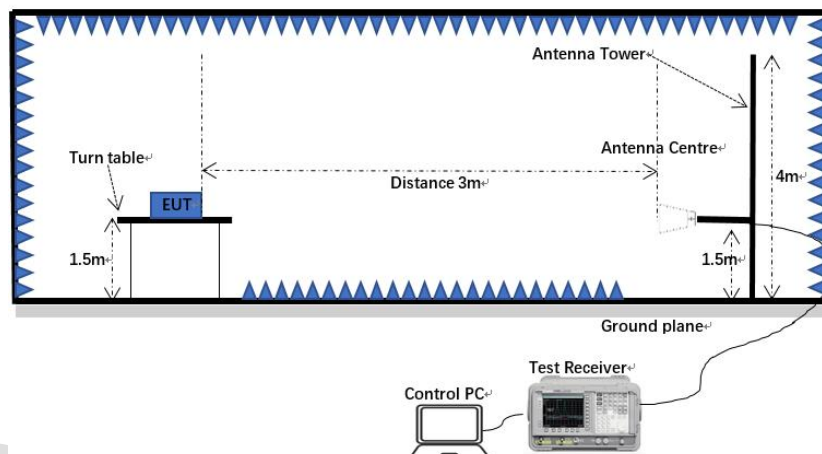

6.3.3 Procedure

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum

reading.

- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
- i) Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


6.3.4 Test data


Peak value						
Frequency (MHz)	Read Level (dBuV)	Correct Facor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	80.49	-15.41	65.08	100.83	-35.75	Horizontoal
433.92	76.13	-15.41	60.72	100.83	-40.11	Vertical
Average value						
Frequency (MHz)	Peak value	Duty cycle factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	65.08	-8.264	56.816	80.83	-24.014	Horizontoal
433.92	60.72	-8.264	52.456	80.83	-28.374	Vertical
Calculate Formula:	Average value = Peak value + Duty Cycle Factor					
	Duty cycle factor = $20\log(\text{Duty cycle})$					
	Duty cycle = on time/ period					
Test data:	T on time = $0.3 \times 16 + 0.9 \times 9 = 12.90(\text{ms})$					
	T period = $33.40(\text{ms})$					
	Duty cycle = 38.62%					
	Duty cycle factor = $20\log(\text{Duty cycle}) = -8.264$					

Test plot as follows:

Time slot:

The pulse train length (<100 ms)

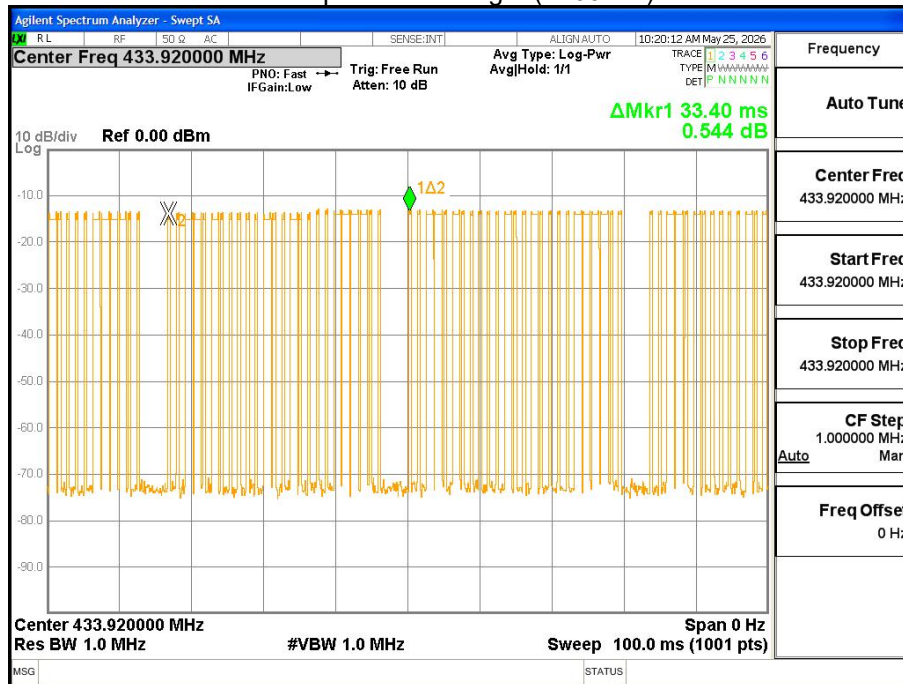

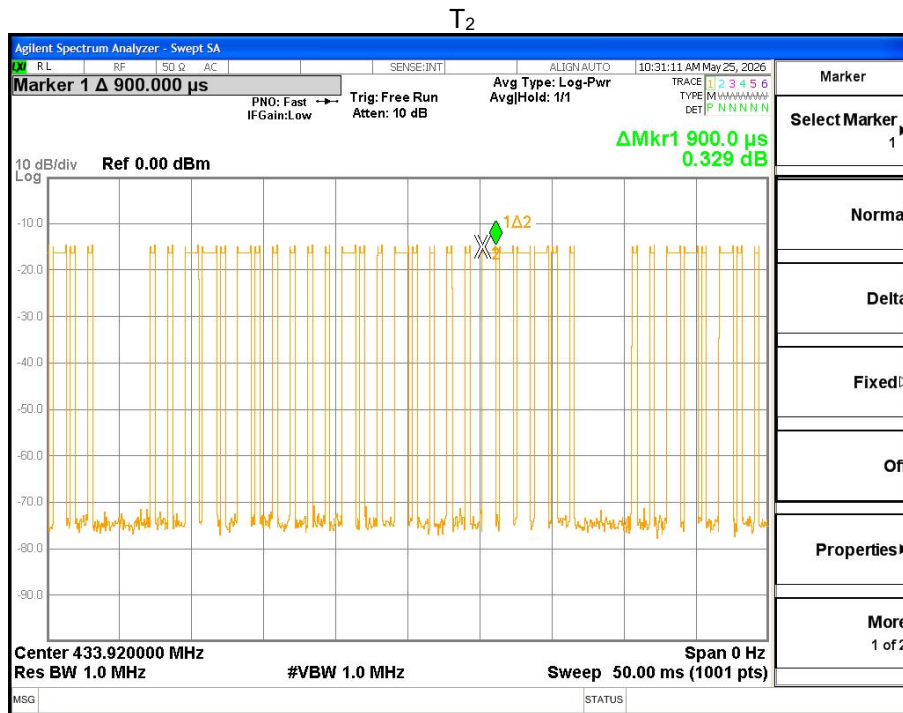

T_1 (ms)	T_2 (ms)	T on time (ms)	T period (ms)	Duty cycle %
0.30	0.90	12.90	33.40	38.62

Note: $T_{on\ time} = T_1 \cdot 16 + T_2 \cdot 9 = 0.3 \cdot 16 + 0.9 \cdot 9 = 12.90$ (ms)

Duty cycle = $T_{on\ time} / T_{period}$


6.4 20dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.231(c)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit

Frequency range(MHz)	Limit
70-900	No wider than 0.25% of the center frequency
Above 900	No wider than 0.5% of the center frequency

6.4.2 Test setup

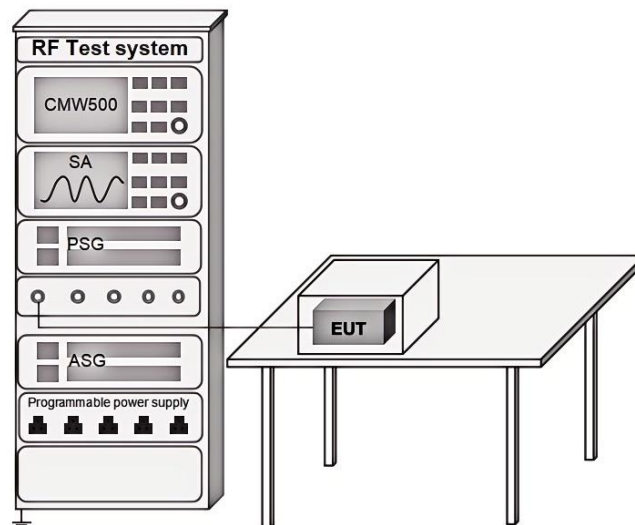


6.4.3 Test data

20dB bandwidth (MHz)	Limit (MHz)	Results
0.05179	1.0848	Pass

Note: Limit= Center frequency $\times$ 0.25%=433.92 $\times$ 0.25%=1.0848MHz

Test plot as follows:

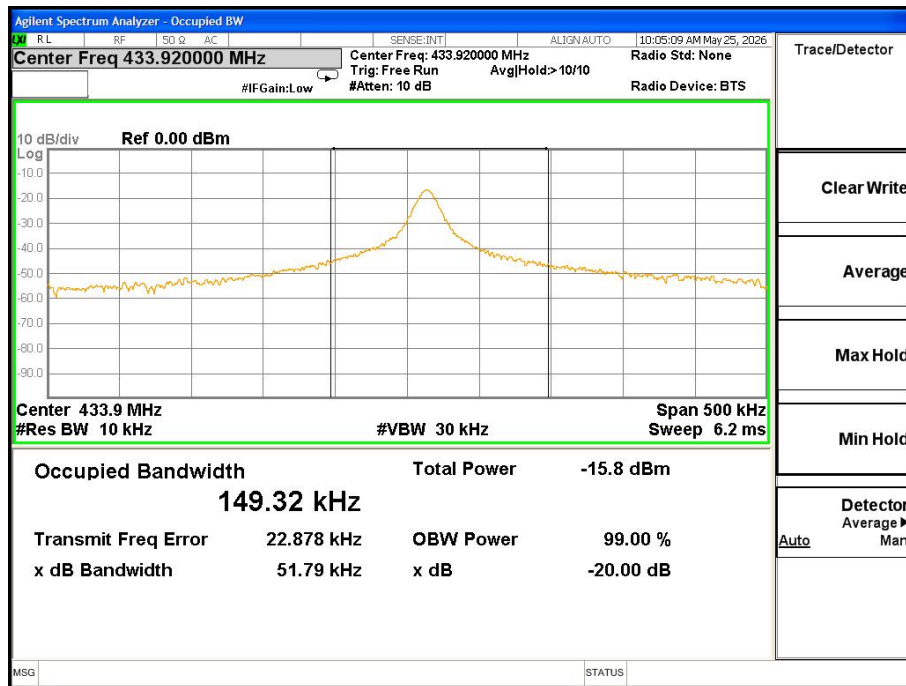


6.5 Dwell time

Test Standard	47 CFR Part 15, Subpart C 15.231(a)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 7.8.4
Test Mode (Pre-Scan)	Normal Working
Test Mode (Final Test)	Normal Working

6.5.1 Limit

Device type	Limit
Manually operated transmitter	The switch automatically deactivate the transmitter within not more than 5 seconds of being released
Automatically active transmitter	Cease transmission within 5 seconds after activation
Periodic transmissions to determine system integrity of transmitters used in security or safety applications	The total transmission time does not exceed 2 seconds per hour


6.5.2 Test setup

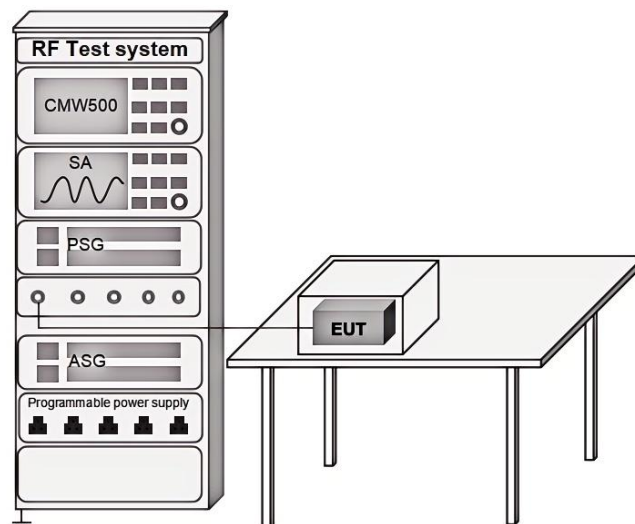

6.5.3 Test data

Duration time (second)	Limit (second)	Result
0.30	<5.0	Pass

Test plot as follows:

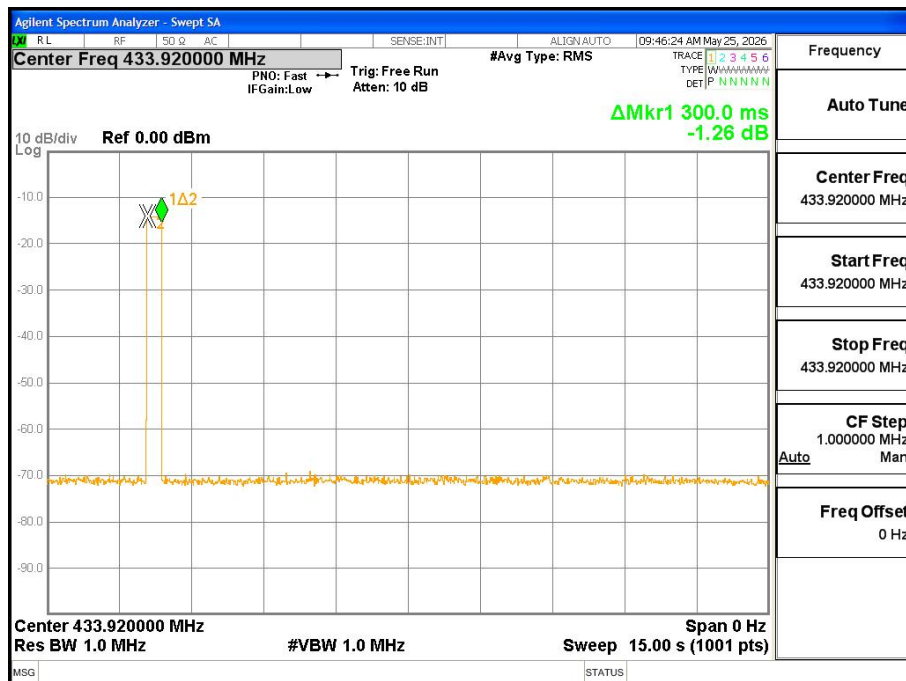

6.6 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.209
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

(Field strength of the fundamental signal)


Frequency	Limit (dBuV/m @3m)	Remark
433.92 MHz	80.83	Average Value
	100.83	Peak Value

(Field strength of spurious emission)


Limit (dBuV/m @3m)	Remark
60.83	Average Value /quasi-peak Value
80.83	Peak Value

6.6.2 Test setup


Below 1GHz:

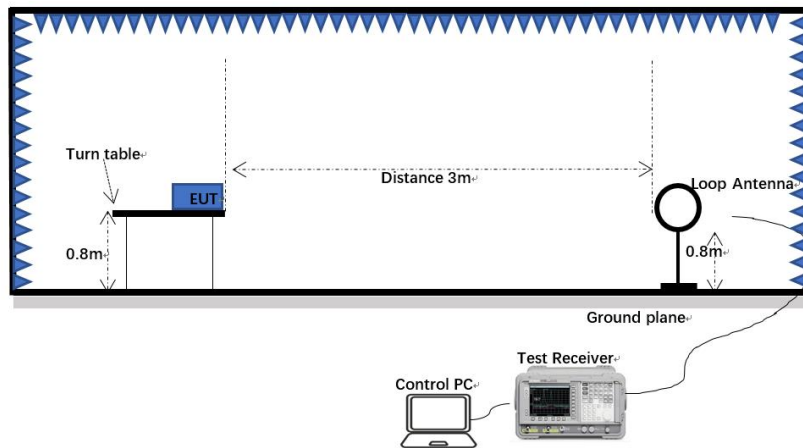

30MHz-1GHz:

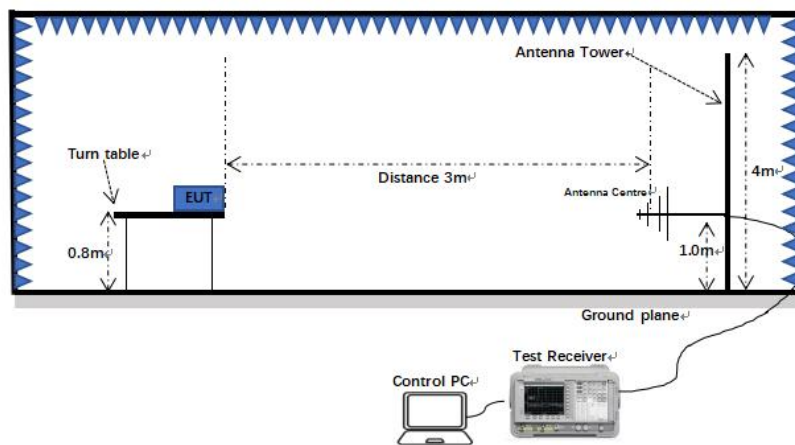

Above 1GHz:

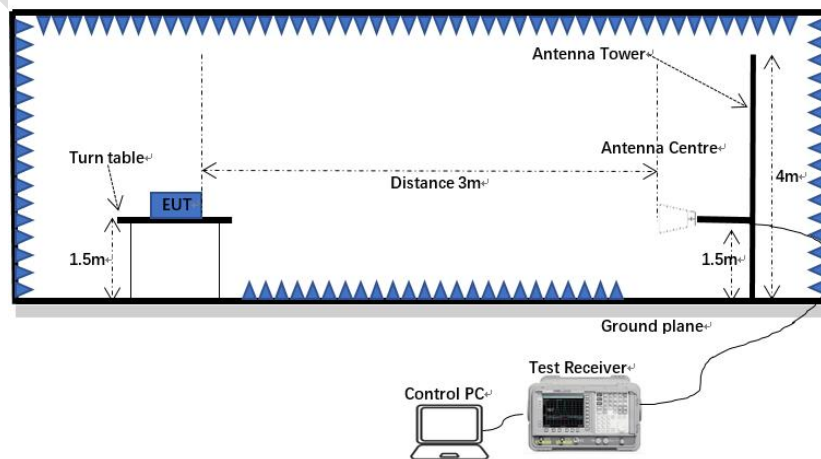

6.6.3 Procedure

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Remark:

1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$


3) Scan from 9 kHz to 5GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.6.4 Test data

Below 1GHz


[Test mode: TX]; [Polarity: Horizontal]

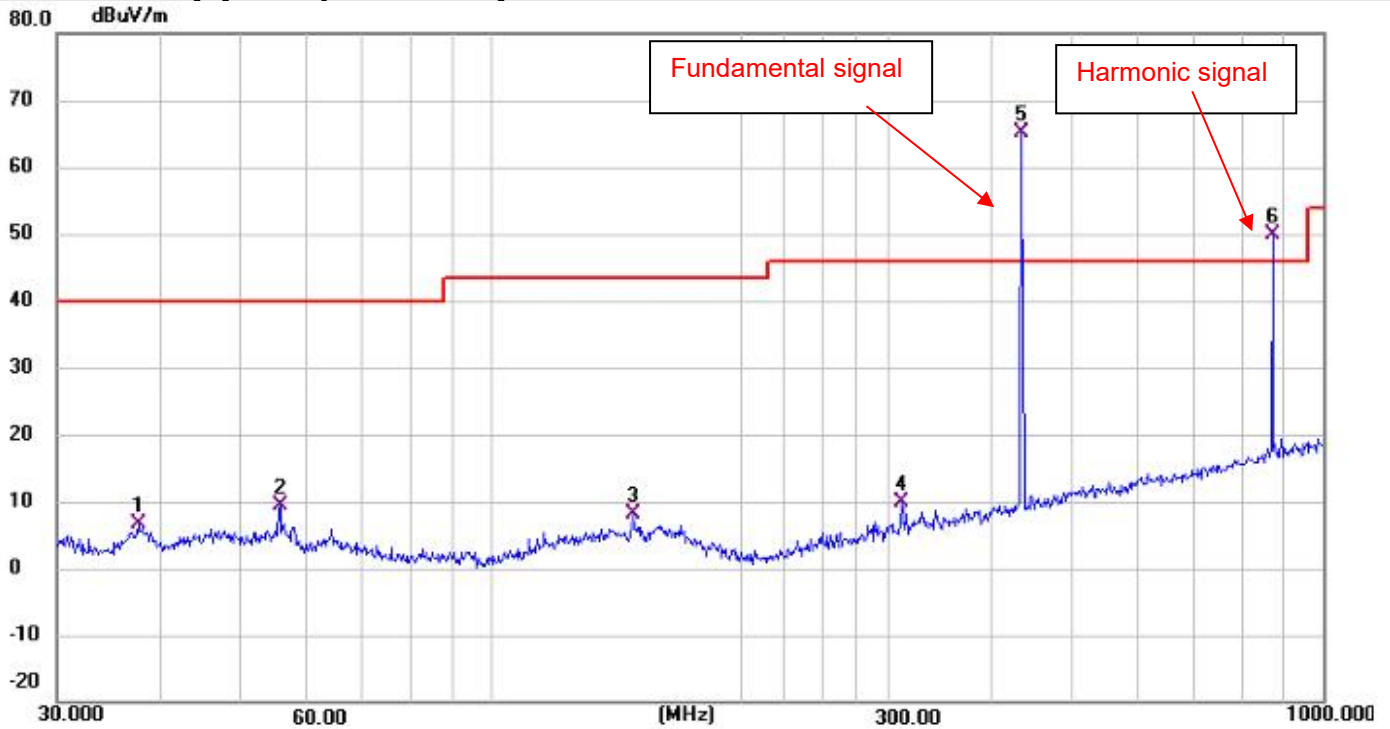

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.5478	25.95	-19.30	6.65	40.00	-33.35	QP
2	55.6093	28.45	-19.17	9.28	40.00	-30.72	QP
3	147.9214	26.38	-18.15	8.23	43.50	-35.27	QP
4	311.0866	28.49	-18.57	9.92	46.00	-36.08	QP
5 *	434.0650	80.49	-15.41	65.08	80.83	-15.75	QP
6 X	869.1302	56.96	-6.97	49.99	60.83	-10.84	QP

Test Result: Pass

[Test mode: TX]; [Polarity: Vertical]

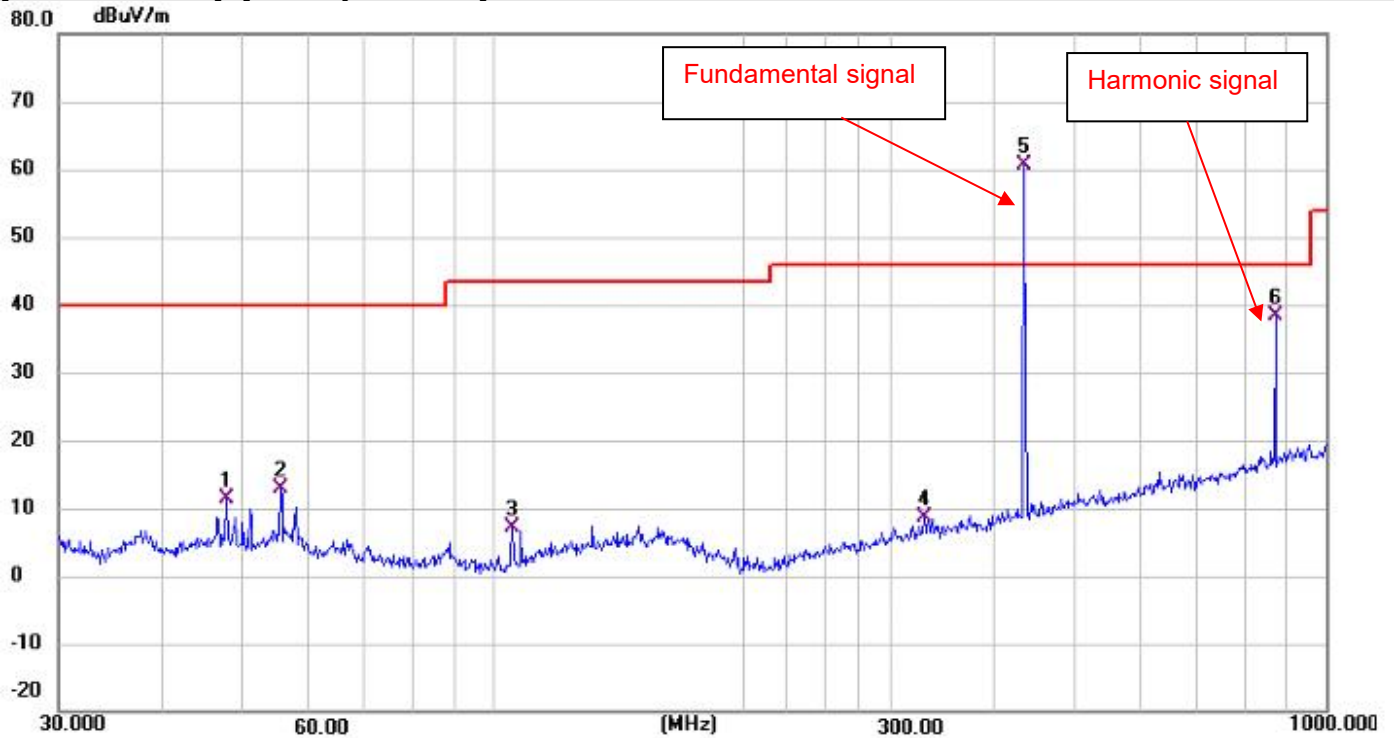

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.6586	30.30	-18.85	11.45	40.00	-28.55	QP
2	55.4147	32.02	-19.13	12.89	40.00	-27.11	QP
3	105.2718	29.35	-22.14	7.21	43.50	-36.29	QP
4	329.0390	26.25	-17.66	8.59	46.00	-37.41	QP
5 *	434.0651	76.13	-15.41	60.72	80.83	-20.11	QP
6	869.1302	45.24	-6.97	38.27	60.83	-22.56	QP

Test Result: Pass

Above 1GHz:

Calculate Formula:	Average value = Peak value + Duty Cycle Factor
	Duty cycle factor = $20\log(\text{Duty cycle})$
	Duty cycle = on time/ period
Test data:	T on time = $0.3 \times 16 + 0.9 \times 9 = 12.90(\text{ms})$
	T period = $33.40(\text{ms})$
	Duty cycle = 38.62%
	Duty cycle factor = $20\log(\text{Duty cycle}) = -8.264$

Horizontal:

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1301.76	-12.63	70.02	57.39	80.83	-23.440	PASS	Horizontal	PK
		--	--	49.126	60.83	-11.704	PASS	Horizontal	AV
2	2169.60	-10.11	64.37	54.26	80.83	-26.570	PASS	Horizontal	PK
		--	--	45.996	60.83	-14.834	PASS	Horizontal	AV
3	3037.44	-7.42	68.55	61.13	80.83	-19.700	PASS	Horizontal	PK
		--	--	52.866	60.83	-7.964	PASS	Horizontal	AV

Vertical:

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1301.76	-12.63	71.35	58.72	80.83	-22.110	PASS	Vertical	PK
		--	--	50.456	60.83	-10.374	PASS	Vertical	AV
2	3037.44	-7.42	62.47	55.05	80.83	-25.780	PASS	Vertical	PK
		--	--	46.786	60.83	-14.044	PASS	Vertical	AV
3	3471.36	-5.66	57.90	52.24	80.83	-28.590	PASS	Vertical	PK
		--	--	43.976	60.83	-16.854	PASS	Vertical	AV

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- Scan from 9kHz to 5GHz, the disturbance below 30MHz was very low, and the above harmonics were the highest


point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) Average value=Peak value + Duty Cycle Factor


BlueAsia

7 Appendix A photographs of test setup

Radiated Emissions (30MHz-1GHz)

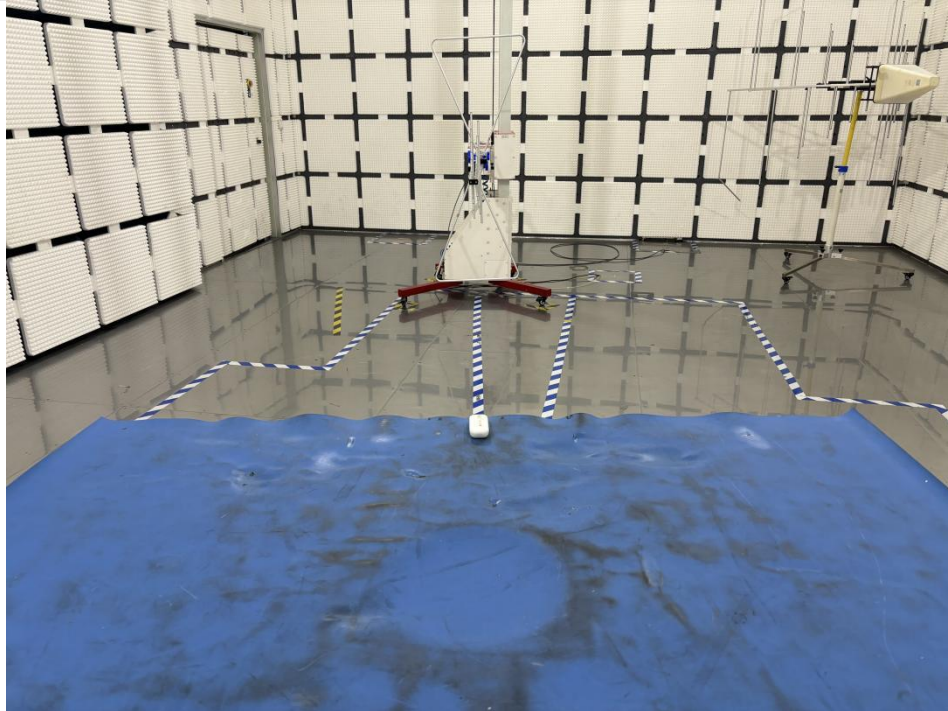

Radiated Emissions (above 1GHz)

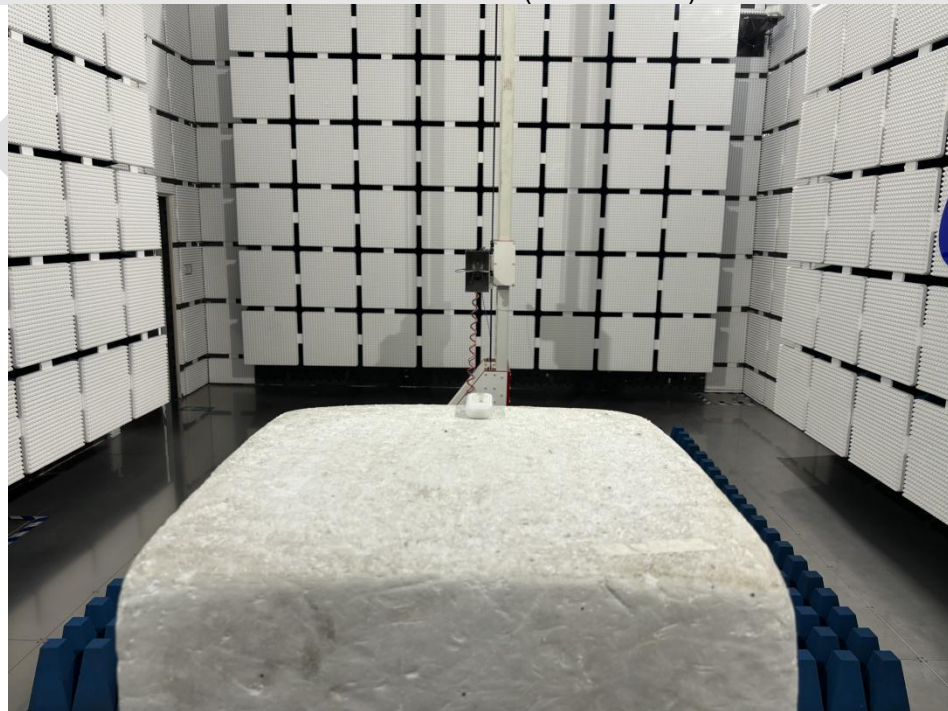

8 Appendix B: photographs of EUT



View of Product-1



View of Product-2



View of Product-3



View of Product-4



View of Product-5



View of Product-6



View of Product-7



View of Product-8




View of Product-9




View of Product-10




View of Product-11

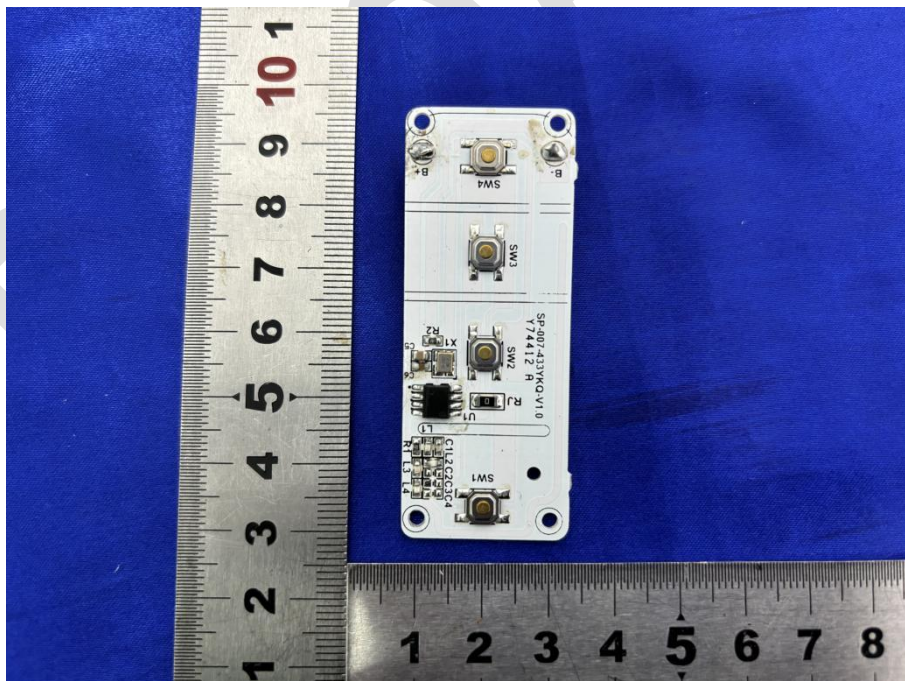

View of Product-12

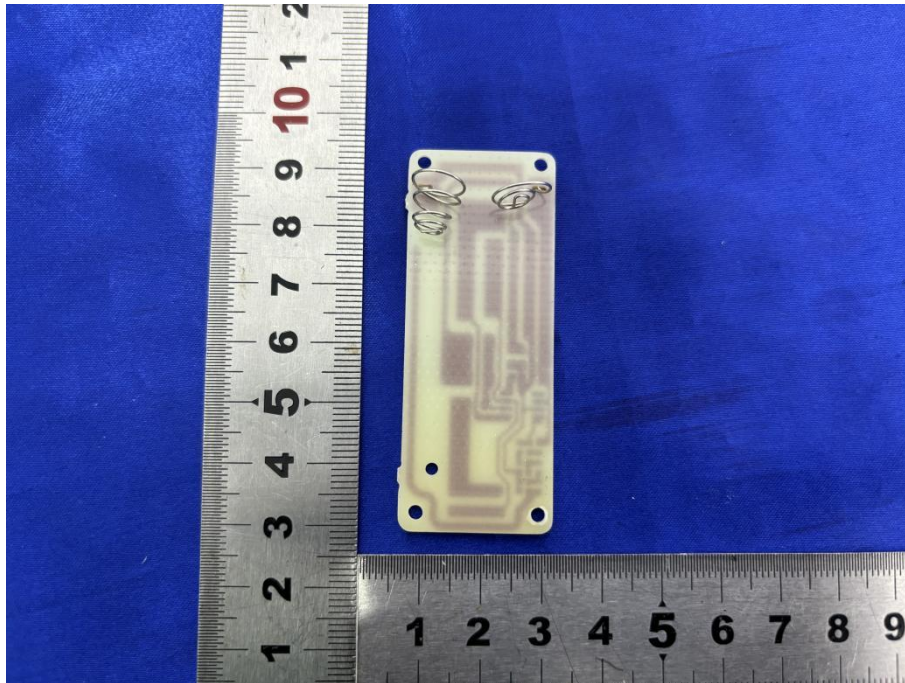

View of Product-13

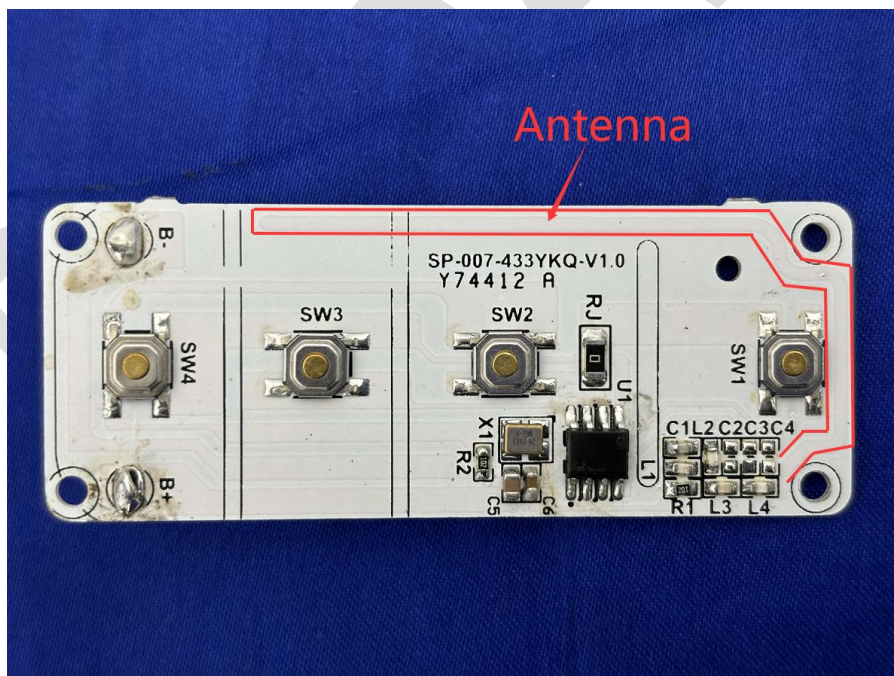

View of Product-14

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, the result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.