



FCC TEST REPORT

FCC ID: 2AQURZW47

Product : S2 Double Plug with USB Port
Model Name : ZW47
Brand : N/A
Report No. : PTC18080610904E-FC01

Prepared for

NIE Technology Co., Ltd

Jilian commercial center 9001, Jinxiu road No.2, Changan Town, Dongguan City, Guangdong Province, China

Prepared by

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China



1 TEST RESULT CERTIFICATION

Applicant's name : NIE Technology Co., Ltd

Address : Jilian commercial center 9001, Jinxiu road No.2, Changan Town, Dongguan City, Guangdong Province, China

Manufacture's name : NIE Technology Co., Ltd

Address : Jilian commercial center 9001, Jinxiu road No.2, Changan Town, Dongguan City, Guangdong Province, China

Product name : S2 Double Plug with USB Port

Model name : ZW47

Standards : FCC CFR47 Part 15 Section 15.231

Test procedure : ANSI C63.10:2013

Test Date : September 28, 2018 to December 06, 2018

Date of Issue : December 06, 2018

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads "Leo Yang" with a long, sweeping horizontal stroke at the end.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read "Chris Du" in a stylized, cursive script.

Chris Du / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 TEST MODE.....	7
3.3 TEST SITE	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY	11
5 CONDUCTED EMISSION.....	12
5.1 E.U.T. OPERATION.....	12
5.2 EUT SETUP	12
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
5.4 MEASUREMENT PROCEDURE:	13
5.5 CONDUCTED EMISSION LIMIT	13
5.6 MEASUREMENT DESCRIPTION.....	13
5.7 CONDUCTED EMISSION TEST RESULT	13
6 RADIATED SPURIOUS EMISSIONS	16
NOTE:	16
1. THE TIGHTER LIMIT APPLIES AT THE BAND EDGES.	16
2. EMISSION LEVEL(dBuV/M)=20LOG EMISSION LEVEL(uV/M).....	16
6.1 EUT OPERATION	19
6.2 TEST SETUP.....	19
6.3 SPECTRUM ANALYZER SETUP.....	21
6.4 TEST PROCEDURE	22
6.5 SUMMARY OF TEST RESULTS.....	23
7 20DB BANDWIDTH MEASUREMENT.....	25
7.1 TEST PROCEDURE	25
7.2 TEST RESULT.....	25



8	TRANSMITTER TIMEOUT	26
8.1	REQUIREMENTS	26
9	ANTENNA REQUIREMENT	28
10	TEST SETUP	29
11	EUT PHOTOS	31



2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emission	15.231(a) 15.209 15.205(a)	PASS
Occupied Bandwidth	15.231(a) 15.205 15.209	PASS
Transmitter Timeout	15.215(c) 15.231	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



3 General Information

3.1 General Description of E.U.T.

Product Name	:	S2 Double Plug with USB Port
Model Name	:	ZW47
Operation Frequency:	:	908.42MHz
Antenna installation:	:	Internal PCB Antenna
Antenna Gain:	:	0dBi
Type of Modulation	:	ASK
Hardware Version	:	N/A
Software Version	:	N/A
Power supply	:	AC 120V/60Hz



3.2 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning testing based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode or test configuration mode mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX



Report No.: PTC18080610904E-FC01

3.3 Test Site

Dongguan Precise Testing & Certification Corp., Ltd.

Address: Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LACertificate No.: 4408.01

IC Registration Number: 12191A-1



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	10Hz-30GHz	Sep. 19, 2019
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Sep. 19, 2019
Antenna Connector	Florida RF Labs	N/A	RF01#	N/A	Sep. 19, 2019

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions (Test Frequency from 9KHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep. 19, 2019
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Sep. 19, 2019
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-572	25MHz-2GHz	Sep. 19, 2019
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Sep. 19, 2019
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Sep. 19, 2019
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Oct. 12, 2019
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Sep. 26, 2019
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Sep. 19, 2019
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Sep. 19, 2019



Report No.: PTC18080610904E-FC01

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep. 19, 2019
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	9KHz-300MHz	Sep. 19, 2019
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Sep. 19, 2019



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions(150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method:	: ANSI C63.10:2013
Test Result:	: PASS
Frequency Range:	: 150kHz to 30MHz
Class/Severity:	: Class B
Detector:	: Peak for pre-scan(9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :


Temperature:	: 25.5 °C
Humidity:	: 51 % RH
Atmospheric Pressure:	: 101.2kPa
Test Voltage	: AC 120V/60Hz

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

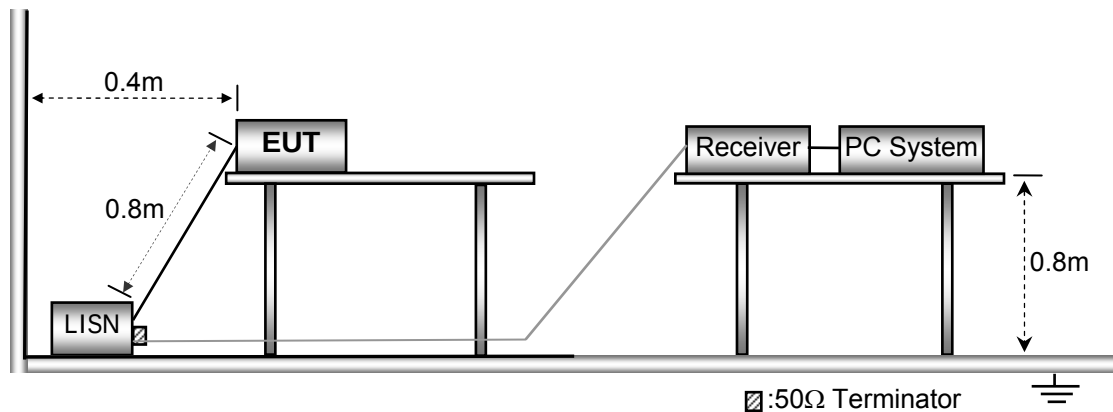

5.3 Test SET-UP (Block Diagram of Configuration)

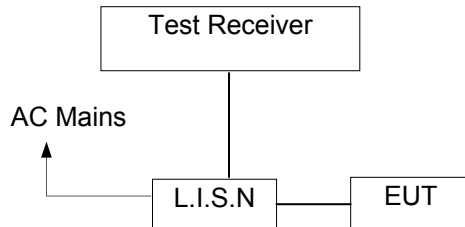

5.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass

Please find the following pages.




Test Phase: Line:

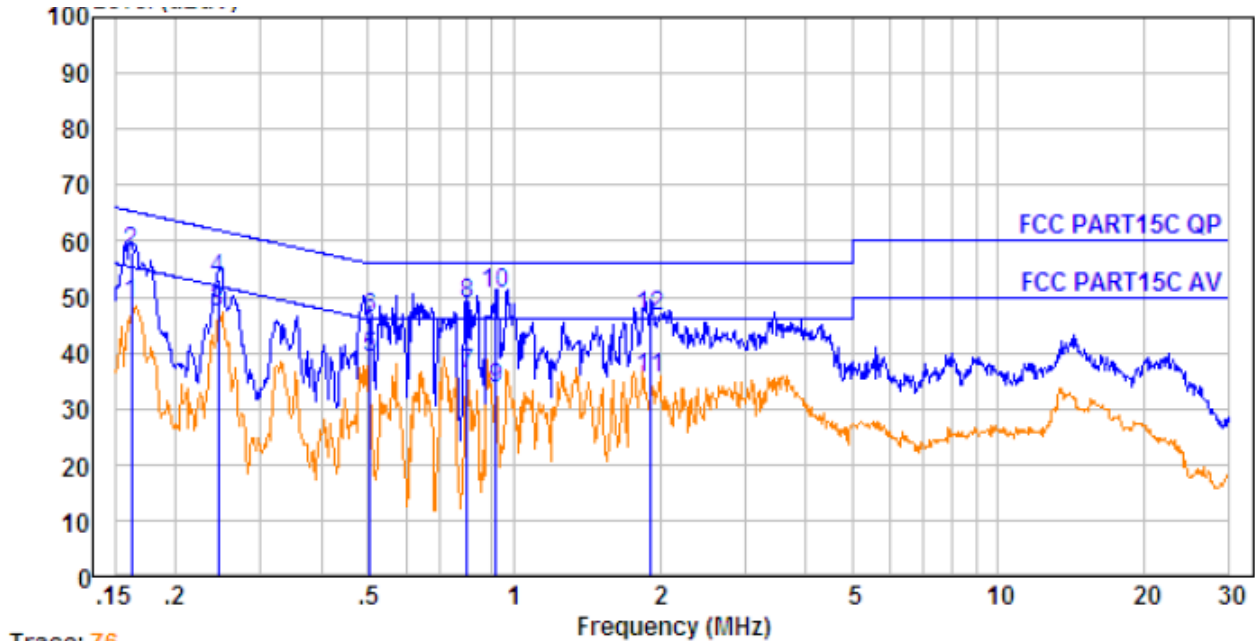

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.162	0.23	9.52	39.10	48.85	55.34	-6.49	Average
2.	0.162	0.23	9.52	48.16	57.91	65.34	-7.43	QP
3.	0.246	0.33	9.63	37.13	47.09	51.91	-4.82	Average
4.	0.246	0.33	9.63	43.19	53.15	61.91	-8.76	QP
5.	0.505	0.43	9.78	29.02	39.23	46.00	-6.77	Average
6.	0.505	0.43	9.78	36.05	46.26	56.00	-9.74	QP
7.	0.800	0.45	9.81	26.01	36.27	46.00	-9.73	Average
8.	0.800	0.45	9.81	38.56	48.82	56.00	-7.18	QP
9.	0.918	0.46	9.82	23.19	33.47	46.00	-12.53	Average
10.	0.918	0.46	9.82	40.14	50.42	56.00	-5.58	QP
11.	1.918	0.47	9.85	25.23	35.55	46.00	-10.45	Average
12.	1.918	0.47	9.85	36.20	46.52	56.00	-9.48	QP



Test Phase: Neutral

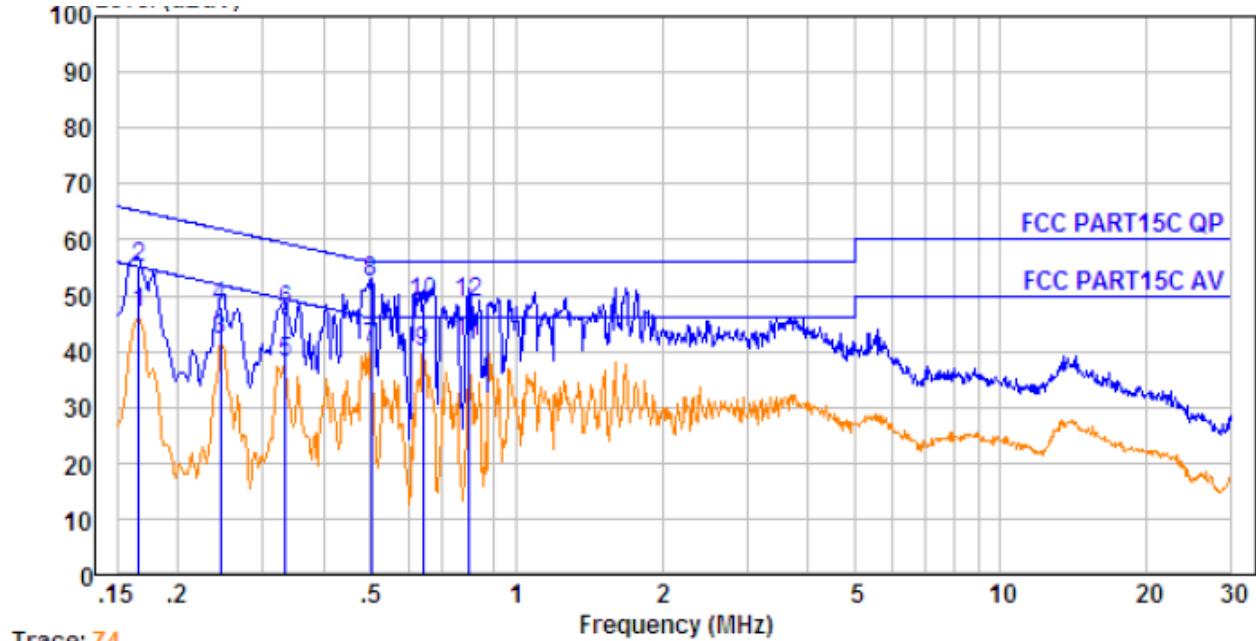

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.166	0.23	9.56	37.12	46.91	55.16	-8.25	Average
2.	0.166	0.23	9.56	45.18	54.97	65.16	-10.19	QP
3.	0.246	0.33	9.66	32.10	42.09	51.91	-9.82	Average
4.	0.246	0.33	9.66	38.16	48.15	61.91	-13.76	QP
5.	0.334	0.38	9.73	28.01	38.12	49.35	-11.23	Average
6.	0.334	0.38	9.73	37.06	47.17	59.35	-12.18	QP
7.	0.502	0.43	9.81	30.30	40.54	46.00	-5.46	Average
8.	0.502	0.43	9.81	42.10	52.34	56.00	-3.66	QP
9.	0.641	0.44	9.82	29.51	39.77	46.00	-6.23	Average
10.	0.641	0.44	9.82	38.59	48.85	56.00	-7.15	QP
11.	0.796	0.45	9.84	31.40	41.69	46.00	-4.31	Average
12.	0.796	0.45	9.84	38.43	48.72	56.00	-7.28	QP



6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.231& 15.209 &15.205
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note:

1. The tighter limit applies at the band edges.
2. Emission level(dBuV/m)=20log Emission level(uV/m)

Limits of Radiated Emission Measurement (FCC 15.231)

Frequency (MHz)	Field Strength of Fundamental (Microvolts/meters)	Field Strength of Unwanted Emissions (Microvolts/meters)
40.66-40.70	2250.00	225.00
70-130	1250.00	125.00
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250



Note:

** linear interpolations. Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

For the Band 130-174MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F)-6136.3636$;

For the Band 260-470MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F)-7083.3333$;

The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

The limited on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 section 15.209, whichever limit permits a higher field strength.

According 15.35(c), when the field strength (or envelope power) is not constant or it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 second, the average value of field strength or output power shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

The average correction factor was computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency was $\text{Average} = \text{Peak value} + 20\log(\text{Duty Cycle})$, where the duty factor is calculated from following formula:



The duration of on cycle=499.2ms

Effective period of the cycle=21.2ms

Duty Cycle= $21.2/100=0.212$ or 21.2%

Therefore, the averaging factor is found by $20\log 0.212=-13.5$

Please refer to below plots for more details.

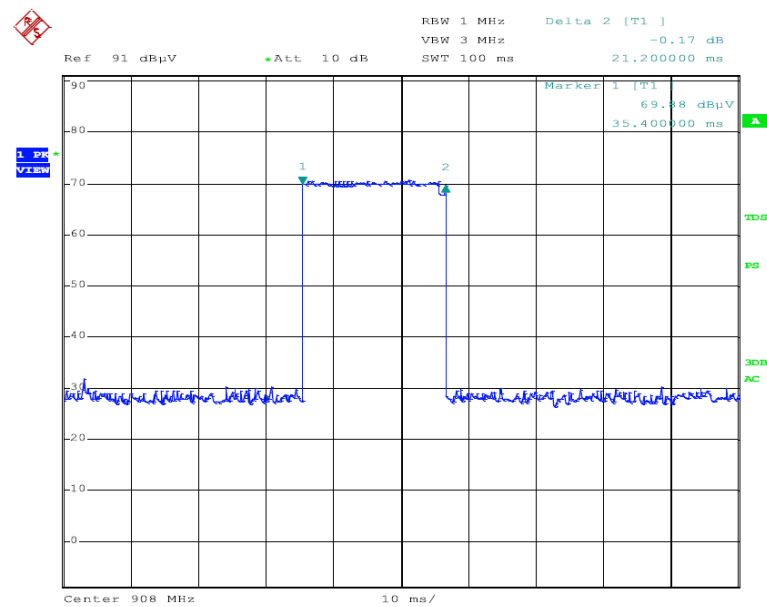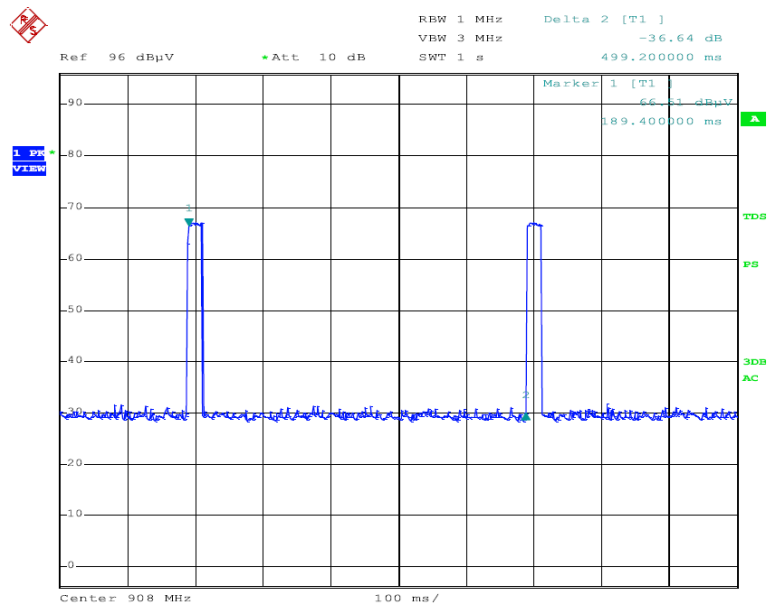

6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber testsite


The test setup for emission measurement below 30MHz

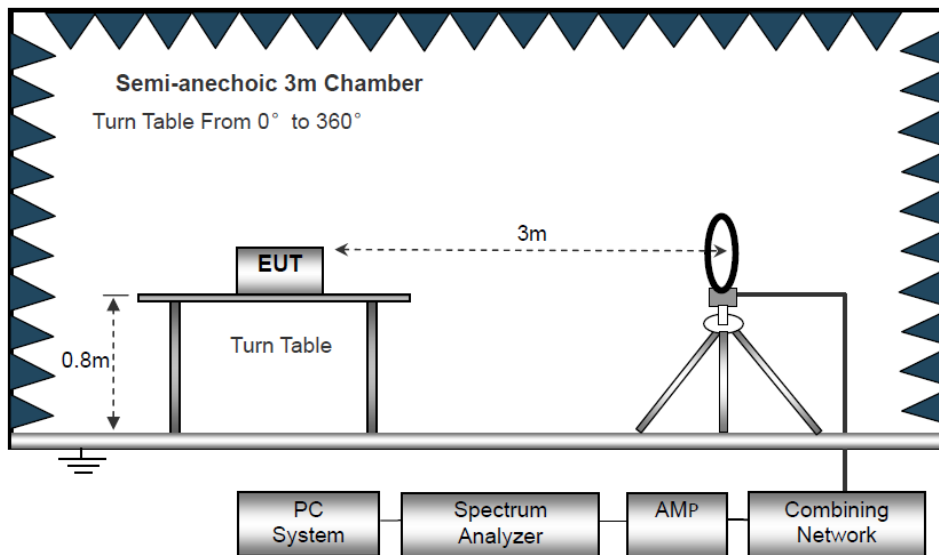

The test setup for emission measurement from 30 MHz to 1 GHz.

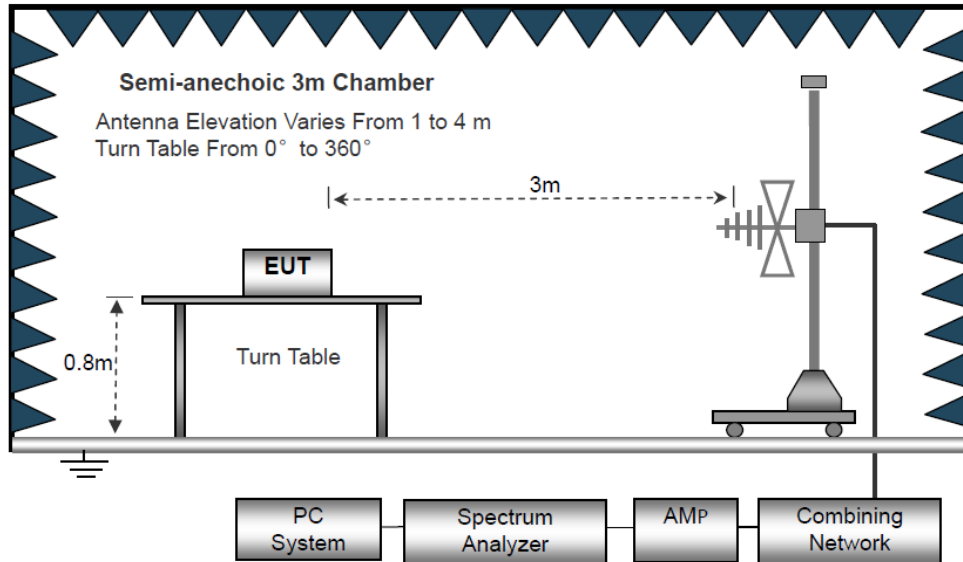

The test setup for emission measurement above 1 GHz

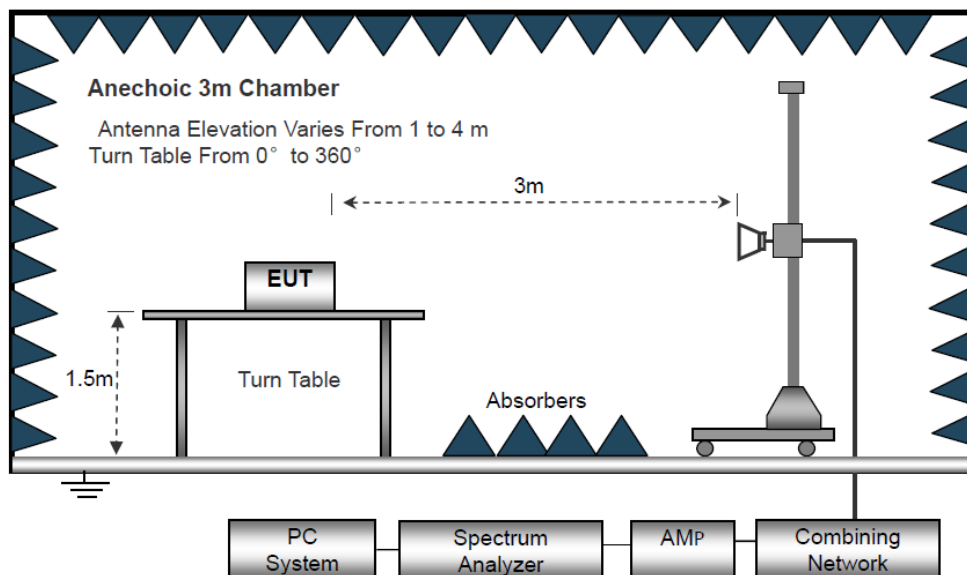



6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



6.5 Summary of Test Results

Test Frequency:9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1000MHz

Frequency (MHz)	Polar (H/V)	Cable Loss (dB)	ANT Factor (dB/m)	Reading (dBμV)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector Type
373548	V	1.26	13.51	40.38	30.05	25.10	40.00	-14.90	QP
63.983	V	1.74	11.91	35.44	30.23	18.86	40.00	-21.14	QP
87.725	V	2.03	9.02	47.59	30.34	28.30	40.00	-11.70	QP
191.745	V	2.73	10.97	44.70	30.62	27.78	43.50	-15.72	QP
287.990	V	3.10	12.96	45.51	30.76	30.81	46.00	-15.19	QP
576.644	V	3.73	18.55	37.33	31.00	28.61	46.00	-17.39	QP
40.702	H	1.33	13.64	32.95	30.08	17.84	40.00	-22.16	QP
87.725	H	2.03	9.02	41.57	30.34	22.28	40.00	-17.72	QP
135.982	H	2.42	13.07	34.53	30.50	19.52	43.50	-23.98	QP
183.844	H	2.70	11.92	38.56	30.60	22.58	43.50	-20.92	QP
223.733	H	2.87	10.94	42.06	30.67	25.20	46.00	-20.80	QP
319.937	H	3.20	13.65	45.98	30.79	32.04	46.00	-13.96	QP

Note:

Emission Level= Cable Loss + ANT Factor + Reading – Corrected Factor

Margin=Emission Level – Limit



Fundamental and Harmonics Average Result

Frequency	Emission Level	Corrected Factor	Corrected Amplitude	Limit	Margin	Ant. Polar	Detector
(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	Polar	H/V	
908.42	78.33	-10.32	68.01	82	-13.99	H	QP
908.42	77.19	-10.32	66.87	82	-15.13	V	QP

Freq.	Ant. Pol.	Emission Level(dBuV/m)	Duty Cycle	Emission Level(dBuV/m)	Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK		AV	PK	AV	PK	AV
1816.84	V	62.35	-13.50	48.85	74	54	-11.65	-5.15
2725.26	V	61.45	-13.50	47.95	74	54	-12.55	-6.05
3633.68	V	58.22	-13.50	44.72	74	54	-15.78	-9.28
4542.1	V	54.48	-13.50	40.98	74	54	-19.52	-13.02
5450.52	V	52.06	-13.50	38.56	74	54	-21.94	-15.44
1816.84	H	63.57	-13.50	50.07	74	54	-10.43	-3.93
2725.26	H	62.01	-13.50	48.51	74	54	-11.99	-5.49
3633.68	H	60.45	-13.50	46.95	74	54	-13.55	-7.05
4542.1	H	57.49	-13.50	43.99	74	54	-16.51	-10.01

Note:

1. Emissions attenuated more than 20dB below the permissible value are not reported.
2. *: denotes restricted band of operation. Measurements were made using a peak detector and average detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 are compliance with the emission limit of FCC Part 15 Section 15.209.
3. FCC Limit for Average Measurement= $20\log 12500=82\text{dB}\mu\text{V/m}$.
4. AV Level=PK Level + Duty Cycle correction factor.



7 20dB Bandwidth Measurement

Test Requirement : FCC Part15.231(c)

Test Method : FCC Part15.231(c)

Test Mode : Refer to section 3.3


Limit : The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30 kHz, VBW = 91kHz

7.2 Test Result

Test Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
908.42	143.787	4542	pass

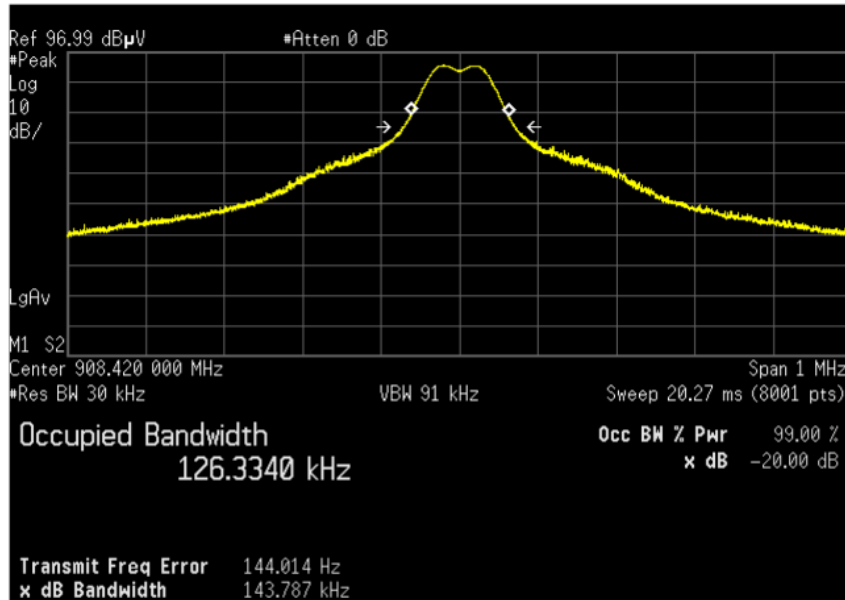



8 Transmitter Timeout

8.1 Requirements

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result: The EUT has a manually activated transmitter, please refer to below detail data.

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result: The EUT does not have a automatically activated transmitter.


Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.


Result: The EUT does not employ periodic transmission.

Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result: The section is not applicable to EUT.

Release Time	Limit	Result
0.0358s	<5s	Pass

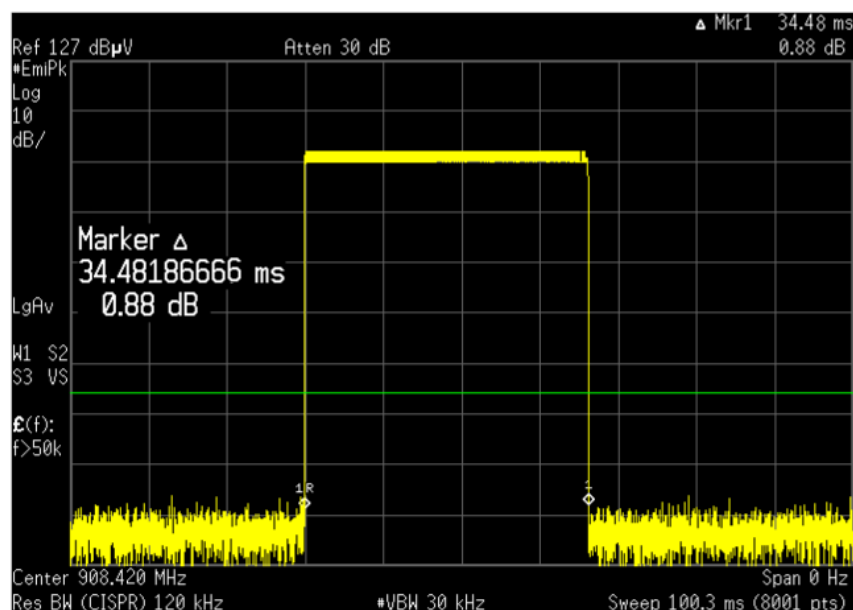

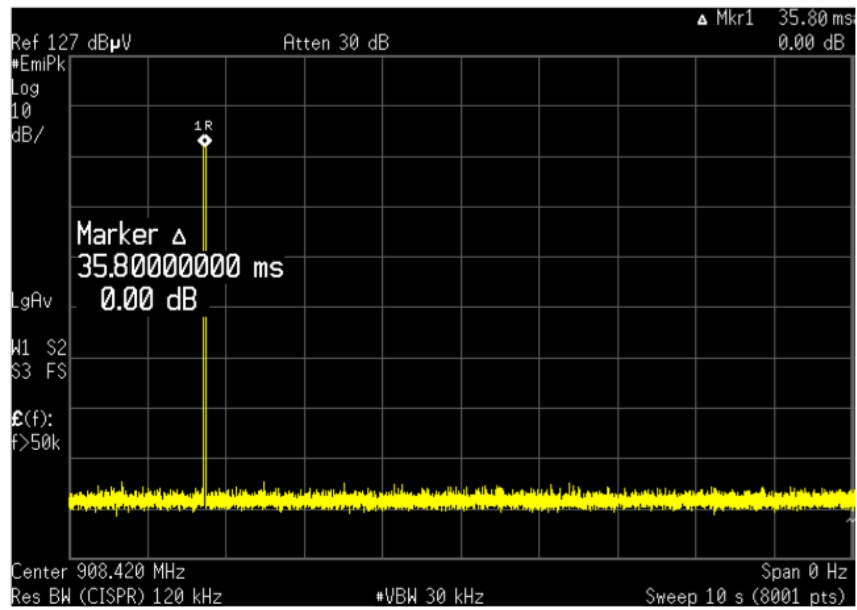



9 Antenna Requirement


According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an internal PCB antenna which meets the requirement of this section.

10 Test Setup

Conducted Emissions



Radiated Spurious Emissions Test Frequency From 30MHz-1000MHz


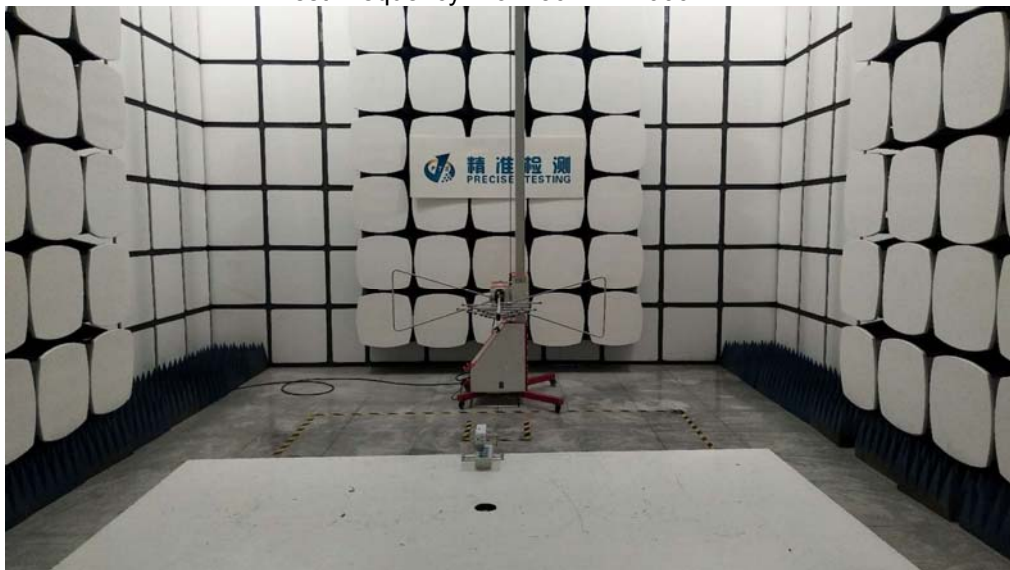







Test frequency from 1GHz-18GHz







11 EUT Photos

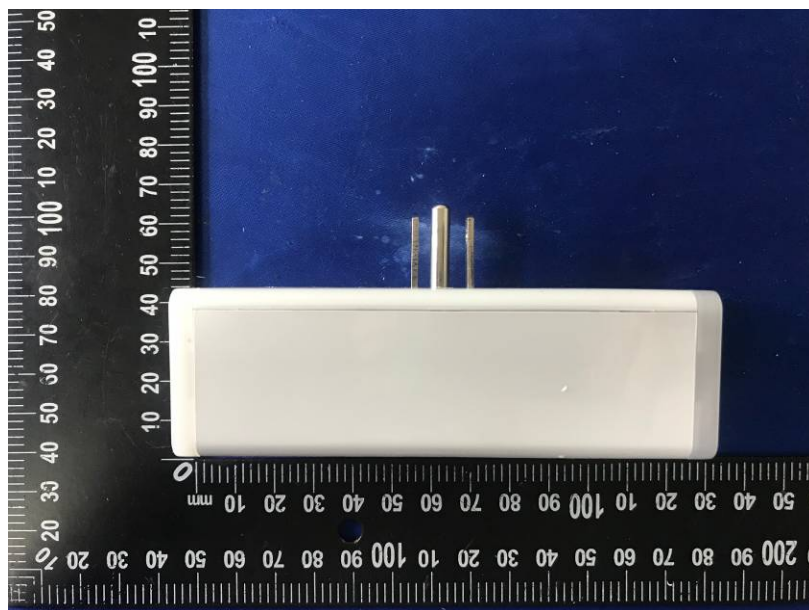
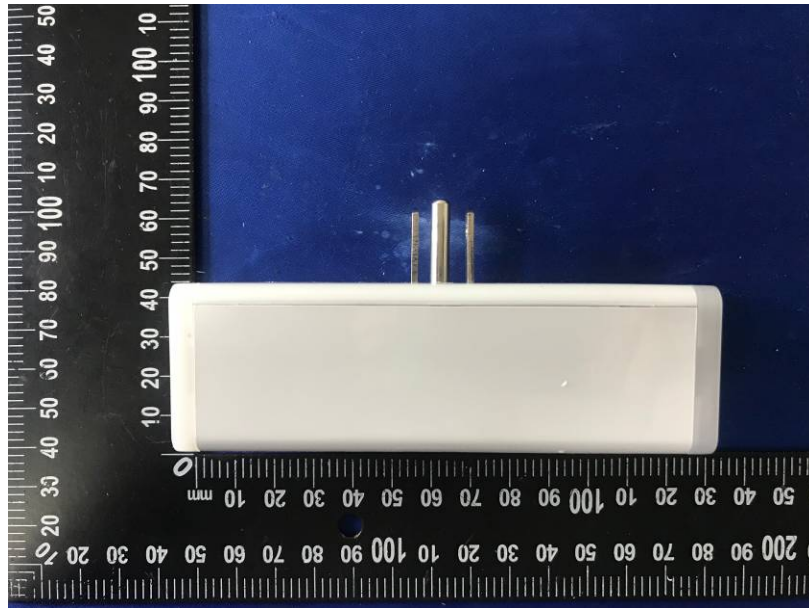



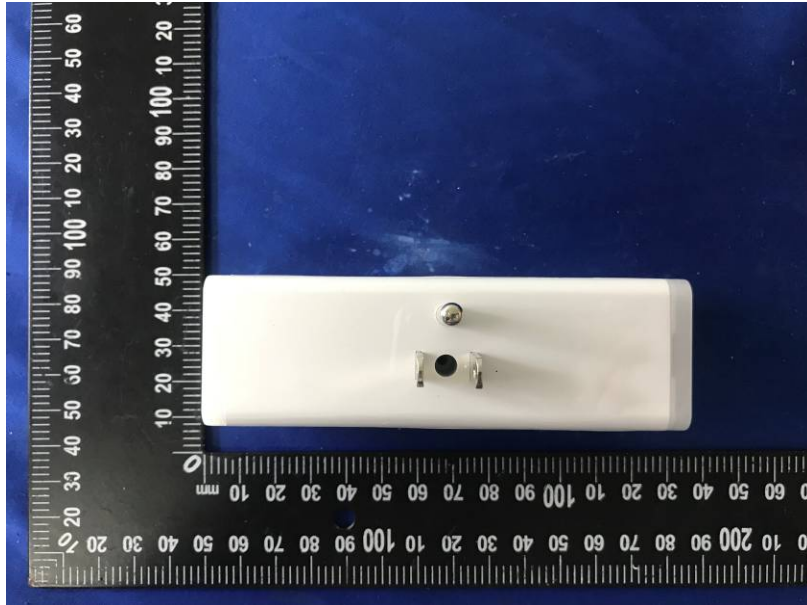


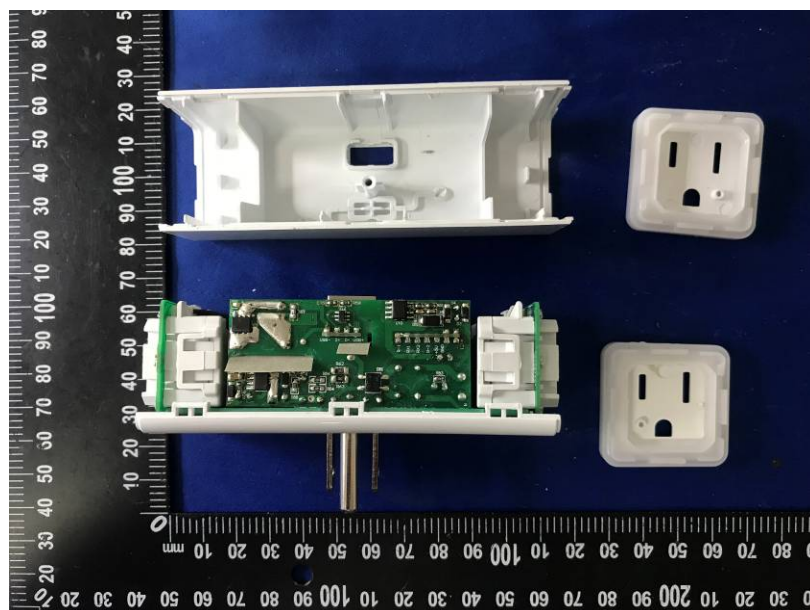
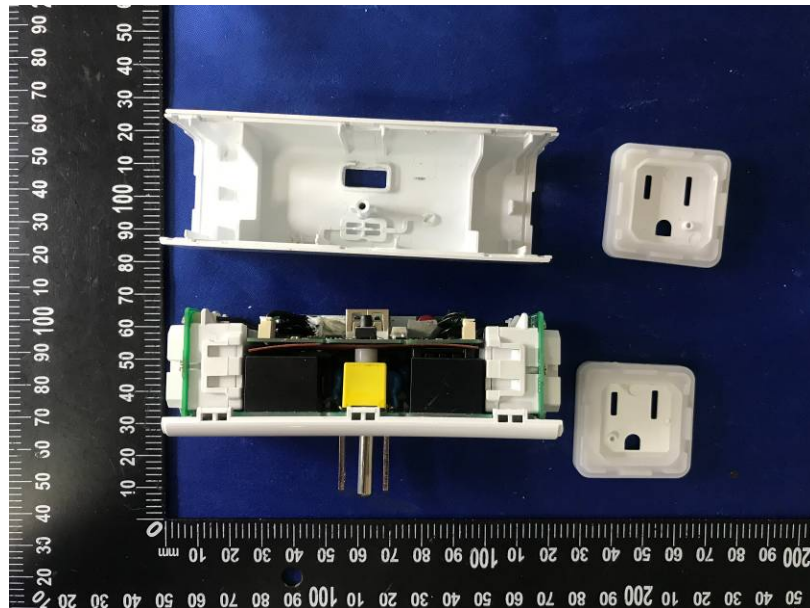


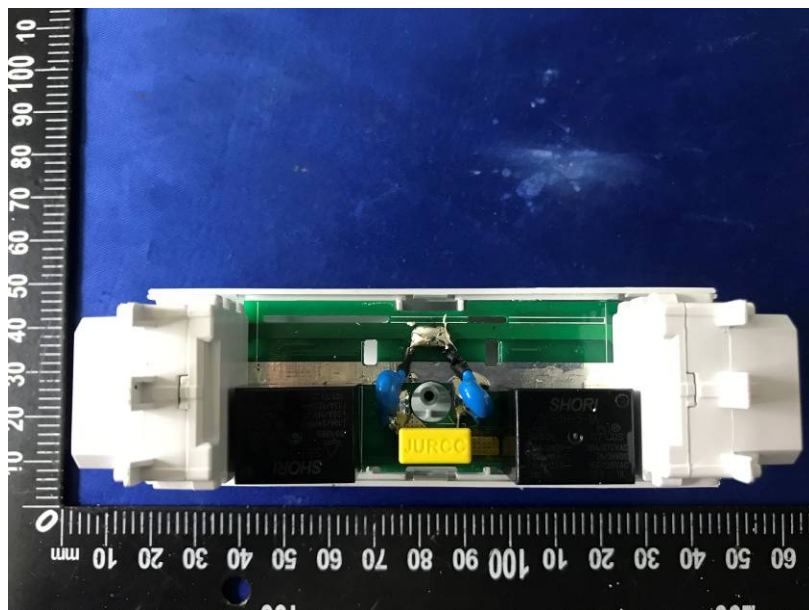
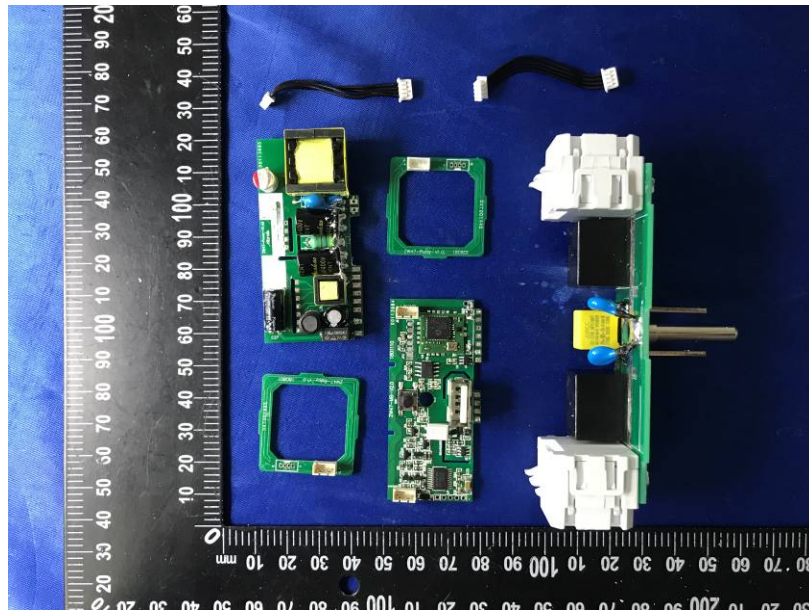


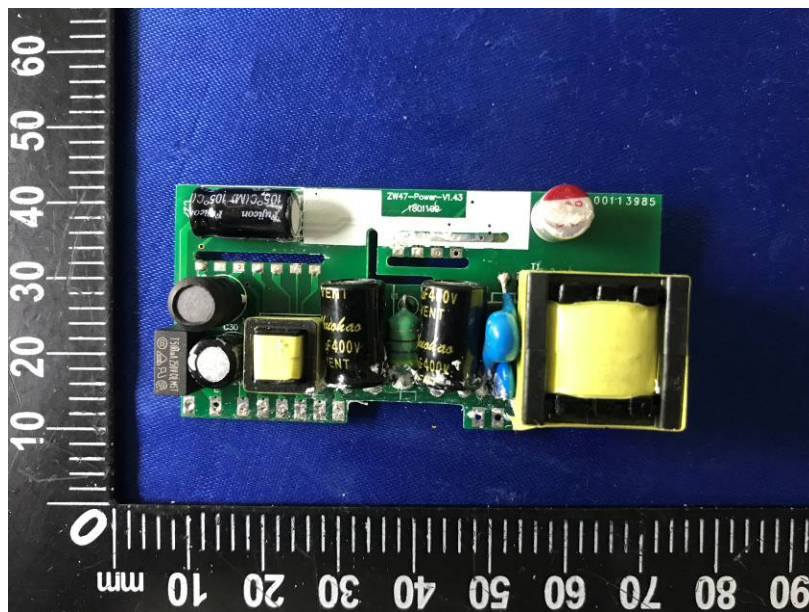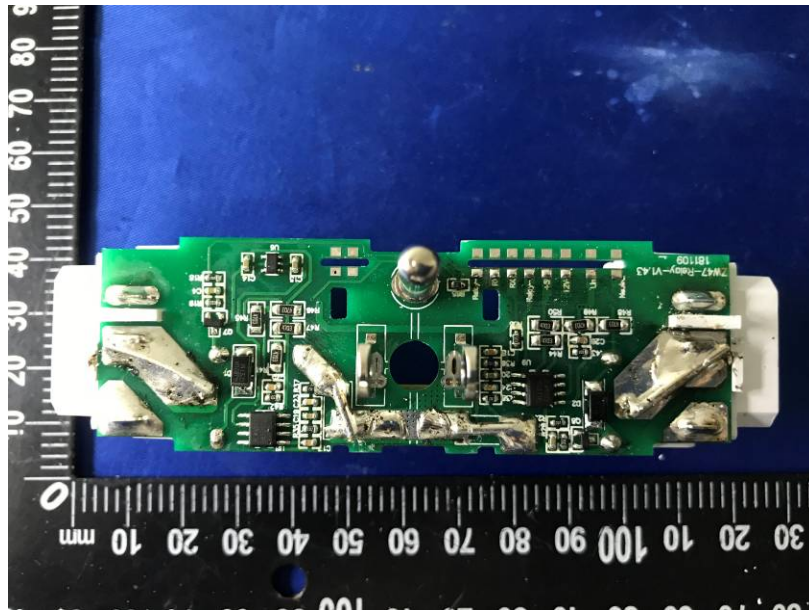

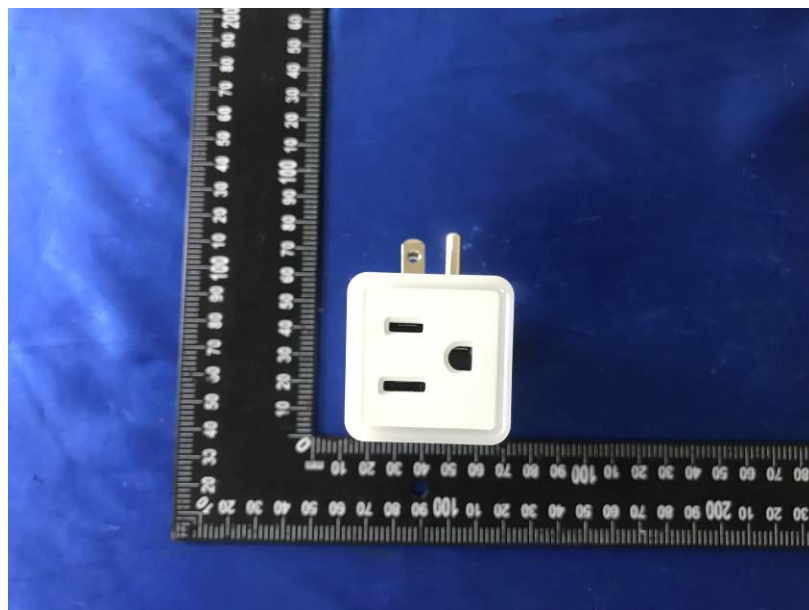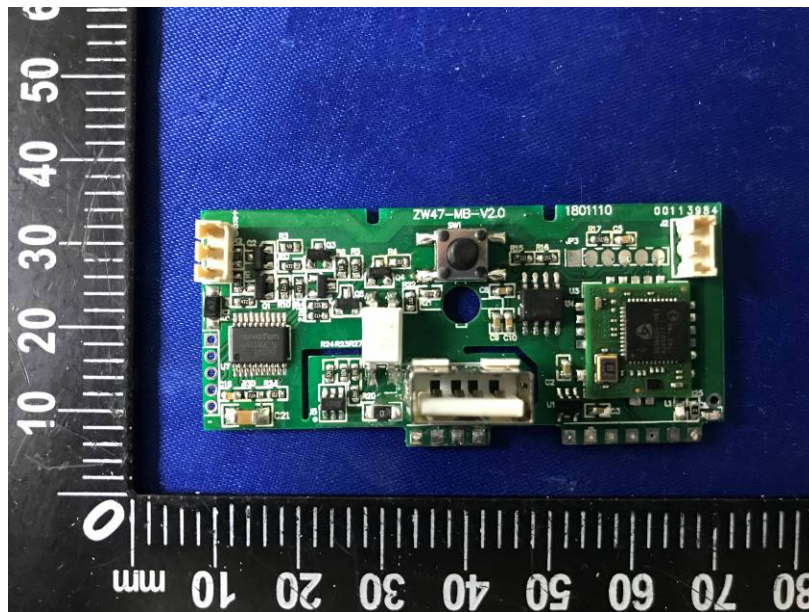

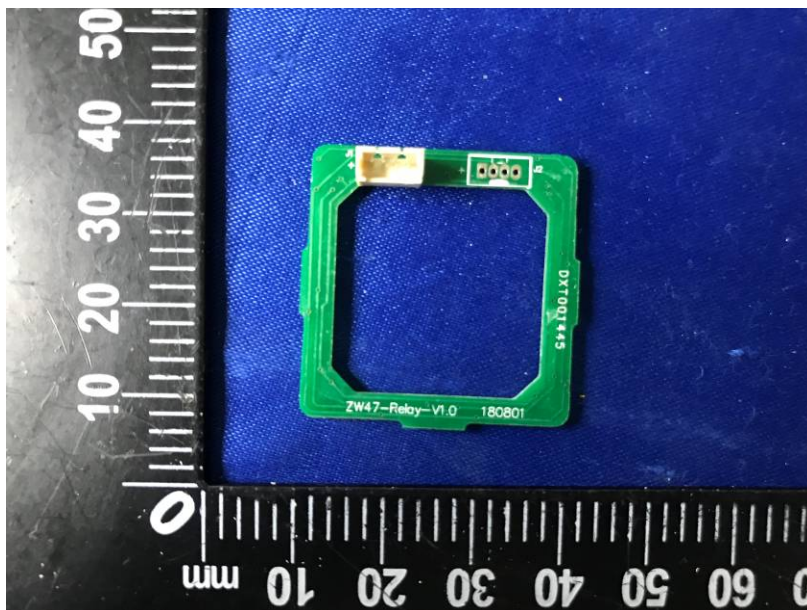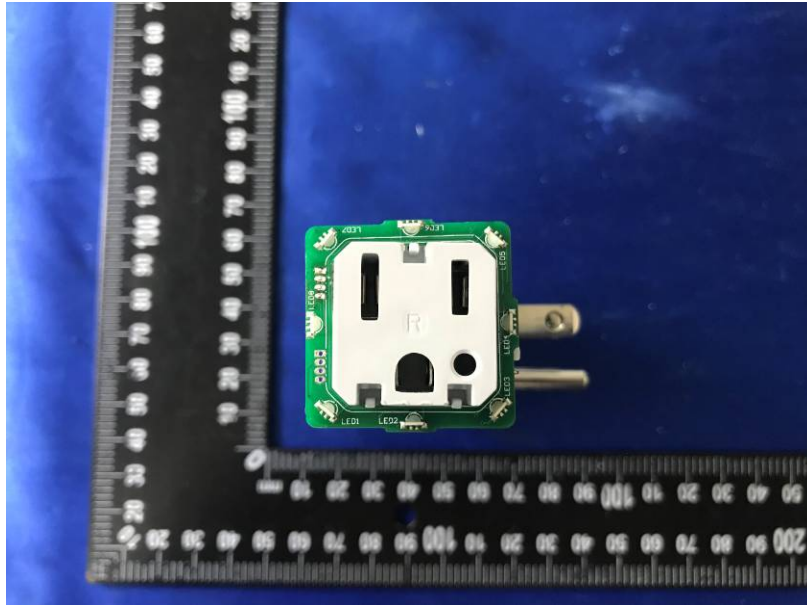

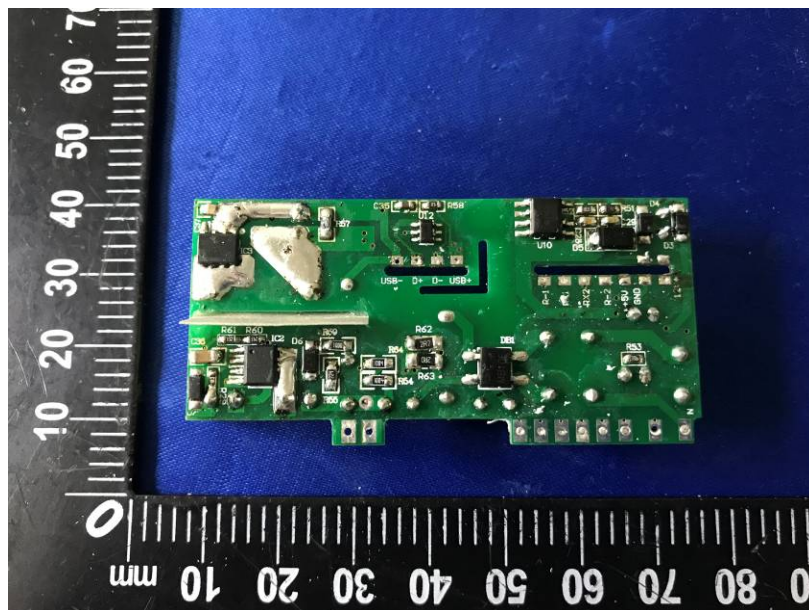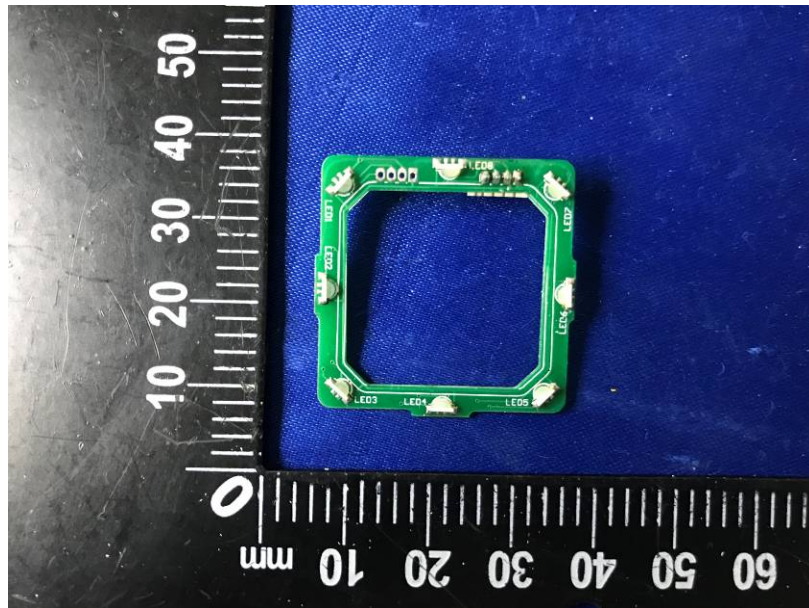

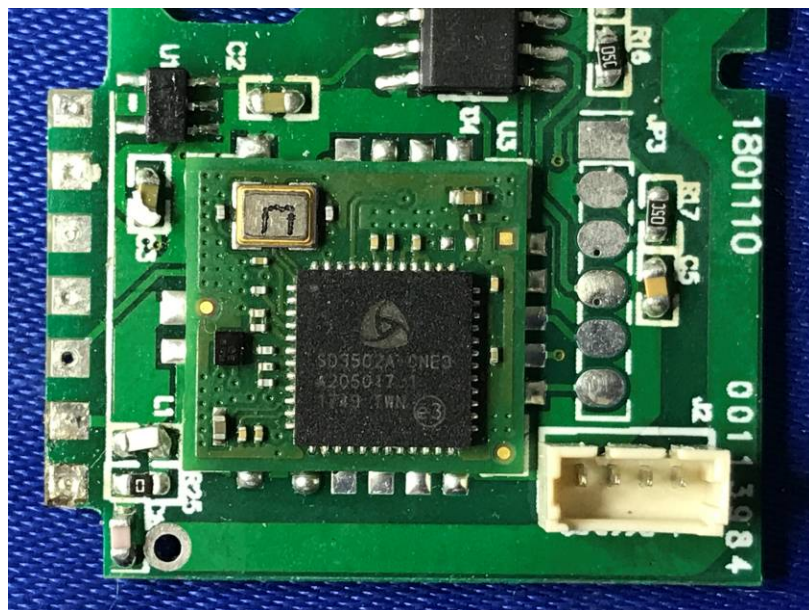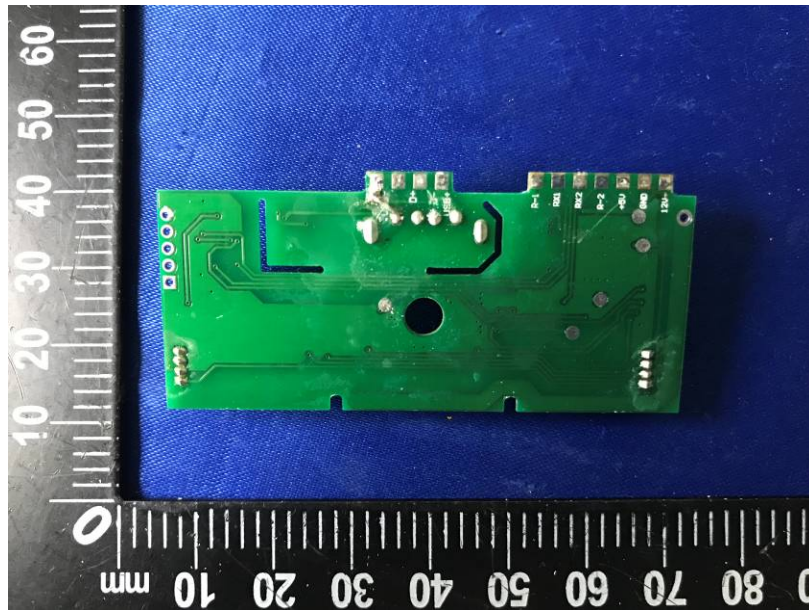

****THE END REPORT****