TEST REPORT

Applicant Name :	CALTTA TECHNOLOGIES CO., LTD.
Address :	Floor12,Building G2,international E-City, Nanshan District, Shenzhen, China
Report Number :	SZNS220519-21600E-RF-00A
FCC ID:	2AQV7PH6X0UHF

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type:	Digital Portable Radio
Model No.:	PH690 UHF
Multiple Model(s) No.:	PH660 UHF, PH600 UHF, PH690 U(1), PH660 U(1), PH600 U(1) (Please refer to DOS for Model difference)
Trade Mark:	Caltta
Date Received:	2022/05/19
Report Date:	2022/06/29

Test Result:	Pass*

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Nick Fang

EMC Engineer

Approved By:

Robert Li

EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★ ".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION **4**
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
OBJECTIVE 4
TEST METHODOLOGY 4
MEASUREMENT UNCERTAINTY 5
TEST FACILITY 5
SYSTEM TEST CONFIGURATION **6**
DESCRIPTION OF TEST CONFIGURATION 6
EUT EXERCISE SOFTWARE 6
SPECIAL ACCESSORIES 6
EQUIPMENT MODIFICATIONS 6
SUPPORT EQUIPMENT LIST AND DETAILS 6
EXTERNAL I/O CABLE 6
BLOCK DIAGRAM OF TEST SETUP 7
SUMMARY OF TEST RESULTS **8**
TEST EQUIPMENT LIST **9**
FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 – RF EXPOSURE **11**
FCC §15.203 – ANTENNA REQUIREMENT **13**
APPLICABLE STANDARD 13
ANTENNA CONNECTOR CONSTRUCTION 13
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS **14**
APPLICABLE STANDARD 14
EUT SETUP 14
EMI TEST RECEIVER SETUP 14
TEST PROCEDURE 14
TRANSD FACTOR & MARGIN CALCULATION 15
TEST DATA 15
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS **22**
APPLICABLE STANDARD 22
EUT SETUP 22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP 23
TEST PROCEDURE 23
FACTOR & MARGIN CALCULATION 23
TEST DATA 23
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST **33**
APPLICABLE STANDARD 33
TEST PROCEDURE 33
TEST DATA 33
FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH **34**
APPLICABLE STANDARD 34
TEST PROCEDURE 34
TEST DATA 35

FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST 36
APPLICABLE STANDARD 36
TEST PROCEDURE 36
TEST DATA 36
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME) 37
APPLICABLE STANDARD 37
TEST PROCEDURE 37
TEST DATA 37
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT 38
APPLICABLE STANDARD 38
TEST PROCEDURE 38
TEST DATA 38
FCC §15.247(D) - BAND EDGES TESTING 39
APPLICABLE STANDARD 39
TEST PROCEDURE 39
TEST DATA 39
APPENDIX 40
APPENDIX A: 20DB EMISSION BANDWIDTH 40
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH 44
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER 48
APPENDIX D: CARRIER FREQUENCY SEPARATION 52
APPENDIX E: TIME OF OCCUPANCY 54
APPENDIX F: NUMBER OF HOPPING CHANNELS 61
APPENDIX G:BAND EDGE MEASUREMENTS 63

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402-2480MHz
Maximum conducted Peak output power	Bluetooth: 5.85dBm
Modulation Technique	Bluetooth: GFSK, π/4-DQPSK, 8DPSK
Antenna Specification*	-4.0dBi (provided by the applicant)
Voltage Range	DC 7.4V from battery or DC 12.0V from adapter
Sample serial number	Model: PH690 UHF SZNS220519-21600E-RF-S3 Model: PH600 U(1) SZNS220519-21600E-RF-S2 Model: PH660 U(1) SZNS220519-21600E-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: ES085H-X120100XYF Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 12.0V, 1.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082*10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1℃
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISEDC), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

"CyBluetool.exe"* exercise software was used and the power level is 20*. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shield Un-Detachable DC Cable	1.2	Adapter	Base

Block Diagram of Test Setup

For conducted emission:

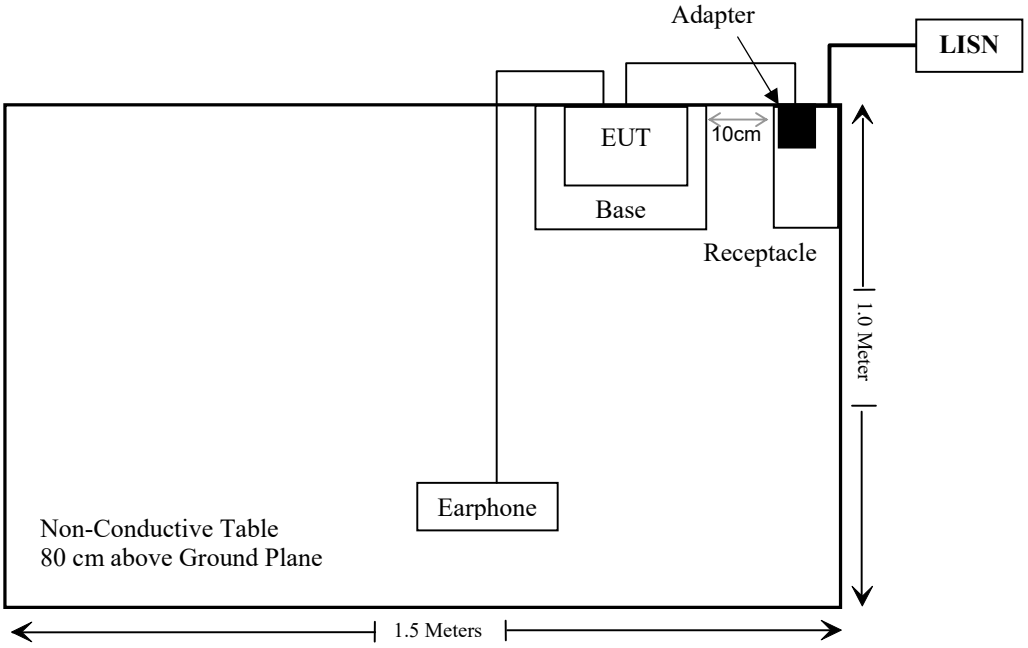

For radiated emission:

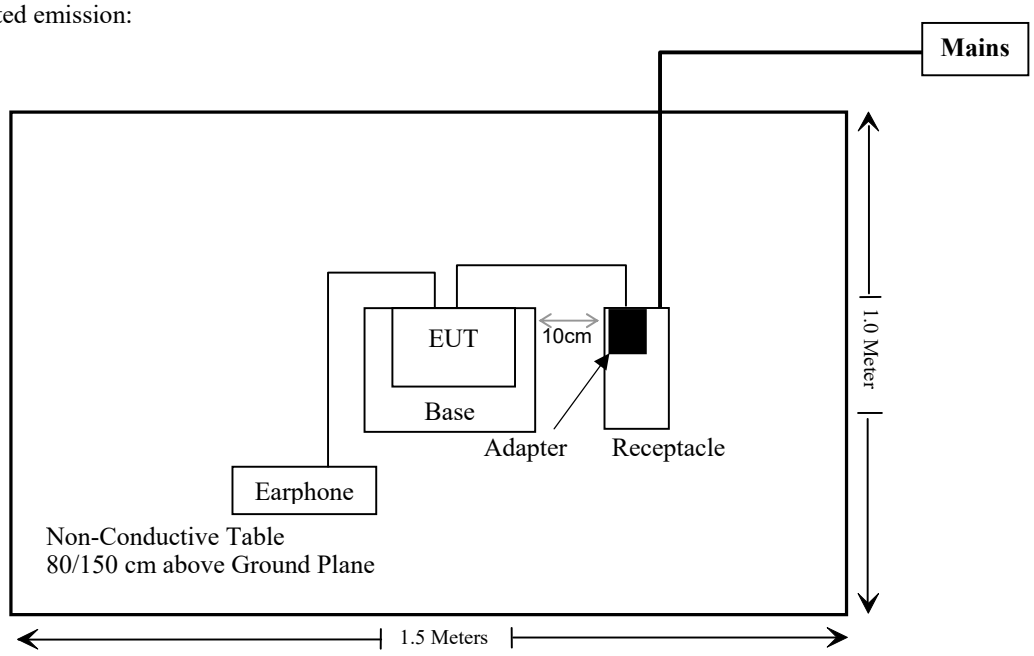

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Note 1: The multiple models are electrically identical with the Model:PH690 UHF. Please refer to the declaration letter for more details, which was provided by the applicant. Fully test was performed with Model:PH690 UHF except radiation emission below 1GHz and AC line conducted emission test with Model: PH690 UHF, PH600 U(1), PH660 U(1).

Note 2: The EUT has two battery which the model is AB610 and AB660, pre-scan with the two battery, the worst case is the model AB660 which was recorded in the report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/01/19	2023/01/18
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/10/26	2022/10/25
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	
Unknown	RF Cable	Unknown	2	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (3), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance

SAR-Based Exemption:

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum timeaveraged power or maximum time-averaged ERP, whichever is greater.

Per § 1.1307(b)(3)(i)(B), for single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th}\ (\text{mW}) = \begin{cases} ERP_{20\ cm}(d/20\ \text{cm})^x & d \le 20\ \text{cm} \\ ERP_{20\ cm} & 20\ \text{cm} < d \le 40\ \text{cm} \end{cases}$$

Where

$$x = -\log_{10}\left(\frac{60}{ERP_{20\ cm}\sqrt{f}}\right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20\ cm}\ (\text{mW}) = \begin{cases} 2040f & 0.3\ \text{GHz} \le f < 1.5\ \text{GHz} \\ 3060 & 1.5\ \text{GHz} \le f \le 6\ \text{GHz} \end{cases}$$

d = the separation distance (cm);

For worst case:

Exemption limit:

For f=2.48GHz, d=2.0cm, the P_{th}=38.0mW

The maximum tune-up conducted power is 6.0dBm (4.0mW)

The antenna gain is -4.0dBi(-6.15dBd)

The ERP is 6.0dBm-6.15dBd=-0.15dBm(1.0mW)

So the higher of the available maximum time-averaged power or effective radiated power (ERP) is 4.0mW which less than 38mW@2480MHz exemption limit.

So the stand-alone SAR evaluation can be exempted.

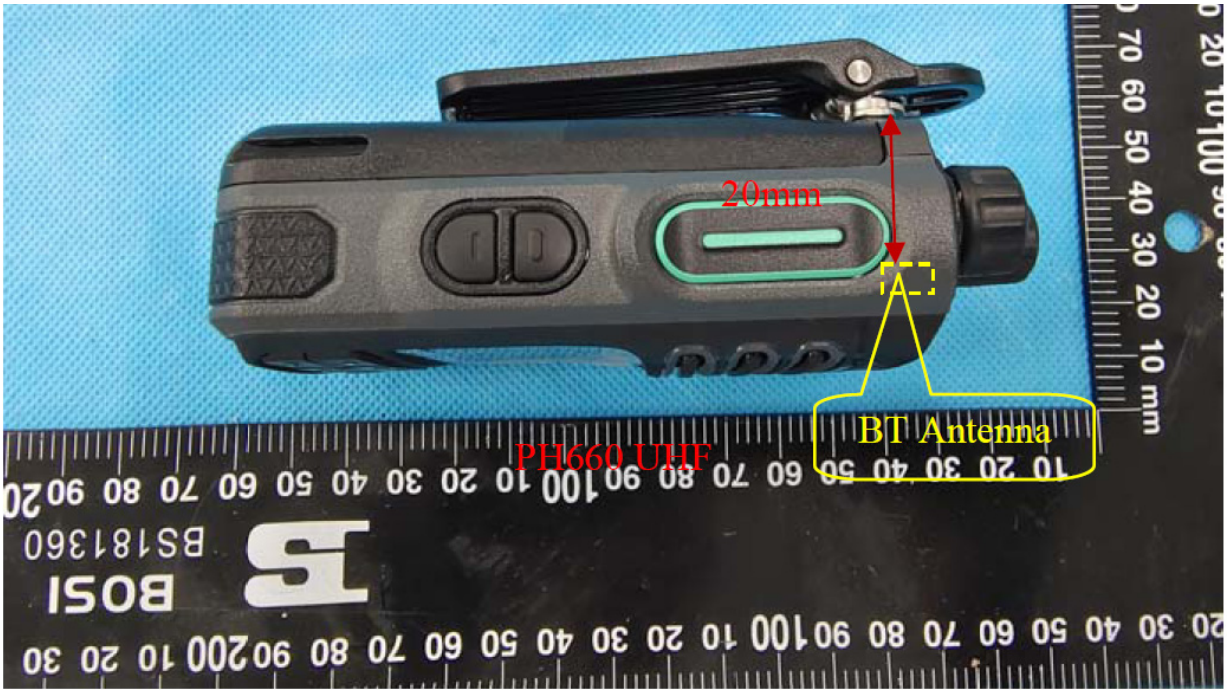

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the antenna gain is -4dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

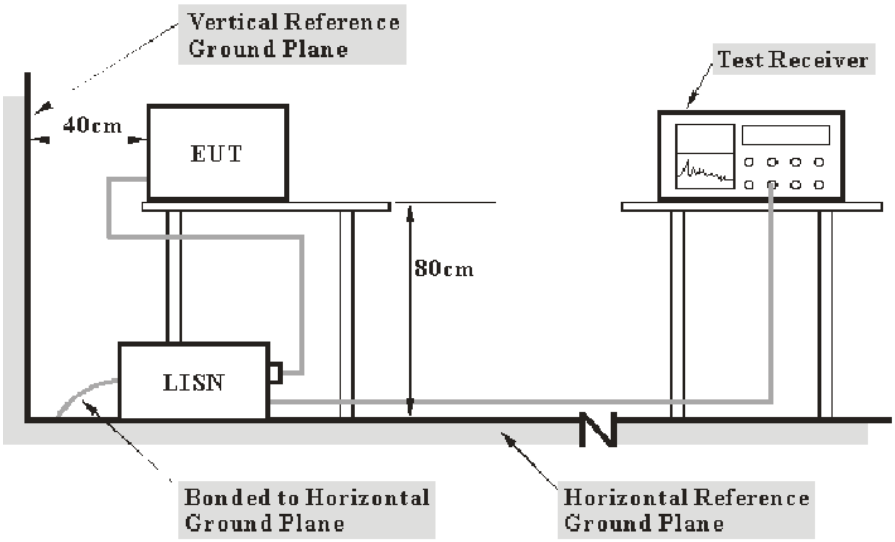

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

Transd Factor = LISN VDF + Cable Loss

The "**Over Limit**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Over Limit = Result - Limit
Result= reading level+ Transd Factor

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Jason Liu on 2022-06-23.

EUT operation mode: Transmitting (the worst case for 8DPSK Mode, Low channel)

Model: PH690 UHF
AC 120V/60 Hz, Line

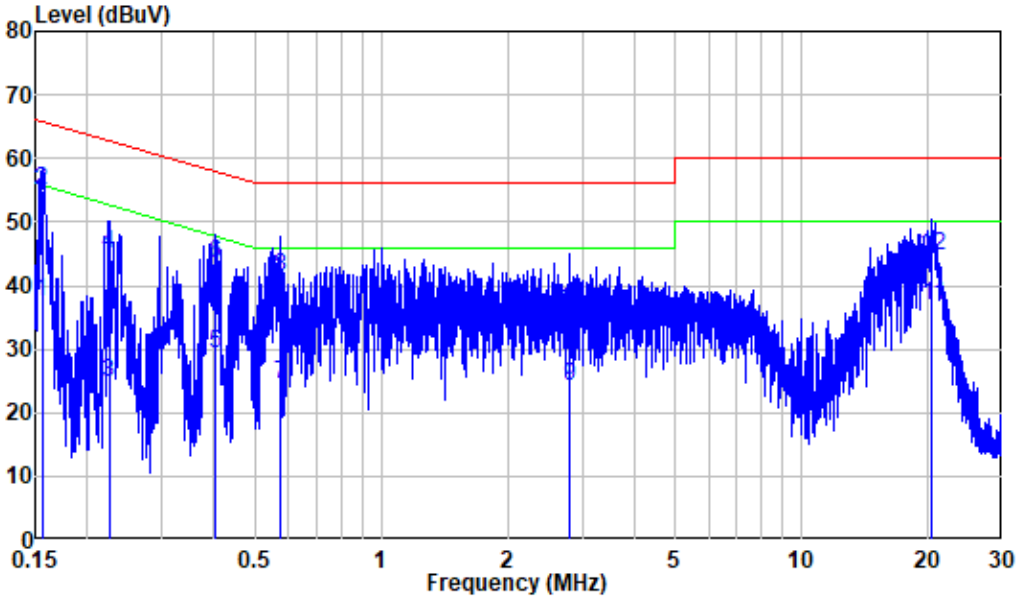

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.80	27.55	37.35	55.69	-18.34	Average
2	0.156	9.80	45.03	54.83	65.69	-10.86	QP
3	0.225	9.80	14.87	24.67	52.64	-27.97	Average
4	0.225	9.80	35.13	44.93	62.64	-17.71	QP
5	0.404	9.80	19.58	29.38	47.77	-18.39	Average
6	0.404	9.80	33.53	43.33	57.77	-14.44	QP
7	0.572	9.81	14.68	24.49	46.00	-21.51	Average
8	0.572	9.81	31.53	41.34	56.00	-14.66	QP
9	2.811	9.83	14.34	24.17	46.00	-21.83	Average
10	2.811	9.83	26.06	35.89	56.00	-20.11	QP
11	20.431	10.00	26.70	36.70	50.00	-13.30	Average
12	20.431	10.00	34.68	44.68	60.00	-15.32	QP

AC 120V/60 Hz, Neutral

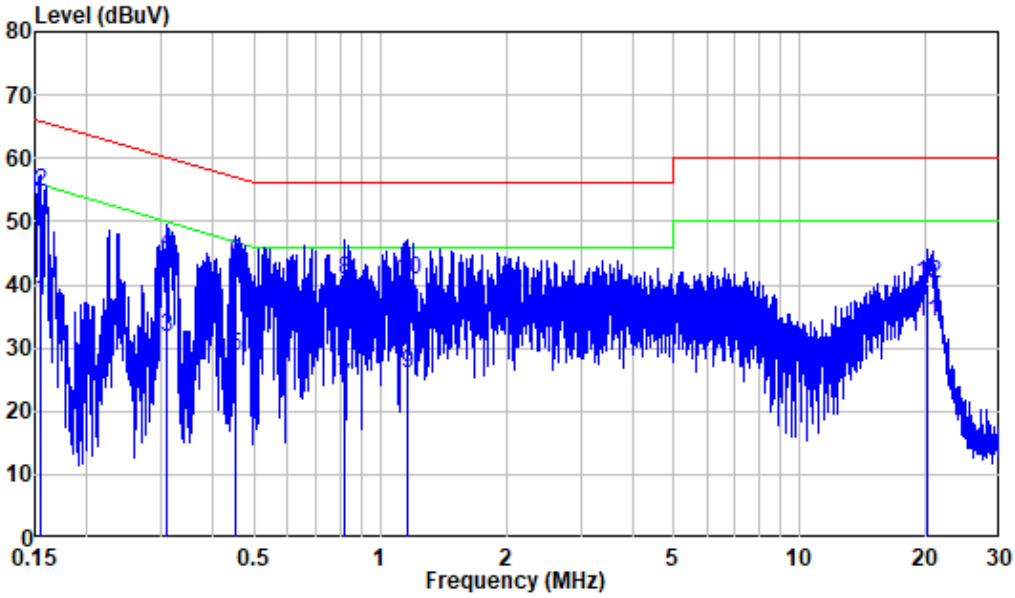

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	9.80	27.76	37.56	55.77	-18.21	Average
2	0.154	9.80	44.95	54.75	65.77	-11.02	QP
3	0.309	9.80	21.90	31.70	50.00	-18.30	Average
4	0.309	9.80	35.19	44.99	60.00	-15.01	QP
5	0.450	9.80	18.98	28.78	46.87	-18.09	Average
6	0.450	9.80	33.62	43.42	56.87	-13.45	QP
7	0.819	9.81	14.10	23.91	46.00	-22.09	Average
8	0.819	9.81	31.00	40.81	56.00	-15.19	QP
9	1.160	9.81	16.22	26.03	46.00	-19.97	Average
10	1.160	9.81	30.93	40.74	56.00	-15.26	QP
11	20.083	10.10	23.95	34.05	50.00	-15.95	Average
12	20.083	10.10	30.11	40.21	60.00	-19.79	QP

Model: PH600 U(1)
AC 120V/60 Hz, Line

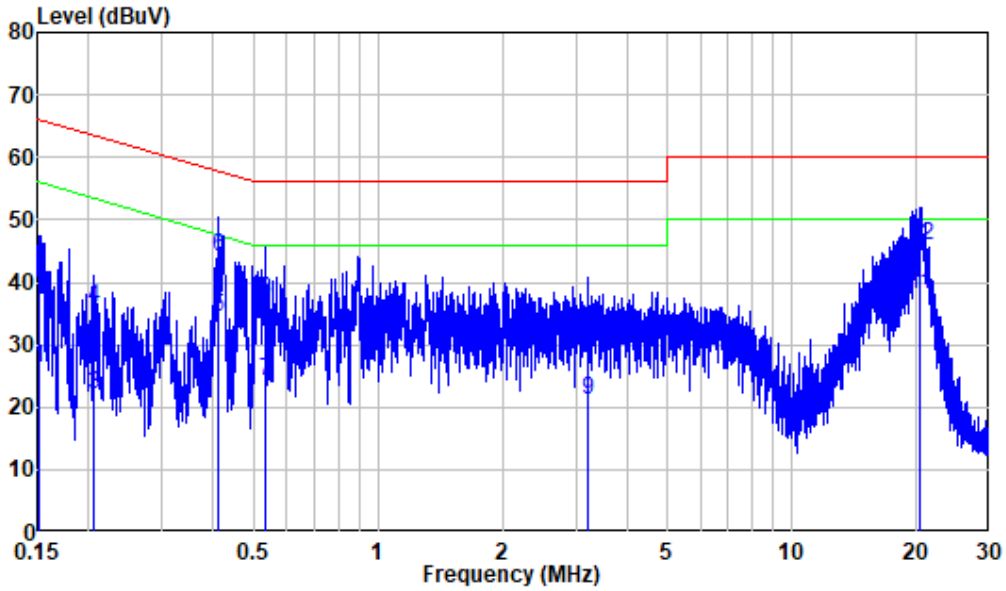

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	9.80	16.37	26.17	55.87	-29.70	Average
2	0.152	9.80	32.01	41.81	65.87	-24.06	QP
3	0.205	9.80	12.21	22.01	53.40	-31.39	Average
4	0.205	9.80	26.08	35.88	63.40	-27.52	QP
5	0.412	9.80	24.56	34.36	47.62	-13.26	Average
6	0.412	9.80	34.32	44.12	57.62	-13.50	QP
7	0.531	9.81	14.41	24.22	46.00	-21.78	Average
8	0.531	9.81	27.24	37.05	56.00	-18.95	QP
9	3.211	9.83	11.31	21.14	46.00	-24.86	Average
10	3.211	9.83	22.62	32.45	56.00	-23.55	QP
11	20.296	10.00	28.02	38.02	50.00	-11.98	Average
12	20.296	10.00	36.02	46.02	60.00	-13.98	QP

AC 120V/60 Hz, Neutral

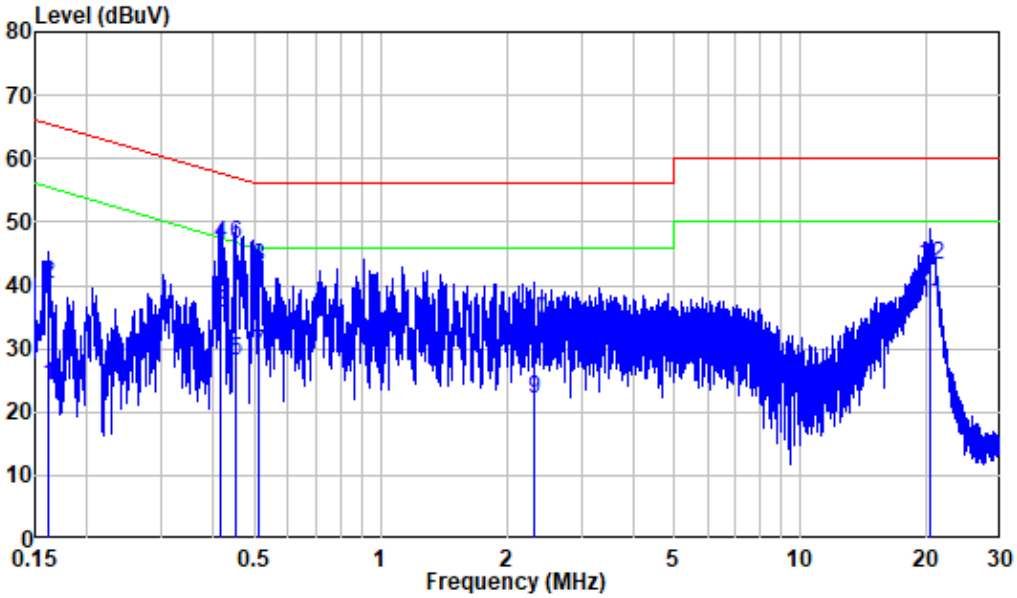

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.161	9.80	14.38	24.18	55.42	-31.24	Average
2	0.161	9.80	30.34	40.14	65.42	-25.28	QP
3	0.415	9.80	25.82	35.62	47.55	-11.93	Average
4	0.415	9.80	36.78	46.58	57.55	-10.97	QP
5	0.450	9.80	18.35	28.15	46.87	-18.72	Average
6	0.450	9.80	36.59	46.39	56.87	-10.48	QP
7	0.511	9.81	19.60	29.41	46.00	-16.59	Average
8	0.511	9.81	33.07	42.88	56.00	-13.12	QP
9	2.323	9.82	12.26	22.08	46.00	-23.92	Average
10	2.323	9.82	24.60	34.42	56.00	-21.58	QP
11	20.283	10.10	27.04	37.14	50.00	-12.86	Average
12	20.283	10.10	33.17	43.27	60.00	-16.73	QP

Model: PH660 U(1)
AC 120V/60 Hz, Line

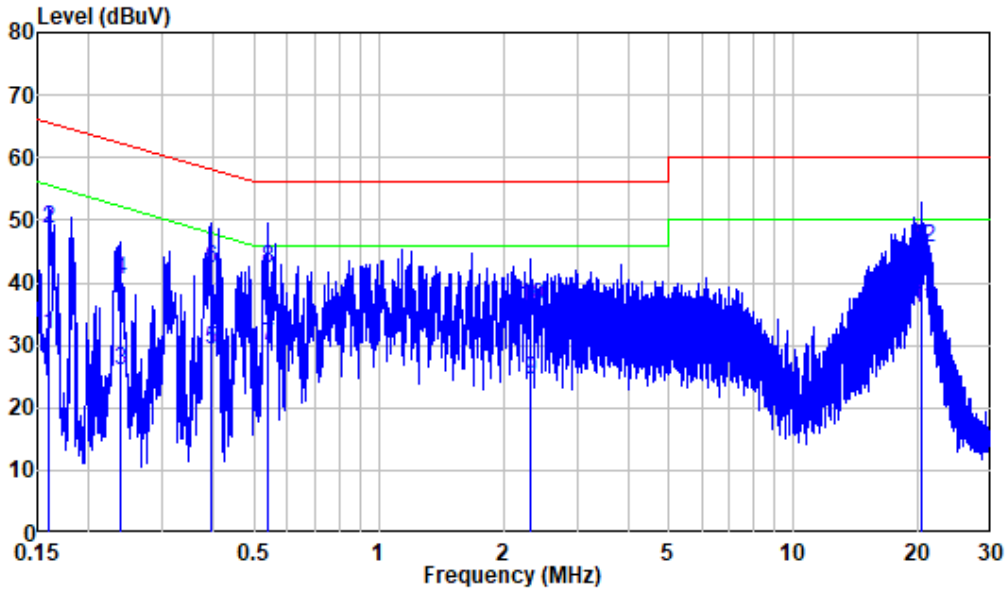

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	9.80	21.89	31.69	55.44	-23.75	Average
2	0.160	9.80	38.78	48.58	65.44	-16.86	QP
3	0.237	9.80	16.14	25.94	52.20	-26.26	Average
4	0.237	9.80	30.60	40.40	62.20	-21.80	QP
5	0.394	9.80	19.34	29.14	47.97	-18.83	Average
6	0.394	9.80	32.36	42.16	57.97	-15.81	QP
7	0.538	9.81	20.06	29.87	46.00	-16.13	Average
8	0.538	9.81	32.54	42.35	56.00	-13.65	QP
9	2.312	9.82	14.54	24.36	46.00	-21.64	Average
10	2.312	9.82	26.27	36.09	56.00	-19.91	QP
11	20.391	10.00	25.90	35.90	50.00	-14.10	Average
12	20.391	10.00	35.67	45.67	60.00	-14.33	QP

AC 120V/60 Hz, Neutral

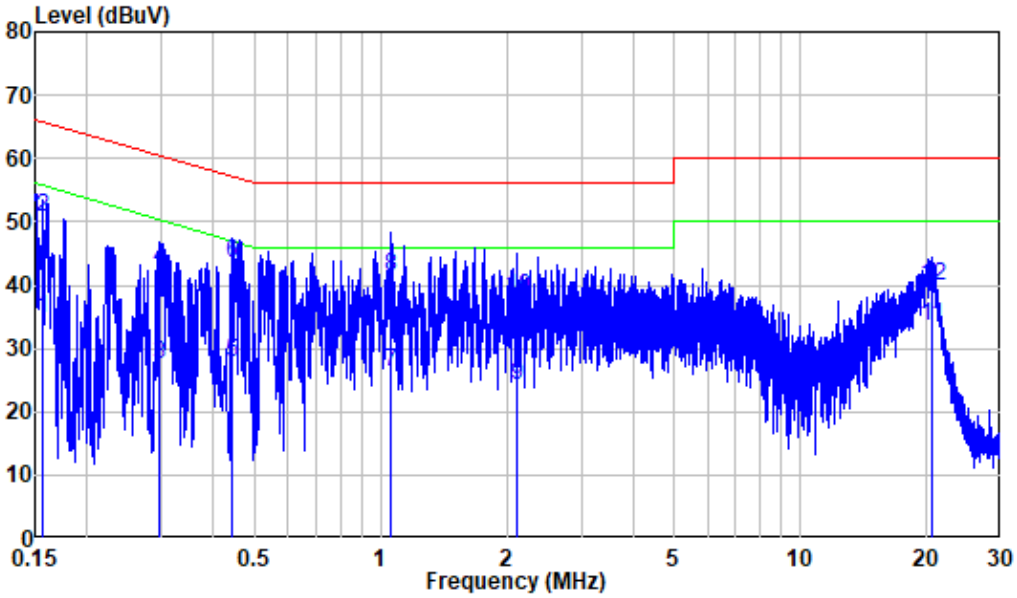

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.80	25.02	34.82	55.65	-20.83	Average
2	0.156	9.80	40.94	50.74	65.65	-14.91	QP
3	0.297	9.80	17.65	27.45	50.34	-22.89	Average
4	0.297	9.80	32.65	42.45	60.34	-17.89	QP
5	0.444	9.80	17.93	27.73	46.98	-19.25	Average
6	0.444	9.80	33.58	43.38	56.98	-13.60	QP
7	1.060	9.81	16.38	26.19	46.00	-19.81	Average
8	1.060	9.81	31.60	41.41	56.00	-14.59	QP
9	2.113	9.82	14.19	24.01	46.00	-21.99	Average
10	2.113	9.82	28.18	38.00	56.00	-18.00	QP
11	20.499	10.10	23.53	33.63	50.00	-16.37	Average
12	20.499	10.10	29.70	39.80	60.00	-20.20	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

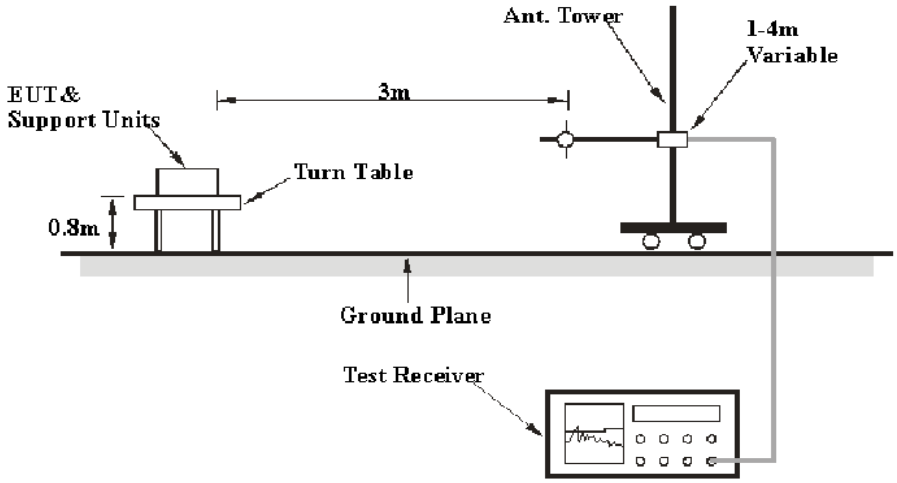

Above 1GHz:

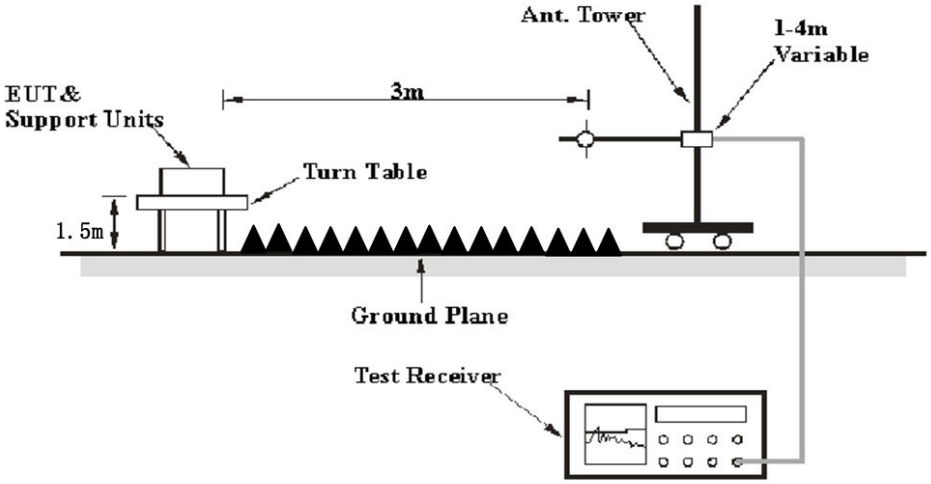

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The "**Over limit or Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Over limit/Margin = Result/Corrected Amplitude -Limit
Result/Corrected Amplitude = Reading + Factor

Test Data

Environmental Conditions

Temperature:	25.6~31℃
Relative Humidity:	50~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Level Li on 2022-06-27 for below 1GHz, Level Li and Nick Fang on 2022-06-24 and 2022-06-27 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case of orientation was Y which was recorded)

30MHz-1GHz: *(the worst case for 8DPSK Mode, Low channel)*

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.

Model: PH690 UHF

Horizontal:

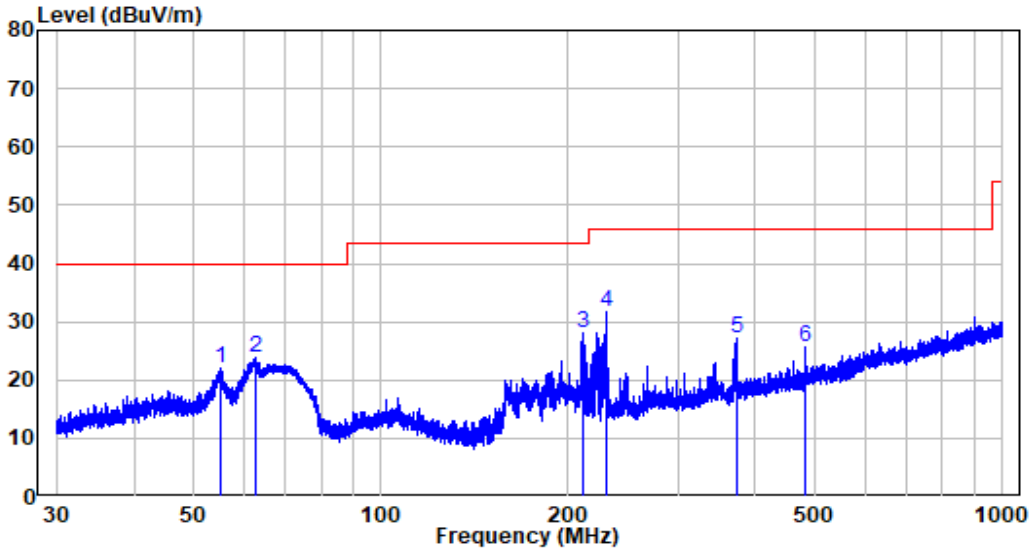

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.221	-10.26	32.41	22.15	40.00	-17.85	Peak
2	62.678	-11.68	35.41	23.73	40.00	-16.27	Peak
3	211.712	-11.80	39.74	27.94	43.50	-15.56	Peak
4	230.401	-11.09	42.79	31.70	46.00	-14.30	Peak
5	372.657	-7.29	34.57	27.28	46.00	-18.72	Peak
6	480.107	-5.00	30.57	25.57	46.00	-20.43	Peak

Vertical

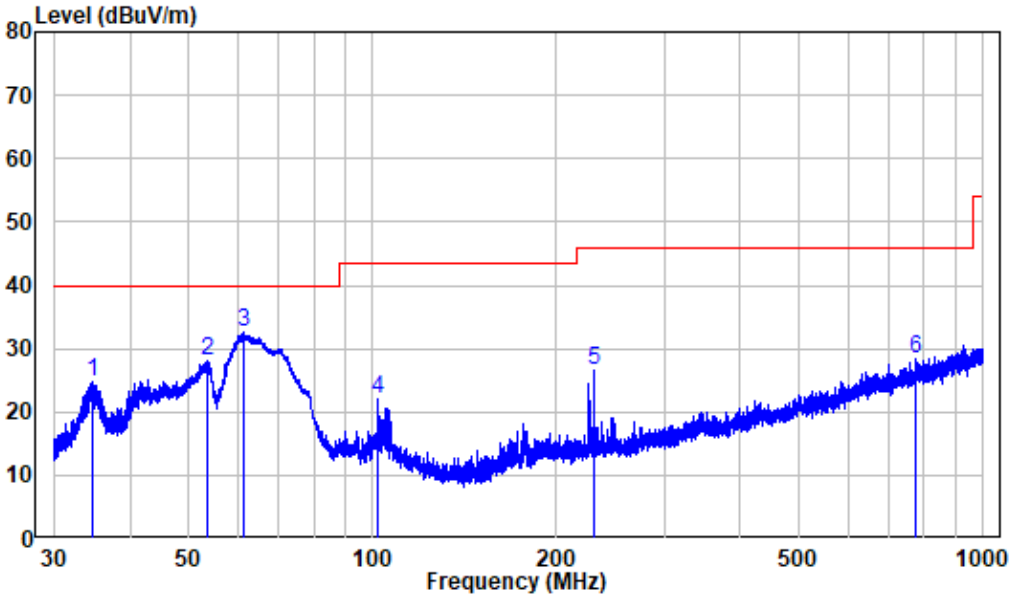

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.639	-11.66	36.50	24.84	40.00	-15.16	Peak
2	53.529	-10.27	38.20	27.93	40.00	-12.07	Peak
3	61.346	-11.17	43.69	32.52	40.00	-7.48	Peak
4	101.867	-11.58	33.71	22.13	43.50	-21.37	Peak
5	230.401	-11.09	37.65	26.56	46.00	-19.44	Peak
6	775.857	0.05	28.41	28.46	46.00	-17.54	Peak

Model: PH600 U(1)

Horizontal:

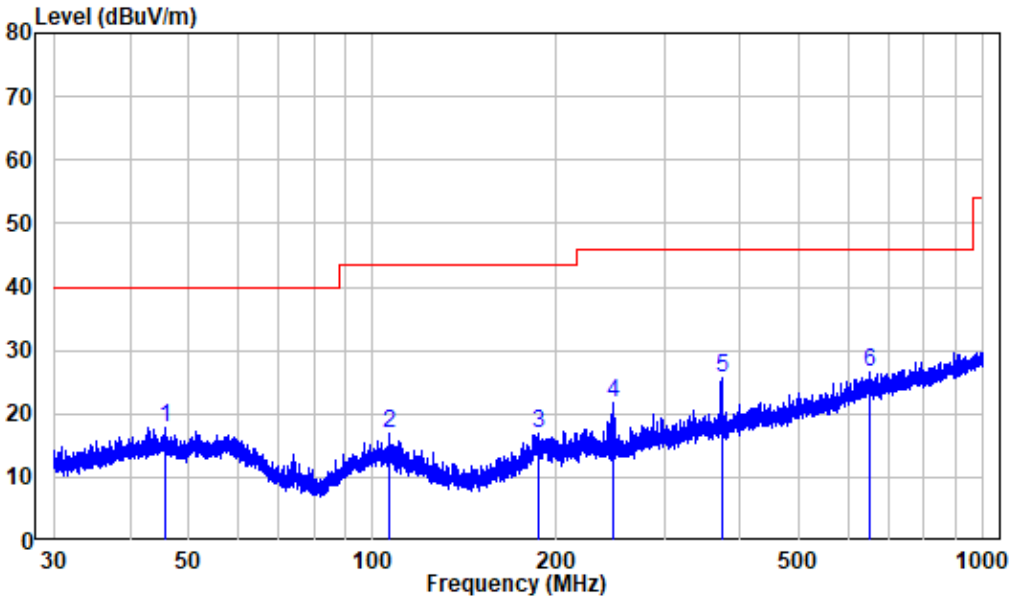

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.595	-9.97	27.85	17.88	40.00	-22.12	Peak
2	106.712	-11.95	28.86	16.91	43.50	-26.59	Peak
3	187.096	-11.93	28.72	16.79	43.50	-26.71	Peak
4	248.334	-10.68	32.28	21.60	46.00	-24.40	Peak
5	373.475	-7.28	32.88	25.60	46.00	-20.40	Peak
6	653.945	-1.61	28.17	26.56	46.00	-19.44	Peak

Vertical

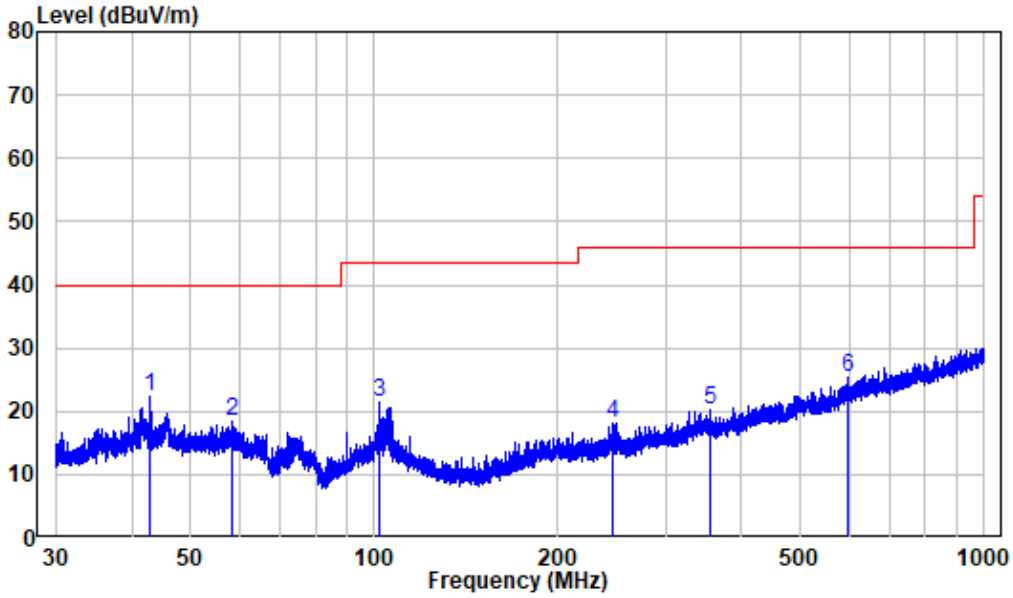

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.956	-9.96	32.27	22.31	40.00	-17.69	Peak
2	58.433	-10.06	28.46	18.40	40.00	-21.60	Peak
3	101.867	-11.58	32.99	21.41	43.50	-22.09	Peak
4	246.599	-10.63	28.67	18.04	46.00	-27.96	Peak
5	356.207	-7.54	27.82	20.28	46.00	-25.72	Peak
6	596.700	-2.59	27.93	25.34	46.00	-20.66	Peak

Model: PH660 U(1)

Horizontal:

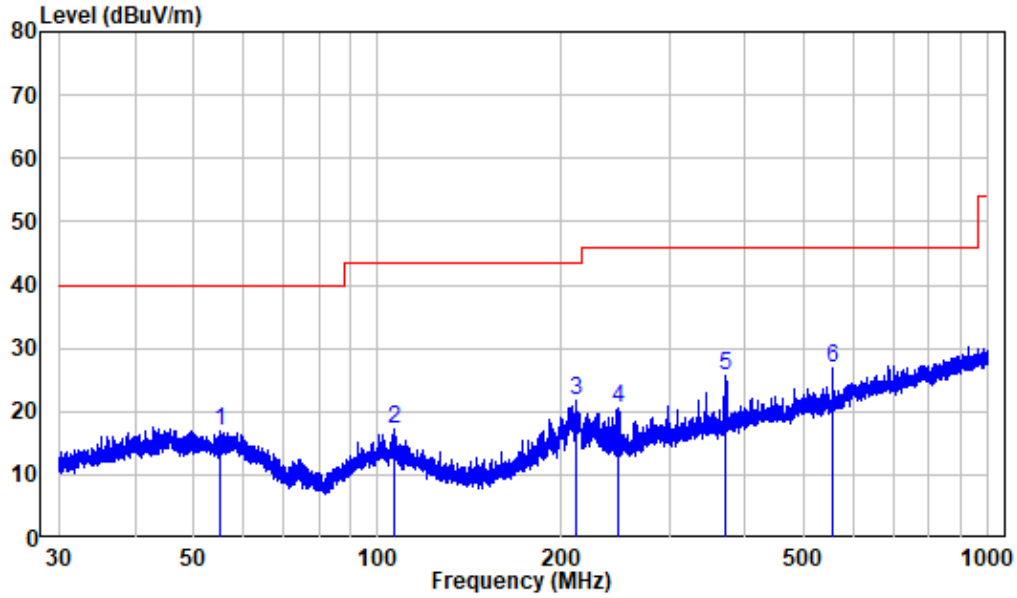

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.245	-10.26	27.04	16.78	40.00	-23.22	Peak
2	106.712	-11.95	29.18	17.23	43.50	-26.27	Peak
3	211.156	-11.81	33.59	21.78	43.50	-21.72	Peak
4	247.140	-10.66	31.16	20.50	46.00	-25.50	Peak
5	369.891	-7.31	33.12	25.81	46.00	-20.19	Peak
6	554.825	-4.13	31.07	26.94	46.00	-19.06	Peak

Vertical

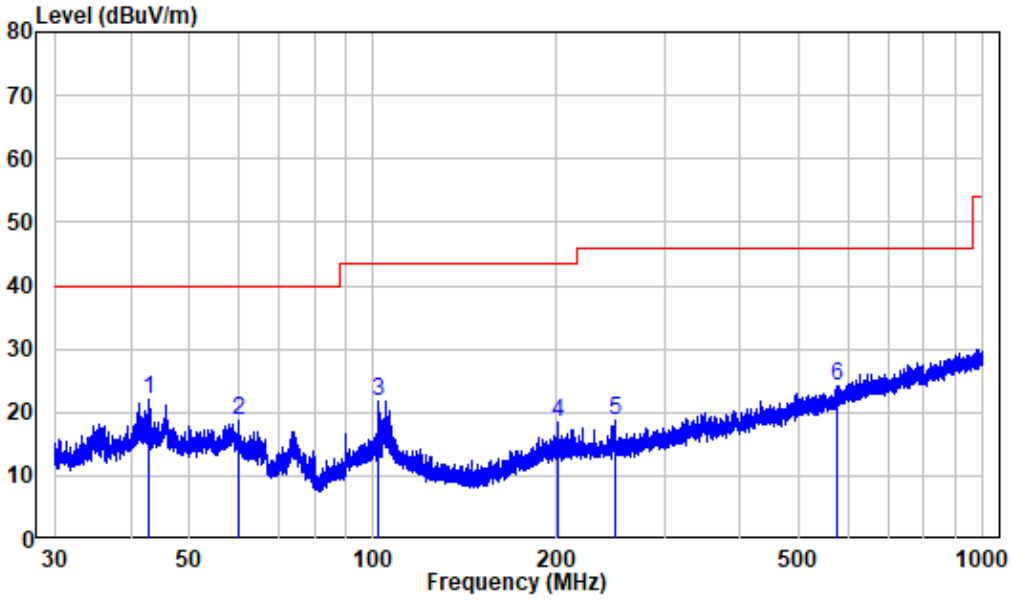

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.975	-9.96	31.85	21.89	40.00	-18.11	Peak
2	59.964	-10.61	29.29	18.68	40.00	-21.32	Peak
3	101.912	-11.58	33.44	21.86	43.50	-21.64	Peak
4	200.512	-11.44	29.98	18.54	43.50	-24.96	Peak
5	248.661	-10.70	29.39	18.69	46.00	-27.31	Peak
6	575.130	-3.79	28.04	24.25	46.00	-21.75	Peak

Above 1GHz: *(the worst case is model: PH690 UHF for 8DPSK Mode)*

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	67.37	PK	125	2.2	H	-7.24	60.13	74	-13.87
2310	42.59	AV	125	2.2	H	-7.24	35.35	54	-18.65
2390	68.46	PK	347	2.4	H	-7.22	61.24	74	-12.76
2390	43.68	AV	347	2.4	H	-7.22	36.46	54	-17.54
2310	67.46	PK	9	1.6	V	-7.24	60.22	74	-13.78
2310	42.68	AV	9	1.6	V	-7.24	35.44	54	-18.56
2390	68.93	PK	70	2	V	-7.22	61.71	74	-12.29
2390	44.15	AV	70	2	V	-7.22	36.93	54	-17.07
4804	52.29	PK	301	1.7	H	-3.51	48.78	74	-25.22
4804	53.56	PK	9	1.1	V	-3.51	50.05	74	-23.95
Middle Channel (2441 MHz)									
4882	54.29	PK	29	1.9	H	-3.37	50.92	74	-23.08
4882	54.32	PK	185	1.8	V	-3.37	50.95	74	-23.05
High Channel (2480 MHz)									
2483.5	69.15	PK	330	1.2	H	-7.2	61.95	74	-12.05
2483.5	44.37	AV	330	1.2	H	-7.2	37.17	54	-16.83
2500	69.6	PK	237	1.6	H	-7.18	62.42	74	-11.58
2500	44.82	AV	237	1.6	H	-7.18	37.64	54	-16.36
2483.5	68.59	PK	109	2	V	-7.2	61.39	74	-12.61
2483.5	43.81	AV	109	2	V	-7.2	36.61	54	-17.39
2500	68.54	PK	295	1.1	V	-7.18	61.36	74	-12.64
2500	43.76	AV	295	1.1	V	-7.18	36.58	54	-17.42
4960	54.13	PK	24	1.1	H	-3.01	51.12	74	-22.88
4960	54.26	PK	165	1.5	V	-3.01	51.25	74	-22.75

Note:
Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Corrected. Amplitude - Limit
The other spurious emission which is in the noise floor level was not recorded.
The test result of peak was less than the limit of average, so just peak value were recorded.

1-18GHz

Pre-scan for Peak

High Channel

Horizontal:

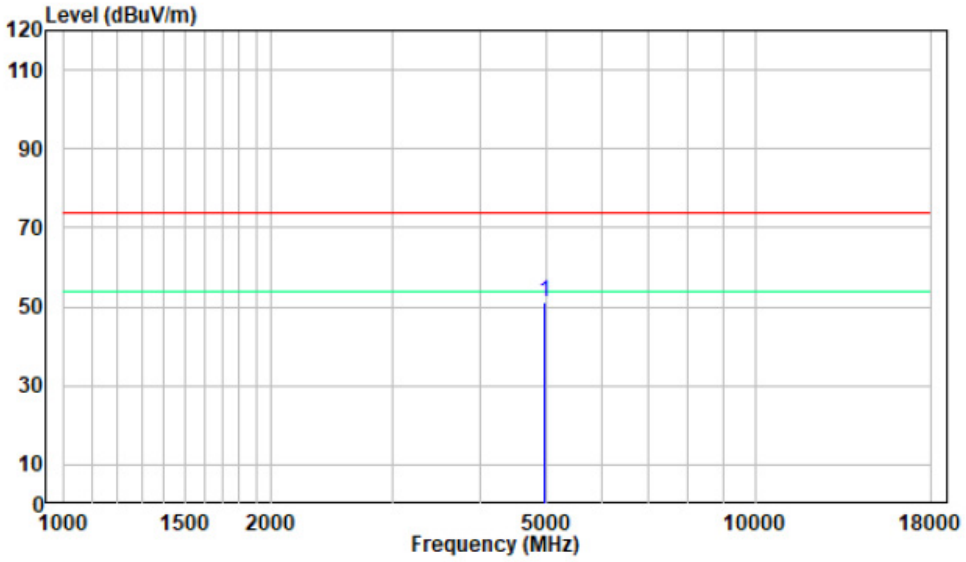

Vertical:

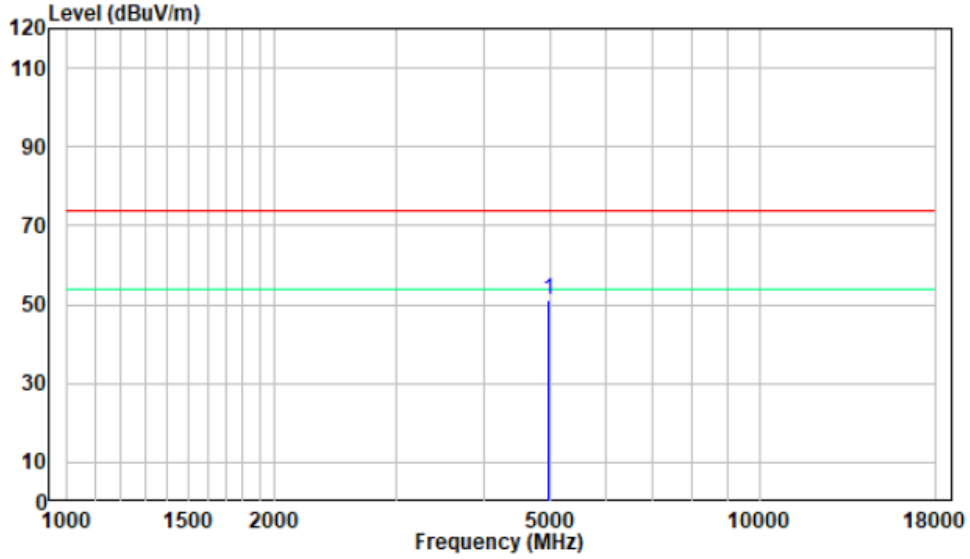

18-25GHz

Pre-scan for Peak

High Channel

Horizontal:

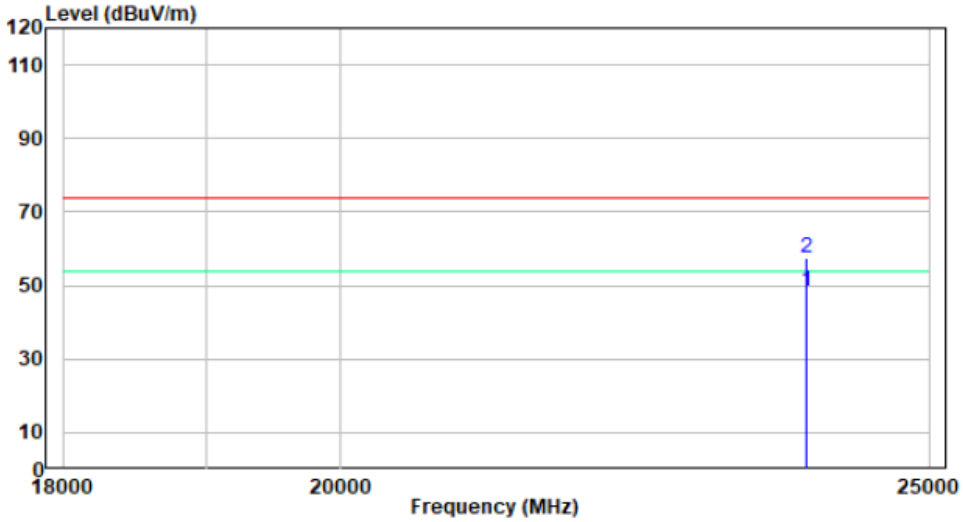

Vertical:

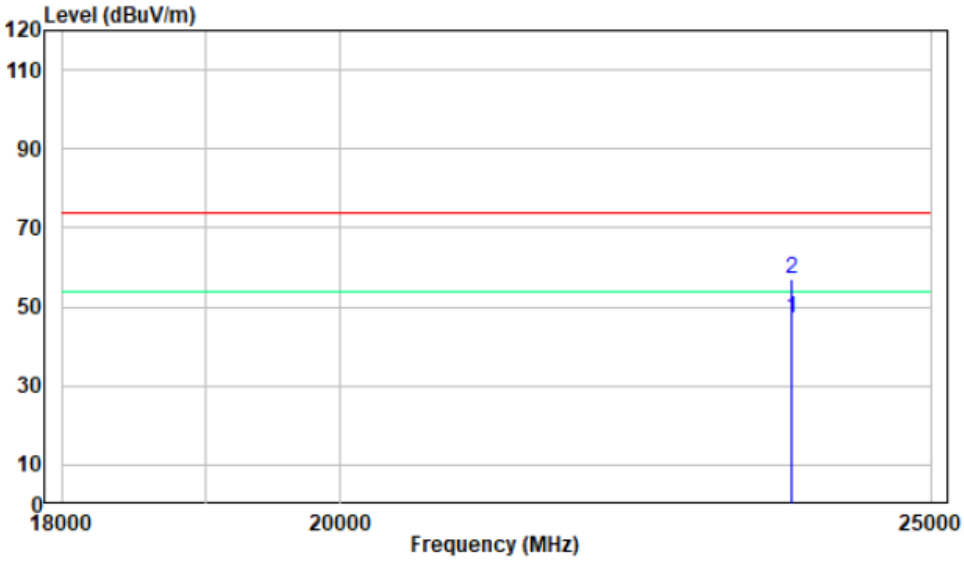

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-06-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:
• The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

• The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

• The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.

• The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.
For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-06-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that
a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.

2. Set the EUT in hopping mode from first channel to last.

3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-06-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW ≥ 3×RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-06-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-06-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-06-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

APPENDIX

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.04	---	---
		2441	1.04	---	---
		2480	1.03	---	---
2DH1	Ant1	2402	1.36	---	---
		2441	1.36	---	---
		2480	1.36	---	---
3DH1	Ant1	2402	1.32	---	---
		2441	1.32	---	---
		2480	1.32	---	---

Test Graphs

DH1_Ant1_2402

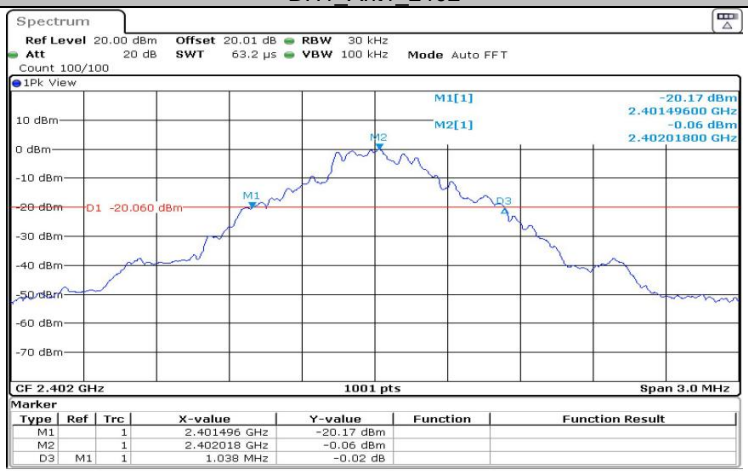

DH1_Ant1_2441

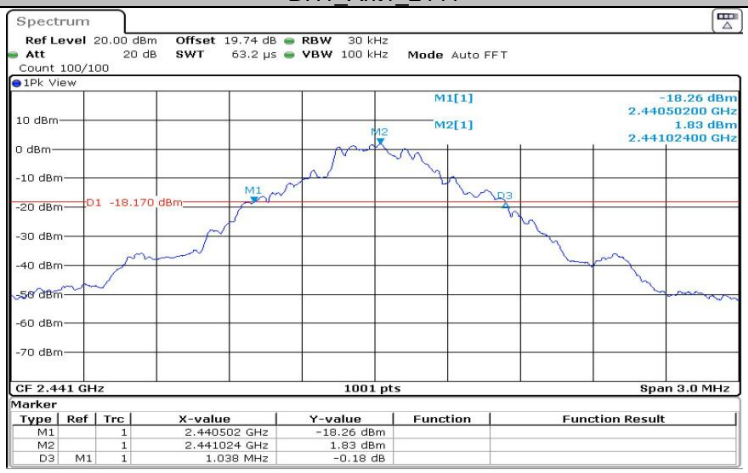

DH1_Ant1_2480

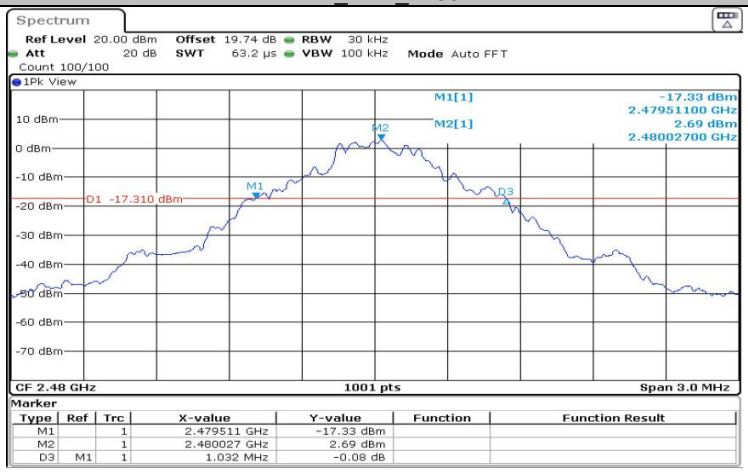

2DH1_Ant1_2402

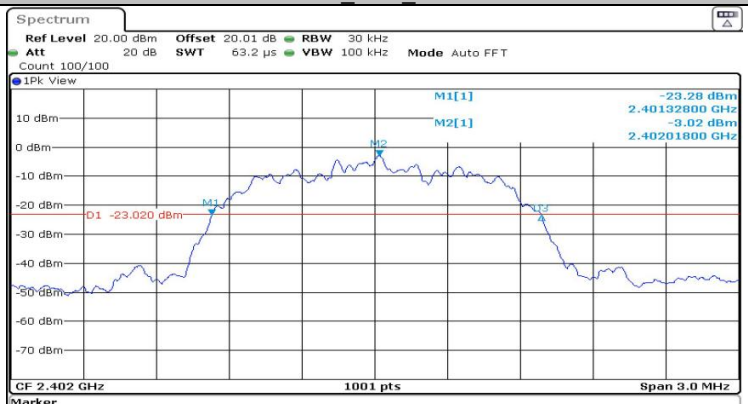

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.401328 GHz	-23.28 dBm		
M2		1	2.402018 GHz	-3.02 dBm		
D3	M1	1	1.359 MHz	-0.13 dB		

Date: 27.JUN.2022 20:00:53

2DH1_Ant1_2441

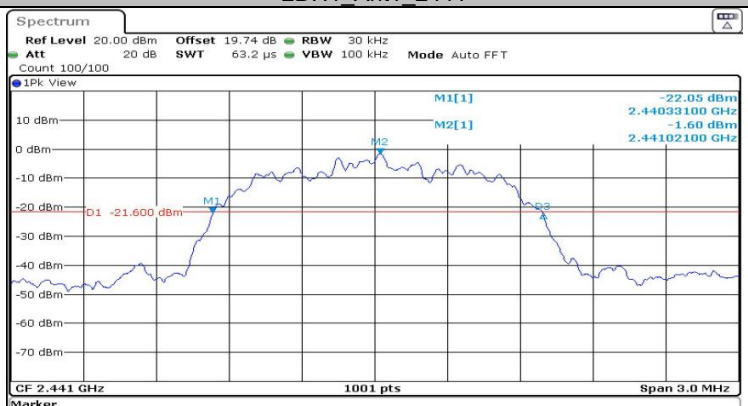

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.440331 GHz	-22.05 dBm		
M2		1	2.441021 GHz	-1.60 dBm		
D3	M1	1	1.362 MHz	-0.09 dB		

Date: 27.JUN.2022 20:02:13

2DH1_Ant1_2480

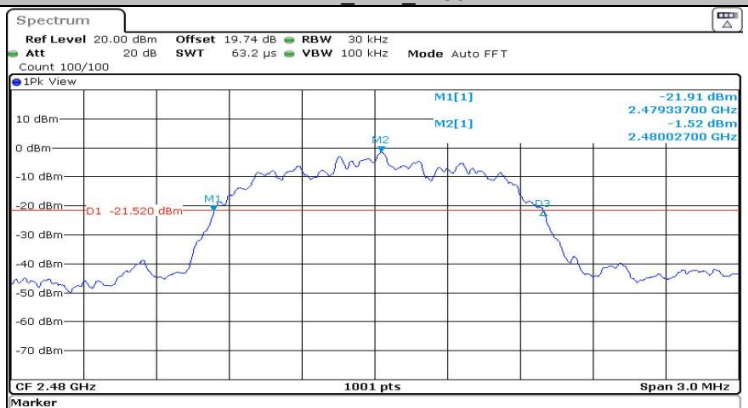

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.479337 GHz	-21.91 dBm		
M2		1	2.480027 GHz	-1.52 dBm		
D3	M1	1	1.359 MHz	0.26 dB		

Date: 27.JUN.2022 20:03:25

3DH1_Ant1_2402

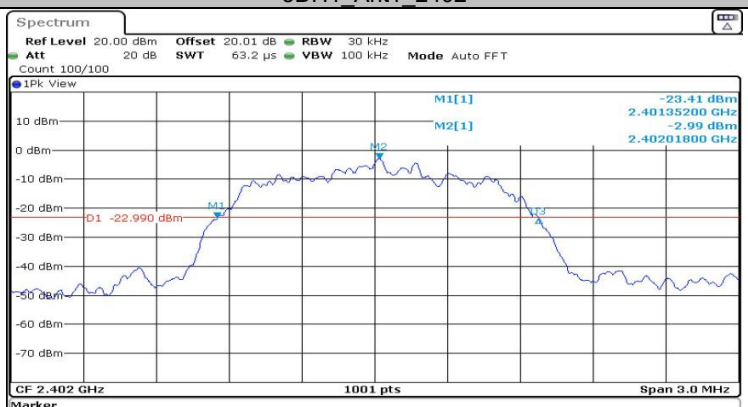

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.401352 GHz	-23.41 dBm		
M2		1	2.402018 GHz	-2.99 dBm		
D3	M1	1	1.323 MHz	-0.03 dB		

Date: 27.JUN.2022 20:23:27

3DH1_Ant1_2441

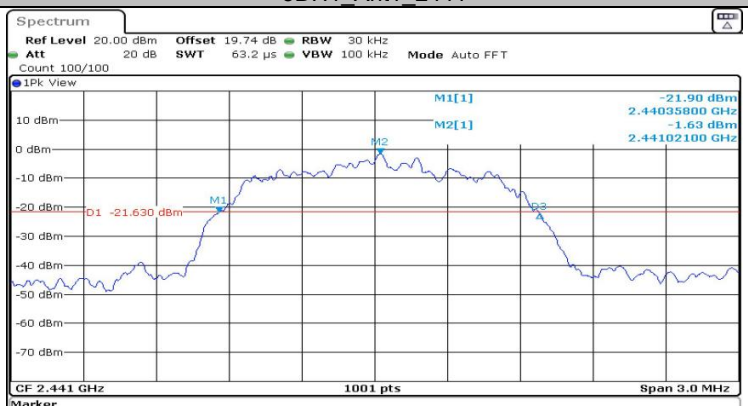

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.440358 GHz	-21.90 dBm		
M2		1	2.441021 GHz	-1.63 dBm		
D3	M1	1	1.32 MHz	-0.04 dB		

Date: 27.JUN.2022 20:22:19

3DH1_Ant1_2480

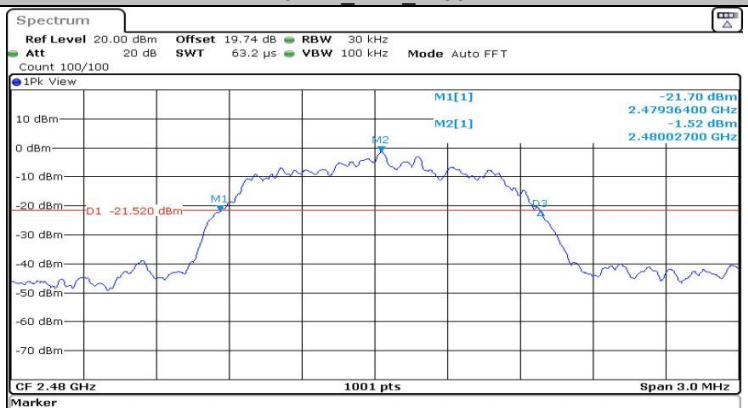

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.479364 GHz	-21.70 dBm		
M2		1	2.480027 GHz	-1.52 dBm		
D3	M1	1	1.317 MHz	0.16 dB		

Date: 27.JUN.2022 20:20:57

Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.941	---	---
		2441	0.941	---	---
		2480	0.941	---	---
2DH1	Ant1	2402	1.205	---	---
		2441	1.205	---	---
		2480	1.205	---	---
3DH1	Ant1	2402	1.187	---	---
		2441	1.187	---	---
		2480	1.187	---	---

Test Graphs

DH1_Ant1_2402

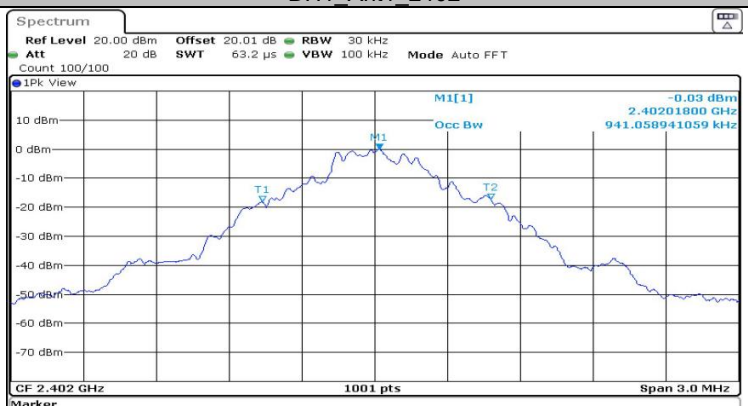

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402018 GHz	-0.03 dBm		
T1		1	2.40153546 GHz	-18.21 dBm	Occ Bw	941.058941059 kHz
T2		1	2.40247652 GHz	-17.34 dBm		

Date: 27.JUN.2022 19:55:43

DH1_Ant1_2441

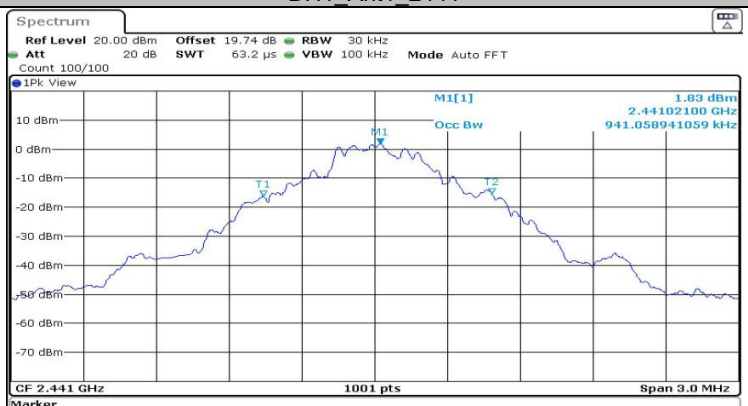

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.441021 GHz	1.83 dBm		
T1		1	2.44054146 GHz	-16.37 dBm	Occ Bw	941.058941059 kHz
T2		1	2.44148252 GHz	-15.57 dBm		

Date: 27.JUN.2022 19:54:09

DH1_Ant1_2480

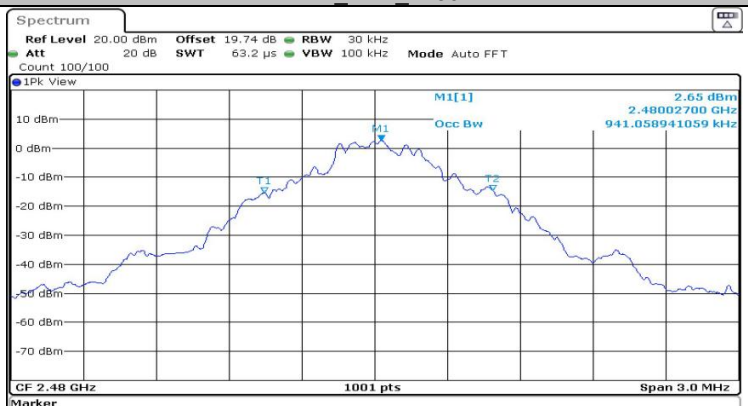

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.480027 GHz	2.65 dBm		
T1		1	2.47954446 GHz	-15.37 dBm	Occ Bw	941.058941059 kHz
T2		1	2.48048551 GHz	-14.54 dBm		

Date: 27.JUN.2022 19:56:52

2DH1_Ant1_2402

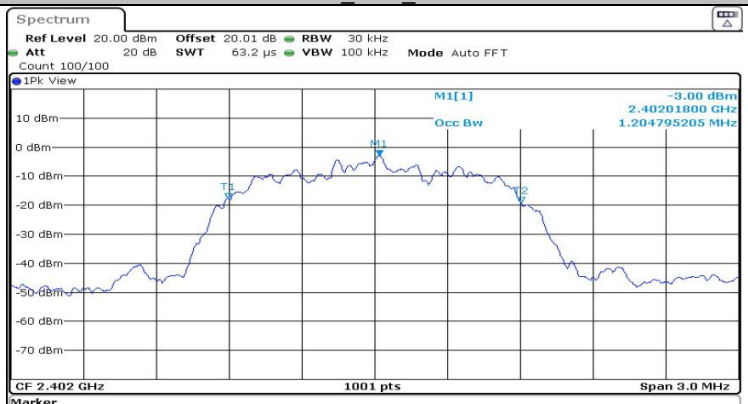

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402018 GHz	-3.00 dBm		
T1		1	2.4013976 GHz	-17.76 dBm	Occ Bw	1.204795205 MHz
T2		1	2.4026024 GHz	-19.18 dBm		

Date: 27.JUN.2022 20:01:04

2DH1_Ant1_2441

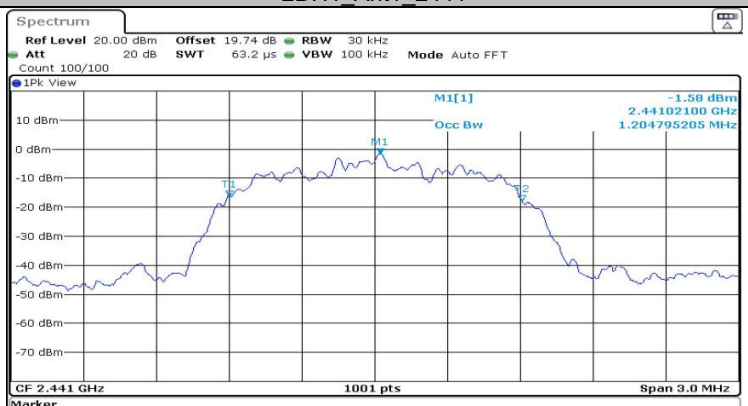

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.441021 GHz	-1.58 dBm		
T1		1	2.4404006 GHz	-16.19 dBm	Occ Bw	1.204795205 MHz
T2		1	2.44160539 GHz	-17.73 dBm		

Date: 27.JUN.2022 20:02:25

2DH1_Ant1_2480

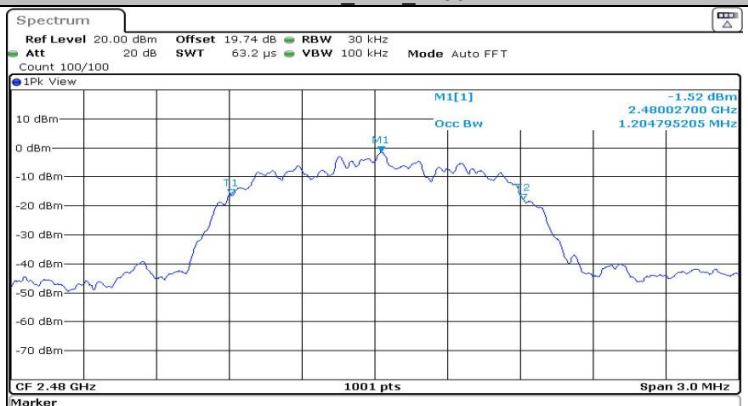

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.480027 GHz	-1.52 dBm		
T1		1	2.47940659 GHz	-16.28 dBm	Occ Bw	1.204795205 MHz
T2		1	2.48061139 GHz	-17.75 dBm		

Date: 27.JUN.2022 20:03:37

3DH1_Ant1_2402

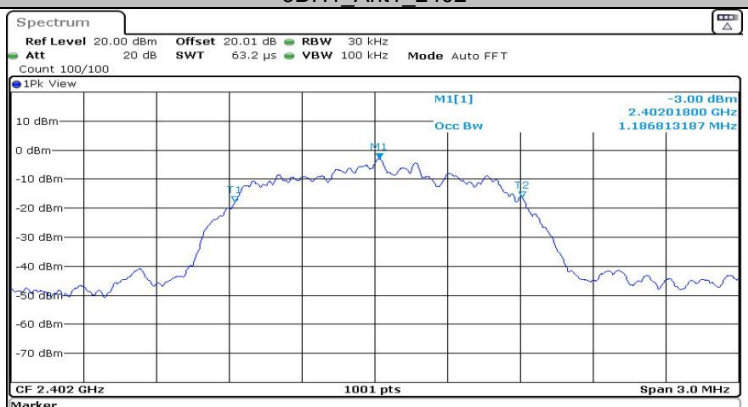

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402018 GHz	-3.00 dBm		
T1		1	2.40142158 GHz	-17.91 dBm	Occ Bw	1.186813187 MHz
T2		1	2.40260839 GHz	-16.33 dBm		

Date: 27.JUN.2022 20:23:39

3DH1_Ant1_2441

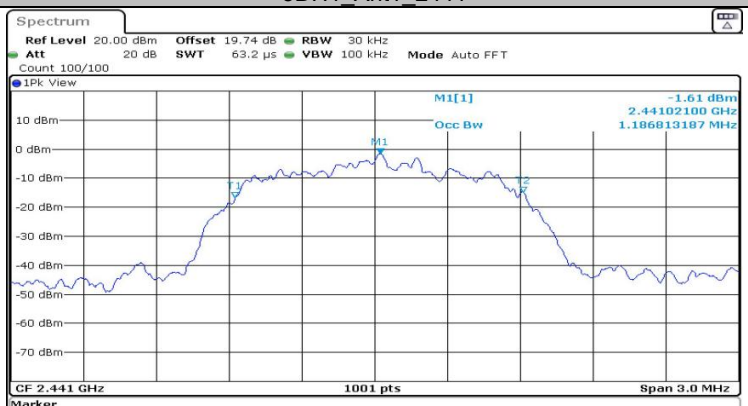

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.441021 GHz	-1.61 dBm		
T1		1	2.44042458 GHz	-16.82 dBm	Occ Bw	1.186813187 MHz
T2		1	2.44161139 GHz	-14.80 dBm		

Date: 27.JUN.2022 20:22:31

3DH1_Ant1_2480

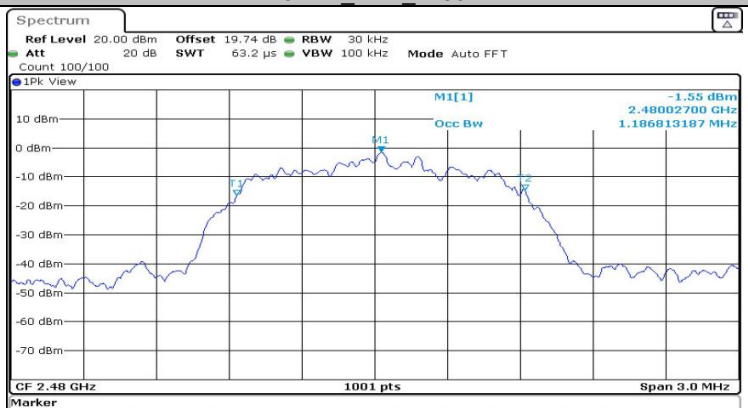

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.480027 GHz	-1.55 dBm		
T1		1	2.47943057 GHz	-16.50 dBm	Occ Bw	1.186813187 MHz
T2		1	2.48061738 GHz	-14.74 dBm		

Date: 27.JUN.2022 20:21:09

Appendix C: Maximum conducted Peak output power

Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	3.17	≤20.97	PASS
		2441	5.03	≤20.97	PASS
		2480	5.85	≤20.97	PASS
2DH1	Ant1	2402	2.49	≤20.97	PASS
		2441	3.90	≤20.97	PASS
		2480	3.97	≤20.97	PASS
3DH1	Ant1	2402	2.92	≤20.97	PASS
		2441	4.27	≤20.97	PASS
		2480	4.35	≤20.97	PASS

Test Graphs

DH1_Ant1_2402

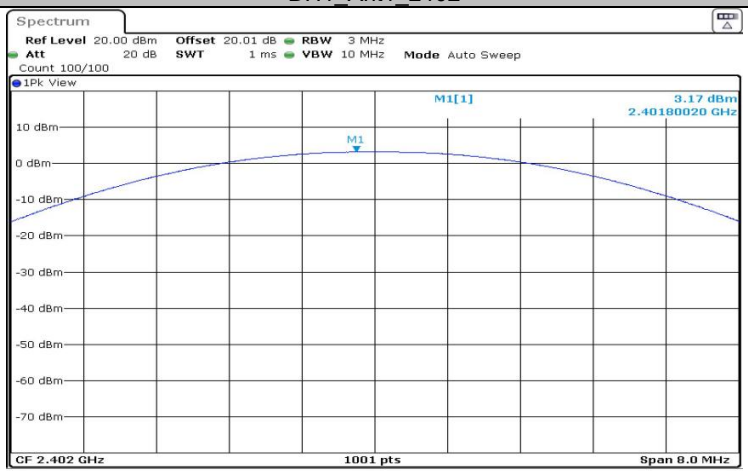

Date: 27.JUN.2022 19:56:02

DH1_Ant1_2441

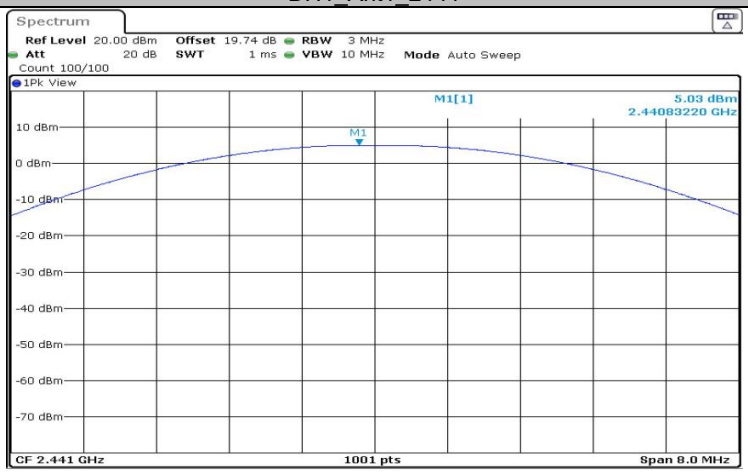

Date: 27.JUN.2022 19:54:28

DH1_Ant1_2480

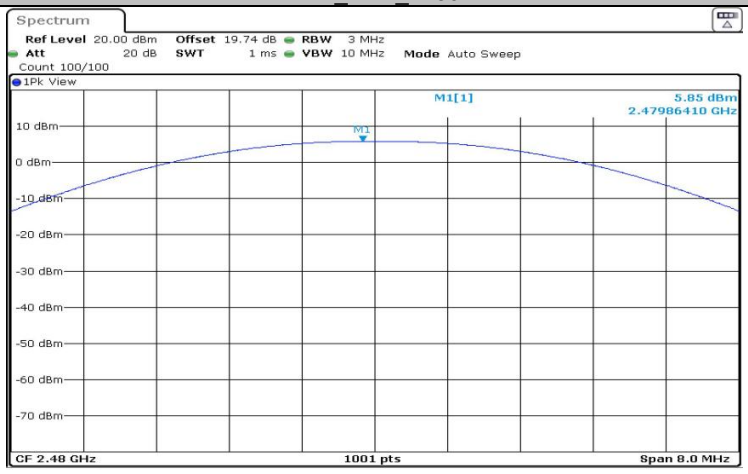

Date: 27.JUN.2022 19:57:43

2DH1_Ant1_2402

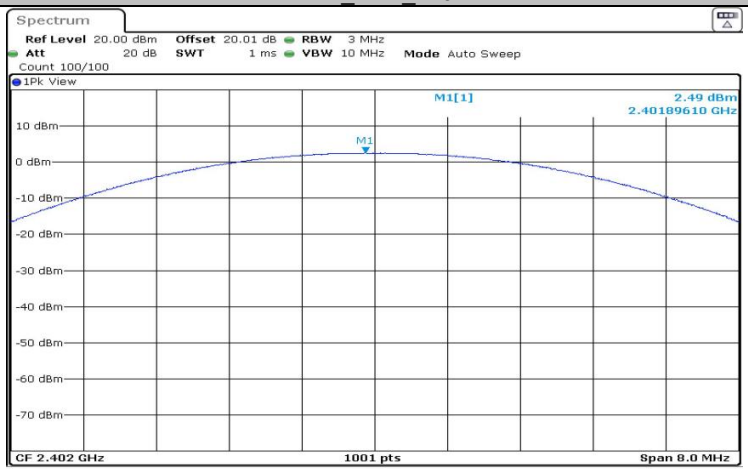

Date: 27.JUN.2022 20:01:28

2DH1_Ant1_2441

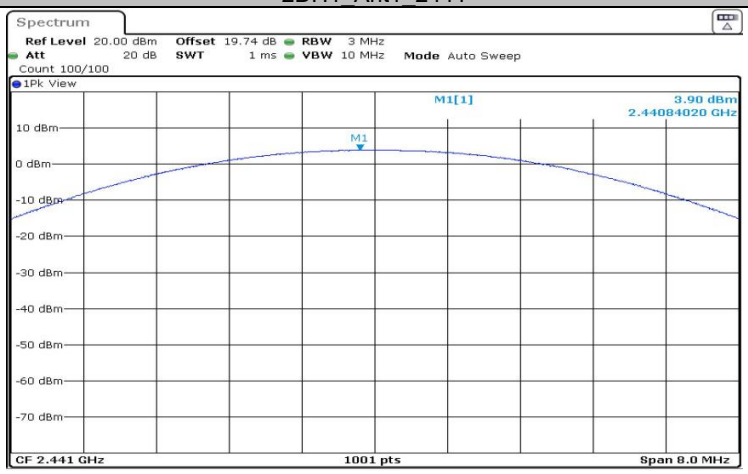

Date: 27.JUN.2022 20:02:34

2DH1_Ant1_2480

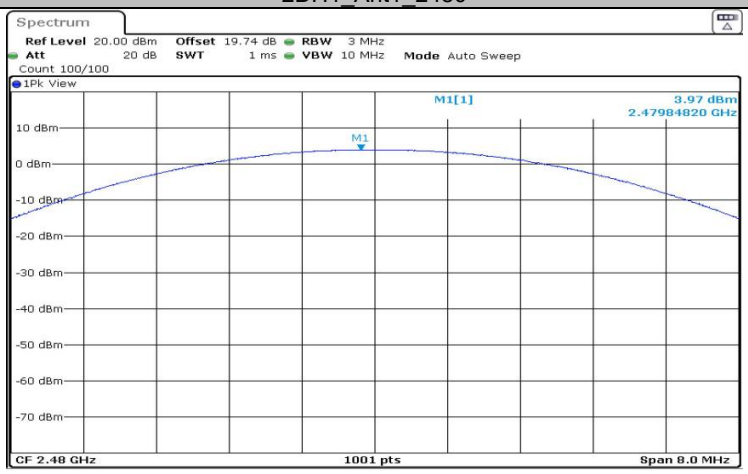

Date: 27.JUN.2022 20:04:00

3DH1_Ant1_2402

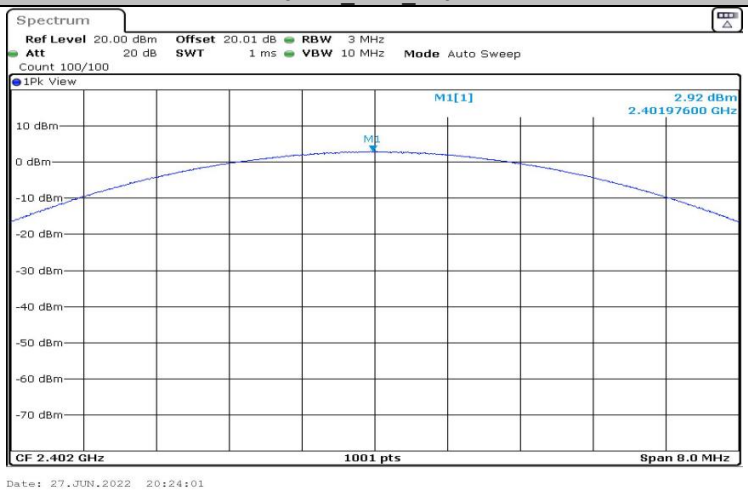

3DH1_Ant1_2441

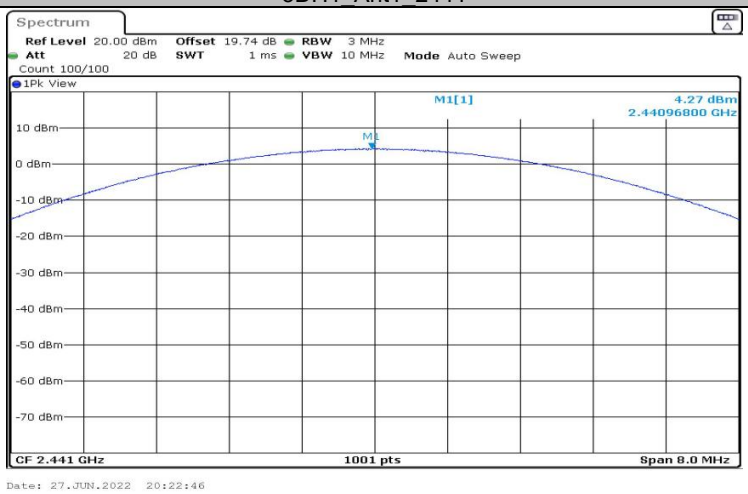

3DH1_Ant1_2480

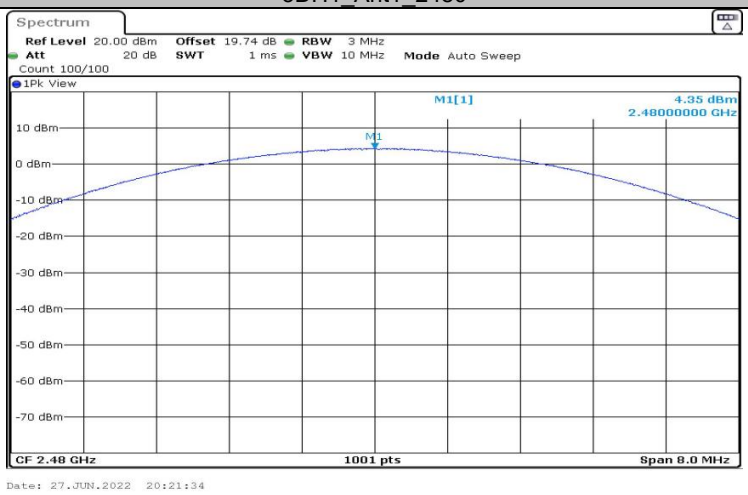

Appendix D: Carrier frequency separation

Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.000	≥0.693	PASS
2DH1	Ant1	Hop	1.003	≥0.907	PASS
3DH1	Ant1	Hop	1.003	≥0.880	PASS

Note: the limit is 2/3 * 20dB bandwidth

Test Graphs

DH1_Ant1_Hop

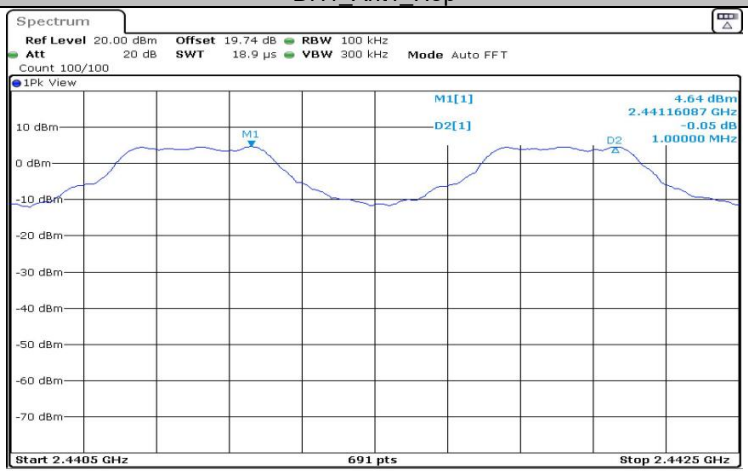

2DH1_Ant1_Hop

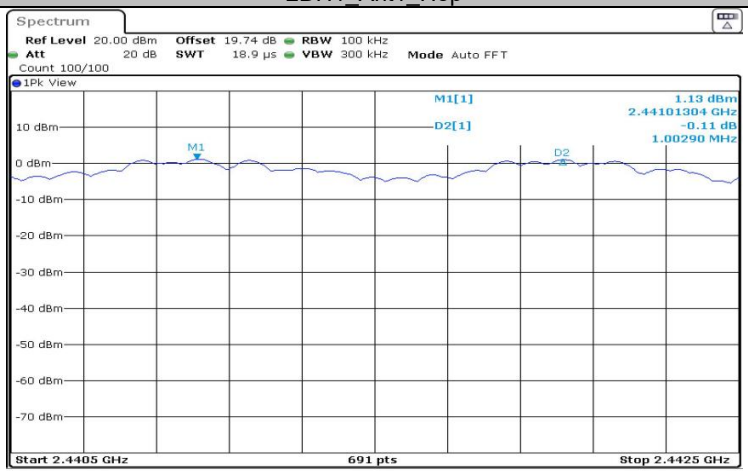

3DH1_Ant1_Hop

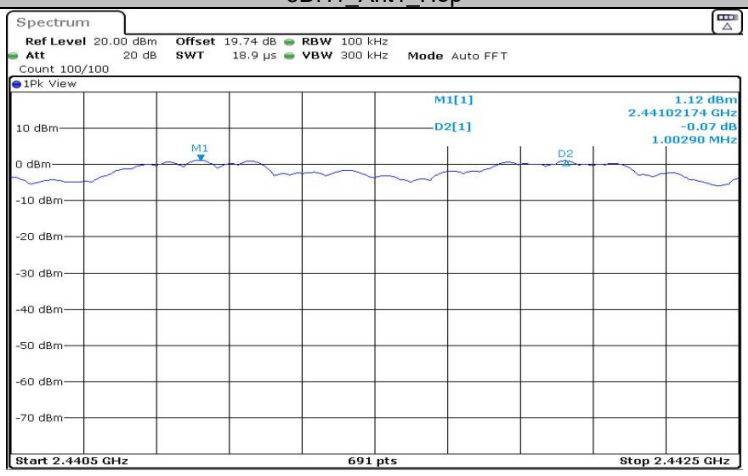

Appendix E: Time of occupancy

Test Result

Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	330	0.125	≤0.4	PASS
DH3	Ant1	Hop	1.63	150	0.244	≤0.4	PASS
DH5	Ant1	Hop	2.87	120	0.344	≤0.4	PASS
2DH1	Ant1	Hop	0.39	330	0.127	≤0.4	PASS
2DH3	Ant1	Hop	1.63	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.87	110	0.316	≤0.4	PASS
3DH1	Ant1	Hop	0.39	330	0.127	≤0.4	PASS
3DH3	Ant1	Hop	1.63	160	0.261	≤0.4	PASS
3DH5	Ant1	Hop	2.87	130	0.373	≤0.4	PASS

Note 1：A period time=0.4*79=31.6(S), Result=BurstWidth*Totalhops

Note 2: Totalhops=Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)

Test Graphs

DH1_Ant1_Hop

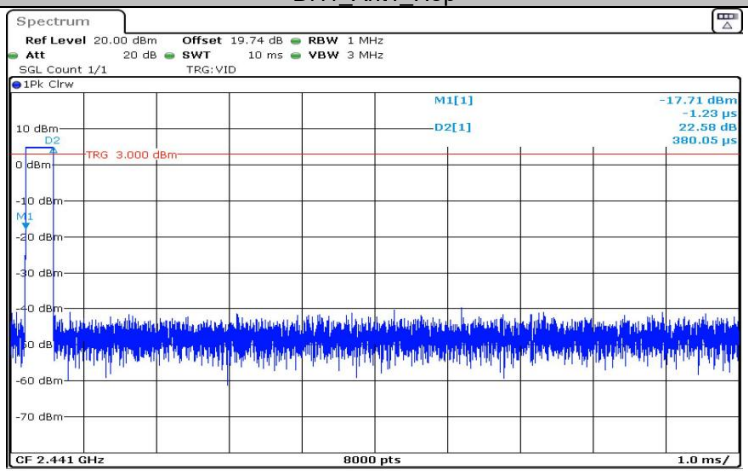

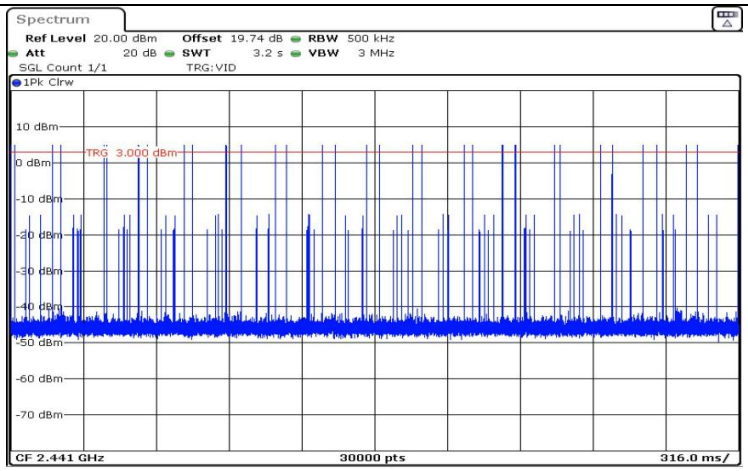

DH3_Ant1_Hop

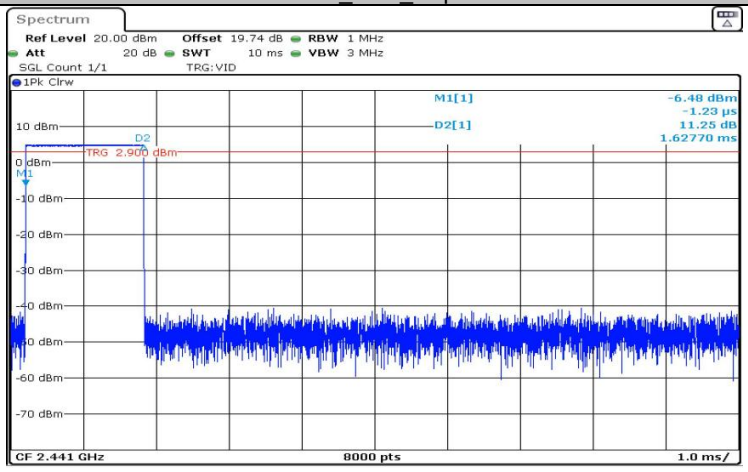

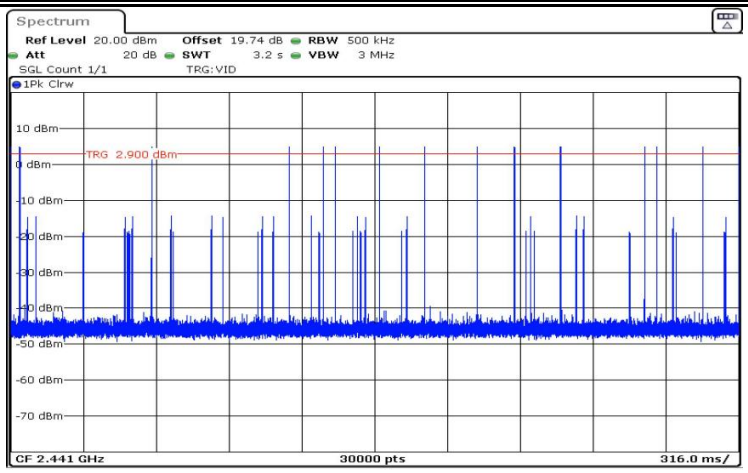
Spectrum
Ref Level 20.00 dBm Offset 19.74 dB RBW 500 kHz
Att 20 dB SWT 3.2 s VBW 3 MHz
SGL Count 1/1 TRG:VID
1Pk Clrw
TRG 2.900 dBm
CF 2.441 GHz 30000 pts 316.0 ms/
Date: 27.JUN.2022 20:46:14

DH5_Ant1_Hop

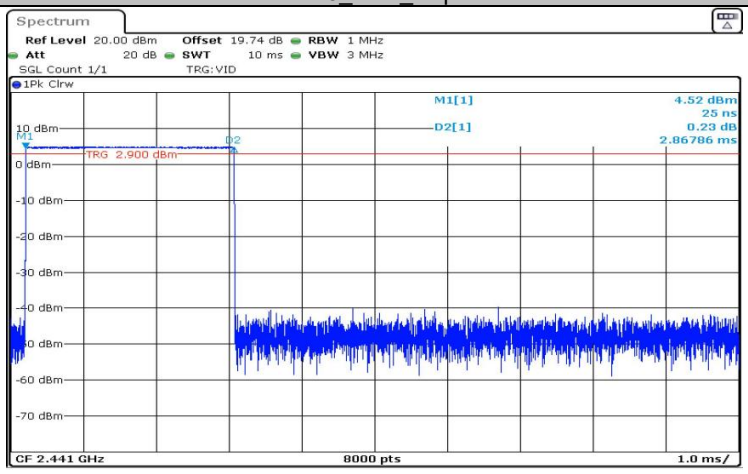
Spectrum
Ref Level 20.00 dBm Offset 19.74 dB RBW 1 MHz
Att 20 dB SWT 10 ms VBW 3 MHz
SGL Count 1/1 TRG:VID
1Pk Clrw
M1[1] 4.52 dBm
25 ns
D2[1] 0.23 dB
2.86786 ms
TRG 2.900 dBm
CF 2.441 GHz 8000 pts 1.0 ms/
Date: 27.JUN.2022 20:32:01

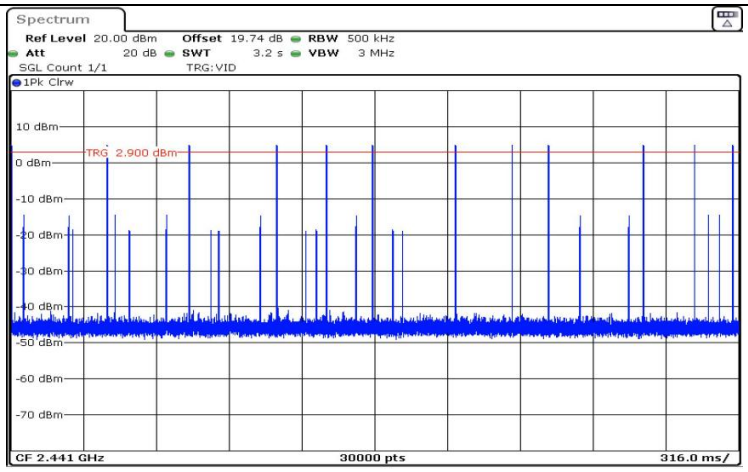
Spectrum
Ref Level 20.00 dBm Offset 19.74 dB RBW 500 kHz
Att 20 dB SWT 3.2 s VBW 3 MHz
SGL Count 1/1 TRG:VID
1Pk Clrw
TRG 2.900 dBm
CF 2.441 GHz 30000 pts 316.0 ms/
Date: 27.JUN.2022 20:32:07

2DH1_Ant1_Hop

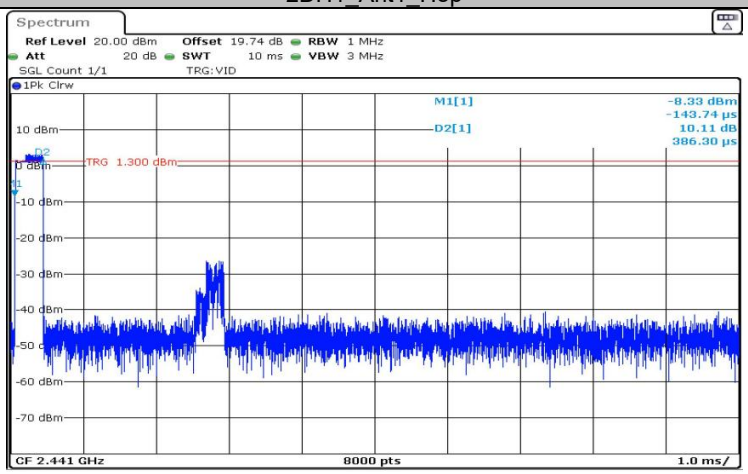

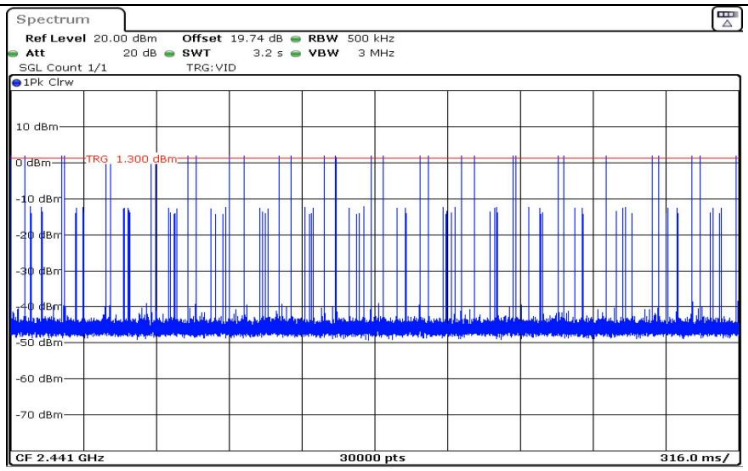

2DH3_Ant1_Hop

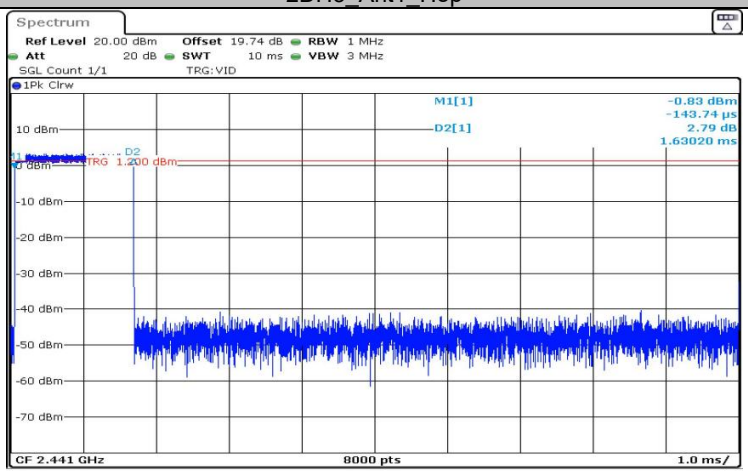

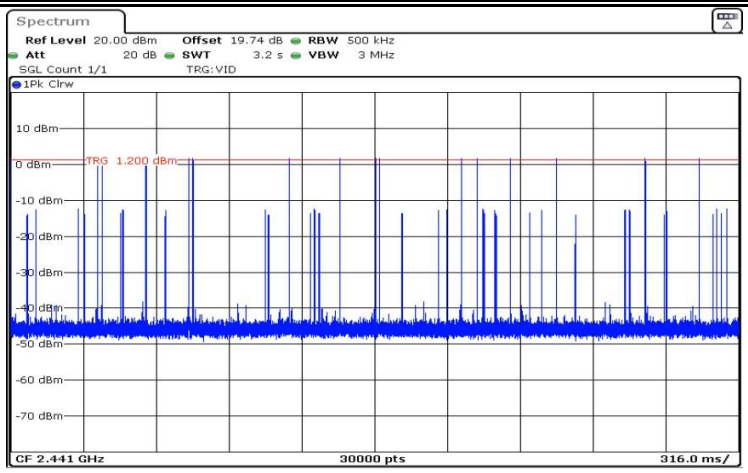

2DH5_Ant1_Hop

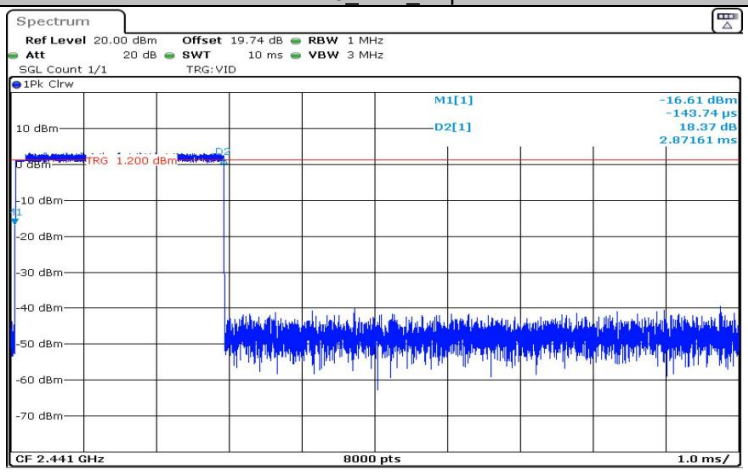

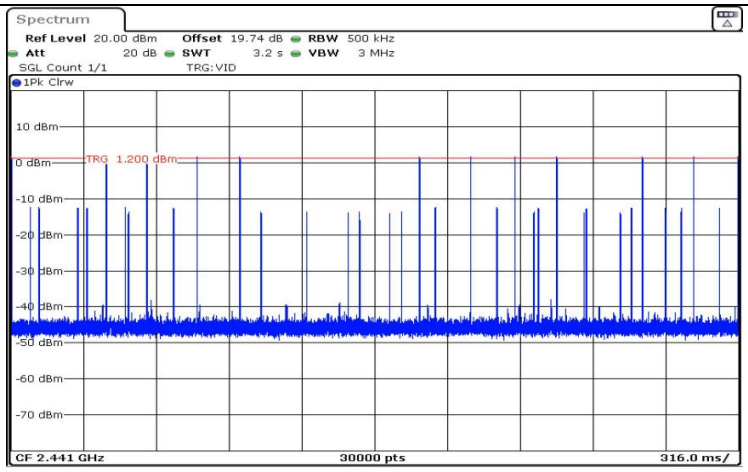

3DH1_Ant1_Hop

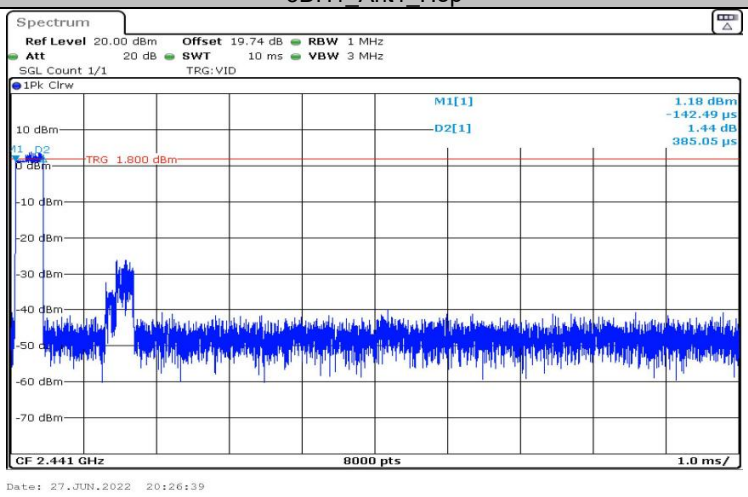

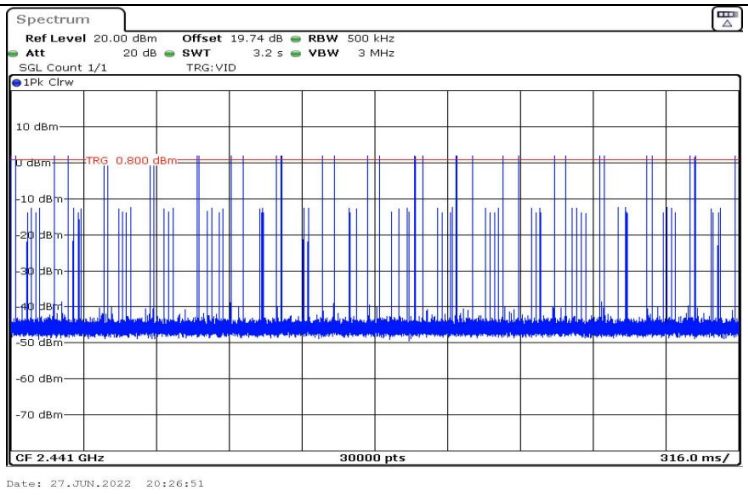

3DH3_Ant1_Hop

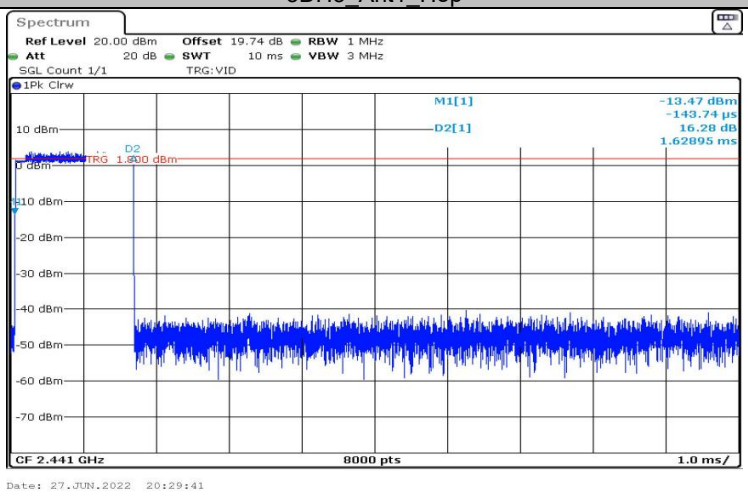

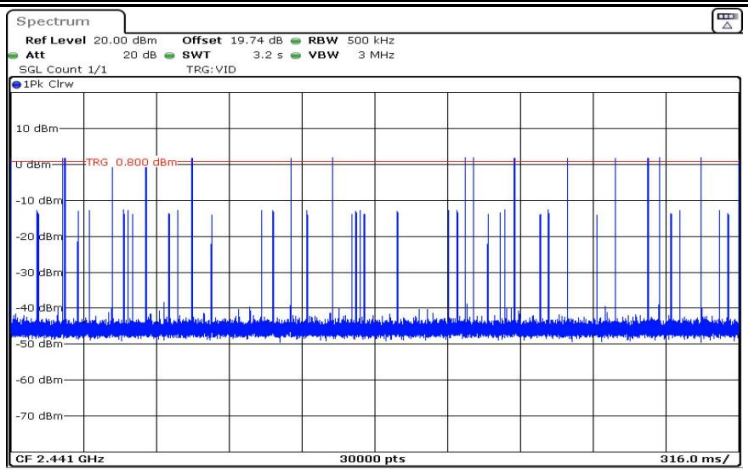

3DH5_Ant1_Hop

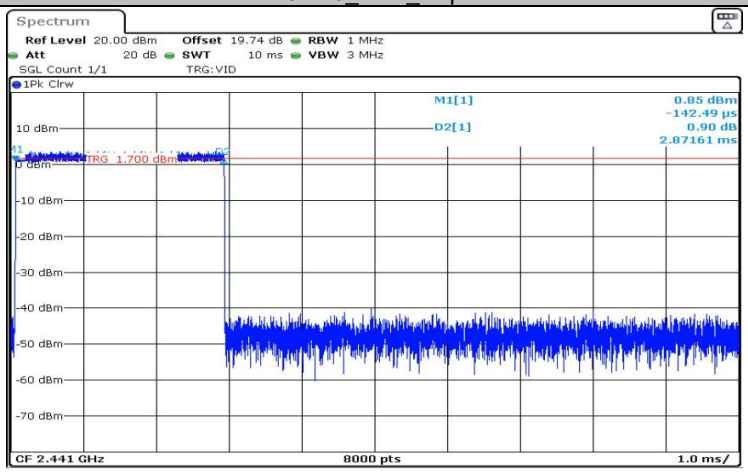

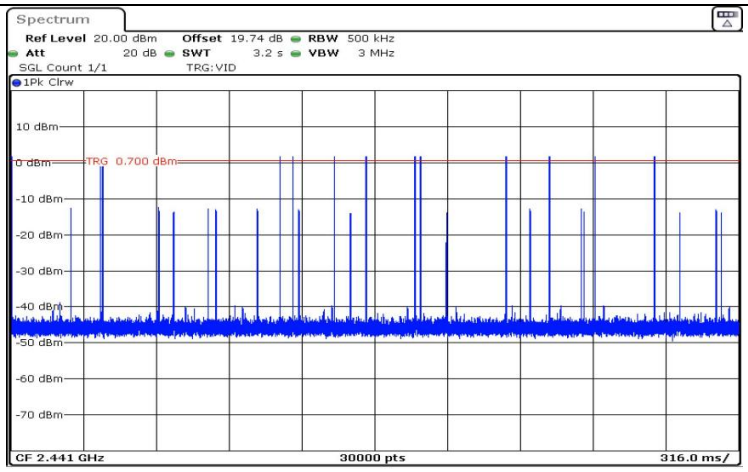

Appendix F: Number of hopping channels

Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS

Test Graphs

DH1_Ant1_Hop

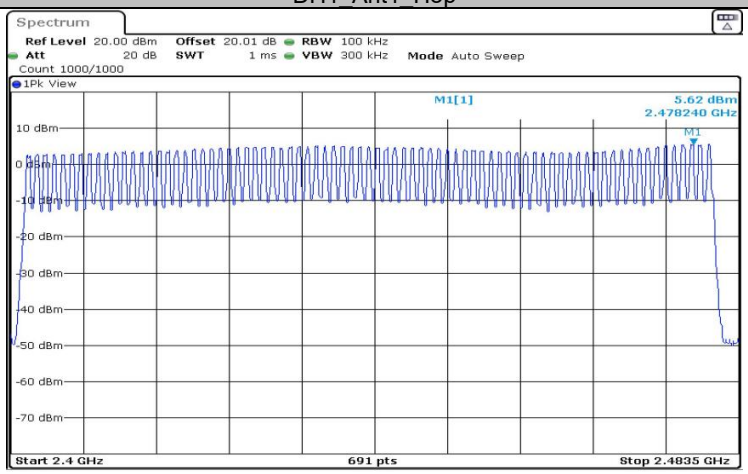

2DH1_Ant1_Hop

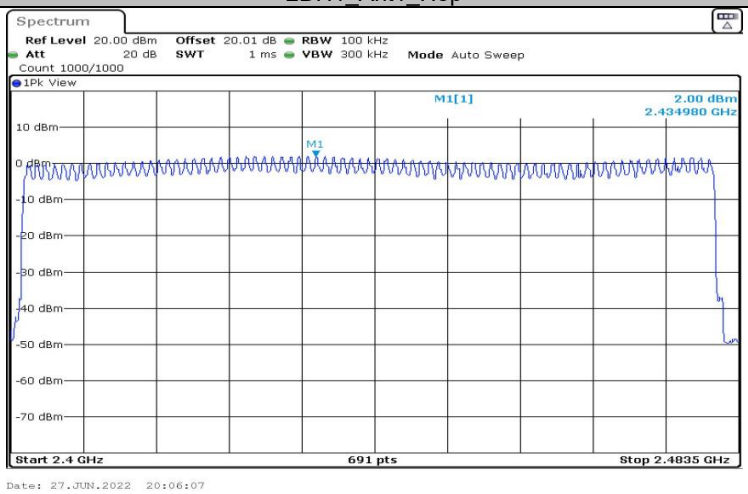

3DH1_Ant1_Hop

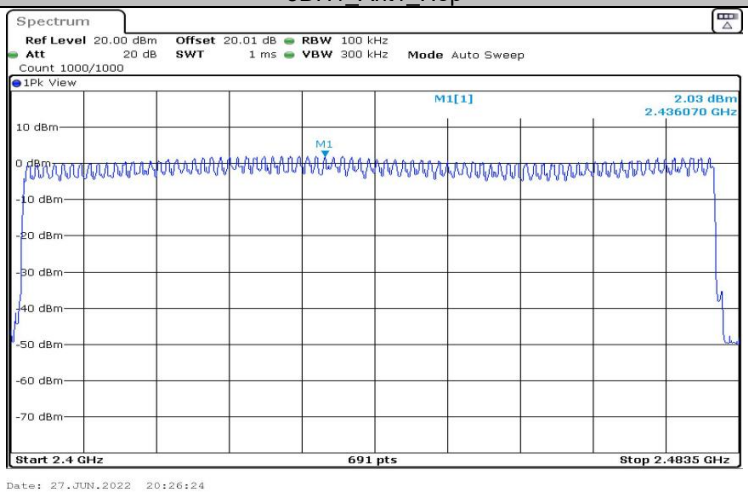

Appendix G:Band edge measurements

Test Graphs

DH1_Ant1_Low_2402

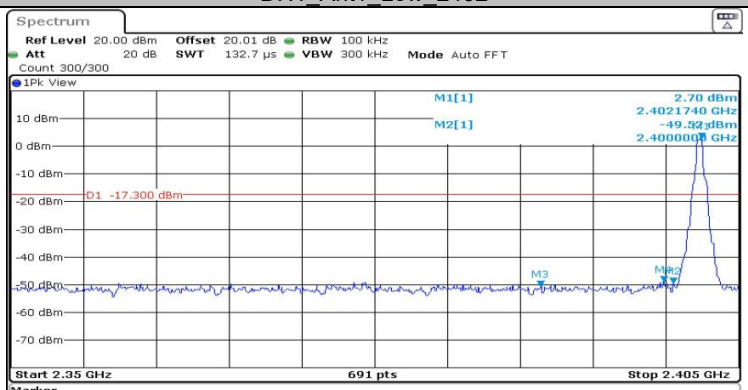

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402174 GHz	2.70 dBm		
M2		1	2.4 GHz	-49.52 dBm		
M3		1	2.39 GHz	-50.57 dBm		
M4		1	2.3993406 GHz	-48.99 dBm		

Date: 27.JUN.2022 19:55:53

DH1_Ant1_High_2480

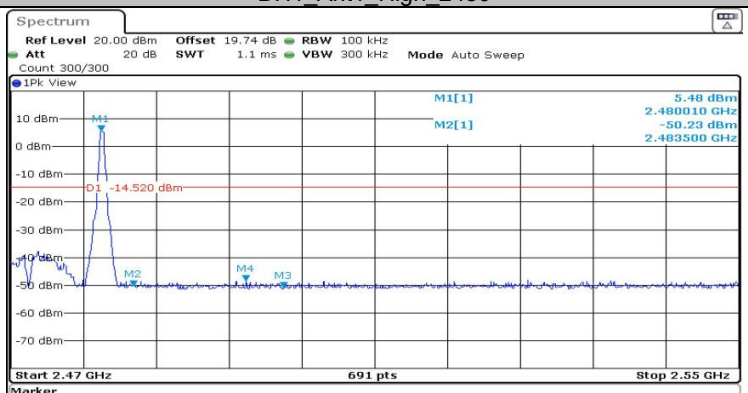

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48001 GHz	5.48 dBm		
M2		1	2.4835 GHz	-50.23 dBm		
M3		1	2.5 GHz	-50.84 dBm		
M4		1	2.495855 GHz	-47.88 dBm		

Date: 27.JUN.2022 19:57:02

DH1_Ant1_Low_Hop_2402

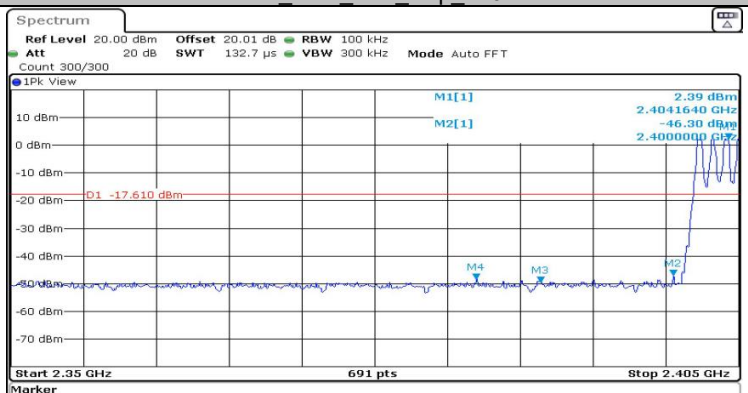

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.404164 GHz	2.39 dBm		
M2		1	2.4 GHz	-46.30 dBm		
M3		1	2.39 GHz	-49.40 dBm		
M4		1	2.3851522 GHz	-48.30 dBm		

Date: 27.JUN.2022 20:13:43

DH1_Ant1_High_Hop_2480

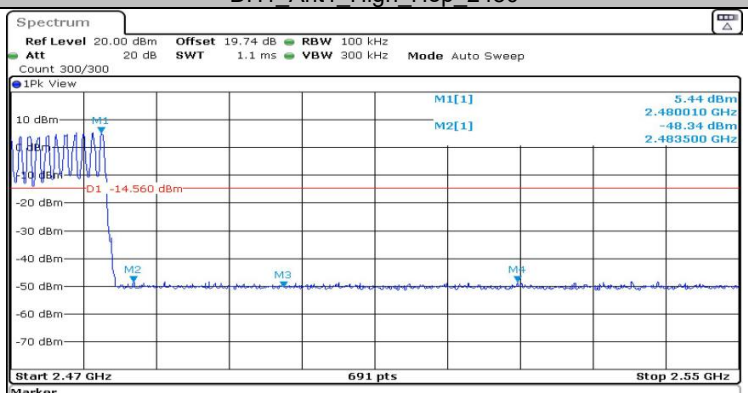

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48001 GHz	5.44 dBm		
M2		1	2.4835 GHz	-48.34 dBm		
M3		1	2.5 GHz	-50.50 dBm		
M4		1	2.525652 GHz	-48.32 dBm		

Date: 27.JUN.2022 20:12:44

2DH1_Ant1_Low_2402

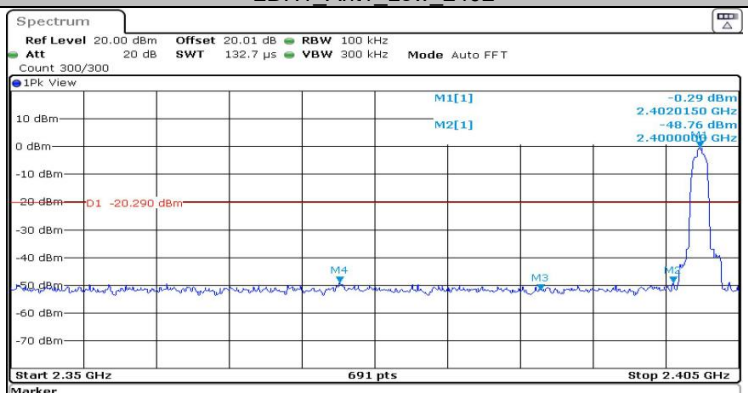

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402015 GHz	-0.29 dBm		
M2		1	2.4 GHz	-48.76 dBm		
M3		1	2.39 GHz	-51.68 dBm		
M4		1	2.3748696 GHz	-48.86 dBm		

Date: 27.JUN.2022 20:01:15

2DH1_Ant1_High_2480

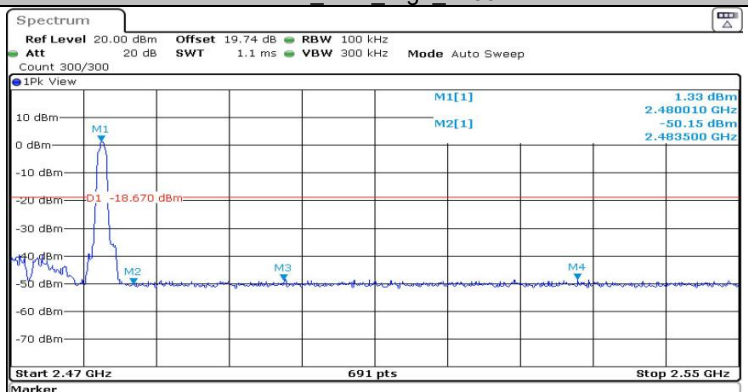

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48001 GHz	1.33 dBm		
M2		1	2.4835 GHz	-50.15 dBm		
M3		1	2.5 GHz	-48.80 dBm		
M4		1	2.532261 GHz	-48.45 dBm		

Date: 27.JUN.2022 20:03:48

2DH1_Ant1_Low_Hop_2402

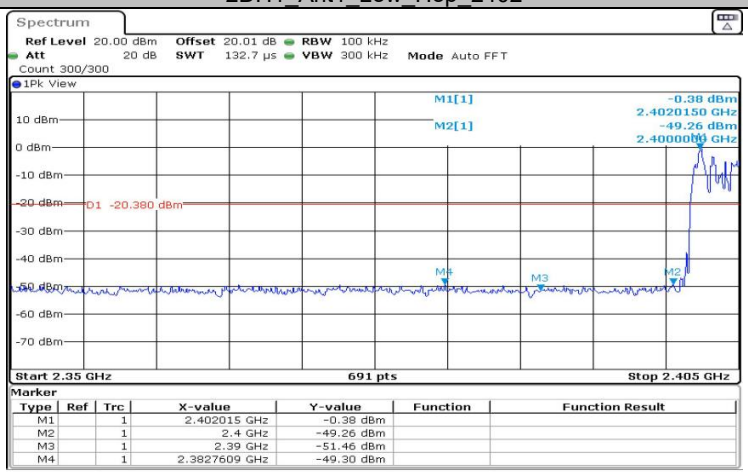

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402015 GHz	-0.38 dBm		
M2		1	2.4 GHz	-49.26 dBm		
M3		1	2.39 GHz	-51.46 dBm		
M4		1	2.3827609 GHz	-49.30 dBm		

Date: 27.JUN.2022 20:07:05

2DH1_Ant1_High_Hop_2480

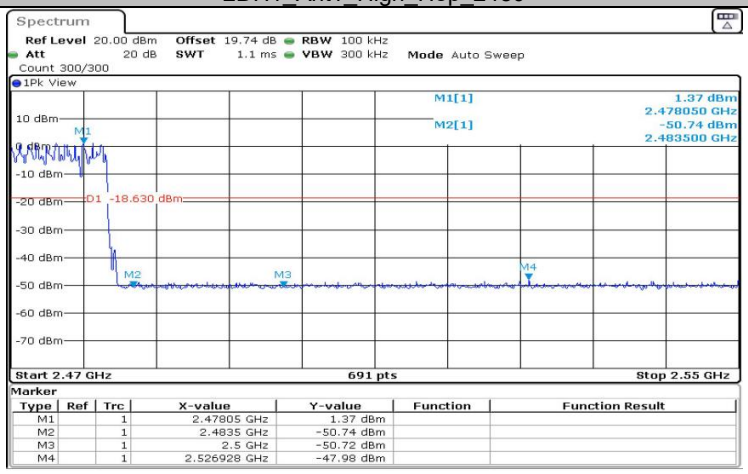

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.47805 GHz	1.37 dBm		
M2		1	2.4835 GHz	-50.74 dBm		
M3		1	2.5 GHz	-50.72 dBm		
M4		1	2.526928 GHz	-47.98 dBm		

Date: 27.JUN.2022 20:06:39

3DH1_Ant1_Low_2402

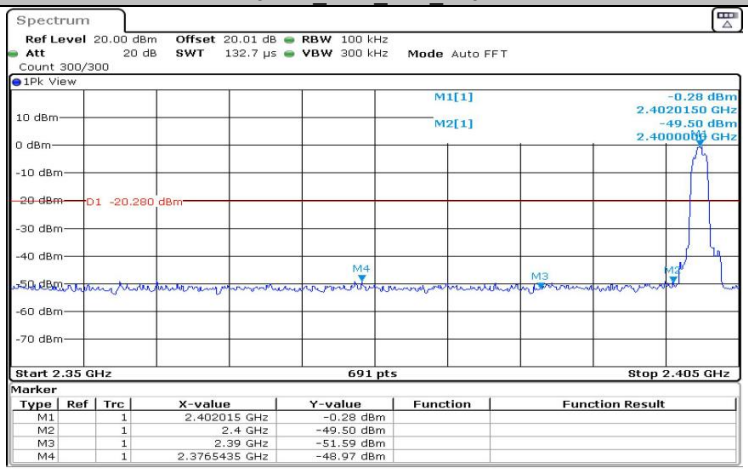

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402015 GHz	-0.28 dBm		
M2		1	2.4 GHz	-49.50 dBm		
M3		1	2.39 GHz	-51.59 dBm		
M4		1	2.3765435 GHz	-48.97 dBm		

Date: 27.JUN.2022 20:23:49

3DH1_Ant1_High_2480

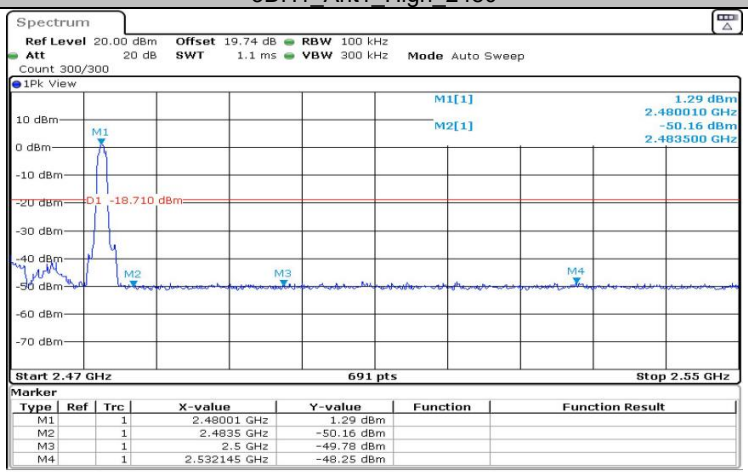

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48001 GHz	1.29 dBm		
M2		1	2.4835 GHz	-50.16 dBm		
M3		1	2.5 GHz	-49.78 dBm		
M4		1	2.532145 GHz	-48.25 dBm		

Date: 27.JUN.2022 20:21:19

3DH1_Ant1_Low_Hop_2402

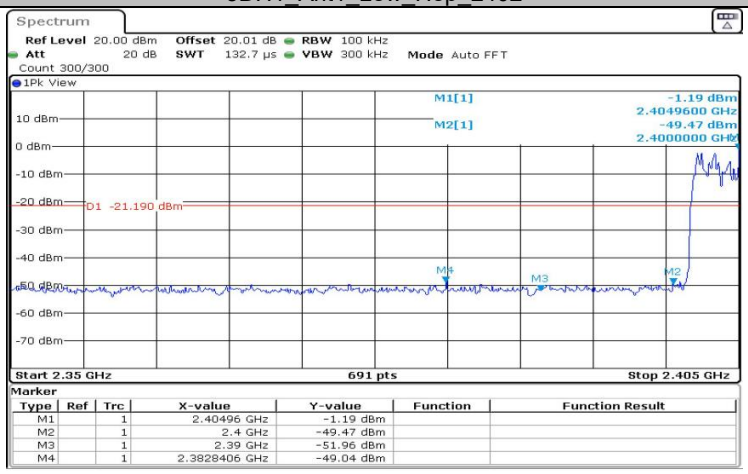

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40496 GHz	-1.19 dBm		
M2		1	2.4 GHz	-49.47 dBm		
M3		1	2.39 GHz	-51.96 dBm		
M4		1	2.3828406 GHz	-49.04 dBm		

Date: 27.JUN.2022 20:27:25

3DH1_Ant1_High_Hop_2480

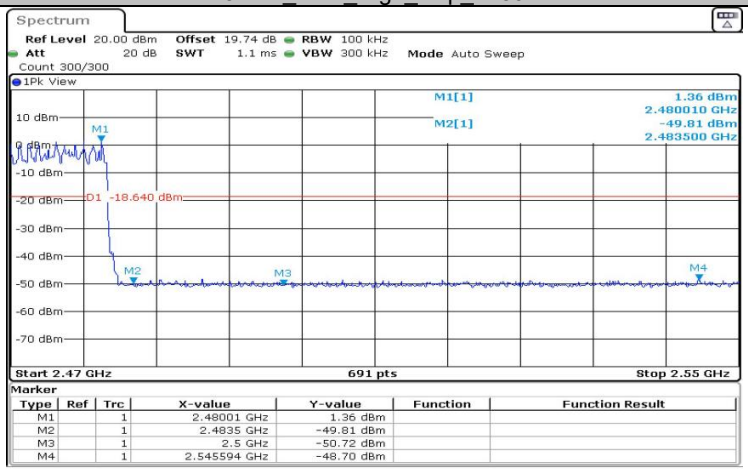

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48001 GHz	1.36 dBm		
M2		1	2.4835 GHz	-49.81 dBm		
M3		1	2.5 GHz	-50.72 dBm		
M4		1	2.545594 GHz	-48.70 dBm		

Date: 27.JUN.2022 20:27:04

******* END OF REPORT *******