TEST REPORT

Applicant:	Babysense DongGuan Ltd.
Address of Applicant:	No.1, Park Road, Dong Keng Village, Dong Keng Town, Dong Guan City, Guang Dong Province, China
Manufacturer/Factory:	Babysense DongGuan Ltd.
Address of Manufacturer/ Factory:	No.1, Park Road, Dong Keng Village, Dong Keng Town, Dong Guan City, Guang Dong Province, China
Equipment Under Test (EUT)	
Product Name:	Baby monitor
Model No.:	V43TX
FCC ID:	2AQVL-V43TX
Applicable standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt:	December 02, 2019
Date of Test:	December 02-12, 2019
Date of report issued:	December 12, 2019
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	*December 12, 2019*	*Original*

Prepared By: ***Date:*** *December 12, 2019*

Project Engineer

Check By: ***Date:*** *December 12, 2019*

Reviewer

3 Contents

Page

1 COVER PAGE 1

2 VERSION 2

3 CONTENTS 3

4 TEST SUMMARY 4

4.1 MEASUREMENT UNCERTAINTY 4

5 GENERAL INFORMATION 5

5.1 GENERAL DESCRIPTION OF EUT 5
5.2 TEST MODE 6
5.3 TEST FACILITY 6
5.4 TEST LOCATION 6
5.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER 6
5.6 DESCRIPTION OF SUPPORT UNITS 7
5.7 DEVIATION FROM STANDARDS 7
5.8 ABNORMALITIES FROM STANDARD CONDITIONS 7

6 TEST INSTRUMENTS LIST 8

7 TEST RESULTS AND MEASUREMENT DATA 10

7.1 ANTENNA REQUIREMENT 10
7.2 CONDUCTED EMISSIONSS 11
7.3 CONDUCTED PEAK OUTPUT POWER 14
7.4 20DB EMISSION BANDWIDTH 16
7.5 CARRIER FREQUENCIES SEPARATION 18
7.6 HOPPING CHANNEL NUMBER 21
7.7 DWELL TIME 23
7.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE 28
7.9 BAND EDGE 29
7.9.1 Conducted Emission Method 29
7.9.2 Radiated Emission Method 31
7.10 SPURIOUS EMISSION 33
7.10.1 Conducted Emission Method 33
7.10.2 Radiated Emission Method 35

8 TEST SETUP PHOTO 43

9 EUT CONSTRUCTIONAL DETAILS 43

4 Test Summary

Test Item	Section	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable.

Remark:Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Name:	Baby monitor
Model No.:	V43TX
Test sample(s) ID:	GTS201912000231-1
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2410.0MHz~2473.0MHz
Channel numbers:	19
Channel separation:	3.5MHz
Modulation technology:	GFSK
Antenna Type:	Metal shrapnel antenna
Antenna gain:	0dBi
Power supply:	Adapter 1 AC ADAPTER MODEL:AW007WR-0500070UV INPUT:100-240V-50/60Hz 0.3A OUTPUT:5V/0.7A OR Adapter 2 AC ADAPTER MODEL:AW007WR-0500060UV INPUT:100-240V-50/60Hz 0.3A OUTPUT:5V/0.6A All adapters were tested, and this report shows only the worst data (adapter 1)

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	**2410.00**	6	2427.50	11	2445.00	16	2462.50
2	2413.50	7	2431.00	12	2448.50	17	2466.00
3	2417.00	8	2434.50	13	2452.00	18	2469.50
4	2420.50	9	2438.00	14	2455.50	19	**2473.00**
5	2424.00	10	**2441.50**	15	2459.00		

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2410.0MHz
The middle channel	2441.5MHz
The Highest channel	2473.0MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

● **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.4 Test Location

All other tests were performed at:

Global United Technology Services Co., Ltd.
Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102
Tel: 0755-27798480
Fax: 0755-27798960

5.5 Other Information Requested by the Customer

None.

5.6 Description of Support Units

None.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

6 Test Instruments list

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020

RF Conducted Test:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. **15.247(c) (1)(i) requirement:** (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Metal shrapnel antenna, the best case gain of the antenna is 0 dBi, reference to the appendix II for details	

7.2 Conducted Emissionss

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto
Limit:	Frequency range (MHz) / Limit (dBuV): Quasi-peak / Average 0.15-0.5: 66 to 56* / 56 to 46* 0.5-5: 56 / 46 5-30: 60 / 50 * Decreases with the logarithm of the frequency.
Test setup:	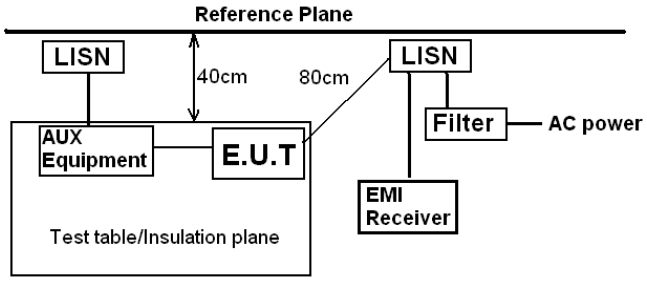 *Remark:* *E.U.T: Equipment Under Test* *LISN: Line Impedence Stabilization Network* *Test table height=0.8m*
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement data:

Line:

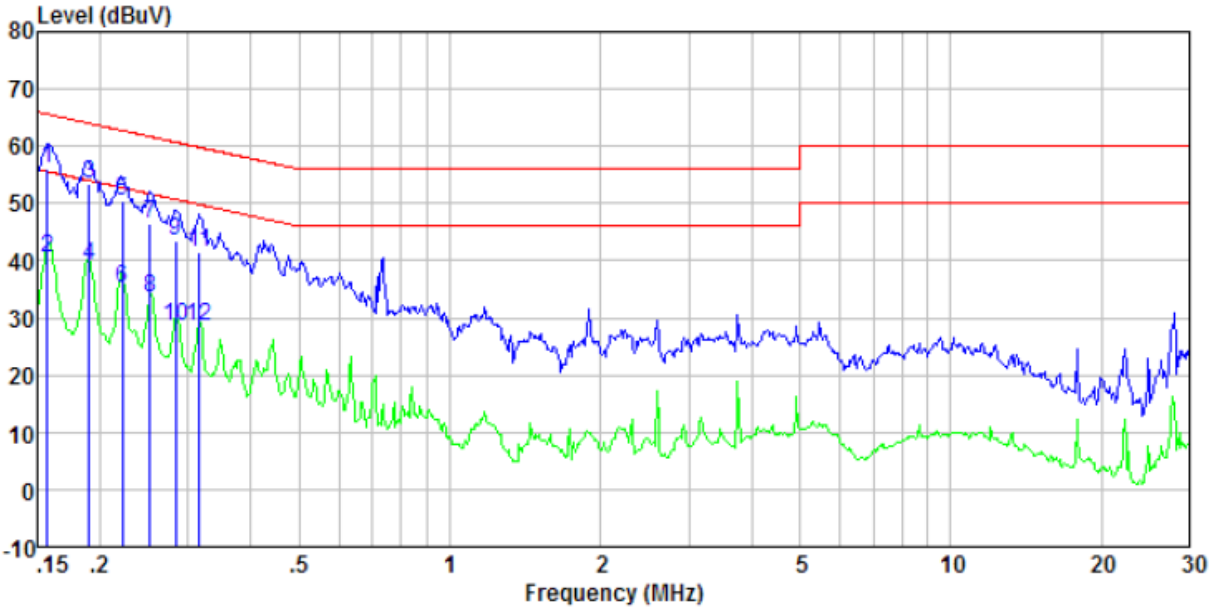

Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.157	55.46	0.42	0.12	56.00	65.60	-9.60	QP
0.157	39.82	0.42	0.12	40.36	55.60	-15.24	Average
0.190	52.81	0.42	0.13	53.36	64.02	-10.66	QP
0.190	38.70	0.42	0.13	39.25	54.02	-14.77	Average
0.222	49.97	0.43	0.12	50.52	62.74	-12.22	QP
0.222	34.74	0.43	0.12	35.29	52.74	-17.45	Average
0.252	45.76	0.44	0.11	46.31	61.69	-15.38	QP
0.252	33.12	0.44	0.11	33.67	51.69	-18.02	Average
0.283	42.78	0.44	0.10	43.32	60.72	-17.40	QP
0.283	28.12	0.44	0.10	28.66	50.72	-22.06	Average
0.317	40.84	0.44	0.10	41.38	59.80	-18.42	QP
0.317	28.11	0.44	0.10	28.65	49.80	-21.15	Average

Neutral:

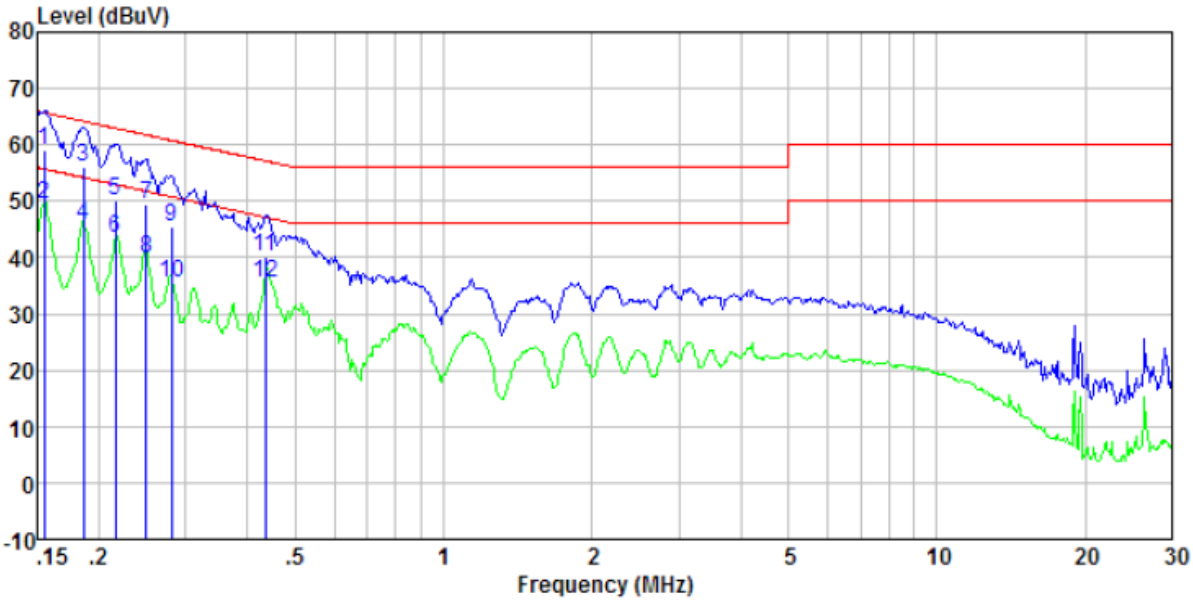

Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.155	58.44	0.41	0.12	58.97	65.74	-6.77	QP
0.155	48.98	0.41	0.12	49.51	55.74	-6.23	Average
0.186	55.41	0.41	0.13	55.95	64.20	-8.25	QP
0.186	45.21	0.41	0.13	45.75	54.20	-8.45	Average
0.216	49.66	0.42	0.13	50.21	62.96	-12.75	QP
0.216	42.95	0.42	0.13	43.50	52.96	-9.46	Average
0.249	48.96	0.42	0.11	49.49	61.78	-12.29	QP
0.249	39.42	0.42	0.11	39.95	51.78	-11.83	Average
0.280	45.02	0.42	0.10	45.54	60.81	-15.27	QP
0.280	34.98	0.42	0.10	35.50	50.81	-15.31	Average
0.435	39.76	0.38	0.11	40.25	57.15	-16.90	QP
0.435	35.02	0.38	0.11	35.51	47.15	-11.64	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. Both 120V and 240V are tested, only show the worst case 120V test data on the report.
5. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	20.97dBm
Test setup:	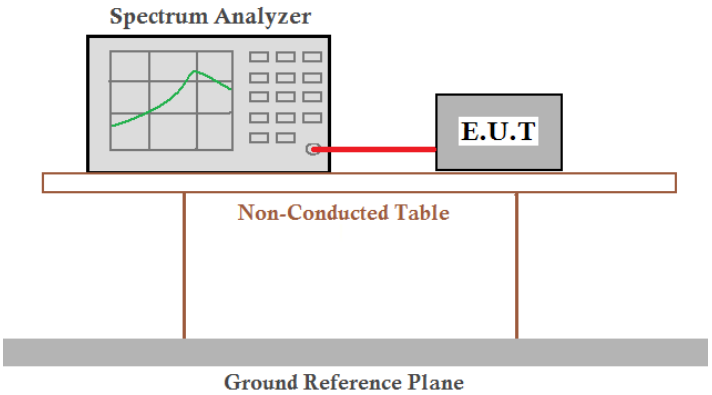
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	13.320	20.97	Pass
Middle	14.067		
Highest	14.248		

Test plot as follows:

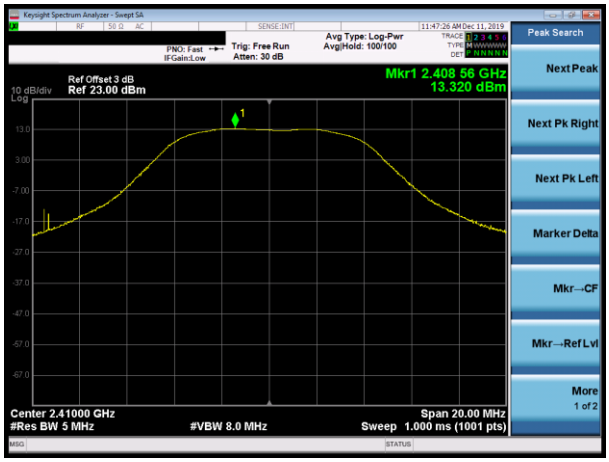

Lowest channel

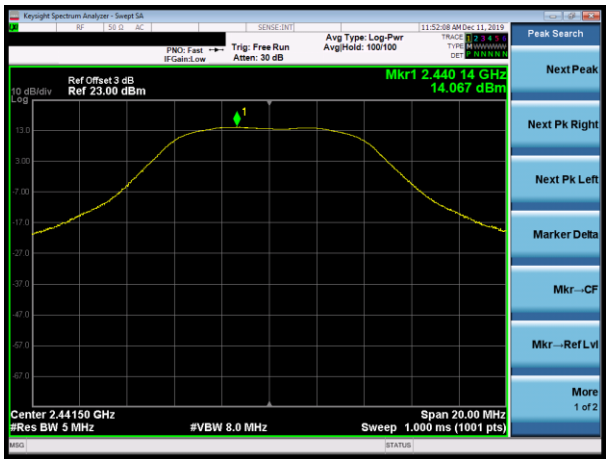

Middle channel

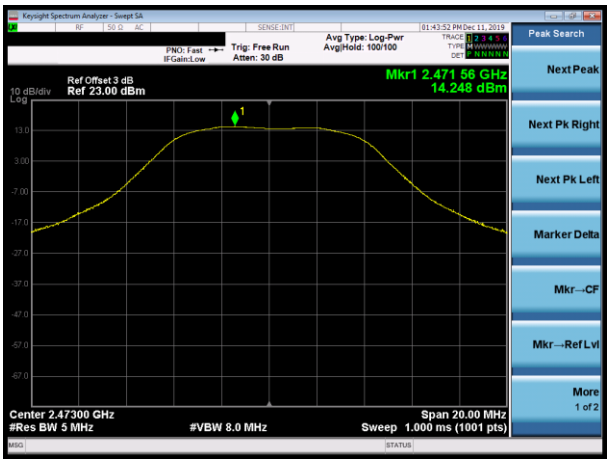

Highest channel

7.4 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	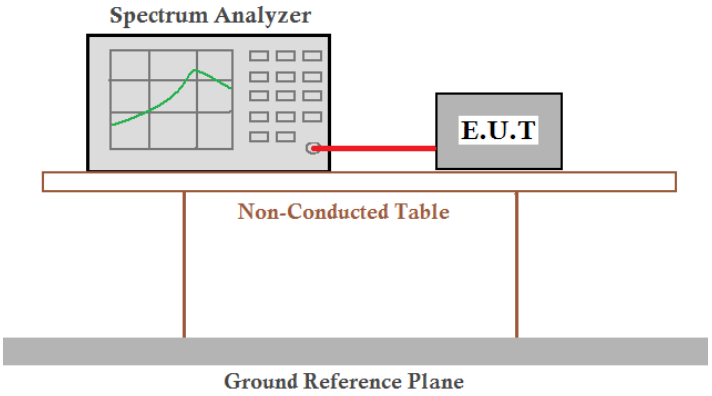
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test channel	20dB Emission Bandwidth (MHz)	Result
Lowest	5.210	Pass
Middle	5.216	
Highest	5.216	

Test plot as follows:

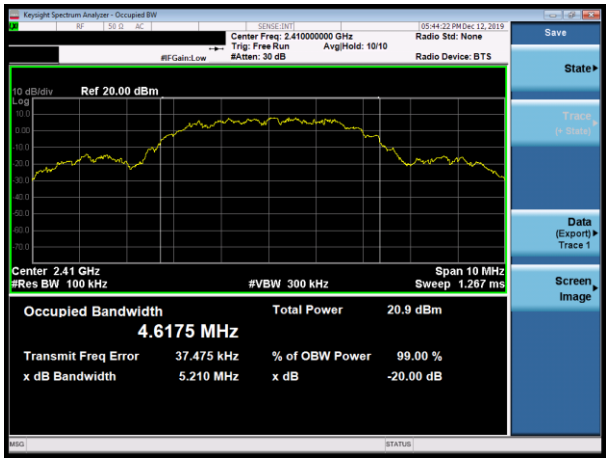

Lowest channel

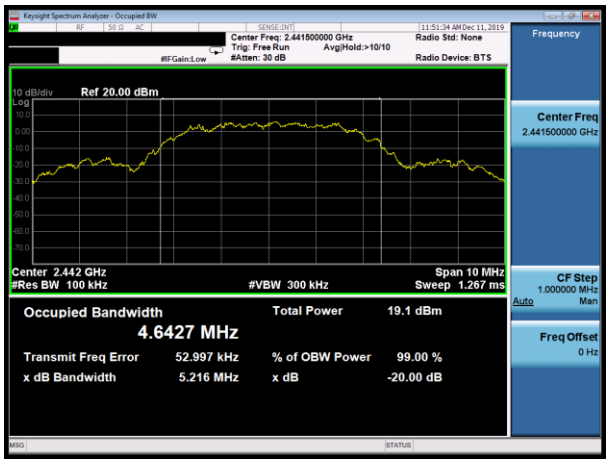

Middle channel

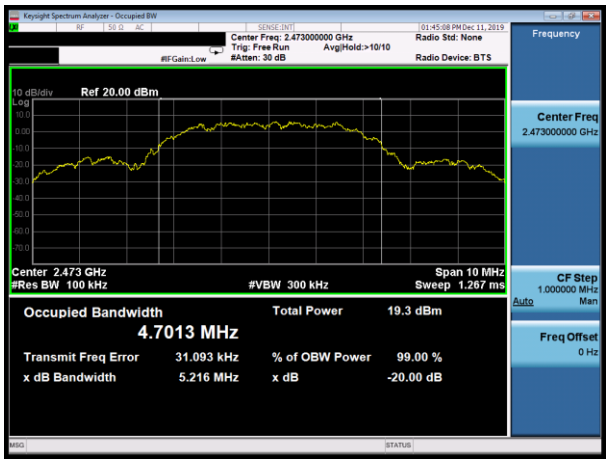

Highest channel

7.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	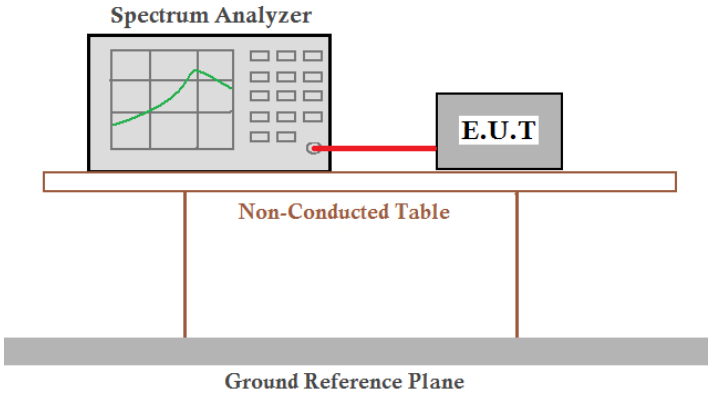
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	3498	*3477*	Pass
Middle	3498	*3477*	Pass
Highest	3492	*3477*	Pass

Note: According to section 6.3

Mode	*20dB bandwidth (kHz) (worse case)*	*Limit (kHz) (Carrier Frequencies Separation)*
GFSK	*5216*	*3477*

Test plot as follows:

Lowest channel

Middle channel

Highest channel

7.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	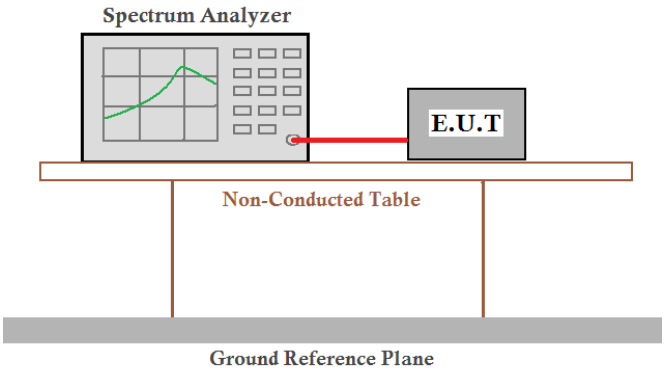
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:

Hopping channel numbers	Limit	Result
19	15	Pass

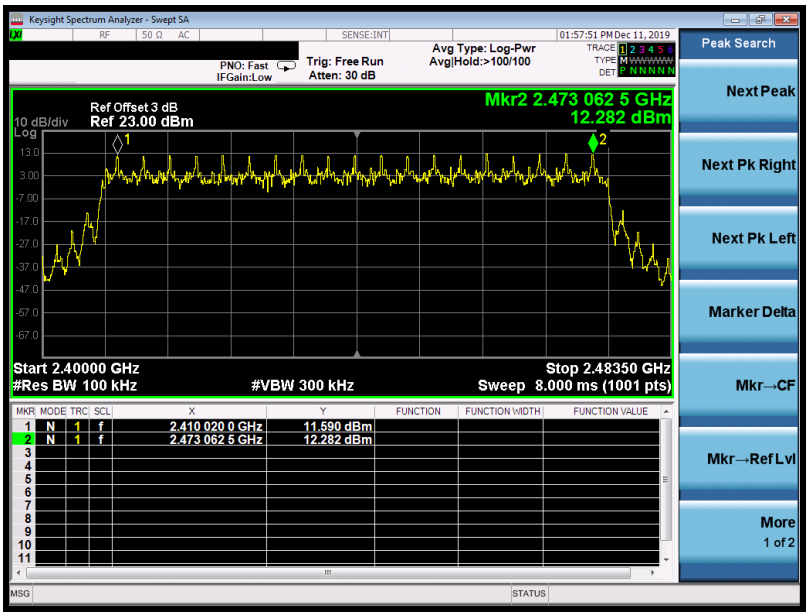

7.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	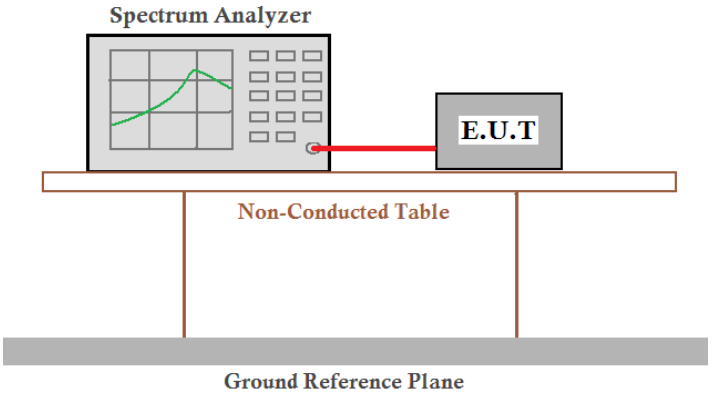
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Channel	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
Lowest	0.179	38.0912	400	Pass
Middle	0.180	38.3040	400	Pass
Highest	0.181	38.5168	400	Pass

The formula as below:

Lowest: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=0.179ms*28*0.4*19=38.0912ms

Middle: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=0.180ms*28*0.4*19=38.3040ms

Highest: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=0.181ms*28*0.4*19=38.5168ms

Test plot as follows:

Frequency:	2410MHz

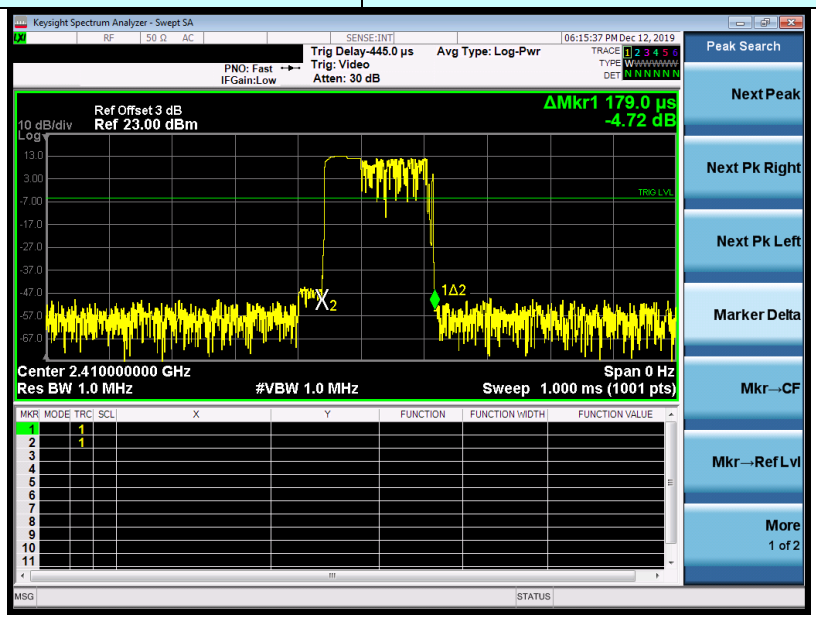

Ton

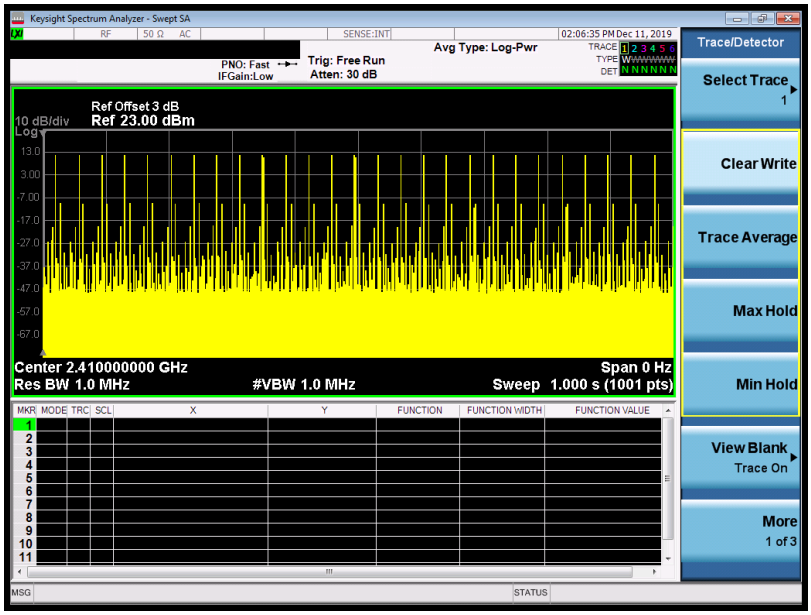

Ton times in 1s

Frequency:	2441.5MHz

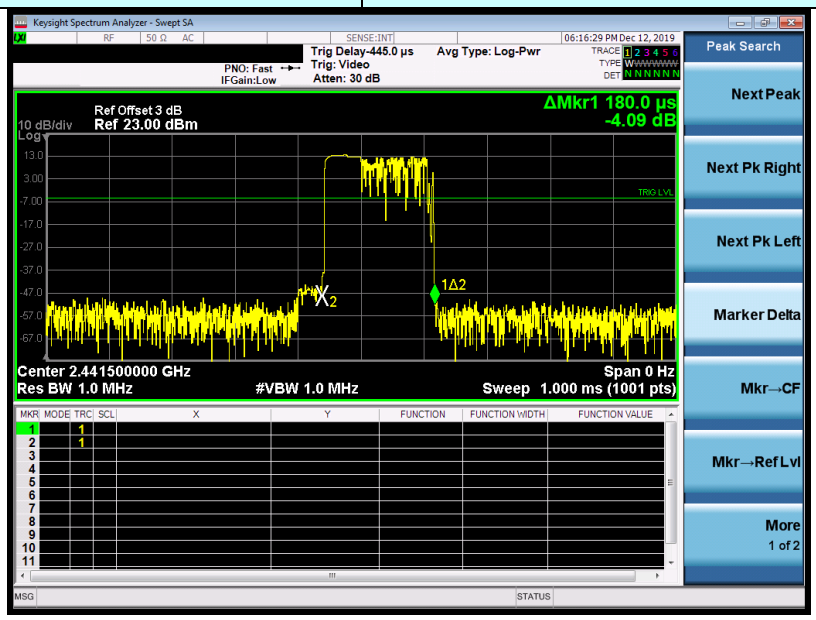

Ton

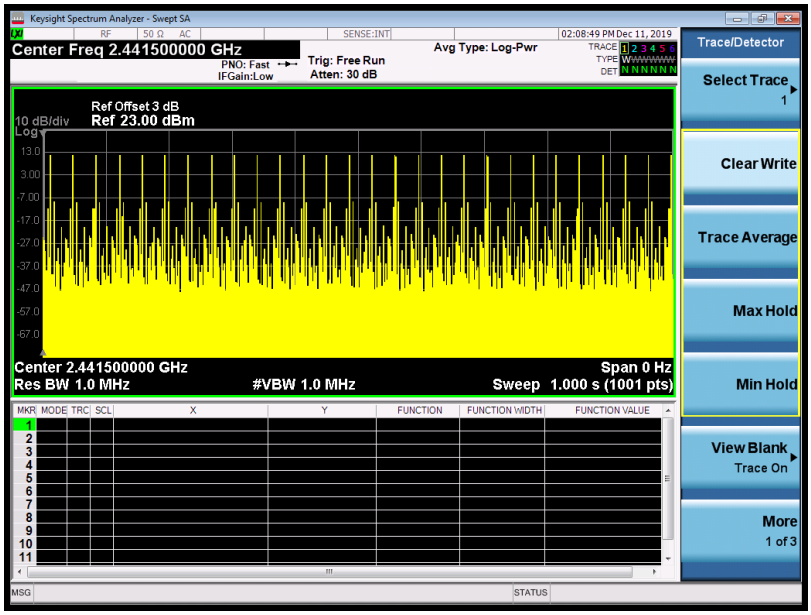

Ton times in 1s

Frequency:	2473MHz

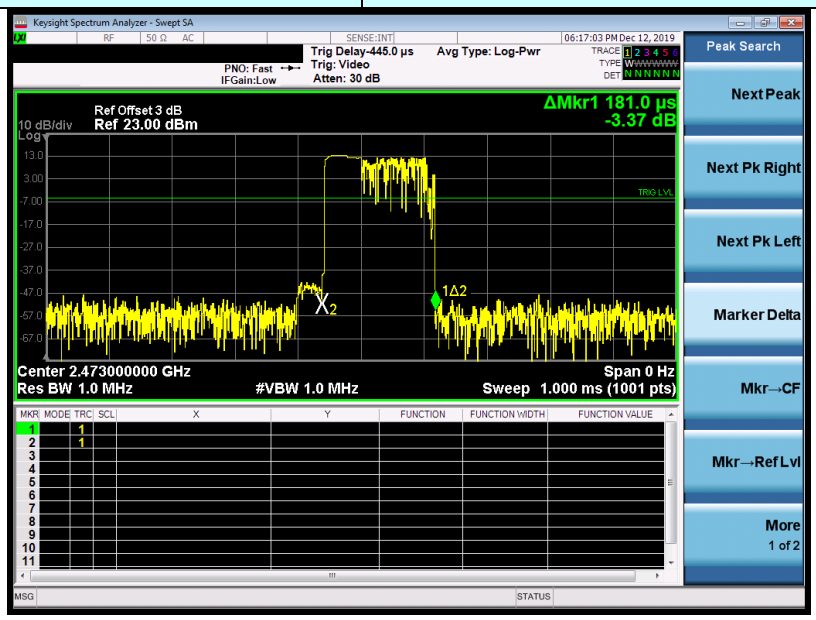

Ton

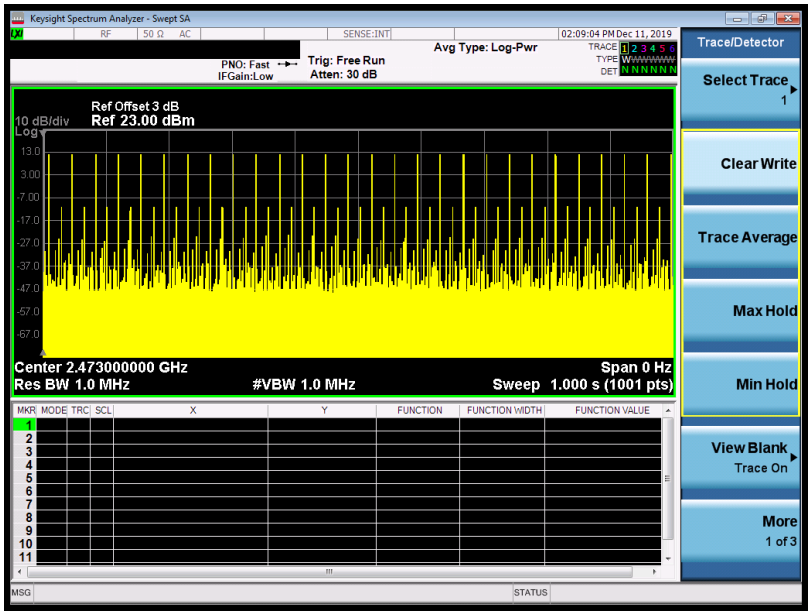

Ton times in 1s

7.8 Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- *Number of shift register stages: 9*
- *Length of pseudo-random sequence: 2^9 -1 = 511 bits*
- *Longest sequence of zeros: 8 (non-inverted signal)*

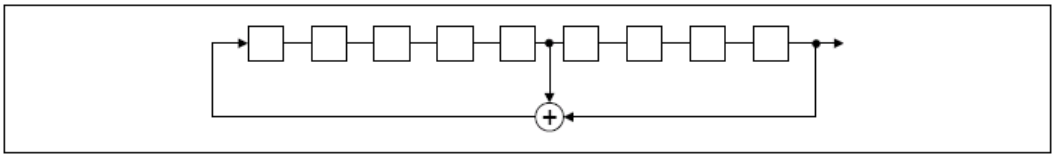

Linear Feedback Shift Register for Generation of the PRBS sequence

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

7.9 Band Edge

7.9.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	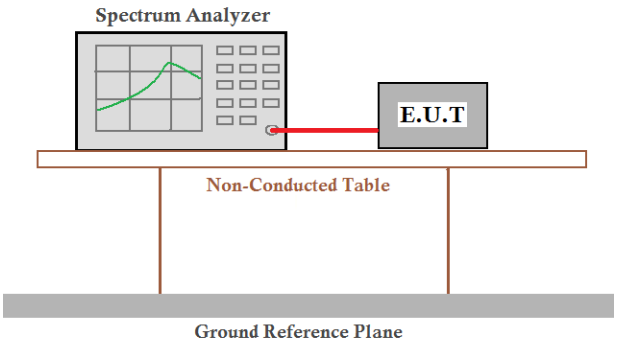
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

Test channel:	Lowest channel
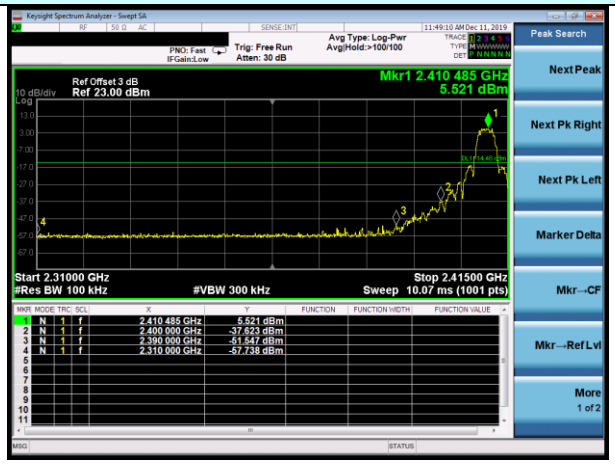	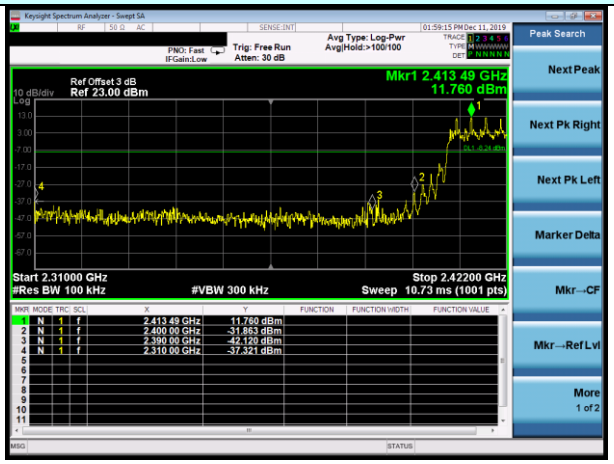
No-hopping mode	Hopping mode

Test channel:	Highest channel
No-hopping mode	Hopping mode

7.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205
Test Method:	ANSI C63.10:2013
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Remark
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	54.00	Average Value
	74.00	Peak Value

Test setup:

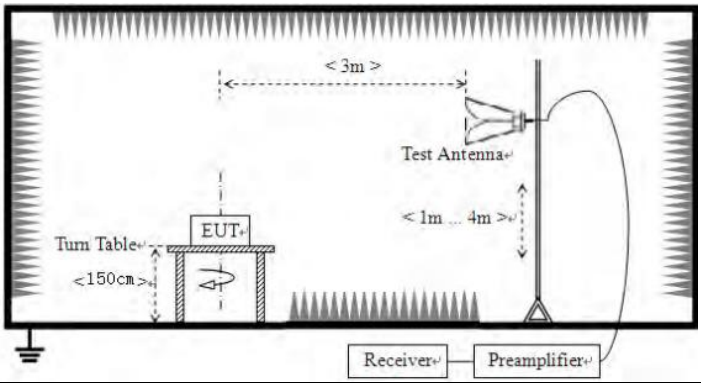

Test Procedure:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:

Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	59.34	27.59	5.38	30.18	62.13	74.00	-11.87	Vertical
2400.00	61.57	27.58	5.39	30.18	64.36	74.00	-9.64	Vertical
2390.00	53.26	27.59	5.38	30.18	56.05	74.00	-17.95	Horizontal
2400.00	57.85	27.58	5.39	30.18	60.64	74.00	-13.36	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	43.21	27.59	5.38	30.18	46.00	54.00	-8.00	Vertical
2400.00	42.87	27.58	5.39	30.18	45.66	54.00	-8.34	Vertical
2390.00	38.96	27.59	5.38	30.18	41.75	54.00	-12.25	Horizontal
2400.00	43.57	27.58	5.39	30.18	46.36	54.00	-7.64	Horizontal

Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	59.11	27.53	5.47	29.93	62.18	74.00	-11.82	Vertical
2500.00	49.05	27.55	5.49	29.93	52.16	74.00	-21.84	Vertical
2483.50	55.14	27.53	5.47	29.93	58.21	74.00	-15.79	Horizontal
2500.00	48.96	27.55	5.49	29.93	52.07	74.00	-21.93	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.75	27.53	5.47	29.93	44.82	54.00	-9.18	Vertical
2500.00	36.85	27.55	5.49	29.93	39.96	54.00	-14.04	Vertical
2483.50	40.79	27.53	5.47	29.93	43.86	54.00	-10.14	Horizontal
2500.00	35.59	27.55	5.49	29.93	38.70	54.00	-15.30	Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.10 Spurious Emission

7.10.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	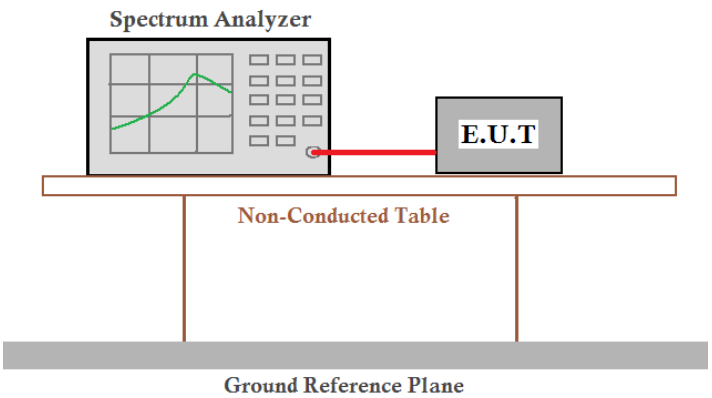
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

Test channel:	Lowest channel

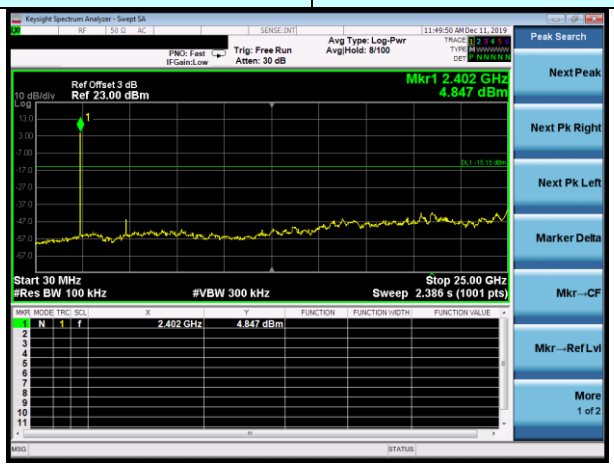

30MHz~25GHz

Test channel:	Middle channel

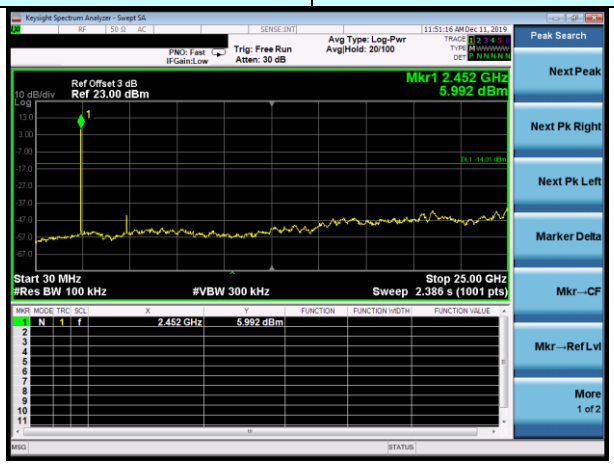

30MHz~25GHz

Test channel:	Highest channel

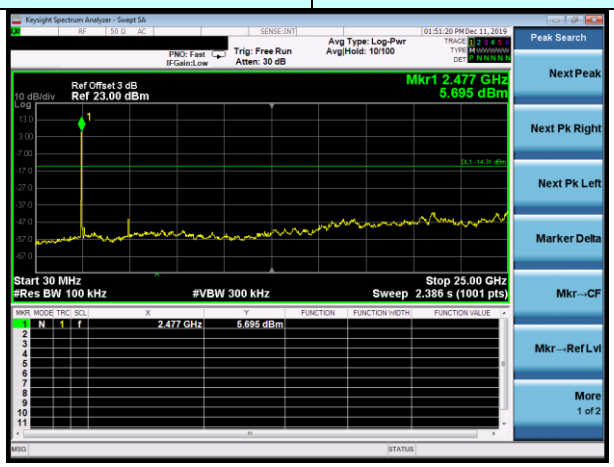

30MHz~25GHz

7.10.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	30m
1.705MHz-30MHz	30	QP	30m
30MHz-88MHz	100	QP	3m
88MHz-216MHz	150	QP	
216MHz-960MHz	200	QP	
960MHz-1GHz	500	QP	
Above 1GHz	500	Average	
	5000	Peak	

Test setup:

For radiated emissions from 9kHz to 30MHz

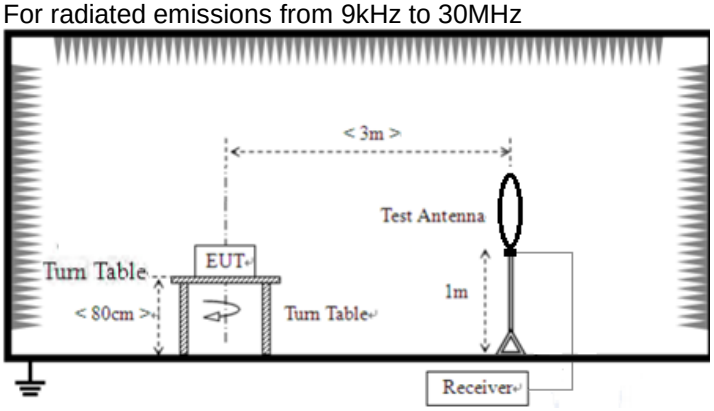

For radiated emissions from 30MHz to1GHz

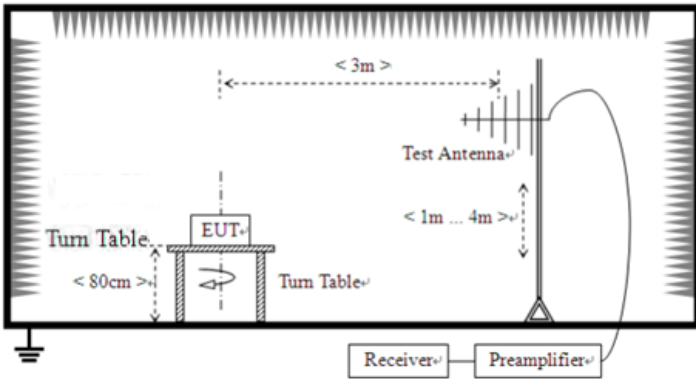

For radiated emissions above 1GHz

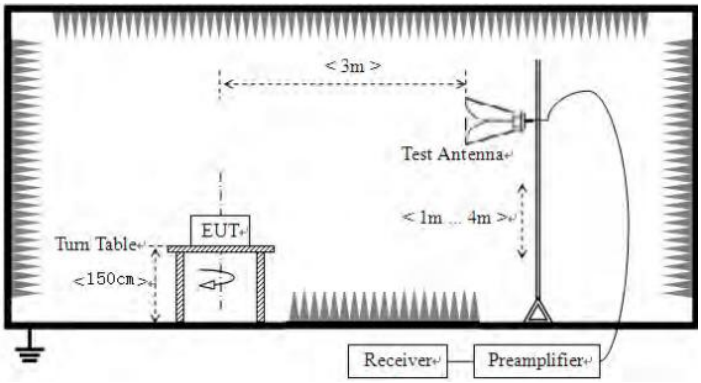

Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Test voltage:	AC 120V, 60Hz
Test results:	Pass

Measurement data:

Remarks:

1. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ **Below 1GHz**

Horizontal:

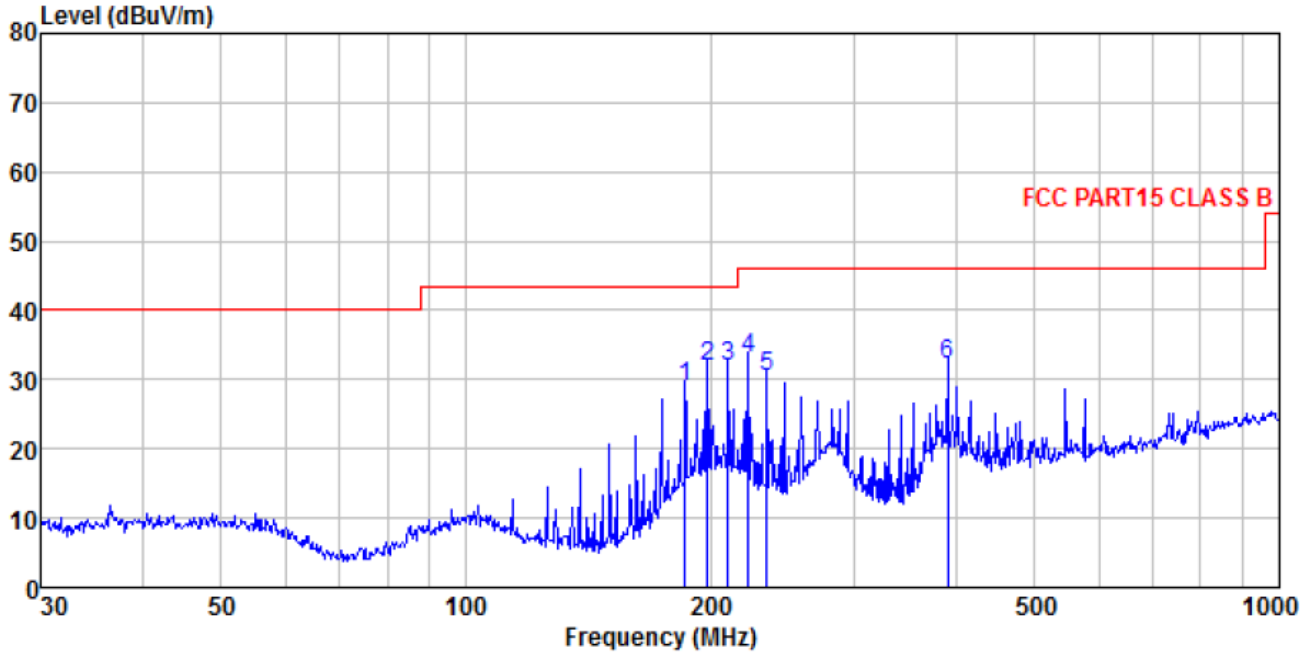

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
185.788	47.22	9.10	1.77	29.25	28.84	43.50	-14.66	QP
197.893	49.13	10.20	1.83	29.21	31.95	43.50	-11.55	QP
210.048	48.68	10.59	1.90	29.30	31.87	43.50	-11.63	QP
222.170	49.41	10.98	1.97	29.41	32.95	46.00	-13.05	QP
234.168	46.52	11.36	2.04	29.52	30.40	46.00	-15.60	QP
390.723	43.79	15.26	2.81	29.54	32.32	46.00	-13.68	QP

Vertical：

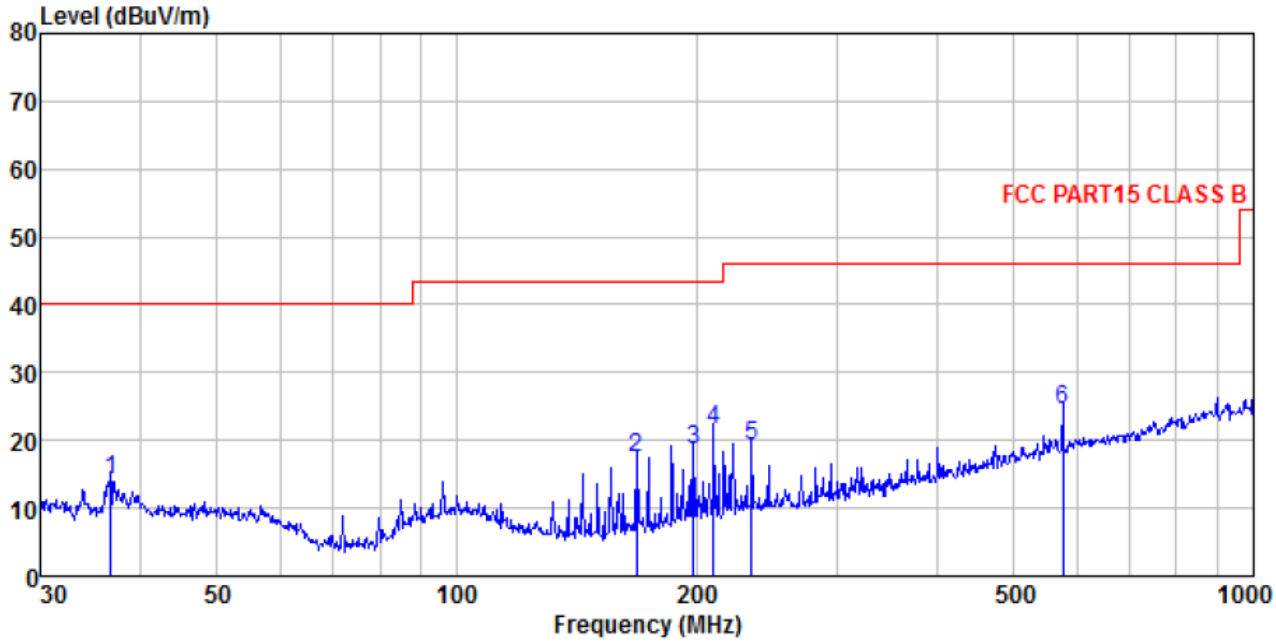

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.766	32.44	11.20	0.63	30.06	14.21	40.00	-25.79	QP
167.824	36.84	8.33	1.67	29.33	17.51	43.50	-25.99	QP
197.893	35.82	10.20	1.83	29.21	18.64	43.50	-24.86	QP
210.048	38.31	10.59	1.90	29.30	21.50	43.50	-22.00	QP
234.168	35.31	11.36	2.04	29.52	19.19	46.00	-26.81	QP
576.644	31.21	18.88	3.63	29.30	24.42	46.00	-21.58	QP

■ **Above 1GHz**

Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4820.00	48.47	31.79	8.61	32.09	56.78	74.00	-17.22	Vertical
7230.00	25.34	36.19	11.66	31.99	41.20	74.00	-32.8	Vertical
9640.00	24.74	38.01	14.16	31.58	45.33	74.00	-28.67	Vertical
12050.00	*					74.00		Vertical
14460.00	*					74.00		Vertical
4820.00	48.74	31.79	8.61	32.09	57.05	74.00	-16.95	Horizontal
7230.00	26.49	36.19	11.66	31.99	42.35	74.00	-31.65	Horizontal
9640.00	24.75	38.01	14.16	31.58	45.34	74.00	-28.66	Horizontal
12050.00	*					74.00		Horizontal
14460.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4820.00	37.98	31.79	8.61	32.09	46.29	54.00	-7.71	Vertical
7230.00	15.63	36.19	11.66	31.99	31.49	54.00	-22.51	Vertical
9640.00	16.48	38.01	14.16	31.58	37.07	54.00	-16.93	Vertical
12050.00	*					54.00		Vertical
14460.00	*					54.00		Vertical
4820.00	38.12	31.79	8.61	32.09	46.43	54.00	-7.57	Horizontal
7230.00	16.82	36.19	11.66	31.99	32.68	54.00	-21.32	Horizontal
9640.00	15.08	38.01	14.16	31.58	35.67	54.00	-18.33	Horizontal
12050.00	*					54.00		Horizontal
14460.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4883.00	43.64	31.85	8.66	32.12	52.03	74.00	-21.97	Vertical
7324.50	24.65	36.37	11.72	31.89	40.85	74.00	-33.15	Vertical
9766.00	23.12	38.35	14.25	31.59	44.13	74.00	-29.87	Vertical
12207.50	*					74.00		Vertical
14649.00	*					74.00		Vertical
4883.00	42.63	31.85	8.66	32.12	51.02	74.00	-22.98	Horizontal
7324.50	25.34	36.37	11.72	31.89	41.54	74.00	-32.46	Horizontal
9766.00	24.16	38.35	14.25	31.59	45.17	74.00	-28.83	Horizontal
12207.50	*					74.00		Horizontal
14649.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4883.00	33.45	31.85	8.66	32.12	41.84	54.00	-12.16	Vertical
7324.50	15.35	36.37	11.72	31.89	31.55	54.00	-22.45	Vertical
9766.00	14.78	38.35	14.25	31.59	35.79	54.00	-18.21	Vertical
12207.50	*					54.00		Vertical
14649.00	*					54.00		Vertical
4883.00	37.15	31.85	8.66	32.12	45.54	54.00	-8.46	Horizontal
7324.50	16.75	36.37	11.72	31.89	32.95	54.00	-21.05	Horizontal
9766.00	15.69	38.35	14.25	31.59	36.70	54.00	-17.30	Horizontal
12207.50	*					54.00		Horizontal
14649.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4946.00	46.02	31.91	8.71	32.16	54.48	74.00	-19.52	Vertical
7419.00	25.34	36.56	11.79	31.8	41.89	74.00	-32.11	Vertical
9892.00	25.64	38.81	14.35	31.85	46.95	74.00	-27.05	Vertical
12365.00	*					74.00		Vertical
14838.00	*					74.00		Vertical
4946.00	44.27	31.91	8.71	32.16	52.73	74.00	-21.27	Horizontal
7419.00	28.63	36.56	11.79	31.8	45.18	74.00	-28.82	Horizontal
9892.00	24.26	38.81	14.35	31.85	45.57	74.00	-28.43	Horizontal
12365.00	*					74.00		Horizontal
14838.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4946.00	34.21	31.91	8.71	32.16	42.67	54.00	-11.33	Vertical
7419.00	15.37	36.56	11.79	31.8	31.92	54.00	-22.08	Vertical
9892.00	14.86	38.81	14.35	31.85	36.17	54.00	-17.83	Vertical
12365.00	*					54.00		Vertical
14838.00	*					54.00		Vertical
4946.00	36.47	31.91	8.71	32.16	44.93	54.00	-9.07	Horizontal
7419.00	16.75	36.56	11.79	31.8	33.30	54.00	-20.70	Horizontal
9892.00	14.89	38.81	14.35	31.85	36.20	54.00	-17.80	Horizontal
12365.00	*					54.00		Horizontal
14838.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---End---