

Test Report

Report No. : CQASZ20260400871E-02
Applicant: Woojer LTD
Address of Applicant: HaMelacha St 16, Brain Embassy Building, floor #2
Rosh Ha'ayin 4809139 Israel
Equipment Under Test (EUT):
Product: VEST 4S
Model No.: WJRV4SBHNV-101
Test Model No.: WJRV4SBHNV-101
Brand Name: N/A
FCC ID: 2AQXZ-WJRV4BHNV-101
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Date of Receipt: 2026-04-28
Date of Test: 2025-06-30 to 2025-07-16
2026-04-28 to 2026-05-28
Date of Issue: 2026-7-9
Test Result : PASS*

*In the configuration tested, the EUT complied with the standards specified above.

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250601491E-02	Rev.01	Initial report	2025-08-15
CQASZ20260400871E-02	Rev.02	Update report	2026-7-9

Note:

This test report (Ref. No.: CQASZ20260400871E-02)

All test data comes from source test reports (Ref. No.: CQASZ20250601491E-02).

Only on the basis of the original report Change EUT Name, Add the series model No., Photographs of EUT.The newly added model features four fewer speakers and modified battery specifications, requiring corresponding additional testing; however, this does not affect RF testing.

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	/	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Conducted Peak Output Power	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
20dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
Carrier Frequencies Separation	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
Hopping Channel Number	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
Dwell Time	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	N/A
Radiated Spurious emissions	47 CFR Part 15.209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF EUT	6
4.3 ADDITIONAL INSTRUCTIONS	8
4.4 TEST ENVIRONMENT	9
4.5 DESCRIPTION OF SUPPORT UNITS	9
4.6 TEST CONFIGURATION	9
4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
4.8 TEST LOCATION	11
4.9 TEST FACILITY	11
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	11
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	11
4.12 EQUIPMENT LIST	12
5 TEST RESULTS AND MEASUREMENT DATA	14
5.1 ANTENNA REQUIREMENT	14
5.2 CONDUCTED EMISSIONS	15
5.2.1 Radiated Emission below 1GHz	19
5.2.2 Transmitter Emission above 1GHz	21
6 PHOTOGRAPHS - EUT TEST SETUP	33
6.1 RADIATED EMISSION	33
6.2 CONDUCTED EMISSION	34
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	35

4 General Information

4.1 Client Information

Applicant:	Woojer LTD
Address of Applicant:	HaMelacha St 16, Brain Embassy Building, floor #2 Rosh Ha`ayin 4809139 Israel
Manufacturer:	Woojer LTD
Address of Manufacturer:	HaMelacha St 16, Brain Embassy Building, floor #2 Rosh Ha`ayin 4809139 Israel
Factory:	Woojer LTD
Address of Factory:	HaMelacha St 16, Brain Embassy Building, floor #2 Rosh Ha`ayin 4809139 Israel

4.2 General Description of EUT

Product Name:	VEST 4S
Model No.:	WJRV4SBHNV-101
Test Model No.:	WJRV4SBHNV-101
Trade Mark:	N/A
RF module:	JL7016C6
Software Version:	V2.0
Hardware Version:	V2.0
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.4
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	FCC Assist
Antenna Type:	Chip antenna
Antenna Gain:	1.75dBi
Power Supply:	lithium battery: 10.8V 3300mAh 35.64Wh, Charge by DC 5V for adapter
Simultaneous Transmission	☒ Simultaneous TX is supported and evaluated in this report. ☐ Simultaneous TX is not supported.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	☒ Special software is used. ☐ Through engineering command into the engineering mode. engineering command: *##3646633#**	
EUT Power level:	Class 10	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480
3DH1/3DH3/3DH5	CH0	2402
	CH39	2441
	CH78	2480

Run Software:

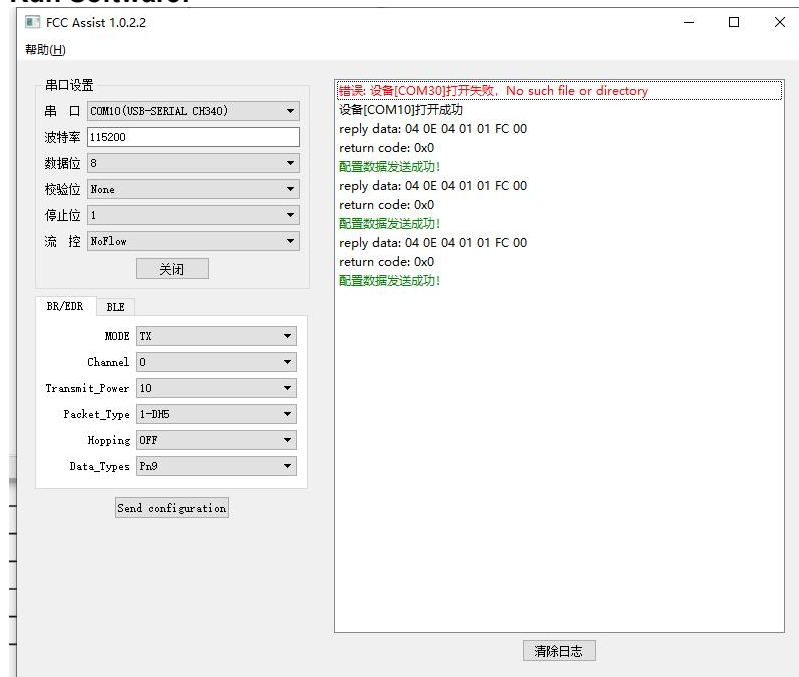

4.4 Test Environment


Operating Environment:	
Temperature:	25 °C
Humidity:	54% RH
Atmospheric Pressure:	1009mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	Supplied
Adapter	MI	/	/	CQA

4.6 Test configuration

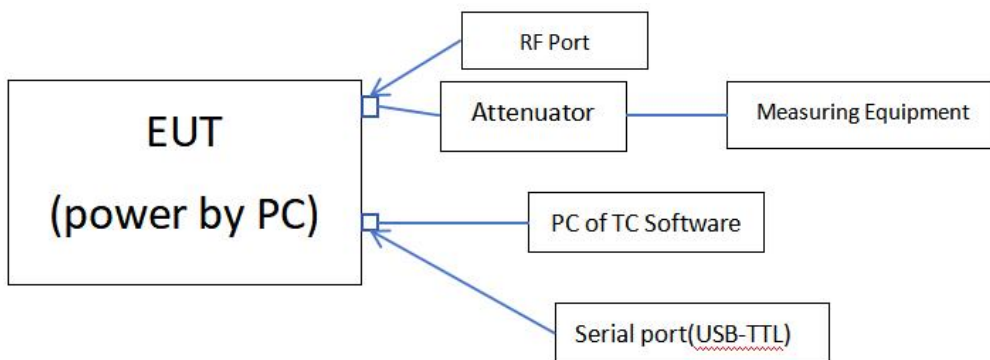

4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **HENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8℃
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	Frequency Error	5.5 Hz

4.8 Test Location

All tests were performed at:

HENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of HENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited HENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

HENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

HENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2 2025/9/1	2025/9/1 2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Power meter	R&S	NRVD	CQA-029	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2 2025/9/1	2025/9/1 2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2 2025/9/1	2025/9/1 2026/8/31
LISN	R&S	ENV216	CQA-003	2024/9/2 2025/9/1	2025/9/1 2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2 2025/9/1	2025/9/1 2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2 2025/9/1	2025/9/1 2026/8/31

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

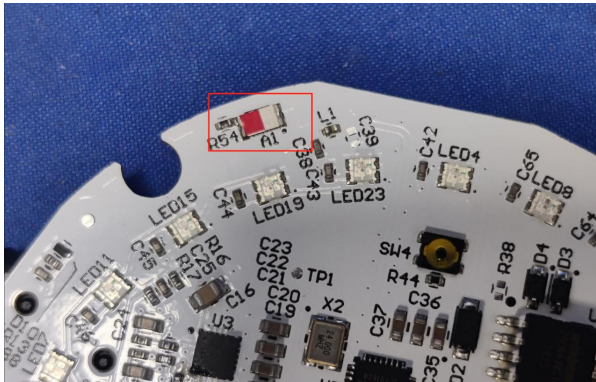Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is Chip antenna. The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment.	


5.2 Conducted Emissions

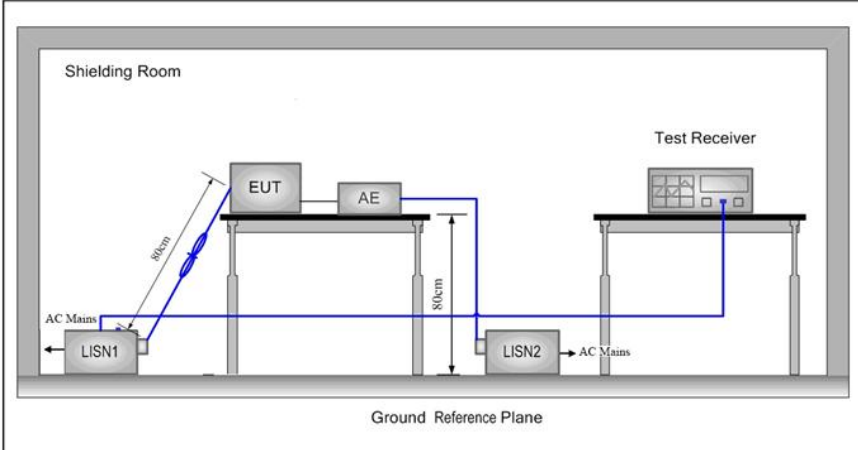Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10:2020		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.		
Test Setup:			

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

Live line:

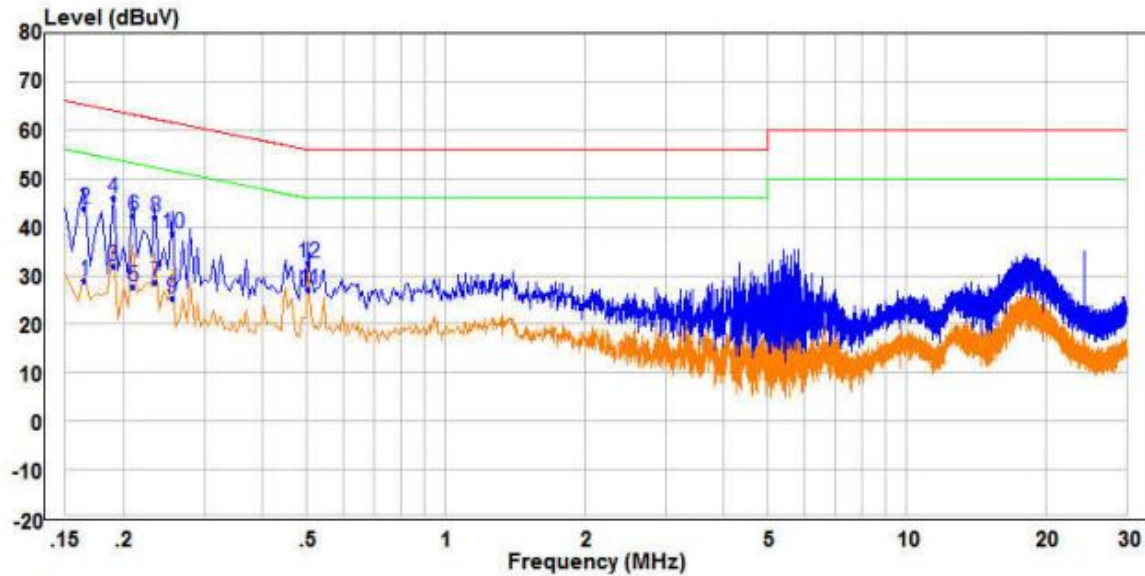


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.165	19.42	9.67	29.09	55.21	-26.12	Average	Line
2	0.165	34.22	9.67	43.89	65.21	-21.32	QP	Line
3	0.190	22.23	9.63	31.86	54.04	-22.18	Average	Line
4 PP	0.190	36.27	9.63	45.90	64.04	-18.14	QP	Line
5	0.210	18.12	9.60	27.72	53.21	-25.49	Average	Line
6	0.210	32.59	9.60	42.19	63.21	-21.02	QP	Line
7	0.235	19.15	9.56	28.71	52.27	-23.56	Average	Line
8	0.235	32.49	9.56	42.05	62.27	-20.22	QP	Line
9	0.255	15.66	9.54	25.20	51.59	-26.39	Average	Line
10	0.255	29.22	9.54	38.76	61.59	-22.83	QP	Line
11 AV	0.505	17.54	9.71	27.25	46.00	-18.75	Average	Line
12	0.505	22.74	9.71	32.45	56.00	-23.55	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

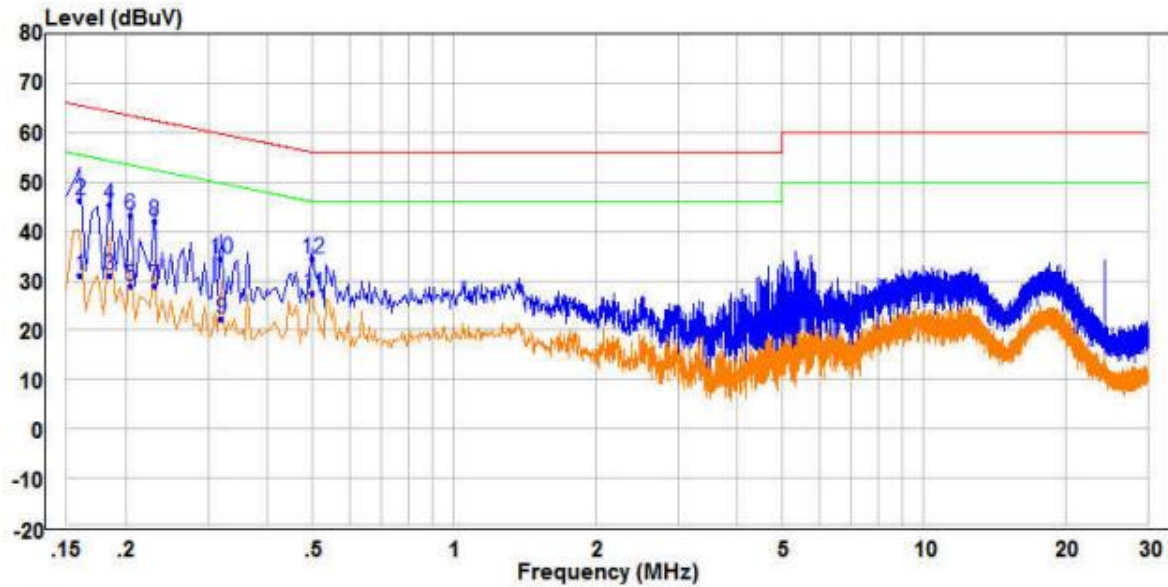


	Read Freq	Level	Factor	Limit Level	Over Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	21.38	9.68	31.06	55.46	-24.40	Average	Neutral
2	0.160	36.47	9.68	46.15	65.46	-19.31	QP	Neutral
3	0.185	21.38	9.63	31.01	54.26	-23.25	Average	Neutral
4 QP	0.185	35.61	9.63	45.24	64.26	-19.02	QP	Neutral
5	0.205	19.21	9.60	28.81	53.41	-24.60	Average	Neutral
6	0.205	33.65	9.60	43.25	63.41	-20.16	QP	Neutral
7	0.230	19.25	9.56	28.81	52.45	-23.64	Average	Neutral
8	0.230	32.59	9.56	42.15	62.45	-20.30	QP	Neutral
9	0.320	12.69	9.51	22.20	49.71	-27.51	Average	Neutral
10	0.320	25.00	9.51	34.51	59.71	-25.20	QP	Neutral
11 PP	0.500	17.73	9.70	27.43	46.00	-18.57	Average	Neutral
12	0.500	24.68	9.70	34.38	56.00	-21.62	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.2.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

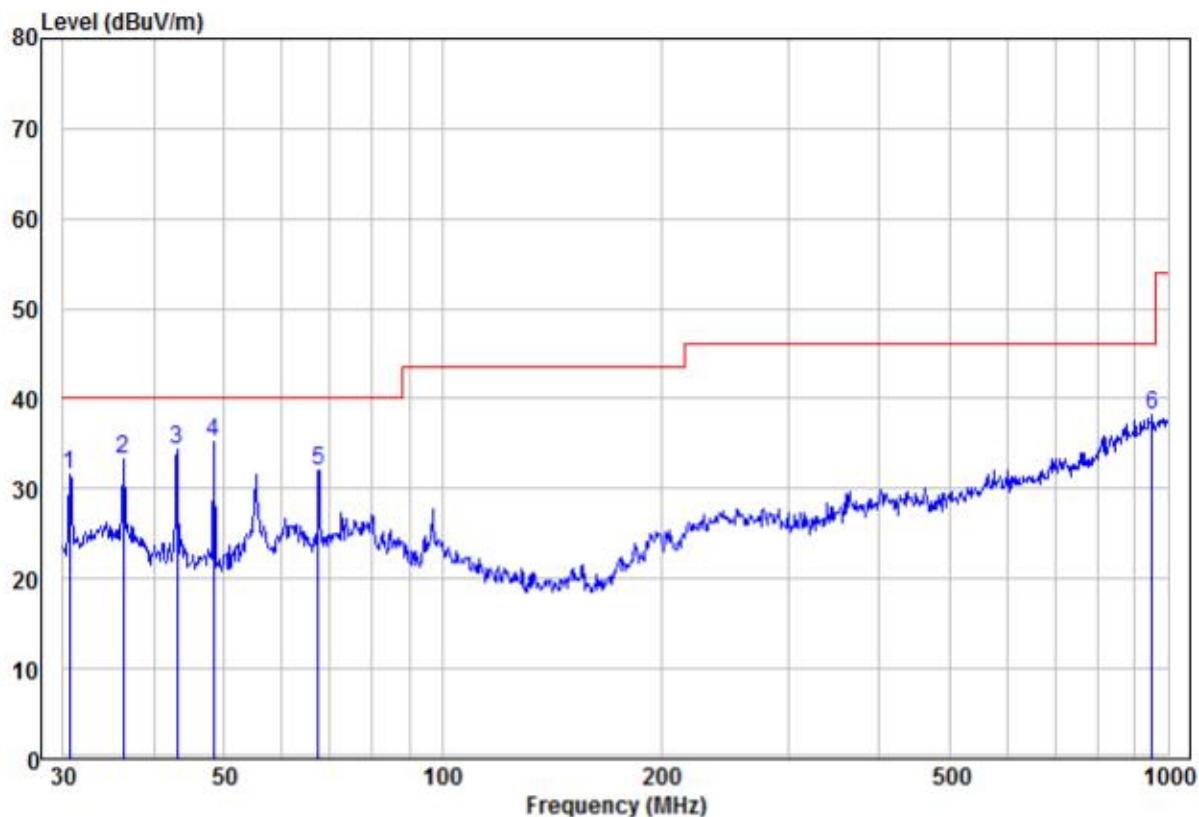

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.64	23.32	8.22	31.54	40.00	-8.46	Peak	VERTICAL
2	36.25	23.97	9.36	33.33	40.00	-6.67	Peak	VERTICAL
3	43.05	22.78	11.52	34.30	40.00	-5.70	Peak	VERTICAL
4 pp	48.33	22.78	12.40	35.18	40.00	-4.82	Peak	VERTICAL
5	67.44	21.76	10.25	32.01	40.00	-7.99	Peak	VERTICAL
6	952.09	10.18	28.00	38.18	46.00	-7.82	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

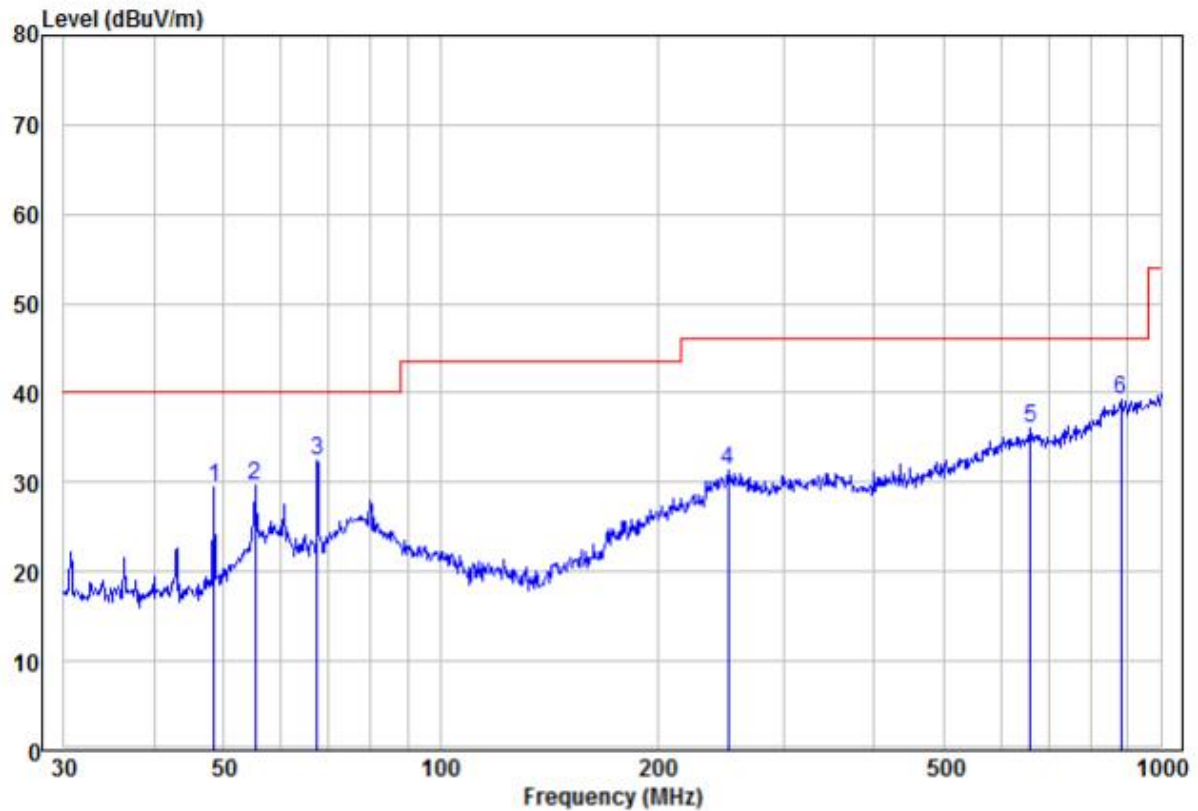

	Freq	Read		Limit	Over			
	MHz	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	48.50	17.12	12.42	29.54	40.00	-10.46	Peak	HORIZONTAL
2	55.22	16.85	12.79	29.64	40.00	-10.36	Peak	HORIZONTAL
3	67.44	22.27	10.25	32.52	40.00	-7.48	Peak	HORIZONTAL
4	251.18	15.66	15.74	31.40	46.00	-14.60	Peak	HORIZONTAL
5	658.84	13.12	22.90	36.02	46.00	-9.98	Peak	HORIZONTAL
6 pp	881.41	10.27	28.99	39.26	46.00	-6.74	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

5.2.2 Transmitter Emission above 1GHz


Worse case mode:	GFSK(1Mbps)	Test channel:	Lowest		
------------------	-------------	---------------	--------	--	--

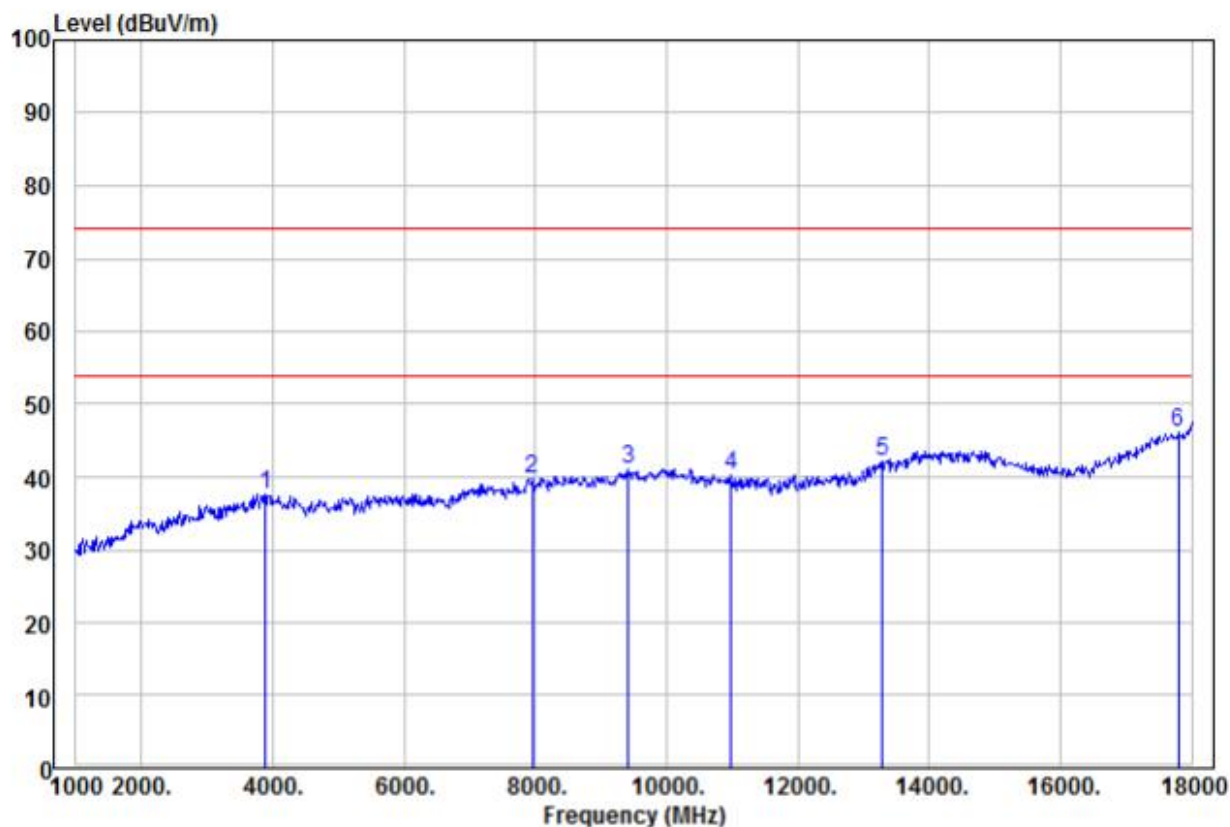


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	3890.00	49.69	-12.10	37.59	74.00	-36.41	Peak	HORIZONTAL
2	7953.00	47.32	-7.52	39.80	74.00	-34.20	Peak	HORIZONTAL
3	9415.00	47.37	-6.36	41.01	74.00	-32.99	Peak	HORIZONTAL
4	10979.00	45.61	-5.41	40.20	74.00	-33.80	Peak	HORIZONTAL
5	13291.00	45.57	-3.56	42.01	74.00	-31.99	Peak	HORIZONTAL
6 pp	17796.00	44.77	1.23	46.00	74.00	-28.00	Peak	HORIZONTAL

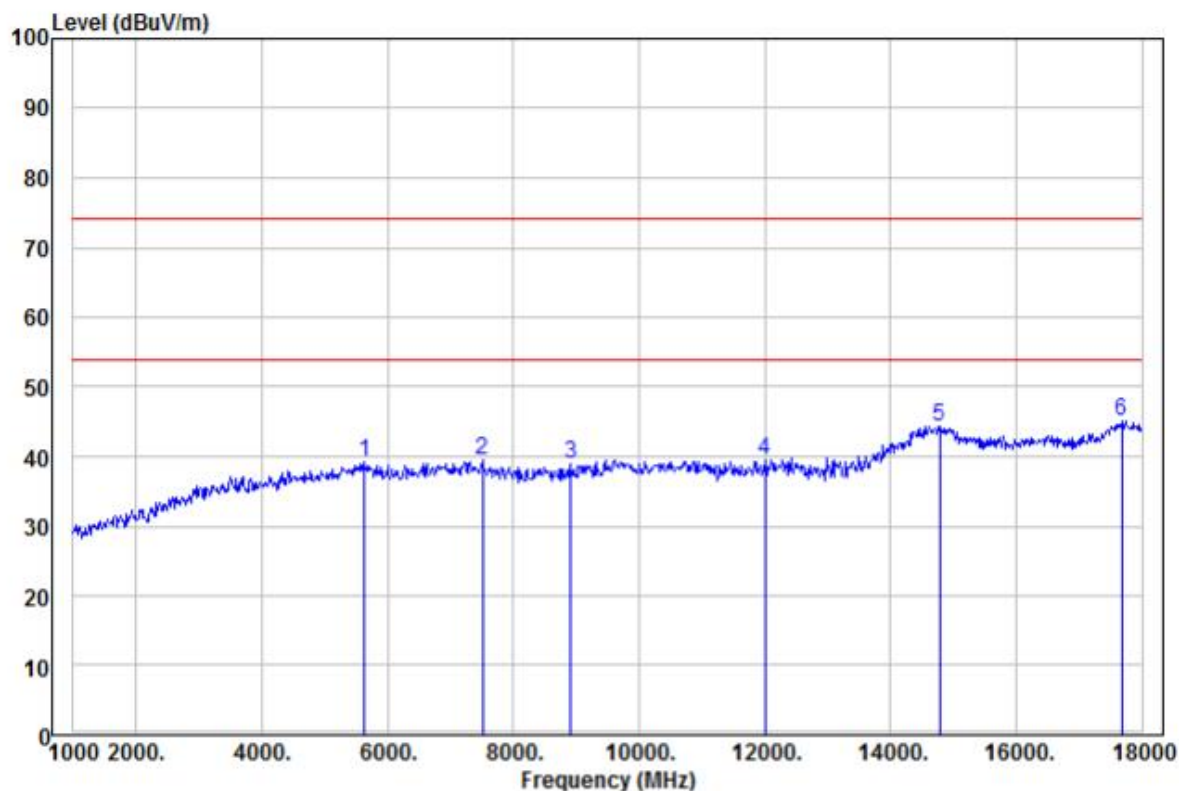

	Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	5641.00	49.27	-10.18	39.09	74.00	-34.91	Peak
2	7511.00	47.56	-8.18	39.38	74.00	-34.62	Peak
3	8922.00	46.00	-7.11	38.89	74.00	-35.11	Peak
4	11999.00	44.49	-5.00	39.49	74.00	-34.51	Peak
5	14787.00	45.61	-1.23	44.38	74.00	-29.62	Peak
6 pp	17677.00	44.04	0.99	45.03	74.00	-28.97	Peak

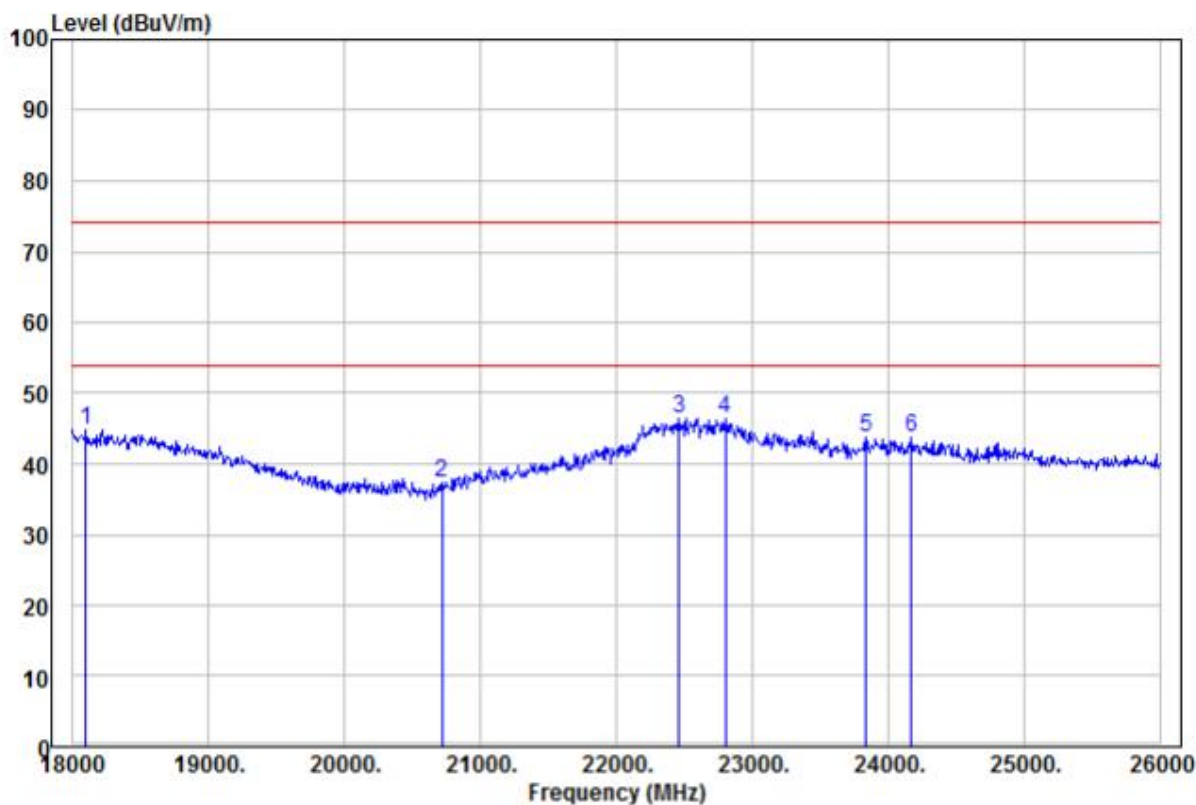


	Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	18096.00	49.52	-4.72	44.80	74.00	-29.20	Peak HORIZONTAL
2	20720.00	43.66	-6.22	37.44	74.00	-36.56	Peak HORIZONTAL
3	22464.00	49.31	-2.96	46.35	74.00	-27.65	Peak HORIZONTAL
4 pp	22800.00	50.40	-3.99	46.41	74.00	-27.59	Peak HORIZONTAL
5	23840.00	45.51	-1.78	43.73	74.00	-30.27	Peak HORIZONTAL
6	24176.00	44.88	-1.23	43.65	74.00	-30.35	Peak HORIZONTAL

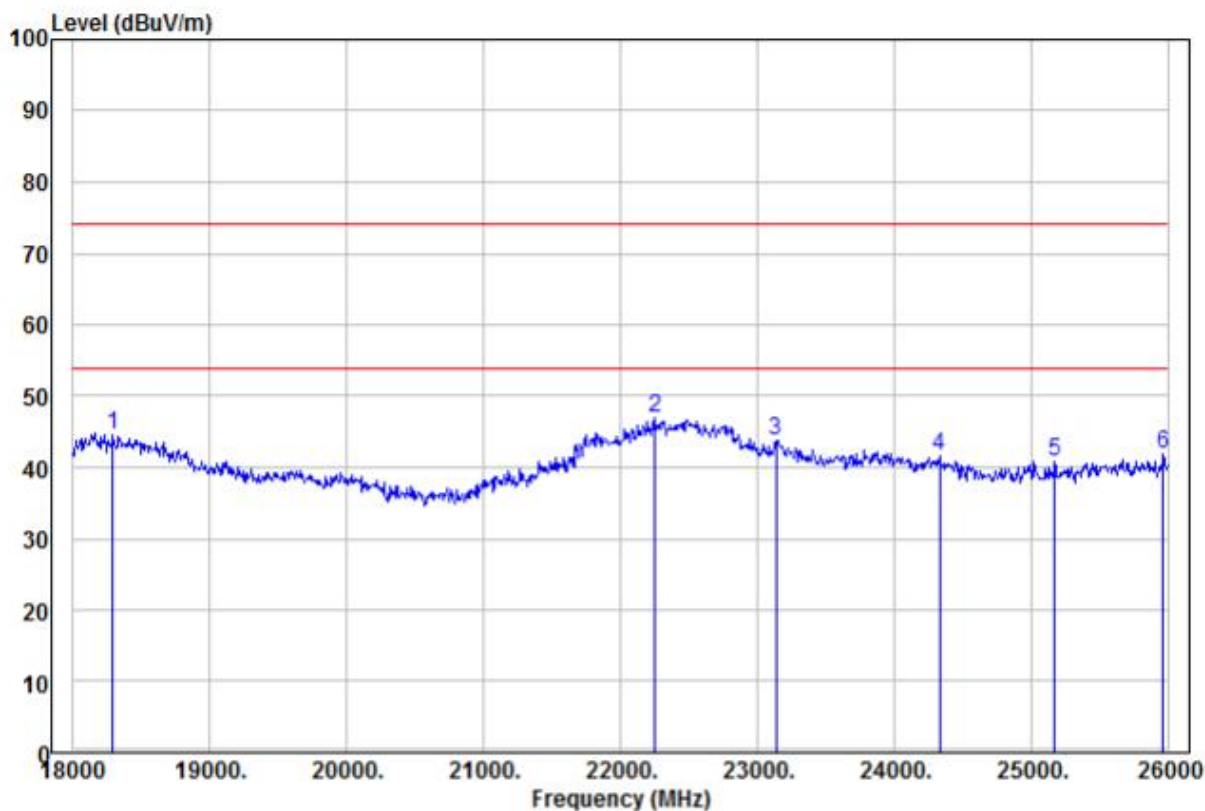


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	18288.00	49.62	-5.07	44.55	74.00	-29.45	Peak	VERTICAL
2	22256.00	49.29	-2.44	46.85	74.00	-27.15	Peak	VERTICAL
3	23136.00	47.94	-4.16	43.78	74.00	-30.22	Peak	VERTICAL
4	24336.00	42.79	-1.24	41.55	74.00	-32.45	Peak	VERTICAL
5	25176.00	42.16	-1.37	40.79	74.00	-33.21	Peak	VERTICAL
6	25968.00	45.27	-3.49	41.78	74.00	-32.22	Peak	VERTICAL


Worse case mode:	GFSK(1Mbps)	Test channel:	Middle		
------------------	-------------	---------------	--------	--	--

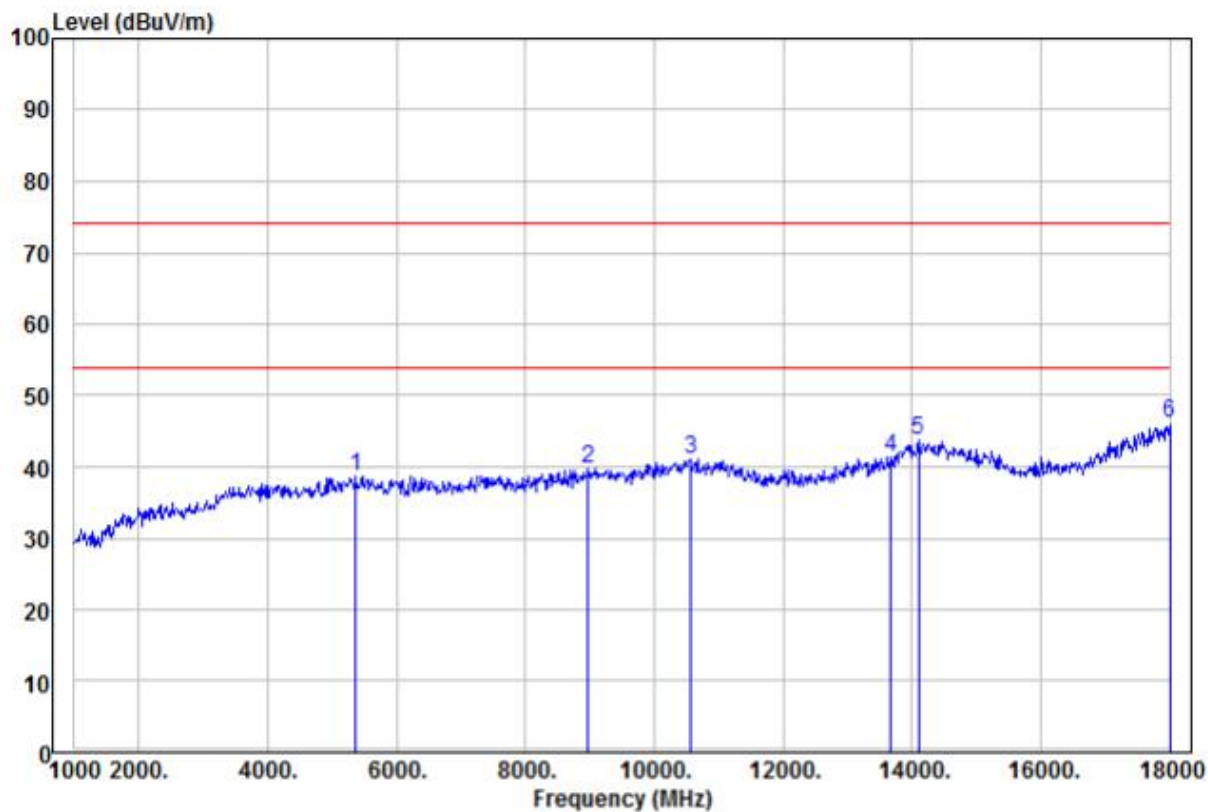


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	5369.00	49.15	-10.44	38.71	74.00	-35.29 Peak	HORIZONTAL
2	8973.00	46.81	-7.05	39.76	74.00	-34.24 Peak	HORIZONTAL
3	10571.00	47.00	-5.83	41.17	74.00	-32.83 Peak	HORIZONTAL
4	13682.00	43.86	-2.40	41.46	74.00	-32.54 Peak	HORIZONTAL
5	14107.00	44.73	-0.99	43.74	74.00	-30.26 Peak	HORIZONTAL
6 pp	18000.00	44.56	1.50	46.06	74.00	-27.94 Peak	HORIZONTAL

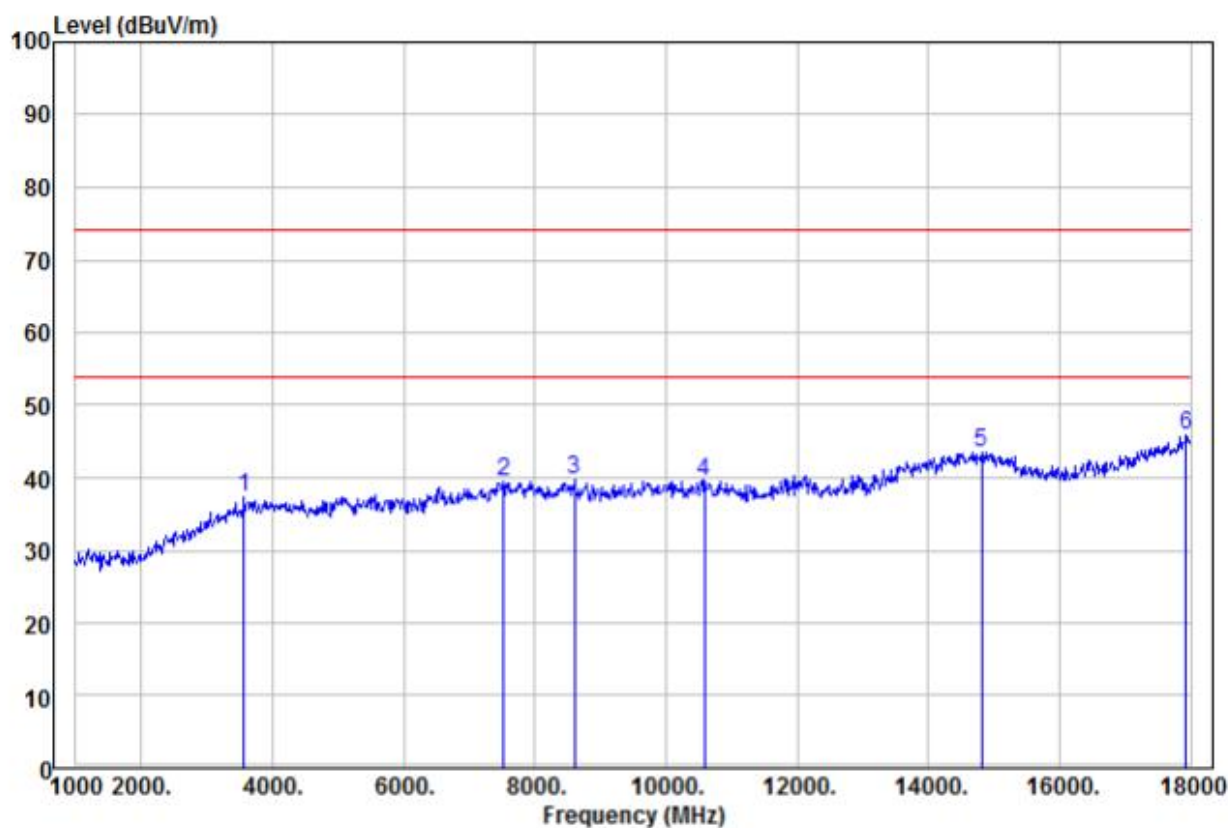

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	3567.00	50.49	-13.03	37.46	74.00	-36.54 Peak	VERTICAL
2	7528.00	47.57	-8.13	39.44	74.00	-34.56 Peak	VERTICAL
3	8599.00	46.96	-7.34	39.62	74.00	-34.38 Peak	VERTICAL
4	10588.00	45.38	-5.80	39.58	74.00	-34.42 Peak	VERTICAL
5	14821.00	44.80	-1.34	43.46	74.00	-30.54 Peak	VERTICAL
6 pp	17932.00	44.54	1.44	45.98	74.00	-28.02 Peak	VERTICAL

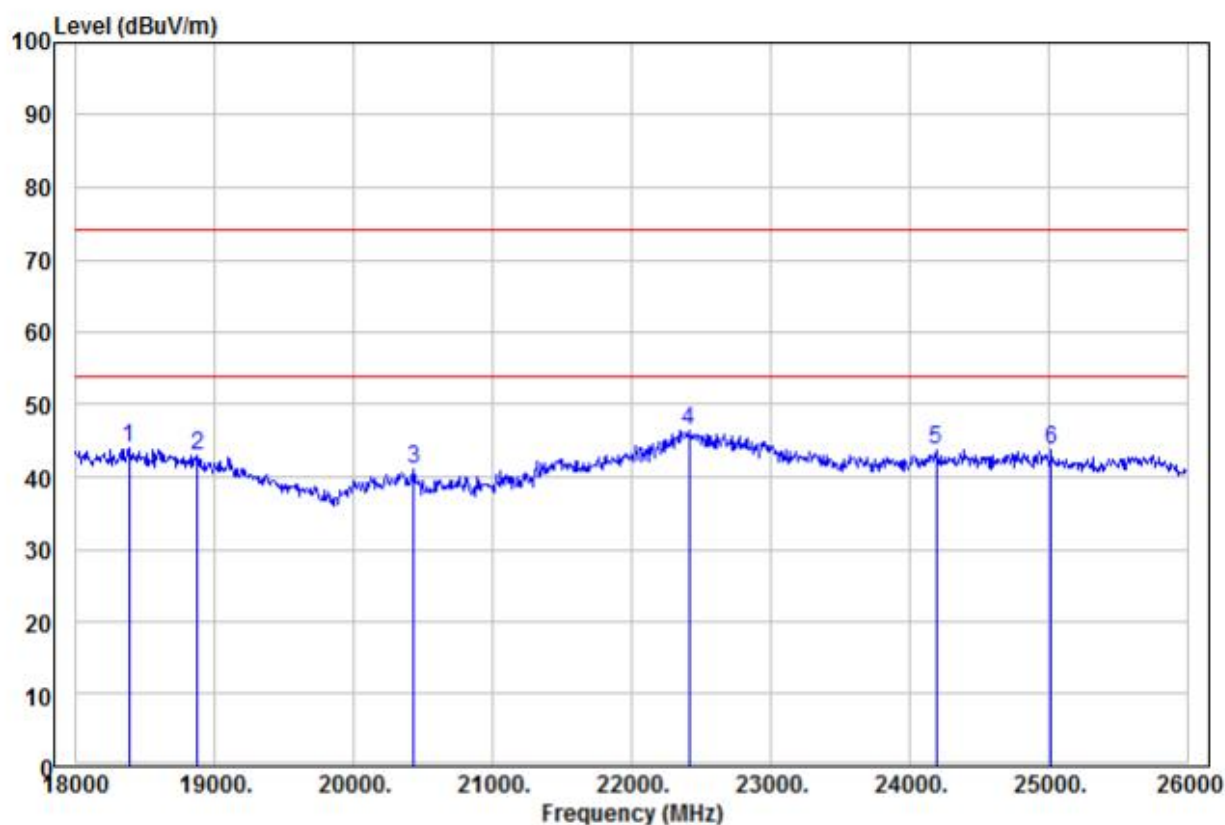


	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	18376.00	49.37	-5.25	44.12	74.00	-29.88	Peak	HORIZONTAL
2	18872.00	48.40	-5.41	42.99	74.00	-31.01	Peak	HORIZONTAL
3	20432.00	47.31	-6.34	40.97	74.00	-33.03	Peak	HORIZONTAL
4 pp	22416.00	49.13	-2.83	46.30	74.00	-27.70	Peak	HORIZONTAL
5	24192.00	44.94	-1.24	43.70	74.00	-30.30	Peak	HORIZONTAL
6	25024.00	44.40	-0.75	43.65	74.00	-30.35	Peak	HORIZONTAL

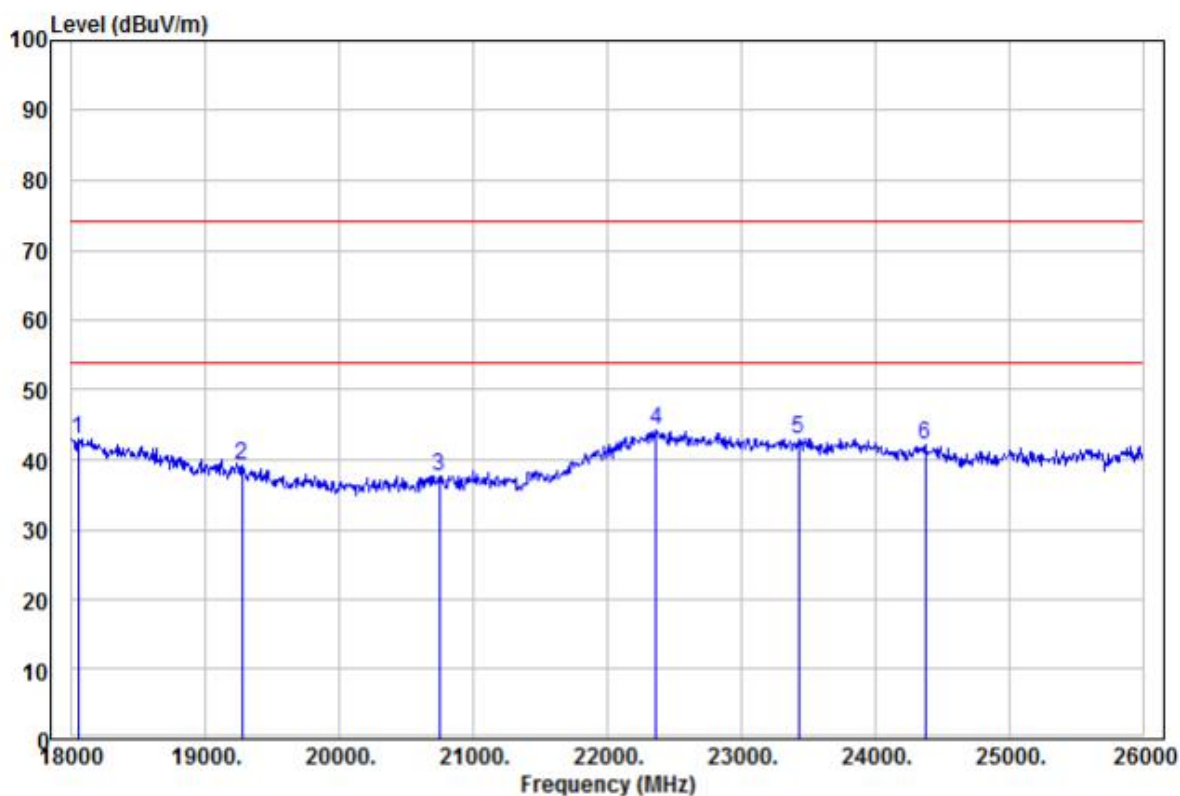


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	18048.00	47.61	-4.63	42.98	74.00	-31.02	Peak	VERTICAL
2	19272.00	44.78	-5.47	39.31	74.00	-34.69	Peak	VERTICAL
3	20744.00	43.92	-6.22	37.70	74.00	-36.30	Peak	VERTICAL
4 pp	22368.00	46.94	-2.72	44.22	74.00	-29.78	Peak	VERTICAL
5	23432.00	46.23	-3.19	43.04	74.00	-30.96	Peak	VERTICAL
6	24376.00	43.47	-1.23	42.24	74.00	-31.76	Peak	VERTICAL


Worse case mode:	GFSK(1Mbps)	Test channel:	Highest		
------------------	-------------	---------------	---------	--	--

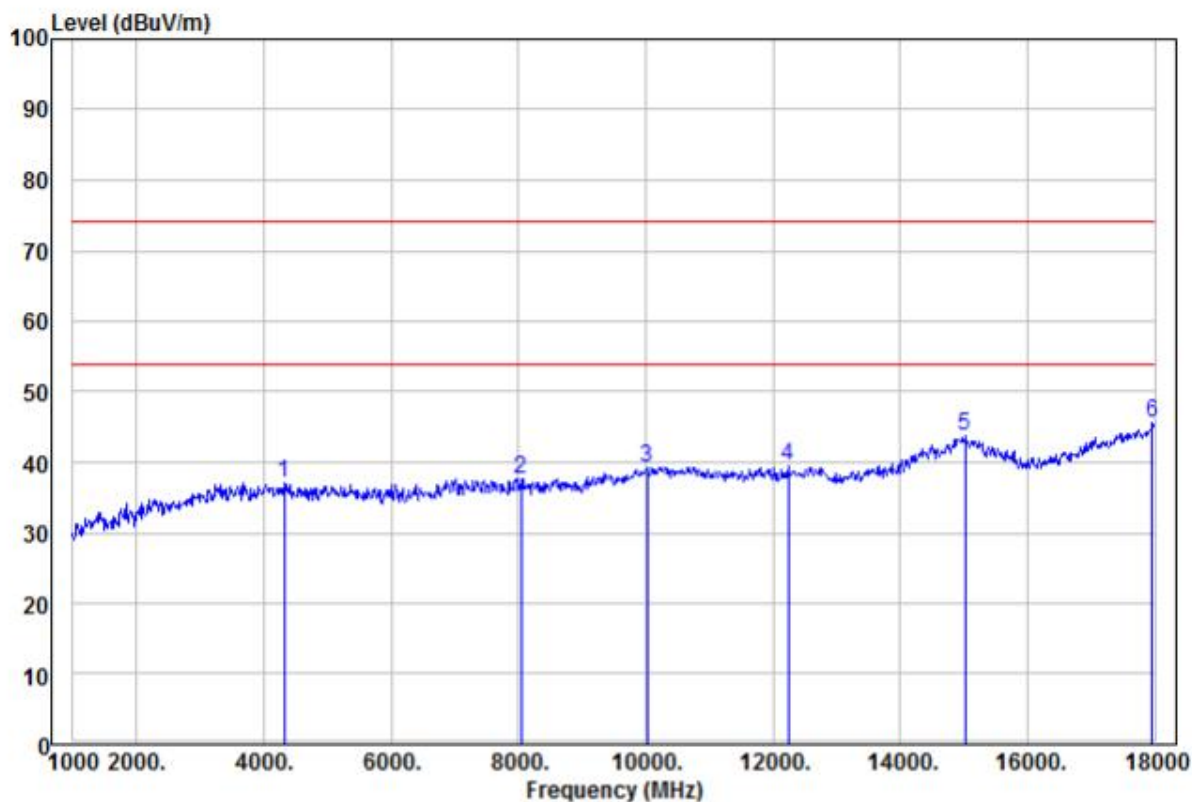


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	4315.00	49.04	-12.06	36.98	74.00	-37.02 Peak	HORIZONTAL
2	8038.00	45.07	-7.42	37.65	74.00	-36.35 Peak	HORIZONTAL
3	10027.00	45.56	-6.28	39.28	74.00	-34.72 Peak	HORIZONTAL
4	12237.00	44.29	-4.91	39.38	74.00	-34.62 Peak	HORIZONTAL
5	15025.00	45.75	-2.08	43.67	74.00	-30.33 Peak	HORIZONTAL
6 pp	17966.00	44.00	1.48	45.48	74.00	-28.52 Peak	HORIZONTAL

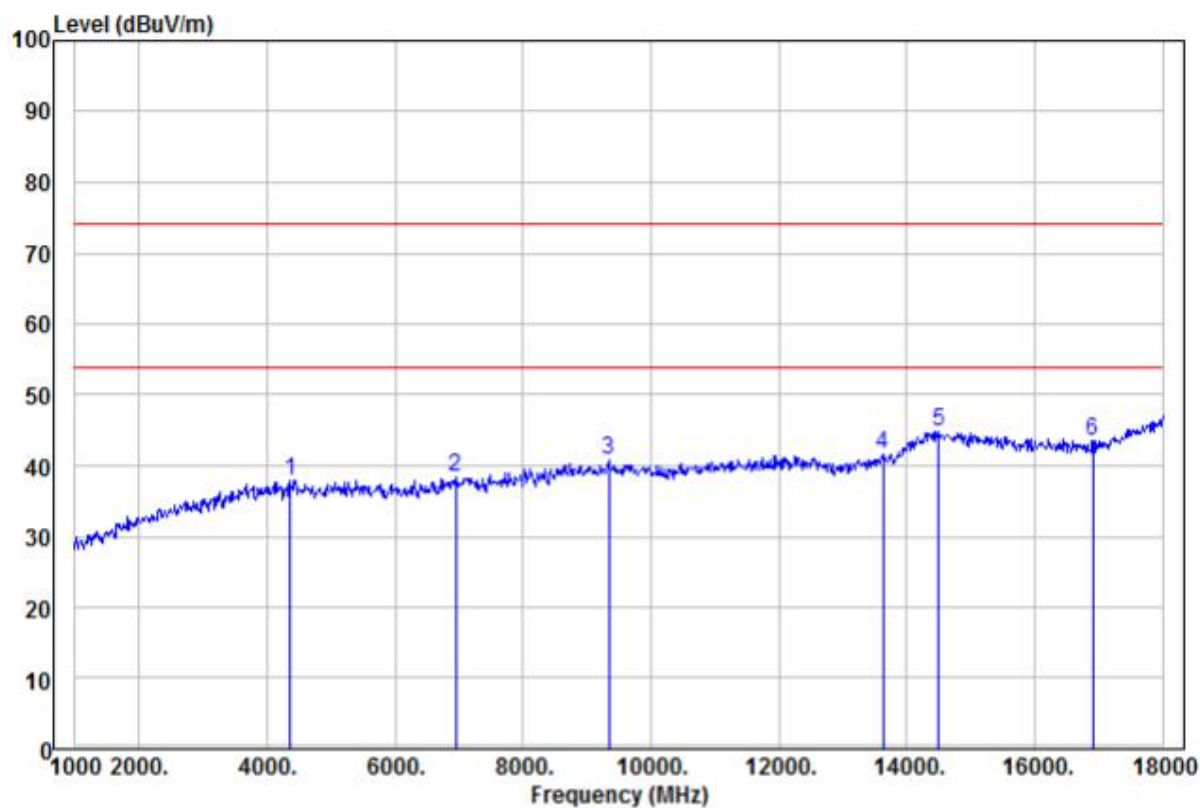

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	4366.00	50.00	-12.07	37.93	74.00	-36.07	Peak	VERTICAL
2	6950.00	47.06	-8.69	38.37	74.00	-35.63	Peak	VERTICAL
3	9347.00	47.35	-6.53	40.82	74.00	-33.18	Peak	VERTICAL
4	13631.00	44.01	-2.52	41.49	74.00	-32.51	Peak	VERTICAL
5	pp 14498.00	45.33	-0.45	44.88	74.00	-29.12	Peak	VERTICAL
6	16912.00	44.42	-0.84	43.58	74.00	-30.42	Peak	VERTICAL

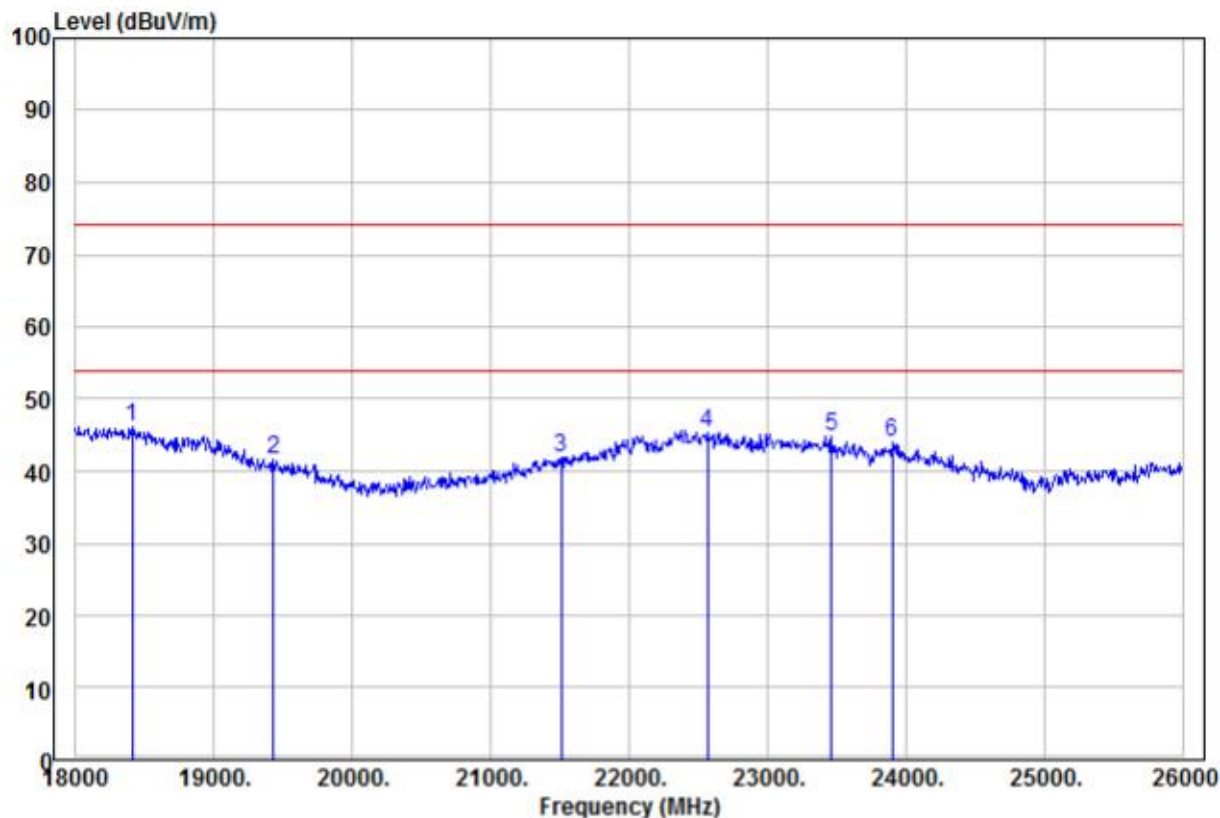

		Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	pp 18408.00	51.42	-5.29	46.13	74.00	-27.87	Peak	HORIZONTAL
2	19432.00	47.12	-5.50	41.62	74.00	-32.38	Peak	HORIZONTAL
3	21512.00	45.34	-3.39	41.95	74.00	-32.05	Peak	HORIZONTAL
4	22568.00	48.66	-3.26	45.40	74.00	-28.60	Peak	HORIZONTAL
5	23464.00	47.80	-3.09	44.71	74.00	-29.29	Peak	HORIZONTAL
6	23904.00	45.64	-1.57	44.07	74.00	-29.93	Peak	HORIZONTAL

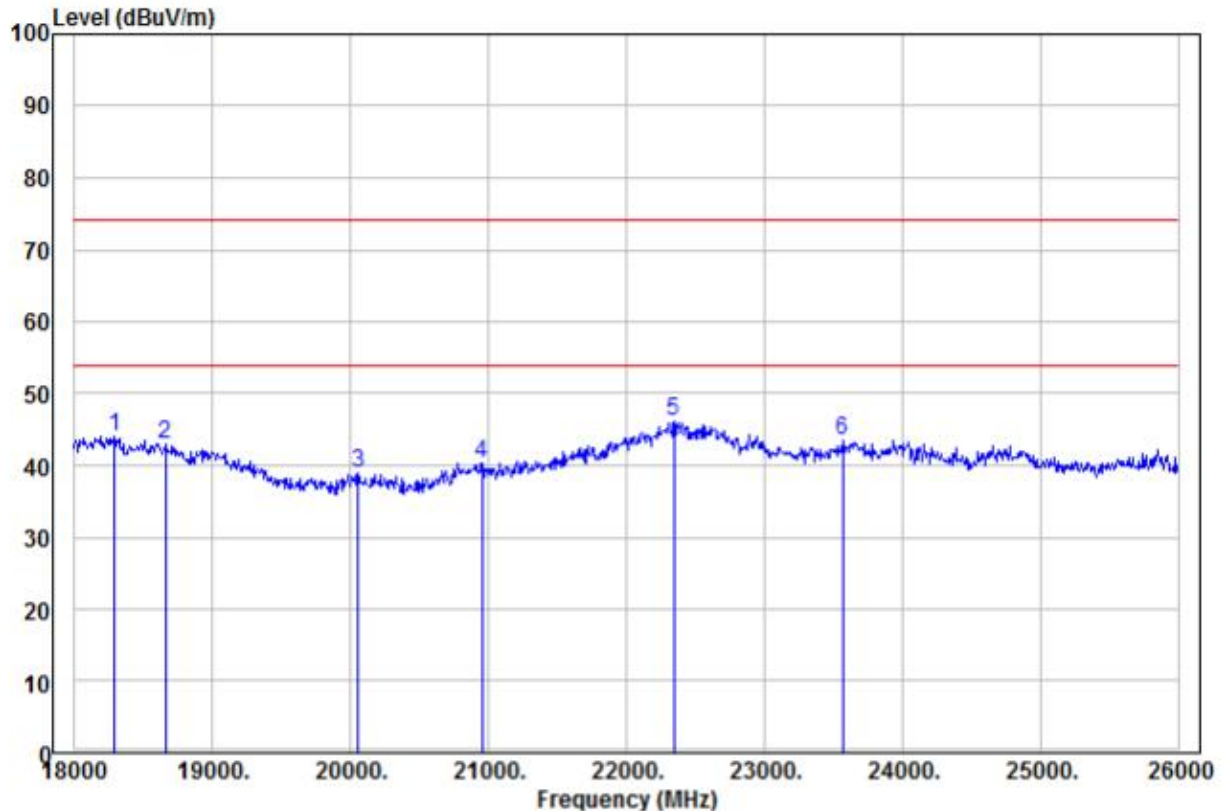

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	18288.00	49.12	-5.07	44.05	74.00	-29.95	Peak
2	18656.00	48.45	-5.44	43.01	74.00	-30.99	Peak
3	20056.00	45.72	-6.79	38.93	74.00	-35.07	Peak
4	20952.00	46.57	-6.17	40.40	74.00	-33.60	Peak
5 pp	22344.00	48.72	-2.65	46.07	74.00	-27.93	Peak
6	23568.00	46.18	-2.73	43.45	74.00	-30.55	Peak


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


6 Photographs - EUT Test Setup

6.1 Radiated Emission

9KHz~30MHz:

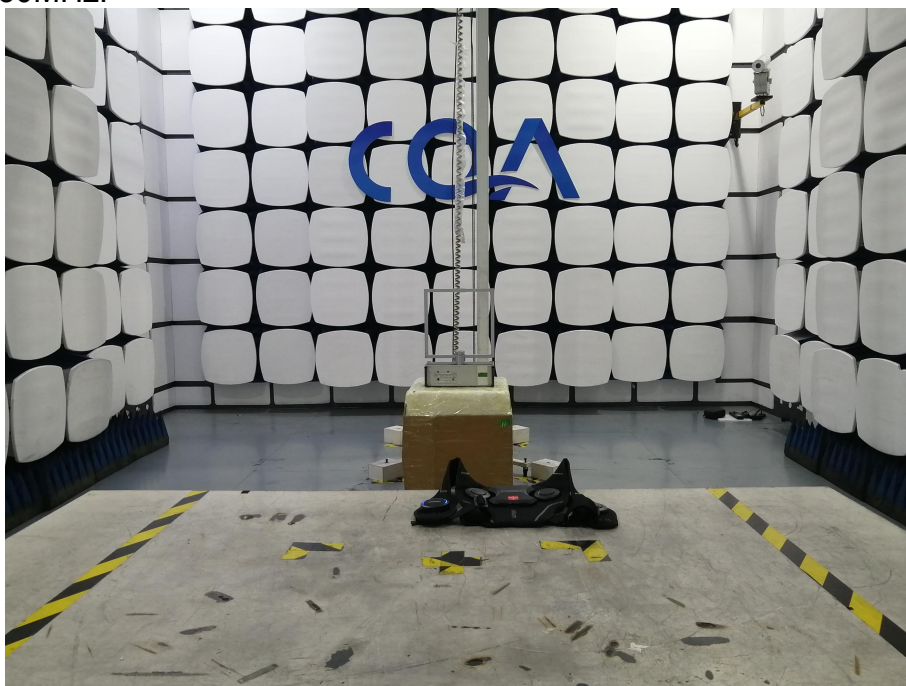

30MHz~1GHz:

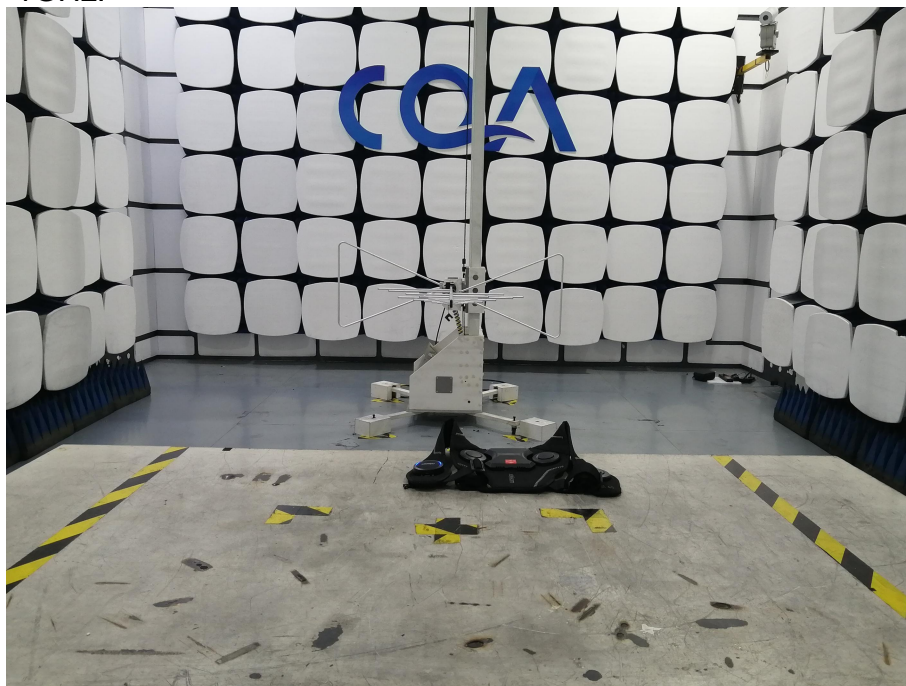

Above 1GHz:



6.2 Conducted Emission



7 Photographs - EUT Constructional Details

Refer to Photographs - EUT Constructional Details OF EUT for CQASZ20260400871E-01.

*** END OF REPORT ***