
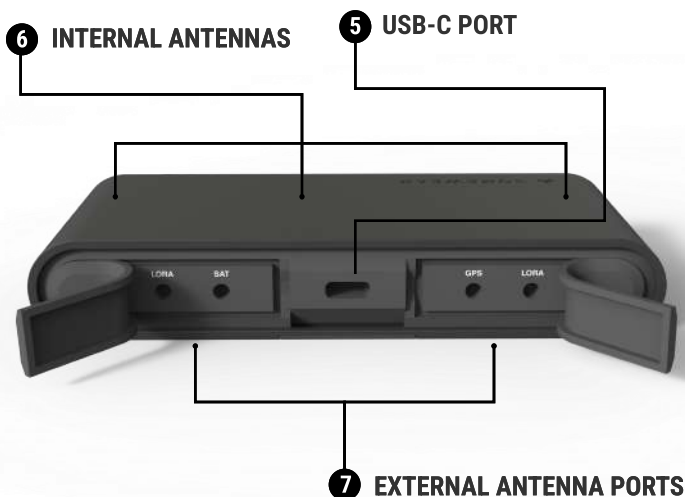


USER GUIDE | NODE

Somewear Node is a multi-network device that intelligently routes data via a mesh or satellite network, empowering teams to maintain agile, resilient communications – in any environment.

PRODUCT OVERVIEW

- 1 POWER**
Hold for 3 seconds to turn on
- 2 PROGRAMMABLE BUTTON**
Programmable button to disable/enable satellite or location tracking (*configurable in settings*)
- 3 SOS**
Remove cap and hold for 6 seconds to activate
- 4 LED LIGHT**
See *LED patterns* section for details

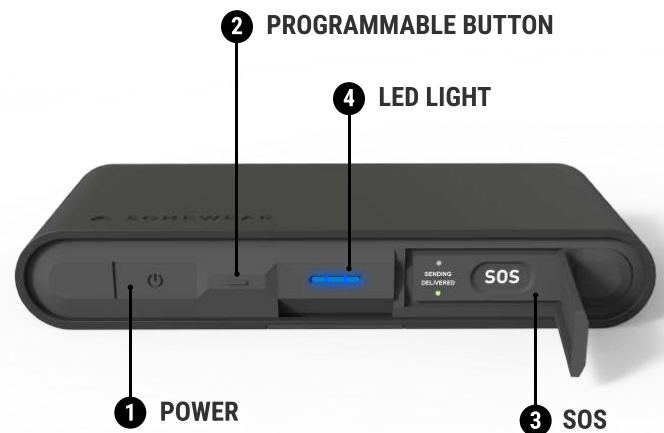

- 5 USB CHARGING AND LINE-IN**
Connect USB cable to charge and to use Node with a hardwired connection instead of Bluetooth
- 6 INTERNAL ANTENNAS**
Ensure logo is always facing up towards the sky or out if mounted on your body to optimize signal strength
- 7 EXTERNAL ANTENNA PORTS**
Attach optional external antennas depending on your mission and applications

8 STATUS PILL

Tap to pair, then use the status pill to access device information, ensuring comprehensive device management and maintenance.


9 GRID MOBILE

Maximize situational awareness in the field

- Messaging
- Waypoints
- Tracking
- SOS

10 GRID WEB

Remotely oversee and manage operations; enhance personnel accountability, facilitate messaging, ensure constant situational awareness, and manage devices/accounts.

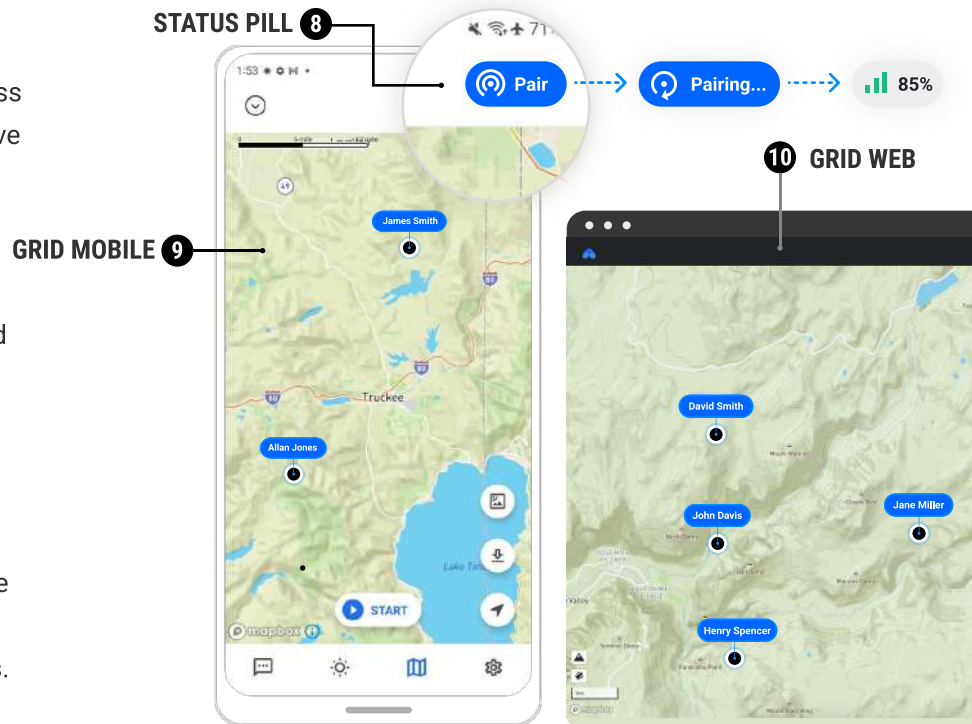

ORIENTING NODE


For optimal satellite connectivity

Ensure that Node is placed with the Somewear logo facing outward towards the sky. Avoid any obstructions in the surroundings including, tall buildings and dense foliage. A direct line of sight to the sky will improve satellite signal strength.



LED PATTERNS

The primary LED button on Node indicates the status of the device, location tracking, and more.

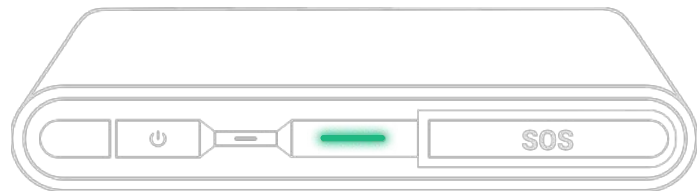

Pairing mode	White	Fast blink
On (unpaired)	Green	Slow blink
On (paired)	Blue	Slow blink
Tracking on (unpaired)	Green	Fast blink
Tracking on (paired)	Blue	Fast blink
Low battery	Red	Slow blink
Function activated via programmable button	Green	Rapid blink for 2s
Function deactivated via programmable button	Red	Rapid blink for 2s
Device firmware upgrade	Yellow	Fast blink (downloading firmware)
	Purple	Slow blink (install)

SOS

The SOS button has its own set of white LED lights

Sending	White	Sending LED blinking
Delivered	White	Delivered LED solid
Cancelling SOS	White	Sending/delivered LEDs blinking






VIBRATION FEEDBACK

On start	Single pulse
On shutdown	Double pulse
Pairing mode	Short pulse every 2s until paired
Function activated via programmable button	Single pulse
Function deactivated via programmable button	Double pulse
SOS activated	3 short pulses, 3 long pulses, 3 short pulses
SOS cancelled	Single pulse
Firmware update starts	Triple pulse

CONNECTING EXTERNAL ANTENNAS

1. Open the external antenna ports located next to the USB port
2. Plug in the MCX connector of the desired antenna to the correct antenna port
3. Mount the antenna on the roof of the vehicle oriented towards the sky

Note: Satellite external antenna should not exceed 2.2 dBi gain. Lora external antennas should not exceed 1.5 dBi gain.

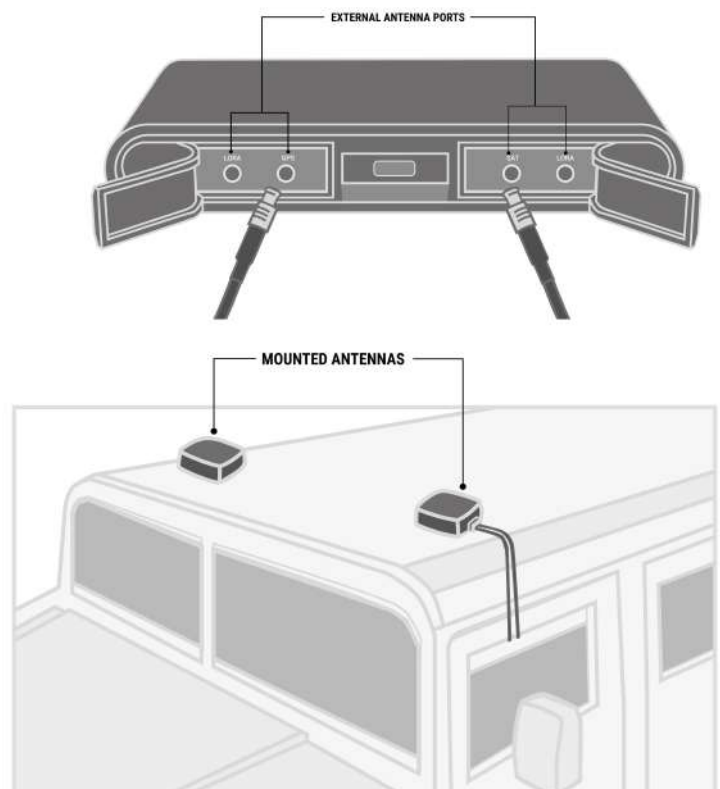

QUICK START GUIDE

1

DOWNLOAD THE SOMEWEAR MOBILE APP



Google Play

https://play.google.com/store/apps/details?id=com.somewearlabs.sw&hl=en_US



App Store

<https://apps.apple.com/us/app/somewear/id1421676449>

2

CREATE YOUR SOMEWEAR ACCOUNT

On the mobile app, select “Get Started” and follow the on-screen prompts. If you don’t have an account already, your account will be created upon sign in

NOTE: When Somewear asks if you own a hardware device select **NO**.

3

CONFIRM YOUR WORKSPACE

Once in the app, verify that you are part of the correct Workspace by going to “Settings” and checking your Active Workspace. Then, navigate to messages and try sending a message to your Workspace chat to confirm messages are being received. If you aren’t part of an active workspace, please contact your administrator or see **JOINING A WORKSPACE**.

4

PAIRING YOUR DEVICE


STEP ONE

Put Node into pairing mode. To do so, ensure Node is **OFF**. Then, press Node’s power button until the LED begins to flash white.



STEP TWO

Tap the  Pair in the app. Once paired you should see Node details appear in the header, indicating you are connected. You will also see a battery and signal strength indicator.

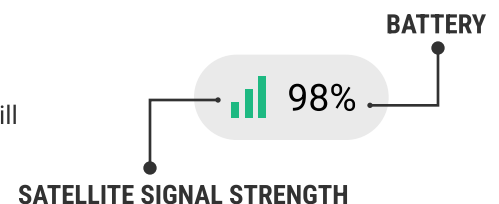

5

CONDUCT A COMMS CHECK

Before you begin your operations, confirm that you are setup correctly.

- Switch your phone to airplane mode and ensure you aren’t connected to a WiFi network
- To test mesh: send a message to the Workspace (ensure there is a Node user in range)
- To test satellite: shut off all Nodes in range and send a message to the Workspace

JOINING A WORKSPACE

- 1 Tap "Settings"
- 2 Select "Active Workspace"
- 3 Tap  [Join a new workspace](#)
- 4 You will be prompted to either scan or paste a QR code from an existing workspace (generated from the web app)




MESSAGES

Communicate with team members to maintain situational awareness, and leverage Node to send messages over Mesh or Satellite in the absence of traditional networks.

SENDING A MESSAGE

- 1 From the bottom navigation, tap the Messages icon
- 2 Select your Workspace chat from the list (it'll always be the first one on the list)
- 3 Any message sent in this Workspace chat will be received by everyone in the Workspace.

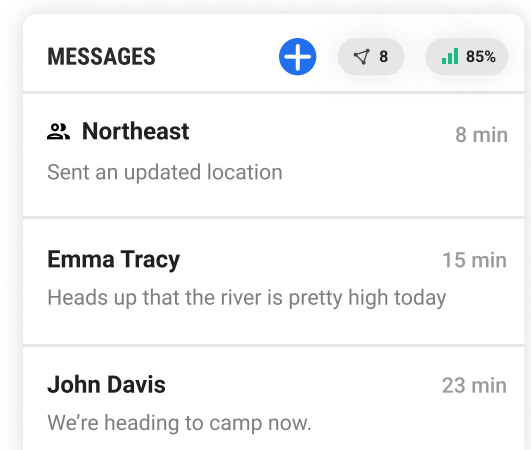

UNIFIED MESSAGING EXPERIENCE

All messages, whether leveraging a cell/wifi, mesh or satellite network, will appear in the same Workspace, for unified and streamlined communications.


*NOTE

SmartRouting will automatically detect which networks (cell/wifi, mesh, satellite) are available and intelligently transmit your message via the most efficient channel.



NETWORK STATUS

The icon under your message indicates which network your message was sent through.

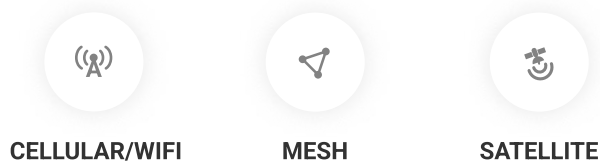


MESSAGE SENT OVER MESH

Issue has been resolved.

17:35

Will update again in 10 min

17:42

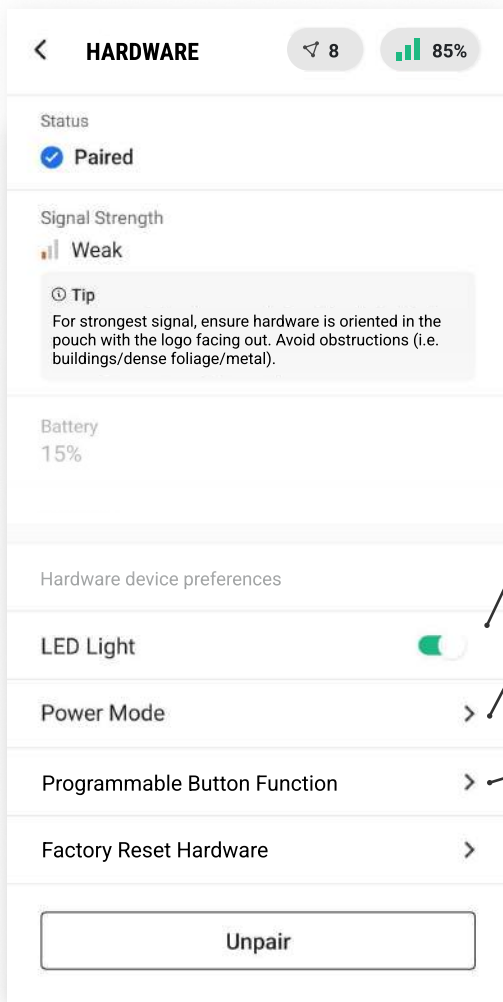

ADVANCED NODE SETTINGS

Navigate to **HARDWARE** in “Settings” to manage your device preferences

LED LIGHT

Enable/disable the LED light on Node

POWER MODE

Select from low, medium, and high power modes to conserve battery on your Node

This controls the transmit power over radio. Higher power allows you to transmit over a longer range but will shorten your battery life.

PROGRAMMABLE BUTTON

Select from the following options:

1. Enable/disable satellite connectivity
2. Turn tracking on/off

APP & FEATURE SETTINGS


Navigate to 设置 App & Feature Settings in “Settings” for advanced settings

ALTITUDE

Enable/disable altitude reporting with every PLI point

B SMARTBACKHAUL™

SmartBackhaul™ intelligently routes data from the mesh network to the Node(s) that have the best satellite or cellular connectivity to serve as the most optimal wireless backhaul(s). Each team member carrying a Node can serve as a reliable backhaul.

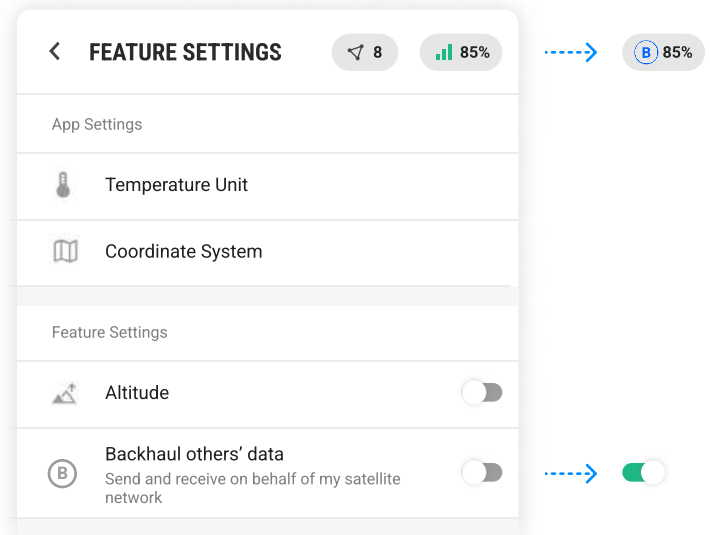

ACTIVATING THE BACKHAUL

- 1 Navigate to “Settings”
- 2 Tap on “Feature Settings”
- 3 Toggle “Backhaul others’ data”
- 4 Confirm Backhaul is enabled for your device by making sure there is a **B** in the status pill next to the battery percentage


*For **optimal backhaul performance**, we recommend no more than **3 Nodes** per backhaul to avoid satellite congestion.*

HOW TO USE BACKHAUL

- 1 When sending a message, long-press the send button and then tap “backhaul”
- 2 Long-press a message that’s already been sent and tap “backhaul”

TRACKING

Tracking empowers team members to automatically broadcast their position in real-time to everyone in the Workspace. Node can be used as a standalone blue force tracker, or paired to the app to provide operators with greater situational awareness.

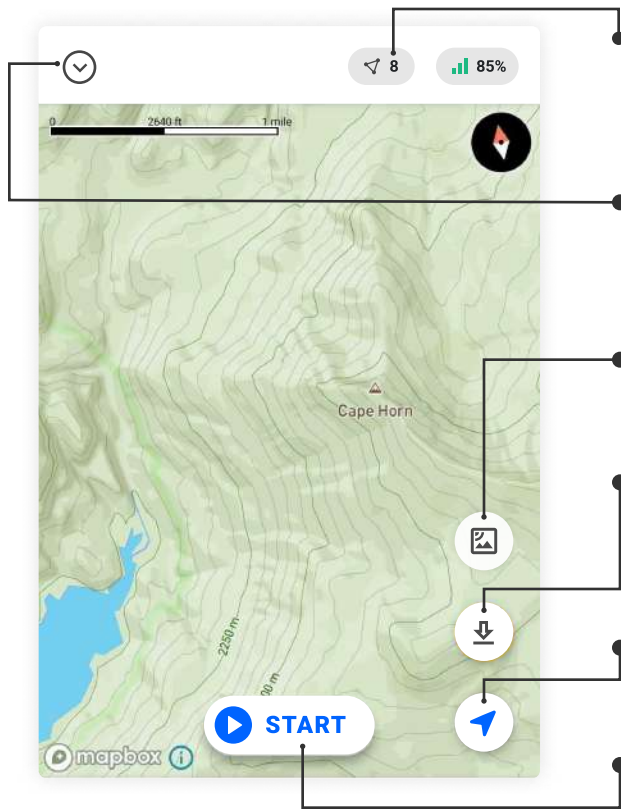

NODES IN NETWORK

View the number of **active** Nodes in your network. Tap to see all active + inactive devices

MAP TOOLS & FILTERS

Adjust your tracking interval, access offline maps, and apply filters to view active/inactive users or specific assets.

MAP STYLE

Toggle between topographic and satellite map view.

DOWNLOAD MAPS

Download a section of the map to access offline.


**Maps must be downloaded with cell/wifi connectivity*

GO TO CURRENT LOCATION

Go to your current location on the map

TRACKING

Start and stop a tracking session.

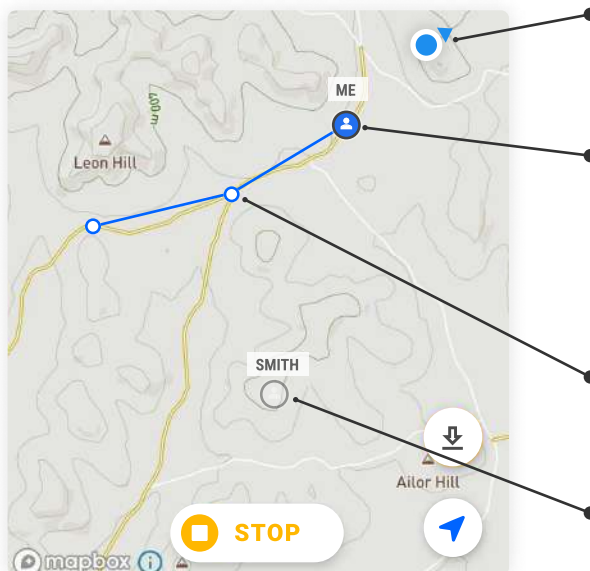

CURRENT LOCATION

This icon shows your current location on the map.

LAST SHARED LOCATION


This dot shows your last known location that was sent to your team. When followers receive a location update, they will see this as your location.

PREVIOUS LOCATIONS

This dot shows past locations in your tracking session.

OTHER SOMEWEAR USERS

This icon indicates other users in your Workspace.

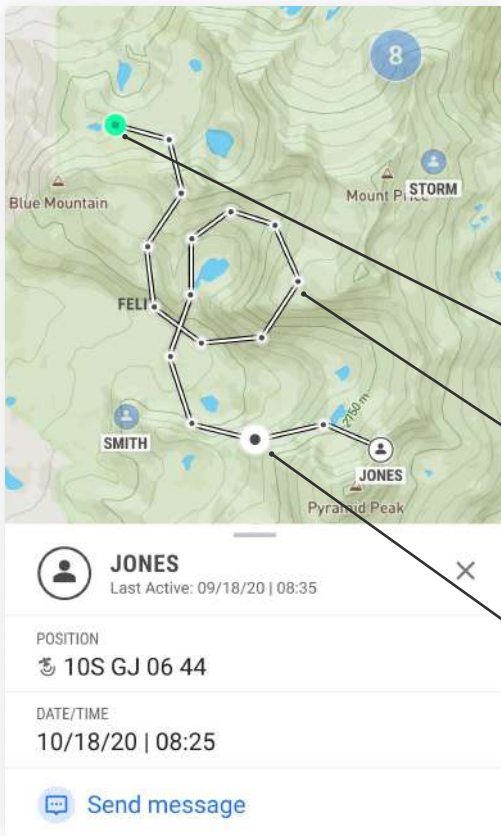

TRACK DETAILS

Tap “Expand” to view a full historical track and then select a users previous location point to view details such as coordinates, date/time stamps, and biometrics (if enabled).

FIRST RECORDED TRACKING POINT

This icon indicates the beginning of a track

PREVIOUS LOCATION POINT

Previous location points can be viewed in the expanded track view. These points can be tapped to view details such as coordinates and date/time stamps.


SELECTED LOCATION POINT

When a point from a track is selected, point details are displayed at the bottom of the screen.




TURNING TRACKING ON/OFF

- 1 Ensure Node is paired (look for the status pill)
- 2 Navigate to the Map screen
- 3 Tap “Start” on the map to begin tracking
- 4 To stop tracking, tap “Stop”




ACTIVATE TRACKING FROM NODE

- 1 Verify that Node is turned on
- 2 To turn tracking on, press the power button 3 times consecutively – the green LED light will flash rapidly.
- 3 To turn tracking off, press the power button 3 times consecutively – the red LED light will flash rapidly to indicate tracking has ended.

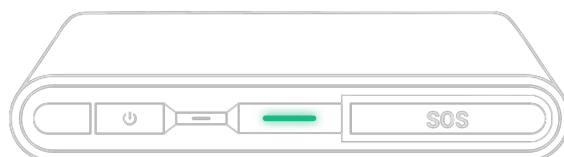


UPDATING THE TRACKING INTERVAL

- 1 Ensure Node is paired
- 2 Navigate to the Map screen
- 3 Tap on ⌵ in nav
- 4 Select “Tools”
- 5 Select “Tracking Interval”

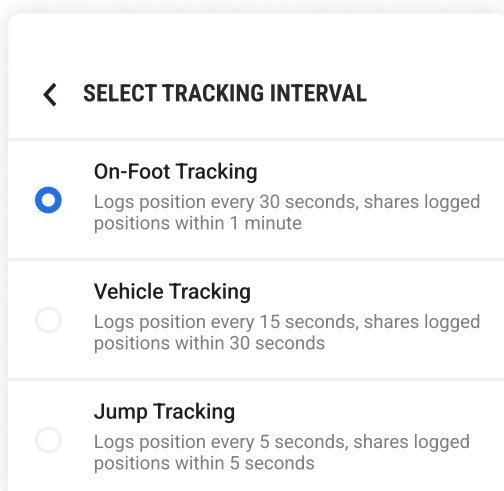

NETWORK SETTINGS

- 1 Ensure Node is paired
- 2 Tap “Settings”
- 3 Select “App & Feature Settings”
- 4 See what networks are available to you as well as the option to toggle Satellite on/off

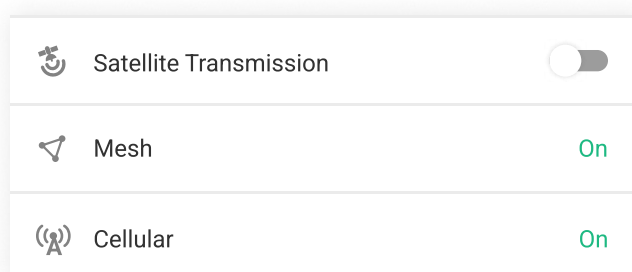

SOS

SOS's are triggered from Node. Upon triggering an SOS, your entire Workspace will be alerted in app and via email. **Triggering an SOS will not alert EMS.**


TRIGGERING AN SOS

- 1 Open the SOS cap on Node to reveal the SOS
 - 2 Press and hold the SOS button for 6 seconds until the "Sending SOS" LED blinks
 - 3 Your SOS has been successfully delivered when the "SOS delivered" LED is on.
- ! **NOTE:** To ABORT the SOS, press and hold the SOS button until both LEDs blink. The SOS has been aborted when the blinking stops.

WORKSPACE SOS ALERT

When an SOS has been triggered, your entire Somewear workspace will be alerted with the callsign, location of the SOS trigger, and timestamp.

When tapped, the SOS banner will take a user directly to the SOS on the map. If the banner is closed, the SOS will still remain active until the SOS has been resolved or aborted.

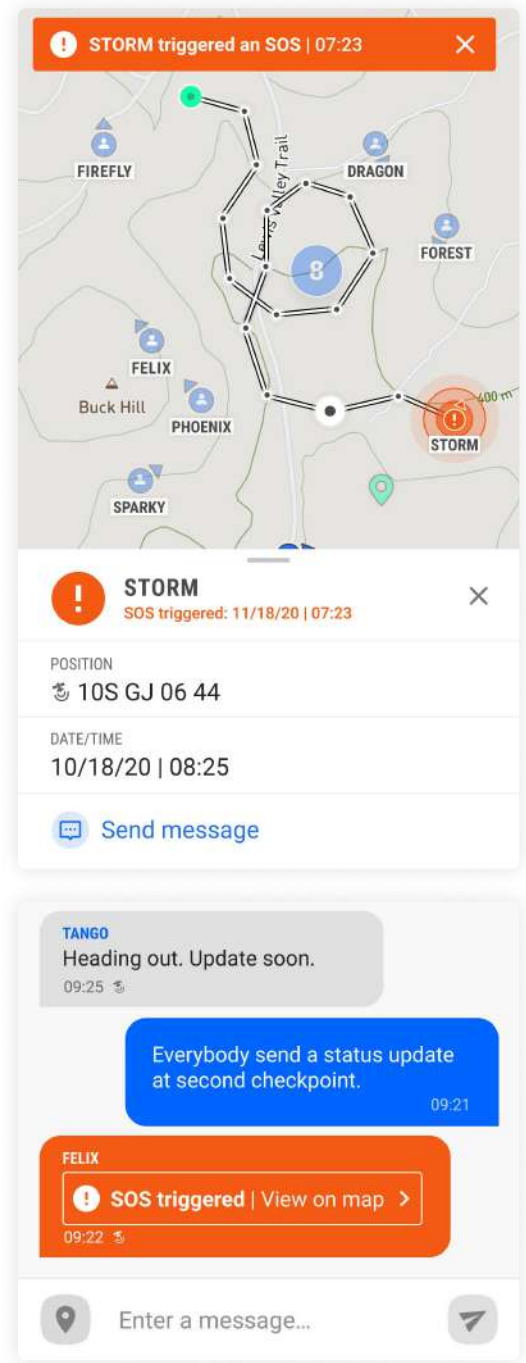

11:37



SETTINGS



Diego Lozano

diego@somewearlabs.com



Active Workspace

Somewear



Hardware



App Settings



Sensors



Support



11:37



 SUPPORT



 FAQ >

 Legal >

 Regulatory >

 Contact Us >

App Version: 2.8.34



REGULATORY

Somewear Labs Regulatory Information

SWL-1 Hotspot:

Contains FCC ID: 2AQYN9603N

Contains FCC ID: SQGBL652

Contains IC: 24246-9603N
HVIN: 9603N

Contains IC: 3147A-BL652
HVIN: BL652-SC

SWL-2 Node:

FCC ID: 2AQYN-SWL2

IC: 24246-SWL2 HVIN: SWL-2

This device complies with part 15 of the FCC Rules and Industry Canada License-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes/modifications to this equipment not approved by

Somewear Labs could void the user's authority to operate the equipment.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Cet appareil est conforme aux normes RSS exemptées de licence de Industrie Canada. Son fonctionnement est soumis aux deux conditions suivantes: (1) Cet appareil ne doit pas provoquer d'interférences, et (2) cet appareil doit accepter toute interférence, y compris celles pouvant causer un mauvais fonctionnement de l'appareil.