



Technical Support

- Input voltage: 12V(DC115l is 3V)
- Emission Frequency:
433.914MHz ± 100KHz
- Emission Power: 10 milliwatt
- Work temperature:-10°C -50°C
- Emission distance:
open 200m, two walls 30m
- Components button (P2)(up button+ stop button) is setting button, it's valid that press two button at the same time.
- Transmitter (▲) UP BUTTON
- Transmitter (■) STOP BUTTON
- Transmitter (▼) DOWN BUTTON

DC115A(B/C/D/F/I/J) DC14 DC61(S) DC141 DC279


DC115A(B/C/D/F/I/J) single channel transmitter
DC14 single channel transmitter
DC61(S) single channel transmitter
DC141 single channel transmitter
DC279 single channel transmitter

Notice: transmitter Do not exposed to moisture and strike, so as not to affect life.
When you use transmitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.




Matchable R Tubular Motor Set up

! Delete all the datas of the motor and the new emitter has been programmed. ! The interval of each button must within 10 seconds of re-setting, otherwise the system will restore the original state.

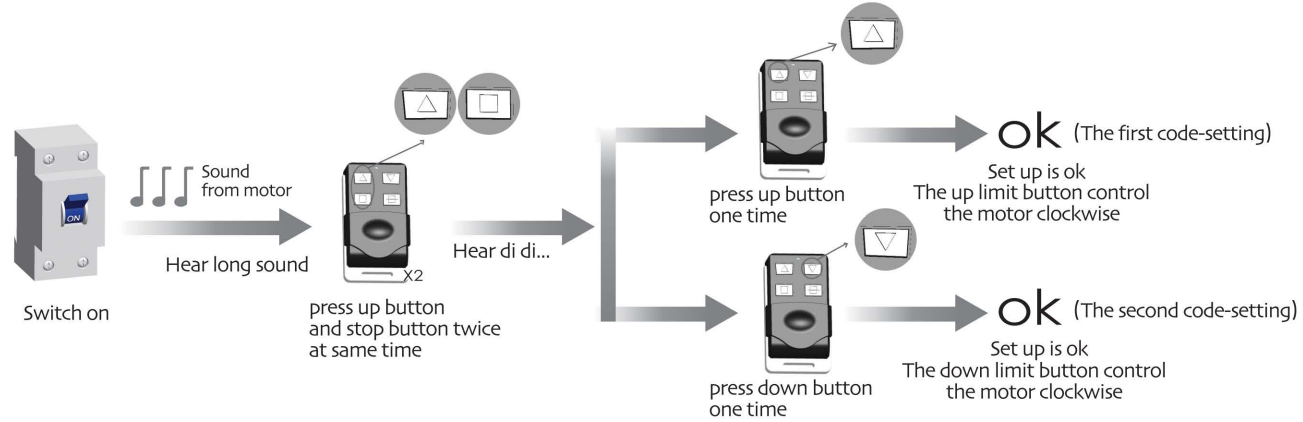


Matchable DC227/DC228 Set up

! The interval of different button must within 10 seconds for all setting, otherwise the system will restore the original state. ! One receiver store 20 emitters channels at most, and one channel of emitter can control 20 receivers at most.

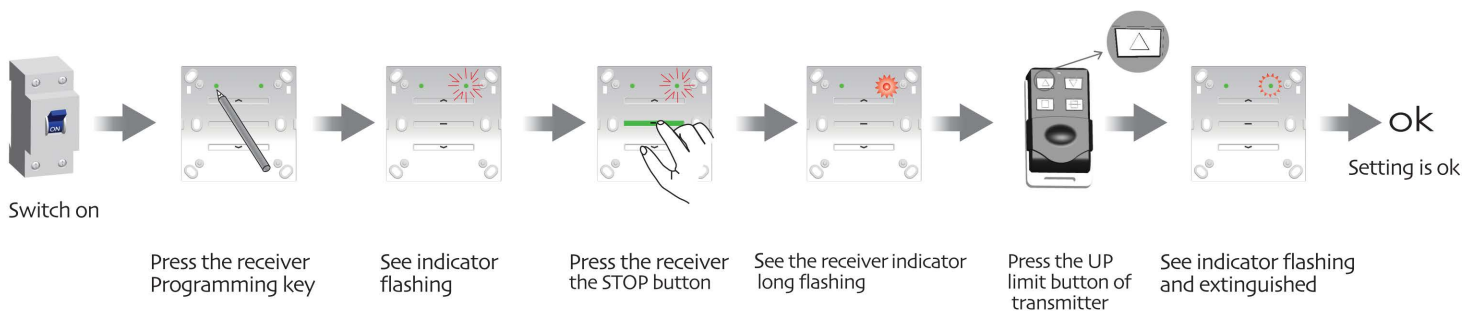

Matchable DC136 Set up

! The interval of different button must within 10 seconds for all setting, otherwise the system will restore the original state. ! One receiver store 20 emitters channels at most, and one channel of emitter can control 20 receivers at most.

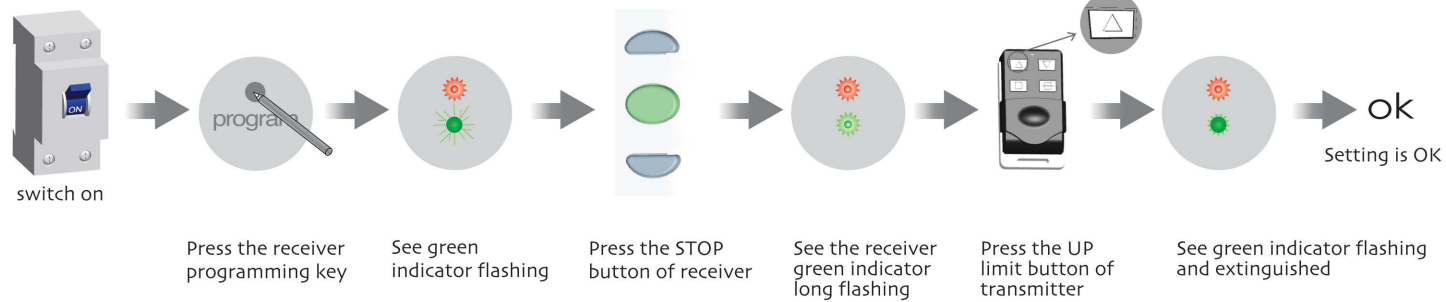

All controls support 433MHz & 868MHz
All controls support 12V/23A & 12V/27A
Specific parameters to the nameplate shall prevail



Control System

DC115A(B/C/D/F/I/J)DC14 DC61(S) DC141 DC279 Control System Specification



Type Specification

! The self-lock key of this series can only be aplyed to the DC43 amd DC136.

! DC115D no self-lock function DC115A(D)(F)(I)(J)	DC115B	DC115C	DC14
DC61(S)	DC141	DC279	

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.