



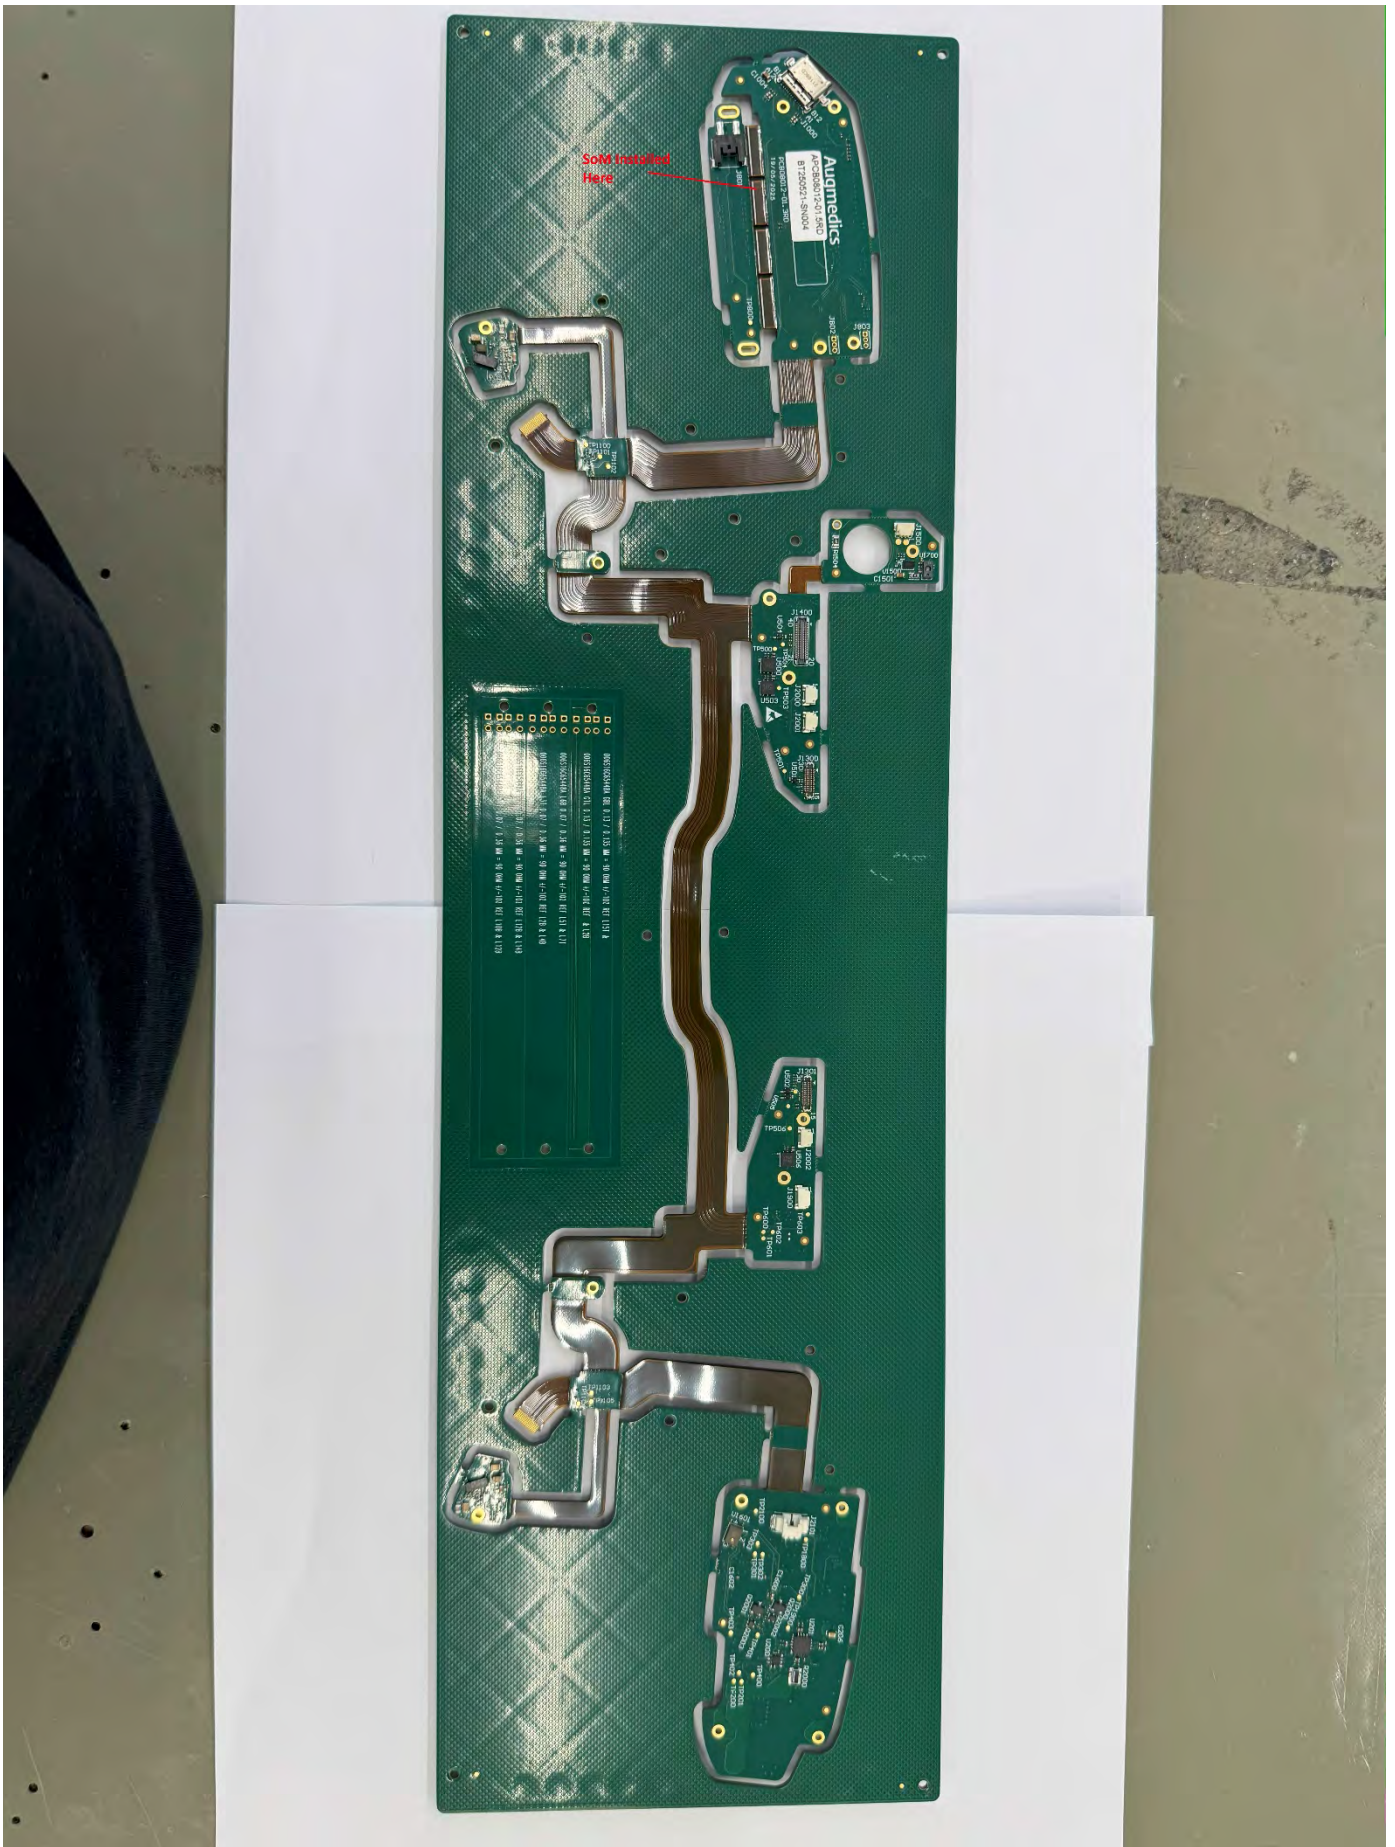

Main PCB Top Side Prior to Breakout for Assembly


The assembly is installed in the device from the left temple around through the left eye rim across the bridge, right eye rim of the glasses to the right temple.

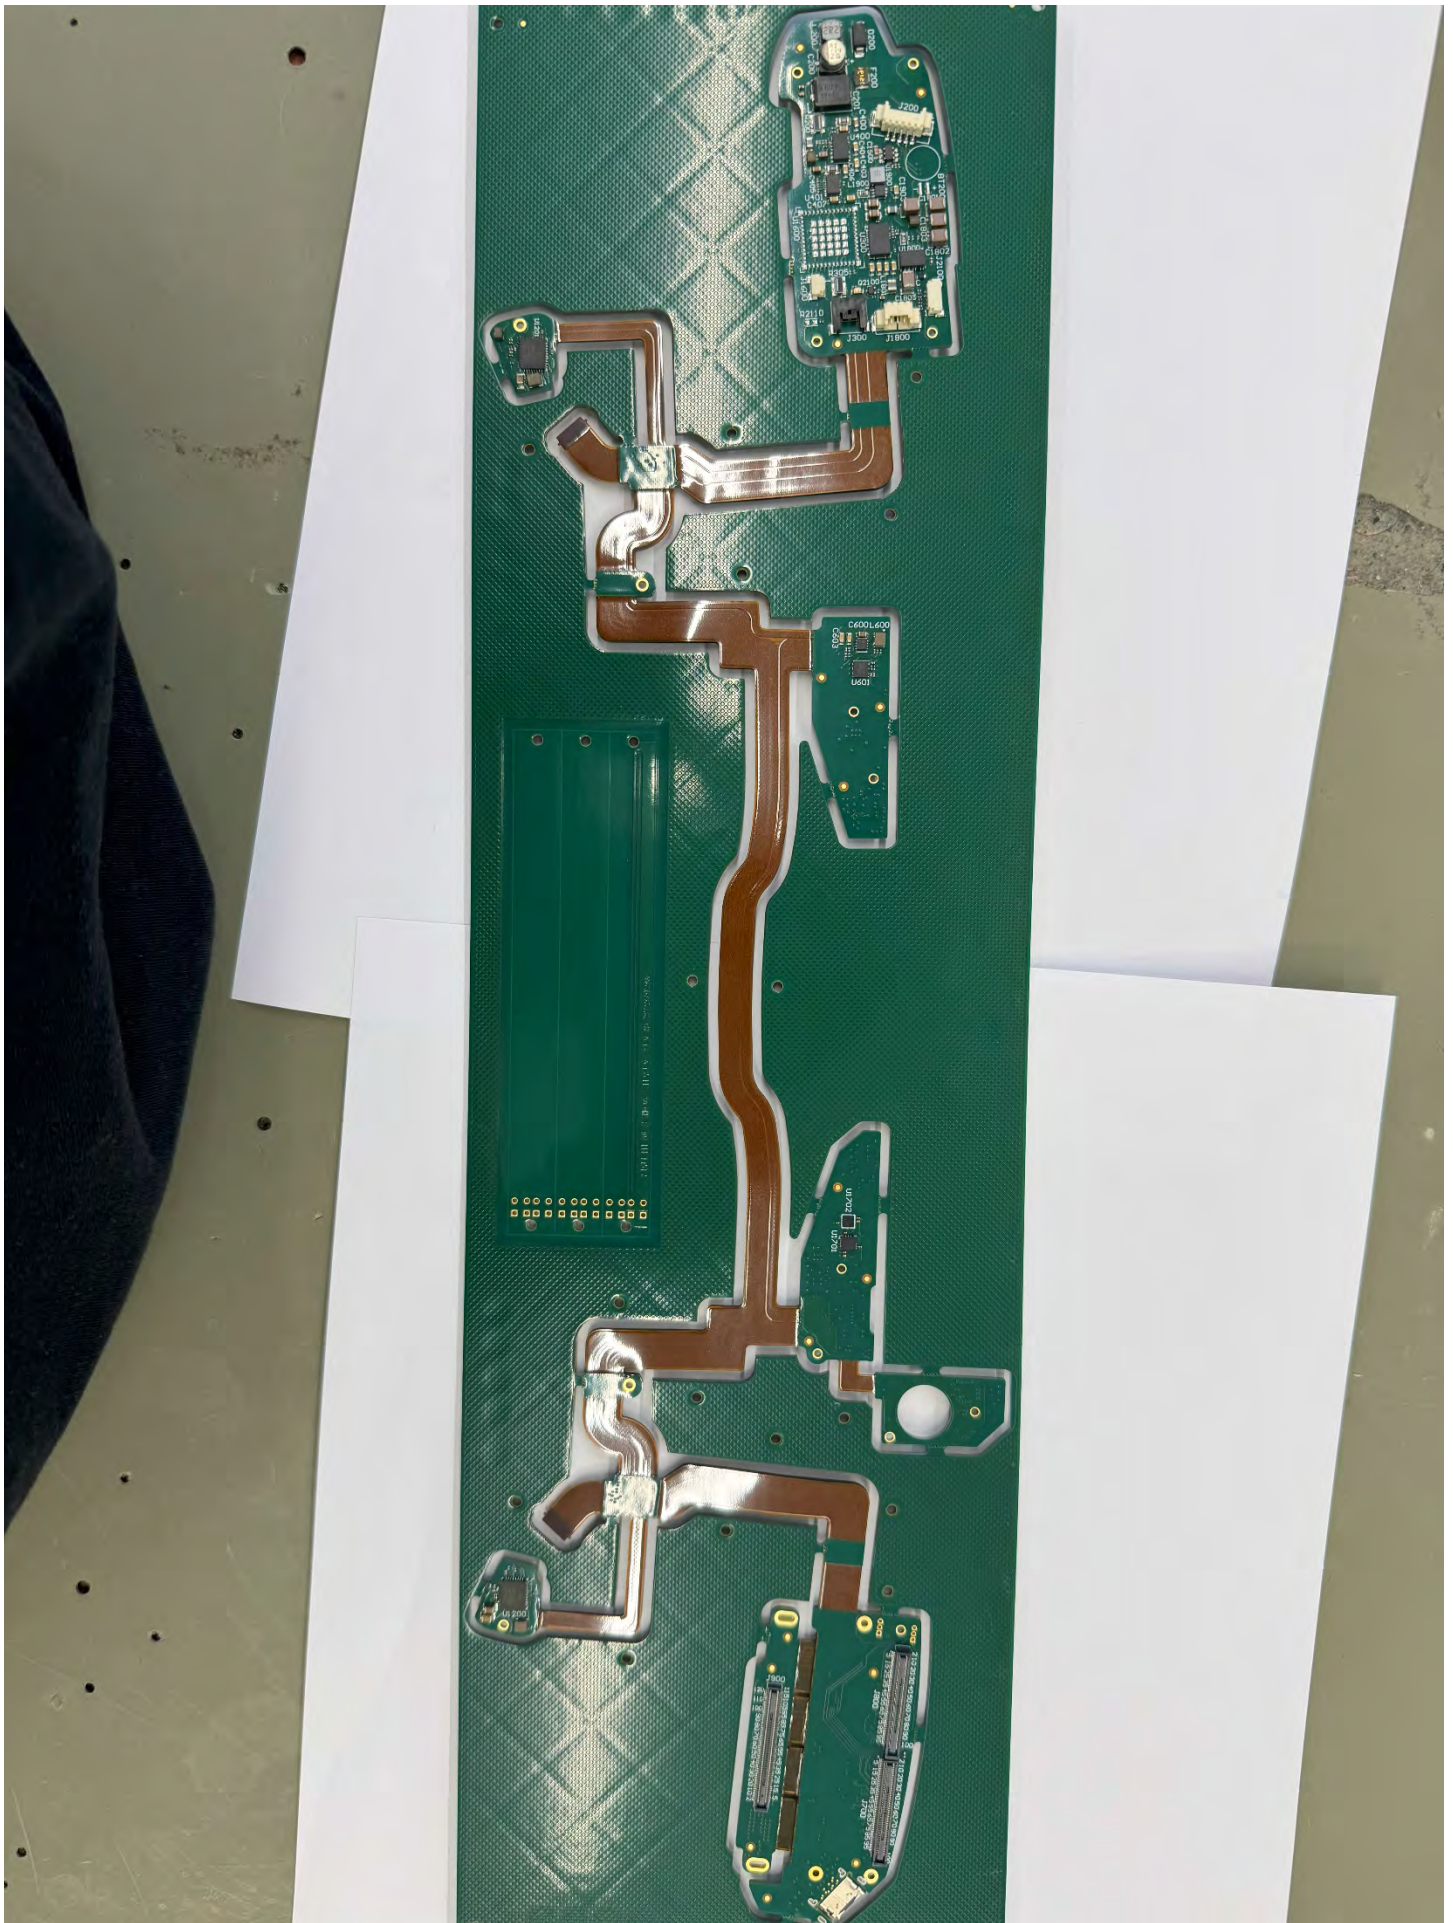


Main PCB Back Side Prior to Breakout for Assembly



RF Module Top Side
The SoM is installed on the top side of the left temple of the main PCB assembly

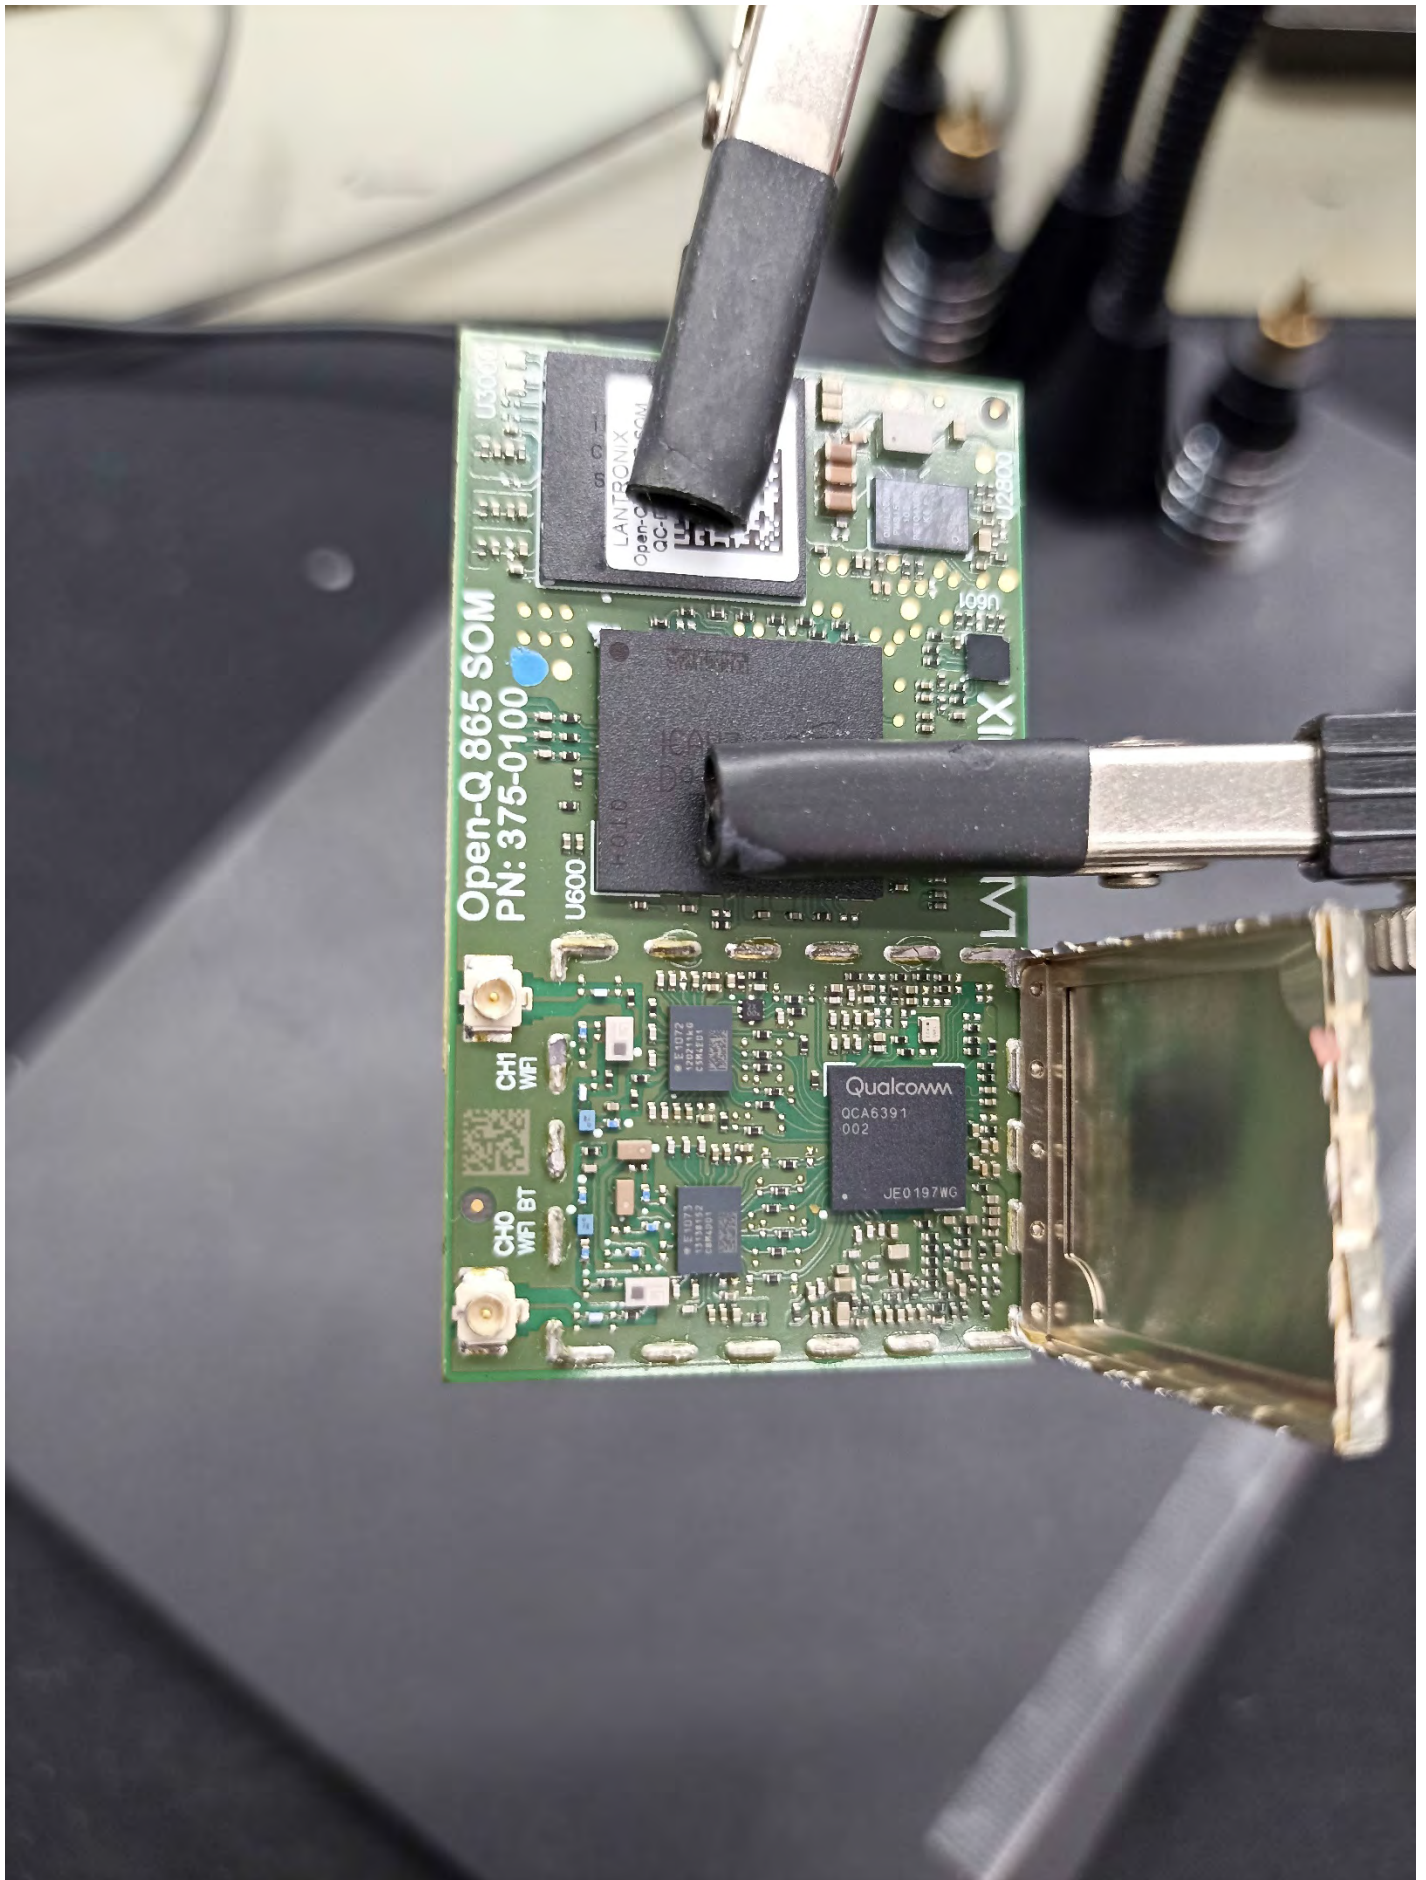

RF Module Top Side
The SoM with the shield removed

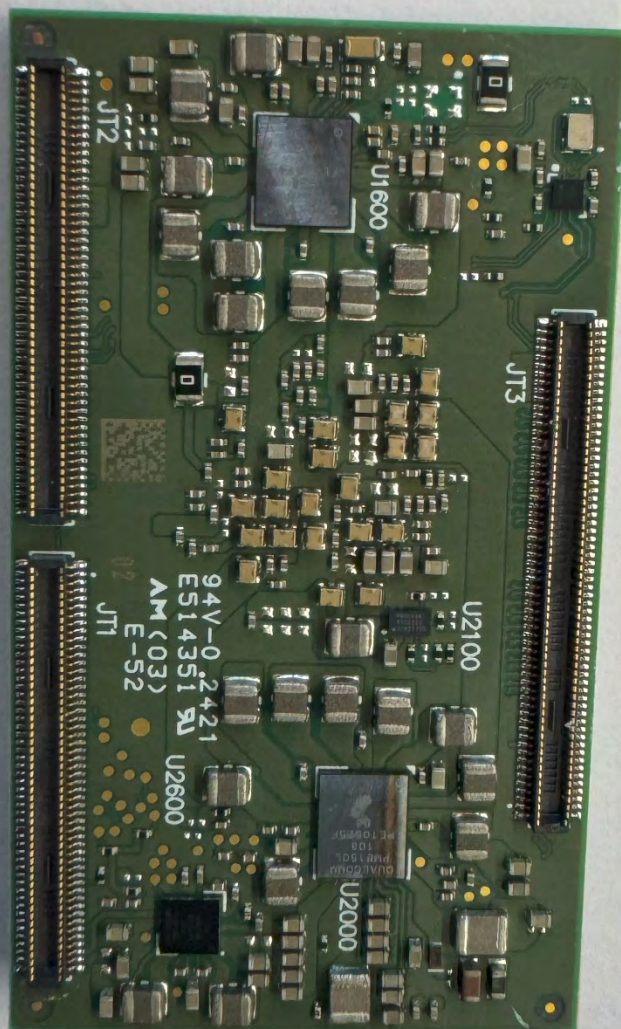

SoM


RF Module Back Side




Antenna

Top Side of the Antennas

Antenna

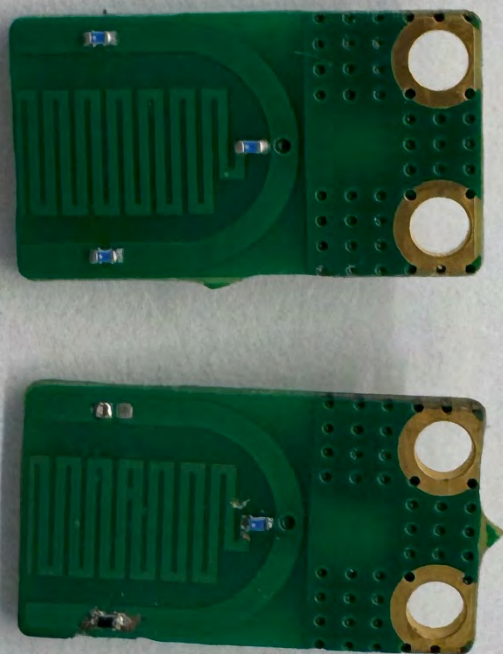

Back Side of Antennas

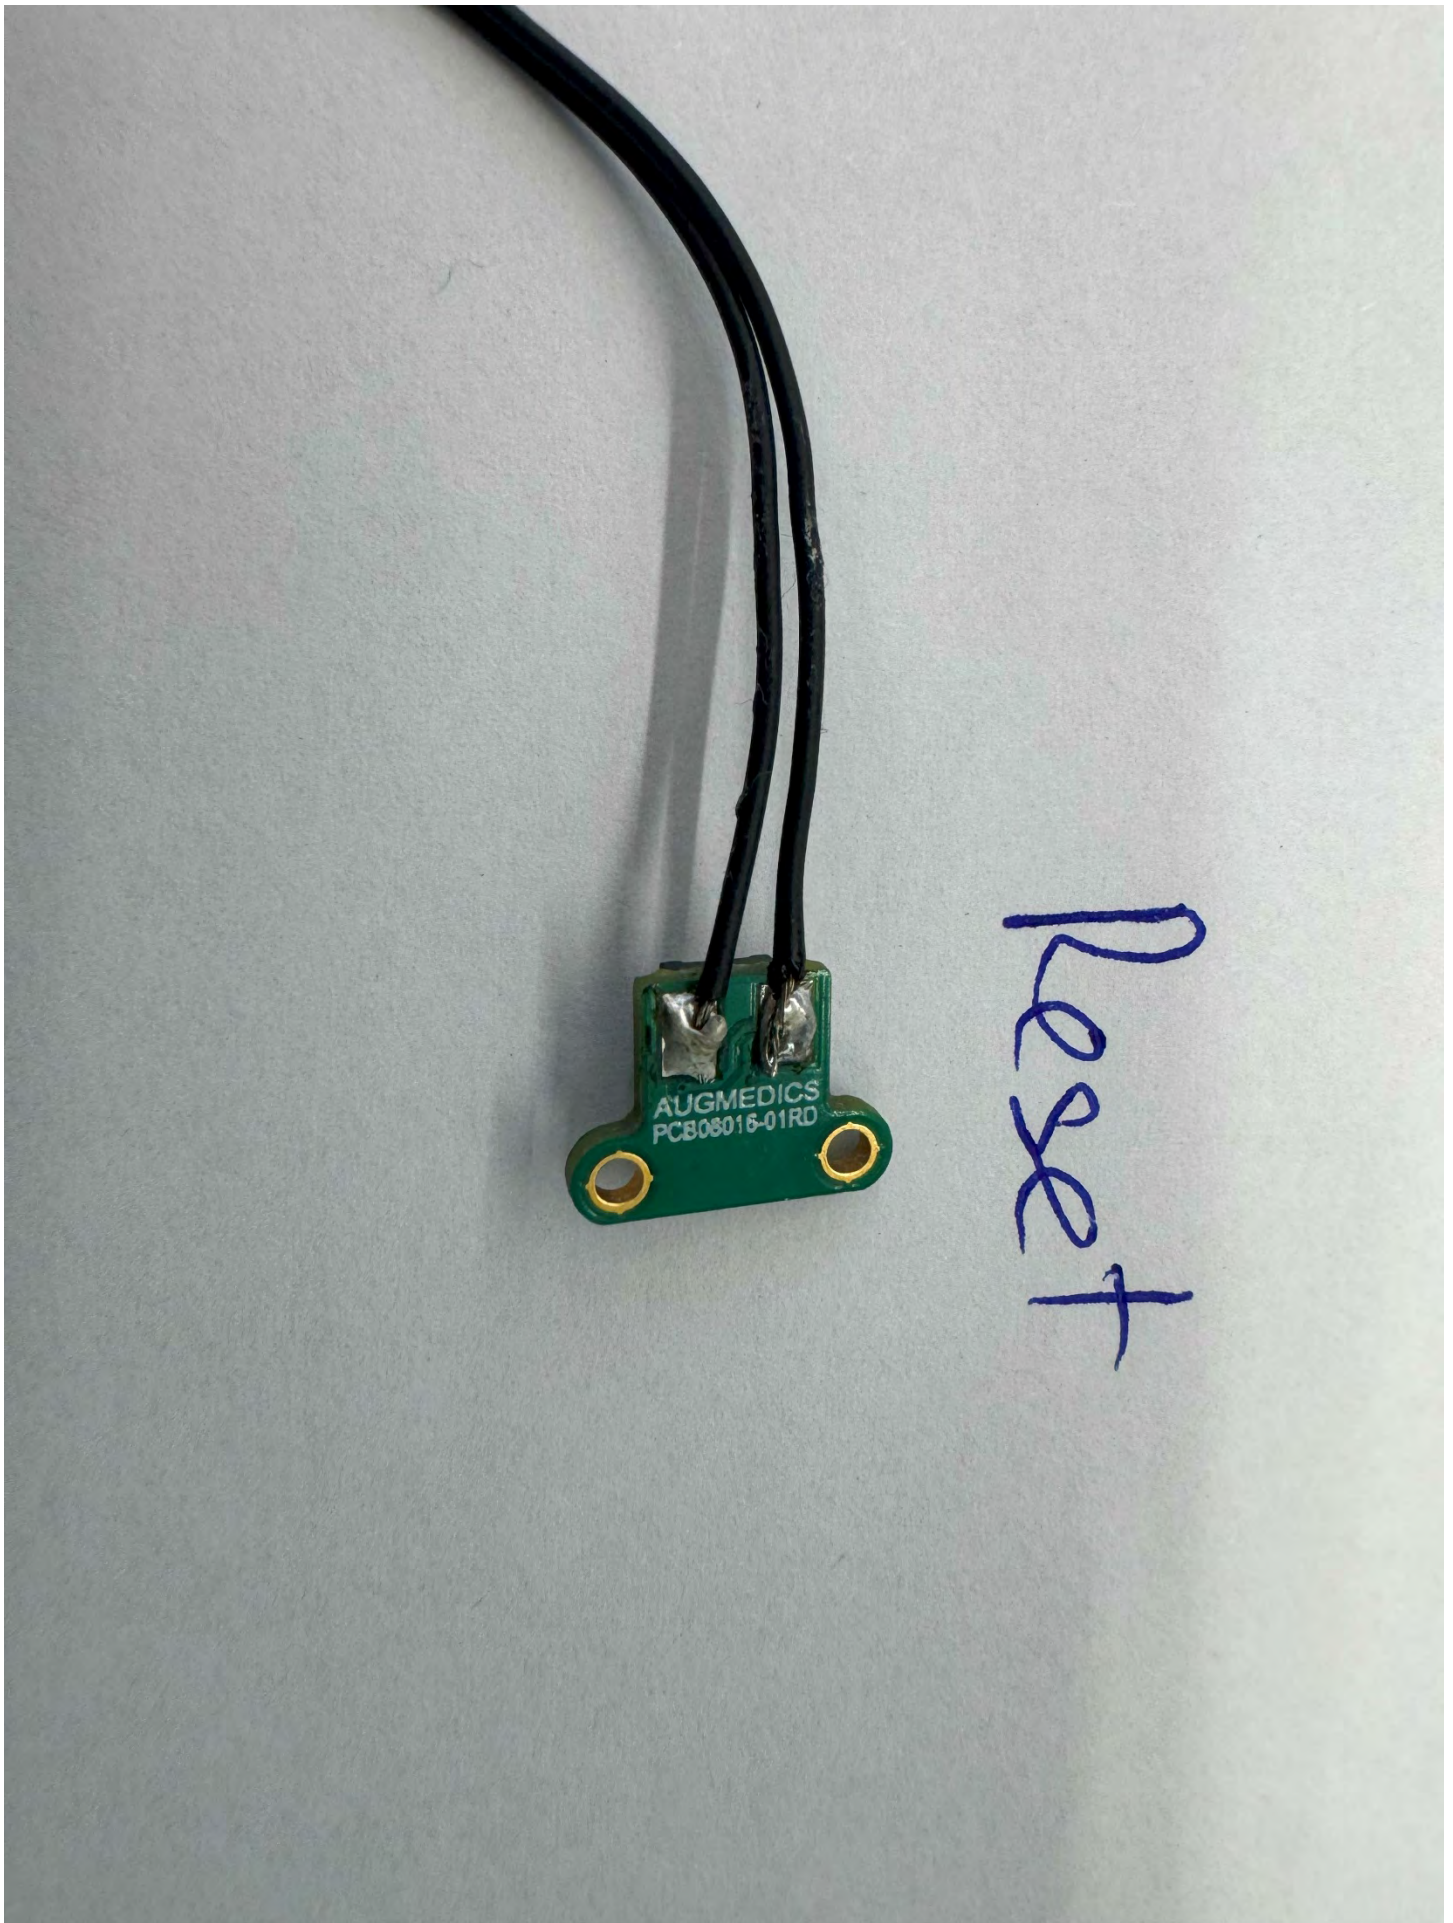


Reset Assembly Board Top Side



Reset


Reset Assembly Board Back Side

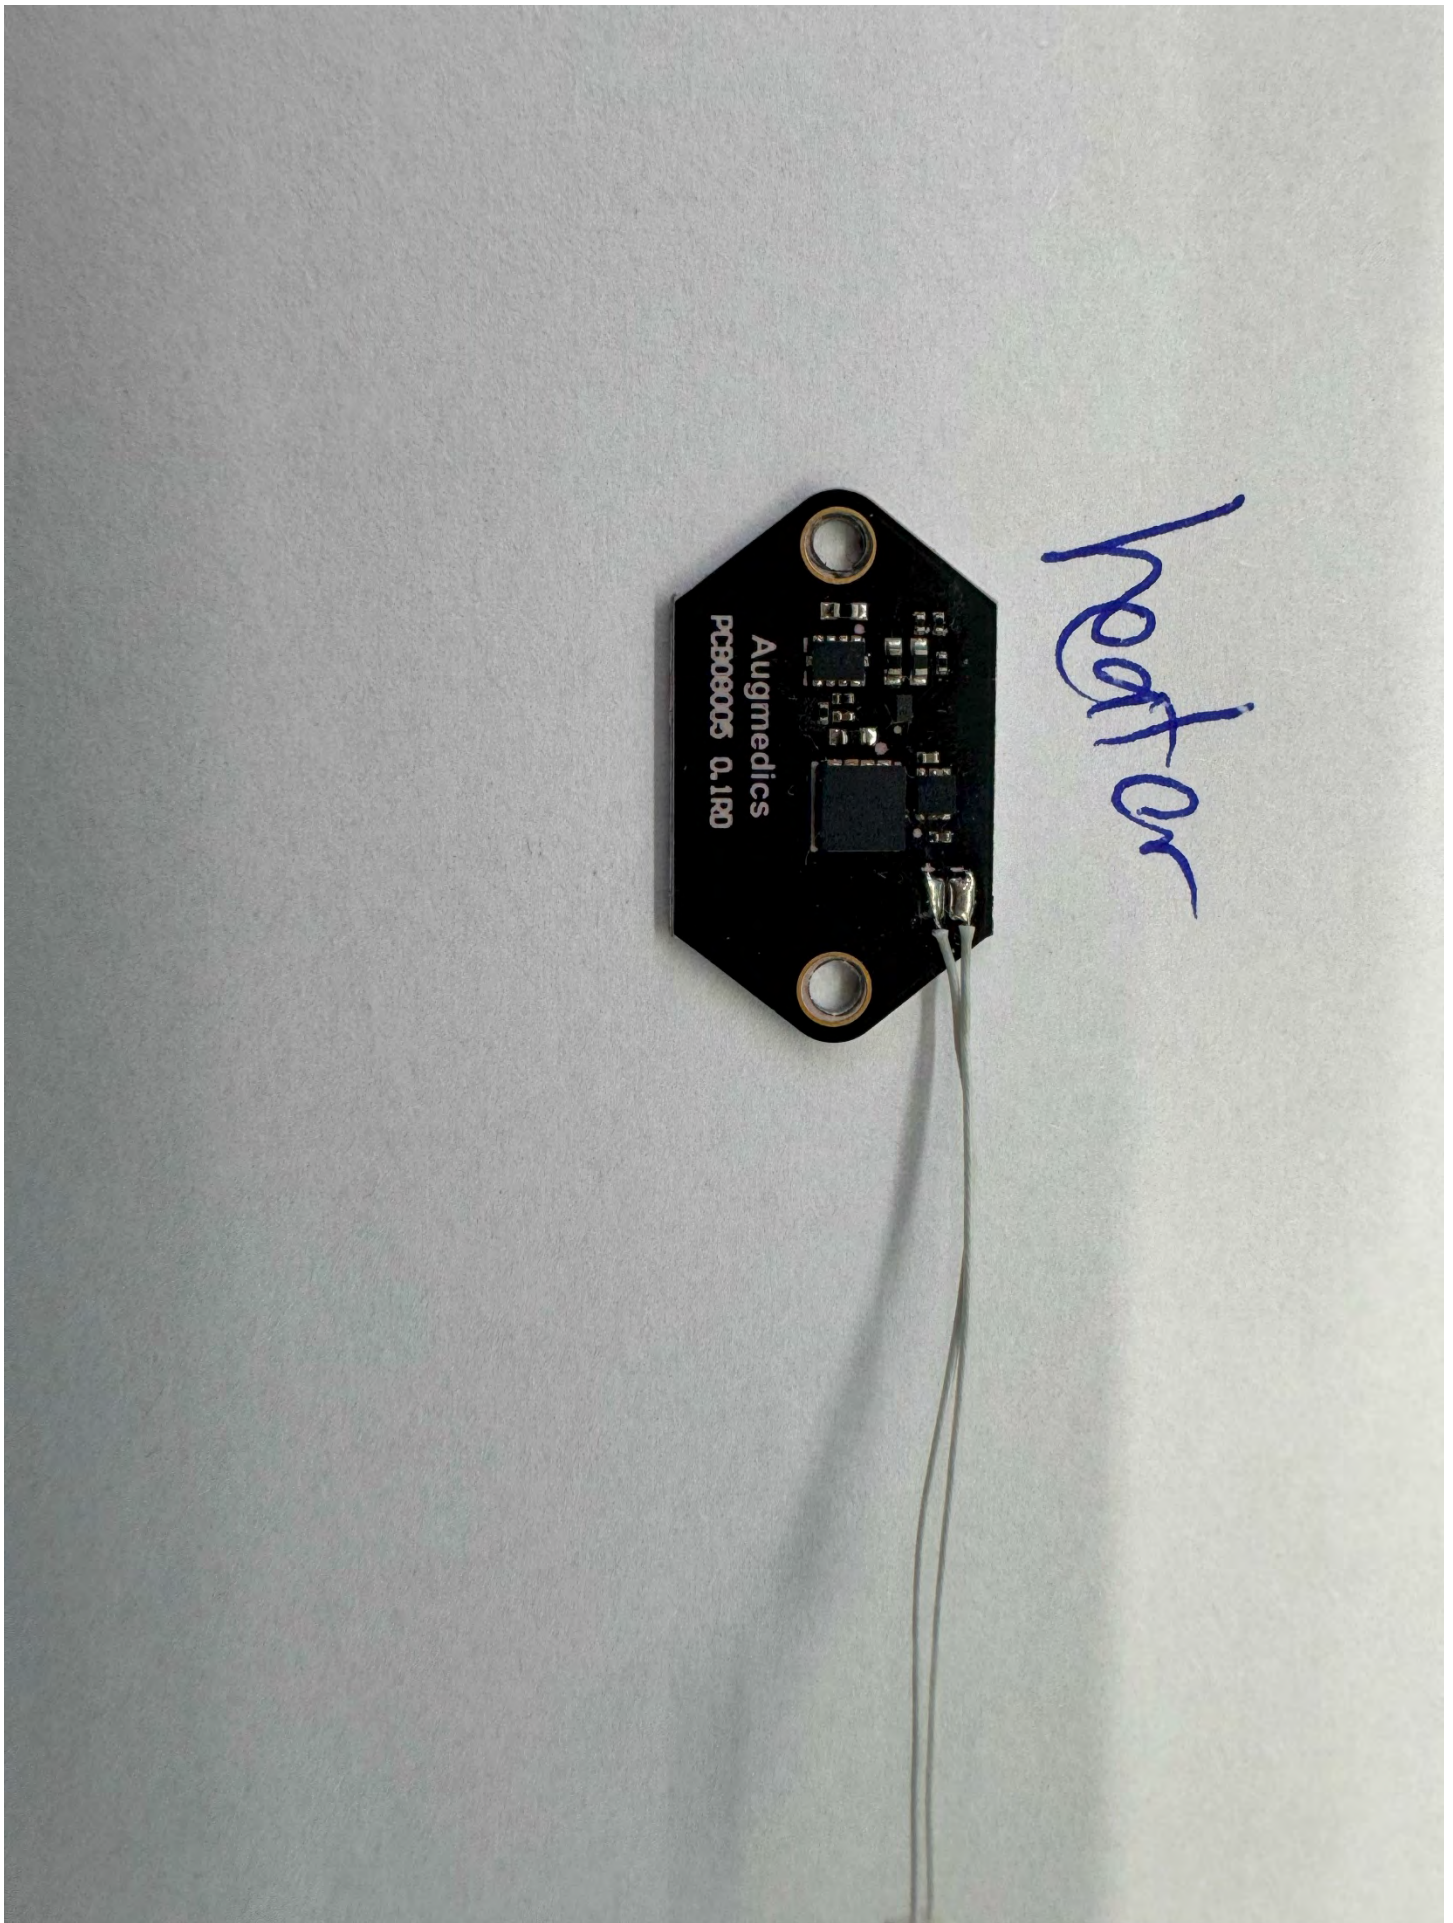


Heater Board Assembly Top Side



Heater Board Assembly Back Side

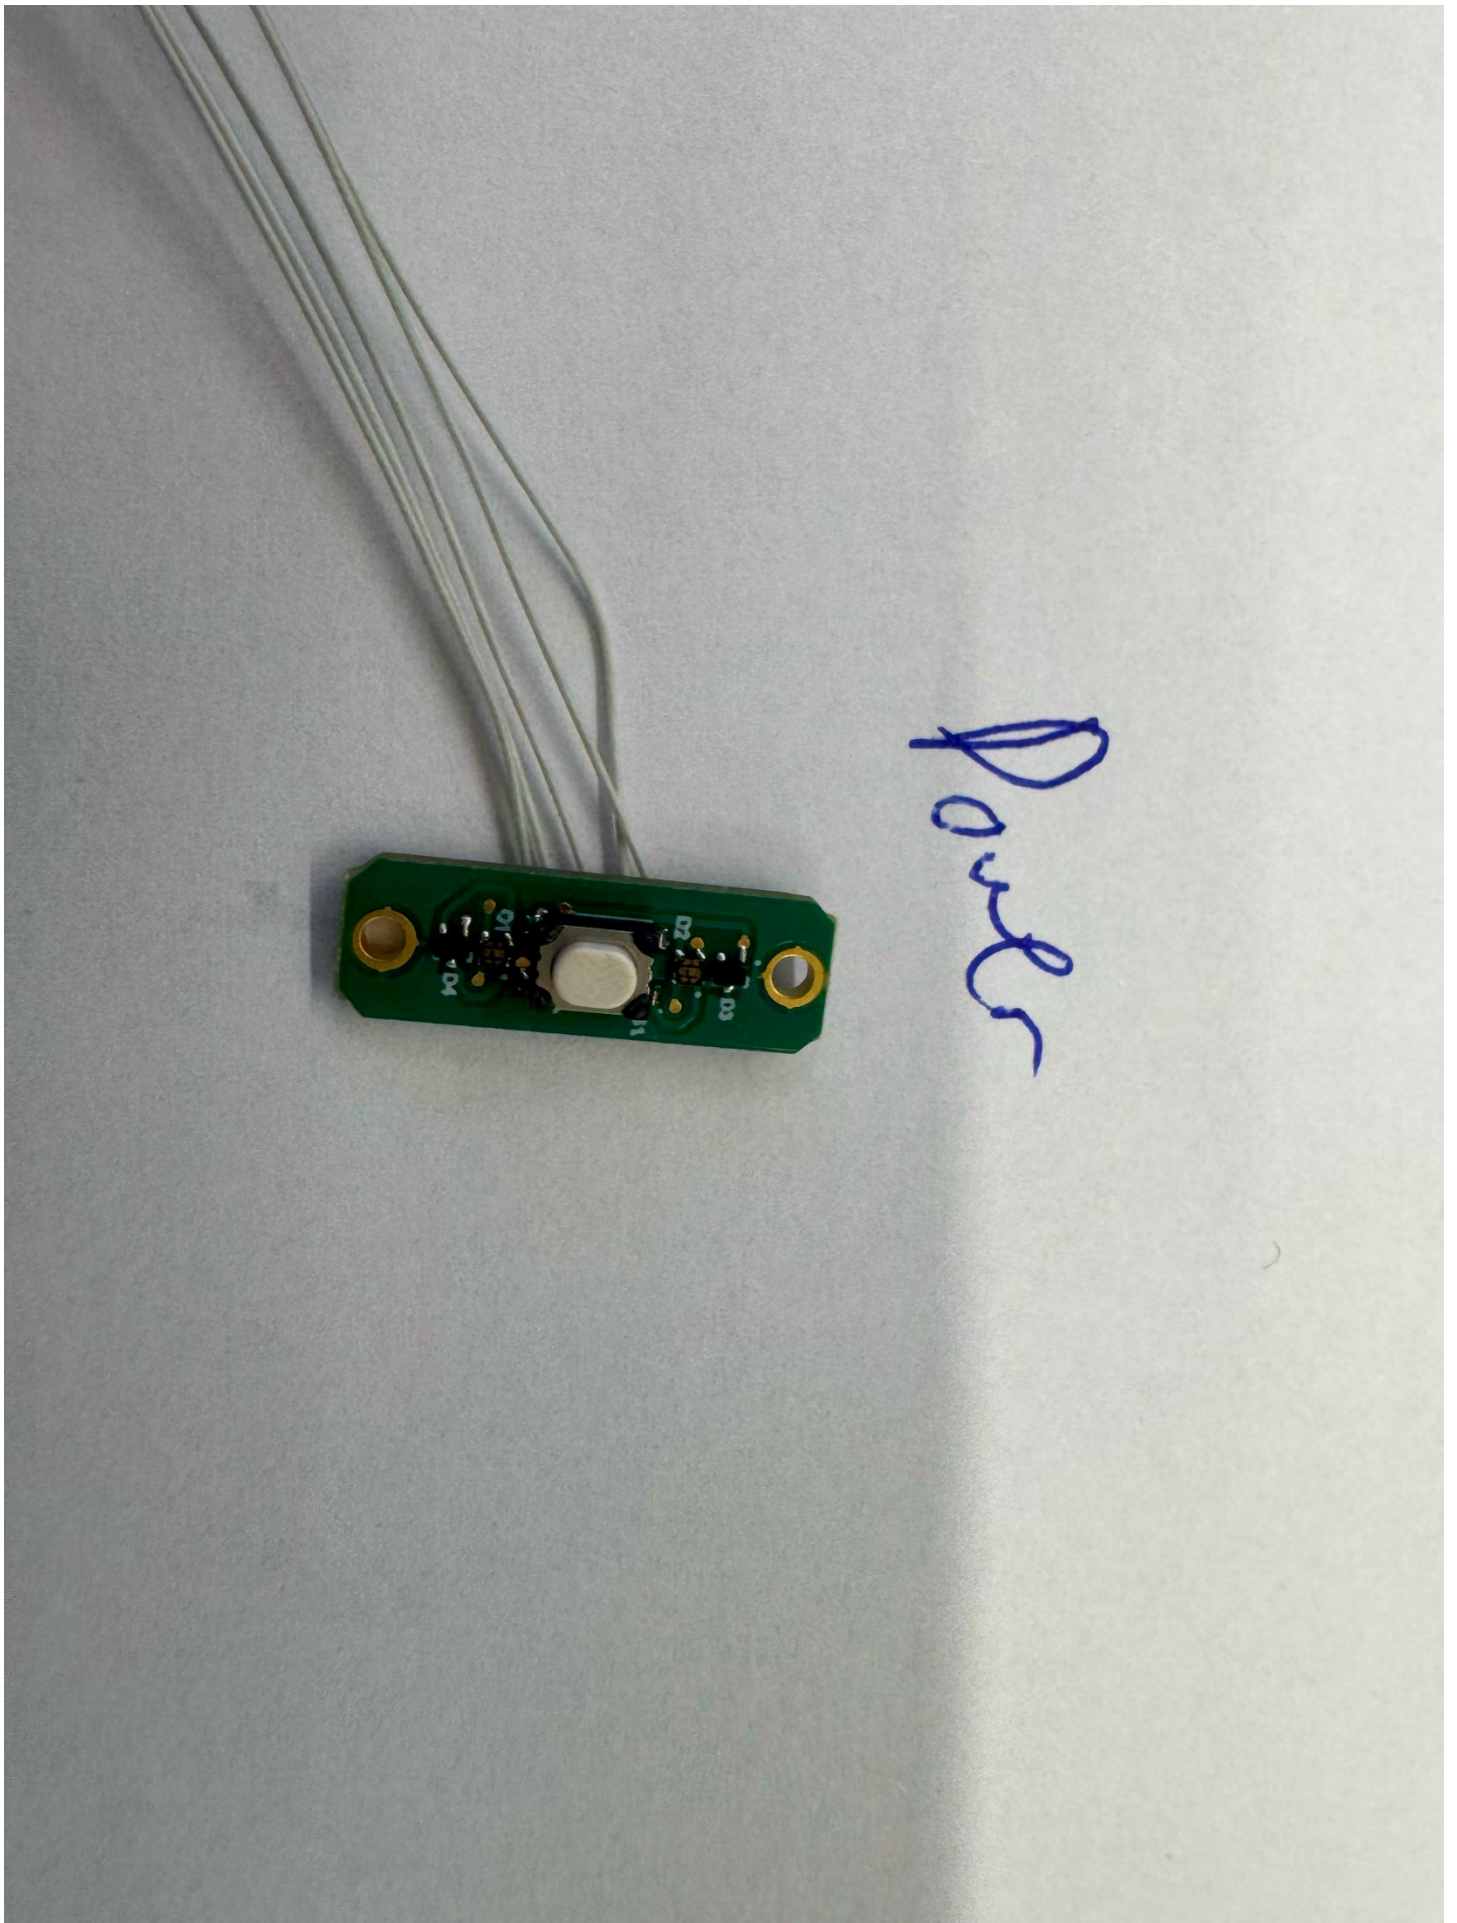

Power PCB Assembly Top Side

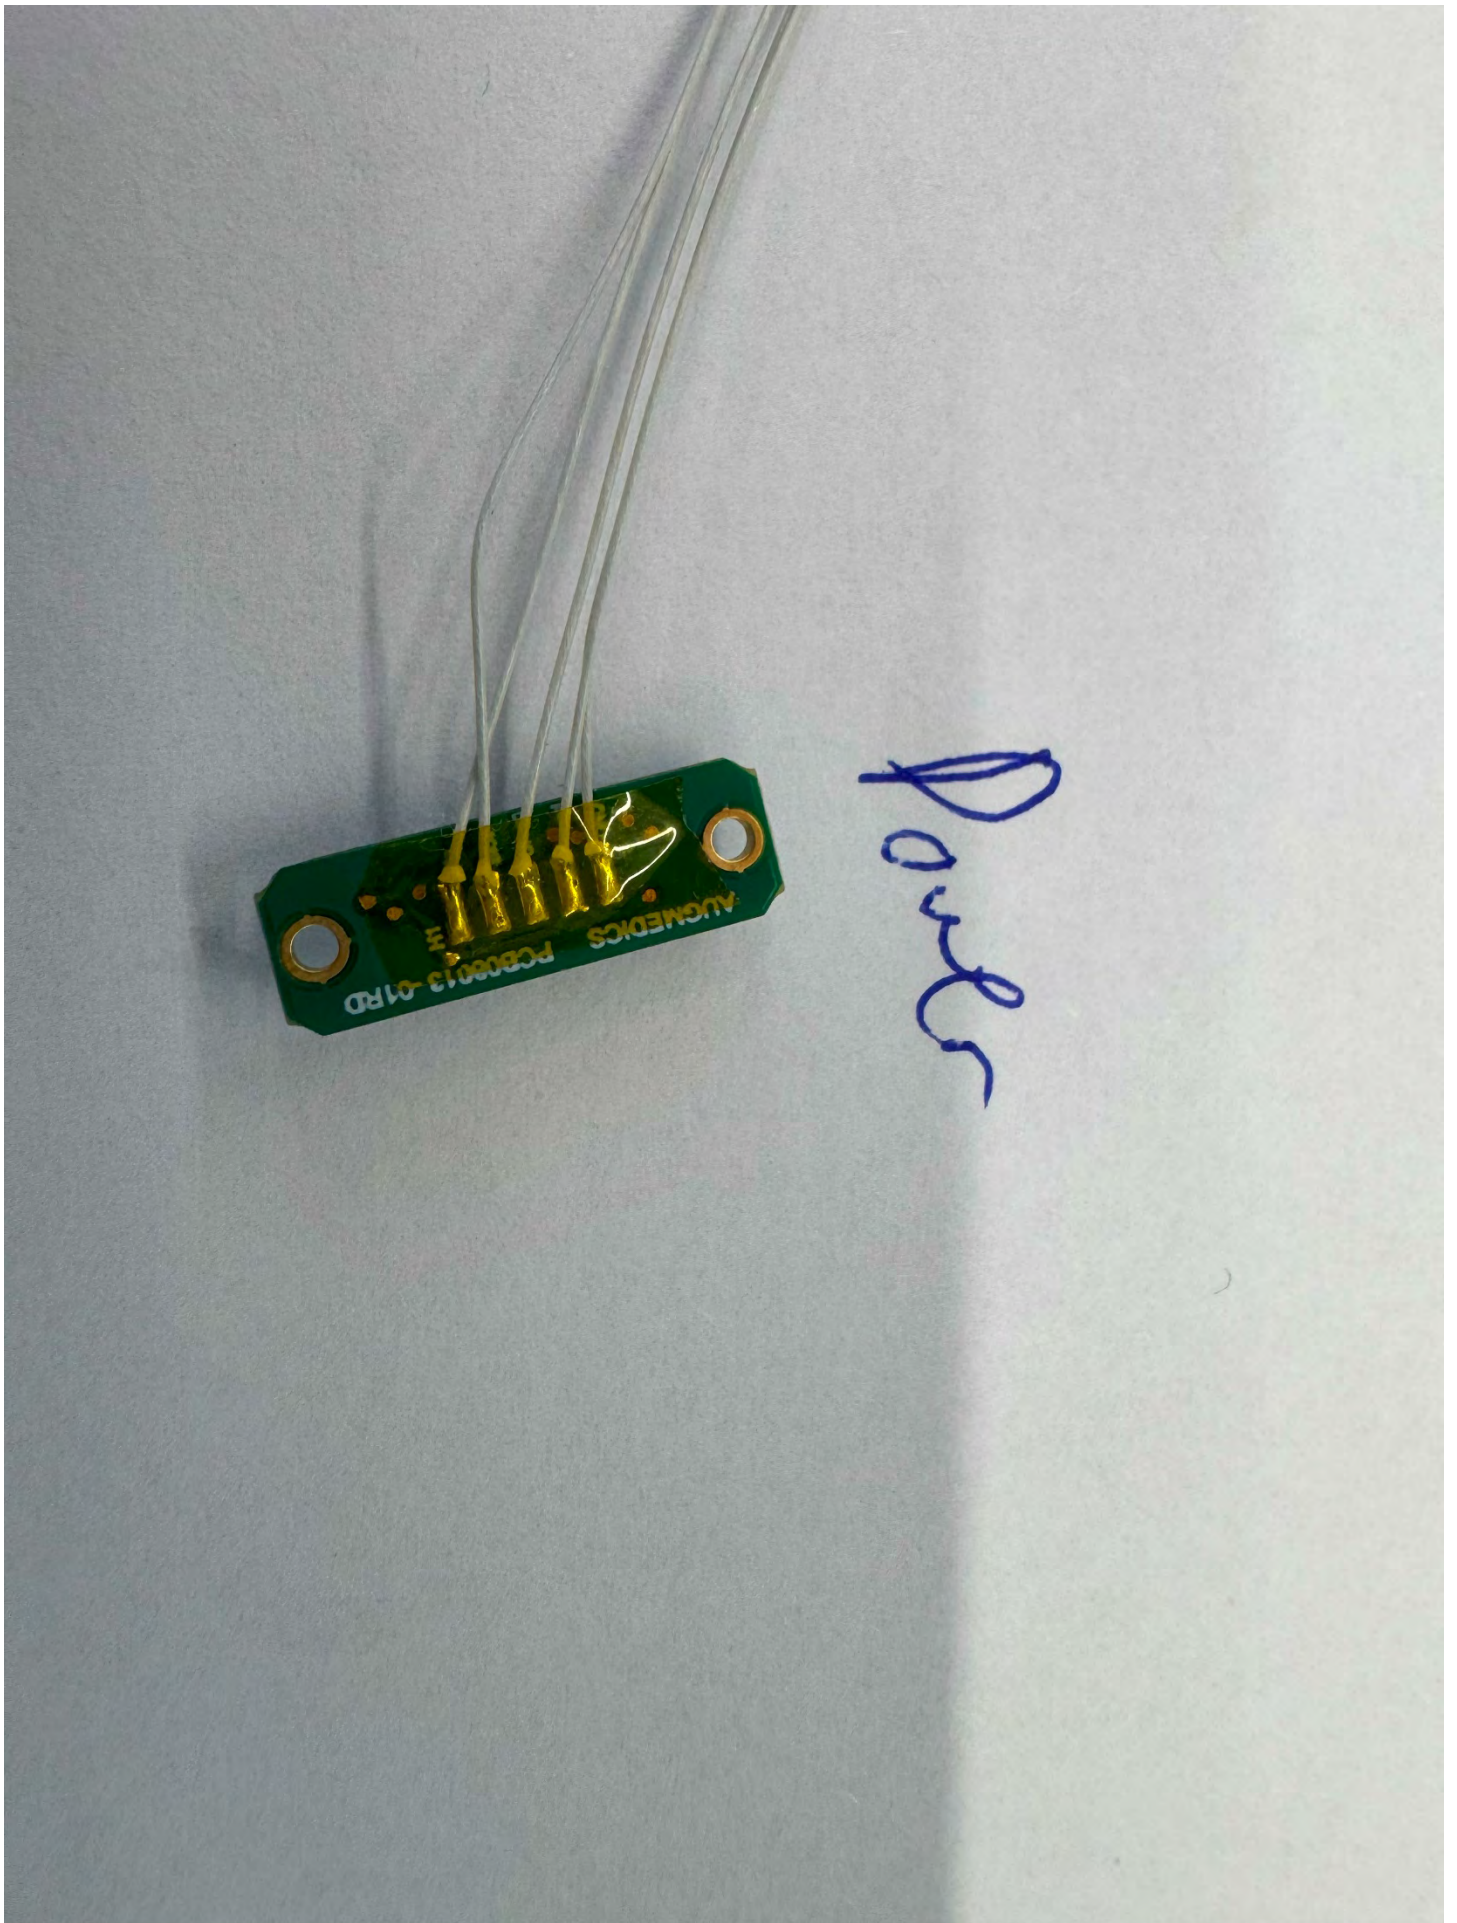

Power Board Assembly Back Side



headlight

Headlight PCB Assembly Top Side



Headlight PCB Assembly Back Side