

Shenzhen World Elite Electronic Co. LTD.

Sample Approval Sheet

Product Information:

Customer	Guangzhou Panyu Juda Car Audio Equipment Co., Ltd.
Material Description	PCM789 WIFI Antenna
Customer's Part number	
Specifications	FR4(48*14*0.2mm)+Black Coaxial Cable(Φ0.81*250mm)+MHF4+Welding+UV adhesive
Supplier's Part number	01-05-001-000054
Date	2026-1-13

Supplier:

Prepared By	Checked By	Approved By
Zhang Dengqiao	Li Yuepeng	Zhang Hongying

Customer Approval:

Accepted By	Checked By	Approved By

Results:

- ☐ Full Approval
- ☐ Conditional Approval
- ☐ Unqualified
- ☐ Others:

Shenzhen World Elite Electronic Co. LTD.

Add:Xiangyuer Industrial Park, No. 8, Longsheng Road, Longgang Street, Longgang District, Shenzhen, Guangdong, China

Tel:86-755-89983786

Contents

1、 Specification.....	3
1.1 Electrical specification standard.....	3
1.1.1 Electrical Specifications.....	3
1.1.2 Antenna Matching Network.....	3
2、 Test.....	3
2.1 Test of passive S11.....	3
2.1.1 Test connection.....	3
2.1.2 Passive S11.....	4
2.2 Gain and efficiency test.....	4
2.2.1 Test Position.....	4
2.2.2 Test equipment.....	4
2.2.3 Results Summary.....	5
2.2.4 Radiation Pattern Results.....	6
2.3 OTA test.....	7
2.3.1 Results Summary.....	7
3、 Conclusion.....	8
4、 Part Drawing.....	9

1、Specification

This report mainly provides the testing status of various electrical and structural performance parameters of PCM789 WIFI Antenna.


1.1 Electrical specification standard

1.1.1 Electrical Specifications

The antenna operates in the 2400-2500 , 5150-5850 MHz. The following table is the electrical performance index of the antenna designed by our company.

Antenna	PCM789 WIFI Antenna
Frequency Range	2400-2500MHz 5150-5850MHz
VSWR	< 2.0
Efficiency	>40%
Impedance	50 ohm
Polarization	Linear polarization

1.1.2 Antenna Matching Network

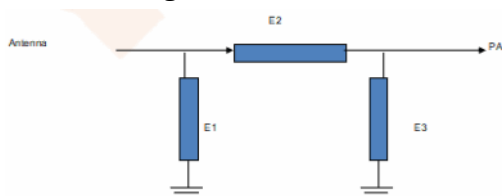

Element	Value
E1(0402)	NC
E2(0402)	0R
E3(0402)	NC

2、Test

The antenna was debugged and tested with the prototype provided by the customer.

2.1 Test of passive S11


2.1.1 Test connection

The passive S11 test device is connected as follows: Network Analyzer → Test Line → Test Fixture.

2.1.2 Passive S11

The following table shows the standing wave ratio values of the edge frequency points of the antenna operating frequency band. The waveform of Return Loss and VSWR obtained by the test is shown as follows.

Frequency(MHz)	2400	2440	2480	5150	5500	5850
VSWR	1.54	1.48	1.41	1.55	1.74	1.72
Return Loss	-13.44	-14.27	-15.45	-13.35	-11.36	-11.55

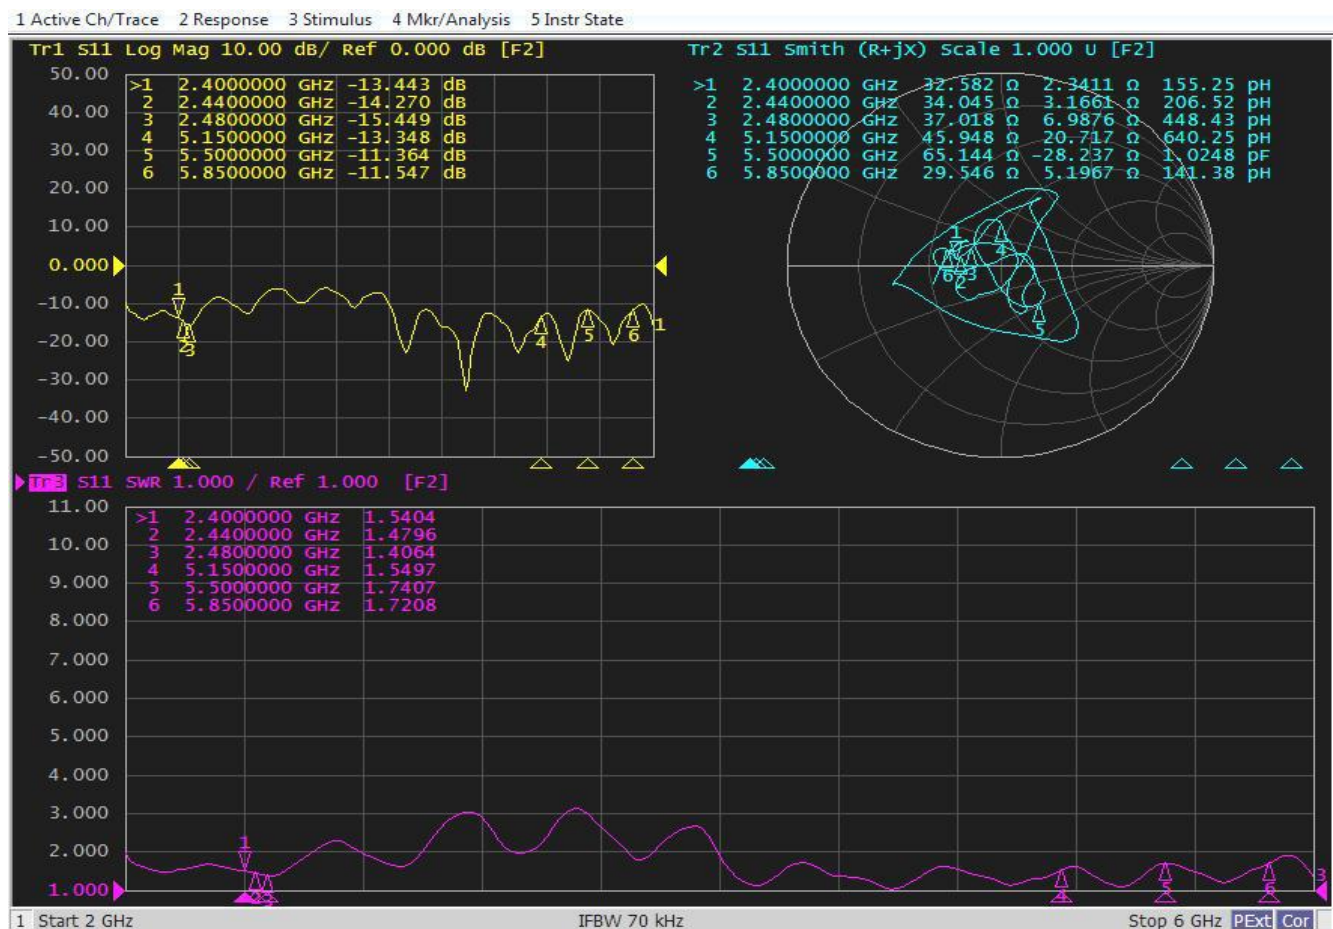

2.2 Gain and efficiency test

2.2.1 Test Position

Microwave anechoic chamber, the test frequency range is 400MHz-6GHz.

2.2.2 Test equipment

Network analyzer, standard horn antenna, multi-probe near field antenna test system, test computer, etc


2.2.3 Results Summary

In the microwave anechoic chamber, the measured values related to efficiency and gain are shown in the table below.

Frequency(MHz)	Gain(dBi)	Efficiency(%)
2400	4.62	53.61
2410	4.78	54.19
2420	4.90	54.10
2430	4.89	53.56
2440	4.82	52.63
2450	4.70	52.40
2460	4.51	51.25
2470	4.46	51.13
2480	4.45	51.14
2490	4.20	51.45
2500	4.02	50.72

Frequency(MHz)	Gain(dBi)	Efficiency(%)
5150	5.82	50.68
5200	6.33	52.84
5250	6.20	50.07
5300	5.88	49.42
5350	5.61	48.58
5400	5.54	48.47
5450	5.37	49.32
5500	5.28	49.31
5550	5.05	52.88
5600	5.03	55.39
5650	4.88	53.76
5700	4.61	51.80
5750	4.06	50.85
5800	3.75	49.01
5850	3.97	48.64

2.2.4 Radiation Pattern Results

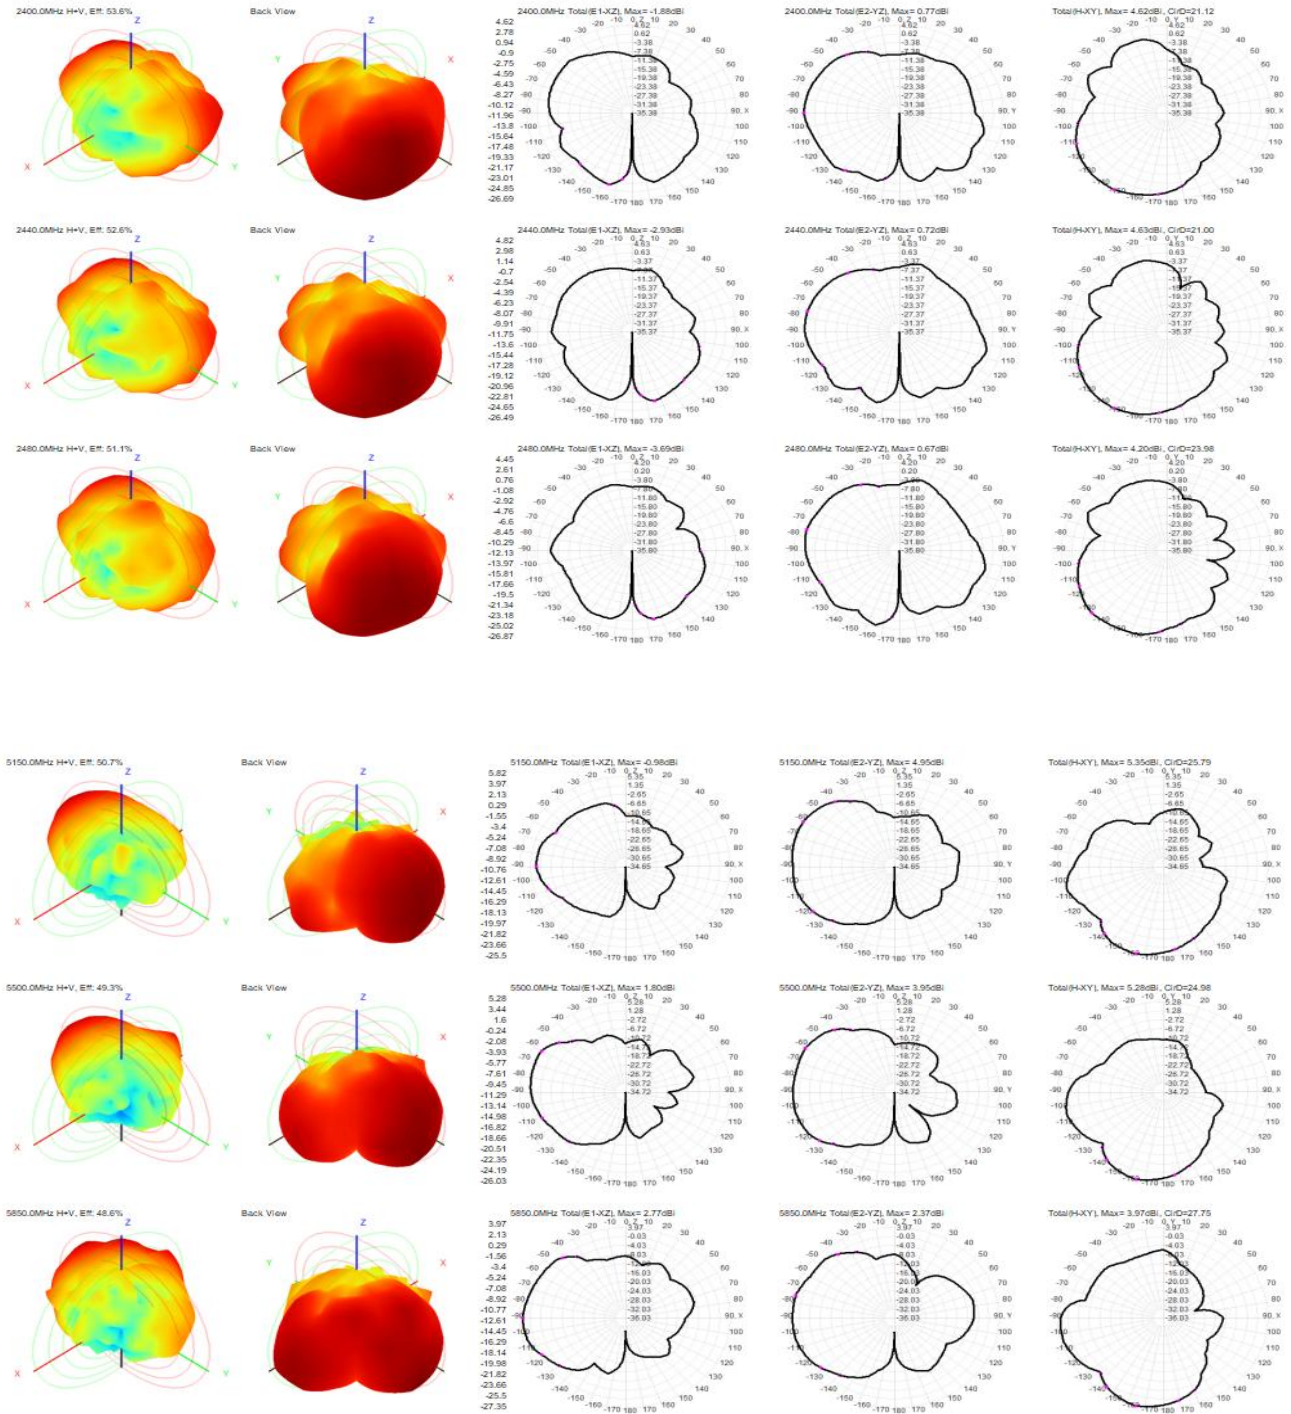


2.3 OTA test

2.3.1 Results Summary

WIFI							
2.4G				5.8G			
WIFI 802.11b 11Mbps	Channel	TRP(dBm)	TIS(dBm)	WIFI 802.11A 5G	Channel	TRP(dBm)	TIS(dBm)
	1	10.64	-86.35		36	8.40	-67.73
	6	10.41	-85.37		100	7.04	-67.89
	11	11.05	-86.68		165	7.56	67.59
WIFI 802.11g 54Mbps	Channel	TRP(dBm)	TIS(dBm)				
	1	13.24	-72.59				
	6	12.88	-71.43				
	11	12.87	-72.68				
WIFI 802.11n MCS7	Channel	TRP(dBm)	TIS(dBm)				
	1	13.22	-68.81				
	6	12.90	-67.68				
	11	12.86	-68.97				

3、 Conclusion

This antenna is designed on the basis of the prototype provided by the customer. The above electrical performance parameters are tested under the environmental treatment conditions of the test prototype. The electrical parameters and structural performance have met the technical requirements. Please confirm!

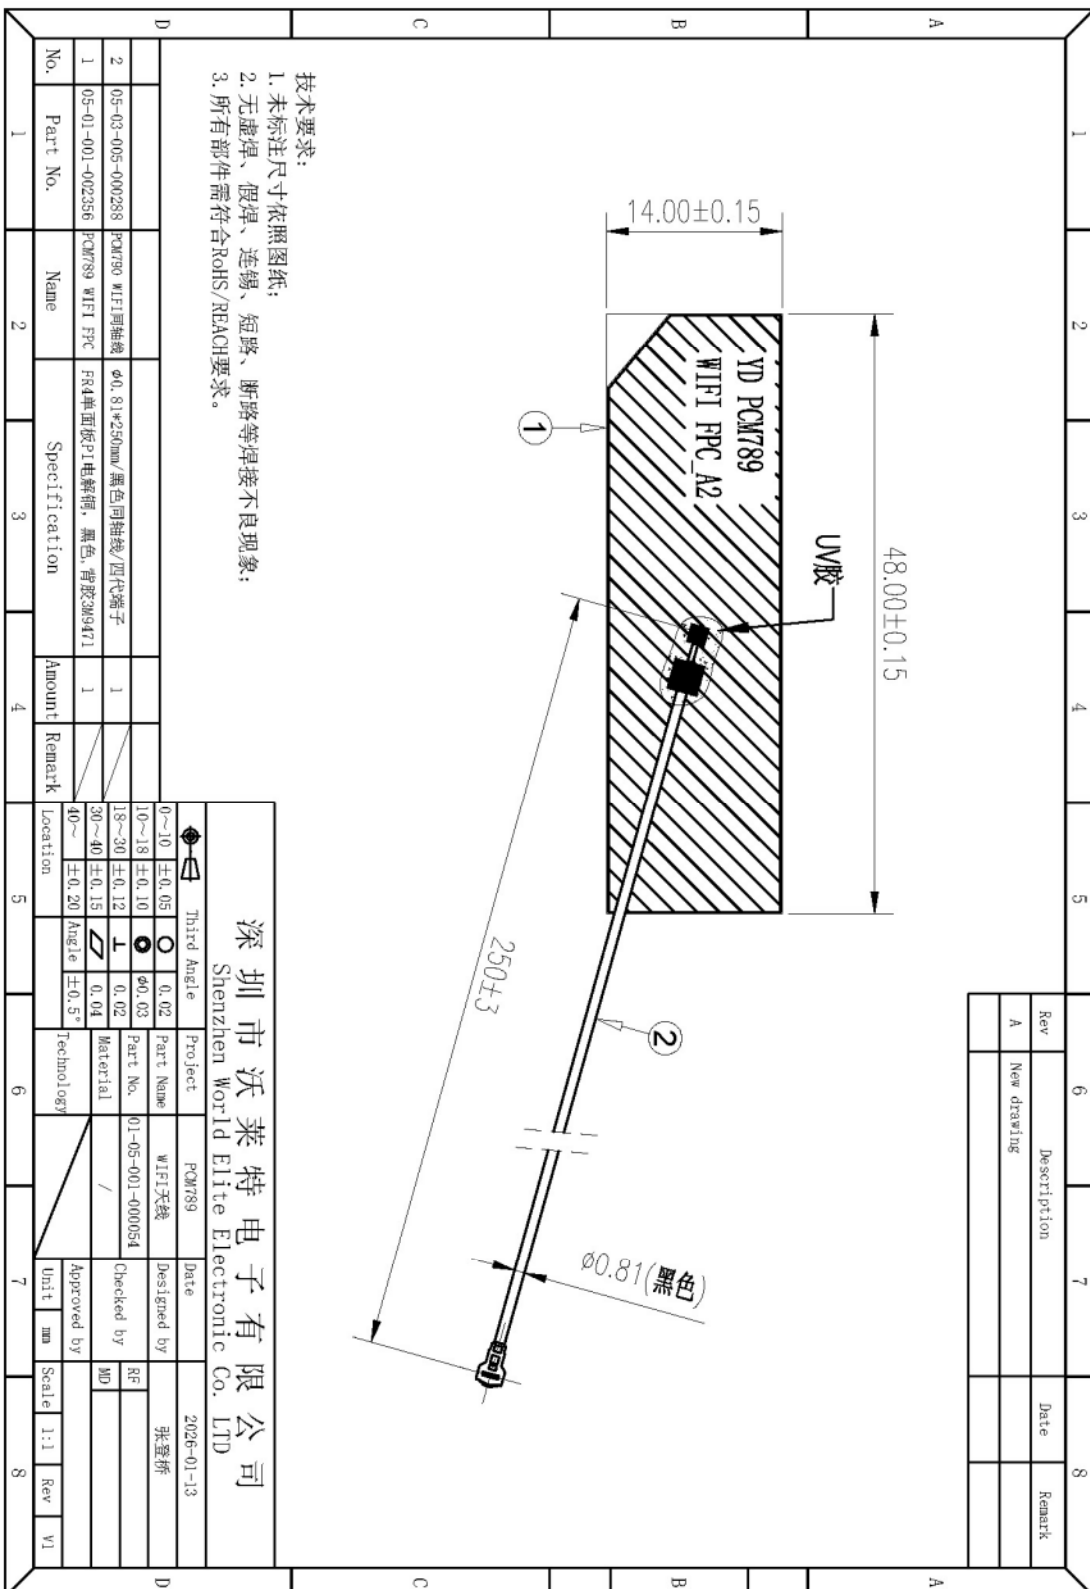

- 技术要求:
1. 未标注尺寸依照图纸;
 2. 无虚焊、假焊、连锡、短路、断路等焊接不良现象;
 3. 所有部件需符合RoHS/REACH要求。

4、Part Drawing