

**FCC Part 15, Subpart C  
Test Report**

FCC ID: 2AR2STAT6000

Applicant: MMD Hong Kong Holding Limited

Address: Units 1208-11, 12th Floor, C-Bons International Center, 108 Wai Yip Street,  
Kwun Tong, Kowloon, Hong Kong

Manufacturer: MMD Hong Kong Holding Limited

Address: Units 1208-11, 12th Floor, C-Bons International Center, 108 Wai Yip Street,  
Kwun Tong, Kowloon, Hong Kong

Product: ANC True wireless headphones

Brand(s): PHILIPS or 

Test Model(s): TAT6000

Series Model(s): TAT6100, TAT6000xx/yy, TAT6100xx/yy (xx=AA-ZZ or blank denoted  
different color; yy=00-99 denoted different country destination)

Test Date: Dec. 11, 2025 ~ Feb. 02, 2026

Issued Date: Feb. 03, 2026

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang  
Town, Dongguan City, People's Republic of China


Test Firm Registration No.: 915896

Designation No.: CN1255

Standards: FCC CFR 47 Part 2, Subpart J  
FCC CFR 47 Part 15, Subpart C


The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Aaron Xiao

Reviewed by :



Sye Yang

Approved by :



Scott He

"This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver."

## Table of Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                               | <b>4</b>  |
| <b>1. Summary of Test Results .....</b>                           | <b>5</b>  |
| 1.1 Measurement Uncertainty .....                                 | 5         |
| 1.2 Modification Record .....                                     | 5         |
| <b>2. General Information .....</b>                               | <b>6</b>  |
| 2.1 General Description of EUT .....                              | 6         |
| 2.2 Description of Test Channels .....                            | 7         |
| 2.3 Test Mode Applicability and Tested Channel Detail .....       | 8         |
| 2.4 Description of Support Units .....                            | 10        |
| 2.5 Configuration of System under Test .....                      | 10        |
| <b>3. Test Types and Results .....</b>                            | <b>11</b> |
| 3.1 Radiated Emission and Band-edge Measurement .....             | 11        |
| 3.1.1 Limits of radiated emission and band-edge measurement ..... | 11        |
| 3.1.2 Test Instruments .....                                      | 12        |
| 3.1.3 Test Procedures .....                                       | 13        |
| 3.1.4 Deviation from Test Standard .....                          | 14        |
| 3.1.5 Test Setup .....                                            | 15        |
| 3.1.6 EUT Operating Conditions .....                              | 16        |
| 3.1.7 Test Results .....                                          | 17        |
| 3.2 Conducted Emission Measurement .....                          | 29        |
| 3.2.1 Limits of Conducted Emission Measurement .....              | 29        |
| 3.2.2 Test Instruments .....                                      | 29        |
| 3.2.3 Test Procedures .....                                       | 30        |
| 3.2.4 Test Setup .....                                            | 30        |
| 3.2.5 EUT Operating Condition .....                               | 30        |
| 3.2.6 Deviation from Test Standard .....                          | 30        |
| 3.2.7 Test Results .....                                          | 31        |
| 3.3 6dB Bandwidth Measurement .....                               | 33        |
| 3.3.1 Limits of 6dB Bandwidth Measurement .....                   | 33        |
| 3.3.2 Test Setup .....                                            | 33        |
| 3.3.3 Test Instruments .....                                      | 33        |
| 3.3.4 Test Procedure .....                                        | 34        |
| 3.3.5 Deviation from Test Standard .....                          | 34        |
| 3.3.6 EUT Operating Conditions .....                              | 34        |
| 3.3.7 Test Result .....                                           | 35        |
| 3.4 Occupied Bandwidth Measurement .....                          | 38        |
| 3.4.1 Test Setup .....                                            | 38        |
| 3.4.2 Test Instruments .....                                      | 38        |
| 3.4.3 Test Procedure .....                                        | 38        |
| 3.4.4 Deviation from Test Standard .....                          | 38        |
| 3.4.5 EUT Operating Conditions .....                              | 38        |
| 3.4.6 Test Results .....                                          | 39        |
| 3.5 Conducted Output Power Measurement .....                      | 42        |
| 3.5.1 Limits of Conducted Output Power Measurement .....          | 42        |
| 3.5.2 Test Setup .....                                            | 42        |
| 3.5.3 Test Instruments .....                                      | 42        |
| 3.5.4 Test Procedures .....                                       | 42        |
| 3.5.5 Deviation from Test Standard .....                          | 44        |
| 3.5.6 EUT Operating Conditions .....                              | 44        |
| 3.5.7 Test Results .....                                          | 45        |
| 3.6 Power Spectral Density Measurement .....                      | 52        |

Test Report No.: 25112701-RF-US-02

|                 |                                                           |           |
|-----------------|-----------------------------------------------------------|-----------|
| 3.6.1           | Limits of Power Spectral Density Measurement.....         | 52        |
| 3.6.2           | Test Setup .....                                          | 52        |
| 3.6.3           | Test Instruments .....                                    | 52        |
| 3.6.4           | Test Procedure .....                                      | 53        |
| 3.6.5           | Deviation from Test Standard.....                         | 53        |
| 3.6.6           | EUT Operating Condition .....                             | 53        |
| 3.6.7           | Test Results.....                                         | 54        |
| 3.7             | Conducted Out of Band Emission Measurement .....          | 57        |
| 3.7.1           | Limits of Conducted Out of Band Emission Measurement..... | 57        |
| 3.7.2           | Test Setup .....                                          | 57        |
| 3.7.3           | Test Instruments .....                                    | 57        |
| 3.7.4           | Test Procedure .....                                      | 58        |
| 3.7.5           | Deviation from Test Standard.....                         | 58        |
| 3.7.6           | EUT Operating Condition .....                             | 58        |
| 3.7.7           | Test results .....                                        | 59        |
| 3.8             | Antenna Application.....                                  | 70        |
| 3.8.1           | Antenna Requirement.....                                  | 70        |
| 3.8.2           | Test Results.....                                         | 70        |
| <b>4.</b>       | <b>Pictures of Test Arrangements .....</b>                | <b>71</b> |
| <b>5.</b>       | <b>Test Instruments.....</b>                              | <b>72</b> |
| <b>Appendix</b> | <b>- Information on The Testing Laboratories.....</b>     | <b>73</b> |

Test Report No.: 25112701-RF-US-02

**Release Control Record**

| Issue No.         | Description      | Date Issued   |
|-------------------|------------------|---------------|
| 25112701-RF-US-02 | Original Release | Feb. 03, 2026 |

**1. Summary of Test Results**

| FCC CFR 47 Part 15, Subpart C                                                                                                                                                                                                                                      |                                    |        |                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------|----------------------|
| FCC Clause                                                                                                                                                                                                                                                         | Test Item                          | Result | Remarks              |
| 15.207                                                                                                                                                                                                                                                             | AC Power Conducted Emission        | Pass   | Meet the requirement |
| 15.247(a)                                                                                                                                                                                                                                                          | Emission Bandwidth Measurement     | Pass   | Meet the requirement |
| 15.247(d)                                                                                                                                                                                                                                                          | Conducted Spurious Emissions       | Pass   | Meet the requirement |
| 15.205<br>15.209<br>15.247(d)                                                                                                                                                                                                                                      | Radiated Spurious Emission         | Pass   | Meet the requirement |
| 15.247(e)                                                                                                                                                                                                                                                          | Power Spectral Density Measurement | Pass   | Meet the requirement |
| 15.247(b)                                                                                                                                                                                                                                                          | Maximum Output Power               | Pass   | Meet the requirement |
| 15.203                                                                                                                                                                                                                                                             | Antenna Requirement                | Pass   | Meet the requirement |
| NOTE1: The above test items were tested in accordance with the C63.10 2020 standard for all the requirements.                                                                                                                                                      |                                    |        |                      |
| NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits. |                                    |        |                      |

**1.1 Measurement Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

| Measurement                        | Frequency       | Expanded Uncertainty<br>(k=2) (±) |
|------------------------------------|-----------------|-----------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz  | 2.66 dB                           |
| Radiated Emissions up to 1 GHz     | 9KHz ~ 30MHz    | 2.16 dB                           |
|                                    | 30MHz ~ 1000MHz | 3.56 dB                           |
| Radiated Emissions above 1 GHz     | 1GHz ~ 6GHz     | 4.71 dB                           |
|                                    | 6GHz~18GHz      | 4.84 dB                           |
|                                    | 18GHz ~ 40GHz   | 5.73 dB                           |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

**1.2 Modification Record**

There were no modifications required for compliance.

**2. General Information****2.1 General Description of EUT**

|                               |                                                                                                                                 |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Product(s)                    | ANC True wireless headphones                                                                                                    |
| Test Model(s)                 | TAT6000                                                                                                                         |
| Sample No.                    | HX2511270101, HX2511270102                                                                                                      |
| Series Model(s)               | TAT6100, TAT6000xx/yy, TAT6100xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination) |
| Status of EUT                 | Engineering Prototype                                                                                                           |
| Power Supply Rating           | Charging case: DC 5V from USB or DC 3.7V from battery<br>Each earbud: DC 5V from Charging case or DC 3.85V from battery         |
| Modulation Type               | GFSK for DTS                                                                                                                    |
| Transfer Rate                 | 1 Mbps, 2Mbps                                                                                                                   |
| Operating Frequency           | 1M: 2402 ~ 2480MHz<br>2M: 2404 ~ 2478MHz                                                                                        |
| Number of Channel             | 40 for 1Mbps<br>37 for 2Mbps                                                                                                    |
| Maximum Output Power          | 1.67dBm (Peak)                                                                                                                  |
| Antenna Type and Antenna Gain | Chip Antenna;<br>Left: 2.5dBi<br>Right: 2.5dBi                                                                                  |
| Antenna Connector             | N/A                                                                                                                             |
| Accessory Device              | Type-C Cable: Unshielded, 20cm                                                                                                  |

## Note:

1. Please refer to the EUT photo document (Reference No.: 25112701-01&02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
3. Hwa-Hsing (Dongguan) Testing Co., Ltd. is not responsible for the accuracy of the information provided by the manufacturer.
4. This product has two Bluetooth Chips (distribute left earphone and right earphone), they are identical in RF circuitry and antenna except the layout of partial components; both of the earphones are tested on all items, and the report only shows the worst data-Right earphone.
5. Model differences: All models are identical except model name and color for marketing purpose.

**2.2 Description of Test Channels**

40 channels are provided to BT-LE (1Mbps):

| CHANNEL | FREQ.<br>(MHZ) | CHANNEL | FREQ.<br>(MHZ) | CHANNEL | FREQ.<br>(MHZ) | CHANNEL | FREQ.<br>(MHZ) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| 0       | 2402           | 10      | 2422           | 20      | 2442           | 30      | 2462           |
| 1       | 2404           | 11      | 2424           | 21      | 2444           | 31      | 2464           |
| 2       | 2406           | 12      | 2426           | 22      | 2446           | 32      | 2466           |
| 3       | 2408           | 13      | 2428           | 23      | 2448           | 33      | 2468           |
| 4       | 2410           | 14      | 2430           | 24      | 2450           | 34      | 2470           |
| 5       | 2412           | 15      | 2432           | 25      | 2452           | 35      | 2472           |
| 6       | 2414           | 16      | 2434           | 26      | 2454           | 36      | 2474           |
| 7       | 2416           | 17      | 2436           | 27      | 2456           | 37      | 2476           |
| 8       | 2418           | 18      | 2438           | 28      | 2458           | 38      | 2478           |
| 9       | 2420           | 19      | 2440           | 29      | 2460           | 39      | 2480           |

37 channels are provided to BT-LE (2Mbps):

| CHANNEL | FREQ.<br>(MHZ) | CHANNEL | FREQ.<br>(MHZ) | CHANNEL | FREQ.<br>(MHZ) | CHANNEL | FREQ.<br>(MHZ) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| -       | -              | 10      | 2422           | 20      | 2442           | 30      | 2462           |
| 1       | 2404           | 11      | 2424           | 21      | 2444           | 31      | 2464           |
| 2       | 2406           | -       | -              | 22      | 2446           | 32      | 2466           |
| 3       | 2408           | 13      | 2428           | 23      | 2448           | 33      | 2468           |
| 4       | 2410           | 14      | 2430           | 24      | 2450           | 34      | 2470           |
| 5       | 2412           | 15      | 2432           | 25      | 2452           | 35      | 2472           |
| 6       | 2414           | 16      | 2434           | 26      | 2454           | 36      | 2474           |
| 7       | 2416           | 17      | 2436           | 27      | 2456           | 37      | 2476           |
| 8       | 2418           | 18      | 2438           | 28      | 2458           | 38      | 2478           |
| 9       | 2420           | 19      | 2440           | 29      | 2460           | -       | -              |

## 2.3 Test Mode Applicability and Tested Channel Detail

| EUT Configure Mode                                                                                                                                                           | Applicable test items          | X-Axis | Y-Axis | Z-Axis | Voltage Supply                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------|--------|--------|---------------------------------|
| Conducted                                                                                                                                                                    | AC Power Conducted Emission    | N/A    | N/A    | N/A    | DC 5V from USB via AC120V input |
| Radiated                                                                                                                                                                     | Radiated Emissions             | √      | √      | √      | DC 3.7V from battery            |
| Antenna Port Conducted Measurement                                                                                                                                           | Band Edge Measurement          | N/A    | N/A    | N/A    |                                 |
|                                                                                                                                                                              | Antenna Port Emission          | N/A    | N/A    | N/A    |                                 |
|                                                                                                                                                                              | 6dB Bandwidth                  | N/A    | N/A    | N/A    |                                 |
|                                                                                                                                                                              | Occupied Bandwidth Measurement | N/A    | N/A    | N/A    |                                 |
|                                                                                                                                                                              | Conducted power                | N/A    | N/A    | N/A    |                                 |
|                                                                                                                                                                              | Power Spectral Density         | N/A    | N/A    | N/A    |                                 |
| <p>1. *: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on <b>Z-plane</b>.</p> <p>2. "N/A" means Not Applicable.</p> |                                |        |        |        |                                 |

### Test Condition:

| Applicable test items              | Environmental Conditions | Test Date     | Tested by |
|------------------------------------|--------------------------|---------------|-----------|
| Radiated Emissions                 | 24.0deg. C, 55%RH        | Jan. 08, 2026 | Aron      |
| Antenna Port Conducted Measurement | 25.5deg. C, 58%RH        | Jan. 30, 2026 | Yonah Wu  |

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Following channel(s) was (were) selected for the final test as listed below.

### Radiated Emission Test (Above 1GHz):

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|-------------------|----------------|-----------------|------------------|
| -                  | 0 to 39           | 0,19, 39       | GFSK            | 1                |
| -                  | 1 to 38           | 1,19, 38       | GFSK            | 2                |

### Radiated Emission Test (Below 1GHz):

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|-------------------|----------------|-----------------|------------------|
| -                  | 0 to 39           | 0,19, 39       | GFSK            | 1                |
| -                  | 1 to 38           | 1,19, 38       | GFSK            | 2                |

Test Report No.: 25112701-RF-US-02

**Power Line Conducted Emission Test:**

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|-------------------|----------------|-----------------|------------------|
| -                  | 0 to 39           | 19             | GFSK            | 1                |

**Antenna Port Conducted Measurement:**

\*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|-------------------|----------------|-----------------|------------------|
| -                  | 0 to 39           | 0,19, 39       | GFSK            | 1                |
| -                  | 1 to 38           | 1,19, 38       | GFSK            | 2                |


## 2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Product  | Brand   | Model No.                        | Serial No.                        | FCC ID |
|-----|----------|---------|----------------------------------|-----------------------------------|--------|
| 1   | Notebook | ARONWEI | NbD-WFH9                         | EUEPM21725002655                  | N/A    |
| 2   | Notebook | DELL    | Inspiron 14R<br>Aluminum Edition | 6WPG9-63PV4-RBPF2-<br>T6RHW-W9GBP | N/A    |

| No. | Signal Cable Description of The Above Support Units |
|-----|-----------------------------------------------------|
| 1.  | USB extension cord: Unshielded, Detachable 1.2m;    |

## 2.5 Configuration of System under Test

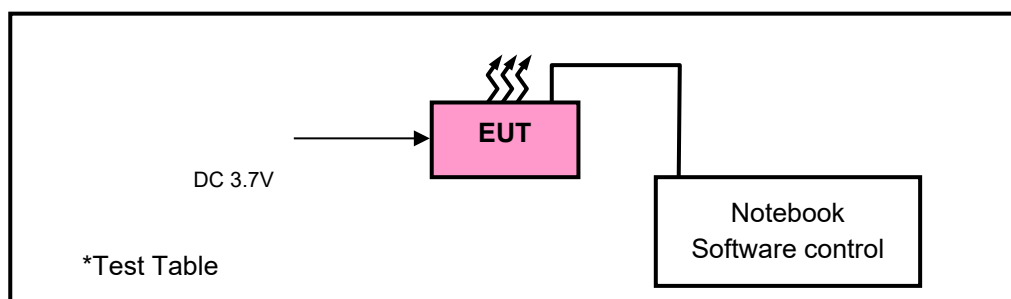

**3. Test Types and Results****3.1 Radiated Emission and Band-edge Measurement****3.1.1 Limits of radiated emission and band-edge measurement**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490        | 2400/F(kHz)                          | 300                              |
| 0.490 ~ 1.705        | 24000/F(kHz)                         | 30                               |
| 1.705 ~ 30.0         | 30                                   | 30                               |
| 30 ~ 88              | 100                                  | 3                                |
| 88 ~ 216             | 150                                  | 3                                |
| 216 ~ 960            | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 3.1.2 Test Instruments

Radiated emission below 30MHz:

| Equipment                           | Manufacturer  | Model No. | Serial No.     | Next Cal.   |
|-------------------------------------|---------------|-----------|----------------|-------------|
| EMI Test Receiver                   | Rohde&Schwarz | ESR7      | 100962         | 2026-07-23  |
| 3m Semi-anechoic Chamber            | MAORUI        | 9m*6m*6m  | HS-2018037     | 2026-03-13* |
| Test software                       | FARAD         | FARAD     | EZ_EMCV1.1.4.2 | N/A         |
| Loop Antenna                        | EMCI          | HLA 6121  | 56735          | 2026-05-19  |
| Antenna Tower                       | MF            | MFA-440H  | NA             | NA          |
| Turn Table                          | MF            | MFT-201SS | NA             | NA          |
| Antenna Tower&Turn Table Controller | MF            | MF-7802   | NA             | NA          |

Frequency Range below 1GHz:

| Equipment                         | Manufacturer  | Model No.       | Serial No.     | Next Cal.   |
|-----------------------------------|---------------|-----------------|----------------|-------------|
| EMI Test Receiver (9kHz~3GHz)     | Rohde&Schwarz | ESPI 7          | 101978         | 2026-07-23  |
| Broadband antenna (25MHz~2500MHz) | Schwarzbeck   | VULB 9168       | 937            | 2026-07-25  |
| 3m Semi-anechoic Chamber          | MAORUI        | 9m*6m*6m        | HS-2018037     | 2026-03-13* |
| Signal Amplifier (30MHz~1000MHz)  | Com-power     | PAM-103         | 18020051       | 2026-07-23  |
| Attenuator                        | R&S           | TS2GA-6dB       | 18101101       | N/A         |
| Test software                     | FARAD         | EZ EMC V1.1.4.2 | N/A            | N/A         |
| Broadcast test system             | R&S           | SFU             | 100410         | 2026-07-23  |
| Coaxial cable                     | N/A           | N/A             | HS-EMC-100     | 2026-07-23  |
| Coaxial cable                     | N/A           | N/A             | HS-EMC-101/102 | 2026-07-23  |

Frequency Range above 1GHz:

| Equipment                           | Manufacturer  | Model No.      | Serial No.     | Next Cal.   |
|-------------------------------------|---------------|----------------|----------------|-------------|
| EMI Test Receiver                   | Rohde&Schwarz | ESPI 7         | 101978         | 2026-07-23  |
| 3m Semi-anechoic Chamber            | MAORUI        | 9m*6m*6m       | HS-2018037     | 2026-03-13* |
| Test software                       | FARAD         | EZ_EMCV1.1.4.2 | N/A            | N/A         |
| Digital Multimeter                  | FLUKE         | 15B+           | 43512617WS     | 2026-07-28  |
| Horn Antenna                        | Schwarzbeck   | BBHA 9120 D    | 1959           | 2026-08-02  |
| Spectrum Analyzer                   | Rohde&Schwarz | FSV-40N        | 101783         | 2026-07-23  |
| Broadband Coaxial Preamplifier      | Schwarzbeck   | BBV 9718       | 25             | 2026-07-23  |
| Pre-Amplifier                       | EMCI          | EMC 184045SE   | 9870709        | 2026-07-30  |
| Spectrum                            | Keysight      | N9020A         | MY51240612     | 2026-07-23  |
| Broadcast test system               | R&S           | SFU            | 100410         | 2026-07-23  |
| Antenna Tower                       | MF            | MFA-440H       | NA             | NA          |
| Turn Table                          | MF            | MFT-201SS      | NA             | NA          |
| Antenna Tower&Turn Table Controller | MF            | MF-7802        | NA             | NA          |
| Coaxial cable                       | N/A           | N/A            | HS-EMC-103     | 2026-07-23  |
| Coaxial cable                       | N/A           | N/A            | HS-EMC-104/105 | 2026-07-23  |

Note:

1. The calibration interval of the above test instruments is 12 months or 36 months (\*).
2. The test was performed in 966.

## 3.1.3 Test Procedures

**a. Peak emission levels are measured by setting the instrument as follow:**

- 1) RBW & VBW setting as a function of frequency:

| Frequency     | RBW    | VBW    |
|---------------|--------|--------|
| 9kHz~150kHz   | 200Hz  | 600Hz  |
| 0.15MHz~30MHz | 9kHz   | 30kHz  |
| 30MHz~1000MHz | 120kHz | 300kHz |
| >1000MHz      | 1MHz   | 3MHz   |

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

**b. Average emission levels are measured by setting the instrument as follow:****● Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW  $\geq 3 \times$  RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

**● Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in ANSI C63.10.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW  $\geq 3 \times$  RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

\*If power averaging (rms) mode was used in step 5). then the applicable correction factor is  $[10 \log (1/D)]$ , where D is the duty cycle.

\*\*If linear voltage averaging mode was used in step f). then the applicable correction factor is  $[20 \log (1/D)]$ , where D is the duty cycle.

\*\*\*If a specific emission is demonstrated to be continuous ( $D > 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that.

**● Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ( $D > 98\%$ ) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed  $\pm 2\%$ ), then the following procedure shall be used:

- 1) RBW = 1 MHz
  - 2) VBW  $\geq 1/T$ .
  - 3) Detector = peak
  - 4) Sweep time = auto.
  - 5) Trace mode = max hold.
  - 6) Allow max hold to run for at least  $[50 \times (1/D)]$  traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (Above 1GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1GHz), which was mounted on the top of a variable-height antenna tower.
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =  $1/T$  for Average (Duty cycle  $< 98\%$ ) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is = 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

**3.1.4 Deviation from Test Standard**


No deviation.


## 3.1.5 Test Setup

### Radiated emission below 30MHz:

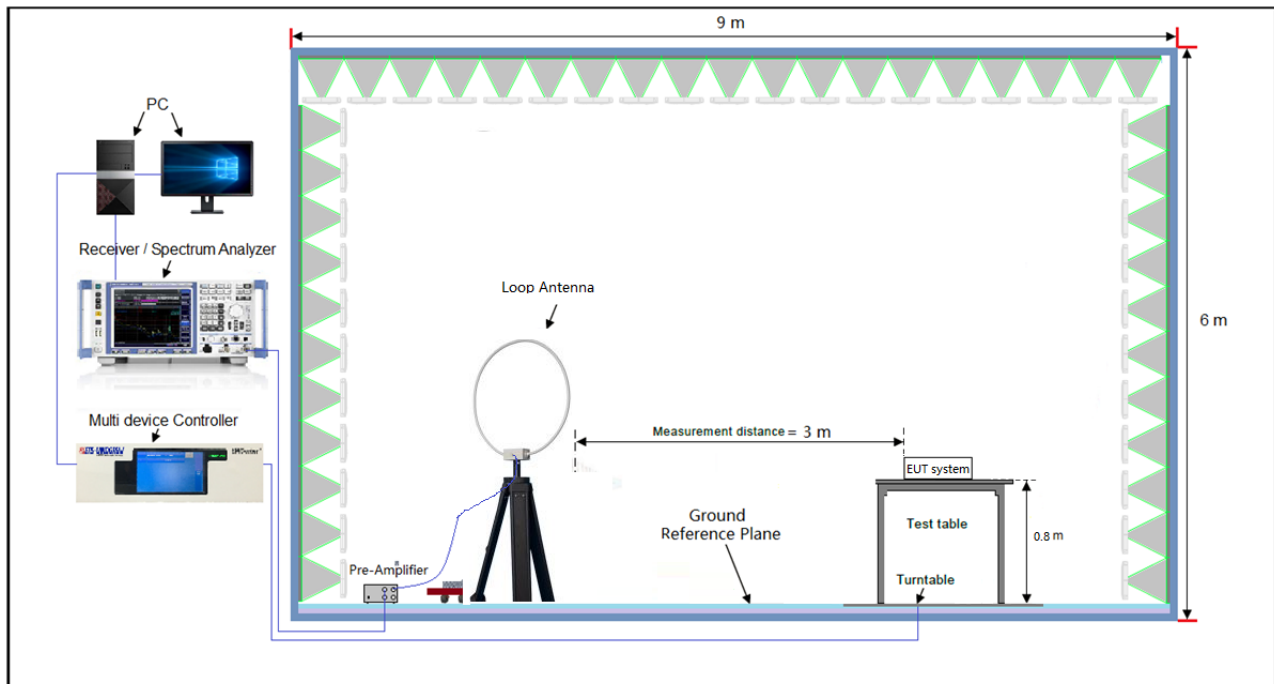

### Frequency Range below 1GHz:

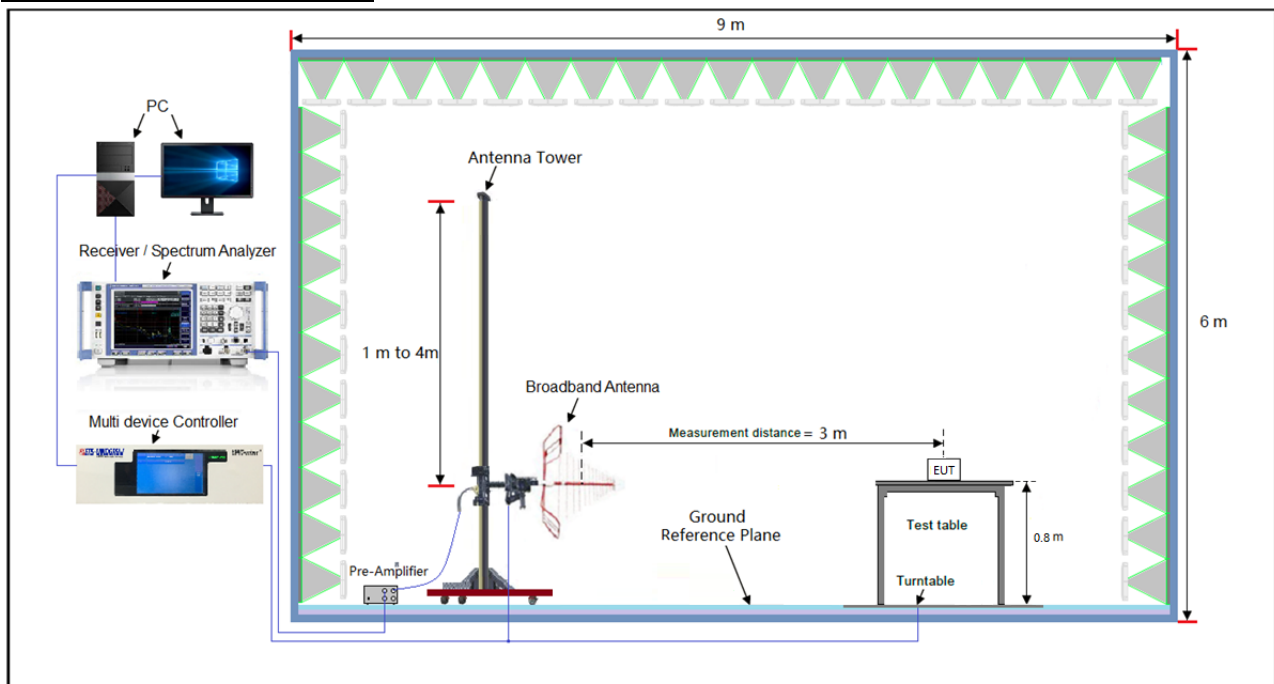

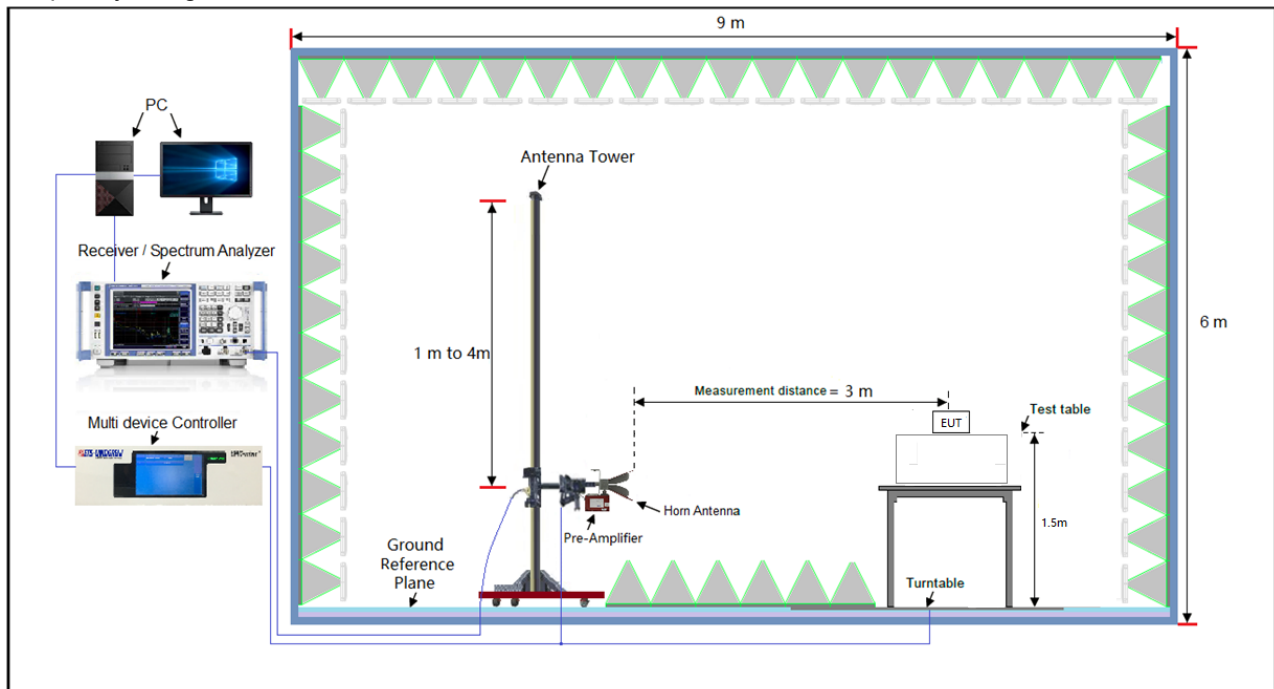Frequency Range above 1GHz:

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.


## 3.1.7 Test Results

### 9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

### 30MHz ~ 1GHz Worst-Case Data:


|                   |                              |                 |              |
|-------------------|------------------------------|-----------------|--------------|
| Test Channel      | Channel 0                    | Frequency Range | 30MHz ~ 1GHz |
| Detector Function | Peak (PK)<br>Quasi-peak (QP) | Tested By       | Aron         |

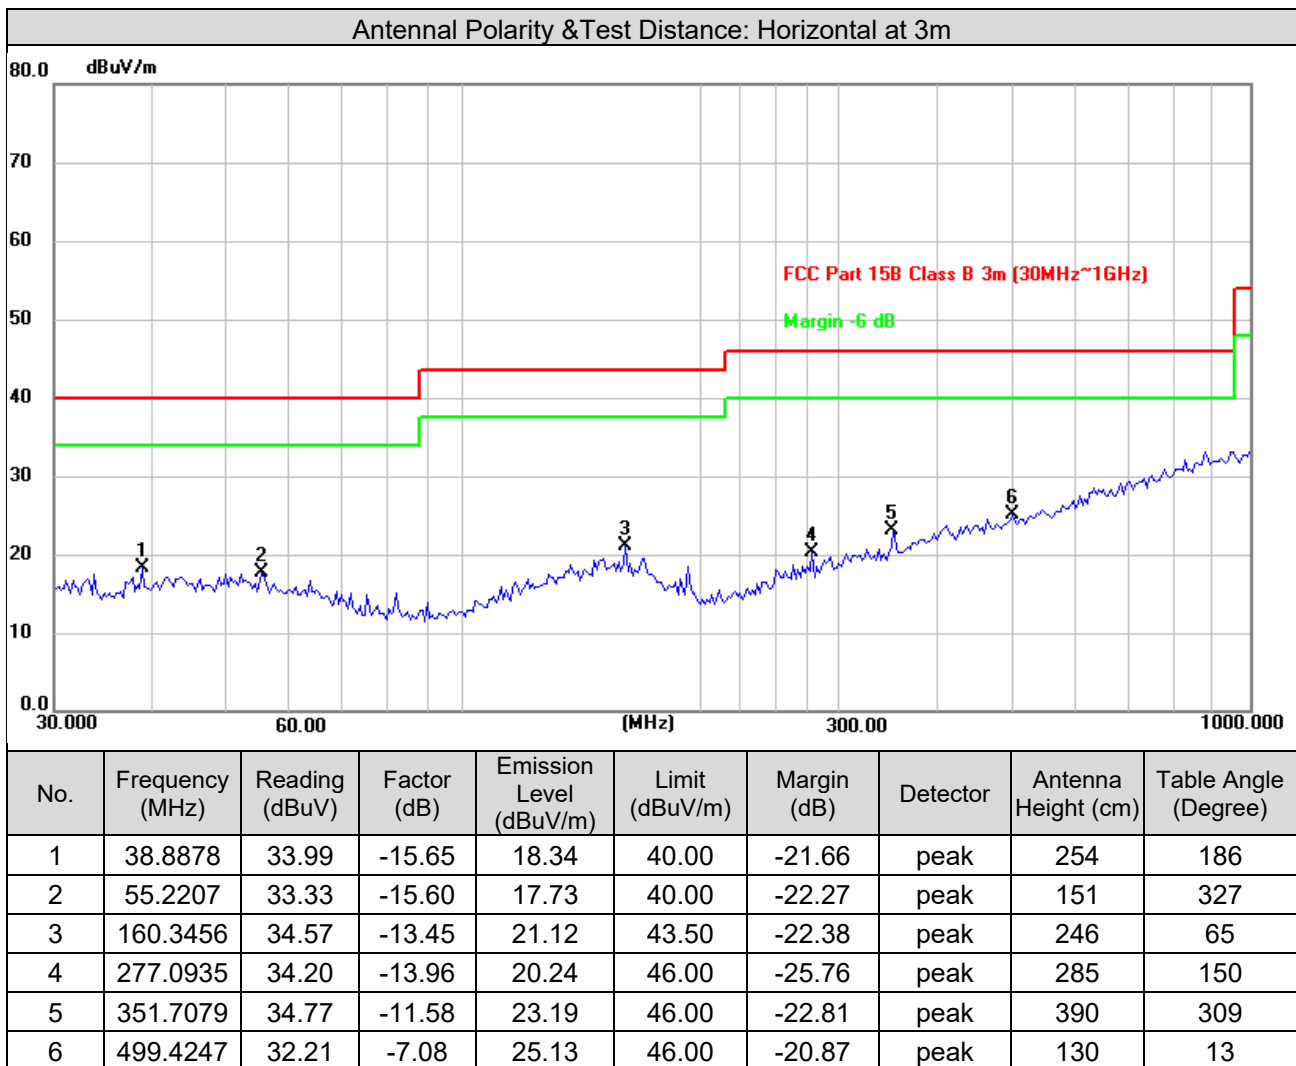

### Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

|                   |                              |                 |              |
|-------------------|------------------------------|-----------------|--------------|
| Test Channel      | Channel 0                    | Frequency Range | 30MHz ~ 1GHz |
| Detector Function | Peak (PK)<br>Quasi-peak (QP) | Tested By       | Aron         |

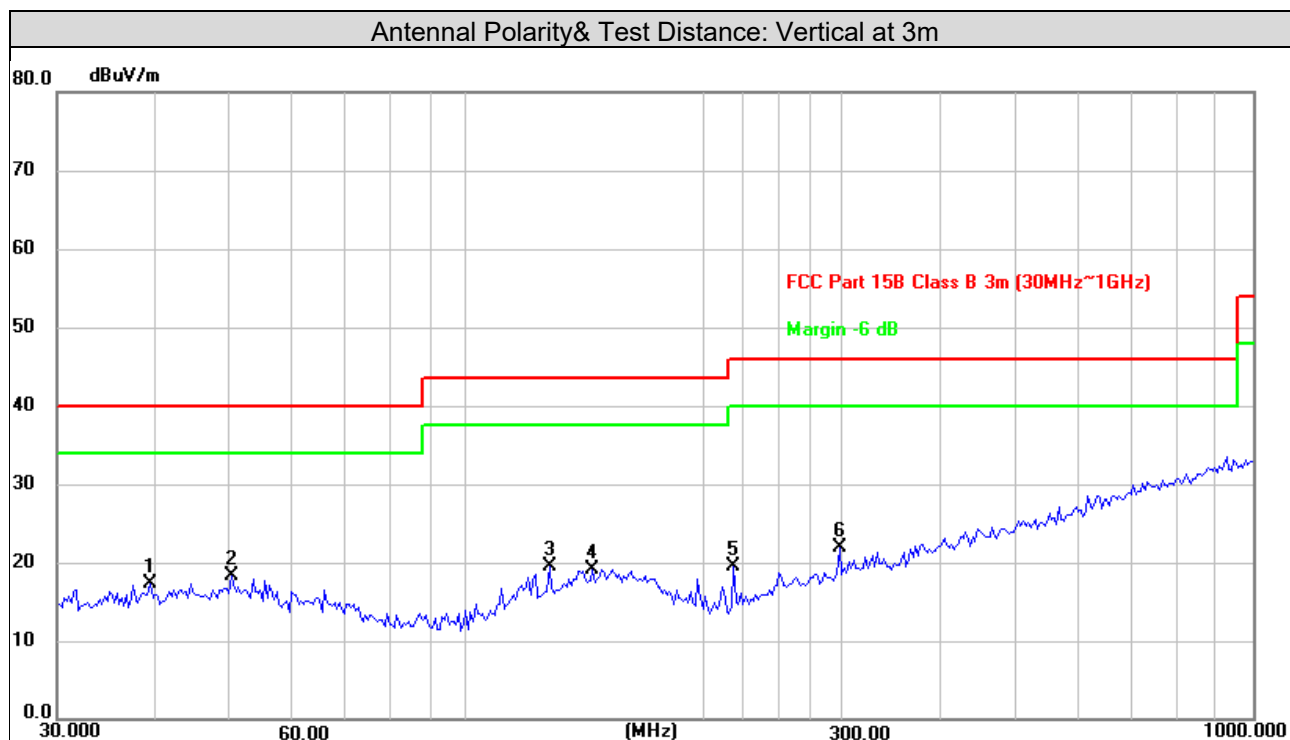

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 39.4371         | 32.98          | -15.59              | 17.39                   | 40.00          | -22.61      | peak     | 361                 | 110                  |
| 2   | 50.0566         | 33.38          | -15.09              | 18.29                   | 40.00          | -21.71      | peak     | 135                 | 310                  |
| 3   | 127.2176        | 34.66          | -15.13              | 19.53                   | 43.50          | -23.97      | peak     | 378                 | 204                  |
| 4   | 144.3348        | 32.98          | -13.80              | 19.18                   | 43.50          | -24.32      | peak     | 262                 | 210                  |
| 5   | 218.3085        | 36.60          | -17.15              | 19.45                   | 46.00          | -26.55      | peak     | 367                 | 92                   |
| 6   | 297.2241        | 35.11          | -13.12              | 21.99                   | 46.00          | -24.01      | peak     | 372                 | 111                  |


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value

## Above 1GHz Data:

### BLE-1Mbps

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 0                  | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

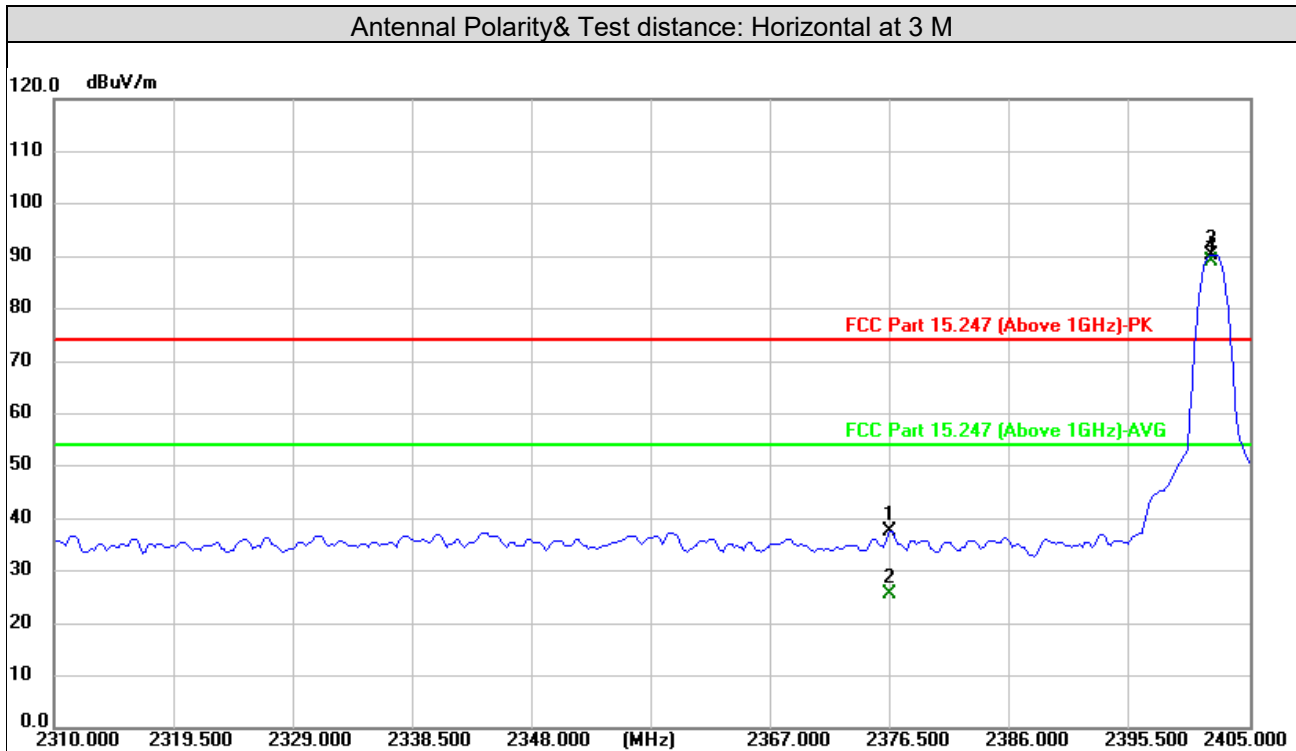


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2376.443        | 38.90          | -1.39               | 37.51                   | 74.00          | -36.49      | peak     | 100                 | 94                   |
| 2   | 2376.443        | 26.97          | -1.39               | 25.58                   | 54.00          | -28.42      | AVG      | 100                 | 94                   |
| 3 # | 2401.954        | 91.37          | -1.22               | 90.15                   |                |             | peak     | 100                 | 94                   |
| 4 # | 2401.954        | 90.32          | -1.22               | 89.10                   |                |             | AVG      | 100                 | 94                   |
| 5   | 4804.000        | 41.51          | 2.45                | 43.96                   | 74.00          | -30.04      | peak     | 100                 | 122                  |
| 6   | 4804.000        | 31.34          | 2.45                | 33.79                   | 54.00          | -20.21      | AVG      | 100                 | 122                  |
| 7   | 7206.000        | 40.66          | 9.90                | 50.56                   | 74.00          | -23.44      | peak     | 143                 | 251                  |
| 8   | 7206.000        | 29.26          | 9.90                | 39.16                   | 54.00          | -14.84      | AVG      | 143                 | 251                  |

#### Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 0                  | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

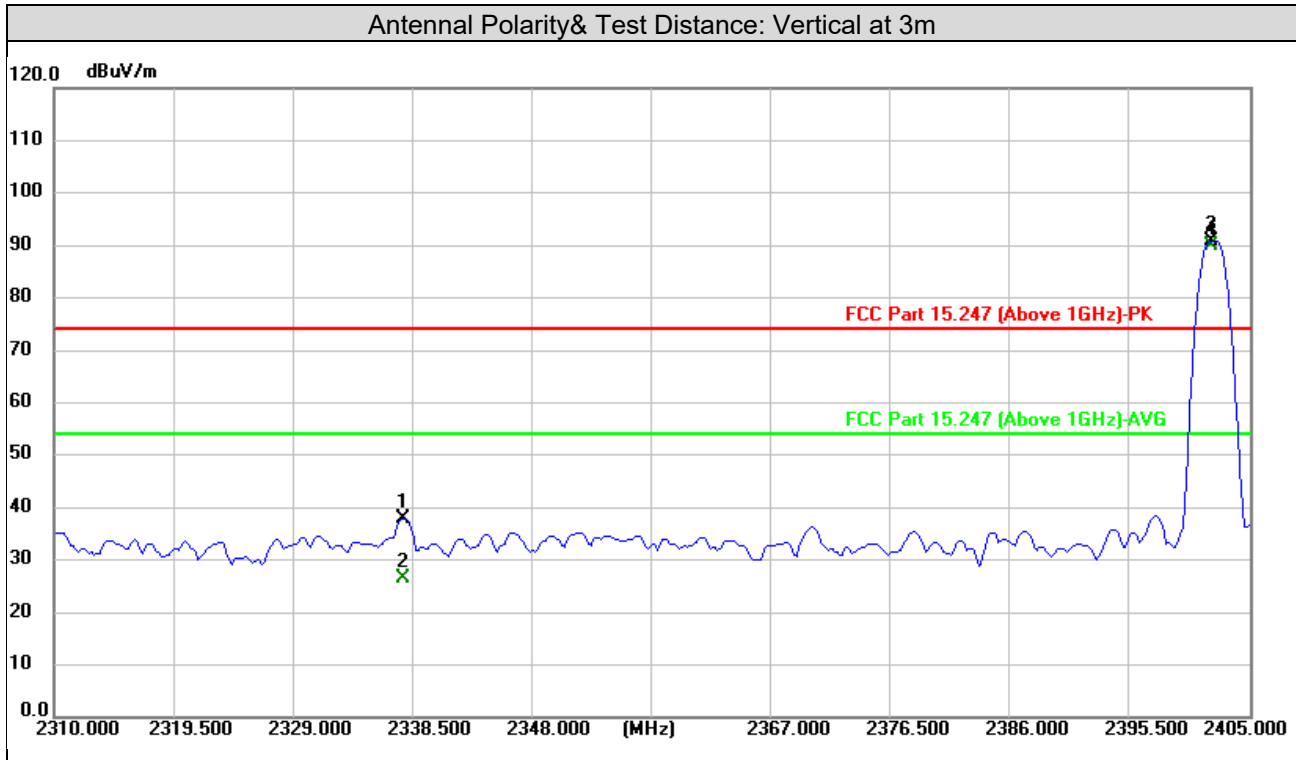

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2337.796        | 39.61          | -1.63               | 37.98                   | 74.00          | -36.02      | peak     | 238                 | 234                  |
| 2   | 2337.796        | 28.09          | -1.63               | 26.46                   | 54.00          | -27.54      | AVG      | 238                 | 234                  |
| 3 # | 2401.954        | 92.12          | -1.22               | 90.90                   |                |             | peak     | 238                 | 234                  |
| 4 # | 2401.954        | 91.15          | -1.22               | 89.93                   |                |             | AVG      | 238                 | 234                  |
| 5   | 4804.000        | 40.91          | 2.45                | 43.36                   | 74.00          | -30.64      | peak     | 100                 | 251                  |
| 6   | 4804.000        | 30.57          | 2.45                | 33.02                   | 54.00          | -20.98      | AVG      | 100                 | 251                  |
| 7   | 7206.000        | 39.79          | 9.90                | 49.69                   | 74.00          | -24.31      | peak     | 127                 | 105                  |
| 8   | 7206.000        | 29.17          | 9.90                | 39.07                   | 54.00          | -14.93      | AVG      | 127                 | 105                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 19                 | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

| Antennal Polarity& Test Distance: Horizontal at 3m |                 |                |                     |                         |                |             |          |                     |                      |
|----------------------------------------------------|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| No.                                                | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1#                                                 | 2440.000        | 93.75          | -0.98               | 92.77                   |                |             | peak     | 113                 | 101                  |
| 2#                                                 | 2440.000        | 92.64          | -0.98               | 91.66                   |                |             | AVG      | 113                 | 101                  |
| 3                                                  | 4880.000        | 44.47          | 2.63                | 47.10                   | 74.00          | -26.90      | peak     | 100                 | 46                   |
| 4                                                  | 4880.000        | 37.77          | 2.63                | 40.40                   | 54.00          | -13.60      | AVG      | 100                 | 46                   |
| 5                                                  | 7320.000        | 39.49          | 10.20               | 49.69                   | 74.00          | -24.31      | peak     | 170                 | 67                   |
| 6                                                  | 7320.000        | 28.96          | 10.20               | 39.16                   | 54.00          | -14.84      | AVG      | 170                 | 67                   |
| Antennal Polarity& Test Distance: Vertical at 3 M  |                 |                |                     |                         |                |             |          |                     |                      |
| No.                                                | Frequency (MHz) | Reading (dBUV) | Factor (dB)         | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1#                                                 | 2440.000        | 96.02          | -0.98               | 95.04                   |                |             | peak     | 255                 | 238                  |
| 2#                                                 | 2440.000        | 94.96          | -0.98               | 93.98                   |                |             | AVG      | 255                 | 238                  |
| 3                                                  | 4880.000        | 41.72          | 2.63                | 44.35                   | 74.00          | -29.65      | peak     | 100                 | 66                   |
| 4                                                  | 4880.000        | 32.36          | 2.63                | 34.99                   | 54.00          | -19.01      | AVG      | 100                 | 66                   |
| 5                                                  | 7320.000        | 41.54          | 10.20               | 51.74                   | 74.00          | -22.26      | peak     | 141                 | 311                  |
| 6                                                  | 7320.000        | 29.06          | 10.20               | 39.26                   | 54.00          | -14.74      | AVG      | 141                 | 311                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 39                 | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

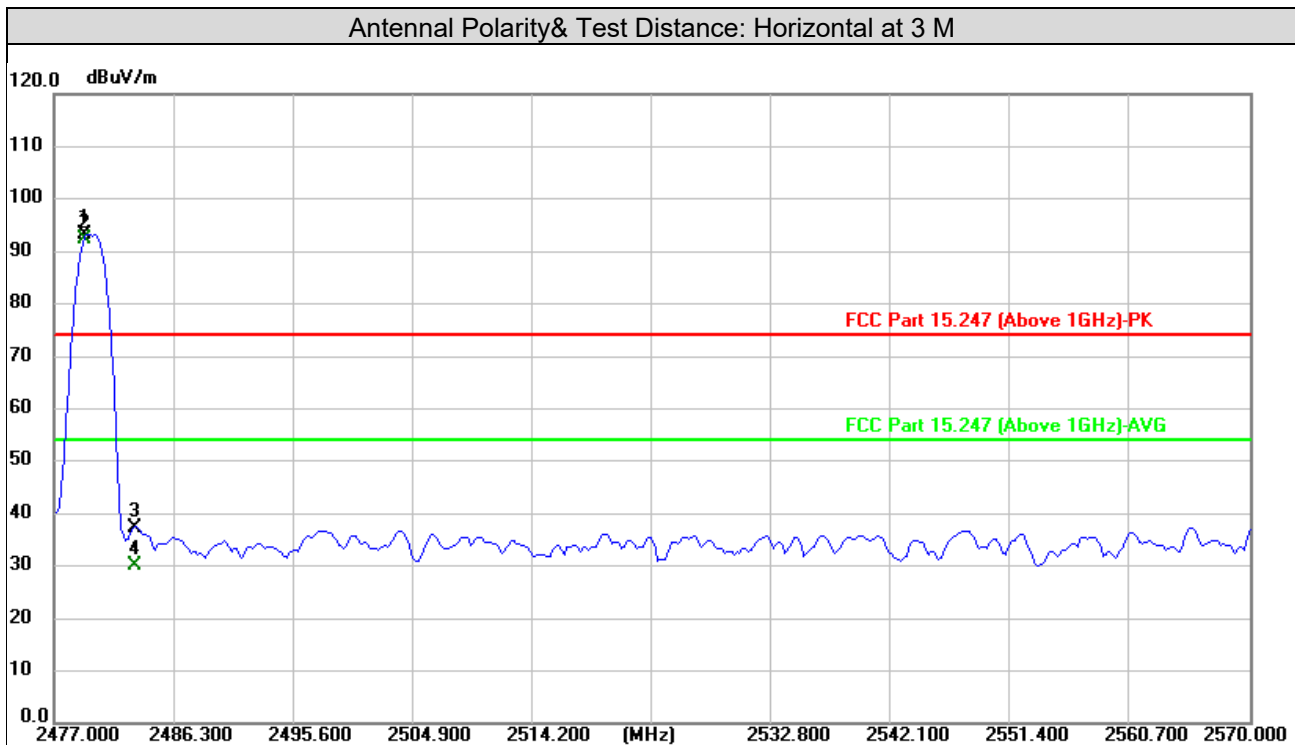


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1#  | 2479.609        | 93.97          | -0.72               | 93.25                   |                |             | peak     | 218                 | 99                   |
| 2#  | 2479.609        | 93.00          | -0.72               | 92.28                   |                |             | AVG      | 218                 | 99                   |
| 3   | 2483.500        | 38.04          | -0.69               | 37.35                   | 74.00          | -36.65      | peak     | 218                 | 99                   |
| 4   | 2483.500        | 30.81          | -0.69               | 30.12                   | 54.00          | -23.88      | AVG      | 218                 | 99                   |
| 5   | 4960.000        | 42.41          | 2.82                | 45.23                   | 74.00          | -28.77      | peak     | 100                 | 188                  |
| 6   | 4960.000        | 33.06          | 2.82                | 35.88                   | 54.00          | -18.12      | AVG      | 100                 | 188                  |
| 7   | 7440.000        | 39.31          | 10.51               | 49.82                   | 74.00          | -24.18      | peak     | 107                 | 266                  |
| 8   | 7440.000        | 28.74          | 10.51               | 39.25                   | 54.00          | -14.75      | AVG      | 107                 | 266                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 39                 | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

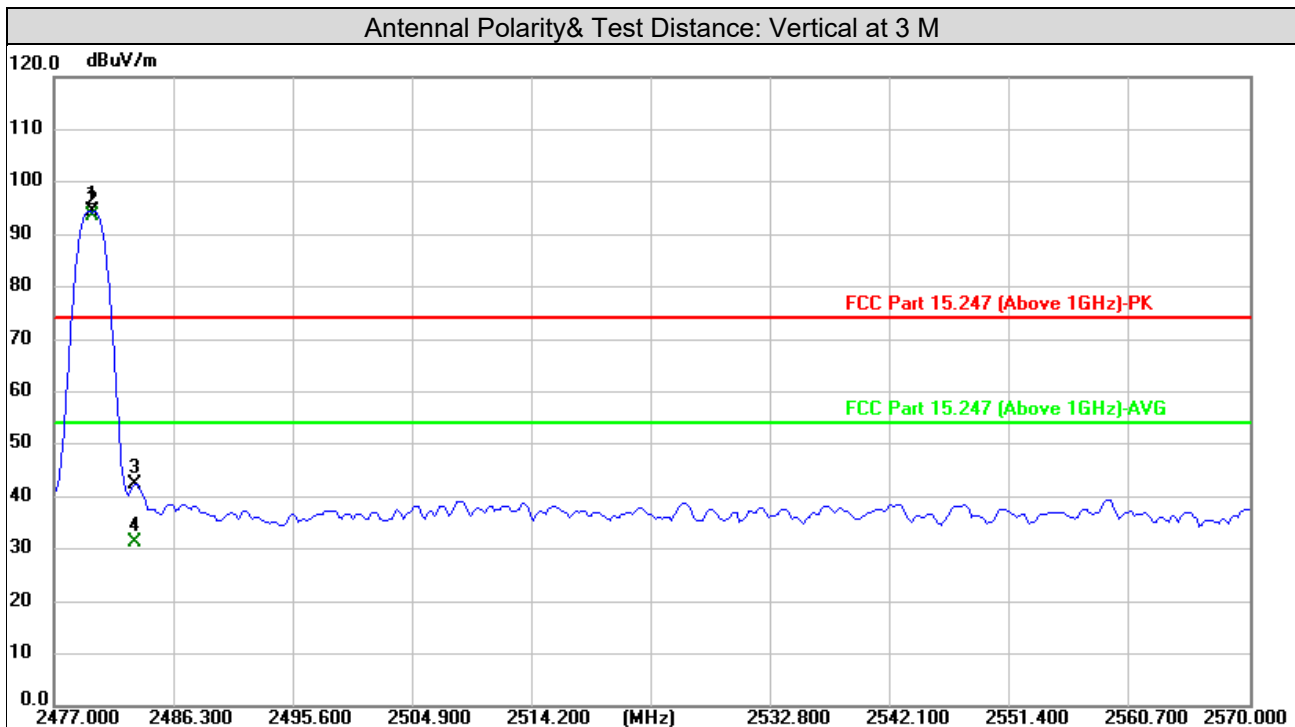

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1#  | 2480.168        | 95.11          | -0.72               | 94.39                   |                |             | peak     | 281                 | 233                  |
| 2#  | 2480.168        | 94.09          | -0.72               | 93.37                   |                |             | AVG      | 281                 | 233                  |
| 3   | 2483.500        | 42.97          | -0.69               | 42.28                   | 74.00          | -31.72      | peak     | 281                 | 233                  |
| 4   | 2483.500        | 31.99          | -0.69               | 31.30                   | 54.00          | -22.70      | AVG      | 281                 | 233                  |
| 5   | 4960.000        | 42.95          | 2.82                | 45.77                   | 74.00          | -28.23      | peak     | 100                 | 360                  |
| 6   | 4960.000        | 32.95          | 2.82                | 35.77                   | 54.00          | -18.23      | AVG      | 100                 | 360                  |
| 7   | 7440.000        | 39.11          | 10.51               | 49.62                   | 74.00          | -24.38      | peak     | 127                 | 155                  |
| 8   | 7440.000        | 28.75          | 10.51               | 39.26                   | 54.00          | -14.74      | AVG      | 127                 | 155                  |


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

## Above 1GHz Data:

### BLE-2Mbps

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 1                  | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

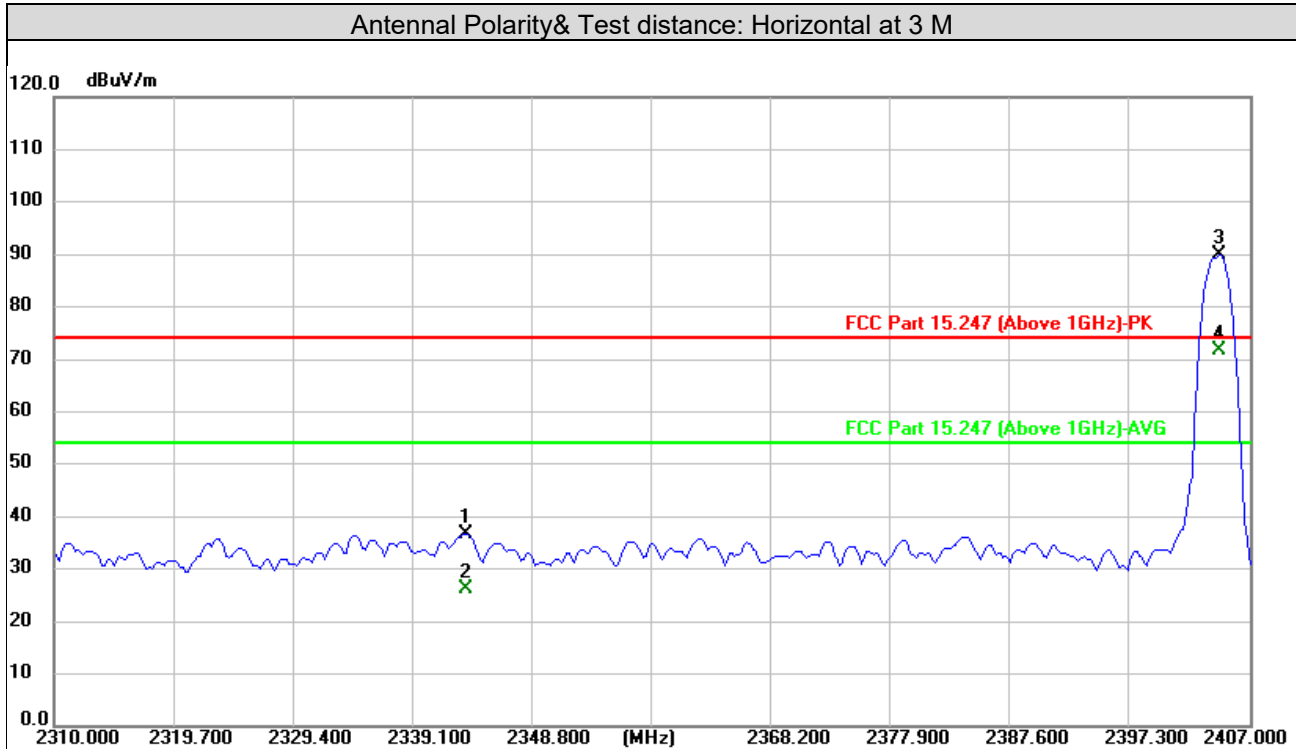


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2343.435        | 38.23          | -1.59               | 36.64                   | 74.00          | -37.36      | peak     | 226                 | 127                  |
| 2   | 2343.435        | 27.85          | -1.59               | 26.26                   | 54.00          | -27.74      | AVG      | 226                 | 127                  |
| 3 # | 2404.473        | 91.03          | -1.20               | 89.83                   |                |             | peak     | 226                 | 127                  |
| 4 # | 2404.473        | 72.81          | -1.20               | 71.61                   |                |             | AVG      | 226                 | 127                  |
| 5   | 4808.000        | 42.88          | 2.47                | 45.35                   | 74.00          | -28.65      | peak     | 100                 | 0                    |
| 6   | 4808.000        | 32.28          | 2.47                | 34.75                   | 54.00          | -19.25      | AVG      | 100                 | 0                    |
| 7   | 7212.000        | 40.36          | 9.92                | 50.28                   | 74.00          | -23.72      | peak     | 143                 | 353                  |
| 8   | 7212.000        | 29.00          | 9.92                | 38.92                   | 54.00          | -15.08      | AVG      | 143                 | 353                  |

#### Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 1                  | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

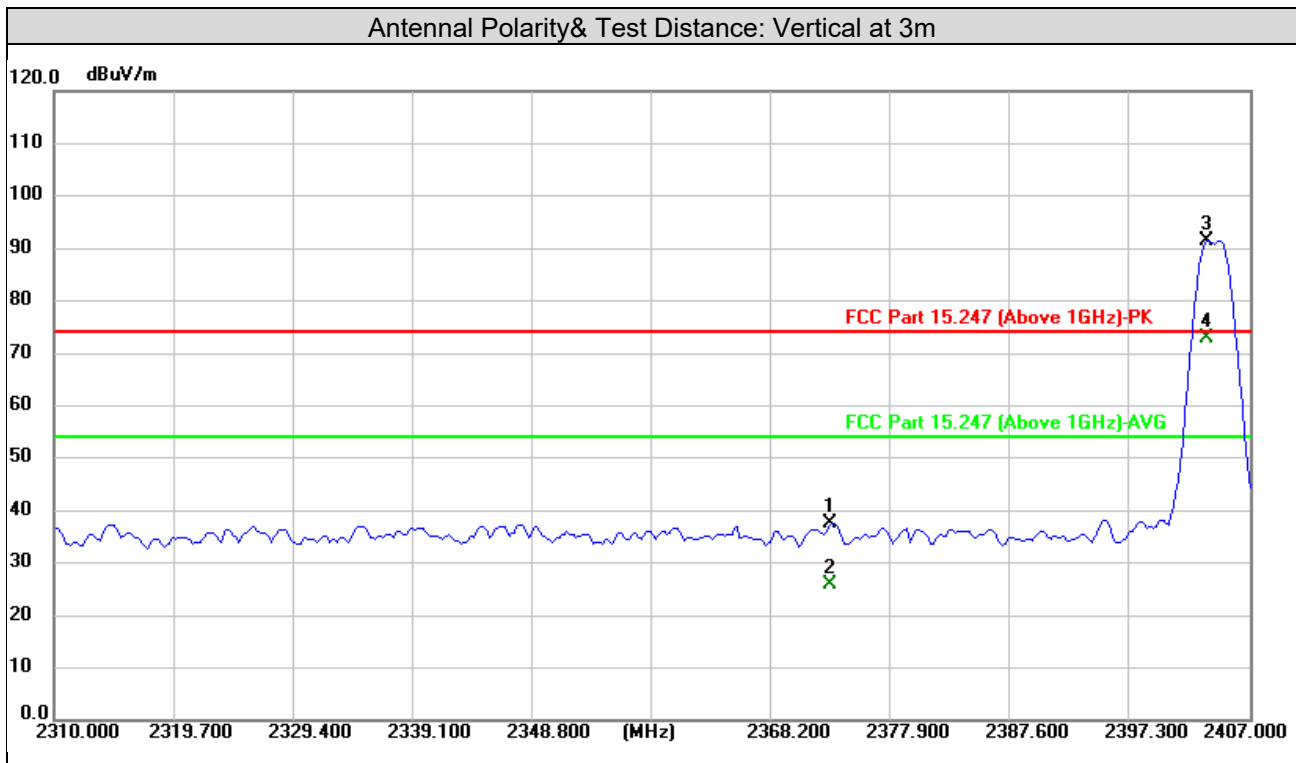

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2373.176        | 38.99          | -1.40               | 37.59                   | 74.00          | -36.41      | peak     | 234                 | 235                  |
| 2   | 2373.176        | 27.19          | -1.40               | 25.79                   | 54.00          | -28.21      | AVG      | 234                 | 235                  |
| 3 # | 2403.695        | 92.62          | -1.21               | 91.41                   |                |             | peak     | 234                 | 235                  |
| 4 # | 2403.695        | 74.04          | -1.21               | 72.83                   |                |             | AVG      | 234                 | 235                  |
| 5   | 4808.000        | 40.57          | 2.47                | 43.04                   | 74.00          | -30.96      | peak     | 100                 | 51                   |
| 6   | 4808.000        | 29.79          | 2.47                | 32.26                   | 54.00          | -21.74      | AVG      | 100                 | 51                   |
| 7   | 7212.000        | 39.31          | 9.92                | 49.23                   | 74.00          | -24.77      | peak     | 233                 | 96                   |
| 8   | 7212.000        | 29.14          | 9.92                | 39.06                   | 54.00          | -14.94      | AVG      | 233                 | 96                   |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 19                 | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

| Antennal Polarity& Test Distance: Horizontal at 3m |                 |                |                     |                         |                |             |          |                     |                      |
|----------------------------------------------------|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| No.                                                | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1#                                                 | 2440.000        | 94.60          | -0.98               | 93.62                   |                |             | peak     | 201                 | 134                  |
| 2#                                                 | 2440.000        | 76.09          | -0.98               | 75.11                   |                |             | AVG      | 201                 | 134                  |
| 3                                                  | 4880.000        | 44.12          | 2.63                | 46.75                   | 74.00          | -27.25      | peak     | 100                 | 44                   |
| 4                                                  | 4880.000        | 32.99          | 2.63                | 35.62                   | 54.00          | -18.38      | AVG      | 100                 | 44                   |
| 5                                                  | 7320.000        | 39.99          | 10.20               | 50.19                   | 74.00          | -23.81      | peak     | 321                 | 119                  |
| 6                                                  | 7320.000        | 28.61          | 10.20               | 38.81                   | 54.00          | -15.19      | AVG      | 321                 | 119                  |
| Antennal Polarity& Test Distance: Vertical at 3 M  |                 |                |                     |                         |                |             |          |                     |                      |
| No.                                                | Frequency (MHz) | Reading (dBuV) | Factor (dB)         | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1#                                                 | 2440.000        | 96.15          | -0.98               | 95.17                   |                |             | peak     | 100                 | 231                  |
| 2#                                                 | 2440.000        | 77.58          | -0.98               | 76.60                   |                |             | AVG      | 100                 | 231                  |
| 3                                                  | 4880.000        | 41.60          | 2.63                | 44.23                   | 74.00          | -29.77      | peak     | 100                 | 69                   |
| 4                                                  | 4880.000        | 30.38          | 2.63                | 33.01                   | 54.00          | -20.99      | AVG      | 100                 | 69                   |
| 5                                                  | 7320.000        | 40.62          | 10.20               | 50.82                   | 74.00          | -23.18      | peak     | 231                 | 173                  |
| 6                                                  | 7320.000        | 28.81          | 10.20               | 39.01                   | 54.00          | -14.99      | AVG      | 231                 | 173                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

|                   |                            |                 |            |
|-------------------|----------------------------|-----------------|------------|
| Test channel      | Channel 38                 | Frequency Range | Above 1GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron       |

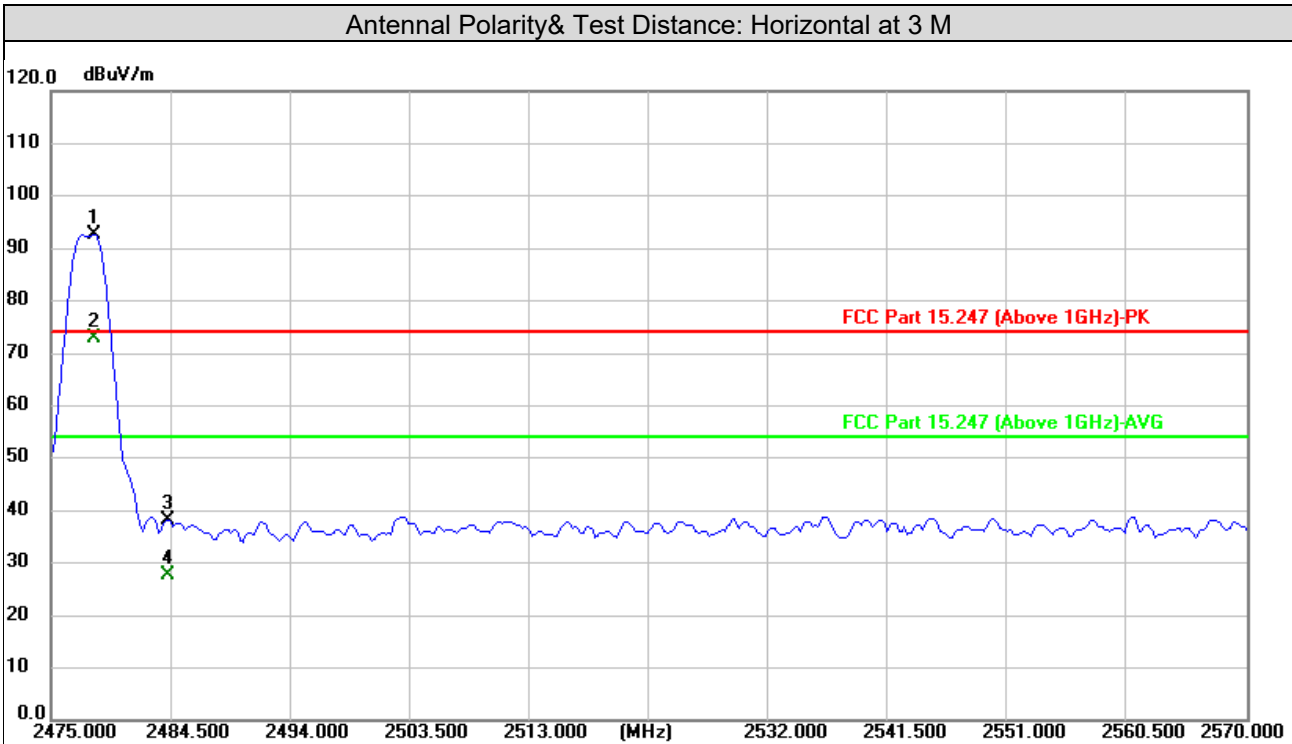


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1#  | 2478.427        | 93.30          | -0.72               | 92.58                   |                |             | peak     | 135                 | 95                   |
| 2#  | 2478.427        | 73.55          | -0.72               | 72.83                   |                |             | AVG      | 135                 | 95                   |
| 3   | 2484.329        | 38.86          | -0.69               | 38.17                   | 74.00          | -35.83      | peak     | 135                 | 95                   |
| 4   | 2484.329        | 28.43          | -0.69               | 27.74                   | 54.00          | -26.26      | AVG      | 135                 | 95                   |
| 5   | 4956.000        | 41.74          | 2.80                | 44.54                   | 74.00          | -29.46      | peak     | 100                 | 54                   |
| 6   | 4956.000        | 31.08          | 2.80                | 33.88                   | 54.00          | -20.12      | AVG      | 100                 | 54                   |
| 7   | 7434.000        | 38.68          | 10.50               | 49.18                   | 74.00          | -24.82      | peak     | 240                 | 59                   |
| 8   | 7434.000        | 28.59          | 10.50               | 39.09                   | 54.00          | -14.91      | AVG      | 240                 | 59                   |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test channel      | Channel 38                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Aron         |

Antennal Polarity& Test Distance: Vertical at 3 M

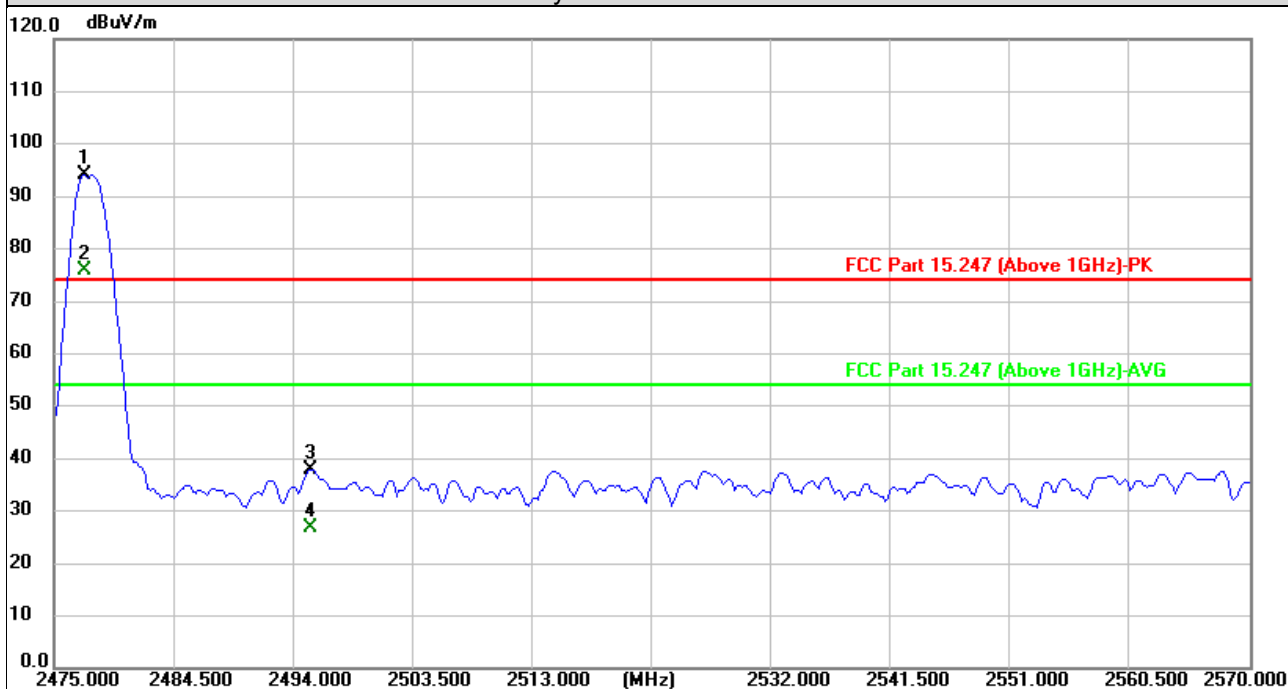

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1#  | 2477.475        | 94.78          | -0.73               | 94.05                   |                |             | peak     | 284                 | 235                  |
| 2#  | 2477.475        | 76.64          | -0.73               | 75.91                   |                |             | AVG      | 284                 | 235                  |
| 3   | 2495.561        | 38.59          | -0.62               | 37.97                   | 74.00          | -36.03      | peak     | 284                 | 235                  |
| 4   | 2495.561        | 27.42          | -0.62               | 26.80                   | 54.00          | -27.20      | AVG      | 284                 | 235                  |
| 5   | 4956.000        | 40.42          | 2.80                | 43.22                   | 74.00          | -30.78      | peak     | 100                 | 67                   |
| 6   | 4956.000        | 30.45          | 2.80                | 33.25                   | 54.00          | -20.75      | AVG      | 100                 | 67                   |
| 7   | 7434.000        | 38.92          | 10.50               | 49.42                   | 74.00          | -24.58      | peak     | 209                 | 108                  |
| 8   | 7434.000        | 28.33          | 10.50               | 38.83                   | 54.00          | -15.17      | AVG      | 209                 | 108                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. #: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**3.2 Conducted Emission Measurement****3.2.1 Limits of Conducted Emission Measurement**

| Frequency (MHz) | Conducted Limit (dBuV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-Peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

**3.2.2 Test Instruments**

| Equipment                         | Manufacturer  | Model No.       | Serial No.   | Next Cal. Date |
|-----------------------------------|---------------|-----------------|--------------|----------------|
| EMI Test Receiver<br>(10kHz~7GHz) | Rohde&Schwarz | ESR7            | 101961       | 2026-07-23     |
| 2 Line V-Network LISN             | Rohde&Schwarz | ENV216          | 3560.6550.15 | 2026-07-23     |
| Test software                     | FARAD         | EZ_EMV V1.1.4.2 | N/A          | N/A            |
| Broadcast test system             | R&S           | SFU             | 100410       | 2026-07-23     |

**Note:**


1. The calibration interval of the above test instruments is 12 months and calibrated by LISAI/CHINA.
2. The test was performed in Shielded Room 743.

### 3.2.3 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

**Note:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4 Test Setup

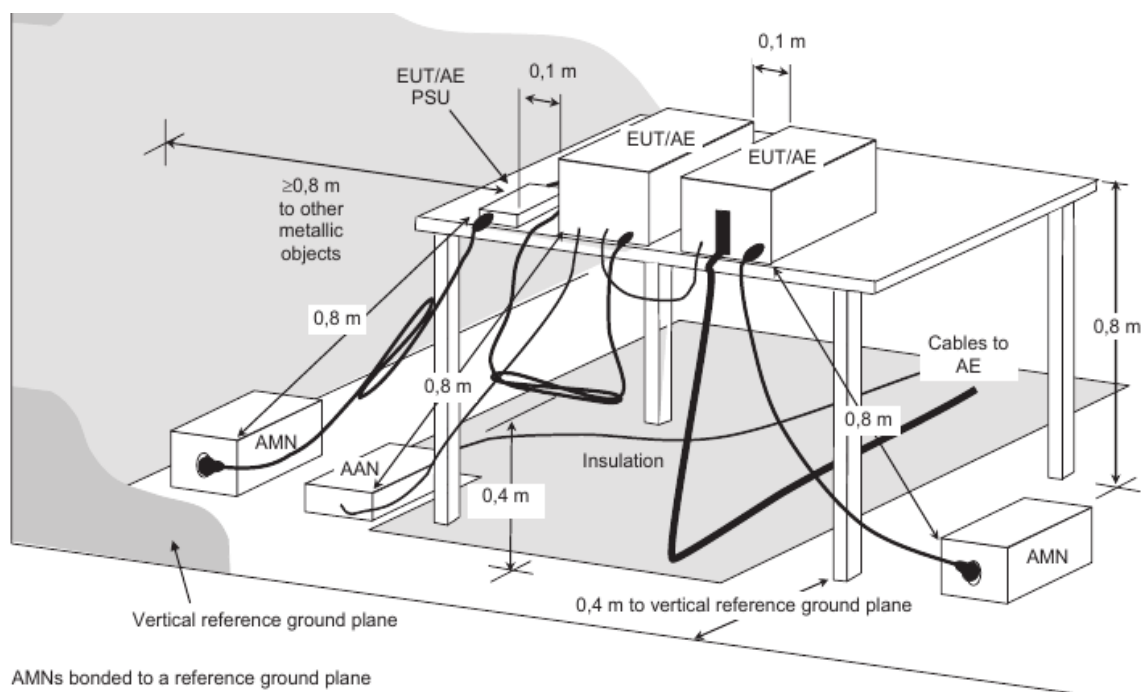

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.5 EUT Operating Condition


Set the EUT under transmission condition continuously at specific channel frequency.

### 3.2.6 Deviation from Test Standard

No deviation.

## 3.2.7 Test Results

|                 |                |                                          |                                      |
|-----------------|----------------|------------------------------------------|--------------------------------------|
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
|-----------------|----------------|------------------------------------------|--------------------------------------|

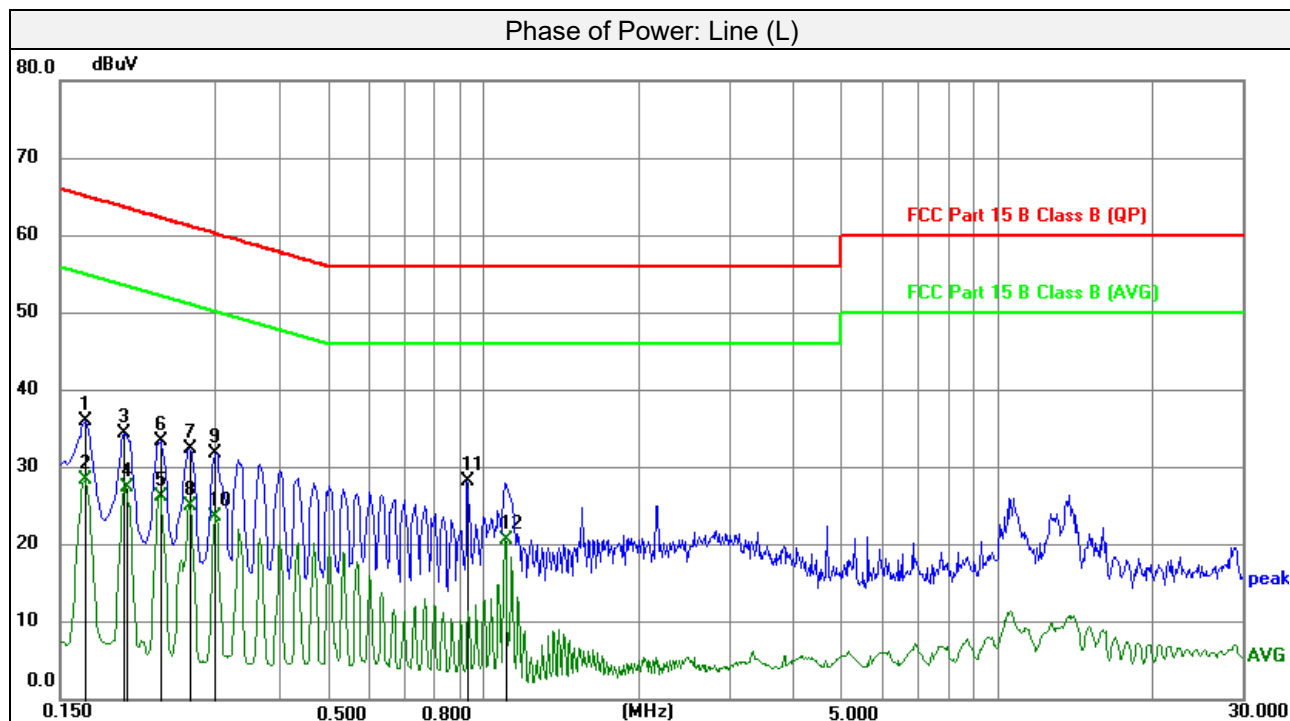


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor<br>dB | Emission Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark<br>Det. |
|-----|--------------------|-------------------|-------------------------|--------------------------|-----------------|----------------|----------------|
| 1   | 0.1680             | 26.01             | 10.07                   | 36.08                    | 65.06           | -28.98         | peak           |
| 2   | 0.1680             | 18.42             | 10.07                   | 28.49                    | 55.06           | -26.57         | AVG            |
| 3   | 0.1995             | 24.35             | 10.02                   | 34.37                    | 63.63           | -29.26         | peak           |
| 4   | 0.2017             | 17.48             | 10.02                   | 27.50                    | 53.54           | -26.04         | AVG            |
| 5   | 0.2333             | 16.25             | 10.02                   | 26.27                    | 52.33           | -26.06         | AVG            |
| 6   | 0.2355             | 23.34             | 10.02                   | 33.36                    | 62.25           | -28.89         | peak           |
| 7   | 0.2670             | 22.33             | 10.03                   | 32.36                    | 61.21           | -28.85         | peak           |
| 8   | 0.2670             | 15.03             | 10.03                   | 25.06                    | 51.21           | -26.15         | AVG            |
| 9   | 0.3007             | 21.87             | 10.03                   | 31.90                    | 60.22           | -28.32         | peak           |
| 10  | 0.3007             | 13.58             | 10.03                   | 23.61                    | 50.22           | -26.61         | AVG            |
| 11  | 0.9330             | 18.31             | 9.93                    | 28.24                    | 56.00           | -27.76         | peak           |
| 12  | 1.1040             | 11.69             | 8.87                    | 20.56                    | 46.00           | -25.44         | AVG            |

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

|                 |                |                                          |                                      |
|-----------------|----------------|------------------------------------------|--------------------------------------|
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
|-----------------|----------------|------------------------------------------|--------------------------------------|

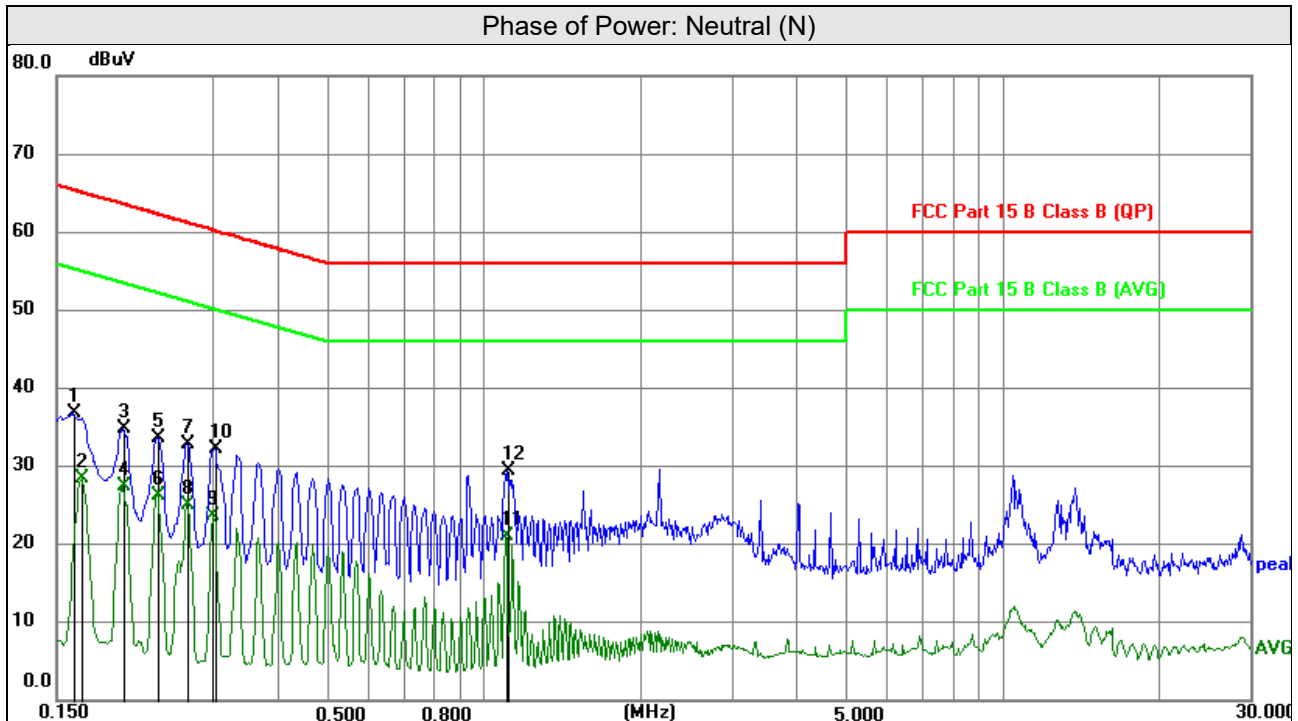

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>dB | Emission Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark<br>Det. |
|-----|--------------------|-------------------|----------------------|--------------------------|-----------------|----------------|----------------|
| 1   | 0.1613             | 26.80             | 10.08                | 36.88                    | 65.40           | -28.52         | peak           |
| 2   | 0.1680             | 18.45             | 10.07                | 28.52                    | 55.06           | -26.54         | AVG            |
| 3   | 0.2017             | 24.81             | 10.03                | 34.84                    | 63.54           | -28.70         | peak           |
| 4   | 0.2017             | 17.50             | 10.03                | 27.53                    | 53.54           | -26.01         | AVG            |
| 5   | 0.2333             | 23.57             | 10.03                | 33.60                    | 62.33           | -28.73         | peak           |
| 6   | 0.2333             | 16.27             | 10.03                | 26.30                    | 52.33           | -26.03         | AVG            |
| 7   | 0.2670             | 22.81             | 10.03                | 32.84                    | 61.21           | -28.37         | peak           |
| 8   | 0.2670             | 15.01             | 10.03                | 25.04                    | 51.21           | -26.17         | AVG            |
| 9   | 0.3007             | 13.57             | 10.03                | 23.60                    | 50.22           | -26.62         | AVG            |
| 10  | 0.3030             | 22.11             | 10.03                | 32.14                    | 60.16           | -28.02         | peak           |
| 11  | 1.1040             | 11.04             | 9.93                 | 20.97                    | 46.00           | -25.03         | AVG            |
| 12  | 1.1130             | 19.50             | 9.93                 | 29.43                    | 56.00           | -26.57         | peak           |

## Remarks:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

### 3.3 6dB Bandwidth Measurement

#### 3.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 500 kHz(0.5 MHz).

#### 3.3.2 Test Setup

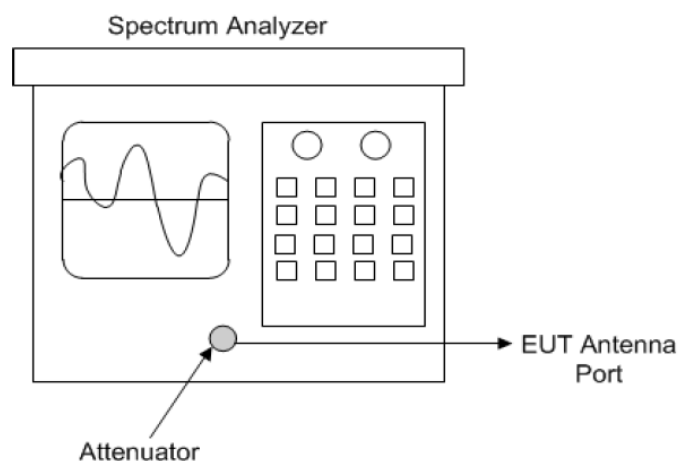

Spectrum analyzer test configuration

#### 3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

### 3.3.4 Test Procedure

#### Option 1:

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with  $X$  set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW  $\geq 3 \times$  RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB

### 3.3.5 Deviation from Test Standard

No deviation.

### 3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.3.7 Test Result

| Test Mode | Antenna | Channel | DTS BW [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|-----------|---------|---------|--------------|----------|----------|------------|---------|
| BLE_1M    | Ant1    | 2402    | 0.668        | 2401.660 | 2402.328 | 0.5        | PASS    |
|           |         | 2440    | 0.684        | 2439.656 | 2440.340 | 0.5        | PASS    |
|           |         | 2480    | 0.668        | 2479.656 | 2480.324 | 0.5        | PASS    |
| BLE_2M    | Ant1    | 2404    | 1.128        | 2403.440 | 2404.568 | 0.5        | PASS    |
|           |         | 2440    | 1.096        | 2439.464 | 2440.560 | 0.5        | PASS    |
|           |         | 2478    | 1.116        | 2477.452 | 2478.568 | 0.5        | PASS    |



BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)


Tel: [0769-85598986](#)

Web.: [www.lyns-tci.com](#)


E-Mail: [service-hs@lyns-tci.com](#)

Release

Ver. 1.5

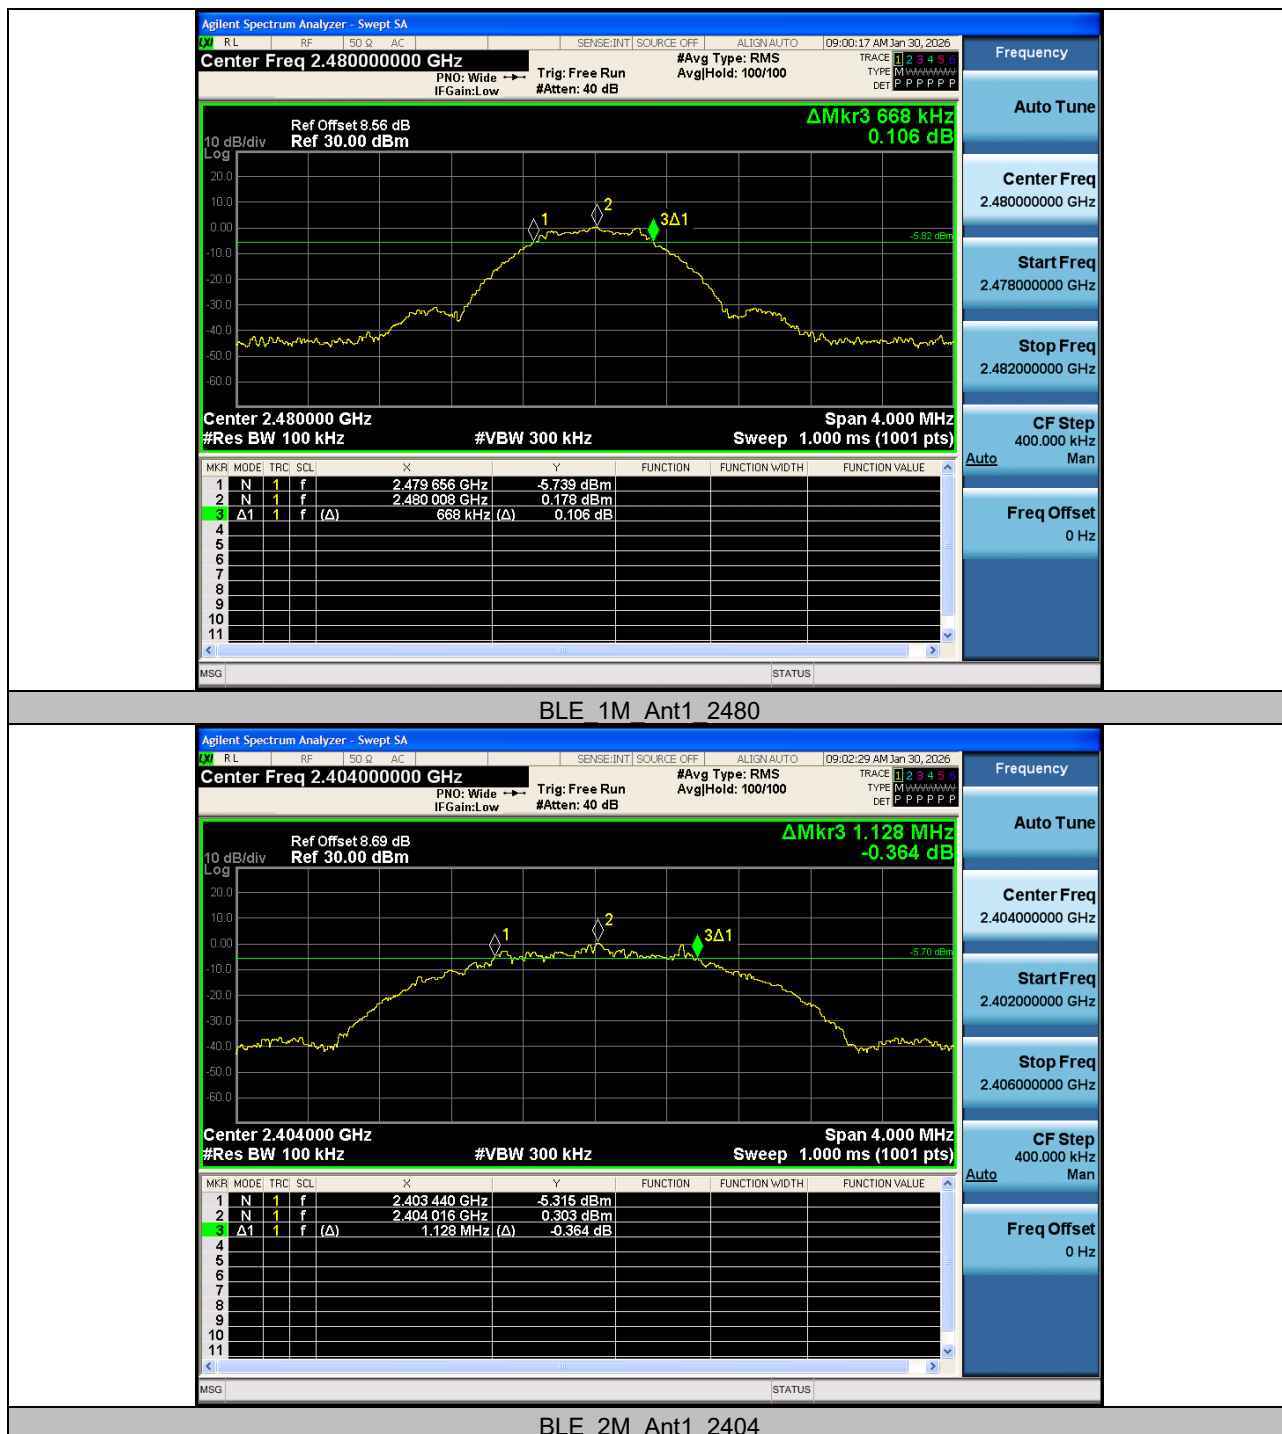

Test Report No.: 25112701-RF-US-02

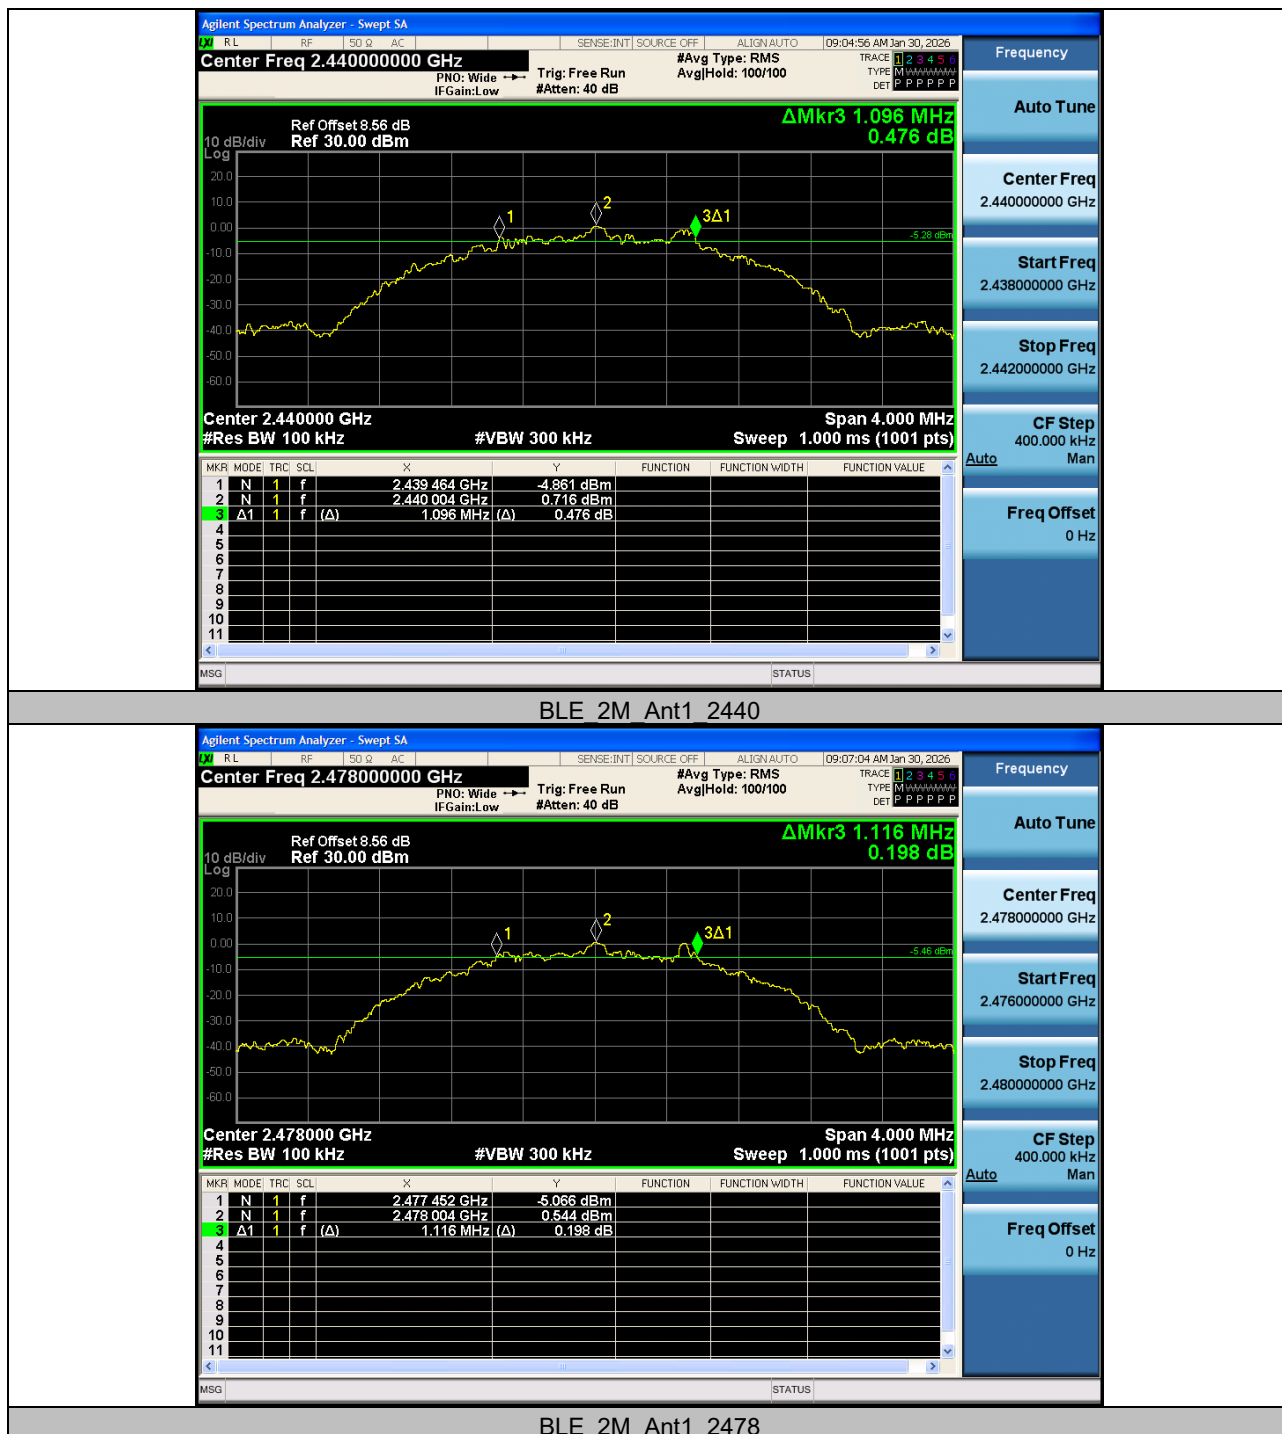


Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](tel:0769-85598986)  
Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release  
Ver. 1.5

### 3.4 Occupied Bandwidth Measurement

#### 3.4.1 Test Setup

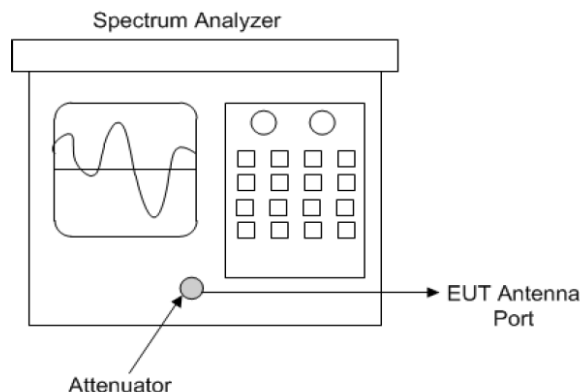

#### 3.4.2 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 3.4.4 Deviation from Test Standard


No deviation.

#### 3.4.5 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.4.6 Test Results


| Test Mode | Antenna | Channel | OCB [MHz] | FL[MHz]  | FH[MHz]  |
|-----------|---------|---------|-----------|----------|----------|
| BLE_1M    | Ant1    | 2402    | 1.0222    | 2401.492 | 2402.514 |
|           |         | 2440    | 1.0120    | 2439.494 | 2440.506 |
|           |         | 2480    | 1.0229    | 2479.489 | 2480.512 |
| BLE_2M    | Ant1    | 2404    | 2.0016    | 2403.014 | 2405.016 |
|           |         | 2440    | 2.0063    | 2439.013 | 2441.019 |
|           |         | 2478    | 2.0088    | 2477.012 | 2479.021 |

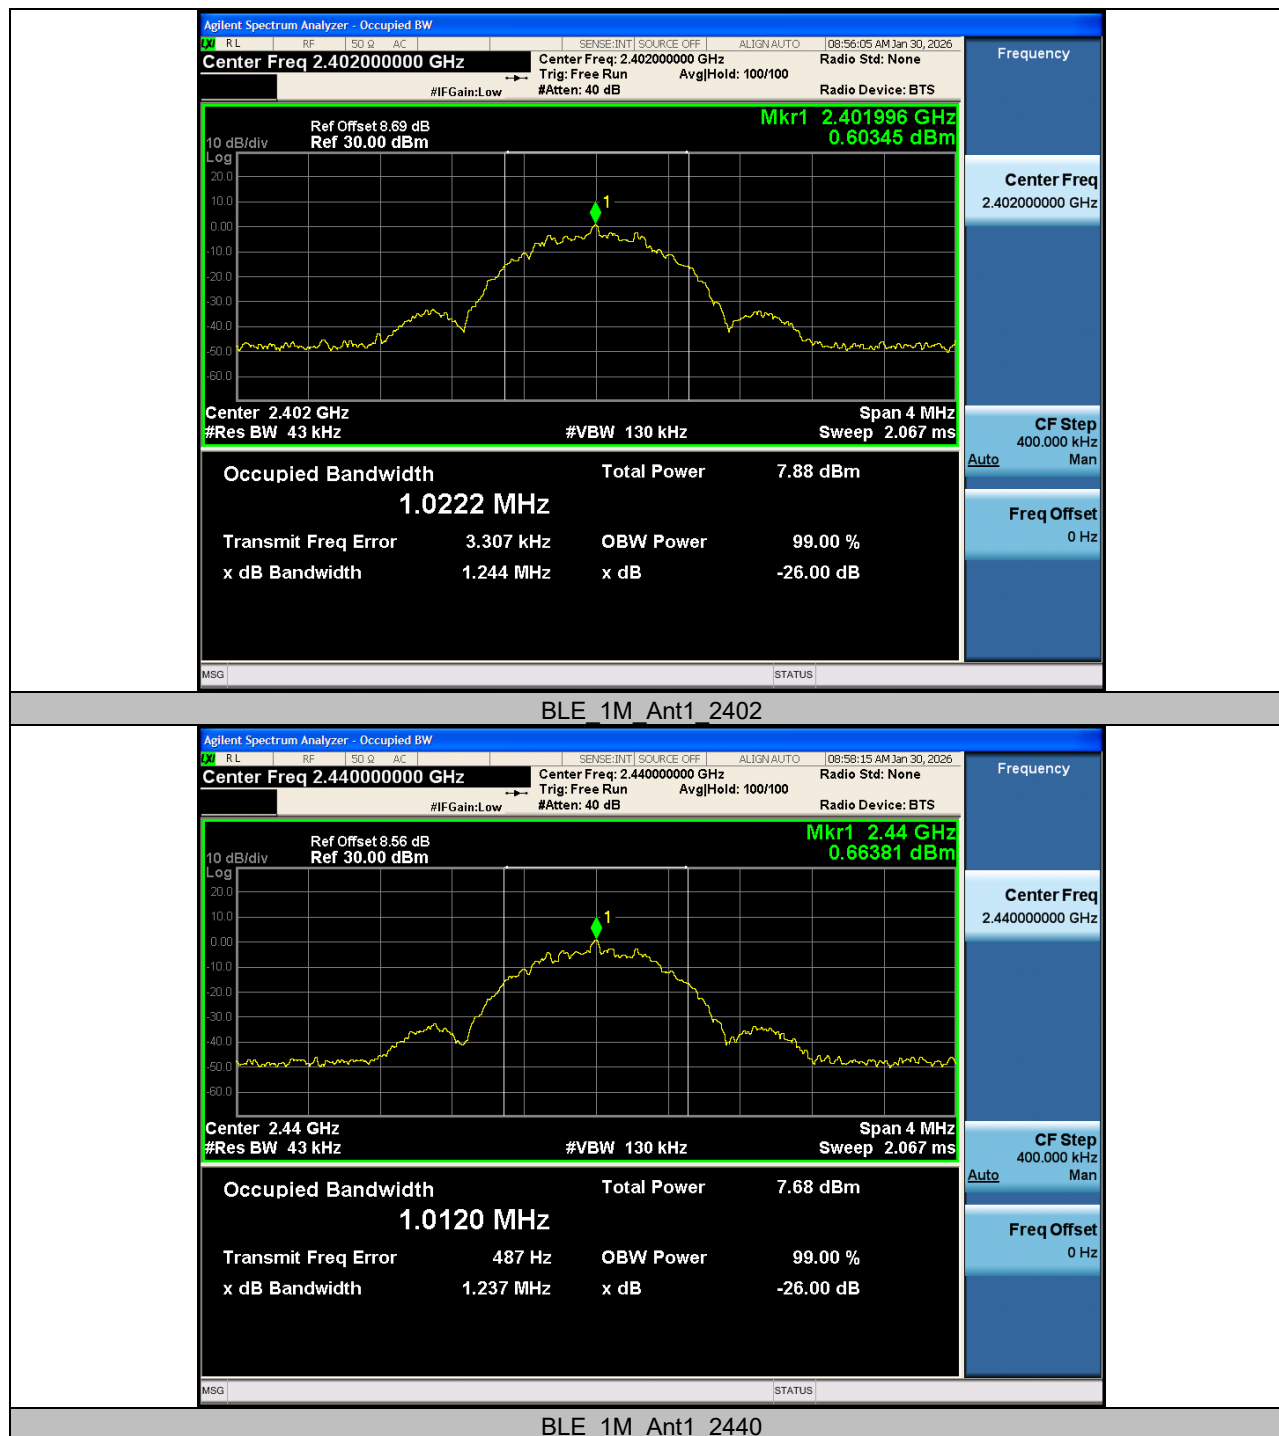

Test Report No.: 25112701-RF-US-02

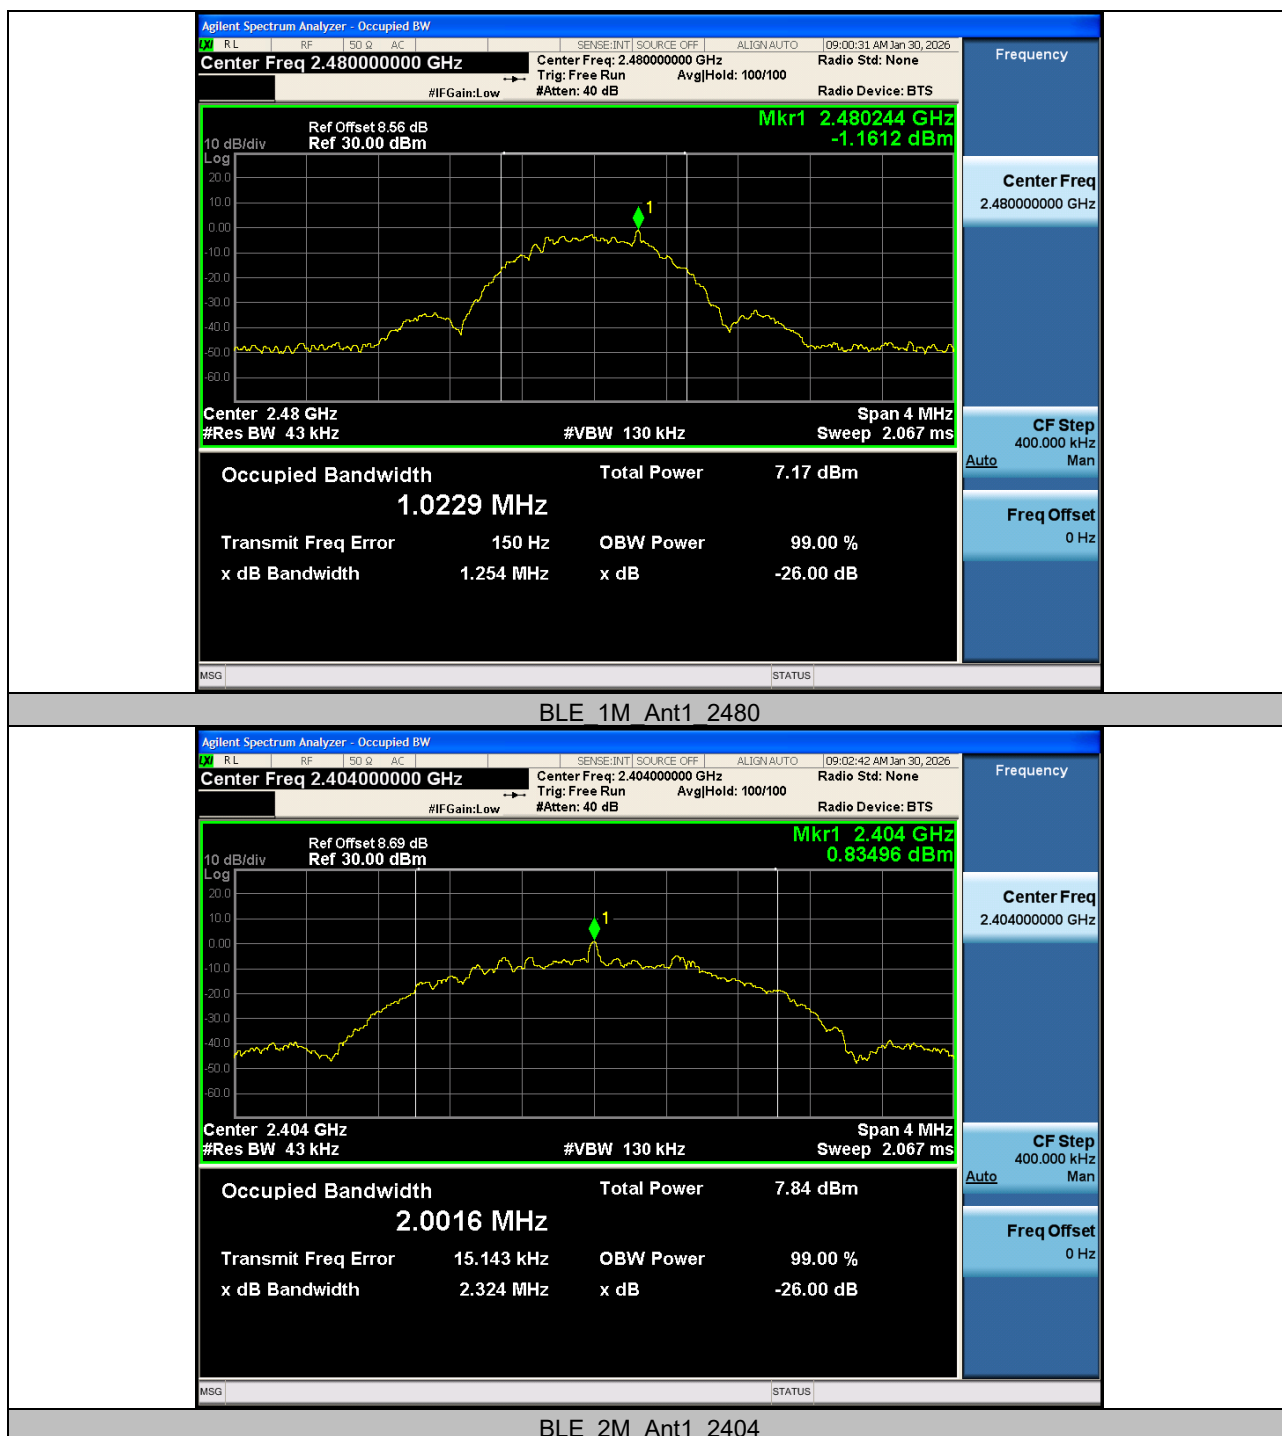

Test Report No.: 25112701-RF-US-02

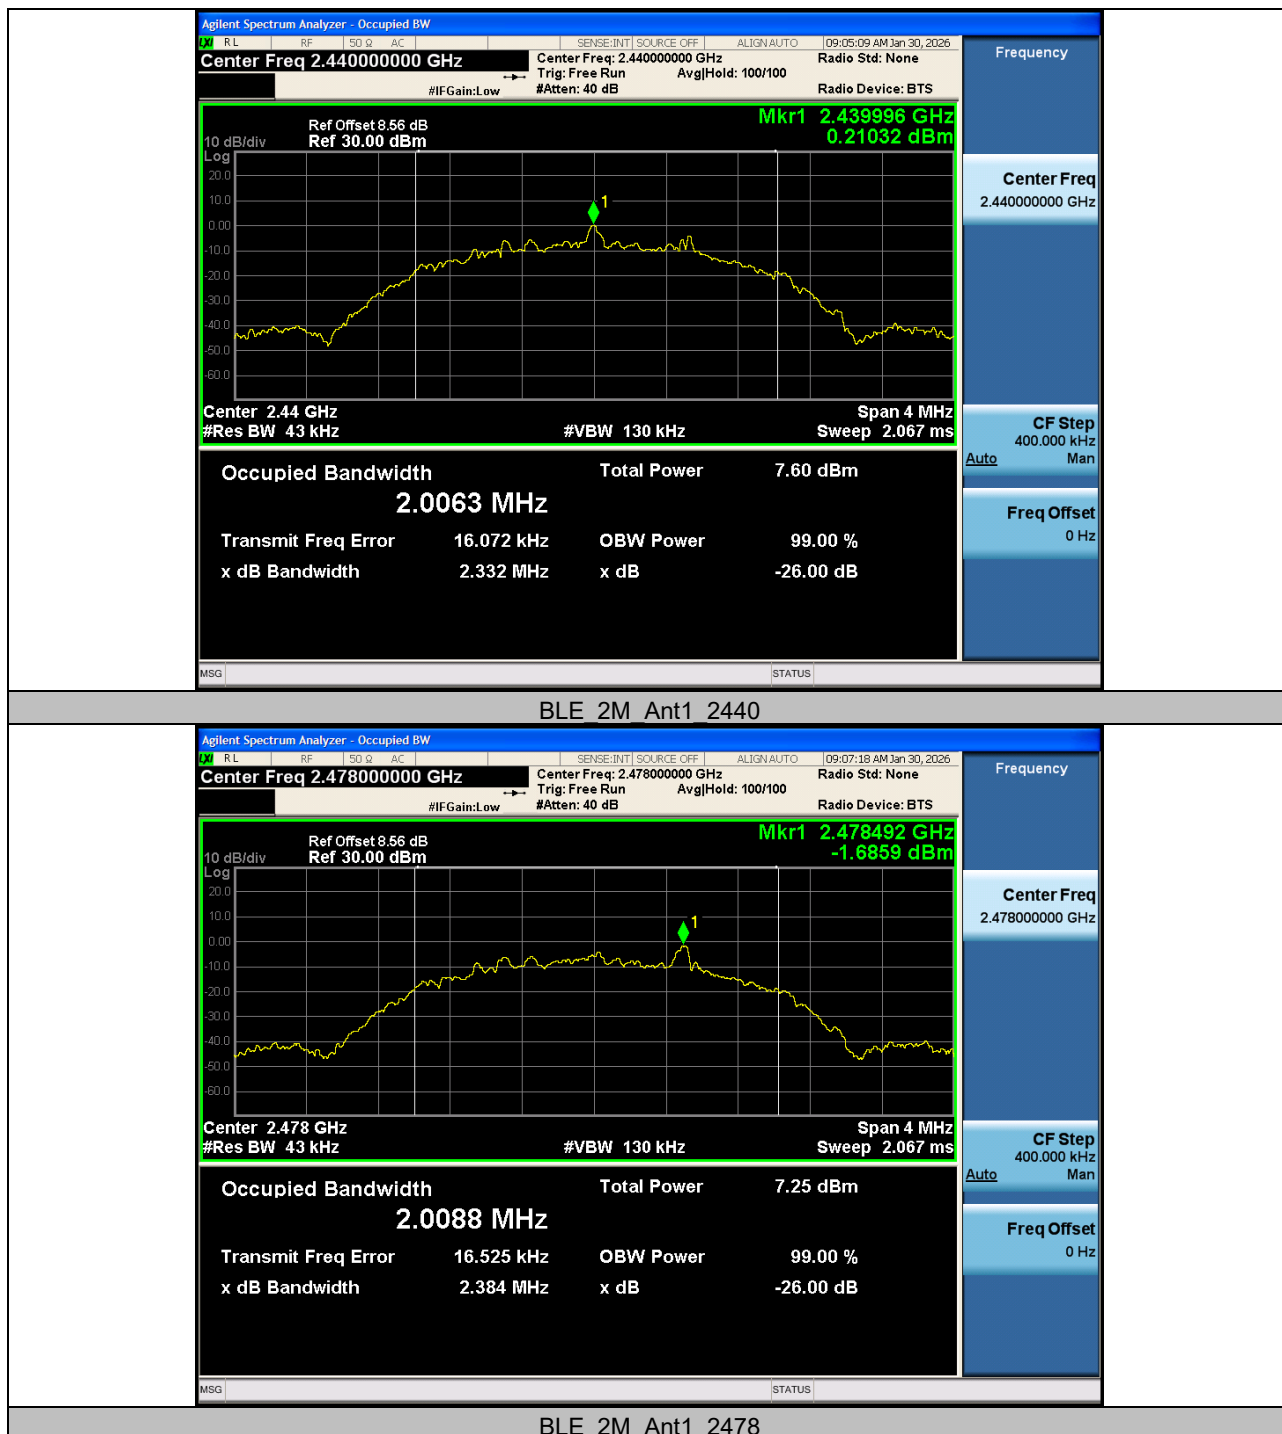


### 3.5 Conducted Output Power Measurement

#### 3.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30dBm).

#### 3.5.2 Test Setup

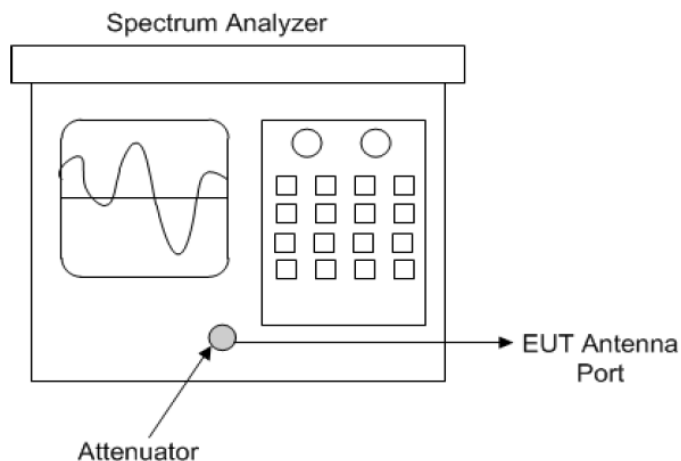

Spectrum analyzer output power test configuration

#### 3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.5.4 Test Procedures

Measurement using a spectrum analyzer (SA), Selection of test method:

The proper test method is selected based on the following criteria:

- a) **Method AVGSA-1 or method AVGSA-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
  - 1) The EUT transmits continuously (or with a D> 98%).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the instrument configured as in method AVGSA-1) is equal to or shorter than the duration T of each transmission from the EUT, and if those transmissions exhibit full power throughout their durations.
- b) **Method AVGSA-2 or method AVGSA-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than +2%.
- c) **Method AVGSA-3 or method AVGSA-3A (alternative)** shall be applied if the conditions of the preceding item a) and item b) cannot be achieved.

Test Report No.: 25112701-RF-US-02

☒ Measurement using a spectrum analyzer (SA), Selection of test method:☒ Maximum peak conducted output power

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW > DTS bandwidth.
- b) Set VBW > [3 x RBW]
- c) Set span > [3 x RBW]
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Test Report No.: 25112701-RF-US-02

☒ Maximum conducted (average) output power (Method AVGSA-2):

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c) SA Setting:
  - 1\* Set span to at least 1.5 times the OBW
  - 2\* Set sweep trigger to "free run."
  - 3\* Set RBW= 1% to 5% of the OBW. not to exceed 1MHz.
  - 4\* Set VBW  $\geq 3 \times$  RBW
  - 5\* Number of points in sweep  $\geq 2 \times$  span /RBW. (This gives bin-to-bin spacing  $\leq$  RBW / 2. so that narrowband signals are not lost between frequency bins).
  - 6\* Sweep time  $\leq$  (number of points in sweep)  $\times$  T. where T is defined in 11.6. If this gives a sweep time less than the auto sweep time of the instrument. then method AVGSA-3 shall not be used (use AVGSA-3A). The purpose of this step is so that the averaging time in each bin is less than or equal to the minimum time of a transmission.
  - 7\* Detector =RMS (power averaging).
  - 8\* Trace mode =max hold.
  - 9\* Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - 10\* Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function. then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 3.5.5 Deviation from Test Standard

No deviation.

### 3.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.5.7 Test Results


**Right headphone:**

| Test Mode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| BLE_1M    | Ant1    | 2402    | 1.57        | ≤30        | PASS    |
|           |         | 2440    | 1.27        | ≤30        | PASS    |
|           |         | 2480    | 1.14        | ≤30        | PASS    |
| BLE_2M    | Ant1    | 2404    | 1.67        | ≤30        | PASS    |
|           |         | 2440    | 1.38        | ≤30        | PASS    |
|           |         | 2478    | 1.22        | ≤30        | PASS    |


**Left headphone:**

| Test Mode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| BLE_1M    | Ant1    | 2402    | 0.43        | ≤30        | PASS    |
|           |         | 2440    | -0.02       | ≤30        | PASS    |
|           |         | 2480    | -0.31       | ≤30        | PASS    |
| BLE_2M    | Ant1    | 2404    | 0.41        | ≤30        | PASS    |
|           |         | 2440    | -0.03       | ≤30        | PASS    |
|           |         | 2478    | -0.27       | ≤30        | PASS    |

## Right headphone:

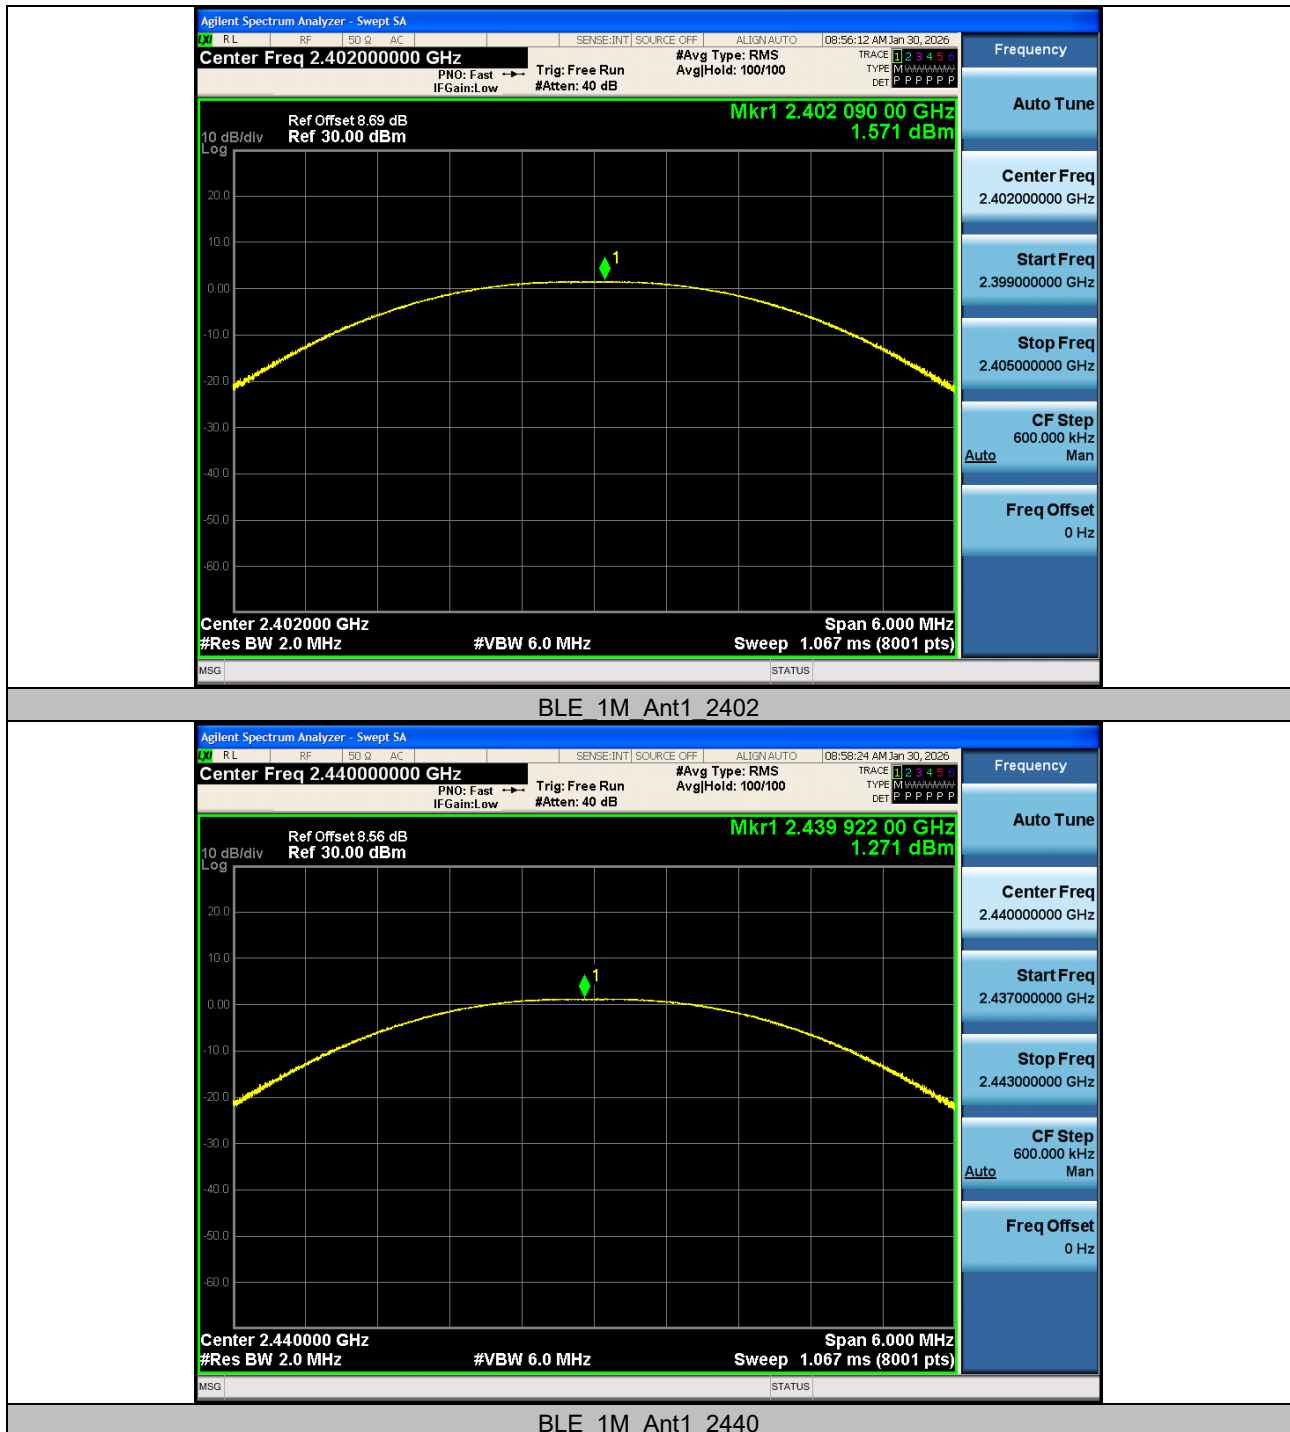

Test Report No.: 25112701-RF-US-02

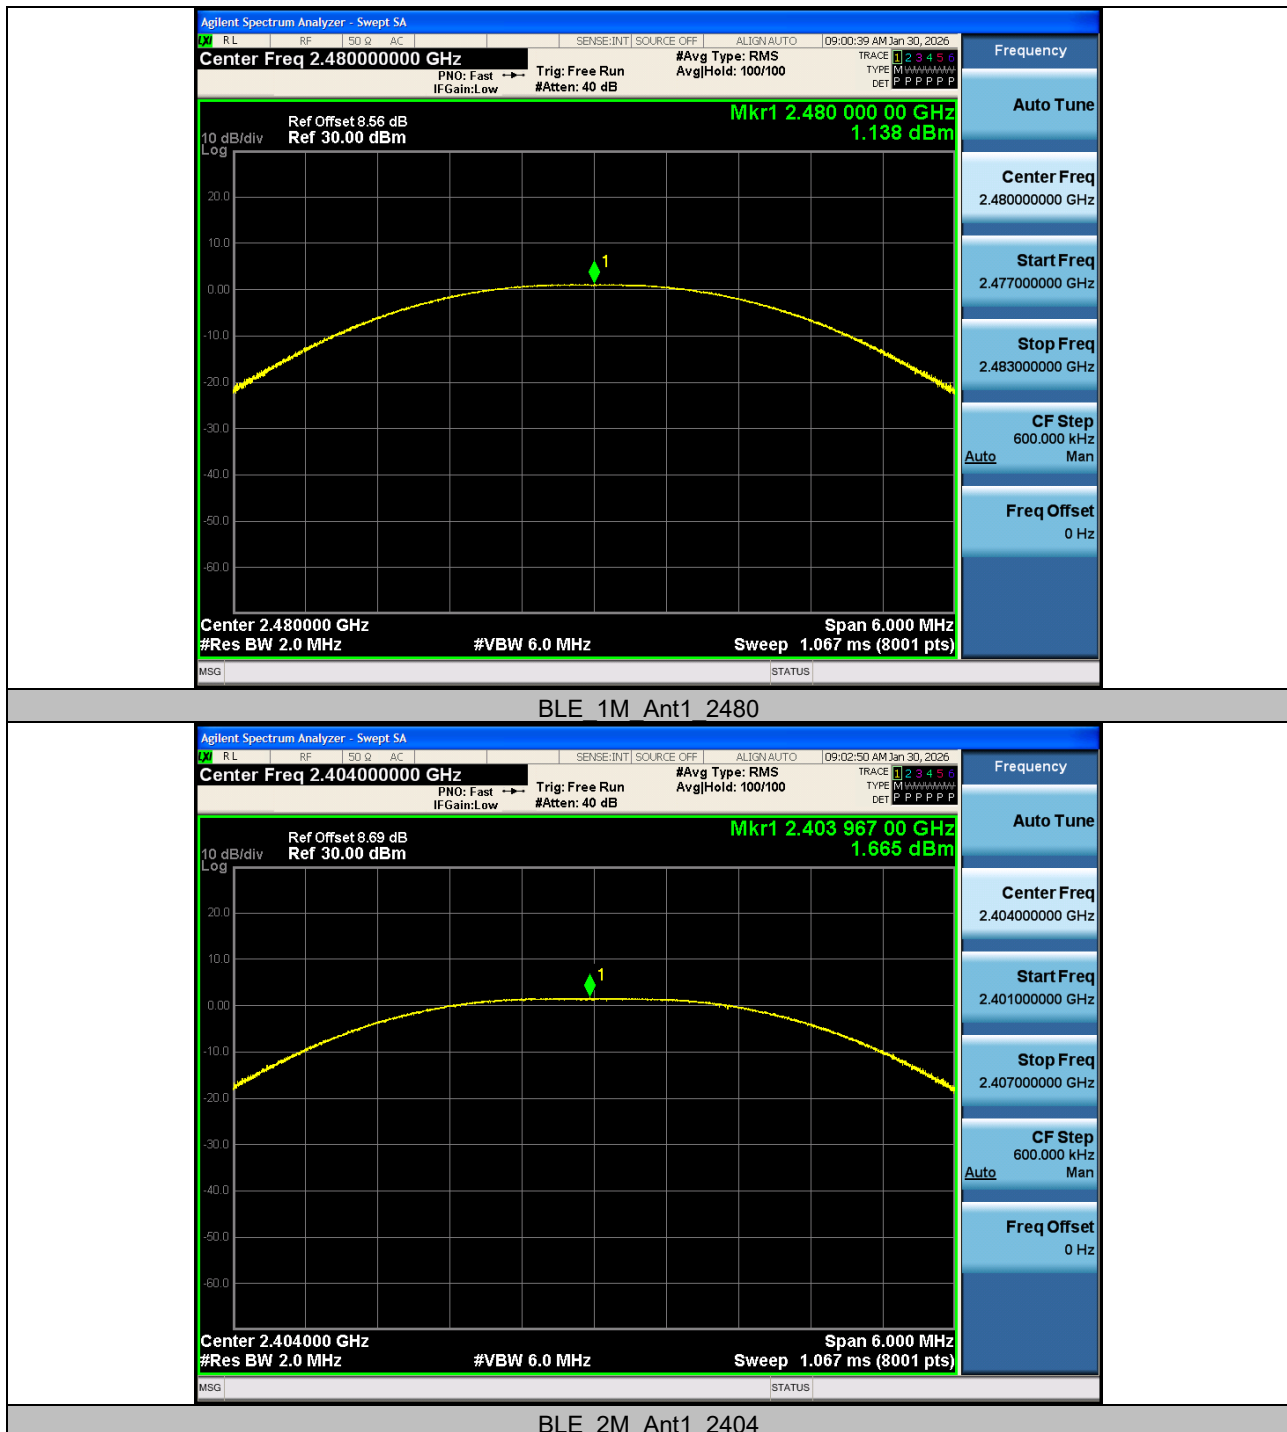


Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](tel:0769-85598986)  
 Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
 E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release  
 Ver. 1.5

Test Report No.: 25112701-RF-US-02

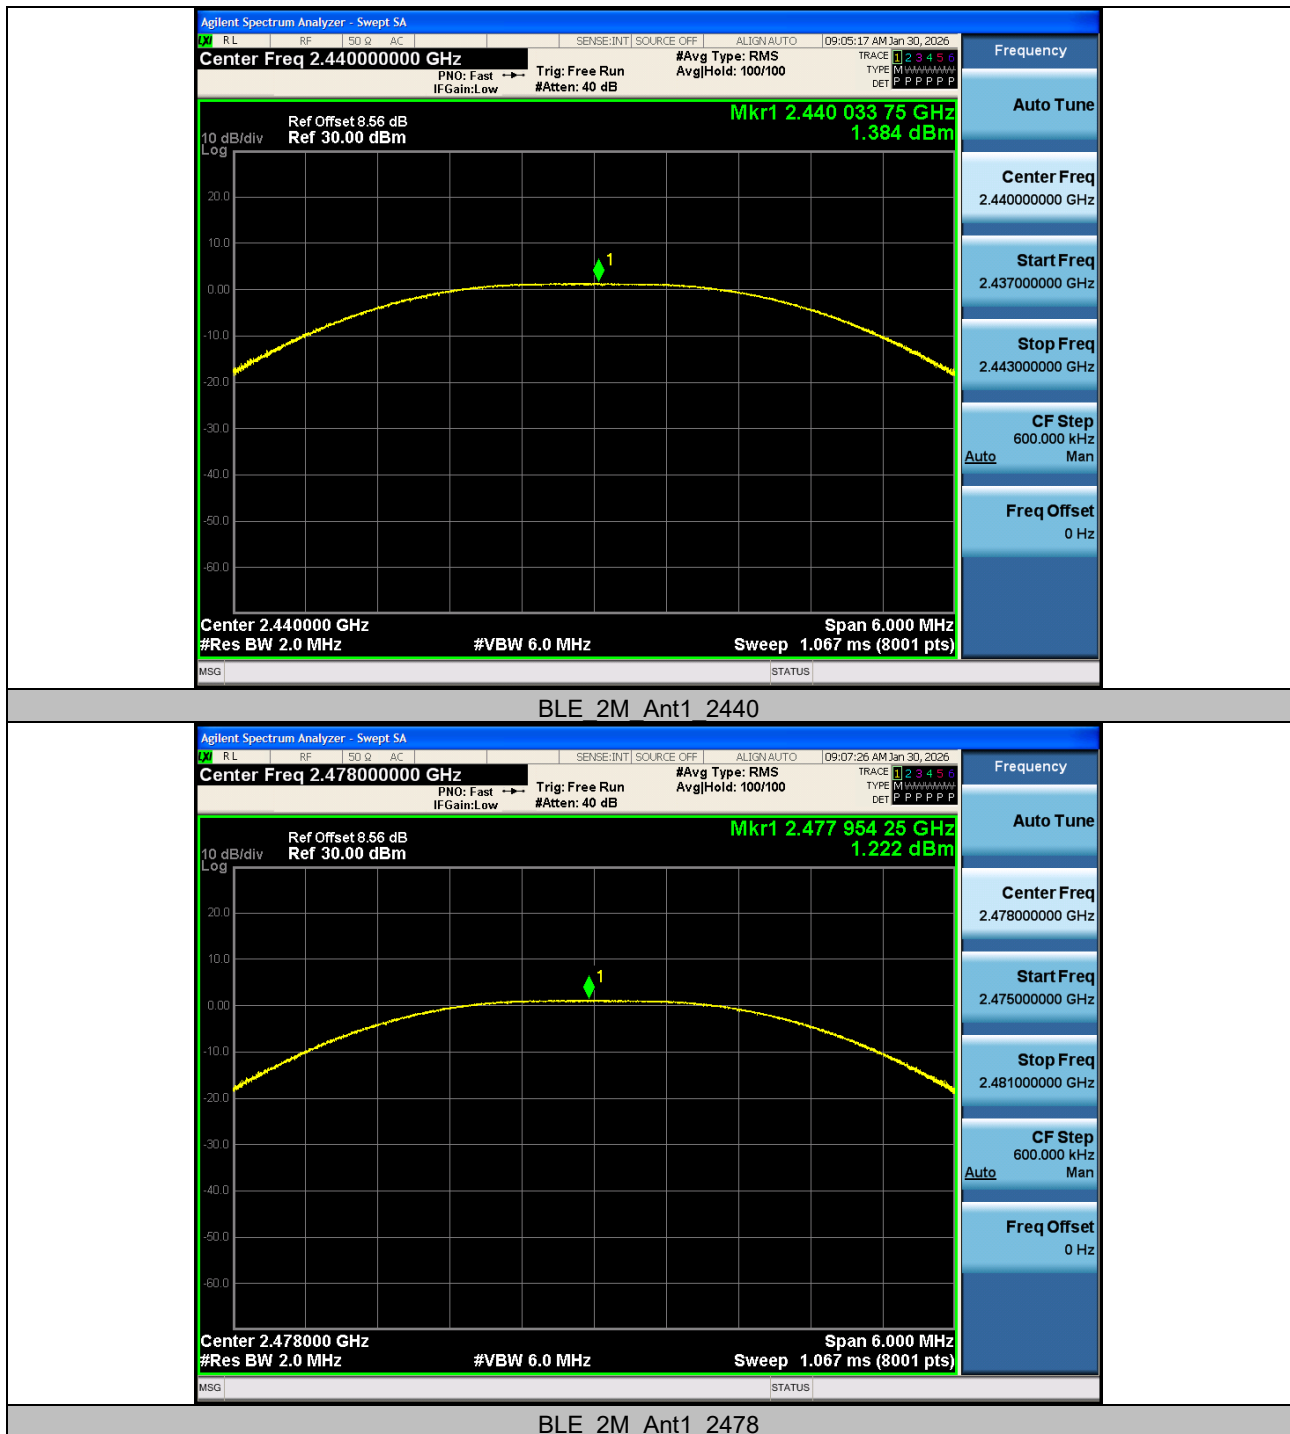


Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)


Tel: [0769-85598986](tel:0769-85598986)  
 Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
 E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release  
 Ver. 1.5

## Left headphone:

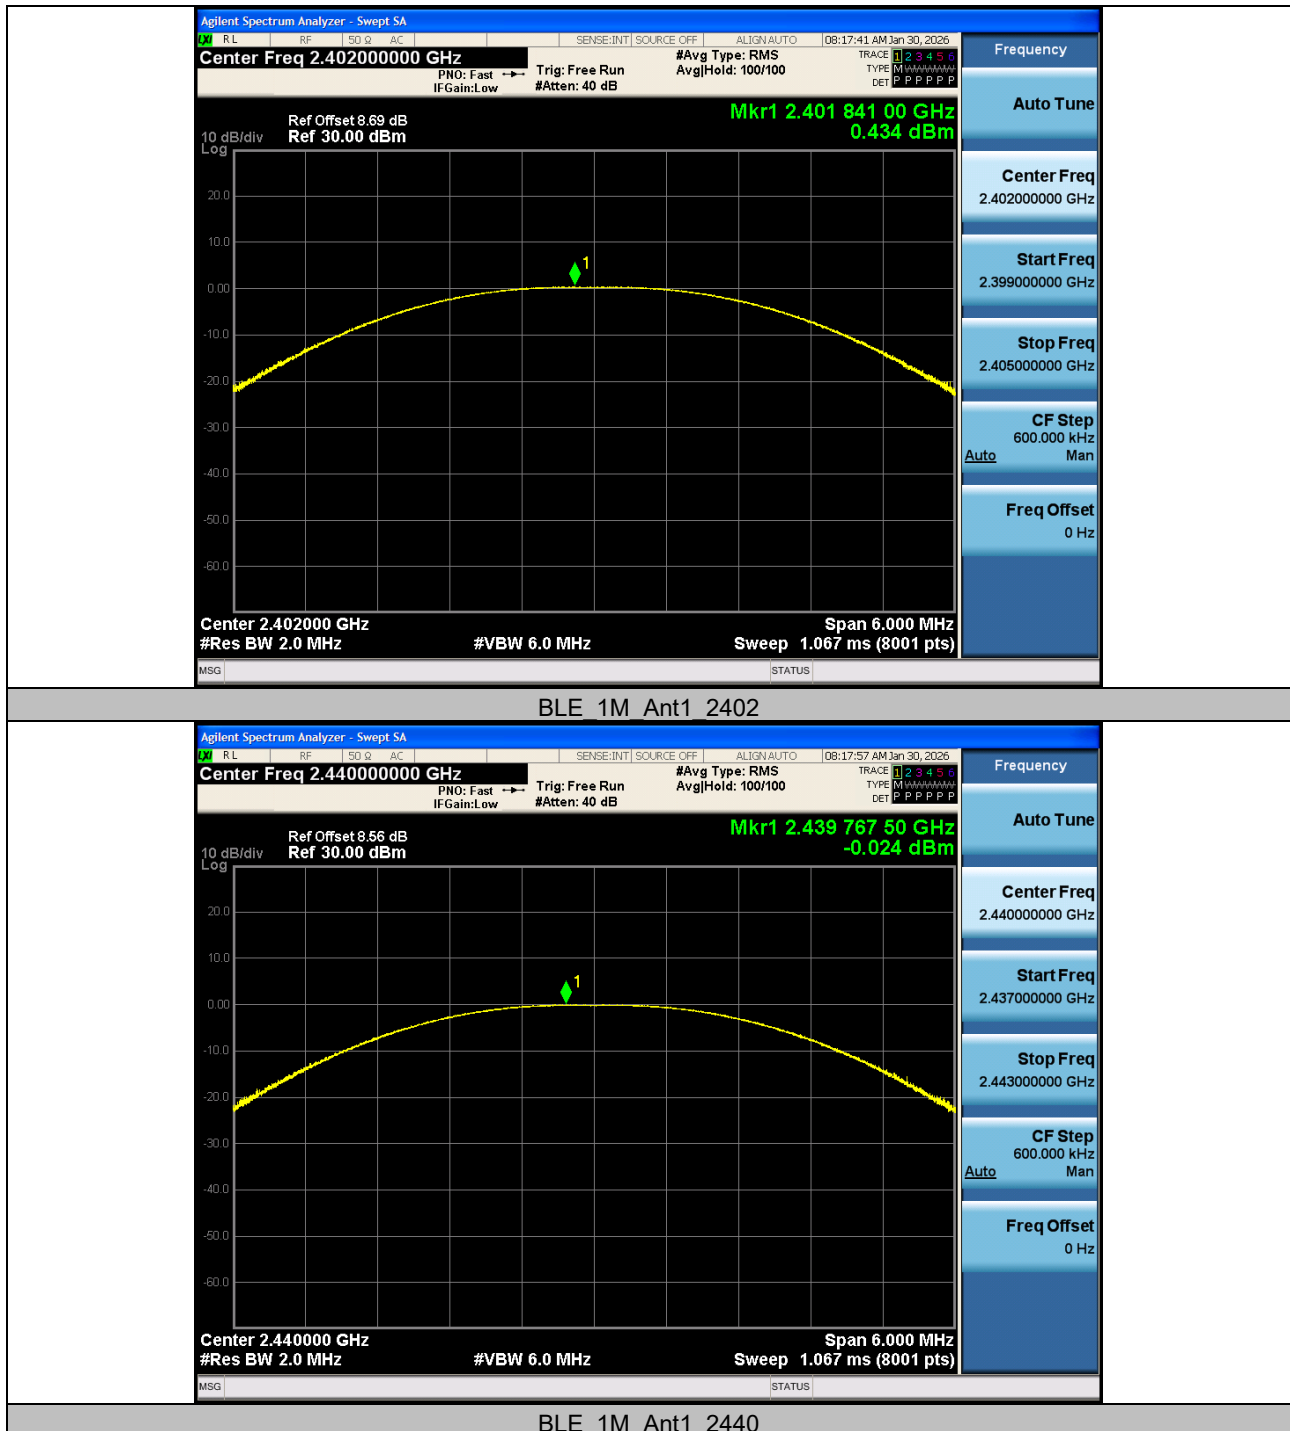

Test Report No.: 25112701-RF-US-02

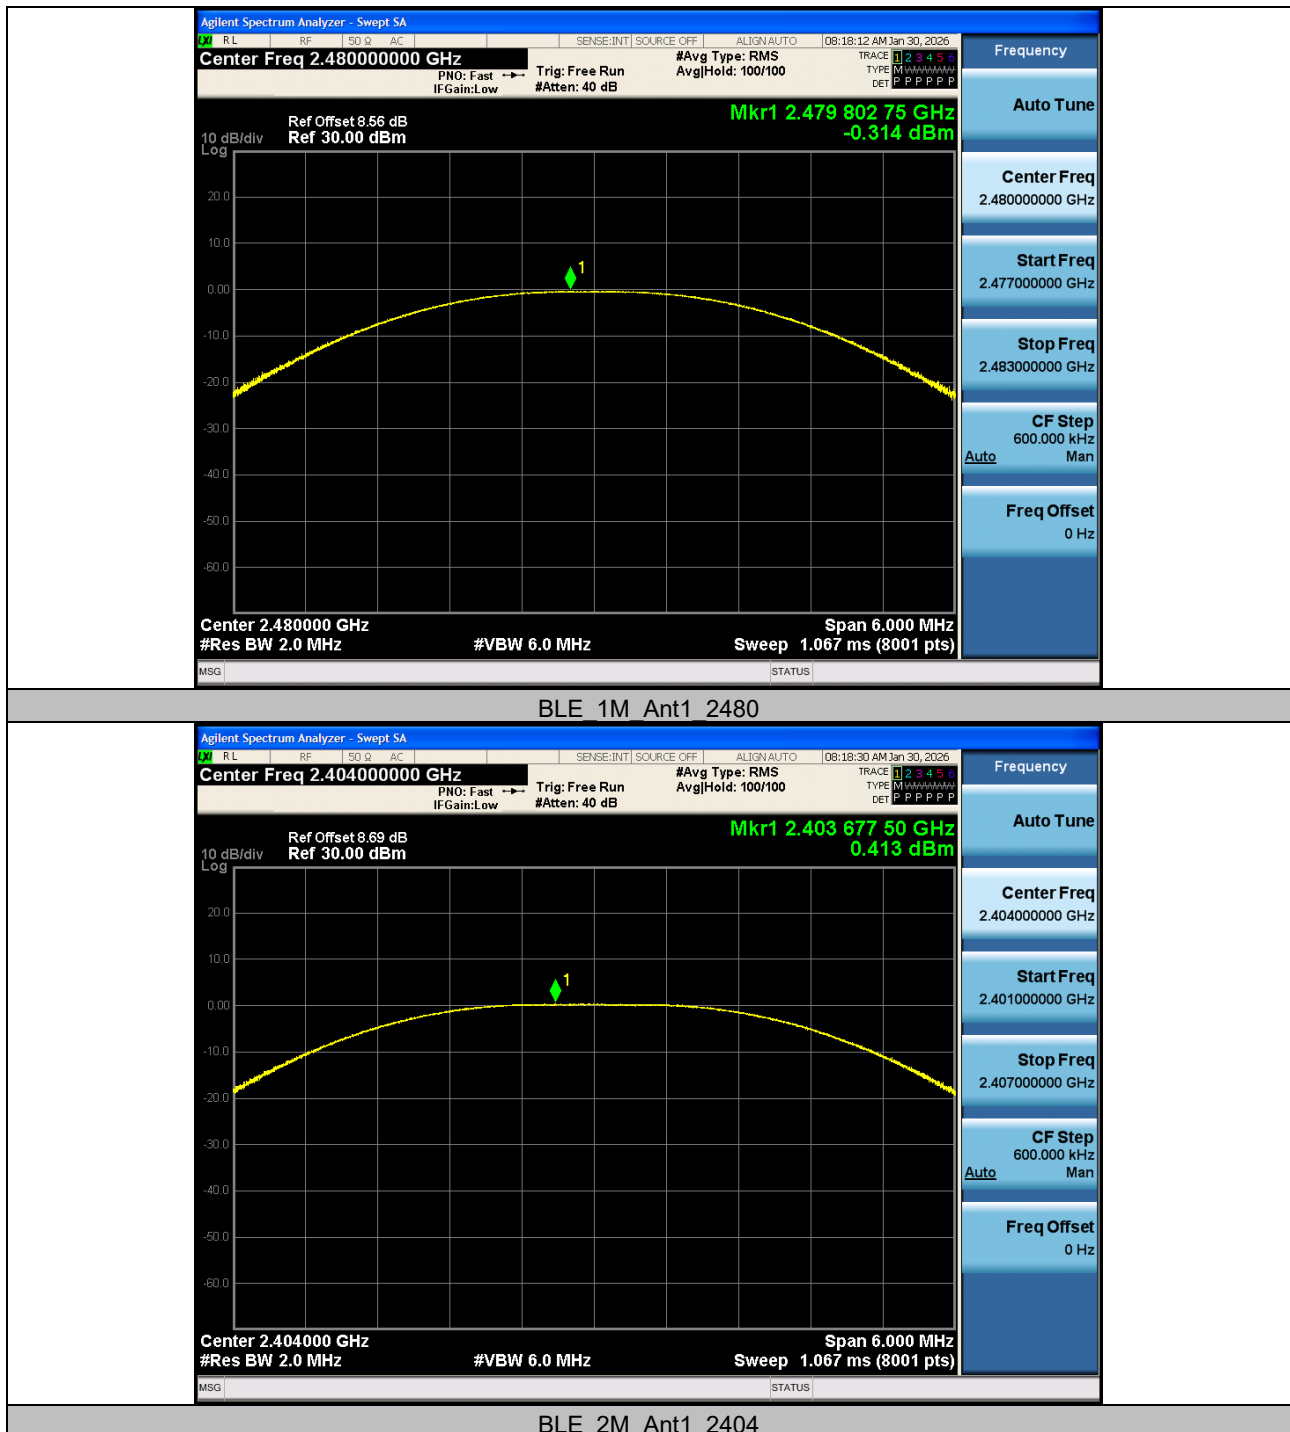


Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](tel:0769-85598986)  
 Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
 E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release  
 Ver. 1.5

Test Report No.: 25112701-RF-US-02

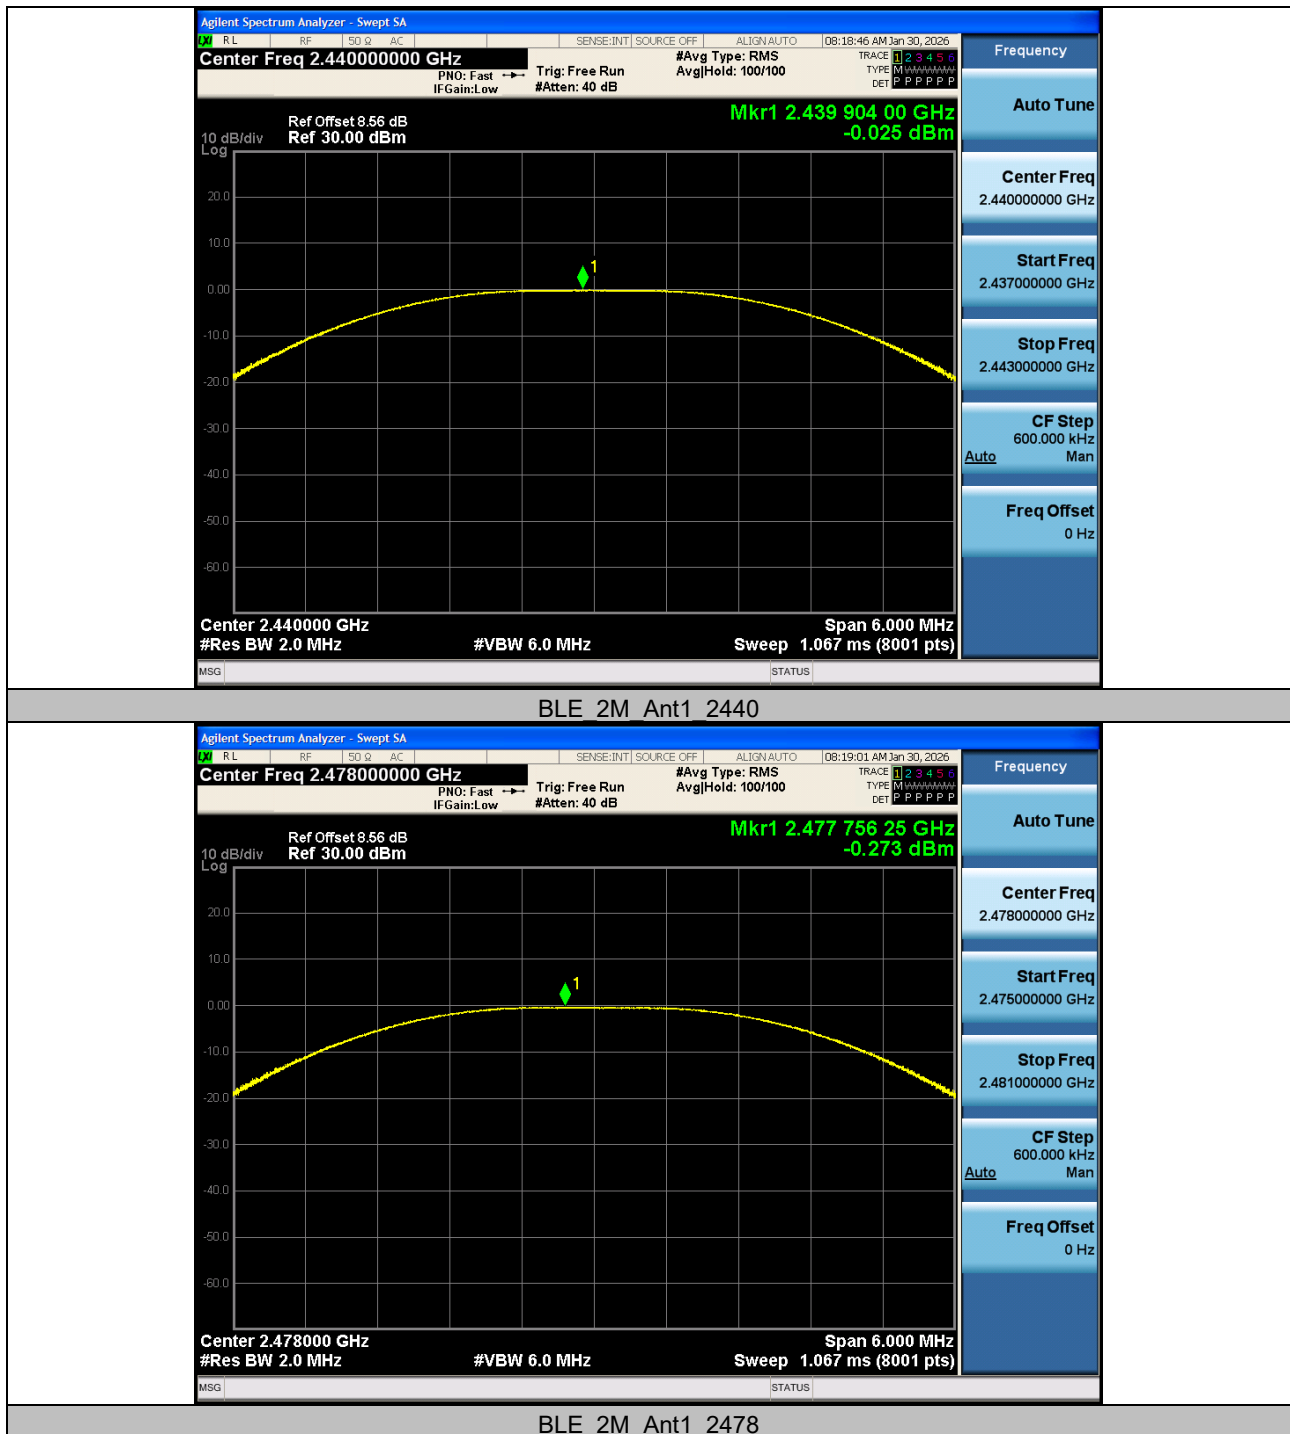

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](tel:0769-85598986)  
 Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
 E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)


Release  
 Ver. 1.5

### 3.6 Power Spectral Density Measurement

#### 3.6.1 Limits of Power Spectral Density Measurement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.6.2 Test Setup

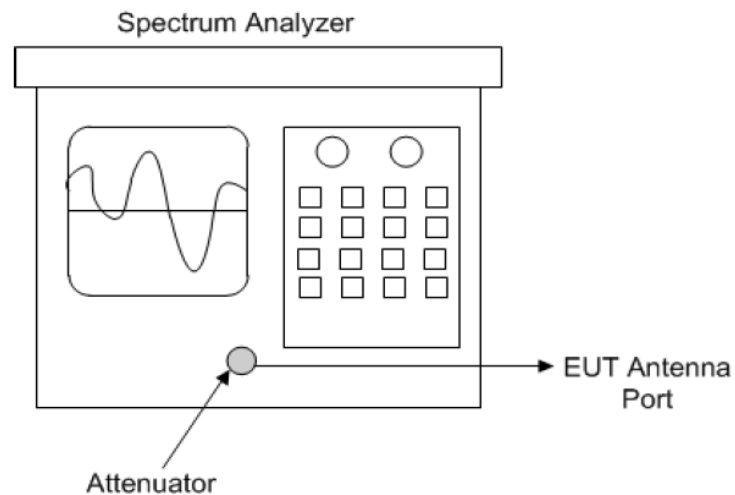

Spectrum analyzer test configuration

#### 3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.6.4 Test Procedure

- a. **Method AVGPDS-1 or method AVGPDS-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
- 1) The EUT transmits continuously (or with a  $D \geq 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep is equal to or shorter than the duration of each transmission from the EUT, and if those transmissions exhibit full power throughout these durations.
- b. **Method AVGPDS-2 or method AVGPDS-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved. and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2\%$ .
- c. **Method AVGPDS-3 or method AVGPDS-3A (alternative)** shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.

#### Method AVGPDS-3:

Method AVGPDS-3 uses mms detection across ON and OFE times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e.  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed  $\pm 2\%$ ).

#### SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
  - b. Set sweep trigger to "free run."
  - c. Set the RBW = 3 kHz, VBW = 10 kHz,
  - d. Detector = RMS (power averaging).
  - e. Sweep time = Auto couple,
  - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - g. Use the peak marker function to determine the maximum PSD level
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

#### 3.6.5 Deviation from Test Standard


No deviation.


#### 3.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


## 3.6.7 Test Results

| Test Mode | Antenna | Channel | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|---------|------------------|-----------------|---------|
| BLE_1M    | Ant1    | 2402    | -12.7            | ≤8.00           | PASS    |
|           |         | 2440    | -13.09           | ≤8.00           | PASS    |
|           |         | 2480    | -13.26           | ≤8.00           | PASS    |
| BLE_2M    | Ant1    | 2404    | -15.74           | ≤8.00           | PASS    |
|           |         | 2440    | -16.17           | ≤8.00           | PASS    |
|           |         | 2478    | -16.26           | ≤8.00           | PASS    |

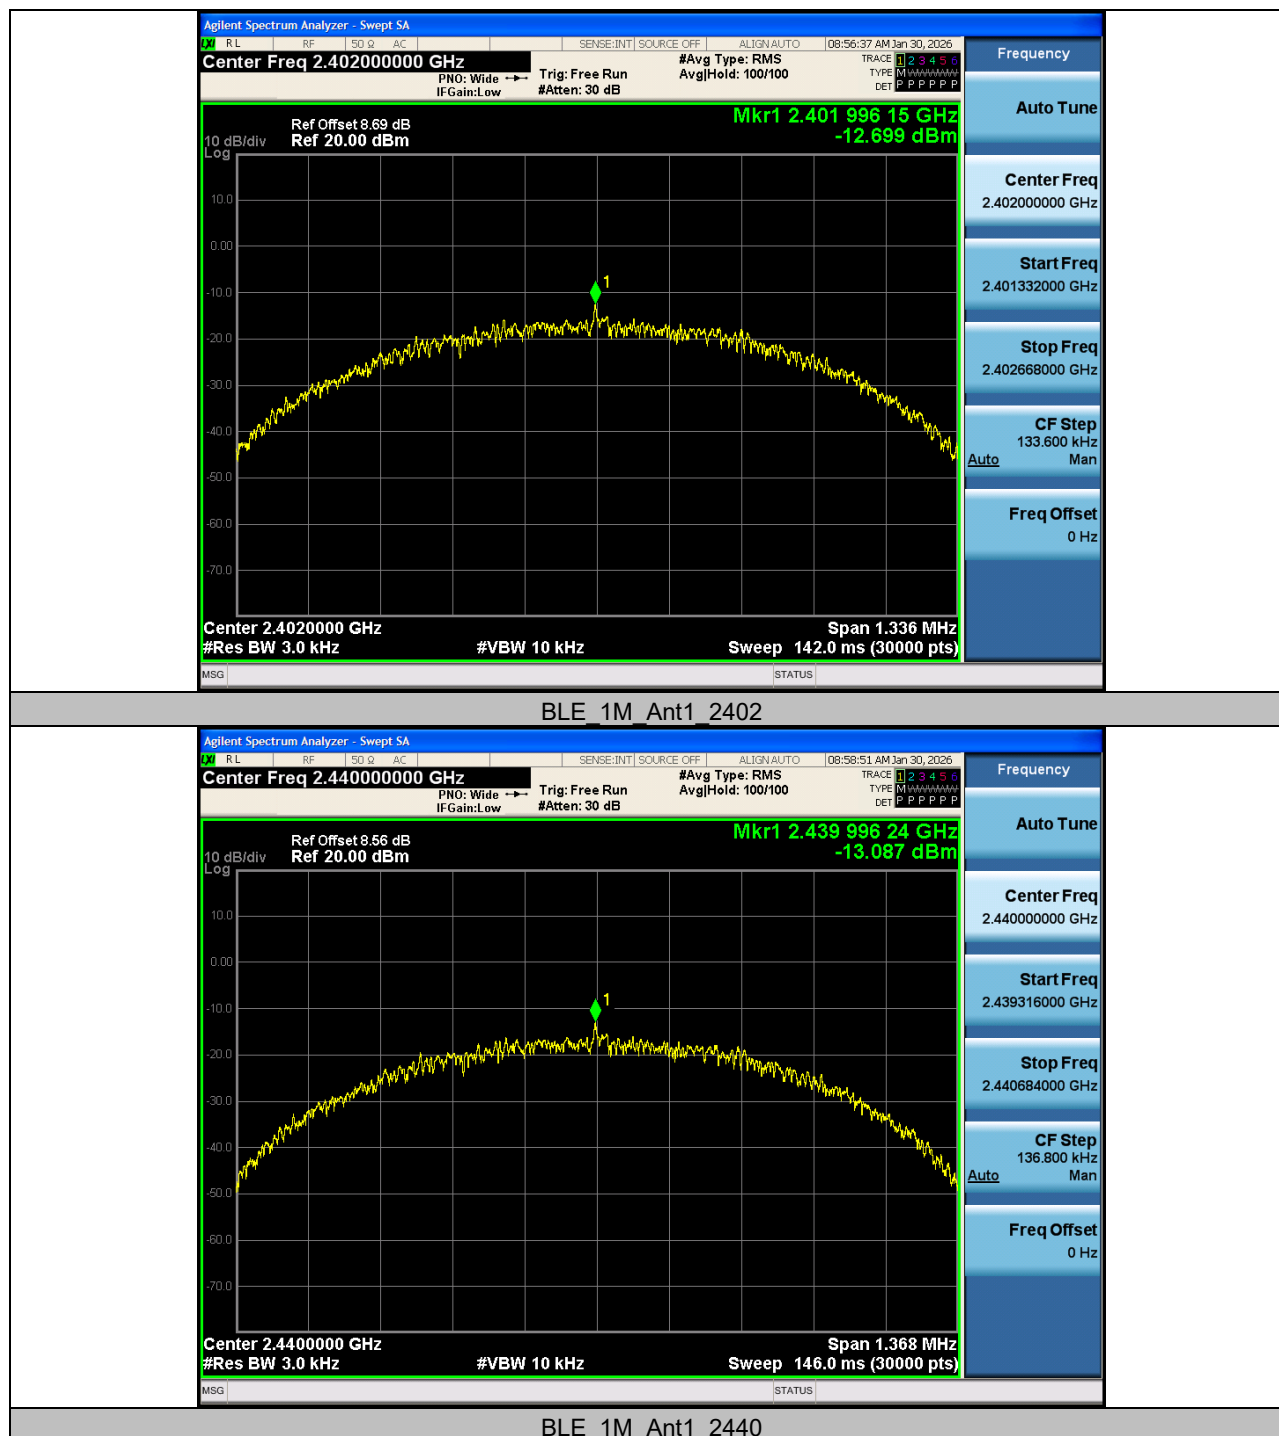

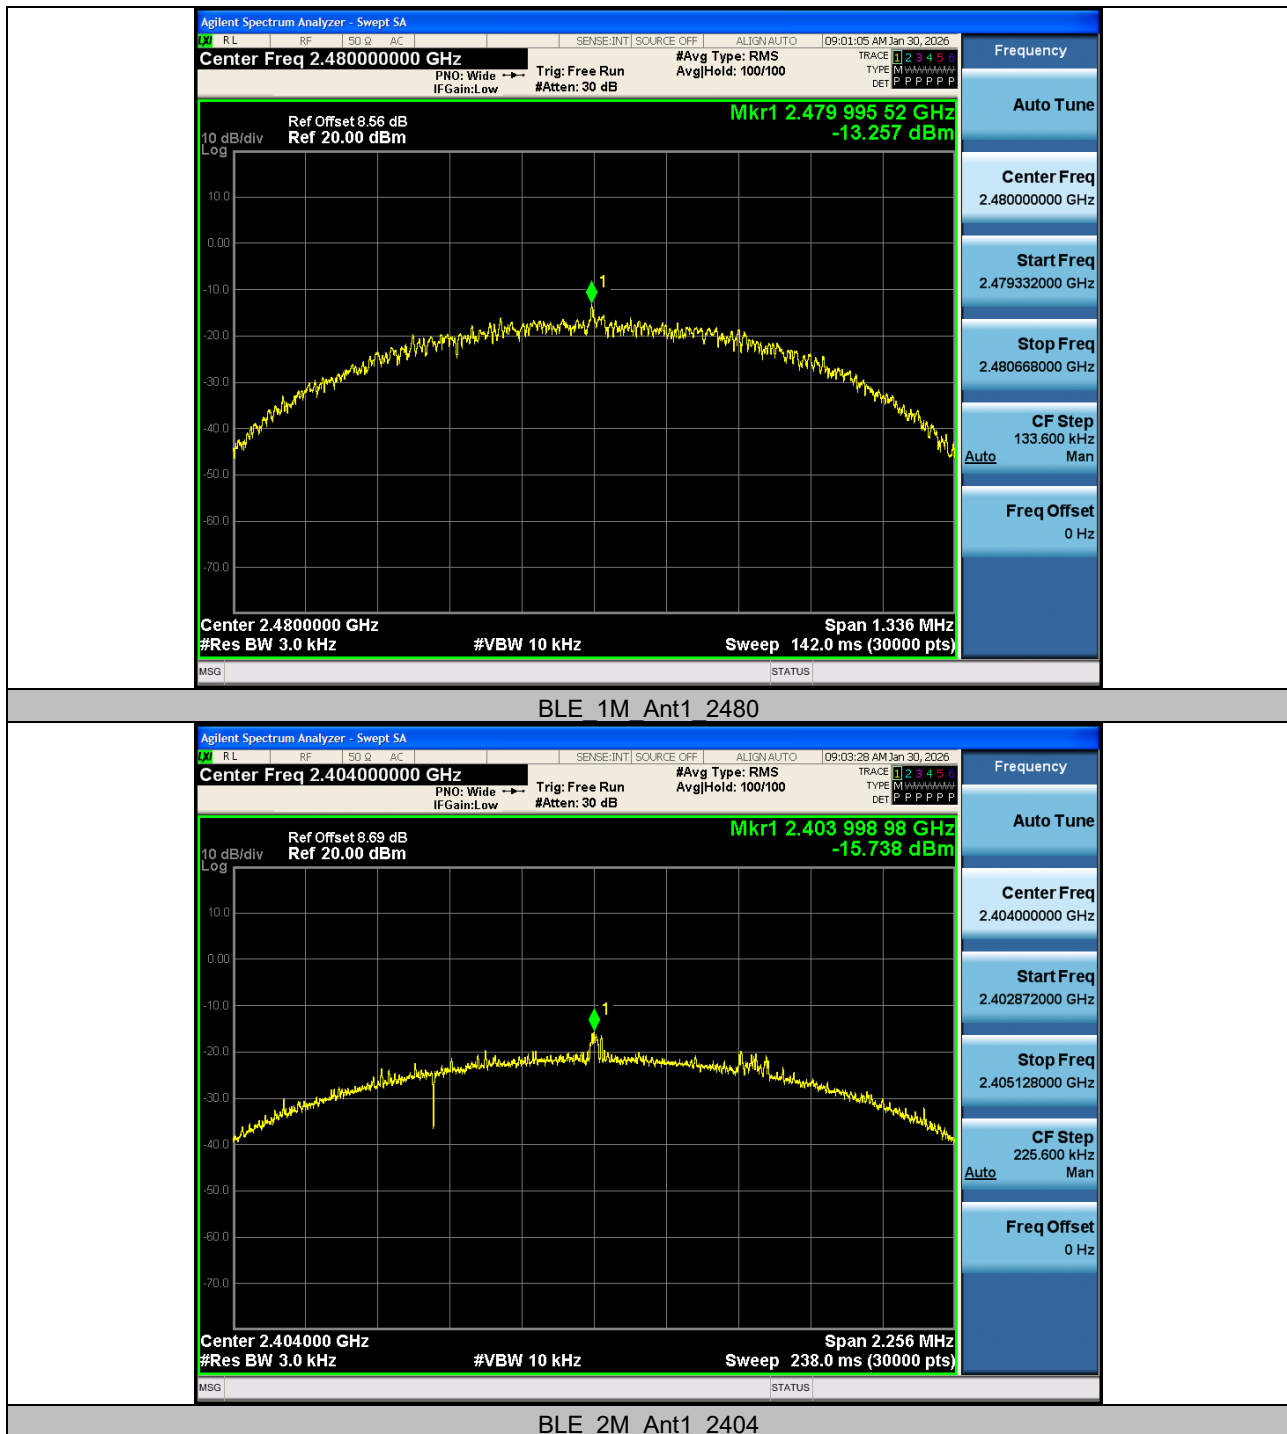

Test Report No.: 25112701-RF-US-02

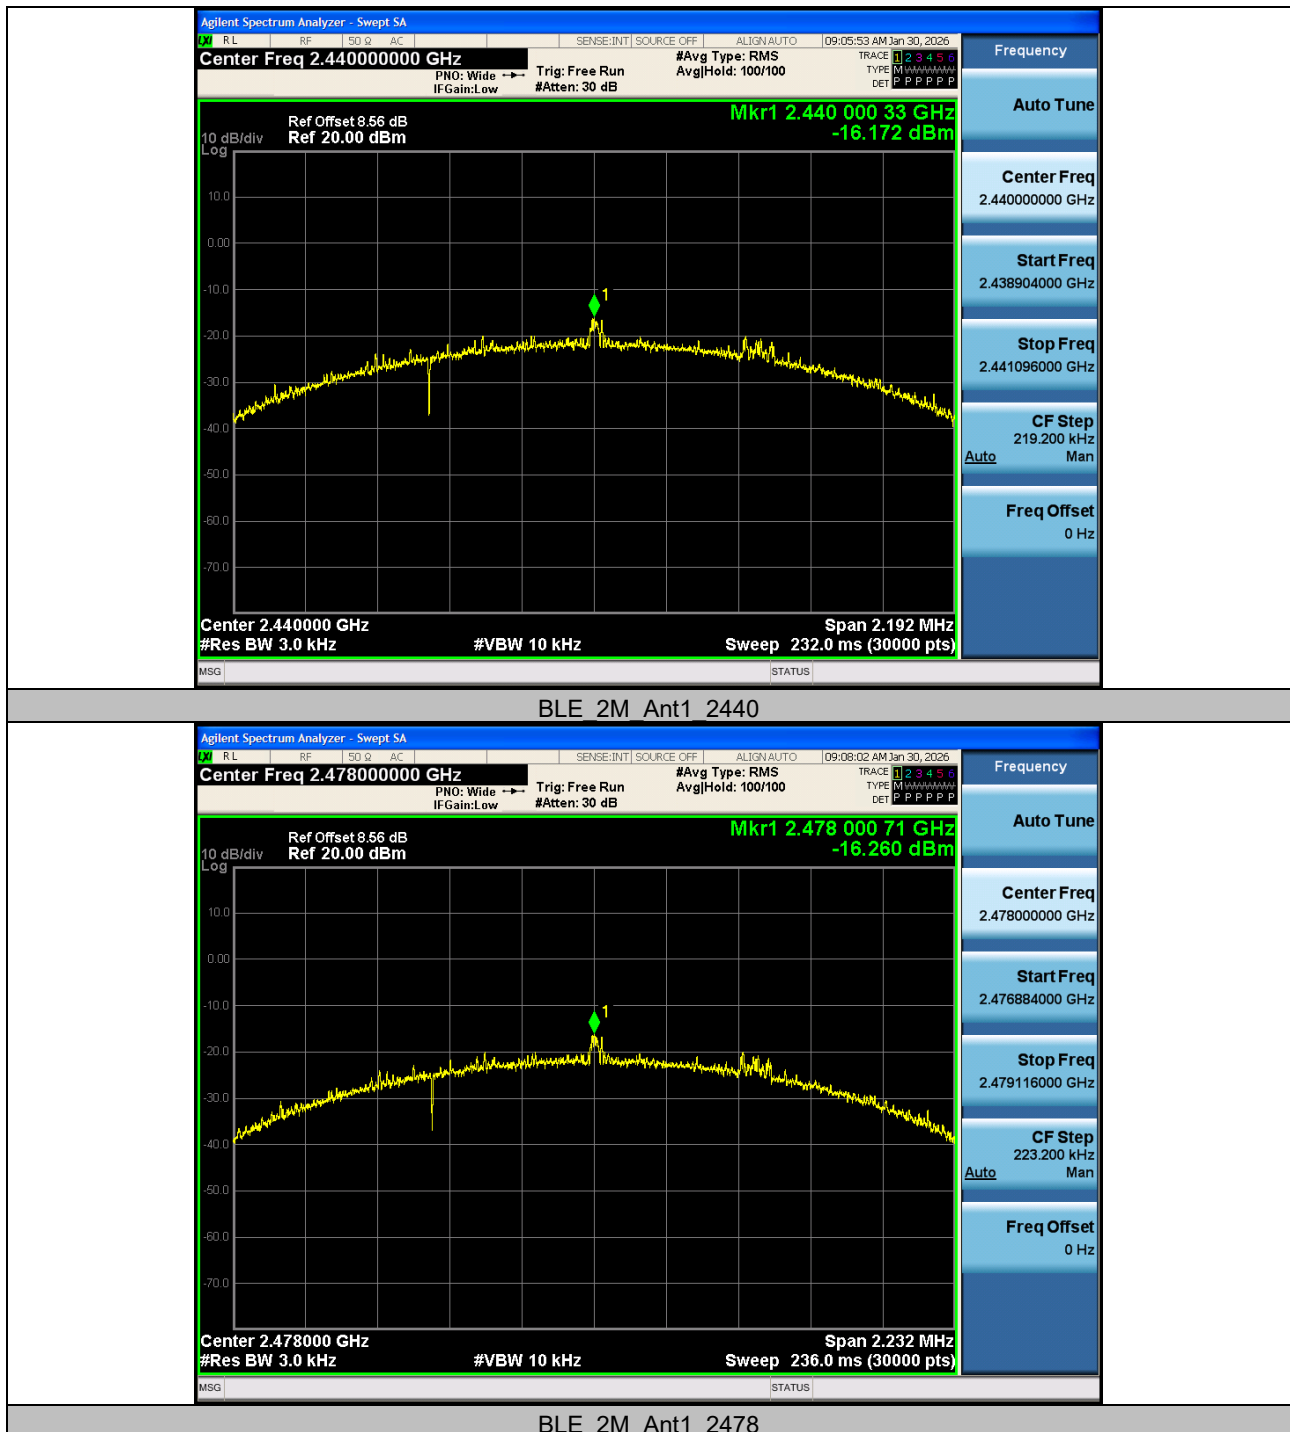

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](tel:0769-85598986)  
 Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
 E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release  
 Ver. 1.5


### 3.7 Conducted Out of Band Emission Measurement

#### 3.7.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

#### 3.7.2 Test Setup

- DTS emissions in non-restricted frequency bands of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands of ANSI C63.10 is applicable.

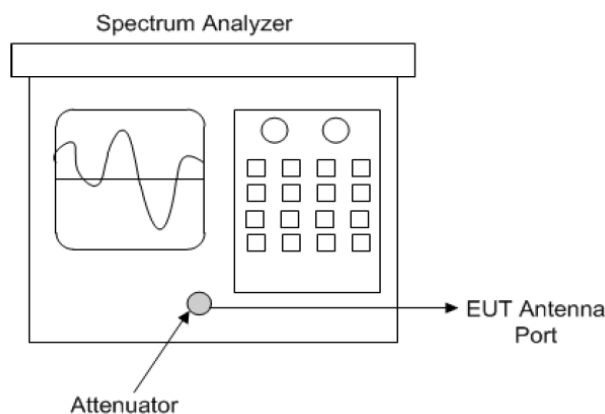

Spectrum analyzer test configuration

#### 3.7.3 Test Instruments

Refer to section 5 to get information of above instrument.

**3.7.4 Test Procedure**

a. Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to 21.5 times the DTS bandwidth)
- 3) Set the RBW= 100 kHz)
- 4) Set the VBW  $\geq 3 \times$  RBW
- 5) Detector = peak
- 6) Sweep time = auto coupling
- 7) Trace mode =max hold
- 8) Allow trace to fully stabilize
- 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

b. Establish an emission level by using the following procedure:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz
- 3) Set the VBW  $\geq 300$  kHz.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

**3.7.5 Deviation from Test Standard**


No deviation.


**3.7.6 EUT Operating Condition**


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.7.7 Test results

The spectrum plots are attached on the following images. Mkr1 of 0~Reference indicates the highest level, Mkr1 of 30~1000 and 1000~26500 indicates the 20dB offset below highest level. It shows compliance with the requirement.

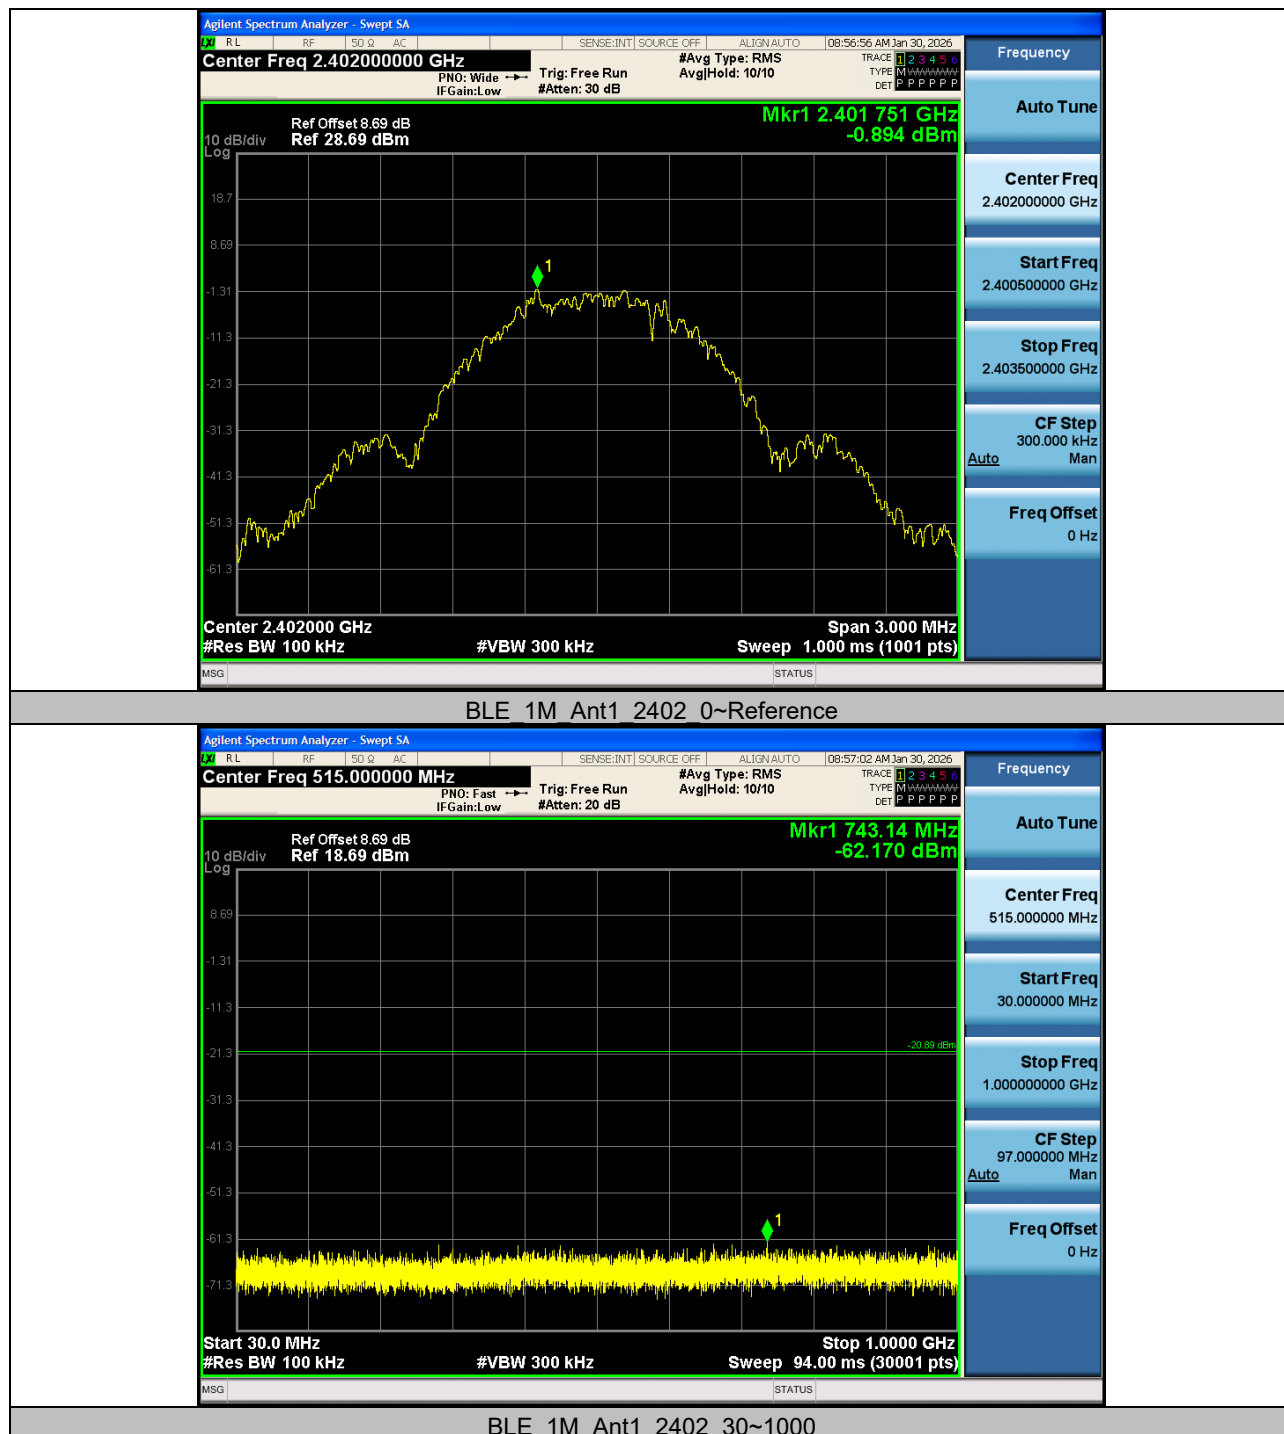

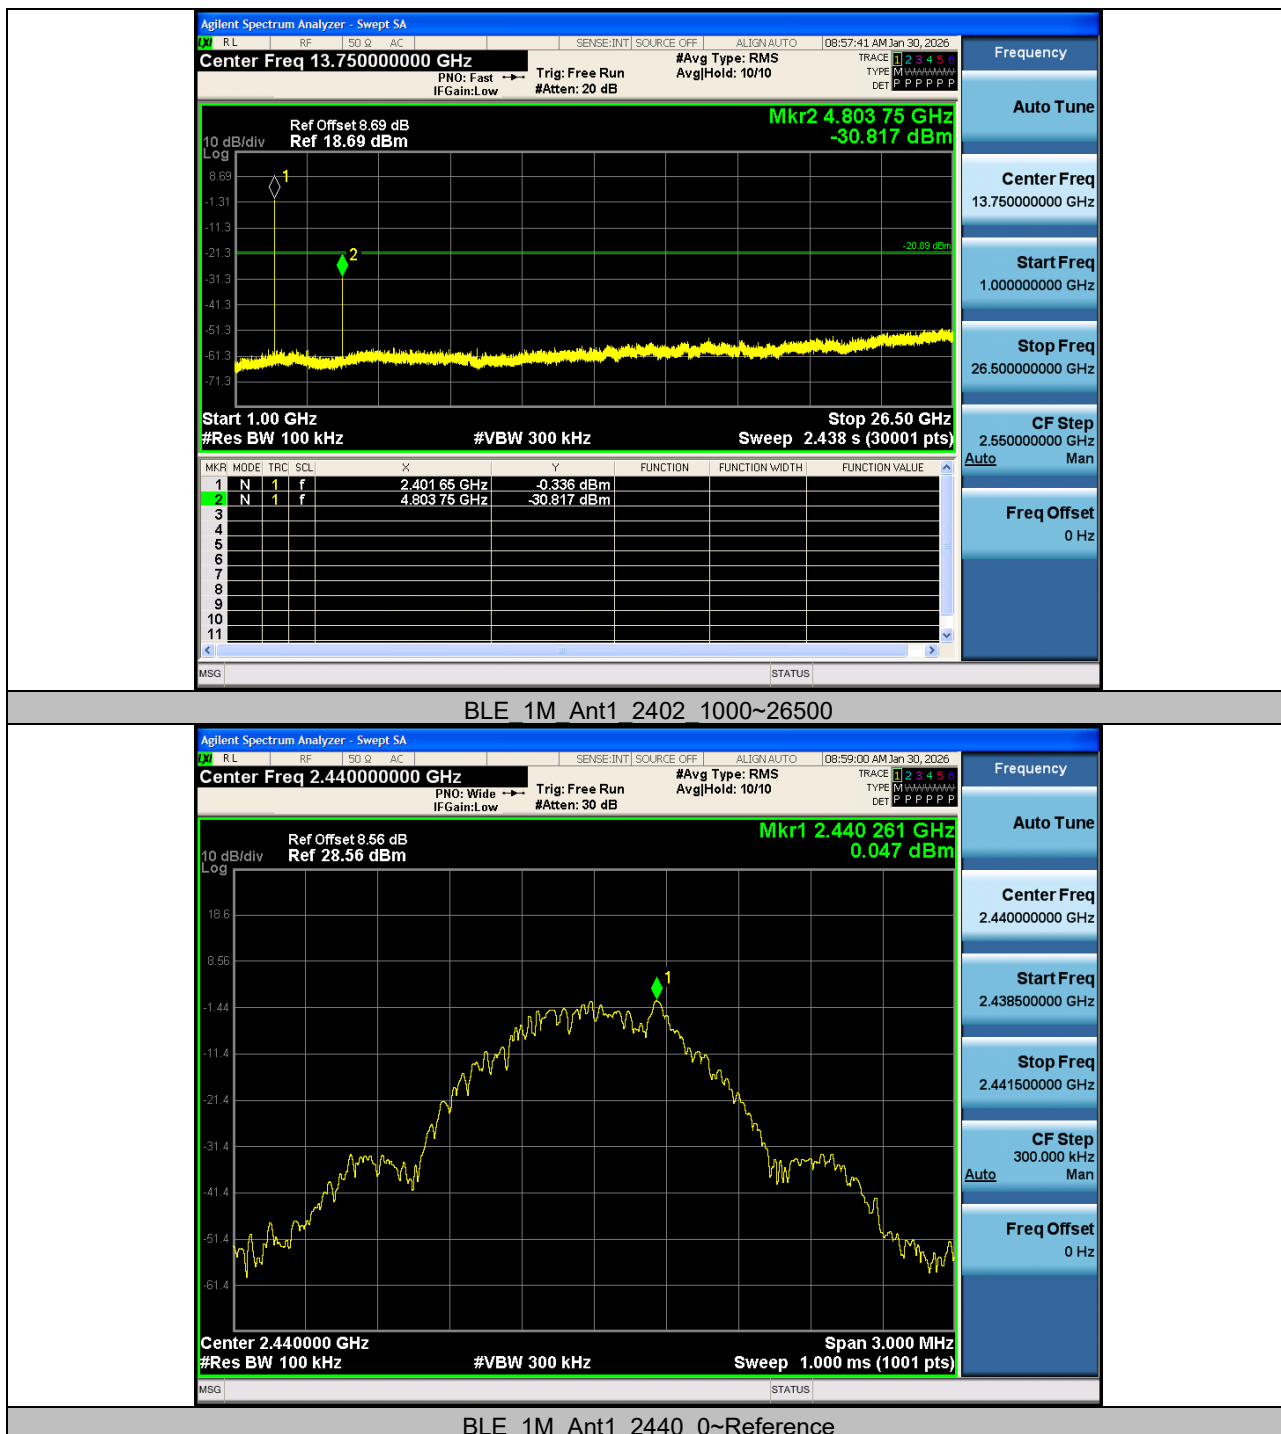

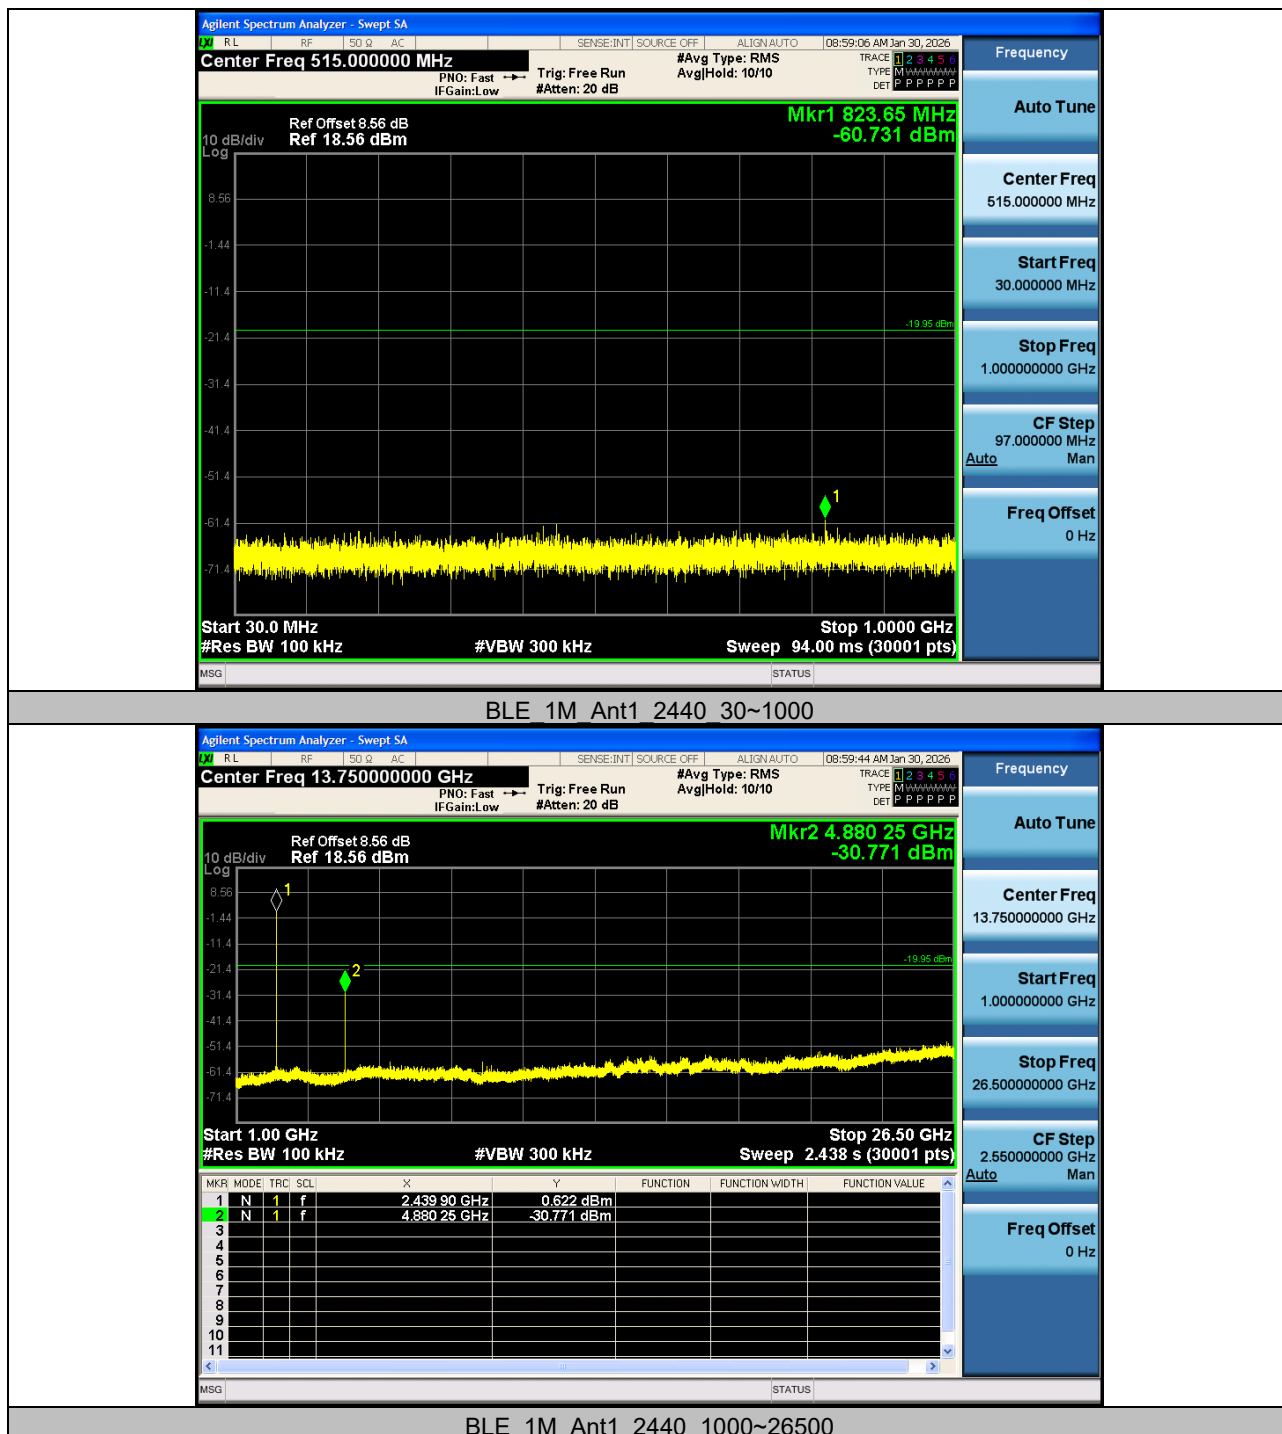

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](#)


Web.: [www.lyns-tci.com](#)

E-Mail: [service-hs@lyns-tci.com](#)

Release

[Ver. 1.5](#)

Test Report No.: 25112701-RF-US-02

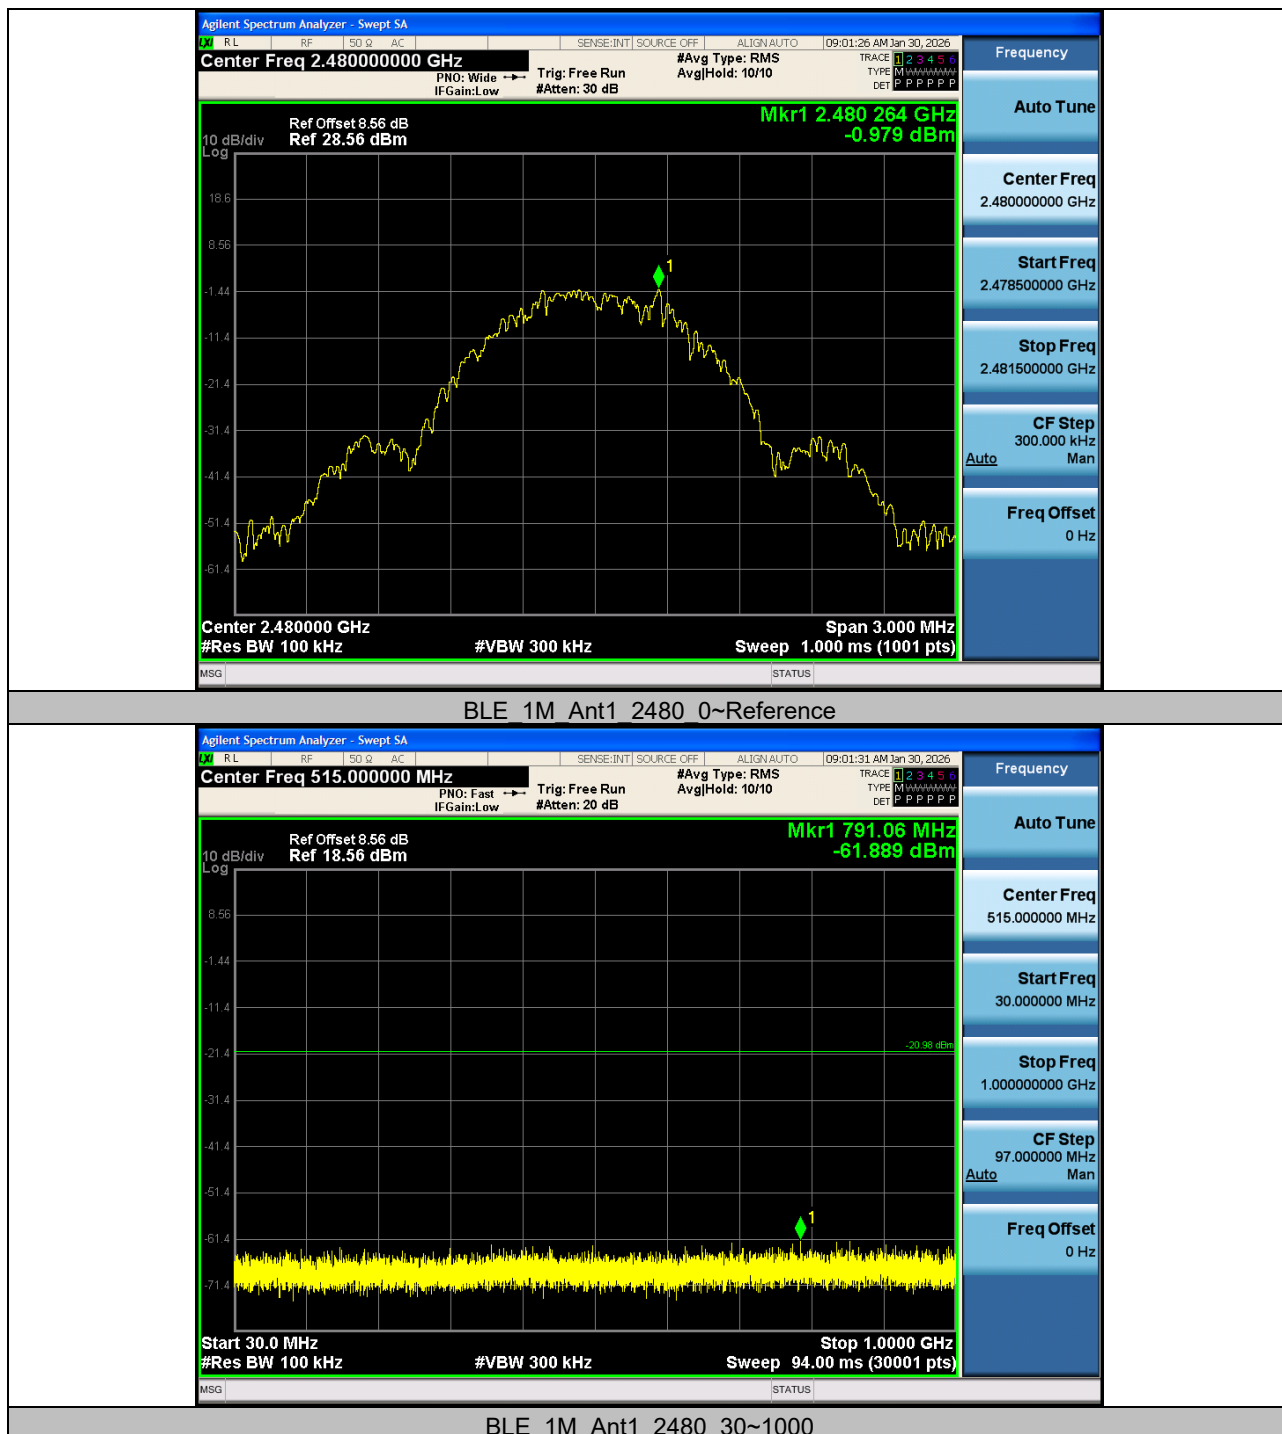

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](#)


Web.: [www.lyns-tci.com](#)

E-Mail: [service-hs@lyns-tci.com](#)

Release

[Ver. 1.5](#)


Test Report No.: 25112701-RF-US-02

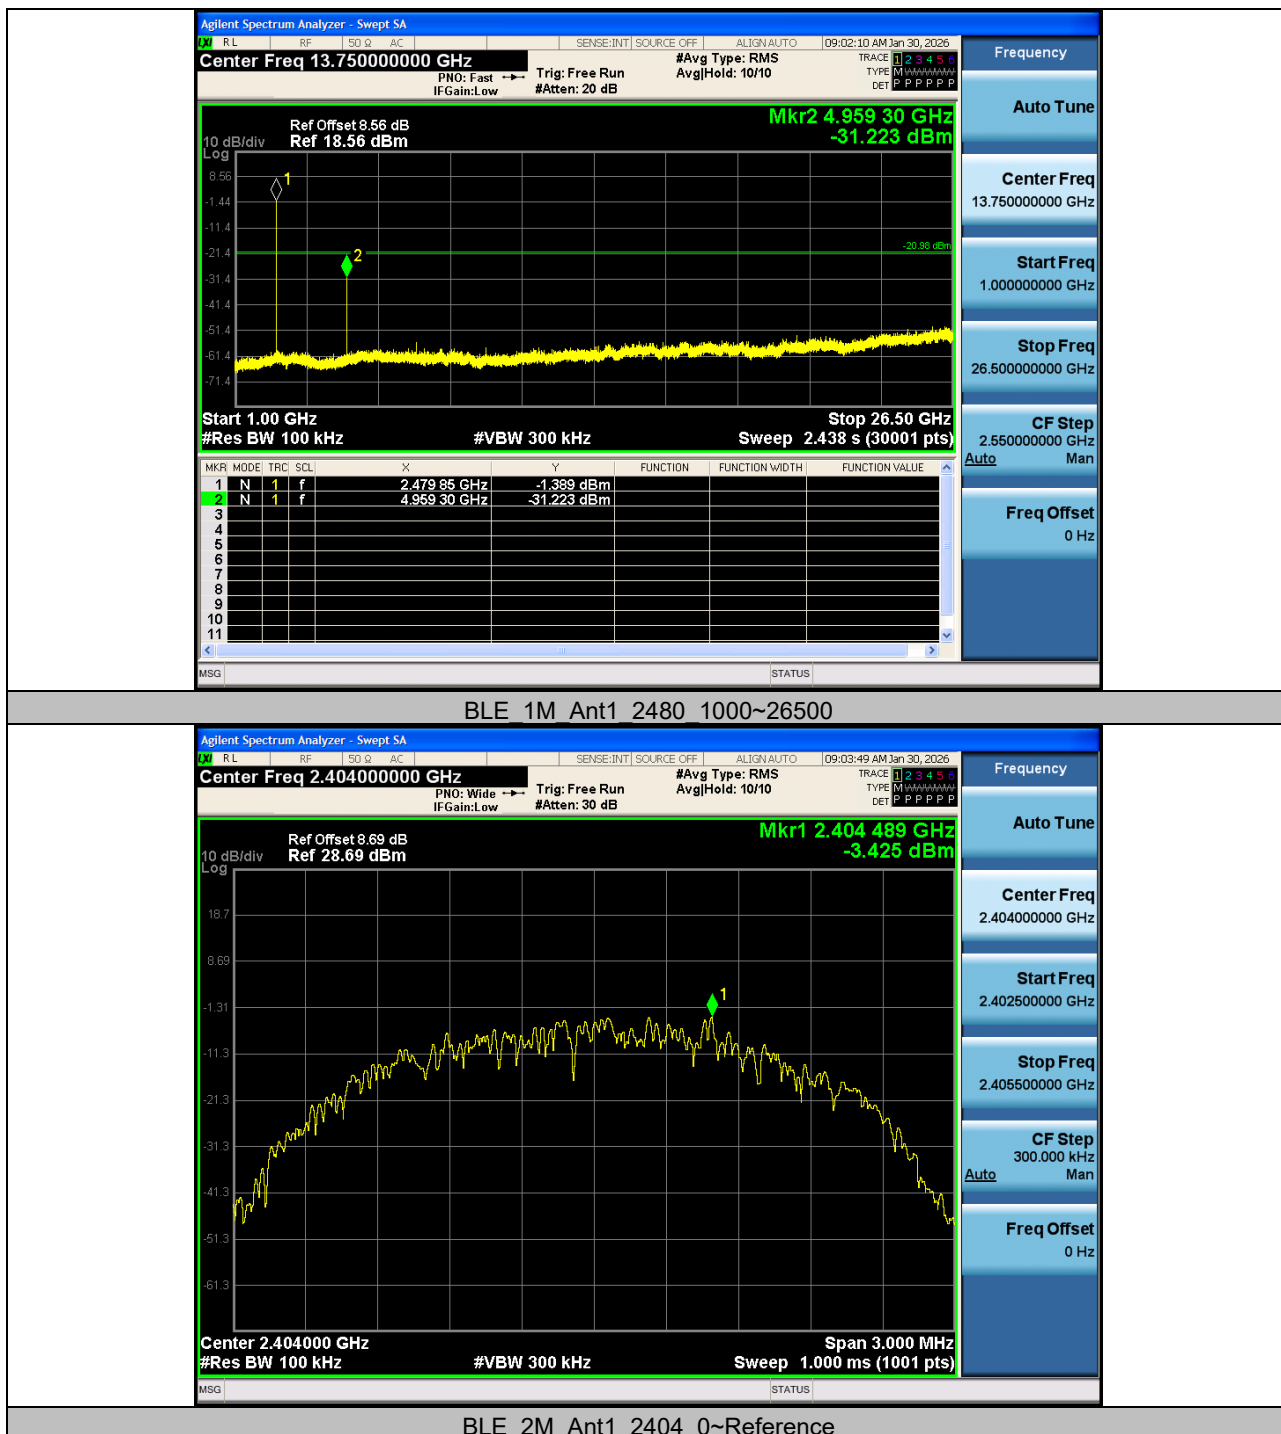



Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)


Tel: [0769-85598986](tel:0769-85598986)  
 Web.: [www.lyns-tci.com](http://www.lyns-tci.com)  
 E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release  
 Ver. 1.5

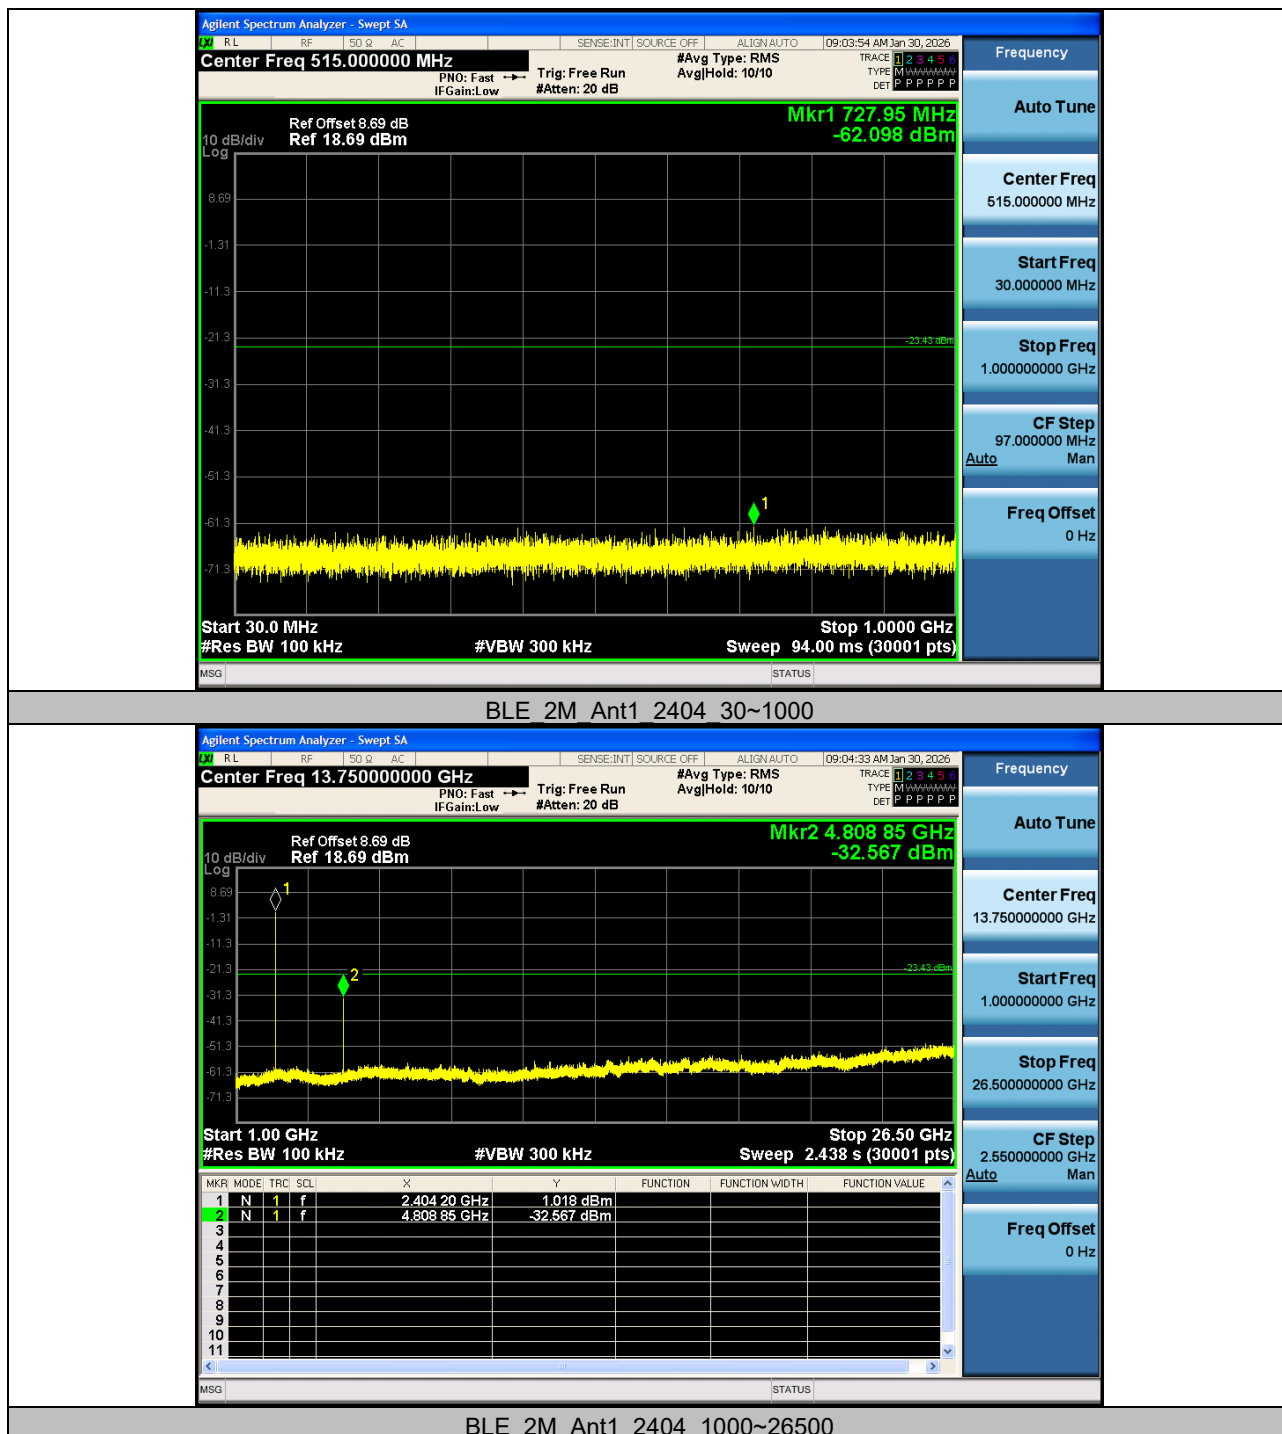

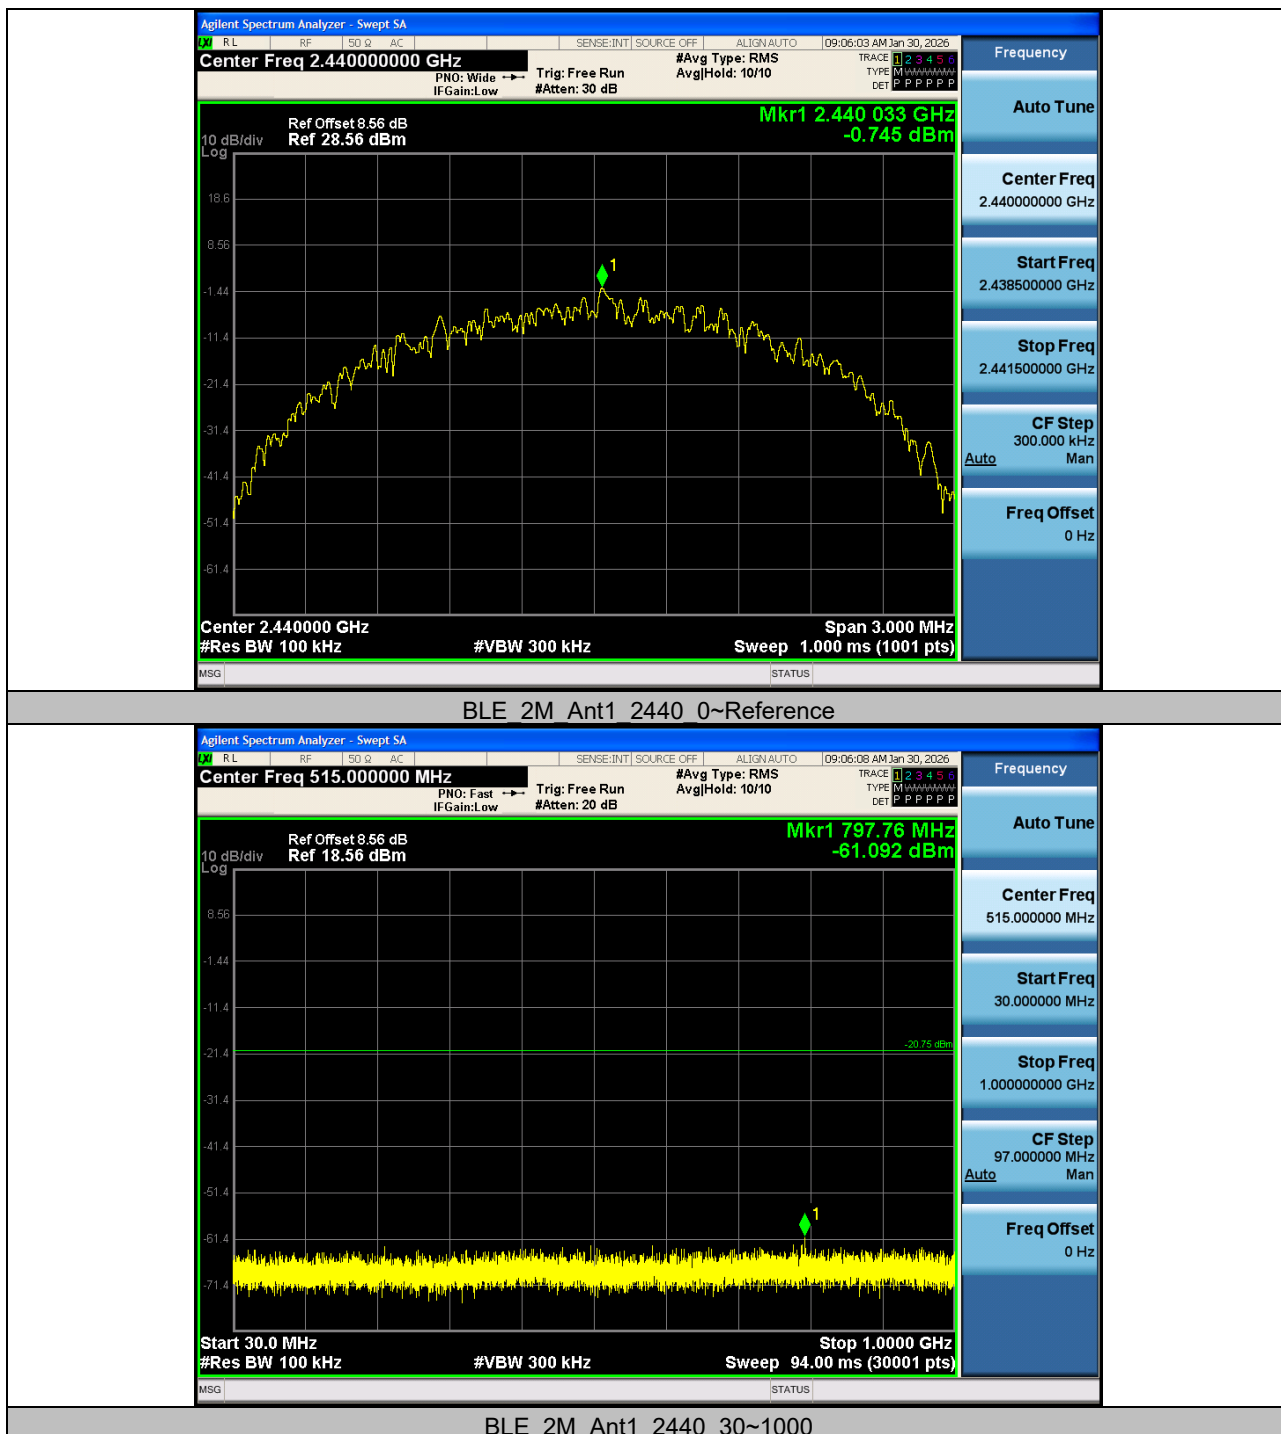

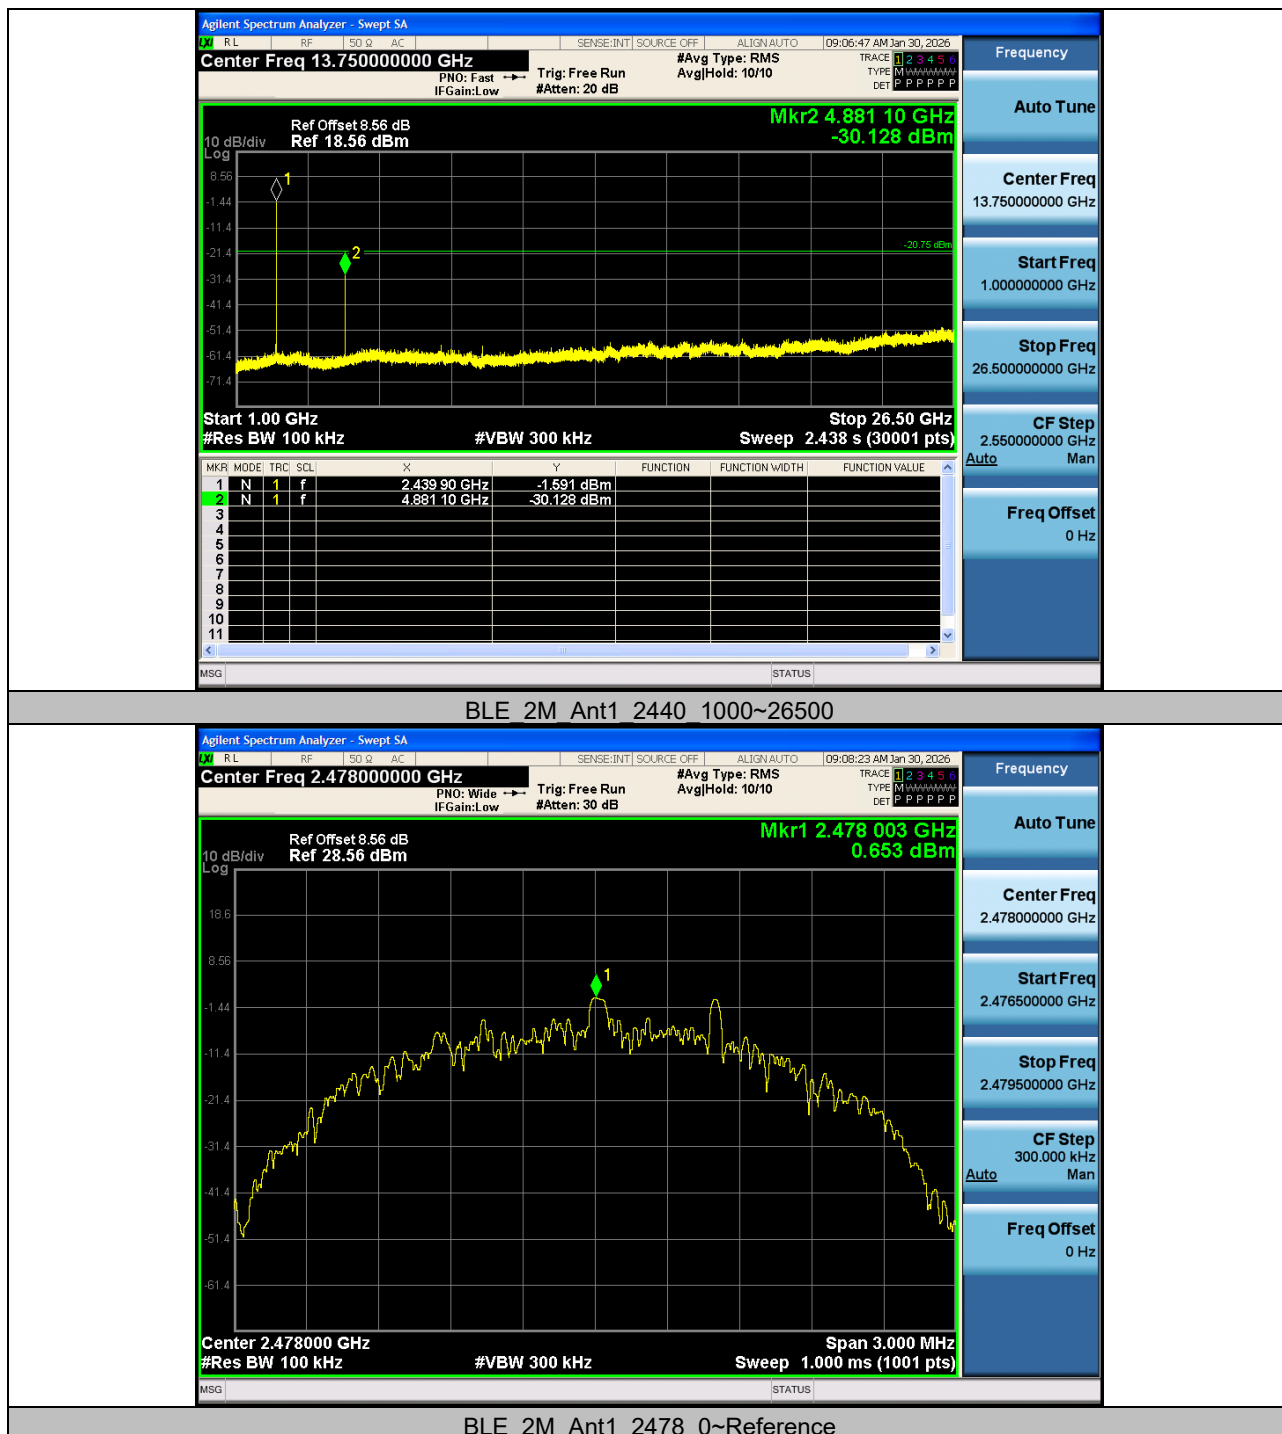

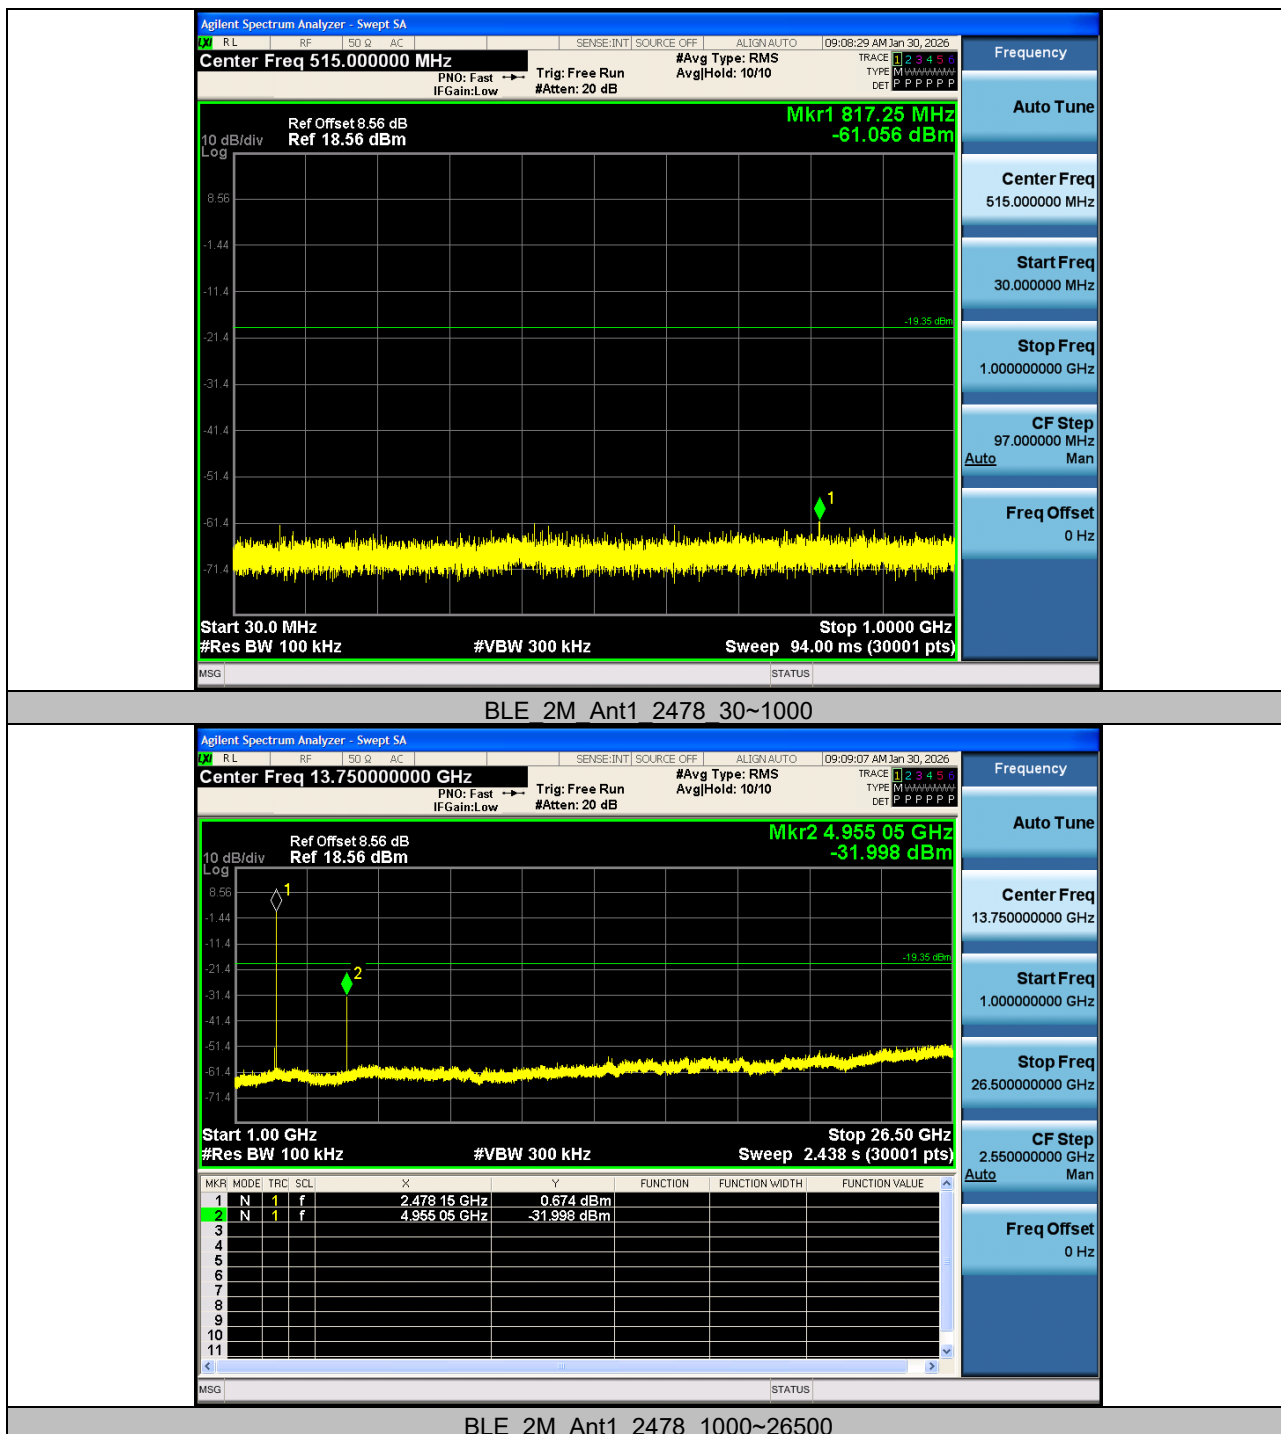

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](#)

Web.: [www.lyns-tci.com](#)


E-Mail: [service-hs@lyns-tci.com](#)

Release

[Ver. 1.5](#)

Test Report No.: 25112701-RF-US-02

Mkr1 indicates the highest level, other indicates the 20dB offset below highest level. It shows compliance with the requirement.

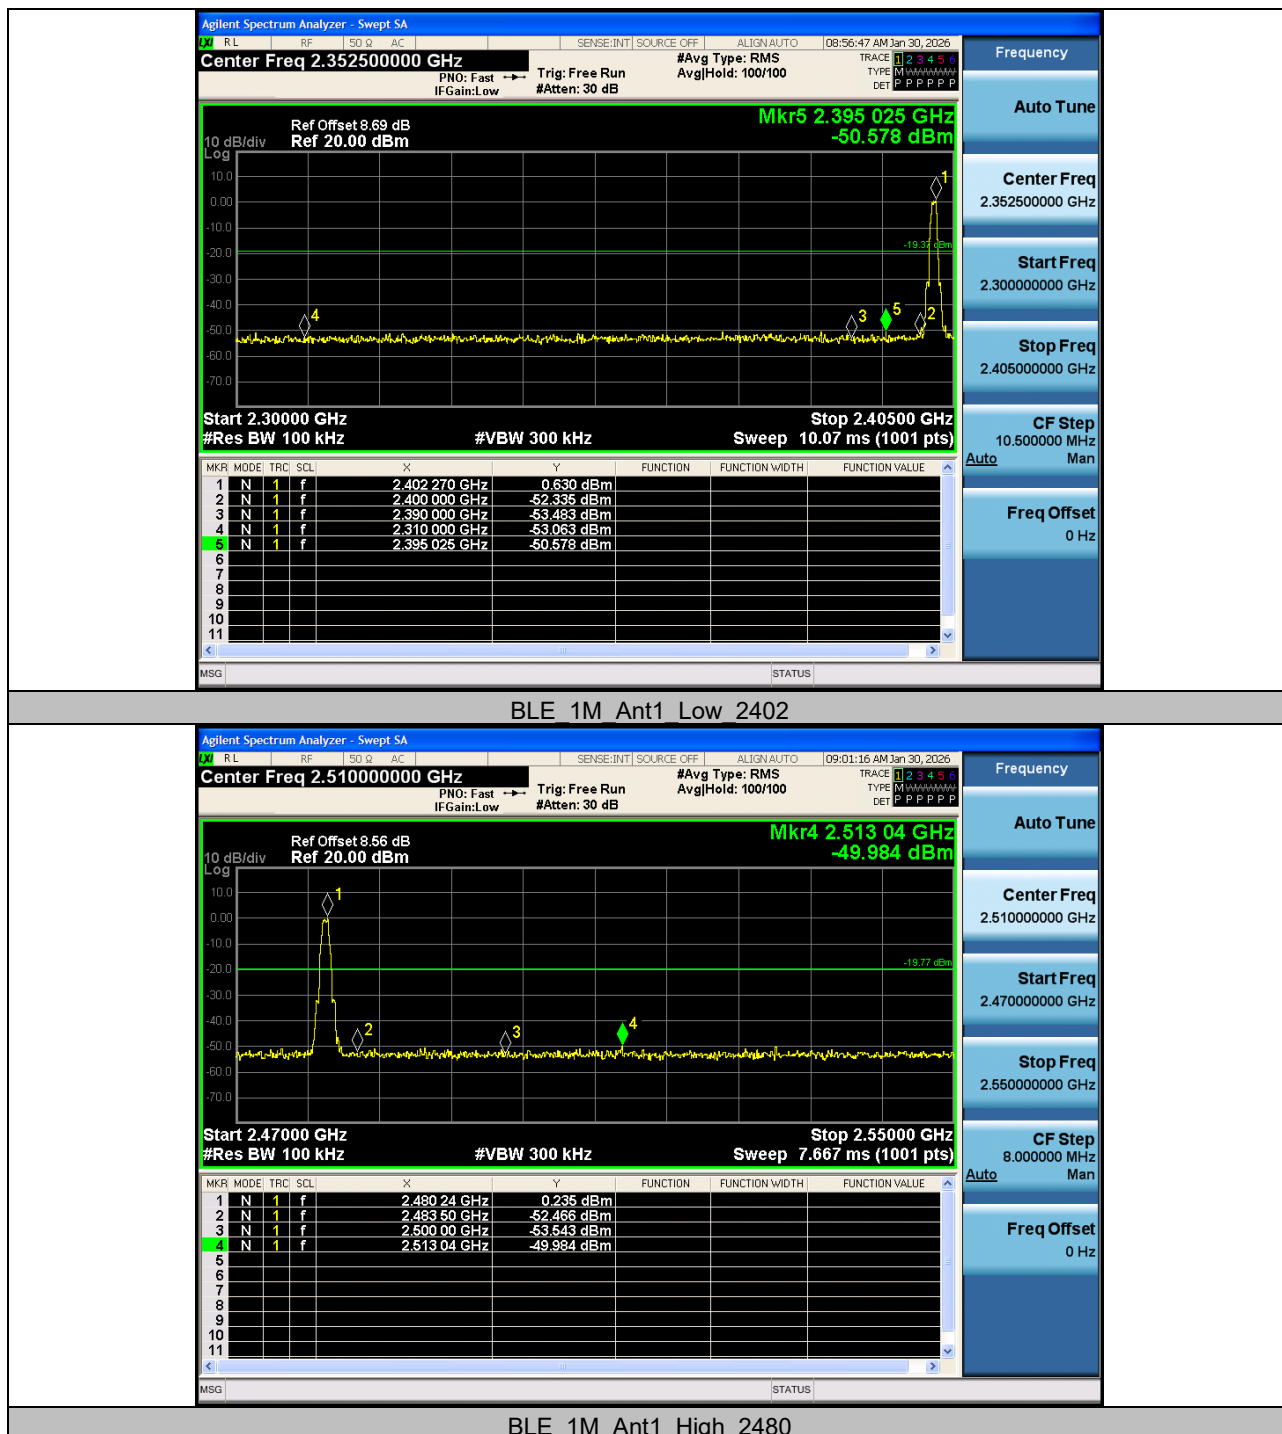

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)


Tel: [0769-85598986](tel:0769-85598986)

Web.: [www.lyns-tci.com](http://www.lyns-tci.com)

E-Mail: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Release

[Ver. 1.5](#)

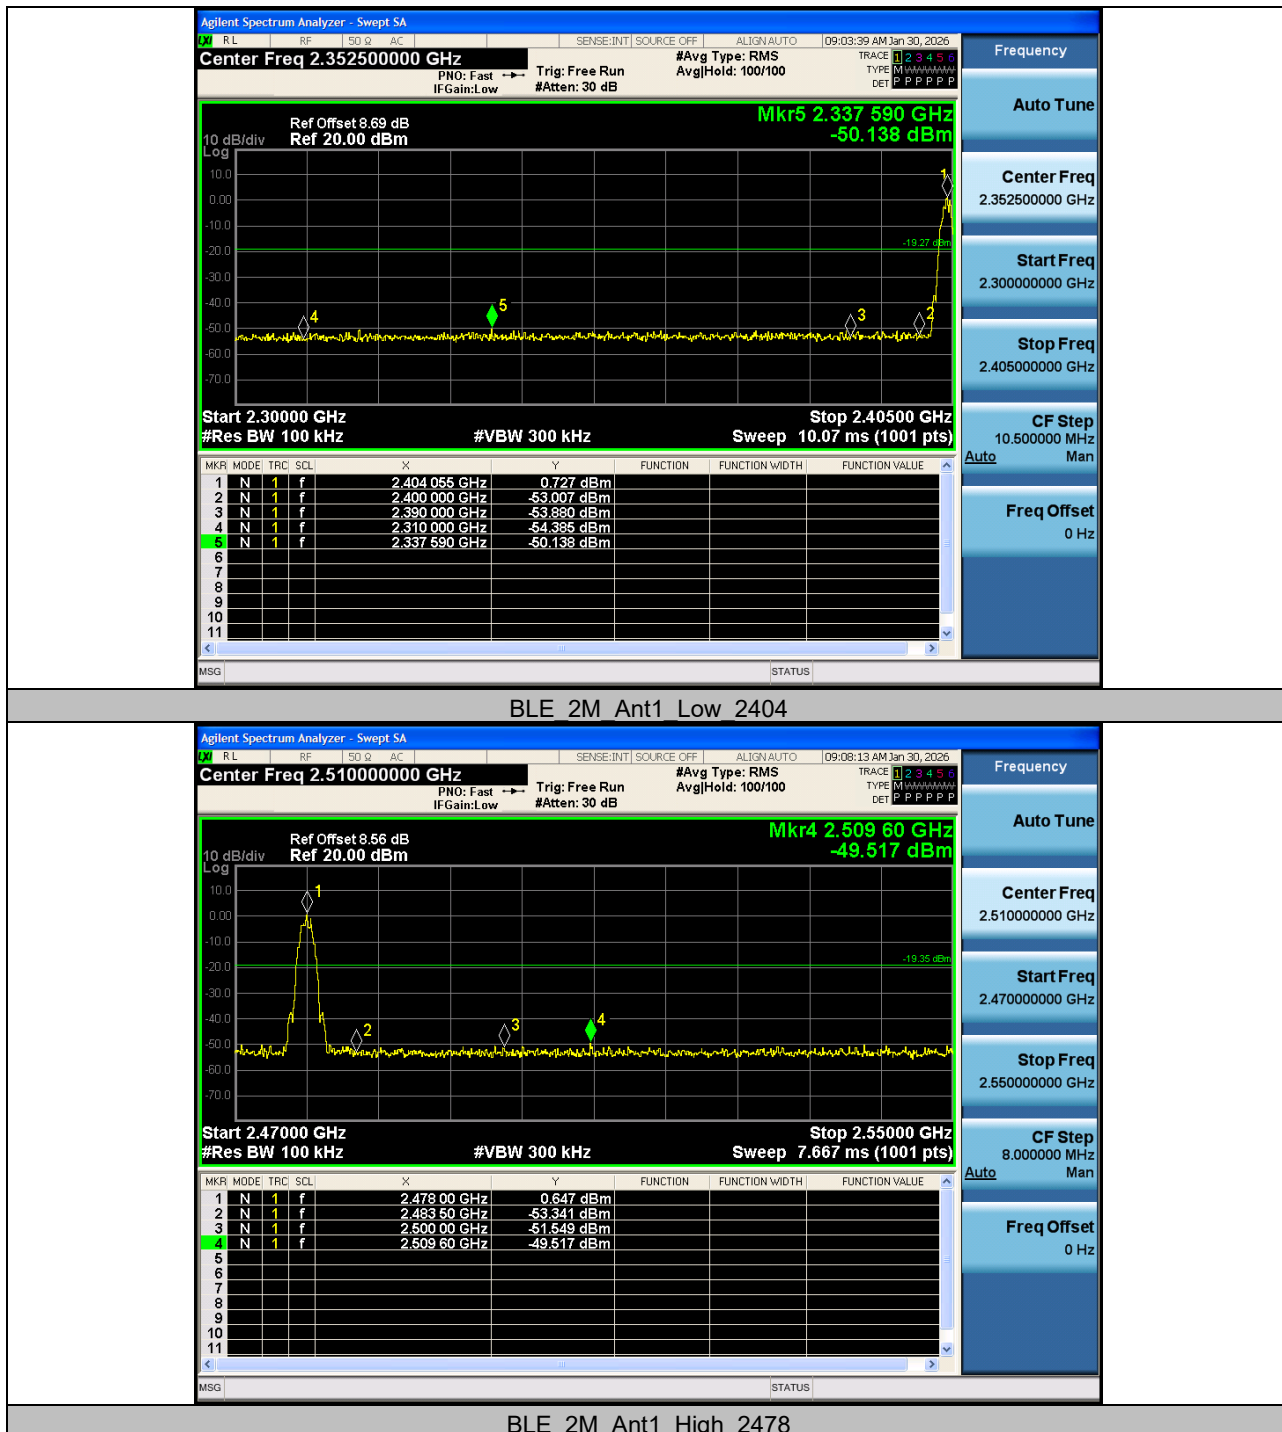

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-85598986](#)

Web.: [www.lyns-tci.com](#)

E-Mail: [service-hs@lyns-tci.com](#)

Release

[Ver. 1.5](#)

**3.8 Antenna Application****3.8.1 Antenna Requirement**

| Standard            | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CFR Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |

**3.8.2 Test Results**

|                                     |                                                                                        |
|-------------------------------------|----------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | Antenna use a permanently attached antenna which is not replaceable.                   |
| <input type="checkbox"/>            | Not using a standard antenna jack or electrical connector for antenna replacement      |
| <input type="checkbox"/>            | The antenna has to be professionally installed (please provide method of installation) |

Please refer to the attached document Internal Photos to show the antenna

Test Report No.: 25112701-RF-US-02

#### **4. Pictures of Test Arrangements**

Please refer to the attached file (Test Setup Photo).

**5. Test Instruments**

| Equipment                        | Manufacturer  | Model No. | Serial No.   | Next Cal. Date |
|----------------------------------|---------------|-----------|--------------|----------------|
| Spectrum                         | Keysight      | N9020A    | MY51240612   | 2026-07-23     |
| Power Meter<br>10Hz~18GHz        | Tonscend      | JS0806-2  | 188060126    | 2026-07-23     |
| Spectrum Analyzer                | Rohde&Schwarz | FSV-40N   | 101783       | 2026-07-23     |
| Signal generator                 | Keysight      | E4421     | GB40051020   | 2026-05-18     |
| Universal Switch<br>Control Unit | Rohde&Schwarz | CMW500    | 12010002k50  | 2026-07-23     |
| Humidity tester                  | JingcAronng   | GSP-8A    | CMA22B000592 | 2026-07-28     |
| Test Software                    | Tonscend      | JS0806-2  | 188060126    | 2026-07-23     |

Note: 1. The calibration interval of the above test instruments is 12 months.  
2. The test was performed in RF Chamber.

**Appendix – Information on The Testing Laboratories**

We, [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Contact Tel: [0769-85598986](tel:0769-85598986)

Email: [service-hs@lyns-tci.com](mailto:service-hs@lyns-tci.com)

Web Site: [www.lyns-tci.com](http://www.lyns-tci.com)

--- END ---