

承認書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER: **Shenzhen ZheRui Technology Co., LTD.**

客 戶 料 號:
CUST P/N:

音 澤 料 號:
FINE P/N: **G43*0.8-20.5-0.08*60P-10TS-6.8UH-W40-L13MM+BJ**

產 品 型 號:
DESC: **Φ43MMX0.8MM**

日 期:
DATE: **2025/07/02**

版 本:
Version: **A.0**

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	但可清	但可清	

Dongguan Yinze Electronic Technology Co., LTD. Factory

**Address: Dongguan City Chashan Town Xinghan Road (Chuangfu Center City) 2
building No.901**

TEL: 18617251159


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	G43*0.8-20.5-0.08*60P-10TS- 6.8UH-W40-L13MM+BJ	版本 Rev: A.0	客戶 CUST:	喆瑞
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

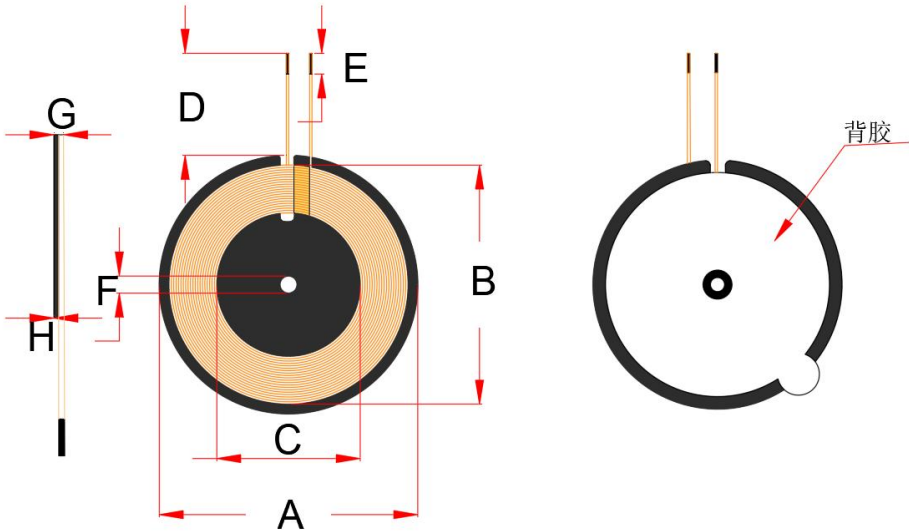

A	43±0.5mm
B	38.3±0.5mm
C	20.5±0.5mm
D	13±2mm
E	3±2mm
F	5.3±0.2mm
G	1.6±0.1mm
H	0.8±0.05mm
J	
K	

二、原理图 SCHEMATIC DIAGRAM:

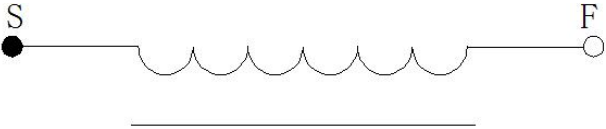

- 注:
- 交叉出线;
 - 线圈贴 43mm 开槽磁片, 磁片尺寸 43±0.5mm, 厚度为 0.8±0.05mm
 - 磁片背面贴背胶

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*60P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤95mΩ	100KHz/1.0V	LCZ METER 1062B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 2025.07.02	