




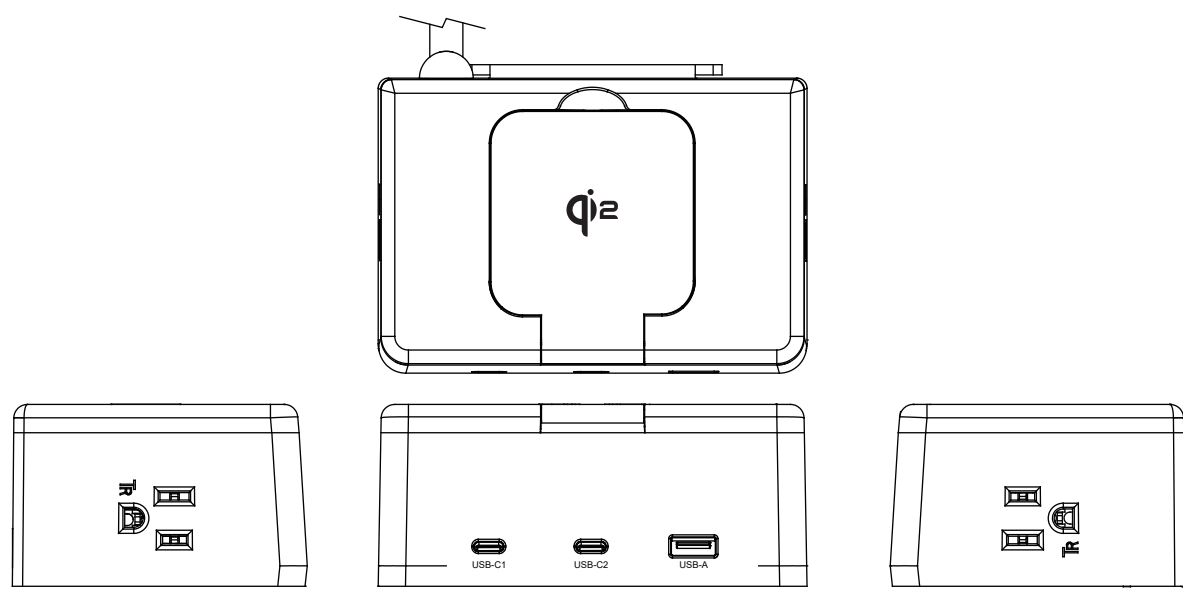

Model: DOCK-170*-WC15W01
Rated Input: 125V ~ 60Hz, 15A
- AC Output (AC only): 125V ~ 60Hz, 15A
- AC Output (while using USB or Wireless Charger): 125V ~ 60Hz, 13.6A
Wireless charger: 15W Max.

USB Output: Total 66W Max.
USB Charger: (USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15V 3.0A; 20.0V 3.3A; 66W Max.
(USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15V 3.0A; 20.0V 2.25A; 45W Max.
(USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A; 15V 2.0A; 20.0V 1.5A; 30W Max.
(USB-C2) 5.0V 3.0A; 9.0V 2.22A; 12.0V 1.66A; 15V 1.33A; 20.0V 1.0A; 20W Max.
(USB-C2) 5.0V 3.0A; 9.0V 2.0A; 12.0V 1.5A; 15V 1.2A; 20.0V 0.9A; 18W Max.
(USB-C1 / C2) 5.0V 3.0A; 15W Max.
(USB-A) 5.0V 3.0A; 9.0V 2.0A; 12.0V 1.5A; 18W Max.


CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK - USE ONLY INDOORS AND IN DRY LOCATIONS.
ATTENTION: POUR NE PAS COMPROMETTRE LA PROTECTION CONTRE LE RISQUE DE CHOC ELECTRIQUE
— UTILISER A L'INTERIEUR SEULEMENT ET UNIQUEMENT DANS DES EMPLACEMENTS SEC.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov

US Pat.# USD1023949S1 | CN Pat.# CN212162180U | CONFORMS TO UL STD. 962A
CERTIFIED TO CSA STD. C22.2#308 | FCC ID: 2AR5U-DOCK170XWC15W | IC: 28218-DOCK17WC15W | HVIN:DOCK-170*-WC15W01

Mfg. Date: Jan 2025





Model: DOCK-1700-ASBSOCCSDDD
Rated Input: 125V ~ 60Hz, 15A
- AC Output (AC only): 125V ~ 60Hz, 15A
- AC Output (while using USB or Wireless Charger): 125V ~ 60Hz, 13.6A
Wireless charger: 15W Max.

USB Output: Total 66W Max.
USB Charger: (USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15V 3.0A; 20.0V 3.3A; 66W Max.
(USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15V 3.0A; 20.0V 2.25A; 45W Max.
(USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A; 15V 2.0A; 20.0V 1.5A; 30W Max.
(USB-C2) 5.0V 3.0A; 9.0V 2.22A; 12.0V 1.66A; 15V 1.33A; 20.0V 1.0A; 20W Max.
(USB-C2) 5.0V 3.0A; 9.0V 2.0A; 12.0V 1.5A; 15V 1.2A; 20.0V 0.9A; 18W Max.
(USB-C1 / C2) 5.0V 3.0A; 15W Max.
(USB-A) 5.0V 3.0A; 9.0V 2.0A; 12.0V 1.5A; 18W Max.


CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK - USE ONLY INDOORS AND IN DRY LOCATIONS.
ATTENTION: POUR NE PAS COMPROMETTRE LA PROTECTION CONTRE LE RISQUE DE CHOC ELECTRIQUE
— UTILISER A L'INTERIEUR SEULEMENT ET UNIQUEMENT DANS DES EMPLACEMENTS SEC.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov

US Pat.# USD1023949S1 | CN Pat.# CN212162180U | CONFORMS TO UL STD. 962A
CERTIFIED TO CSA STD. C22.2#308 | FCC ID: 2AR5U-DOCK170XWC15W | IC: 28218-DOCK17WC15W | HVIN:DOCK-170*-WC15W01

Mfg. Date: Jan 2025





Model: DOCK-1705-ASBSOCCSDDD
Rated Input: 125V ~ 60Hz, 15A
- AC Output (AC only): 125V ~ 60Hz, 15A
- AC Output (while using USB or Wireless Charger): 125V ~ 60Hz, 13.6A
Wireless charger: 15W Max.

USB Output: Total 66W Max.
USB Charger: (USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15V 3.0A; 20.0V 3.3A; 66W Max.
(USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15V 3.0A; 20.0V 2.25A; 45W Max.
(USB-C1 / C2) 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A; 15V 2.0A; 20.0V 1.5A; 30W Max.
(USB-C2) 5.0V 3.0A; 9.0V 2.22A; 12.0V 1.66A; 15V 1.33A; 20.0V 1.0A; 20W Max.
(USB-C2) 5.0V 3.0A; 9.0V 2.0A; 12.0V 1.5A; 15V 1.2A; 20.0V 0.9A; 18W Max.
(USB-C1 / C2) 5.0V 3.0A; 15W Max.
(USB-A) 5.0V 3.0A; 9.0V 2.0A; 12.0V 1.5A; 18W Max.

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK - USE ONLY INDOORS AND IN DRY LOCATIONS.
ATTENTION: POUR NE PAS COMPROMETTRE LA PROTECTION CONTRE LE RISQUE DE CHOC ELECTRIQUE
— UTILISER A L'INTERIEUR SEULEMENT ET UNIQUEMENT DANS DES EMPLACEMENTS SEC.

Do not install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and the electrical service panel. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov

US Pat.# USD1023949S1 | CN Pat.# CN212162180U | CONFORMS TO UL STD. 962A
CERTIFIED TO CSA STD. C22.2#308 | FCC ID: 2AR5U-DOCK170XWC15W | IC: 28218-DOCK17WC15W | HVIN:DOCK-170*-WC15W01

Mfg. Date: Jan 2025

