DIMENSIONS (mm)

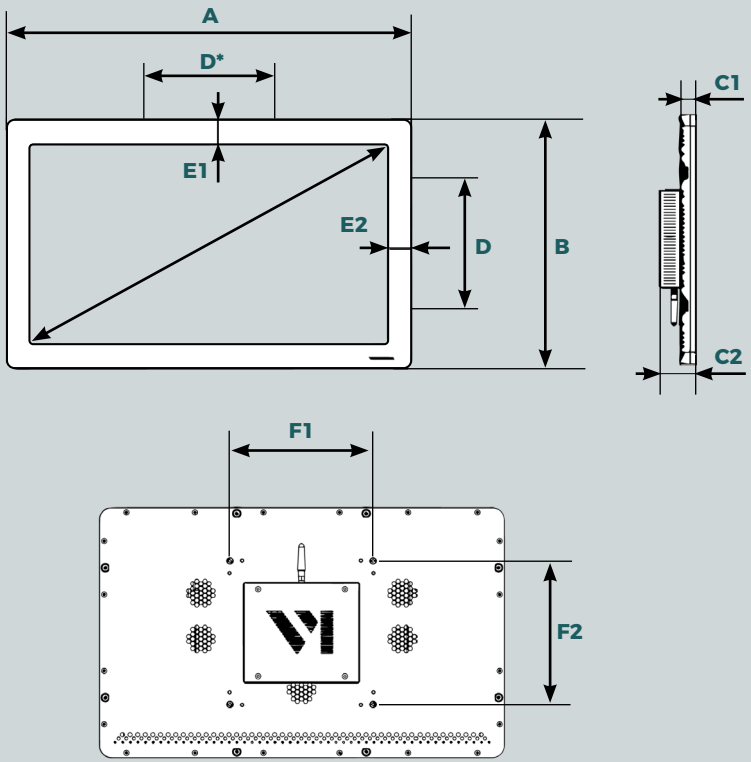

Diagonal	A	B	C1	C2	D	E1	E2	F1	F2
21.5"	530	327	24.5	53	170	30	28	200	200
24"	581	358	24.5	53	170	30	28	200	200

* D is the distance between suspension cables.



* VM LIGHT&PLAY 3 21.5" and 24" come with 4 clips VM TWO CLIP SECURE FIX

50 Route de la Reine 92 100 Boulogne-Billancourt FRANCE - +33 (0)1 49 21 00 61
contact@vitrinemedia.com
www.vitrinemedia.com

vitrinemedia

VM LIGHT&PLAY 3

Seamlessly integrated with LED light boxes, the VM LIGHT&PLAY 3 brings dynamic content such as videos or smart mandates.

VARIOUS CONFIGURATIONS

It is available in two versions: 21.5-inch LCD screen with a brightness of 2000 nits and 24-inch in 1500 nits. Both formats can be installed in portrait and landscape.

EASY MANAGEMENT OF YOUR CONTENT

Thanks to our **Visibble Display**® solution, you can easily create a playlist from any browser and send it via Wi-Fi directly to your VM LIGHT&PLAY 3 screen.

Visibble Display® will allow you to easily manage and change the content you want to display on your screens depending on your sales needs & company news.

COMPATIBILITY

VM LIGHT&PLAY 3 is compatible with most of Vitrinemedia's fixation systems: VM CABLE, VM WALL, VM MOBILE STAND EASY CLIP, VM BOX PREMIUM, VM Z LIGHT&PLAY and VM DOCK. It can also be installed on a standard VESA mounting system (200x200mm).

Colors
Black, Silver, Chrome

Configurations
21.5" 2000 nits
24" 1500 nits

Screen resolution
1920x1080 (FULL HD)

Connexion
Wi-Fi / RJ45

Operates up to an ambient temperature of 50 ° C maximum.

OVERVIEW

CABLES provided with the VM LIGHT&PLAY 3:

- 51,5mm
- 64mm
- 88mm

For customized lengths, use the
PAIR OF CABLES ADJUSTABLE (1035019001)
to be purchased additionaly.

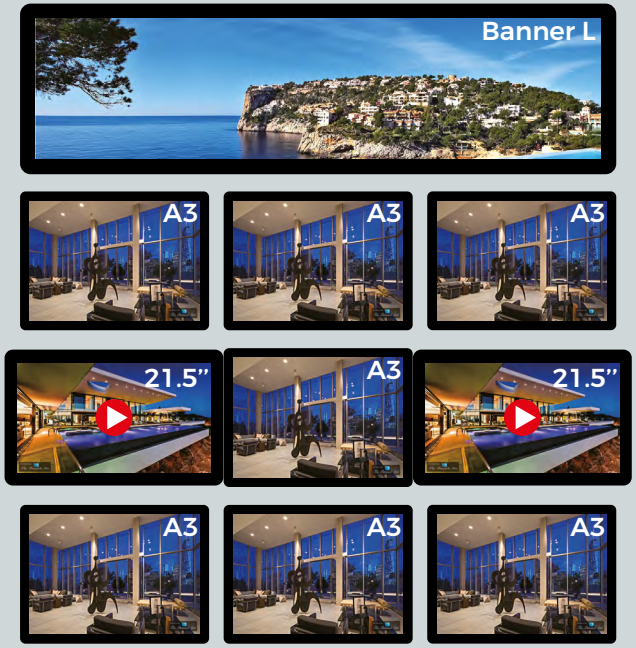

51,5MM CABLES provided with VM LIGHT&PLAY 3

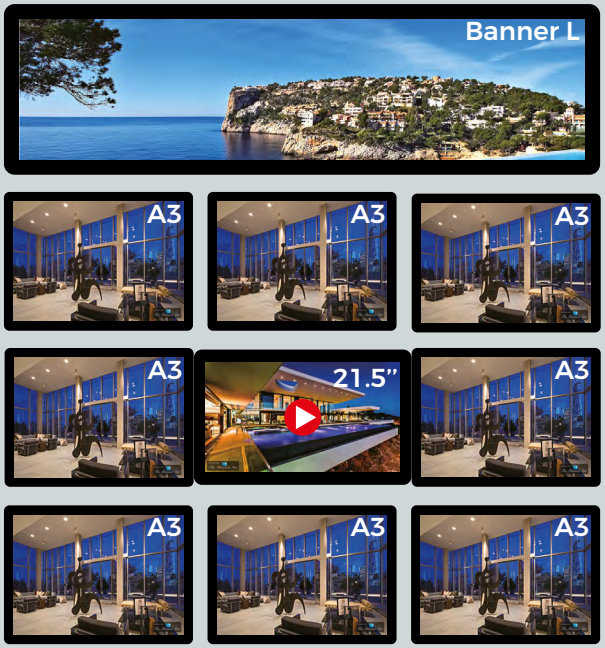

51,5MM CABLES provided with VM LIGHT&PLAY 3

Distance between VM LIGHT&PLAY 3: D=224mm

Use the PAIR OF CABLES ADJUSTABLE (1035019001) to link VM LIGHT&PLAY 3

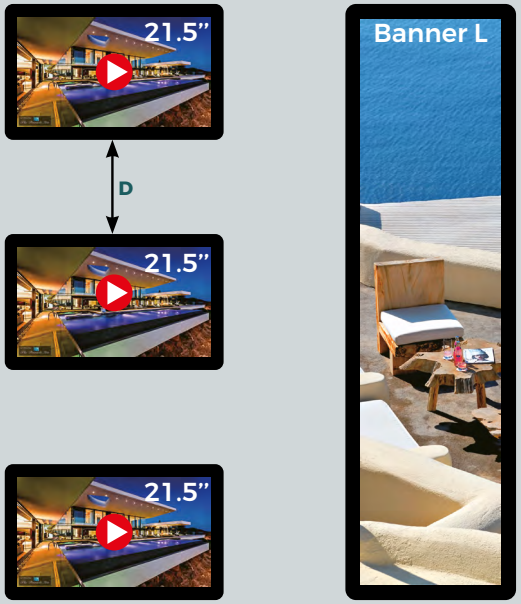

D=236.5mm

Use the PAIR OF CABLES ADJUSTABLE (1035019001) to link VM LIGHT&PLAY 3

D=135mm

Use the PAIR OF CABLES ADJUSTABLE (1035019001) to link VM LIGHT&PLAY 3

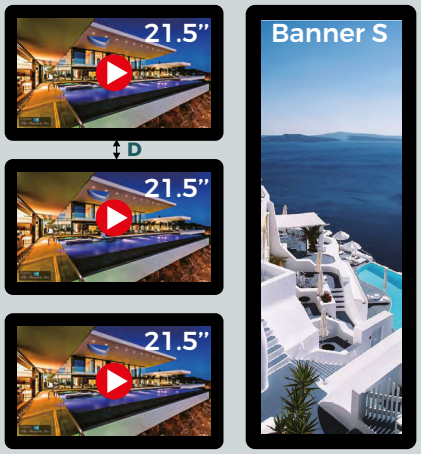

D=51.5mm

51,5MM CABLES provided with VM LIGHT&PLAY 3

Distance between VM LIGHT&PLAY 3: D=140mm

Use the PAIR OF CABLES ADJUSTABLE (1035019001) to link VM LIGHT&PLAY 3

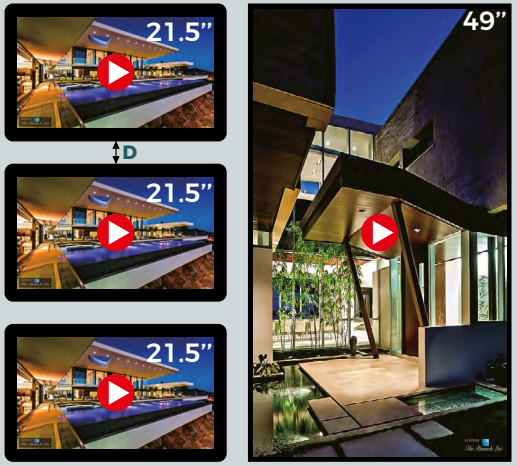

D=51.5mm

51,5MM CABLES provided with VM LIGHT&PLAY 3

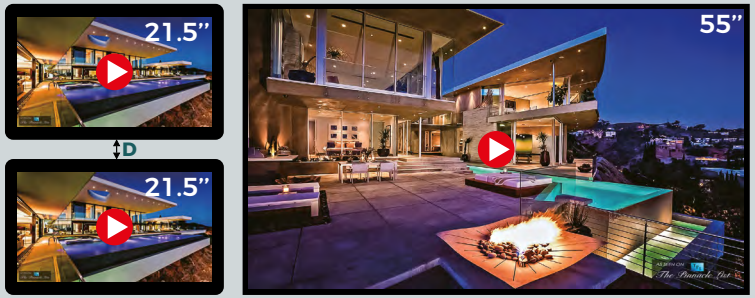

D=51.5mm

51,5MM CABLES provided with VM LIGHT&PLAY 3

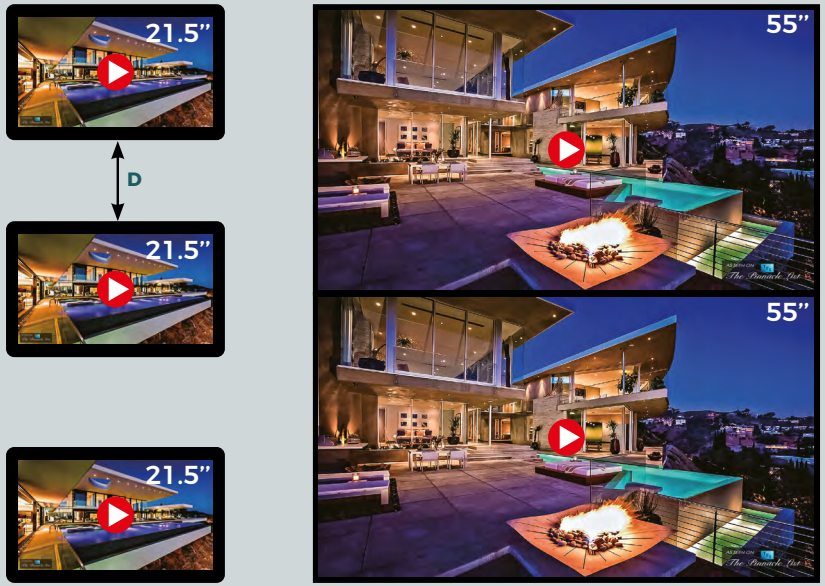

D=216.5mm

Use the PAIR OF CABLES ADJUSTABLE (1035019001) to link VM LIGHT&PLAY 3

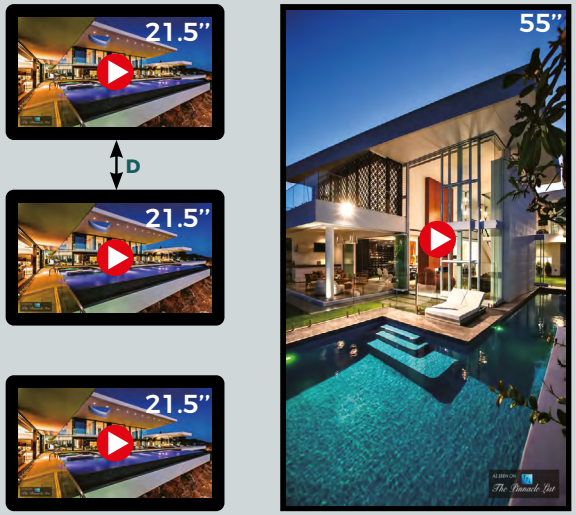

D=127.5mm

Use the PAIR OF CABLES ADJUSTABLE (1035019001) to link VM LIGHT&PLAY 3

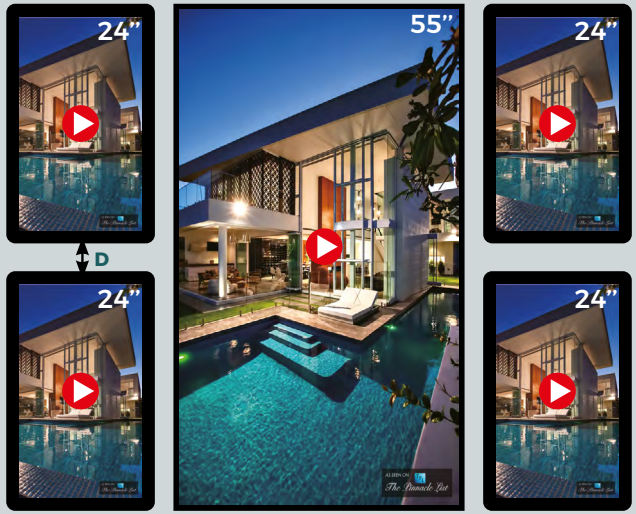

D=64mm

64MM CABLES provided with VM LIGHT&PLAY 3

Club Med
EDEN TOUR
FRAM
HAVAS VOYAGES
VOUS
EMMENER
PLUS LOIN

VITRINEMEDIA
HAVAS VOYAGES
La République Dominicaine
1049
HAVAS VOYAGES
Croisière aux Caraïbes
999
HAVAS VOYAGES
Envie de
soleil
Offrez-vous une dose de vitamine D
pour recharger vos batteries !

Warning:
Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user ’ s authority to operate the equipment.

NOTE:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement:
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC Radiation exposure limit set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.