



TEST REPORT

Report No. : CHTEW19010133

Report verification:



Project No. : SHT1901011701EW

FCC ID : 2AR6HIMP-R01W

Applicant's name : Inspire Mobile

Address : Rm1412, Daeryung Techno-Town 15th, 401, Simin-daero, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea

Manufacturer : Inspire Mobile

Address : Rm1412, Daeryung Techno-Town 15th, 401, Simin-daero, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea

Test item description : Rugged IP PTT

Trade Mark : IM-550

Model/Type reference : IM-550

Listed Model(s) : -

Standard : FCC 47 CFR Part2.1093
IEEE 1528: 2013

Date of receipt of test sample : Jan. 08, 2019

Date of testing : Jan. 09, 2019- Jan. 21, 2019

Date of issue : Jan. 24, 2019

Result : PASS

Compiled by

(position+printedname+signature).... : File administrators:Xiaodong Zhao

Xiaodong Zhao

Supervised by

(position+printedname+signature).... : Test Engineer: Xiaodong Zhao

Xiaodong Zhao

Approved by

(position+printedname+signature).... : Manager: Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Test Standards and Report version</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>Summary</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
<u>3.</u>	<u>Test Environment</u>	<u>6</u>
3.1.	Test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	6
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>7</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>8</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>9</u>
6.1.	SAR Measurement Set-up	9
6.2.	DASY5 E-field Probe System	10
6.3.	Phantoms	11
6.4.	Device Holder	11
<u>7.</u>	<u>SAR Test Procedure</u>	<u>12</u>
7.1.	Scanning Procedure	12
7.2.	Data Storage and Evaluation	14
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>16</u>
8.1.	Head Position	16
8.2.	Body Position	17
8.3.	Hotspot Mode Exposure conditions	17
<u>9.</u>	<u>Dielectric Property Measurements & System Check</u>	<u>18</u>
9.1.	Tissue Dielectric Parameters	18
9.2.	SAR System Check	19
<u>10.</u>	<u>SAR Exposure Limits</u>	<u>33</u>
<u>11.</u>	<u>Conducted Power Measurement Results</u>	<u>34</u>
<u>12.</u>	<u>Maximum Tune-up Limit</u>	<u>53</u>
<u>13.</u>	<u>Antenna Location</u>	<u>61</u>
<u>14.</u>	<u>SAR Measurement Results</u>	<u>62</u>
<u>15.</u>	<u>Simultaneous Transmission analysis</u>	<u>90</u>
<u>16.</u>	<u>TestSetup Photos</u>	<u>103</u>
<u>17.</u>	<u>External Photos of the EUT</u>	<u>105</u>

1. Test Standards and Report version

1.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[648474 D04 Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

1.2. Report version

Revision No.	Date of issue	Description
N/A	2019-01-24	Original

2. Summary

2.1. Client Information

Applicant:	Inspire Mobile
Address:	Rm1412, Daeryung Techno-Town 15th, 401, Simin-daero, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Manufacturer:	Inspire Mobile
Address:	Rm1412, Daeryung Techno-Town 15th, 401, Simin-daero, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea

2.2. Product Description

Name of EUT:	Rugged IP PTT			
Trade Mark:	IM-550			
Model No.:	IM-550			
Listed Model(s):	-			
Power supply:	DC 3.8V			
Device Category:	Portable			
Product stage:	Production unit			
RF Exposure Environment:	General Population/Uncontrolled			
Hardware version:	K2_US_Main_Rev1.0			
Software version:	D08			
Device Dimension:	Overall (Length x Width x Thickness):136 x 60 x 18mm			
Maximum SAR Value				
Separation Distance:	Head: 0mm Body: 10mm			
Max Report SAR Value (1g):	Test location:	PCE	DTS	Simultaneous TX
	Head:	0.671 W/kg	0.135 W/kg	0.806 W/kg
	Body:	0.789 W/kg	0.065 W/kg	0.854 W/kg
	Hotspot:	0.789 W/kg	0.065 W/kg	0.854 W/kg
GSM				
Support Band:	GSM850,PCS1900			
Modulation Type:	GSM/GPRS/EGPRS:GMSK EGPRS:8PSK			
GPRS Class:	12			
EGPRS Class:	12			
Antenna Type:	FPC			
WCDMA				
Operation Band:	WCDMA Band II,WCDMA Band IV,WCDMA Band V			
Power Class:	Class 3			
Modulation Type:	QPSK			
DC-HSUPA Release Version:	Not Supported			
Antenna Type:	FPC			

LTE	
Operation Band:	FDD Band 2,FDD Band 4,FDD Band 5,FDD Band 12,FDD Band 13,FDD Band 17,FDD Band 30
Power Class:	Class 3
Modulation Type:	QPSK,16QAM
Antenna Type:	FPC
WIFI 2.4G	
Supported Type:	802.11b/802.11g/802.11n(HT20)/802.11n(HT40)
Modulation Type:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation Frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel Number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel Separation:	5MHz
Antenna Type:	FPC
Bluetooth	
Version:	BT4.0+EDR
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	79
Channel Separation:	1MHz
Antenna Type:	FPC
Bluetooth	
Version:	BT4.0+BLE
Modulation:	GFSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	40
Channel Separation:	2MHz
Antenna Type:	FPC
Remark: 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power 2. The Test EUT support two SIM card(SIM1,SIM2),so all the tests are performed at each SIM card (SIM1,SIM2) mode, the datum recorded is the worst case for all the mode at SIM1 Card mode.	

3. Test Environment

3.1. Test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

3.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEx	SPEAG	DAE4	1549	2018/04/25	2019/04/24
●	E-field Probe	SPEAG	EX3DV4	7494	2018/02/26	2019/02/25
●	E-field Probe	SPEAG	EX3DV4	7346	2018/02/28	2019/02/27
●	Universal Radio Communication Tester	R&S	CMW500	137681	2018/07/11	2019/07/10
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	2018/03/01	2019/02/28
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	2018/03/01	2019/02/28
●	Network analyzer	Keysight	E5071C	MY46733048	2018/09/19	2019/09/18
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2018/02/21	2021/02/20
○	System Validation Dipole	SPEAG	D450V3	1102	2018/02/23	2021/02/22
●	System Validation Dipole	SPEAG	D750V3	1180	2018/02/07	2021/02/06
●	System Validation Dipole	SPEAG	D835V2	4d238	2018/02/19	2021/02/18
●	System Validation Dipole	SPEAG	D1750V2	1164	2018/02/06	2021/02/05
●	System Validation Dipole	SPEAG	D1900V2	5d226	2018/02/22	2021/02/21
●	System Validation Dipole	SPEAG	D2300V2	1092	2018/12/04	2021/12/03
●	System Validation Dipole	SPEAG	D2450V2	1009	2018/02/05	2021/02/04
○	System Validation Dipole	SPEAG	D2600V2	1150	2018/02/05	2021/02/04
○	System Validation Dipole	SPEAG	D5GHzV2	1273	2018/02/21	2021/02/20
●	Signal Generator	R&S	SMB100A	114360	2018/08/21	2019/08/20
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2018/08/21	2019/08/20
●	Power sensor	R&S	NRP18A	101011	2018/08/21	2019/08/20
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2018/11/15	2019/11/14
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2018/11/15	2019/11/14
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2018/11/15	2019/11/14
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2018/11/15	2019/11/14

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

System Check Uncertainty										
No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.0%	N	1	1	1	6.0%	6.0%	∞
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	∞
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	∞
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	∞
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	∞
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	∞
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
14	Max.SAR evaluation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
System validation source-dipole										
15	Deviation of experimental dipole from numerical dipole	A	1.58%	N	1	1	1	1.58%	1.58%	∞
16	Dipole axis to liquid distance	A	1.35%	N	1	1	1	1.35%	1.35%	∞
17	Input power and SAR drift	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	∞
22	Liquid cpermittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	∞
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	8.80%	8.79%	∞
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		R	K=2	/	/	17.59%	17.58%	∞

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

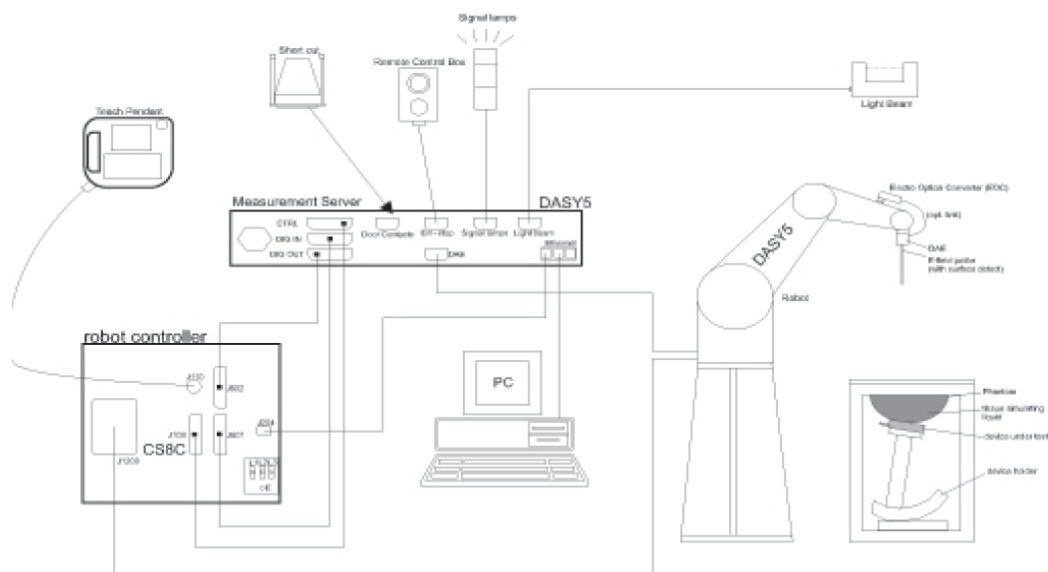

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



● Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

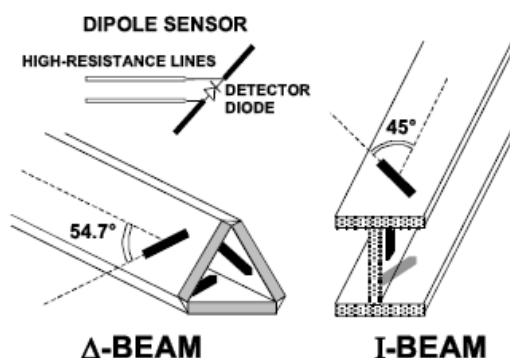

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.



SAM-Twin Phantom



ELI Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. **SAR Test Procedure**

7.1. **Scanning Procedure**

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom


8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


The vertical centreline passes through two points on the front side of the handset: the midpoint of the width W_t of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width W_b of the bottom of the handset (point B).

The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

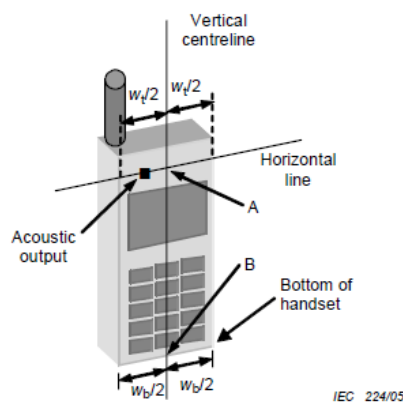


Figures 5a

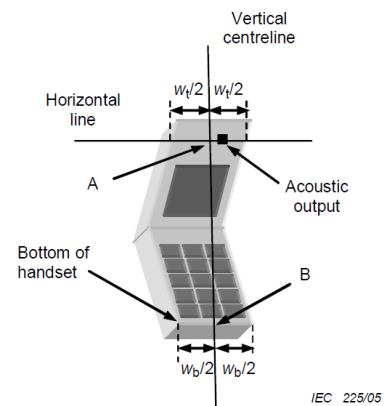

Figures 5b


W_t	Width of the handset at the level of the acoustic
W_b	Width of the bottom of the handset
A	Midpoint of the width w_t of the handset at the level of the acoustic output
B	Midpoint of the width w_b of the bottom of the handset

Cheek position

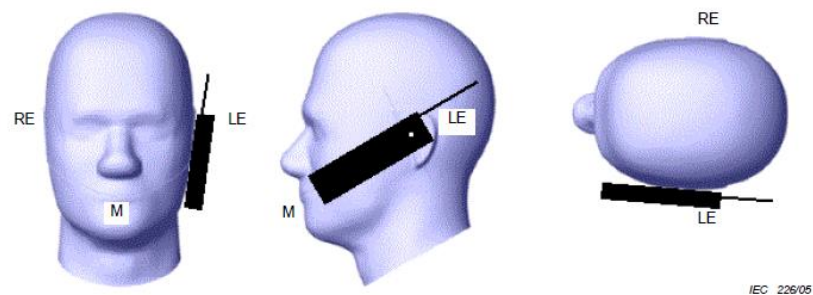

Picture 2 Cheek position of the wireless device on the left side of SAM

Tilt position

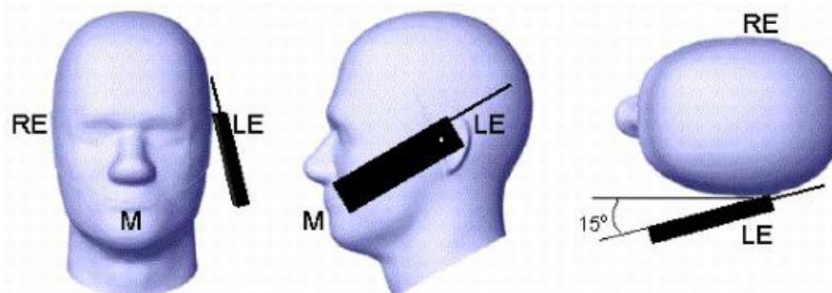


Picture 3 Tilt position of the wireless device on the left side of SAM

8.2. Body Position

Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics.


Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance $\leq 5\text{mm}$ to support compliance.

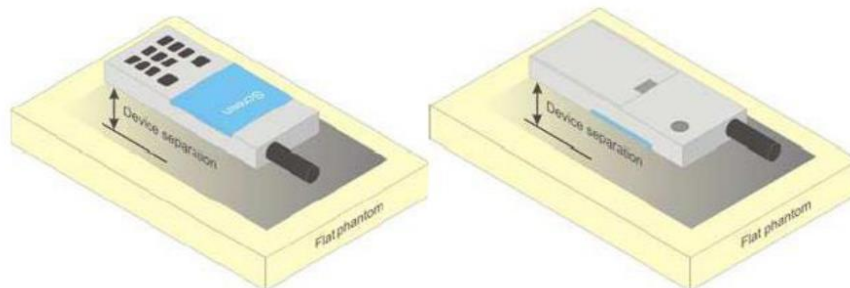

Picture 4 Test positions for body-worn devices

8.3. Hotspot Mode Exposure conditions

The hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either 10 mm or that used in the body-worn accessory configuration, whichever is less for devices with dimension $> 9\text{ cm} \times 5\text{ cm}$. For smaller devices with dimensions $\leq 9\text{ cm} \times 5\text{ cm}$ because of a greater potential for next to body use a test separation of $\leq 5\text{ mm}$ must be used.

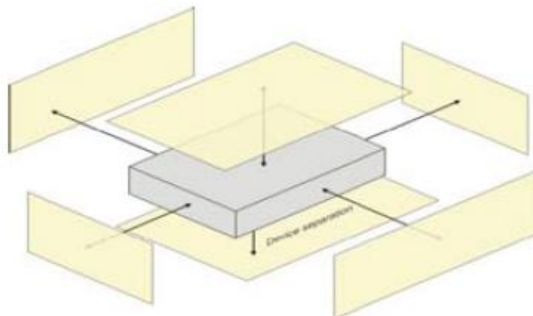

Picture 5 Test positions for Hotspot Mode

9. Dielectric Property Measurements & System Check

9.1. Tissue Dielectric Parameters

The liquid has previously been proven to be suited for worst-case. It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

Tissue dielectric parameters for Head and Body				
Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (s/m)	ϵ_r	σ (s/m)
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2300	39.5	1.67	52.9	1.81
2450	39.2	1.80	52.7	1.95

Check Result:

Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	42.90	0.89	0.90	2.39%	1.24%	±5%	22	2019-01-15
835	41.50	42.50	0.90	0.93	2.41%	3.56%	±5%	22	2019-01-09
1750	40.10	41.93	1.37	1.38	4.56%	0.36%	±5%	22	2019-01-11
1900	40.00	41.67	1.40	1.47	4.16%	4.71%	±5%	22	2019-01-13
2300	39.50	39.96	1.67	1.70	1.15%	1.68%	±5%	22	2019-01-17
2450	39.20	40.96	1.80	1.84	4.48%	2.11%	±5%	22	2019-01-18


Dielectric performance of Body tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	55.50	55.63	0.96	0.94	0.23%	-2.60%	±5%	22	2019-01-16
835	55.20	55.40	0.97	0.97	0.36%	-0.41%	±5%	22	2019-01-10
1750	53.40	53.91	1.49	1.44	0.96%	-3.36%	±5%	22	2019-01-12
1900	53.30	53.72	1.52	1.55	0.79%	1.97%	±5%	22	2019-01-14
2300	52.90	53.33	1.81	1.82	0.81%	0.61%	±5%	22	2019-01-17
2450	52.70	53.03	1.95	2.00	0.63%	2.56%	±5%	22	2019-01-18

9.2. SAR System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is a simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

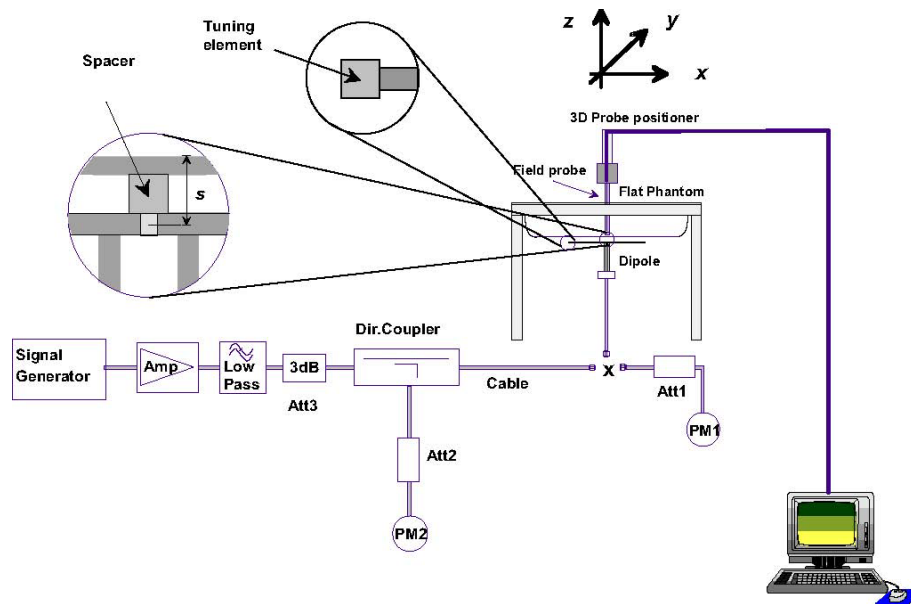

System Performance Check Setup

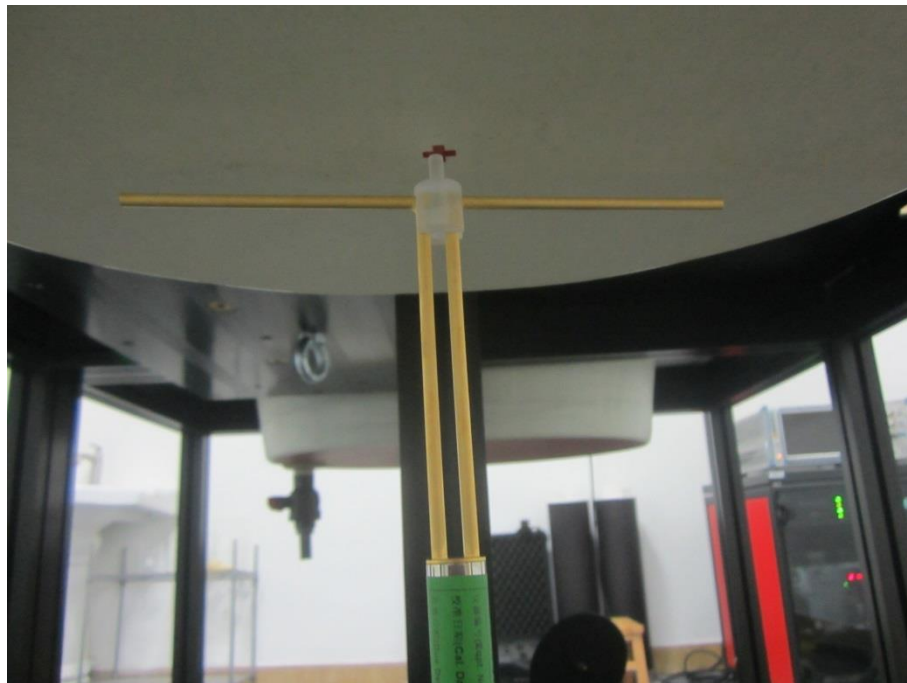


Photo of Dipole Setup

Check Result:

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
750	8.22	8.48	2.12	5.39	5.60	1.40	3.16%	3.90%	±10%	22	2019-01-15
835	9.51	9.92	2.48	6.15	6.52	1.63	4.31%	6.02%	±10%	22	2019-01-09
1750	36.60	36.24	9.06	19.40	19.44	4.86	-0.98%	0.21%	±10%	22	2019-01-11
1900	40.30	41.60	10.40	21.10	21.68	5.42	3.23%	2.75%	±10%	22	2019-01-13
2300	49.60	51.20	12.80	23.80	24.20	6.05	3.23%	1.68%	±10%	22	2019-01-17
2450	51.50	50.40	12.60	24.10	23.44	5.86	-2.14%	-2.74%	±10%	22	2019-01-18

Body											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
750	8.55	8.40	2.10	5.68	5.60	1.40	-1.75%	-1.41%	±10%	22	2019-01-16
835	9.64	10.08	2.52	6.32	6.64	1.66	4.56%	5.06%	±10%	22	2019-01-10
1750	36.70	37.56	9.39	19.50	20.16	5.04	2.34%	3.38%	±10%	22	2019-01-12
1900	39.80	41.60	10.40	20.90	21.68	5.42	4.52%	3.73%	±10%	22	2019-01-14
2300	47.20	47.20	11.80	22.70	22.52	5.63	0.00%	-0.79%	±10%	22	2019-01-17
2450	49.40	50.00	12.50	23.30	23.32	5.83	1.21%	0.09%	±10%	22	2019-01-18

Plots of System Performance Check

System Performance Check-Head 750MHz

DUT: D750V3; Type: D750V3; Serial: 1180

Date: 2019-01-15

Communication System: UID 0, A-CW (0); Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.90$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(11.02, 11.02, 11.02); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7437)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.75 W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 58.45 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.4 W/kg

Maximum value of SAR (measured) = 2.82 W/kg

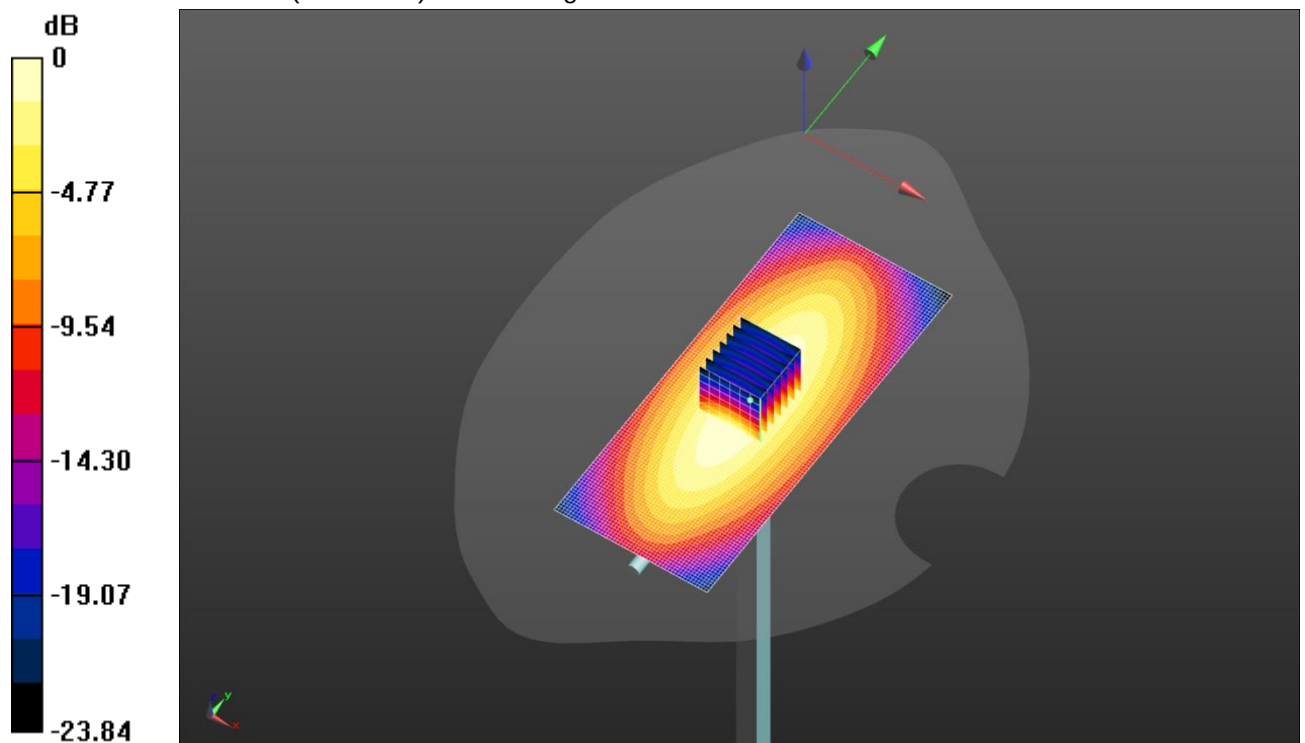

System Performance Check-Body 750MHz

DUT: D750V3; Type: D750V3; Serial: 1180

Date: 2019-01-16

Communication System: UID 0, CW (0); Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 55.625$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.87, 10.87, 10.87); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.11(7437)

Body/d=15mm,Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.80 W/kg


Body/d=15mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 57.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.4 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

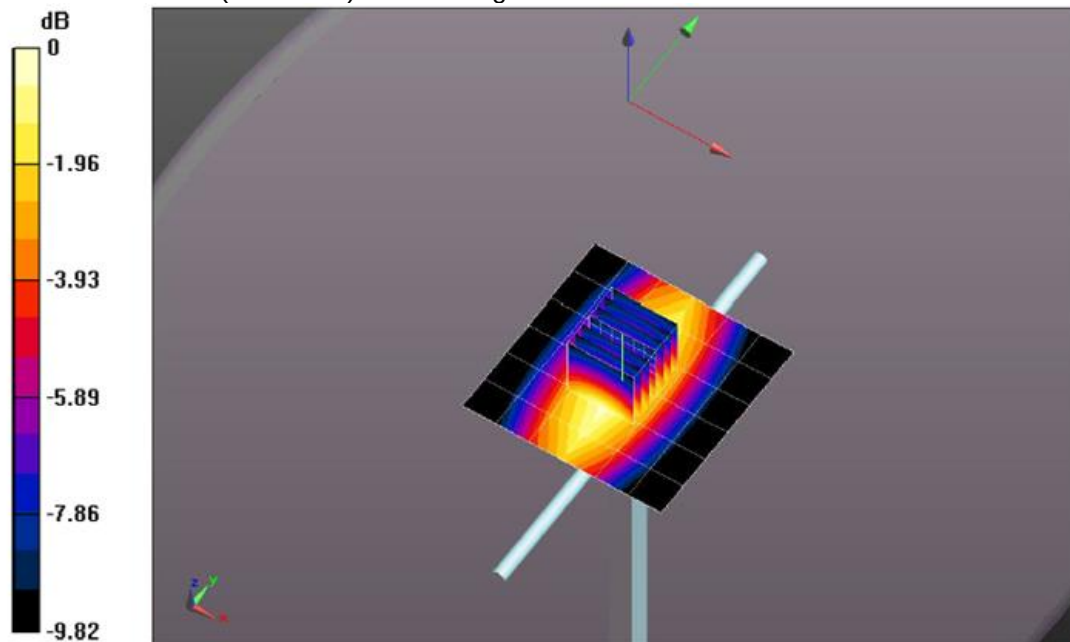

System Performance Check-Head 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2019-01-09


Communication System: UID 0, CW (0); Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 42.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.73, 10.73, 10.73); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1947
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

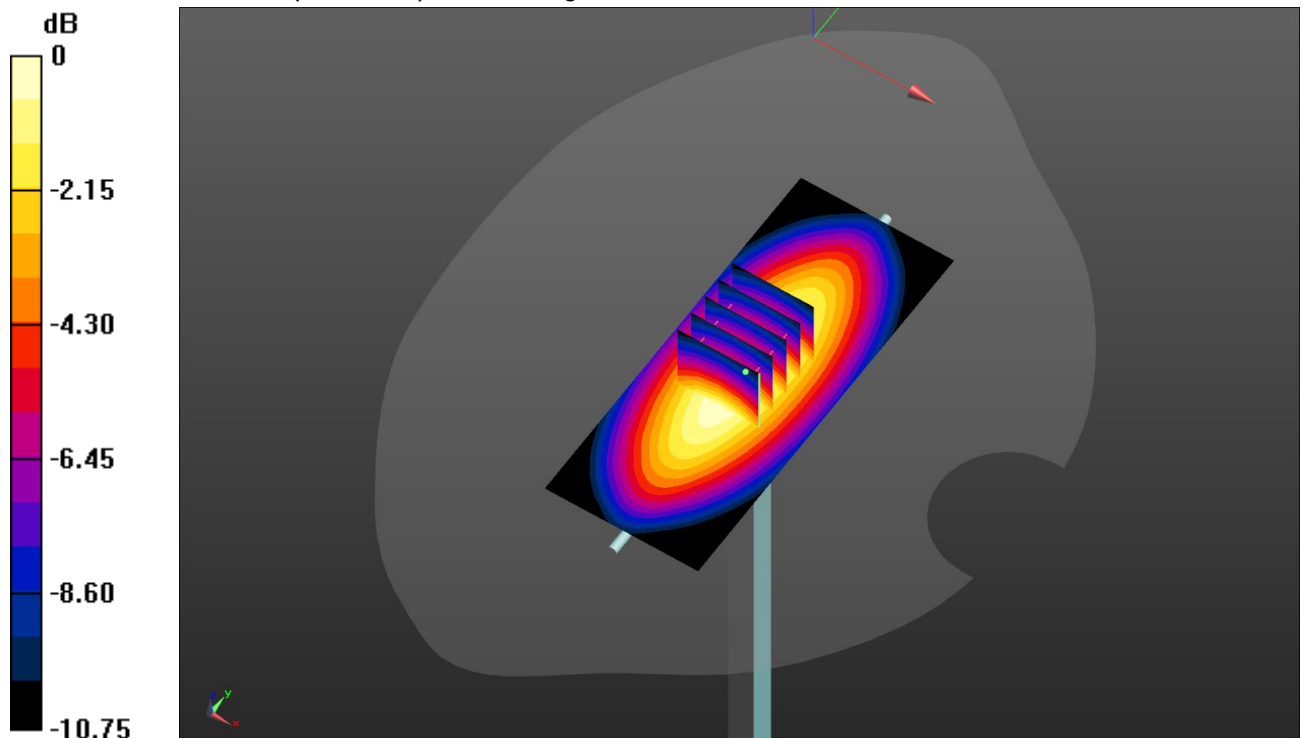Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 3.51 W/kg **Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 66.38 V/m ; Power Drift = -0.19 dB Peak SAR (extrapolated) = 3.78 W/kg **SAR(1 g) = 2.48 W/kg ; SAR(10 g) = 1.63 W/kg** Maximum value of SAR (measured) = 3.34 W/kg 

System Performance Check-Body 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2019-01-10

Communication System: UID 0, CW (0); Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 55.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.5, 10.5, 10.5); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body/d=15mm,Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.40 W/kg


Body/d=15mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 61.67 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 2.52 W/kg; SAR(10 g) = 1.66 W/kg

Maximum value of SAR (measured) = 3.44 W/kg

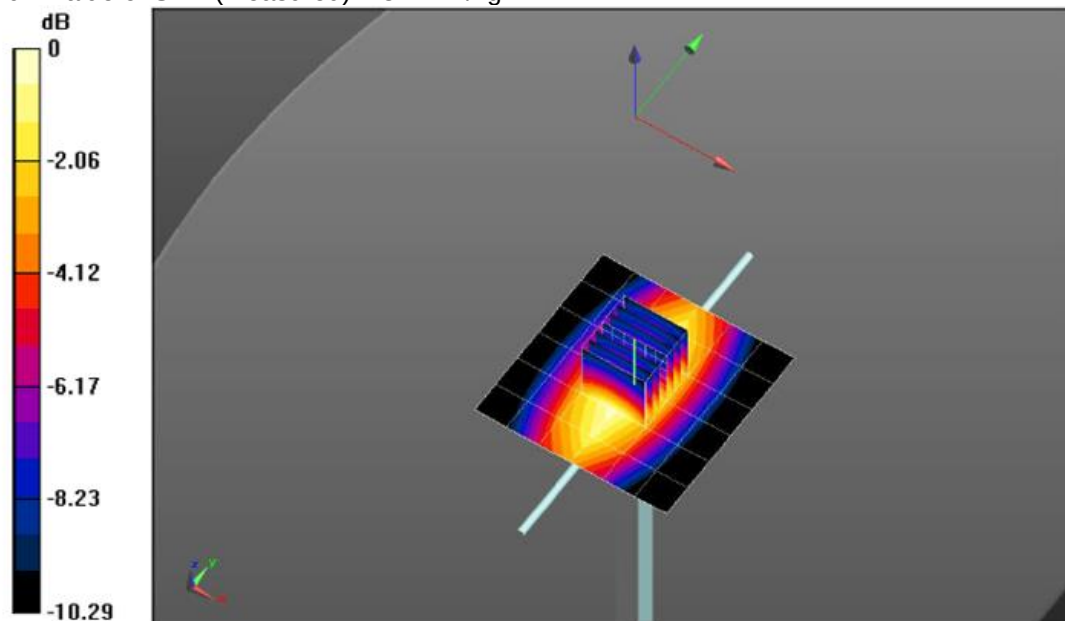

System Performance Check-Head 1750MHz

DUT: D1750V2; Type: D1750V2; Serial: 1164

Date: 2019-01-11

Communication System: UID 0, CW (0); Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 41.933$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(9.23, 9.23, 9.23); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1947
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Head/d=10mm,Pin=250mW/Area Scan (41x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 14.1 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 103.5 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.06 W/kg; SAR(10 g) = 4.86 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

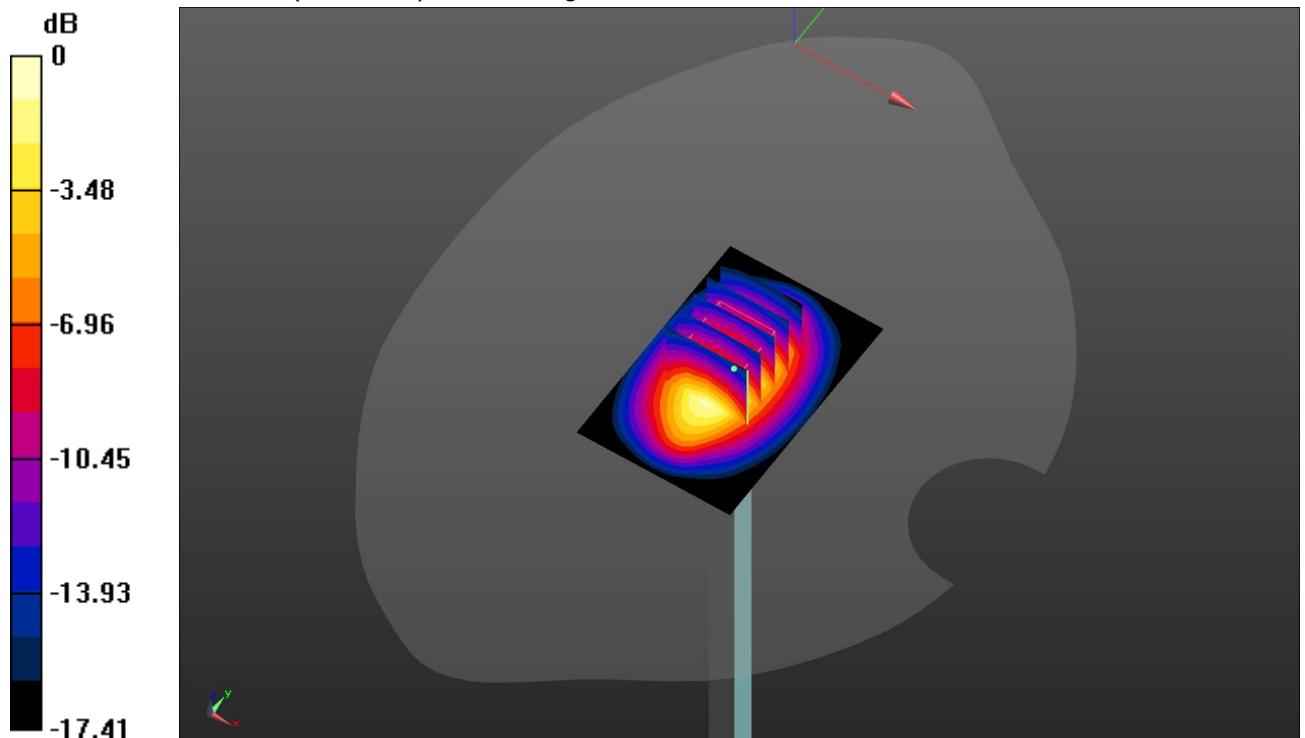

System Performance Check-Body 1750MHz

DUT: D1750V2; Type: D1750V2; Serial: 1164

Date: 2019-01-12

Communication System: UID 0, CW (0); Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 53.908$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.77, 8.77, 8.77); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body/d=10mm,Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 14.7 W/kg


Body/d=10mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 102.2 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.39 W/kg; SAR(10 g) = 5.04 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

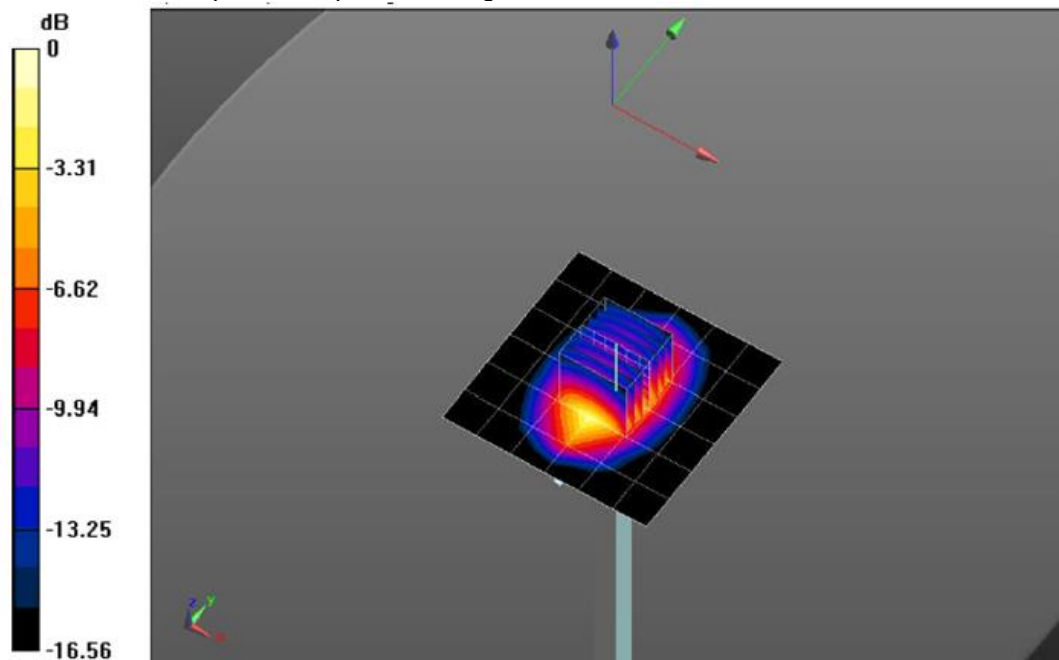

System Performance Check-Head 1900MHz

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date:2019-01-13

Communication System: UID 0, CW (0); Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.466$ S/m; $\epsilon_r = 41.665$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.83, 8.83, 8.83); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1947
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Head/d=10mm,Pin=250mW/Area Scan (41x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 17.1 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 112.4 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.42 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

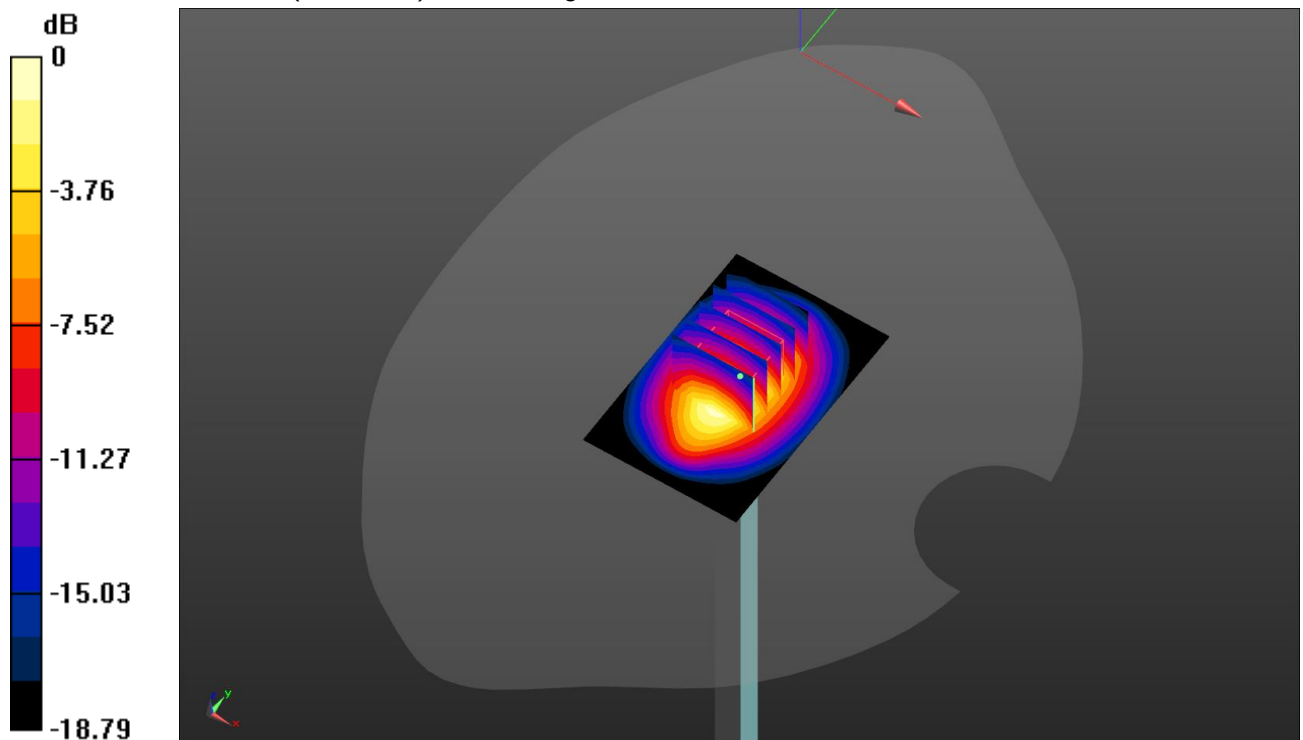

System Performance Check-Body 1900MHz

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date:2019-01-14

Communication System: UID 0, CW (0); Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.553$ S/m; $\epsilon_r = 53.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.42, 8.42, 8.42); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body/d=10mm,Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 16.4 W/kg


Body/d=10mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 105.9 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.42 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

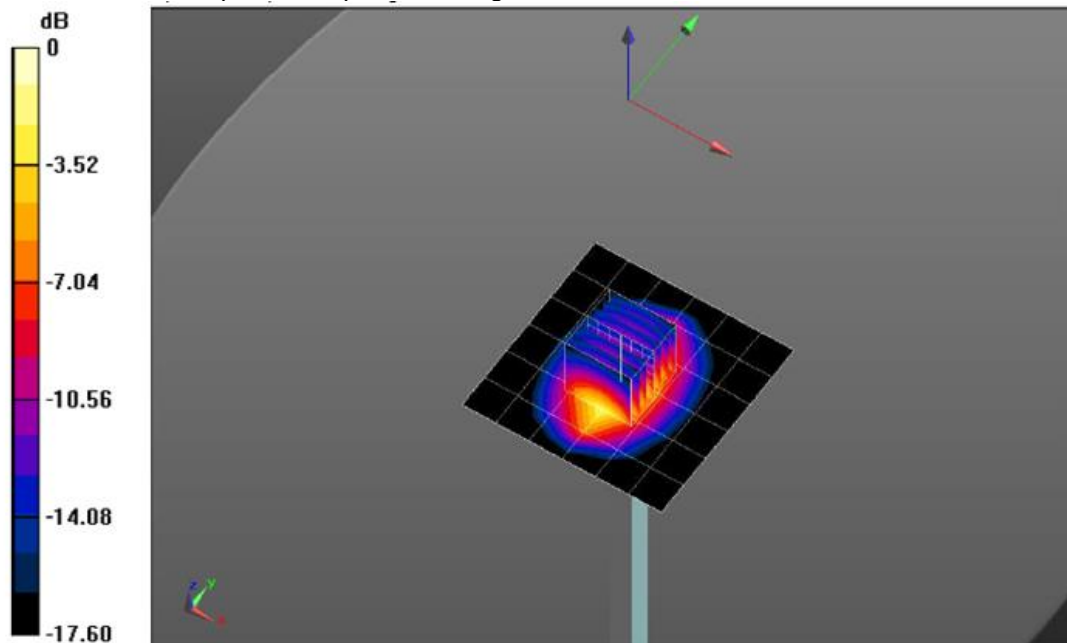

SystemPerformanceCheck-Head 2300MHz

DUT: D2300V2; Type: D2300V2; Serial: 1092

Date:2019-01-17

Communication System: UID 0, CW (0); Frequency: 2300 MHz

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.698$ S/m; $\epsilon_r = 39.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.87, 7.87, 7.87); Calibrated: 2/28/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1947
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Head/d=10mm,Pin=250mW/Area Scan (41x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 24.9 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 117.0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 24.2 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 6.05 W/kg

Maximum value of SAR (measured) = 21.5 W/kg

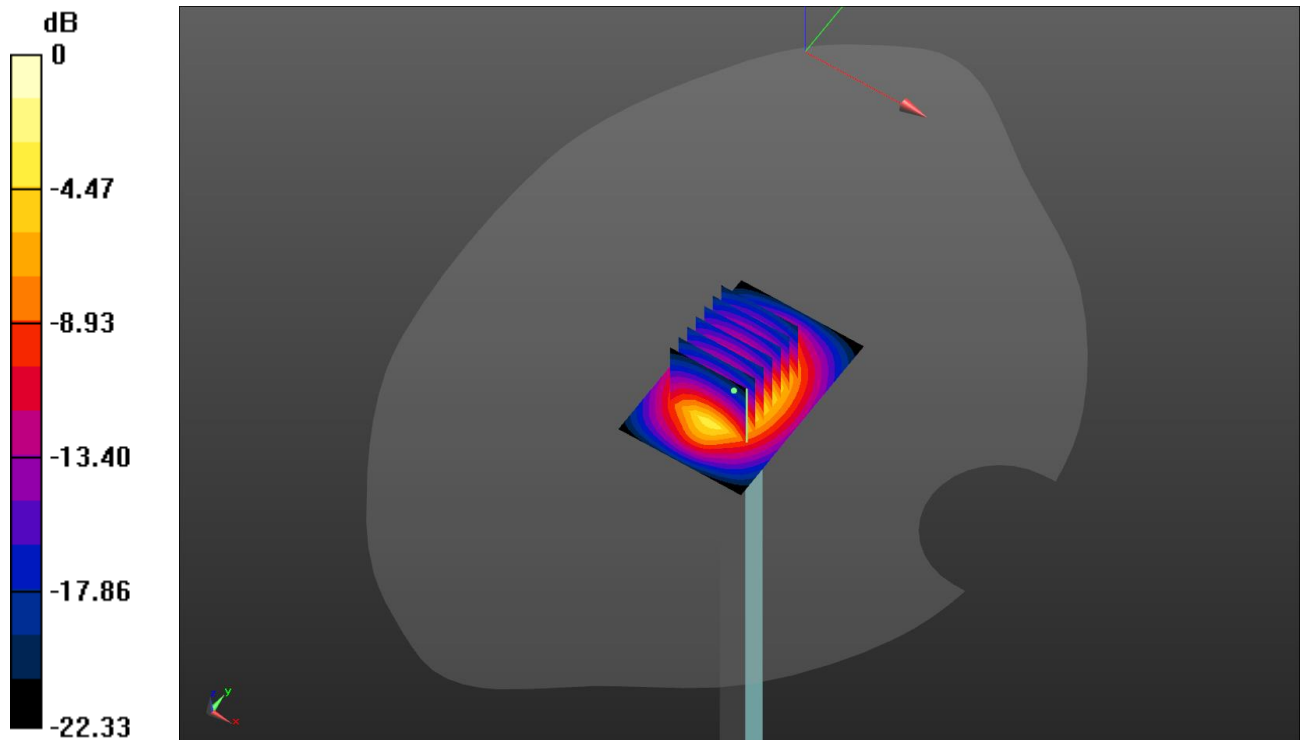

SystemPerformanceCheck-Body 2300MHz

DUT: D2300V2; Type: D2300V2; Serial: 1092

Date:2019-01-17

Communication System: UID 0, CW (0); Frequency: 2300 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.821$ S/m; $\epsilon_r = 53.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.89, 7.89, 7.89); Calibrated: 2/28/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body/d=10mm,Pin=250mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 23.5 W/kg


Body/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 106 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 24.3 W/kg

SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.63 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

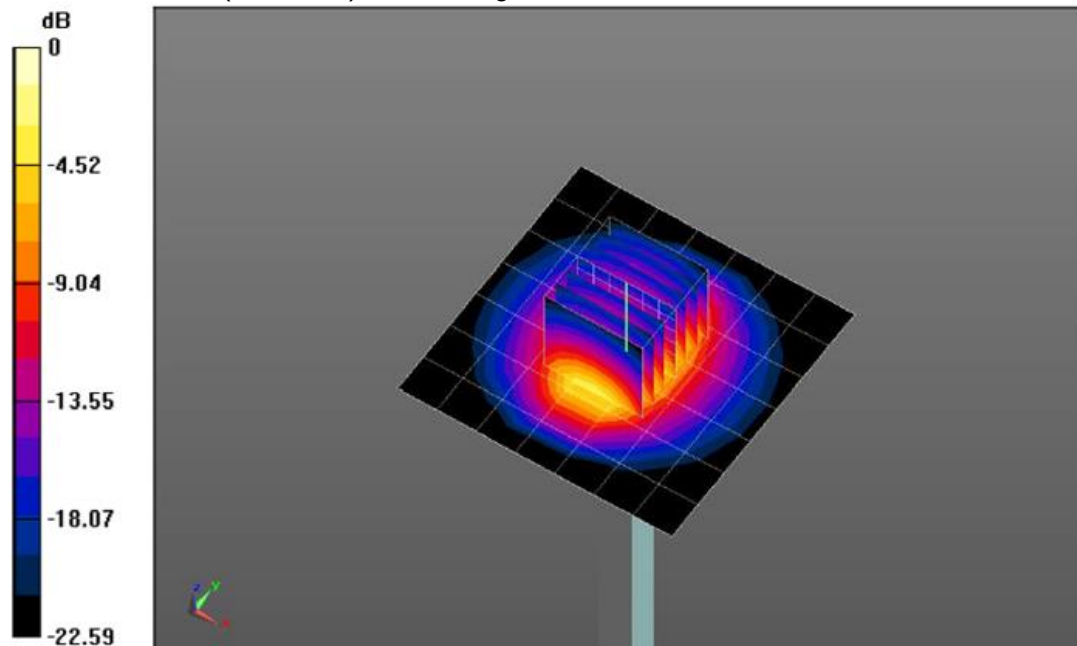

SystemPerformanceCheck-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date:2019-01-18

Communication System: UID 0, CW (0); Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 40.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.27, 8.27, 8.27); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1947
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Head/d=10mm,Pin=250mW/Area Scan (41x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 21.1 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 110.0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 26.2 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.86 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

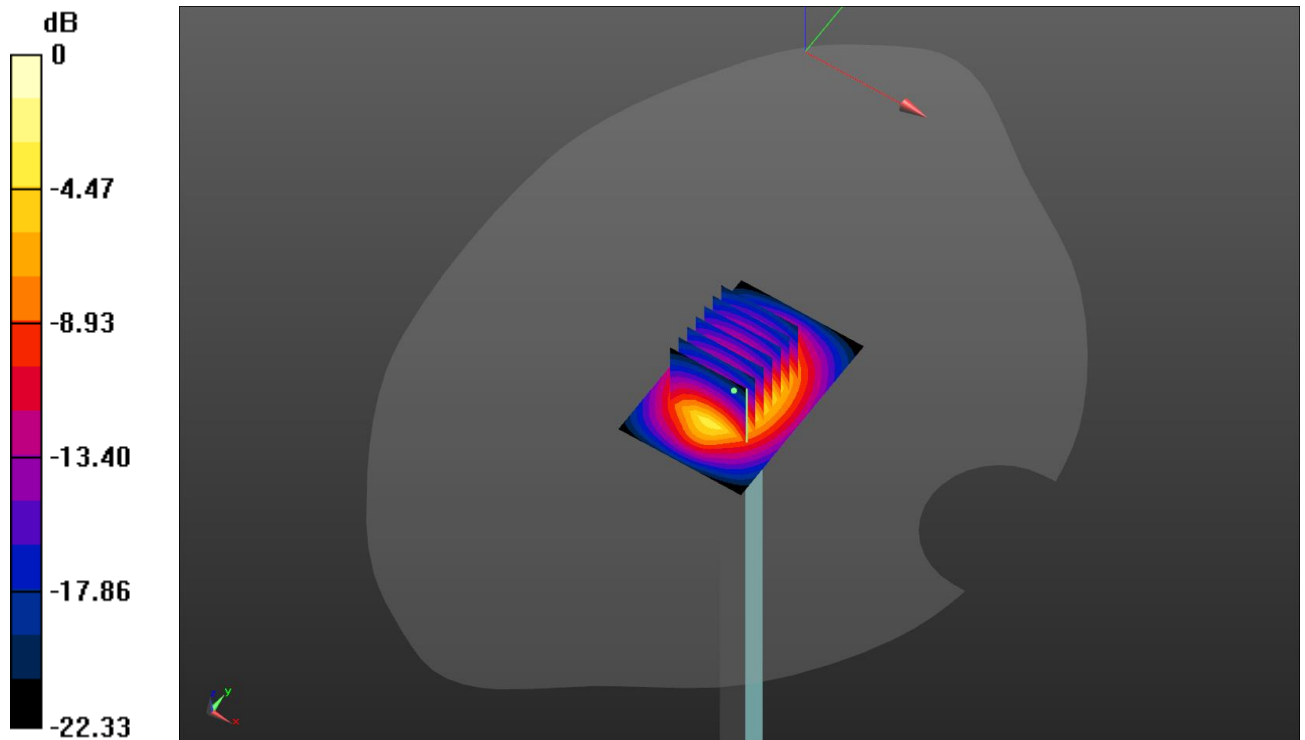

SystemPerformanceCheck-Body 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date:2019-01-18

Communication System: UID 0, CW (0); Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 53.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.08, 8.08, 8.08); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body/d=10mm,Pin=250mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 21.1 W/kg


Body/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 105.6 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 25.7 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.83 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

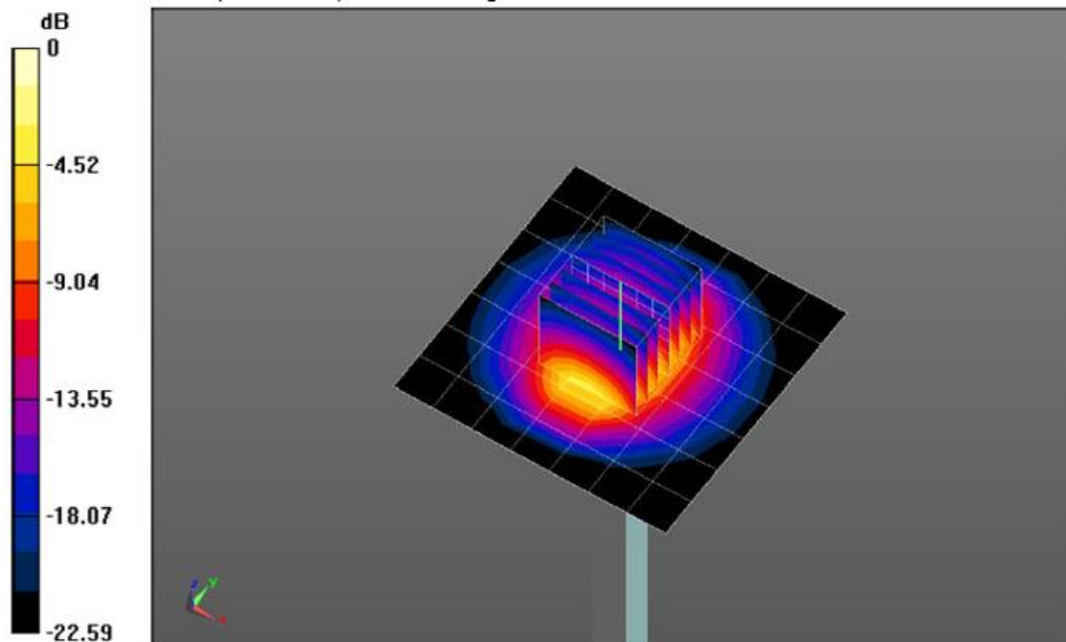

10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population/ Uncontrolled Exposure Environment	Occupational/ Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

11. Conducted Power Measurement Results

GSM Conducted Power

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and further SAR test reduction.
2. Per KDB 941225 D01, considering the possibility of e.g. 3rd party VoIP operation for Head and Body-worn SAR test reduction for GSM and GPRS modes is determined by the source-base time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Per KDB941225 D01, for hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Mode: GSM850		Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
		CH128	CH190	CH251		CH128	CH190	CH251
		824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		33.20	33.31	34.16	-9.03	24.17	24.28	25.13
GPRS (GMSK)	1TXslot	33.23	33.33	34.16	-9.03	24.20	24.30	25.13
	2TXslots	30.28	31.01	31.84	-6.02	24.26	24.99	25.82
	3TXslots	29.07	29.23	30.16	-4.26	24.81	24.97	25.90
	4TXslots	27.23	27.39	28.33	-3.01	24.22	24.38	25.32
EGPRS (8PSK)	1TXslot	26.37	26.47	27.23	-9.03	17.34	17.44	18.20
	2TXslots	24.69	24.75	25.64	-6.02	18.67	18.73	19.62
	3TXslots	23.28	23.41	24.27	-4.26	19.02	19.15	20.01
	4TXslots	21.47	21.72	22.69	-3.01	18.46	18.71	19.68
Mode: PCS1900		Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
		CH512	CH661	CH810		CH512	CH661	CH810
		1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		32.10	31.23	31.08	-9.03	23.07	22.20	22.05
GPRS (GMSK)	1TXslot	32.17	31.22	31.06	-9.03	23.14	22.19	22.03
	2TXslots	31.74	30.77	30.57	-6.02	25.72	24.75	24.55
	3TXslots	31.55	30.56	30.41	-4.26	27.29	26.30	26.15
	4TXslots	31.36	30.40	30.63	-3.01	28.35	27.39	27.62
EGPRS (8PSK)	1TXslot	28.06	27.18	26.99	-9.03	19.03	18.15	17.96
	2TXslots	27.39	26.39	26.01	-6.02	21.37	20.37	19.99
	3TXslots	26.99	26.02	25.78	-4.26	22.73	21.76	21.52
	4TXslots	26.74	25.67	25.19	-3.01	23.73	22.66	22.18

Note:

1) Division Factors

To Frame-Average Power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> Burst Average Power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/4) => -3.01dB

WCDMA Conducted Power

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of the setting are illustrated below:

HSDPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
 - ii. Set RMC 12.2Kbps + HSDPA mode
 - iii. Set Cell Power=-86dBm
 - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - v. Select HSDPA uplink parameters
 - vi. Set Delta ACK, Delta NACK and Delta CQI=8
 - vii. Set Ack-Nack repetition Factor to 3
 - viii. Set CQI Feedback Cycle (K) to 4ms
 - ix. Set CQI repetition factor to 2
 - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
 - ii. Set Gain Factors (β_c and β_d) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
 - iii. Set Cell Power=-86dBm
 - iv. Set channel type= 12.2Kbps + HSPA mode
 - v. Set UE Target power
 - vi. Set Ctrl mode=Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal the target E-TFCI of 75 for Sub-test 1, and other subtest's E-TFCI
- d) The transmitter maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ED} (Note 5) (Note 6)	β_{ED} (SF)	β_{ED} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ED1} : 47/15 β_{ED2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ED} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

General Note:

- Per KDB 941225 D01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
- Per KDB 941225 D01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

Mode		WCDMA Band II			WCDMA Band V		
		Conducted Power (dBm)			Conducted Power (dBm)		
		CH9262	CH9400	CH9538	CH4132	CH4183	CH4233
		1852.4MHz	1880.0MHz	1907.6MHz	826.4MHz	836.6MHz	846.6MHz
AMR 12.2K		23.34	23.27	23.46	22.10	23.08	22.89
RMC 12.2K		23.54	23.34	23.61	22.34	23.27	23.11
HSDPA	Subtest-1	21.69	21.20	21.73	21.77	22.28	22.24
	Subtest-2	20.87	20.41	21.28	21.23	21.46	21.72
	Subtest-3	20.79	20.33	20.90	20.74	21.77	21.61
	Subtest-4	20.85	20.39	20.87	20.71	21.77	21.22
HSUPA	Subtest-1	21.63	21.28	21.52	20.92	21.66	21.61
	Subtest-2	20.66	20.05	20.21	20.51	21.03	20.97
	Subtest-3	20.22	19.69	19.97	20.05	20.55	20.52
	Subtest-4	21.29	20.93	20.95	20.76	21.49	21.42
	Subtest-5	20.52	19.93	20.32	20.48	20.86	20.80

Mode		WCDMA Band IV		
		Conducted Power (dBm)		
		CH1312	CH1413	CH1513
		1712.4MHz	1732.6MHz	1752.6MHz
AMR 12.2K		21.74	21.65	21.98
RMC 12.2K		21.93	21.72	22.04
HSDPA	Subtest-1	21.01	20.92	21.29
	Subtest-2	20.48	20.15	20.47
	Subtest-3	20.19	20.06	20.41
	Subtest-4	20.18	20.24	20.57
HSUPA	Subtest-1	21.09	20.69	21.23
	Subtest-2	19.71	20.07	20.21
	Subtest-3	19.40	19.61	19.71
	Subtest-4	20.69	20.64	20.90
	Subtest-5	19.84	19.25	19.76

LTE Conducted Power

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1 RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

LTE-FDD Band 2				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
1.4MHz	QPSK	1	0	21.55	21.64	21.49
			2	21.49	21.58	21.43
			5	21.51	21.60	21.45
		3	0	21.43	21.52	21.37
			1	21.48	21.57	21.42
			3	21.55	21.64	21.49
		6	0	20.54	20.62	20.48
	16QAM	1	0	20.99	21.08	20.93
			2	20.90	20.99	20.84
			5	20.75	20.83	20.69
		3	0	20.59	20.67	20.53
			1	20.51	20.59	20.45
			3	20.67	20.75	20.61
		6	0	19.60	19.68	19.54
3MHz	QPSK	1	0	20.57	20.65	20.51
			8	20.77	20.85	20.71
			14	21.47	21.56	21.41
		8	0	20.40	20.48	20.34
			4	20.42	20.50	20.36
			7	20.48	20.56	20.42
		15	0	20.49	20.57	20.43
	16QAM	1	0	20.99	21.08	20.93
			8	21.17	21.26	21.11
			14	21.26	21.35	21.20
		8	0	19.54	19.62	19.48
			4	19.43	19.51	19.37
			7	19.56	19.64	19.50
		15	0	19.45	19.53	19.39

LTE-FDD Band 2				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	21.52	21.61	21.46
			12	21.49	21.58	21.43
			24	21.50	21.59	21.44
		12	0	20.30	20.38	20.24
			7	20.25	20.33	20.19
			13	20.45	20.53	20.39
		25	0	20.46	20.54	20.40
	16QAM	1	0	20.46	20.54	20.40
			12	20.36	20.44	20.30
			24	19.99	20.07	19.93
		12	0	19.44	19.52	19.38
			7	19.40	19.48	19.34
			13	19.46	19.54	19.40
		25	0	19.62	19.70	19.56
10MHz	QPSK	1	0	21.55	21.64	21.49
			24	21.47	21.56	21.41
			49	21.42	21.51	21.36
		25	0	20.43	20.51	20.37
			24	20.35	20.43	20.29
			49	20.48	20.56	20.42
		50	0	20.53	20.61	20.47
	16QAM	1	0	20.93	21.02	20.87
			24	20.85	20.94	20.79
			49	20.82	20.91	20.76
		25	0	19.44	19.52	19.38
			24	19.48	19.56	19.42
			49	19.52	19.60	19.46
		50	0	19.61	19.69	19.55

LTE-FDD Band 2				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
15MHz	QPSK	1	0	21.54	21.63	21.48
			38	21.40	21.49	21.34
			74	21.35	21.44	21.29
		38	0	20.38	20.46	20.32
			18	20.34	20.42	20.28
			37	20.42	20.50	20.36
		75	0	20.49	20.57	20.43
	16QAM	1	0	20.97	21.06	20.91
			38	21.20	21.29	21.14
			74	21.27	21.36	21.21
		38	0	19.40	19.48	19.34
			18	19.44	19.52	19.38
			37	19.46	19.54	19.40
		75	0	19.54	19.62	19.48
20MHz	QPSK	1	0	21.48	21.57	21.42
			49	21.51	21.60	21.45
			99	21.78	21.87	21.72
		50	0	20.47	20.55	20.41
			25	20.51	20.59	20.45
			50	20.38	20.46	20.32
		100	0	20.51	20.59	20.45
	16QAM	1	0	20.67	20.75	20.61
			49	20.68	20.76	20.62
			99	20.70	20.78	20.64
		50	0	19.40	19.48	19.34
			25	19.31	19.38	19.25
			50	19.42	19.50	19.36
		100	0	19.47	19.55	19.41

LTE-FDD Band 4				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
1.4MHz	QPSK	1	0	21.57	21.66	21.51
			2	21.44	21.53	21.38
			5	21.00	21.08	20.93
		3	0	21.39	21.48	21.33
			1	21.47	21.56	21.41
			3	21.55	21.64	21.49
		6	0	20.49	20.57	20.43
	16QAM	1	0	20.76	20.84	20.69
			2	20.83	20.91	20.76
			5	21.45	21.54	21.39
		3	0	20.26	20.34	20.20
			1	20.55	20.63	20.49
			3	20.56	20.64	20.50
		6	0	19.84	19.92	19.78
3MHz	QPSK	1	0	21.68	21.77	21.62
			8	21.56	21.65	21.50
			14	21.66	21.75	21.60
		8	0	20.49	20.57	20.43
			4	20.35	20.43	20.29
			7	20.54	20.62	20.48
		15	0	20.53	20.61	20.47
	16QAM	1	0	21.18	21.27	21.12
			8	20.22	20.30	20.16
			14	21.22	21.31	21.16
		8	0	19.35	19.43	19.29
			4	19.45	19.53	19.39
			7	19.56	19.64	19.50
		15	0	19.64	19.72	19.58

LTE-FDD Band 4				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	21.51	21.60	21.45
			12	21.73	21.82	21.67
			24	21.84	21.93	21.78
		12	0	20.53	20.61	20.47
			7	20.61	20.69	20.55
			13	20.63	20.71	20.57
		25	0	20.65	20.73	20.58
	16QAM	1	0	20.46	20.54	20.40
			12	20.85	20.93	20.78
			24	21.28	21.37	21.22
		12	0	19.53	19.61	19.47
			7	19.66	19.74	19.60
			13	19.78	19.86	19.72
		25	0	19.51	19.59	19.45
10MHz	QPSK	1	0	21.51	21.60	21.45
			24	21.44	21.53	21.38
			49	21.62	21.71	21.56
		25	0	20.57	20.65	20.51
			24	20.40	20.48	20.34
			49	20.55	20.63	20.49
		50	0	20.54	20.62	20.48
	16QAM	1	0	20.77	20.85	20.70
			24	21.25	21.34	21.19
			49	21.33	21.42	21.27
		25	0	19.34	19.42	19.28
			24	19.56	19.64	19.50
			49	19.50	19.58	19.44
		50	0	19.62	19.70	19.56

LTE-FDD Band 4				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
15MHz	QPSK	1	0	21.52	21.61	21.46
			38	21.66	21.75	21.60
			74	21.89	21.98	21.83
		38	0	20.29	20.37	20.23
			18	20.34	20.42	20.28
			37	20.42	20.50	20.36
		75	0	20.46	20.54	20.40
	16QAM	1	0	21.07	21.15	21.00
			38	20.40	20.48	20.34
			74	21.64	21.73	21.58
		38	0	19.26	19.34	19.20
			18	19.56	19.64	19.50
			37	19.50	19.58	19.44
		75	0	19.52	19.60	19.46
20MHz	QPSK	1	0	21.50	21.59	21.44
			49	21.58	21.67	21.52
			99	21.99	22.08	21.93
		50	0	20.38	20.46	20.32
			25	20.26	20.34	20.20
			50	20.52	20.60	20.46
		100	0	20.52	20.60	20.46
	16QAM	1	0	20.50	20.58	20.44
			49	20.88	20.96	20.81
			99	21.20	21.29	21.14
		50	0	19.26	19.34	19.20
			25	19.45	19.53	19.39
			50	19.59	19.67	19.53
		100	0	19.46	19.54	19.40

LTE-FDD Band 5				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
1.4MHz	QPSK	1	0	24.86	25.04	24.89
			2	24.68	24.85	24.70
			5	24.44	24.61	24.46
		3	0	23.98	24.15	24.01
			1	24.08	24.25	24.10
			3	24.34	24.51	24.36
		6	0	24.34	24.51	24.36
	16QAM	1	0	24.36	24.53	24.38
			2	24.01	24.18	24.03
			5	23.99	24.16	24.02
		3	0	24.41	24.58	24.43
			1	23.94	24.11	23.97
			3	24.34	24.51	24.36
		6	0	24.05	24.22	24.07
3MHz	QPSK	1	0	24.85	25.03	24.88
			8	24.35	24.52	24.37
			14	23.94	24.11	23.97
		8	0	24.45	24.62	24.47
			4	24.14	24.31	24.16
			7	24.07	24.24	24.09
		15	0	24.39	24.56	24.41
	16QAM	1	0	24.32	24.49	24.34
			8	23.98	24.15	24.01
			14	24.21	24.38	24.23
		8	0	24.17	24.34	24.19
			4	23.68	23.85	23.71
			7	23.25	23.41	23.27
		15	0	24.04	24.21	24.06

LTE-FDD Band 5				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	25.00	25.18	25.03
			12	24.97	25.15	25.00
			24	24.90	25.08	24.93
		12	0	24.15	24.32	24.17
			7	23.98	24.15	24.01
			13	24.00	24.17	24.02
		25	0	24.18	24.35	24.20
	16QAM	1	0	23.83	24.00	23.86
			12	24.08	24.25	24.10
			24	23.32	23.48	23.34
		12	0	23.25	23.41	23.27
			7	23.09	23.25	23.11
			13	22.99	23.15	23.01
		25	0	23.47	23.64	23.50
10MHz	QPSK	1	0	24.99	25.17	25.02
			24	24.90	25.08	24.93
			49	24.87	25.05	24.90
		25	0	24.31	24.48	24.33
			24	24.27	24.44	24.29
			49	24.07	24.24	24.09
		50	0	23.32	23.48	23.34
	16QAM	1	0	24.00	24.17	24.02
			24	24.07	24.24	24.09
			49	23.90	24.07	23.93
		25	0	23.32	23.48	23.34
			24	22.89	23.05	22.91
			49	23.02	23.18	23.04
		50	0	23.41	23.58	23.44

LTE-FDD Band 12				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
1.4MHz	QPSK	1	0	24.29	24.54	24.15
			2	23.86	23.47	23.44
			5	23.18	23.41	23.65
		3	0	24.05	24.14	24.10
			1	23.61	23.51	23.82
			3	23.41	23.64	23.84
		6	0	24.15	23.85	23.95
	16QAM	1	0	24.01	23.90	23.86
			2	23.54	23.48	23.41
			5	23.18	23.19	23.24
		3	0	23.74	23.88	23.94
			1	23.50	23.13	23.81
			3	23.45	23.34	23.41
		6	0	23.47	23.93	23.81
3MHz	QPSK	1	0	24.49	24.54	24.40
			8	24.15	24.28	24.35
			14	24.28	24.15	24.31
		8	0	24.18	24.52	24.49
			4	23.41	23.80	23.91
			7	23.52	23.18	23.33
		15	0	24.53	24.38	24.15
	16QAM	1	0	23.65	23.95	24.43
			8	23.41	23.26	23.85
			14	23.52	23.64	23.86
		8	0	23.67	23.48	23.84
			4	23.48	23.51	23.14
			7	23.41	23.62	23.12
		15	0	23.64	23.73	23.18

LTE-FDD Band 12				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	24.40	24.42	24.62
			12	23.68	23.47	23.85
			24	23.61	23.61	23.28
		12	0	24.34	24.22	24.55
			7	23.51	23.54	23.62
			13	23.48	23.55	23.81
		25	0	24.05	24.18	24.31
	16QAM	1	0	23.59	23.85	24.21
			12	23.84	23.14	23.62
			24	23.48	23.24	23.34
		12	0	23.89	23.64	23.68
			7	23.15	23.41	23.54
			13	23.27	23.29	23.44
		25	0	23.66	23.84	23.59
10MHz	QPSK	1	0	24.43	24.35	24.51
			24	24.15	24.15	23.89
			49	24.31	23.48	23.51
		25	0	23.44	23.14	23.87
			24	23.54	23.42	23.21
			49	23.07	23.05	23.48
		50	0	24.10	24.06	23.83
	16QAM	1	0	23.81	23.47	24.15
			24	23.15	23.61	23.42
			49	23.33	23.24	23.55
		25	0	23.85	23.64	23.38
			24	23.32	23.31	23.41
			49	23.08	23.14	23.05
		50	0	23.49	23.18	23.55

LTE-FDD Band 13				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	23.87	23.99	23.95
			12	23.51	23.47	23.95
			24	23.65	23.41	23.26
		12	0	23.47	23.95	23.87
			7	23.42	23.62	23.21
			13	23.36	23.34	23.14
		25	0	23.42	23.41	23.85
	16QAM	1	0	23.33	23.91	23.69
			12	23.20	23.05	23.10
			24	23.41	23.15	23.14
		12	0	23.42	23.18	23.64
			7	23.15	23.24	23.23
			13	23.08	23.09	23.18
		25	0	23.19	23.64	23.48
10MHz	QPSK	1	0	/	23.68	/
			24	/	23.41	/
			49	/	23.22	/
		25	0	/	23.56	/
			24	/	23.22	/
			49	/	23.25	/
		50	0	/	23.61	/
	16QAM	1	0	/	23.62	/
			24	/	23.41	/
			49	/	23.14	/
		25	0	/	23.62	/
			24	/	22.86	/
			49	/	22.97	/
		50	0	/	23.41	/

LTE-FDD Band 17				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	24.56	24.77	24.78
			12	24.35	24.34	24.52
			24	24.23	24.15	24.31
		12	0	24.24	24.33	24.15
			7	23.85	23.85	23.74
			13	23.61	23.48	23.41
		25	0	23.56	23.48	23.85
	16QAM	1	0	23.63	23.61	24.03
			12	23.18	23.26	23.41
			24	23.26	23.45	23.81
		12	0	23.84	23.41	23.37
			7	23.11	23.29	23.18
			13	23.34	23.40	23.39
		25	0	23.89	23.86	24.05
10MHz	QPSK	1	0	24.35	24.58	24.66
			24	24.12	24.16	24.31
			49	23.81	23.85	24.08
		25	0	23.69	24.05	23.84
			24	23.62	23.81	23.72
			49	23.34	23.64	23.90
		50	0	23.97	23.95	23.88
	16QAM	1	0	23.62	23.41	23.86
			24	23.14	23.52	23.40
			49	23.57	23.41	23.34
		25	0	23.69	23.57	23.78
			24	23.31	23.27	23.42
			49	23.34	23.28	23.24
		50	0	23.66	23.75	23.85

LTE-FDD Band 30				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5MHz	QPSK	1	0	22.98	23.07	23.28
			12	22.85	22.94	22.92
			24	22.80	22.82	22.95
		12	0	22.11	22.08	22.17
			7	22.06	22.03	22.14
			13	22.04	22.08	22.15
		25	0	22.14	22.04	22.02
	16QAM	1	0	21.64	22.12	21.91
			12	21.79	22.21	21.88
			24	21.88	22.37	21.84
		12	0	21.04	21.18	21.12
			7	21.09	21.20	21.14
			13	21.05	21.23	21.19
		25	0	21.20	21.09	21.19
10MHz	QPSK	1	0	/	23.23	/
			24	/	23.18	/
			49	/	23.12	/
		25	0	/	22.15	/
			24	/	22.09	/
			49	/	22.11	/
		50	0	/	22.13	/
	16QAM	1	0	/	22.66	/
			24	/	22.74	/
			49	/	22.83	/
		25	0	/	21.27	/
			24	/	21.16	/
			49	/	21.22	/
		50	0	/	21.18	/

WLAN Conducted Power

For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation. 802.11g/n were not investigated since the average putput powers over all channels and data rates were not more than 0.25dB higher than the tested channel in the lowest data rate of 802.11b mode.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

Qualcomm QRCT tool was used to test the transmission of fixed frequency points in WiFi.

WIFI 2.4G			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11b	1	2412	13.19
	6	2437	13.09
	11	2462	13.01
802.11g	1	2412	9.49
	6	2437	11.03
	11	2462	10.80
802.11n(HT20)	1	2412	9.44
	6	2437	10.99
	11	2462	10.76
802.11n(HT40)	3	2422	9.81
	6	2437	10.58
	9	2452	10.34

Bluetooth Conducted Power

Bluetooth			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
GFSK	0	2402	3.64
	39	2441	2.35
	78	2480	1.95
$\pi/4$ QPSK	0	2402	3.24
	39	2441	1.91
	78	2480	1.62
8DPSK	0	2402	1.63
	39	2441	1.41
	78	2480	0.02
GFSK(BLE)	0	2402	2.46
	19	2440	2.25
	39	2480	0.84

12. Maximum Tune-up Limit

GSM		
Mode	Maximum Tune-up (dBm)	
	GSM850	PCS1900
GSM (GMSK, 1Tx Slot)	34.50	32.50
GPRS (GMSK, 1Tx Slot)	34.50	32.50
GPRS (GMSK, 2Tx Slot)	32.00	32.00
GPRS (GMSK, 3Tx Slot)	30.50	32.00
GPRS (GMSK, 4Tx Slot)	28.50	31.50
EGPRS (8PSK, 1Tx Slot)	27.50	28.50
EGPRS (8PSK, 2Tx Slot)	26.00	27.50
EGPRS (8PSK, 3Tx Slot)	24.50	27.00
EGPRS (8PSK, 4Tx Slot)	23.00	27.00

WCDMA			
Mode	Maximum Tune-up (dBm)		
	WCDMA Band II	WCDMA Band IV	WCDMA Band V
AMR 12.2Kbps	23.50	22.00	23.50
RMC 12.2Kbps	24.00	22.10	23.50
HSDPA Subtest-1	22.00	21.50	22.50
HSDPA Subtest-2	21.50	20.50	22.00
HSDPA Subtest-3	21.00	20.50	22.00
HSDPA Subtest-4	21.00	21.00	22.00
HSUPA Subtest-1	22.00	21.50	22.00
HSUPA Subtest-2	21.00	20.50	21.50
HSUPA Subtest-3	20.50	20.00	21.00
HSUPA Subtest-4	21.50	21.00	21.50
HSUPA Subtest-5	21.00	20.00	21.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 2	1.4	QPSK	1	22.00
			3	22.00
			6	21.00
		16QAM	1	21.50
			3	21.00
			6	20.00
	3	QPSK	1	22.00
			8	21.00
			15	21.00
		16QAM	1	21.50
			8	20.00
			15	20.00
	5	QPSK	1	22.00
			12	21.00
			25	21.00
		16QAM	1	21.00
			12	20.00
			25	20.00
	10	QPSK	1	22.00
			25	21.00
			50	21.00
		16QAM	1	21.50
			25	20.00
			50	20.00
	15	QPSK	1	22.00
			38	21.00
			75	21.00
		16QAM	1	21.50
			38	20.00
			75	20.00
	20	QPSK	1	22.00
			50	21.00
			100	21.00
		16QAM	1	21.00
			50	20.00
			100	20.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 4	1.4	QPSK	1	22.00
			3	22.00
			6	21.00
		16QAM	1	22.00
			3	21.00
			6	20.00
	3	QPSK	1	22.00
			8	21.00
			15	21.00
		16QAM	1	22.00
			8	20.00
			15	20.00
	5	QPSK	1	22.00
			12	21.00
			25	21.00
		16QAM	1	21.50
			12	20.00
			25	20.00
	10	QPSK	1	22.00
			25	21.00
			50	21.00
		16QAM	1	22.00
			25	20.00
			50	20.00
	15	QPSK	1	22.00
			38	21.00
			75	21.00
		16QAM	1	22.00
			38	20.00
			75	20.00
	20	QPSK	1	22.50
			50	21.00
			100	21.00
		16QAM	1	21.50
			50	20.00
			100	20.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 5	1.4	QPSK	1	25.50
			3	25.00
			6	25.00
		16QAM	1	25.00
			3	25.00
			6	24.50
	3	QPSK	1	25.50
			8	25.00
			15	25.00
		16QAM	1	25.00
			8	24.50
			15	24.50
	5	QPSK	1	25.50
			12	25.00
			25	25.00
		16QAM	1	25.00
			12	24.00
			25	24.00
	10	QPSK	1	25.50
			25	25.00
			50	24.00
		16QAM	1	24.50
			25	24.00
			50	24.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 12	1.4	QPSK	1	25.00
			3	24.50
			6	24.50
		16QAM	1	24.50
			3	24.00
			6	24.00
	3	QPSK	1	25.00
			8	25.00
			15	25.00
		16QAM	1	24.50
			8	24.00
			15	24.00
	5	QPSK	1	25.00
			12	25.00
			25	24.50
		16QAM	1	24.50
			12	24.00
			25	24.00
	10	QPSK	1	25.00
			25	24.00
			50	24.50
		16QAM	1	24.50
			25	24.00
			50	24.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 13	5	QPSK	1	24.00
			12	24.00
			25	24.00
		16QAM	1	24.00
			12	24.00
			25	24.00
	10	QPSK	1	24.00
			25	24.00
			50	24.00
		16QAM	1	24.00
			25	24.00
			50	23.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 17	5	QPSK	1	25.00
			12	24.50
			25	24.00
		16QAM	1	24.50
			12	24.00
			25	24.50
	10	QPSK	1	25.00
			25	24.50
			50	24.00
		16QAM	1	24.00
			25	24.00
			50	24.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 30	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	23.00
			25	21.50
			50	21.50

The allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

WIFI 2.4G	
Mode	Maximum Tune-up (dBm)
802.11b	13.50
802.11g	11.10
802.11n(HT20)	11.00
802.11n(HT40)	11.00

Bluetooth	
Mode	Maximum Tune-up (dBm)
GFSK	3.70
$\pi/4$ QPSK	3.50
8DPSK	2.00
GFSK(BLE)	2.50

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances ≤ 50 mm are determined by:


$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

Band/Mode	Frequency (GHz)	Position	Tune-up Power		Separation Distance (mm)	Exclusion Thresholds
			dBm	mW		
Bluetooth	2.45	Head	2.450	3.70	0	0.7
		Body			10	0.4

Per KDB 447498 D01, when the minimum test separation distance is < 5 mm, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

13. Antenna Location

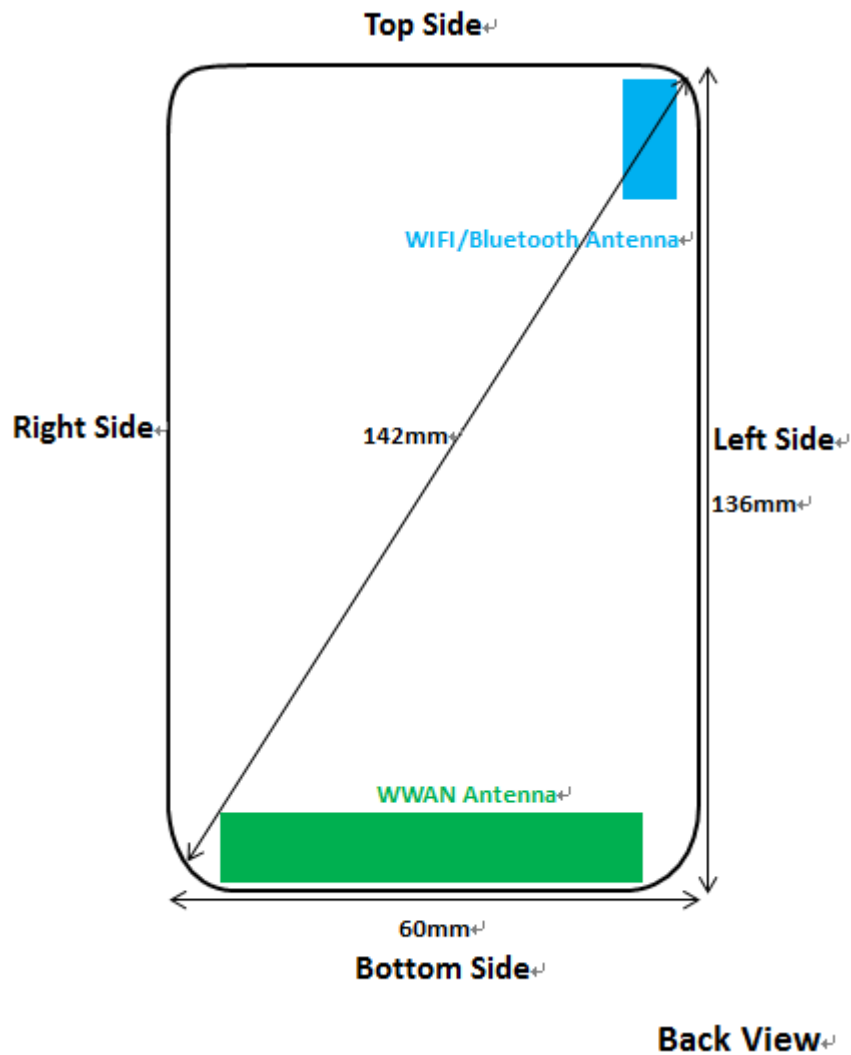

Distance of the Antenna to the EUT surface/edge(mm)						
Antenna	Rear	Front	Top side	Bottom side	Right side	Left side
WWAN	3	7	122	5	7	7
WIFI/BT	3	7	7	103	45	5

Positions for SAR tests; Hotspot mode						
Antenna	Rear	Front	Top side	Bottom side	Right side	Left side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WIFI/BT	Yes	Yes	Yes	No	No	Yes

General note:

Referring to KDB941225 D06, when the overall device length and width are >9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

14. SAR Measurement Results

Head SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
GPRS (3Tx slot)	Left-Cheek	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	0.04	0.575	0.622	1
	Left-Tilt	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	-0.04	0.440	0.476	-
	Right-Cheek	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	-0.02	0.533	0.577	-
	Right-Tilt	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	0.02	0.404	0.437	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
GPRS (4Tx slot)	Left-Cheek	512	1850.2	31.36	31.50	1.03	-0.01	0.25	0.261	-
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-
	Left-Tilt	512	1850.2	31.36	31.50	1.03	-0.01	0.204	0.210	-
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-
	Right-Cheek	512	1850.2	31.36	31.50	1.03	-0.02	0.596	0.616	3
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-
	Right-Tilt	512	1850.2	31.36	31.50	1.03	0.01	0.469	0.484	-
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2K bps	Left-Cheek	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	0.11	0.468	0.545	-
		9538	1907.6	23.61	24.00	1.09	-	-	-	-
	Left-Tilt	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	0.09	0.385	0.448	-
		9538	1907.6	23.61	24.00	1.09	-	-	-	-
	Right-Cheek	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	0.02	0.576	0.671	5
		9538	1907.6	23.61	24.00	1.09	-	-	-	-
	Right-Tilt	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	-0.05	0.461	0.537	-
		9538	1907.6	23.61	24.00	1.09	-	-	-	-

WCDMA Band IV										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2K bps	Left-Cheek	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.6	21.72	22.10	1.09	0.04	0.395	0.431	-
		1513	1752.6	22.04	22.10	1.01	-	-	-	-
	Left-Tilt	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.6	21.72	22.10	1.09	0.03	0.325	0.354	-
		1513	1752.6	22.04	22.10	1.01	-	-	-	-
	Right-Cheek	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.6	21.72	22.10	1.09	0.02	0.524	0.572	7
		1513	1752.6	22.04	22.10	1.01	-	-	-	-
	Right-Tilt	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.6	21.72	22.10	1.09	-0.02	0.420	0.458	-
		1513	1752.6	22.04	22.10	1.01	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2K bps	Left-Cheek	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	-0.16	0.471	0.497	9
		4233	846.6	23.11	23.50	1.09	-	-	-	-
	Left-Tilt	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	-0.09	0.379	0.400	-
		4233	846.6	23.11	23.50	1.09	-	-	-	-
	Right-Cheek	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	-0.10	0.437	0.461	-
		4233	846.6	23.11	23.50	1.09	-	-	-	-
	Right-Tilt	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	0.08	0.344	0.362	-
		4233	846.6	23.11	23.50	1.09	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M_1 RB	Left-Cheek	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	-0.08	0.276	0.284	-
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
	Left-Tilt	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	0.05	0.226	0.233	-
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
	Right-Cheek	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	-0.17	0.367	0.378	11
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
	Right-Tilt	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	-0.04	0.293	0.301	-
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
20M_5 0RB	Left-Cheek	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	0.11	0.206	0.226	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-
	Left-Tilt	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	-0.06	0.181	0.198	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-
	Right-Cheek	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	-0.05	0.248	0.272	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-
	Right-Tilt	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	0.04	0.211	0.232	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M_1 RB	Left-Cheek	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	0.08	0.395	0.435	-
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
	Left-Tilt	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	-0.01	0.295	0.325	-
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
	Right-Cheek	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	-0.11	0.522	0.575	13
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
	Right-Tilt	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	0.02	0.405	0.446	-
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
20M_5 0RB	Left-Cheek	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	-0.12	0.252	0.276	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-
	Left-Tilt	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	0.10	0.199	0.218	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-
	Right-Cheek	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	0.05	0.355	0.389	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-
	Right-Tilt	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	-0.07	0.252	0.276	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1 RB	Left-Cheek	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	-0.04	0.526	0.568	15
		20600	844.0	25.02	25.50	1.12	-	-	-	-
	Left-Tilt	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	-0.02	0.441	0.475	-
		20600	844.0	25.02	25.50	1.12	-	-	-	-
	Right-Cheek	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	0.03	0.508	0.548	-
		20600	844.0	25.02	25.50	1.12	-	-	-	-
	Right-Tilt	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	-0.01	0.403	0.435	-
		20600	844.0	25.02	25.50	1.12	-	-	-	-
10M_2 5RB	Left-Cheek	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	-0.03	0.401	0.452	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-
	Left-Tilt	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	0.02	0.311	0.350	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-
	Right-Cheek	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	-0.02	0.399	0.450	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-
	Right-Tilt	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	-0.02	0.326	0.367	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 12										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1 RB	Left-Cheek	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	-0.05	0.295	0.343	17
		23130	711.0	24.51	25.00	1.12	-	-	-	-
	Left-Tilt	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	-0.03	0.247	0.287	-
		23130	711.0	24.51	25.00	1.12	-	-	-	-
	Right-Cheek	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	0.04	0.285	0.331	-
		23130	711.0	24.51	25.00	1.12	-	-	-	-
	Right-Tilt	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	-0.02	0.226	0.262	-
		23130	711.0	24.51	25.00	1.12	-	-	-	-
10M_2 5RB	Left-Cheek	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	-0.02	0.223	0.255	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-
	Left-Tilt	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	0.01	0.173	0.198	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-
	Right-Cheek	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	-0.01	0.222	0.254	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-
	Right-Tilt	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	-0.01	0.181	0.207	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 13										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1 RB	Left-Cheek	23230	782	23.68	24.00	1.08	-0.05	0.463	0.498	19
	Left-Tilt	23230	782	23.68	24.00	1.08	-0.03	0.388	0.417	-
	Right-Cheek	23230	782	23.68	24.00	1.08	0.04	0.447	0.482	-
	Right-Tilt	23230	782	23.68	24.00	1.08	-0.02	0.355	0.382	-
10M_2 5RB	Left-Cheek	23230	782	23.56	24.00	1.11	-0.08	0.425	0.470	-
	Left-Tilt	23230	782	23.56	24.00	1.11	0.05	0.330	0.365	-
	Right-Cheek	23230	782	23.56	24.00	1.11	-0.04	0.423	0.468	-
	Right-Tilt	23230	782	23.56	24.00	1.11	-0.05	0.345	0.382	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1 RB	Left-Cheek	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	0.05	0.356	0.392	21
		23800	711	24.66	25.00	1.08	-	-	-	-
	Left-Tilt	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	0.03	0.298	0.328	-
		23800	711	24.66	25.00	1.08	-	-	-	-
	Right-Cheek	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	-0.04	0.344	0.379	-
		23800	711	24.66	25.00	1.08	-	-	-	-
	Right-Tilt	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	0.02	0.273	0.300	-
		23800	711	24.66	25.00	1.08	-	-	-	-
10M_2 5RB	Left-Cheek	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	0.05	0.272	0.301	-
		23800	711	23.84	24.50	1.16	-	-	-	-
	Left-Tilt	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	-0.03	0.211	0.234	-
		23800	711	23.84	24.50	1.16	-	-	-	-
	Right-Cheek	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	0.02	0.270	0.300	-
		23800	711	23.84	24.50	1.16	-	-	-	-
	Right-Tilt	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	0.03	0.221	0.245	-
		23800	711	23.84	24.50	1.16	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 30										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1 RB	Left-Cheek	27710	2310	23.23	23.50	1.06	0.08	0.412	0.438	-
	Left-Tilt	27710	2310	23.23	23.50	1.06	0.04	0.345	0.367	-
	Right-Cheek	27710	2310	23.23	23.50	1.06	-0.11	0.528	0.562	23
	Right-Tilt	27710	2310	23.23	23.50	1.06	0.03	0.419	0.445	-
10M_2 5RB	Left-Cheek	27710	2310	22.15	22.50	1.08	0.05	0.326	0.353	-
	Left-Tilt	27710	2310	22.15	22.50	1.08	-0.03	0.253	0.274	-
	Right-Cheek	27710	2310	22.15	22.50	1.08	0.02	0.403	0.437	-
	Right-Tilt	27710	2310	22.15	22.50	1.08	0.03	0.329	0.357	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

WIFI 2.4G										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
802.11b 1Mbps	Left-Cheek	01	2412	13.19	13.50	1.07	-	-	-	-
		06	2437	13.09	13.50	1.10	0.18	0.051	0.056	-
		11	2462	13.01	13.50	1.12	-	-	-	-
	Left-Tilt	01	2412	13.19	13.50	1.07	-	-	-	-
		06	2437	13.09	13.50	1.10	-0.06	0.043	0.047	-
		11	2462	13.01	13.50	1.12	-	-	-	-
	Right-Cheek	01	2412	13.19	13.50	1.07	-	-	-	-
		06	2437	13.09	13.50	1.10	-0.17	0.123	0.135	25
		11	2462	13.01	13.50	1.12	-	-	-	-
	Right-Tilt	01	2412	13.19	13.50	1.07	-	-	-	-
		06	2437	13.09	13.50	1.10	0.13	0.103	0.114	-
		11	2462	13.01	13.50	1.12	-	-	-	-

Note:

- According to the above table, the initial test position for head is "Left Cheek", and its reported SAR is $\leq 0.4\text{W/kg}$. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, the 802.11g/n is not required.

WIFI 2.4G- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Left-Cheek	6	2437	100%	100%	0.056	0.056
	Left-Tilt	6	2437	100%	100%	0.047	0.047
	Right-Cheek	6	2437	100%	100%	0.135	0.135
	Right-Tilt	6	2437	100%	100%	0.114	0.114

Note:

- According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 100% is achievable for WLAN in this project.

Body SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
GPRS (3Tx slot)	Front	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	-0.01	0.439	0.475	-
	Rear	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	0.03	0.665	0.719	2

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
GPRS (4Tx slot)	Front	512	1850.2	31.36	31.50	1.03	-0.01	0.394	0.407	-
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-
	Rear	512	1850.2	31.36	31.50	1.03	0.01	0.623	0.643	4
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2Kbps	Front	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	0.04	0.483	0.562	-
		9538	1907.6	23.61	24.00	1.09	-	-	-	-
	Rear	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	-0.10	0.678	0.789	6
		9538	1907.6	23.61	24.00	1.09	-	-	-	-

WCDMA Band IV										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2Kbps	Front	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.4	21.72	22.10	1.09	0.01	0.488	0.533	-
		1513	1752.6	22.04	22.10	1.01	-	-	-	-
	Rear	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.4	21.72	22.10	1.09	-0.03	0.686	0.749	8
		1513	1752.6	22.04	22.10	1.01	-	-	-	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2Kbps	Front	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	0.03	0.325	0.343	-
		4233	846.6	23.11	23.50	1.09	-	-	-	-
	Rear	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	0.06	0.528	0.557	10
		4233	846.6	23.11	23.50	1.09	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M_1RB	Front	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	-0.04	0.381	0.393	-
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
	Rear	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	0.08	0.634	0.653	12
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
20M_50RB	Front	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	-0.02	0.271	0.297	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-
	Rear	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	0.11	0.478	0.525	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M_1RB	Front	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	-0.04	0.314	0.345	-
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
	Rear	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	-0.15	0.673	0.741	14
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
20M_50RB	Front	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	-0.02	0.229	0.251	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-
	Rear	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	0.11	0.524	0.575	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	0.06	0.343	0.370	-
		20600	844.0	25.02	25.50	1.12	-	-	-	-
	Rear	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	-0.10	0.508	0.548	16
		20600	844.0	25.02	25.50	1.12	-	-	-	-
10M_25RB	Front	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	0.03	0.194	0.219	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-
	Rear	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	-0.05	0.355	0.400	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-

LTE Band 12										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	0.08	0.426	0.495	-
		23130	711.0	24.51	25.00	1.12	-	-	-	-
	Rear	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	0.00	0.632	0.734	18
		23130	711.0	24.51	25.00	1.12	-	-	-	-
10M_25RB	Front	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	-0.08	0.297	0.340	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-
	Rear	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	0.12	0.544	0.622	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 13										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	23230	782	23.68	24.00	1.08	0.10	0.386	0.415	-
	Rear	23230	782	23.68	24.00	1.08	-0.16	0.572	0.616	20
10M_25RB	Front	23230	782	23.56	24.00	1.11	0.07	0.295	0.326	-
	Rear	23230	782	23.56	24.00	1.11	-0.10	0.539	0.596	-

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	0.07	0.445	0.490	-
		23800	711	24.66	25.00	1.08	-	-	-	-
	Rear	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	-0.11	0.660	0.727	22
		23800	711	24.66	25.00	1.08	-	-	-	-
10M_25RB	Front	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	0.05	0.273	0.303	-
		23800	711	23.84	24.50	1.16	-	-	-	-
	Rear	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	-0.08	0.499	0.554	-
		23800	711	23.84	24.50	1.16	-	-	-	-

LTE Band 30										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	27710	2310	23.23	23.50	1.06	0.10	0.407	0.434	-
	Rear	27710	2310	23.23	23.50	1.06	-0.15	0.604	0.643	24
10M_25RB	Front	27710	2310	22.15	22.50	1.08	0.04	0.279	0.303	-
	Rear	27710	2310	22.15	22.50	1.08	-0.06	0.511	0.554	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

WIFI 2.4G										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
802.11b 1Mbps	Front	1	2412	13.19	13.50	1.07	-	-	-	-
		6	2437	13.09	13.50	1.10	0.17	0.040	0.044	-
		11	2462	13.01	13.50	1.12	-	-	-	-
	Rear	1	2412	13.19	13.50	1.07	-	-	-	-
		6	2437	13.09	13.50	1.10	-0.14	0.059	0.065	26
		11	2462	13.01	13.50	1.12	-	-	-	-

Note:

1. According to the above table, the initial test position for body is "Rear", and its reported SAR is $\leq 0.4\text{W/kg}$. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

WIFI 2.4G- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Front	6	2437	100%	100%	0.044	0.044
	Rear	6	2437	100%	100%	0.065	0.065

Note:

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 100% is achievable for WLAN in this project.

Hotspot SAR

Positions for SAR tests; Hotspot mode						
Antenna	Back	Front	Top side	Bottom side	Right side	Left side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WIFI / BT	Yes	Yes	Yes	No	No	Yes

General note:

Referring to KDB941225 D06, when the overall device length and width are >9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
GPRS (3Tx slot)	Front	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	-0.01	0.439	0.475	-
	Back	128	824.2	29.07	30.50	1.39	-	-	-	-
		190	836.6	29.23	30.50	1.34	-	-	-	-
		251	848.8	30.16	30.50	1.08	0.03	0.665	0.719	2
	Left	251	848.8	30.16	30.50	1.08	-0.02	0.476	0.515	-
	Right	251	848.8	30.16	30.50	1.08	-0.02	0.458	0.495	-
	Top	251	848.8	30.16	30.50	1.08	-	-	-	-
	Bottom	251	848.8	30.16	30.50	1.08	0.01	0.453	0.489	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
GPRS (4Tx slot)	Front	512	1850.2	31.36	31.50	1.03	-0.01	0.394	0.407	-
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-
	Back	512	1850.2	31.36	31.50	1.03	0.01	0.623	0.643	4
		661	1880.0	30.40	31.50	1.29	-	-	-	-
		810	1909.8	30.63	31.50	1.22	-	-	-	-
	Left	512	1850.2	31.36	31.50	1.03	0.00	0.377	0.389	-
	Right	512	1850.2	31.36	31.50	1.03	0.00	0.429	0.443	-
	Top	512	1850.2	31.36	31.50	1.03	-	-	-	-
	Bottom	512	1850.2	31.36	31.50	1.03	0.01	0.391	0.404	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2Kbps	Front	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	0.04	0.483	0.562	-
		9538	1907.6	23.61	24.00	1.09	-	-	-	-
	Back	9262	1852.4	23.54	24.00	1.11	-	-	-	-
		9400	1880.0	23.34	24.00	1.16	-0.10	0.678	0.789	6
		9538	1907.6	23.61	24.00	1.09	-	-	-	-
	Left	9400	1880.0	23.34	24.00	1.16	-0.05	0.461	0.537	-
	Right	9400	1880.0	23.34	24.00	1.16	0.11	0.253	0.295	-
	Top	9400	1880.0	23.34	24.00	1.16	-	-	-	-
	Bottom	9400	1880.0	23.34	24.00	1.16	0.03	0.446	0.519	-

WCDMA Band IV										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2Kbps	Front	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.6	21.72	22.10	1.09	0.01	0.488	0.533	-
		1513	1752.6	22.04	22.10	1.01	-	-	-	-
	Back	1312	1712.4	21.93	22.10	1.04	-	-	-	-
		1413	1732.6	21.72	22.10	1.09	-0.03	0.686	0.749	8
		1513	1752.6	22.04	22.10	1.01	-	-	-	-
	Left	1413	1732.6	21.72	22.10	1.09	-0.01	0.467	0.509	-
	Right	1413	1732.6	21.72	22.10	1.09	0.03	0.472	0.515	-
	Top	1413	1732.6	21.72	22.10	1.09	-	-	-	-
	Bottom	1413	1732.6	21.72	22.10	1.09	0.01	0.451	0.493	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
RMC 12.2Kbps	Front	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	0.03	0.325	0.343	-
		4233	846.6	23.11	23.50	1.09	-	-	-	-
	Back	4132	826.4	22.34	23.50	1.31	-	-	-	-
		4183	836.6	23.27	23.50	1.05	0.06	0.528	0.557	10
		4233	846.6	23.11	23.50	1.09	-	-	-	-
	Left	4183	836.6	23.27	23.50	1.05	-0.04	0.321	0.339	-
	Right	4183	836.6	23.27	23.50	1.05	0.08	0.363	0.383	-
	Top	4183	836.6	23.27	23.50	1.05	-	-	-	-
	Bottom	4183	836.6	23.27	23.50	1.05	0.03	0.320	0.337	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M_1RB	Front	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	-0.04	0.381	0.393	-
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
	Back	18700	1860.0	21.78	22.00	1.05	-	-	-	-
		18900	1880.0	21.87	22.00	1.03	0.08	0.634	0.653	12
		19100	1900.0	21.72	22.00	1.07	-	-	-	-
	Left	18900	1880.0	21.87	22.00	1.03	-0.05	0.366	0.377	-
	Right	18900	1880.0	21.87	22.00	1.03	0.03	0.277	0.286	-
	Top	18900	1880.0	21.87	22.00	1.03	-	-	-	-
	Bottom	18900	1880.0	21.87	22.00	1.03	0.08	0.397	0.409	-
20M_50RB	Front	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	-0.02	0.271	0.297	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-
	Back	18700	1860.0	20.51	21.00	1.12	-	-	-	-
		18900	1880.0	20.59	21.00	1.10	0.11	0.478	0.525	-
		19100	1900.0	20.45	21.00	1.14	-	-	-	-
	Left	18900	1880.0	20.59	21.00	1.10	-0.03	0.309	0.340	-
	Right	18900	1880.0	20.59	21.00	1.10	-0.03	0.193	0.212	-
	Top	18900	1880.0	20.59	21.00	1.10	-	-	-	-
	Bottom	18900	1880.0	20.59	21.00	1.10	0.11	0.302	0.332	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
20M_1RB	Front	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	-0.04	0.314	0.345	-
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
	Back	20050	1720.0	21.99	22.50	1.12	-	-	-	-
		20175	1732.5	22.08	22.50	1.10	-0.15	0.673	0.741	14
		20300	1745.0	21.93	22.50	1.14	-	-	-	-
	Left	20175	1732.5	22.08	22.50	1.10	0.11	0.407	0.448	-
	Right	20175	1732.5	22.08	22.50	1.10	-0.02	0.276	0.304	-
	Top	20175	1732.5	22.08	22.50	1.10	-	-	-	-
	Bottom	20175	1732.5	22.08	22.50	1.10	-0.05	0.413	0.454	-
20M_50RB	Front	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	-0.02	0.229	0.251	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-
	Back	20050	1720.0	20.52	21.00	1.12	-	-	-	-
		20175	1732.5	20.60	21.00	1.10	0.11	0.524	0.575	-
		20300	1745.0	20.46	21.00	1.13	-	-	-	-
	Left	20175	1732.5	20.60	21.00	1.10	-0.07	0.357	0.391	-
	Right	20175	1732.5	20.60	21.00	1.10	0.01	0.208	0.228	-
	Top	20175	1732.5	20.60	21.00	1.10	-	-	-	-
	Bottom	20175	1732.5	20.60	21.00	1.10	0.03	0.347	0.380	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	0.06	0.343	0.370	-
		20600	844.0	25.02	25.50	1.12	-	-	-	-
	Back	20450	829.0	24.99	25.50	1.12	-	-	-	-
		20525	836.5	25.17	25.50	1.08	-0.10	0.508	0.548	16
		20600	844.0	25.02	25.50	1.12	-	-	-	-
	Left	20525	836.5	25.17	25.50	1.08	0.04	0.359	0.387	-
	Right	20525	836.5	25.17	25.50	1.08	-0.04	0.221	0.238	-
	Top	20525	836.5	25.17	25.50	1.08	-	-	-	-
	Bottom	20525	836.5	25.17	25.50	1.08	-0.06	0.307	0.332	-
10M_25RB	Front	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	0.03	0.194	0.219	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-
	Back	20450	829.0	24.31	25.00	1.17	-	-	-	-
		20525	836.5	24.48	25.00	1.13	-0.05	0.355	0.400	-
		20600	844.0	24.33	25.00	1.17	-	-	-	-
	Left	20525	836.5	24.48	25.00	1.13	0.04	0.234	0.264	-
	Right	20525	836.5	24.48	25.00	1.13	-0.02	0.154	0.174	-
	Top	20525	836.5	24.48	25.00	1.13	-	-	-	-
	Bottom	20525	836.5	24.48	25.00	1.13	-0.01	0.194	0.219	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 12										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	0.08	0.426	0.495	-
		23130	711.0	24.51	25.00	1.12	-	-	-	-
	Back	23060	704.0	24.43	25.00	1.14	-	-	-	-
		23095	707.5	24.35	25.00	1.16	0.00	0.632	0.734	18
		23130	711.0	24.51	25.00	1.12	-	-	-	-
	Left	23095	707.5	24.35	25.00	1.16	0.12	0.447	0.519	-
	Right	23095	707.5	24.35	25.00	1.16	0.02	0.274	0.319	-
	Top	23095	707.5	24.35	25.00	1.16	-	-	-	-
	Bottom	23095	707.5	24.35	25.00	1.16	0.00	0.383	0.444	-
10M_25RB	Front	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	-0.08	0.297	0.340	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-
	Back	23060	704.0	23.54	24.00	1.11	-	-	-	-
		23095	707.5	23.42	24.00	1.14	0.12	0.544	0.622	-
		23130	711.0	23.21	24.00	1.20	-	-	-	-
	Left	23095	707.5	23.42	24.00	1.14	-0.09	0.359	0.411	-
	Right	23095	707.5	23.42	24.00	1.14	0.04	0.236	0.270	-
	Top	23095	707.5	23.42	24.00	1.14	-	-	-	-
	Bottom	23095	707.5	23.42	24.00	1.14	0.02	0.298	0.340	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 13										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	23230	782	23.68	24.00	1.08	0.10	0.386	0.415	-
	Back	23230	782	23.68	24.00	1.08	-0.16	0.572	0.616	20
	Left	23230	782	23.68	24.00	1.08	0.06	0.404	0.435	-
	Right	23230	782	23.68	24.00	1.08	-0.06	0.248	0.267	-
	Top	23230	782	23.68	24.00	1.08	-	-	-	-
	Bottom	23230	782	23.68	24.00	1.08	-0.10	0.346	0.373	-
10M_25RB	Front	23230	782	23.56	24.00	1.11	0.07	0.295	0.326	-
	Back	23230	782	23.56	24.00	1.11	-0.10	0.539	0.596	-
	Left	23230	782	23.56	24.00	1.11	0.08	0.356	0.394	-
	Right	23230	782	23.56	24.00	1.11	-0.04	0.234	0.259	-
	Top	23230	782	23.56	24.00	1.11	-	-	-	-
	Bottom	23230	782	23.56	24.00	1.11	-0.01	0.295	0.327	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	0.07	0.445	0.490	-
		23800	711	24.66	25.00	1.08	-	-	-	-
	Back	23780	709	24.35	25.00	1.16	-	-	-	-
		23790	710	24.58	25.00	1.10	-0.11	0.660	0.727	22
		23800	711	24.66	25.00	1.08	-	-	-	-
	Left	23790	710	24.58	25.00	1.10	0.04	0.466	0.514	-
	Right	23790	710	24.58	25.00	1.10	-0.04	0.287	0.316	-
	Top	23790	710	24.58	25.00	1.10	-	-	-	-
	Bottom	23790	710	24.58	25.00	1.10	-0.07	0.399	0.440	-
10M_25RB	Front	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	0.05	0.273	0.303	-
		23800	711	23.84	24.50	1.16	-	-	-	-
	Back	23780	709	23.69	24.50	1.21	-	-	-	-
		23790	710	24.05	24.50	1.11	-0.08	0.499	0.554	-
		23800	711	23.84	24.50	1.16	-	-	-	-
	Left	23790	710	24.05	24.50	1.11	0.06	0.330	0.366	-
	Right	23790	710	24.05	24.50	1.11	-0.03	0.217	0.241	-
	Top	23790	710	24.05	24.50	1.11	-	-	-	-
	Bottom	23790	710	24.05	24.50	1.11	-0.01	0.273	0.303	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 30										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M_1RB	Front	27710	2310	23.23	23.50	1.06	0.10	0.407	0.434	-
	Back	27710	2310	23.23	23.50	1.06	-0.15	0.604	0.643	24
	Left	27710	2310	23.23	23.50	1.06	0.05	0.427	0.454	-
	Right	27710	2310	23.23	23.50	1.06	-0.05	0.262	0.279	-
	Top	27710	2310	23.23	23.50	1.06	-	-	-	-
	Bottom	27710	2310	23.23	23.50	1.06	-0.10	0.366	0.389	-
10M_25RB	Front	27710	2310	22.15	22.50	1.08	0.04	0.279	0.303	-
	Back	27710	2310	22.15	22.50	1.08	-0.06	0.511	0.554	-
	Left	27710	2310	22.15	22.50	1.08	0.05	0.337	0.366	-
	Right	27710	2310	22.15	22.50	1.08	-0.02	0.222	0.241	-
	Top	27710	2310	22.15	22.50	1.08	-	-	-	-
	Bottom	27710	2310	22.15	22.50	1.08	-0.01	0.280	0.303	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

WIFI 2.4G										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
802.11b 1Mbps	Front	1	2412	13.19	13.50	1.07	-	-	-	-
		6	2437	13.09	13.50	1.10	0.17	0.040	0.044	-
		11	2462	13.01	13.50	1.12	-	-	-	-
	Back	1	2412	13.19	13.50	1.07	-	-	-	-
		6	2437	13.09	13.50	1.10	-0.14	0.059	0.065	26
		11	2462	13.01	13.50	1.12	-	-	-	-
	Left	6	2437	13.09	13.50	1.10	-0.10	0.049	0.054	-
	Right	6	2437	13.09	13.50	1.10	-	-	-	-
	Top	6	2437	13.09	13.50	1.10	0.04	0.039	0.043	-
	Bottom	6	2437	13.09	13.50	1.10	-	-	-	-

Note:

- According to the above table, the initial test position for body is "Rear", and its reported SAR is $\leq 0.4\text{W/kg}$. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, the 802.11g/n is not required

WIFI 2.4G- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Front	6	2437	100%	100%	0.044	0.044
	Back	6	2437	100%	100%	0.065	0.065
	Right	6	2437	100%	100%	0.054	0.054
	Top	6	2437	100%	100%	0.043	0.043

Note:

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 100% is achievable for WLAN in this project.

15. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note
1	GSM(voice) + Bluetooth (data)	Yes	Yes		
2	GSM(voice) + WIFI (data)	Yes	Yes		
3	WCDMA(voice) + Bluetooth (data)	Yes	Yes		
4	WCDMA(voice) + WIFI (data)	Yes	Yes		
5	GPRS (data) + Bluetooth (data)	Yes	Yes	NA	
6	GPRS (data) + WIFI (data)	Yes	Yes	Yes	
7	WCDMA (data) + Bluetooth (data)	Yes	Yes	NA	
8	WCDMA (data) + WIFI (data)	Yes	Yes	Yes	
9	LTE + Bluetooth (data)	Yes	Yes	NA	
10	LTE + WIFI (data)	Yes	Yes	Yes	

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Head	Body-worn
	Test separation	0mm	10mm
3.70 dBm	Estimated SAR (W/kg)	0.098	0.049

Maximum reported SAR value for Head

WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCE	WLAN DTS	
GSM	GSM850	Left Cheek	0.622	0.056	0.678
		Left Tilted	0.476	0.047	0.523
		Right Cheek	0.577	0.135	0.712
		Right Tilted	0.437	0.114	0.551
	PCS1900	Left Cheek	0.261	0.056	0.317
		Left Tilted	0.210	0.047	0.257
		Right Cheek	0.616	0.135	0.751
		Right Tilted	0.484	0.114	0.598
WCDMA	Band II	Left Cheek	0.545	0.056	0.601
		Left Tilted	0.448	0.047	0.495
		Right Cheek	0.671	0.135	0.806
		Right Tilted	0.537	0.114	0.651
	Band IV	Left Cheek	0.431	0.056	0.487
		Left Tilted	0.354	0.047	0.401
		Right Cheek	0.572	0.135	0.707
		Right Tilted	0.458	0.114	0.572
	Band V	Left Cheek	0.497	0.056	0.553
		Left Tilted	0.400	0.047	0.447
		Right Cheek	0.461	0.135	0.596
		Right Tilted	0.362	0.114	0.476
LTE	B2 1RB	Left Cheek	0.284	0.056	0.340
		Left Tilted	0.233	0.047	0.280
		Right Cheek	0.378	0.135	0.513
		Right Tilted	0.301	0.114	0.415
	B2 50RB	Left Cheek	0.226	0.056	0.282
		Left Tilted	0.198	0.047	0.245
		Right Cheek	0.272	0.135	0.407
		Right Tilted	0.232	0.114	0.346
	B4 1RB	Left Cheek	0.435	0.056	0.491
		Left Tilted	0.325	0.047	0.372
		Right Cheek	0.575	0.135	0.710
		Right Tilted	0.446	0.114	0.560
	B4 50RB	Left Cheek	0.276	0.056	0.332
		Left Tilted	0.218	0.047	0.265
		Right Cheek	0.389	0.135	0.524
		Right Tilted	0.276	0.114	0.390

LTE	B5 1RB	Left Cheek	0.568	0.056	0.624
		Left Tilted	0.475	0.047	0.522
		Right Cheek	0.548	0.135	0.683
		Right Tilted	0.435	0.114	0.549
	B5 25RB	Left Cheek	0.452	0.056	0.508
		Left Tilted	0.350	0.047	0.397
		Right Cheek	0.450	0.135	0.585
		Right Tilted	0.367	0.114	0.481
	B12 1RB	Left Cheek	0.343	0.056	0.399
		Left Tilted	0.287	0.047	0.334
		Right Cheek	0.331	0.135	0.466
		Right Tilted	0.262	0.114	0.376
	B12 25RB	Left Cheek	0.255	0.056	0.311
		Left Tilted	0.198	0.047	0.245
		Right Cheek	0.254	0.135	0.389
		Right Tilted	0.207	0.114	0.321
	B13 1RB	Left Cheek	0.498	0.056	0.554
		Left Tilted	0.417	0.047	0.464
		Right Cheek	0.482	0.135	0.617
		Right Tilted	0.382	0.114	0.496
	B13 25RB	Left Cheek	0.470	0.056	0.526
		Left Tilted	0.365	0.047	0.412
		Right Cheek	0.468	0.135	0.603
		Right Tilted	0.382	0.114	0.496
	B17 1RB	Left Cheek	0.392	0.056	0.448
		Left Tilted	0.328	0.047	0.375
		Right Cheek	0.379	0.135	0.514
		Right Tilted	0.300	0.114	0.414
	B17 25RB	Left Cheek	0.301	0.056	0.357
		Left Tilted	0.234	0.047	0.281
		Right Cheek	0.300	0.135	0.435
		Right Tilted	0.245	0.114	0.359
	B30 1RB	Left Cheek	0.438	0.056	0.494
		Left Tilted	0.367	0.047	0.414
		Right Cheek	0.562	0.135	0.697
		Right Tilted	0.445	0.114	0.559
	B30 25RB	Left Cheek	0.353	0.056	0.409
		Left Tilted	0.274	0.047	0.321
		Right Cheek	0.437	0.135	0.572
		Right Tilted	0.357	0.114	0.471

WWAN PCE + Bluetooth					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCE	Bluetooth	
GSM	GSM850	Left Cheek	0.622	0.098	0.720
		Left Tilted	0.476	0.098	0.574
		Right Cheek	0.577	0.098	0.675
		Right Tilted	0.437	0.098	0.535
	PCS1900	Left Cheek	0.261	0.098	0.359
		Left Tilted	0.210	0.098	0.308
		Right Cheek	0.616	0.098	0.714
		Right Tilted	0.484	0.098	0.582
WCDMA	Band II	Left Cheek	0.545	0.098	0.643
		Left Tilted	0.448	0.098	0.546
		Right Cheek	0.671	0.098	0.769
		Right Tilted	0.537	0.098	0.635
	Band IV	Left Cheek	0.431	0.098	0.529
		Left Tilted	0.354	0.098	0.452
		Right Cheek	0.572	0.098	0.670
		Right Tilted	0.458	0.098	0.556
	Band V	Left Cheek	0.497	0.098	0.595
		Left Tilted	0.400	0.098	0.498
		Right Cheek	0.461	0.098	0.559
		Right Tilted	0.362	0.098	0.460
LTE	B2 1RB	Left Cheek	0.284	0.098	0.382
		Left Tilted	0.233	0.098	0.331
		Right Cheek	0.378	0.098	0.476
		Right Tilted	0.301	0.098	0.399
	B2 50RB	Left Cheek	0.226	0.098	0.324
		Left Tilted	0.198	0.098	0.296
		Right Cheek	0.272	0.098	0.370
		Right Tilted	0.232	0.098	0.330
	B4 1RB	Left Cheek	0.435	0.098	0.533
		Left Tilted	0.325	0.098	0.423
		Right Cheek	0.575	0.098	0.673
		Right Tilted	0.446	0.098	0.544
	B4 50RB	Left Cheek	0.276	0.098	0.374
		Left Tilted	0.218	0.098	0.316
		Right Cheek	0.389	0.098	0.487
		Right Tilted	0.276	0.098	0.374

LTE	B5 1RB	Left Cheek	0.568	0.098	0.666
		Left Tilted	0.475	0.098	0.573
		Right Cheek	0.548	0.098	0.646
		Right Tilted	0.435	0.098	0.533
	B5 25RB	Left Cheek	0.452	0.098	0.550
		Left Tilted	0.350	0.098	0.448
		Right Cheek	0.450	0.098	0.548
		Right Tilted	0.367	0.098	0.465
	B12 1RB	Left Cheek	0.343	0.098	0.441
		Left Tilted	0.287	0.098	0.385
		Right Cheek	0.331	0.098	0.429
		Right Tilted	0.262	0.098	0.360
	B12 25RB	Left Cheek	0.255	0.098	0.353
		Left Tilted	0.198	0.098	0.296
		Right Cheek	0.254	0.098	0.352
		Right Tilted	0.207	0.098	0.305
	B13 1RB	Left Cheek	0.498	0.098	0.596
		Left Tilted	0.417	0.098	0.515
		Right Cheek	0.482	0.098	0.580
		Right Tilted	0.382	0.098	0.480
	B13 25RB	Left Cheek	0.470	0.098	0.568
		Left Tilted	0.365	0.098	0.463
		Right Cheek	0.468	0.098	0.566
		Right Tilted	0.382	0.098	0.480
	B17 1RB	Left Cheek	0.392	0.098	0.490
		Left Tilted	0.328	0.098	0.426
		Right Cheek	0.379	0.098	0.477
		Right Tilted	0.300	0.098	0.398
	B17 25RB	Left Cheek	0.301	0.098	0.399
		Left Tilted	0.234	0.098	0.332
		Right Cheek	0.300	0.098	0.398
		Right Tilted	0.245	0.098	0.343
	B30 1RB	Left Cheek	0.438	0.098	0.536
		Left Tilted	0.367	0.098	0.465
		Right Cheek	0.562	0.098	0.660
		Right Tilted	0.445	0.098	0.543
	B30 25RB	Left Cheek	0.353	0.098	0.451
		Left Tilted	0.274	0.098	0.372
		Right Cheek	0.437	0.098	0.535
		Right Tilted	0.357	0.098	0.455

Maximum reported SAR value for Body

WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.475	0.044	0.519
		Back	0.719	0.065	0.784
	PCS1900	Front	0.407	0.044	0.451
		Back	0.643	0.065	0.708
WCDMA	Band II	Front	0.562	0.044	0.606
		Back	0.789	0.065	0.854
	Band IV	Front	0.533	0.044	0.577
		Back	0.749	0.065	0.814
	Band V	Front	0.343	0.044	0.387
		Back	0.557	0.065	0.622
LTE	B2 1RB	Front	0.393	0.044	0.437
		Back	0.653	0.065	0.718
	B2 50RB	Front	0.297	0.044	0.341
		Back	0.525	0.065	0.590
	B4 1RB	Front	0.345	0.044	0.389
		Back	0.741	0.065	0.806
	B4 50RB	Front	0.251	0.044	0.295
		Back	0.575	0.065	0.640
	B5 1RB	Front	0.370	0.044	0.414
		Back	0.548	0.065	0.613
	B5 25RB	Front	0.219	0.044	0.263
		Back	0.400	0.065	0.465
	B12 1RB	Front	0.495	0.044	0.539
		Back	0.734	0.065	0.799
	B12 25RB	Front	0.340	0.044	0.384
		Back	0.622	0.065	0.687
	B13 1RB	Front	0.415	0.044	0.459
		Back	0.616	0.065	0.681
	B13 25RB	Front	0.326	0.044	0.370
		Back	0.596	0.065	0.661

LTE	B17 1RB	Front	0.490	0.044	0.534
		Back	0.727	0.065	0.792
	B17 25RB	Front	0.303	0.044	0.347
		Back	0.554	0.065	0.619
	B30 1RB	Front	0.434	0.044	0.478
		Back	0.643	0.065	0.708
	B30 25RB	Front	0.303	0.044	0.347
		Back	0.554	0.065	0.619

WWAN PCE + Bluetooth					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN PCE	Bluetooth	(W/kg)
GSM	GSM850	Front	0.475	0.049	0.524
		Back	0.719	0.049	0.768
	PCS1900	Front	0.407	0.049	0.456
		Back	0.643	0.049	0.692
WCDMA	Band II	Front	0.562	0.049	0.611
		Back	0.789	0.049	0.838
	Band IV	Front	0.533	0.049	0.582
		Back	0.749	0.049	0.798
	Band V	Front	0.343	0.049	0.392
		Back	0.557	0.049	0.606
LTE	B2 1RB	Front	0.393	0.049	0.442
		Back	0.653	0.049	0.702
	B2 50RB	Front	0.297	0.049	0.346
		Back	0.525	0.049	0.574
	B4 1RB	Front	0.345	0.049	0.394
		Back	0.741	0.049	0.790
	B4 50RB	Front	0.251	0.049	0.300
		Back	0.575	0.049	0.624
	B5 1RB	Front	0.370	0.049	0.419
		Back	0.548	0.049	0.597
	B5 25RB	Front	0.219	0.049	0.268
		Back	0.400	0.049	0.449
	B12 1RB	Front	0.495	0.049	0.544
		Back	0.734	0.049	0.783
	B12 25RB	Front	0.340	0.049	0.389
		Back	0.622	0.049	0.671
	B13 1RB	Front	0.415	0.049	0.464
		Back	0.616	0.049	0.665
	B13 25RB	Front	0.326	0.049	0.375
		Back	0.596	0.049	0.645

LTE	B17 1RB	Front	0.490	0.049	0.539
		Back	0.727	0.049	0.776
	B17 25RB	Front	0.303	0.049	0.352
		Back	0.554	0.049	0.603
	B30 1RB	Front	0.434	0.049	0.483
		Back	0.643	0.049	0.692
	B30 25RB	Front	0.303	0.049	0.352
		Back	0.554	0.049	0.603

Maximum reported SAR value for Hotspot mode


WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.475	0.044	0.519
		Back	0.719	0.065	0.784
		Left side	0.515	0.054	0.569
		Right side	0.495	-	0.495
		Top side	-	0.043	0.043
		Bottom side	0.489	-	0.489
	PCS1900	Front	0.407	0.044	0.451
		Back	0.643	0.065	0.708
		Left side	0.643	0.054	0.697
		Right side	0.389	-	0.389
		Top side	-	0.043	0.043
		Bottom side	0.404	-	0.404
WCDMA	Band II	Front	0.562	0.044	0.606
		Back	0.789	0.065	0.854
		Left side	0.537	0.054	0.591
		Right side	0.295	-	0.295
		Top side	-	0.043	0.043
		Bottom side	0.519	-	0.519
	Band IV	Front	0.533	0.044	0.577
		Back	0.749	0.065	0.814
		Left side	0.509	0.054	0.563
		Right side	0.515	-	0.515
		Top side	-	0.043	0.043
		Bottom side	0.493	-	0.493
	Band V	Front	0.343	0.044	0.387
		Back	0.557	0.065	0.622
		Left side	0.339	0.054	0.393
		Right side	0.383	-	0.383
		Top side	-	0.043	0.043
		Bottom side	0.337	-	0.337

LTE	B2 1RB	Front	0.393	0.044	0.437
		Back	0.653	0.065	0.718
		Left side	0.377	0.054	0.431
		Right side	0.286	-	0.286
		Top side	-	0.043	0.043
		Bottom side	0.409	-	0.409
	B2 50RB	Front	0.297	0.044	0.341
		Back	0.525	0.065	0.590
		Left side	0.340	0.054	0.394
		Right side	0.212	-	0.212
		Top side	-	0.043	0.043
		Bottom side	0.332	-	0.332
	B4 1RB	Front	0.345	0.044	0.389
		Back	0.741	0.065	0.806
		Left side	0.448	0.054	0.502
		Right side	0.304	-	0.304
		Top side	-	0.043	0.043
		Bottom side	0.454	-	0.454
	B4 50RB	Front	0.251	0.044	0.295
		Back	0.575	0.065	0.640
		Left side	0.391	0.054	0.445
		Right side	0.228	-	0.228
		Top side	-	0.043	0.043
		Bottom side	0.380	-	0.380
	B5 1RB	Front	0.370	0.044	0.414
		Back	0.548	0.065	0.613
		Left side	0.387	0.054	0.441
		Right side	0.238	-	0.238
		Top side	-	0.043	0.043
		Bottom side	0.332	-	0.332
	B5 25RB	Front	0.219	0.044	0.263
		Back	0.400	0.065	0.465
		Left side	0.264	0.054	0.318
		Right side	0.174	-	0.174
		Top side	-	0.043	0.043
		Bottom side	0.219	-	0.219


LTE	B12 1RB	Front	0.495	0.044	0.539
		Back	0.734	0.065	0.799
		Left side	0.519	0.054	0.573
		Right side	0.319	-	0.319
		Top side	-	0.043	0.043
		Bottom side	0.444	-	0.444
	B12 25RB	Front	0.340	0.044	0.384
		Back	0.622	0.065	0.687
		Left side	0.411	0.054	0.465
		Right side	0.270	-	0.270
		Top side	-	0.043	0.043
		Bottom side	0.340	-	0.340
	B13 1RB	Front	0.415	0.044	0.459
		Back	0.616	0.065	0.681
		Left side	0.435	0.054	0.489
		Right side	0.267	-	0.267
		Top side	-	0.043	0.043
		Bottom side	0.373	-	0.373
	B13 25RB	Front	0.326	0.044	0.370
		Back	0.596	0.065	0.661
		Left side	0.394	0.054	0.448
		Right side	0.259	-	0.259
		Top side	-	0.043	0.043
		Bottom side	0.327	-	0.327
	B17 1RB	Front	0.490	0.044	0.534
		Back	0.727	0.065	0.792
		Left side	0.514	0.054	0.568
		Right side	0.316	-	0.316
		Top side	-	0.043	0.043
		Bottom side	0.440	-	0.440
	B17 25RB	Front	0.303	0.044	0.347
		Back	0.554	0.065	0.619
		Left side	0.366	0.054	0.420
		Right side	0.241	-	0.241
		Top side	-	0.043	0.043
		Bottom side	0.303	-	0.303

LTE	B30 1RB	Front	0.434	0.044	0.478
		Back	0.643	0.065	0.708
		Left side	0.454	0.054	0.508
		Right side	0.279	-	0.279
		Top side	-	0.043	0.043
		Bottom side	0.389	-	0.389
	B30 25RB	Front	0.303	0.044	0.347
		Back	0.554	0.065	0.619
		Left side	0.366	0.054	0.420
		Right side	0.241	-	0.241
		Top side	-	0.043	0.043
		Bottom side	0.303	-	0.303


16. TestSetup Photos

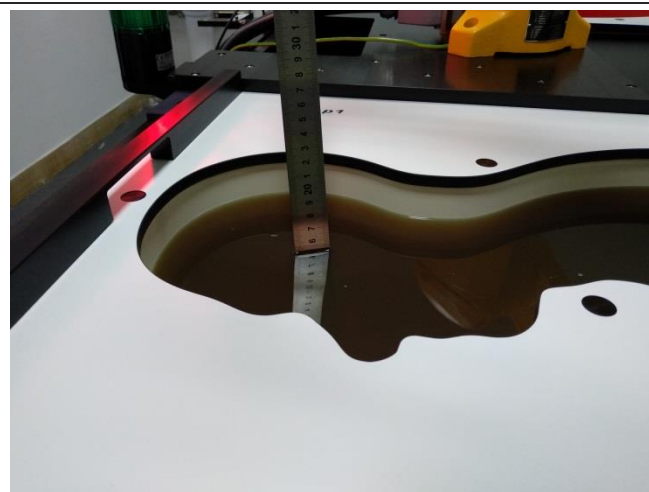


Liquid depth in the Head phantom

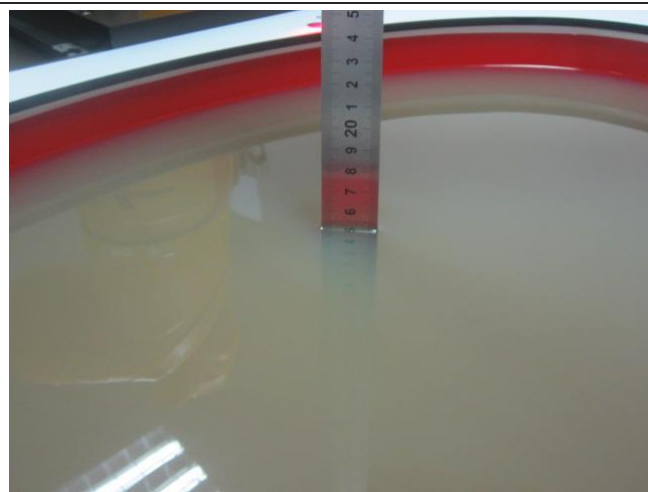


Liquid depth in the Body phantom

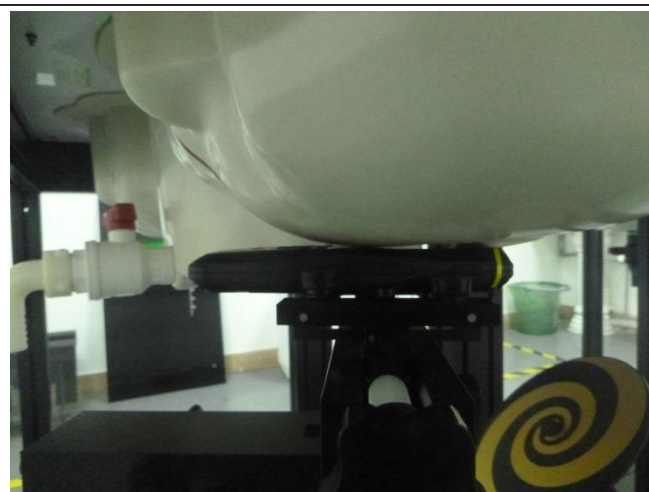

Left Head Touch

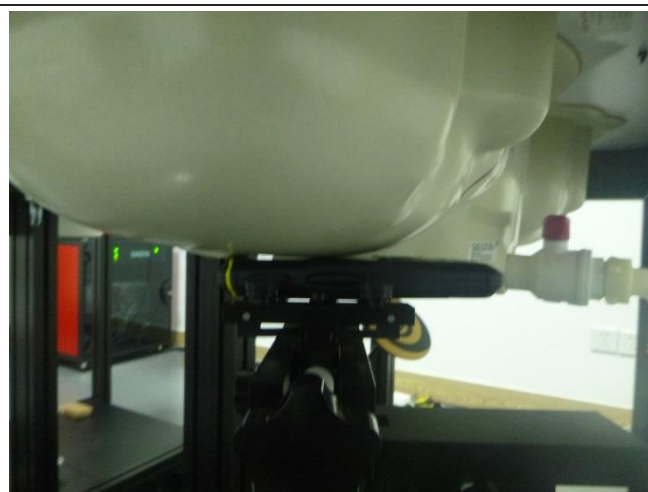

Right Head Touch

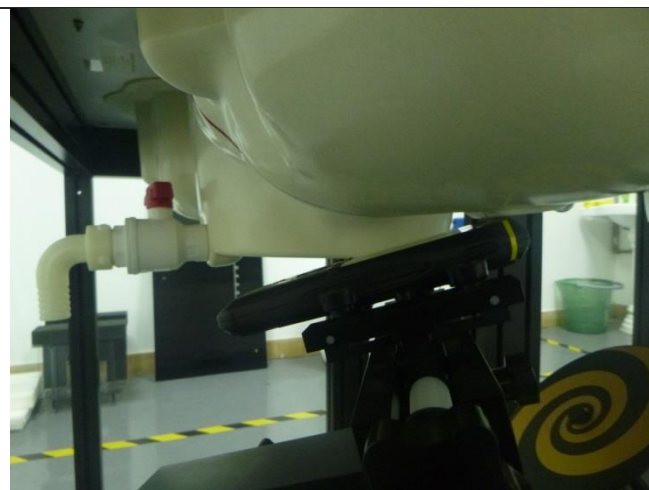

Left Head Tilt (15°)



Right Head Tilt (15°)



Body-worn Front (10mm)



Body-worn Rear (10mm)



Front (10mm)




Rear (10mm)



Left Side (10mm)



Right Side (10mm)

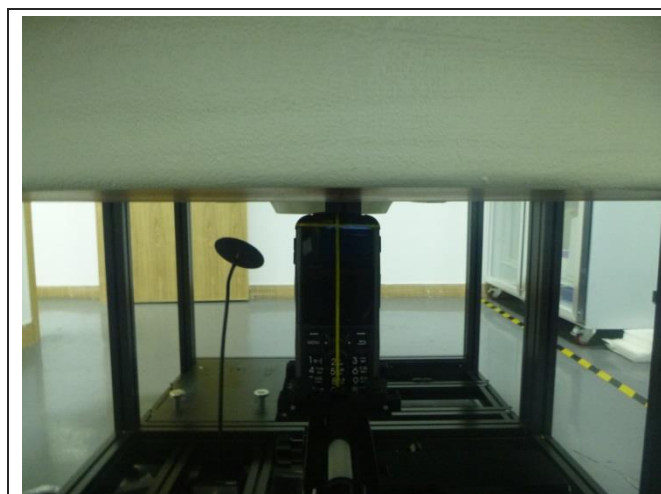


Top Side (10mm)



Bottom Side (10mm)

17. External Photos of the EUT

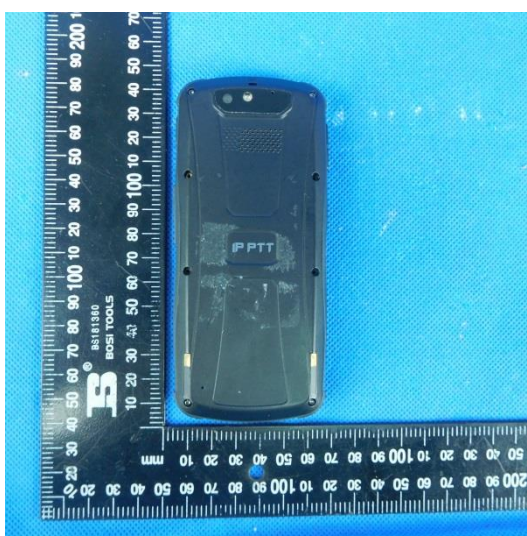

-----End of Report-----