



RADIO TEST REPORT

Applicant	:	Guangzhou Shikun Electronics Co., Ltd
Address of Applicant	:	NO.6 Liankun Road, Huangpu District, Guangzhou510530, China
Manufacturer	:	Guangzhou Shikun Electronics Co., Ltd
Address of Manufacturer	:	NO.6 Liankun Road, Huangpu District, Guangzhou510530, China
Equipment under Test	:	IEEE 802.11a/b/g/n/ac 2T2R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/4.2/5.1
Model No.	:	SKI.WB663U.2
FCC ID	:	2AR82-SKIWB663U21
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020+Cor.1-2023, KDB 662911 D01 Multiple Transmitter Output v02r01
Report No.	:	DDT-RE26041329-1E04
Issue Date	:	2026/04/30
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	6
2.	General Test Information.....	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	8
2.3.	Block diagram of EUT configuration for test.....	8
2.4.	Decision of final test mode	8
2.5.	Deviations of test standard	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty	10
3.	Equipment Used During Conductive Test	11
4.	6dB Bandwidth	12
4.1.	Block diagram of test setup	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Test graphs	14
5.	Conducted Output Power	22
5.1.	Block diagram of test setup	22
5.2.	Limits	22
5.3.	Test procedure	22
5.4.	Test result average.....	23
6.	Power Spectral Density	24
6.1.	Block diagram of test setup	24
6.2.	Limits	24
6.3.	Test procedure	24
6.4.	Test result.....	25
6.5.	Test graphs	25
7.	Antenna Requirements.....	28
7.1.	Limit.....	28
7.2.	Result	28
8.	Radiated Emission	29
8.1.	Test equipment.....	29
8.2.	Block diagram of test setup	30
8.3.	Limits	31
8.4.	Assistant equipment used for test	32

8.5.	Test procedure	32
8.6.	Test result.....	34
8.7.	Test data	35
9.	Band Edge Compliance.....	43
9.1.	Test equipment.....	43
9.2.	Block diagram of test setup	43
9.3.	Limits	43
9.4.	Assistant equipment used for test	43
9.5.	Test procedure	44
9.6.	Test result.....	44
9.7.	Test data	45
10.	Test Setup Photograph	69
11.	Photos of the EUT	71

Test Report Declare

Applicant	:	Guangzhou Shikun Electronics Co., Ltd
Address of Applicant	:	NO.6 Liankun Road, Huangpu District, Guangzhou510530, China
Equipment under Test	:	IEEE 802.11a/b/g/n/ac 2T2R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/4.2/5.1
Model No.	:	SKI.WB663U.2
Manufacturer	:	Guangzhou Shikun Electronics Co., Ltd
Address of Manufacturer	:	NO.6 Liankun Road, Huangpu District, Guangzhou510530, China

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020+Cor.1-2023,
KDB 662911 D01 Multiple Transmitter Output v02r01

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE26041329-1E04		
Date of Receipt:	2026/04/14	Date of Test:	2026/04/14 - 2026/04/29

Created: Tiger Mo	Reviewed: Johnson Huang	Approved: Ella Gong
		
2026/04/29	2026/04/30	2026/04/30

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/04/30	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth	47 CFR Part 15 15.247(a)(2)	/	Pass
2	Peak Output Power	47 CFR Part 15 15.247(b)(3)	/	Refer
3	Power Spectral Density	47 CFR Part 15 15.247(e)	/	Refer
4	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d)	/	Refer
5	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
7	Antenna Requirement	47 CFR Part 15 15.203	/	Pass
8	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Refer

Note1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: For the Result marked the "Refer" means the test item refer to original report, report number is 4790010773.1-3 from UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Note 3: This report add three new antennas to the original report. Verified RF output power, Power Spectral Density, Supplements 6 dB Bandwidth, Radiated Emission and Band Edge Compliance tests on the basis of the original certification to verify that the product meets the standards requirements. Please refer to the original report for other test data.

2. General Test Information

2.1. Description of EUT

EUT Name	:	IEEE 802.11a/b/g/n/ac 2T2R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/4.2/5.1
Model Number	:	SKI.WB663U.2
Difference of model number	:	/
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 3.3V
Antenna Type	:	Steel Sheet Antenna
Max Antenna Gain(dBi)	:	2.96
Directional gain(dBi)	:	5.97
Directional gain= $G_{ANT} + \text{Array Gain}$ Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB. N_{ANT} : number of transmit antennas N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$		

Operation Frequency	New Antenna (6150-020011), Gain	New Antenna (6150-350001), Gain	New Antenna (6150-010011), Gain
Bluetooth: 2402-2480MHz	Steel sheet antenna, 1.76 dBi	Steel sheet antenna, 2.44 dBi	Steel sheet antenna, 2.96 dBi
802.11b/g/n: 2412-2462MHz	Steel sheet Antenna, 1.76dBi	Steel sheet antenna, 2.44 dBi	Steel sheet antenna, 2.96 dBi
802.11a/n/ac: 5180-5825MHz	Steel sheet Antenna, 2.86dBi	Steel sheet Antenna, 2.60 dBi	Steel sheet Antenna, 2.95dBi

Note: The Radiated test used the (6150-010011) antenna with the maximum gain.

Radio Technology	:	IEEE 802.11b/g/n
Operation frequency	:	IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz
Modulation	:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QA Tool.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	1A	1A	1	LCH: CH1	2412
	1A	1A	1	MCH: CH6	2437
	1A	1A	1	HCH: CH11	2462
IEEE 802.11g	1C	1C	6	LCH: CH1	2412
	1C	1C	6	MCH: CH6	2437
	1C	1C	6	HCH: CH11	2462
IEEE 802.11n HT20	1C	1C	MCS 8	LCH: CH1	2412
	1C	1C	MCS 8	MCH: CH6	2437
	1C	1C	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	16	16	MCS 8	LCH: CH3	2422
	16	16	MCS 8	MCH: CH6	2437
	16	16	MCS 8	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.9%
Peak Output Power (Conducted) (Spectrum analyzer)	0.98 dB
Peak Output Power (Conducted) (Power Sensor)	1.18 dB
Power Spectral Density (Base EIRP)	1.51 dB
Power Spectral Density (Spectrum analyzer)	0.98 dB
Frequencies Stability	1.9 kHz
Conducted spurious emissions	1.21 dB ($9\text{ kHz} \leq f < 7\text{ GHz}$);
	3.31 dB ($7\text{ GHz} \leq f < 40\text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	5.5×10^{-8}
Time	0.11%
Temperature	0.3 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.28 dB (Antenna Polarize: V)
	4.14 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.22 dB (1 - 6 GHz)
	4.52 dB (6 GHz - 18 GHz)
	4.58 dB (18 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 5#)				
Spectrum Analyzer	R&S	FSV40	101903	2026/07/04
Wideband Radio Communication Tester	R&S	CMW500	132871	2026/05/13
EXG Vector Generator	Agilent	N5172B	MY53051914	2027/01/07
MXG Vector Signal Generator	Agilent	N5173B	MY62220219	2026/05/05
RF Control Unit	Tonscend	JS0806-2	806JS2X021509251015	2026/12/16
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

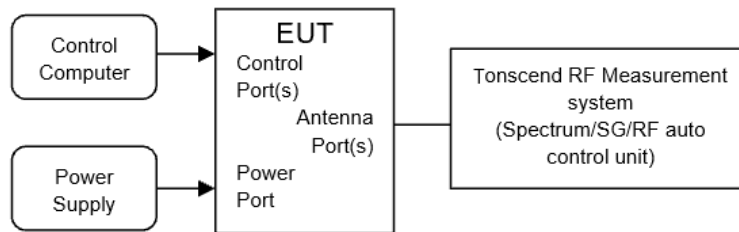

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold

Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report

4.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF Test System 5#
Ambient Condition:	24.5℃,44.5%RH	Test Date:	2026.4.25
Test Power Supply:	DC 3.3V	Sample Number:	S26041329-001

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.28	2407.36	2416.64	0.5	PASS
	Ant2	2412	9.28	2407.36	2416.64	0.5	PASS
	Ant1	2437	9.24	2432.36	2441.60	0.5	PASS
	Ant2	2437	9.28	2432.36	2441.64	0.5	PASS
	Ant1	2462	9.24	2457.36	2466.60	0.5	PASS
	Ant2	2462	9.28	2457.36	2466.64	0.5	PASS
11G	Ant1	2412	16.20	2403.88	2420.08	0.5	PASS
	Ant2	2412	16.12	2403.92	2420.04	0.5	PASS
	Ant1	2437	16.12	2428.92	2445.04	0.5	PASS
	Ant2	2437	16.24	2428.88	2445.12	0.5	PASS
	Ant1	2462	16.28	2453.84	2470.12	0.5	PASS
	Ant2	2462	16.12	2453.96	2470.08	0.5	PASS
11N20MIMO	Ant1	2412	17.44	2403.32	2420.76	0.5	PASS
	Ant2	2412	16.72	2403.64	2420.36	0.5	PASS
	Ant1	2437	17.48	2428.32	2445.80	0.5	PASS
	Ant2	2437	16.64	2428.64	2445.28	0.5	PASS
	Ant1	2462	17.16	2453.48	2470.64	0.5	PASS
	Ant2	2462	16.72	2453.68	2470.40	0.5	PASS
11N40MIMO	Ant1	2422	36.08	2403.92	2440.00	0.5	PASS
	Ant2	2422	35.44	2404.40	2439.84	0.5	PASS
	Ant1	2437	35.04	2419.56	2454.60	0.5	PASS
	Ant2	2437	35.20	2419.40	2454.60	0.5	PASS
	Ant1	2452	35.84	2434.24	2470.08	0.5	PASS
	Ant2	2452	35.36	2434.32	2469.68	0.5	PASS


4.5. Test graphs






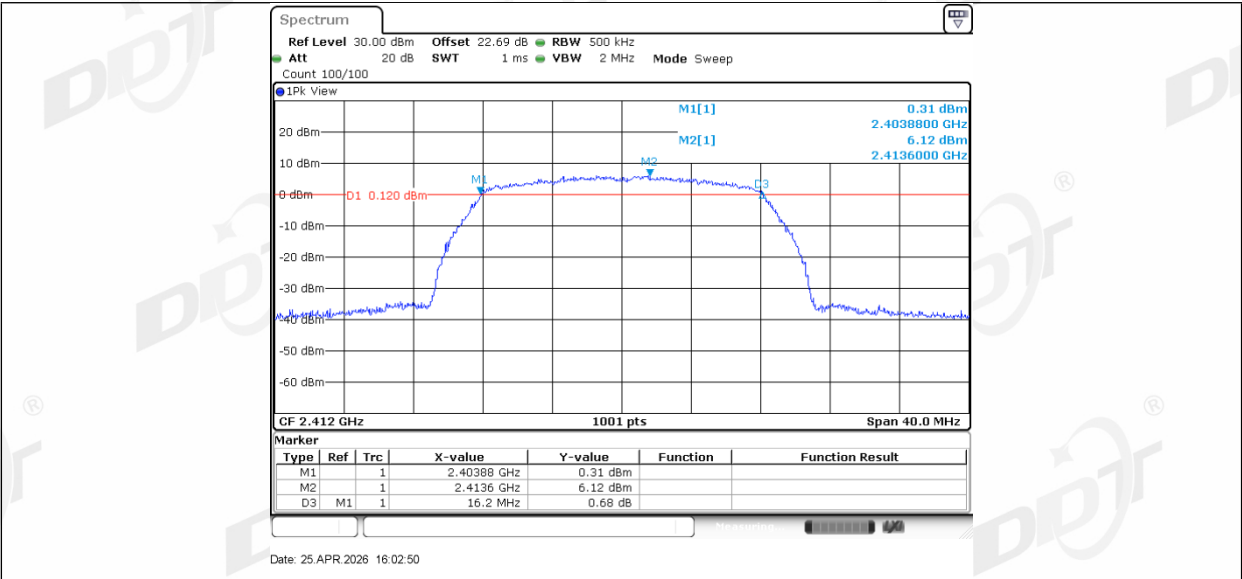


11G Ant2 2412

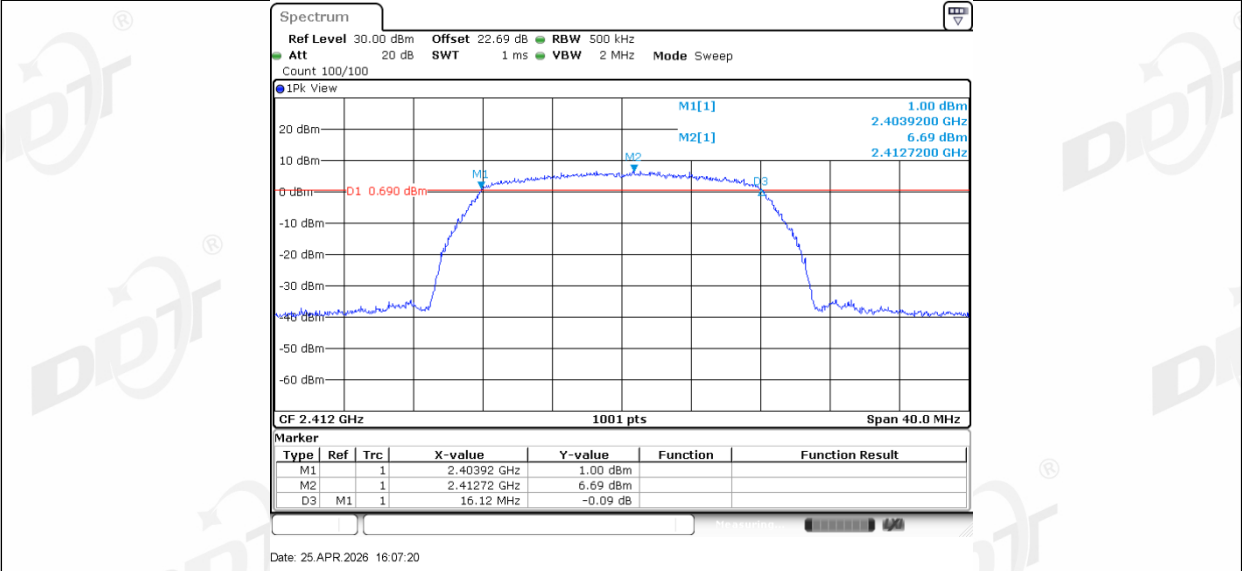


11G Ant1 2437

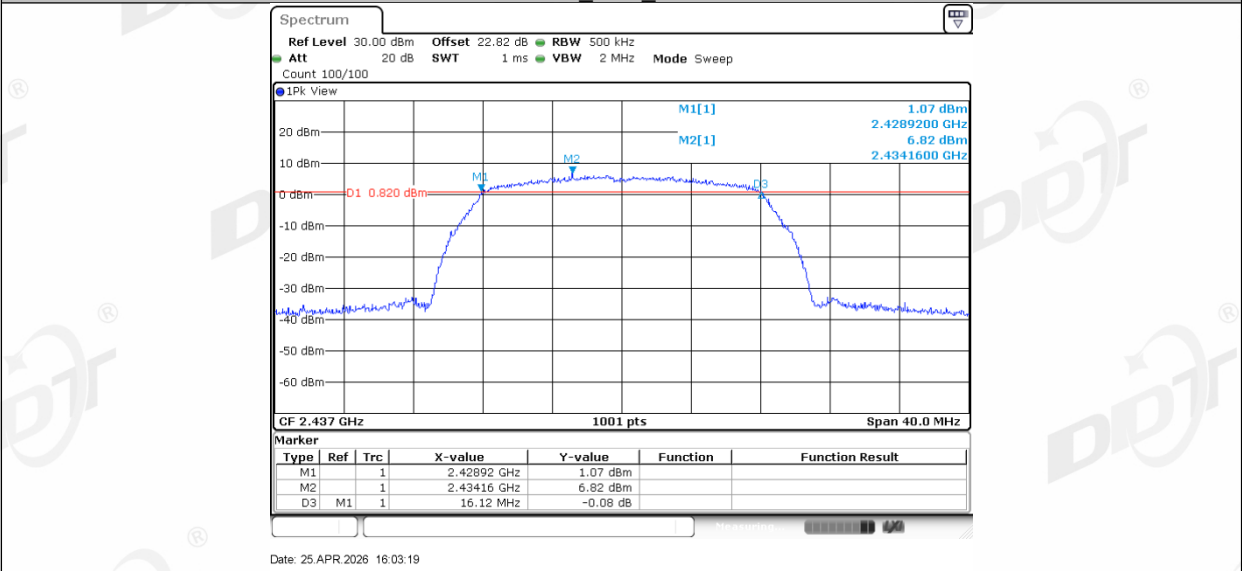


11G Ant2 2437

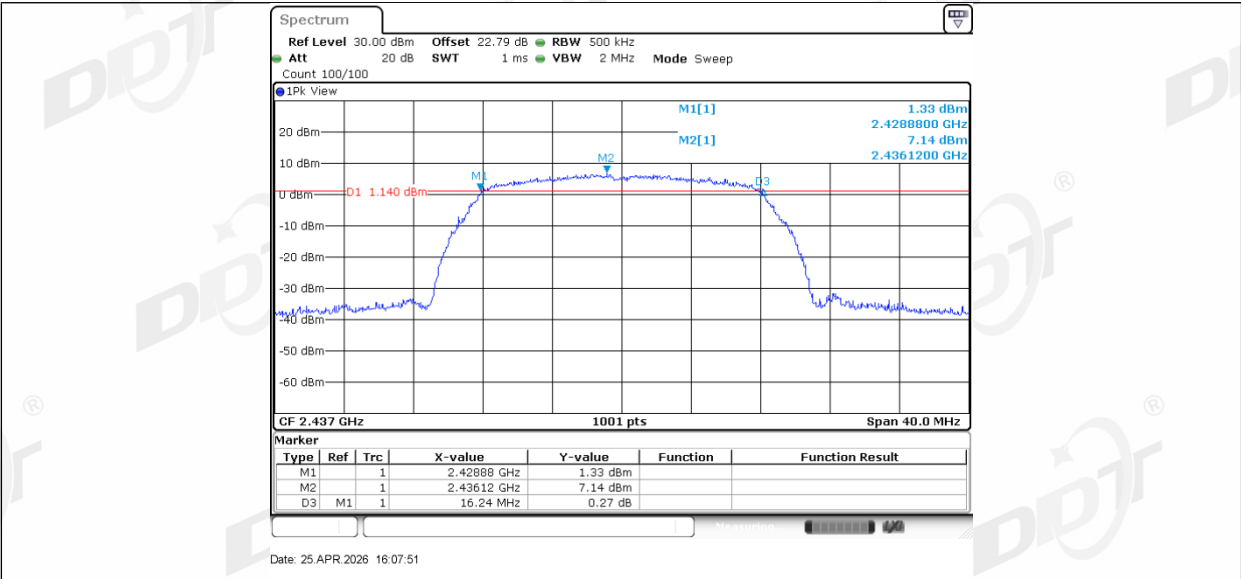


11G Ant1_2462

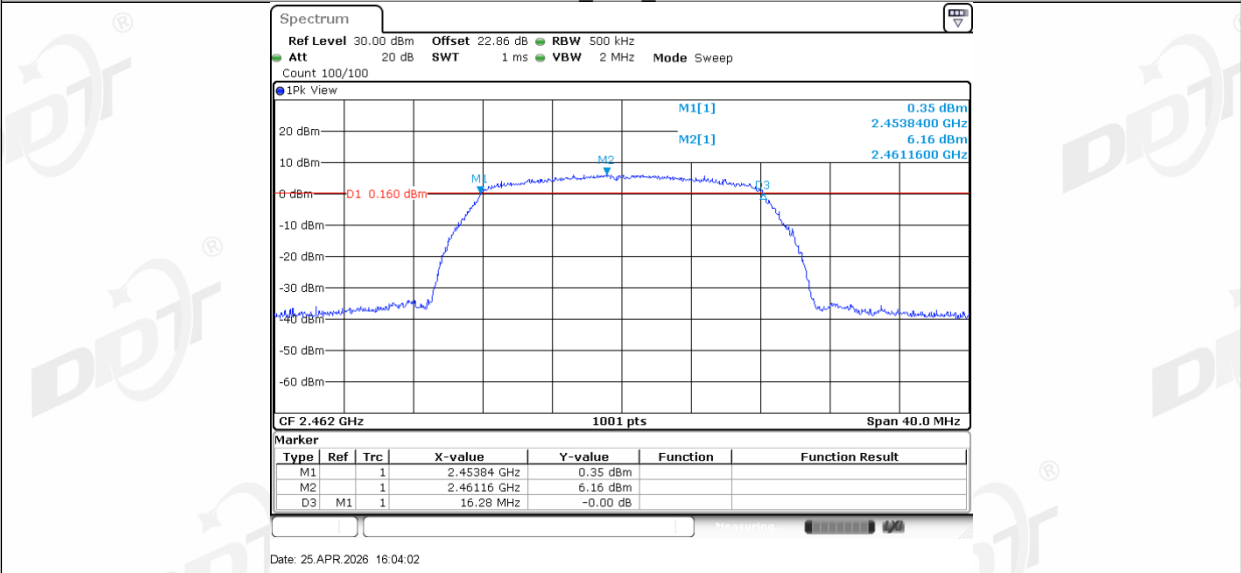


11G Ant2_2462

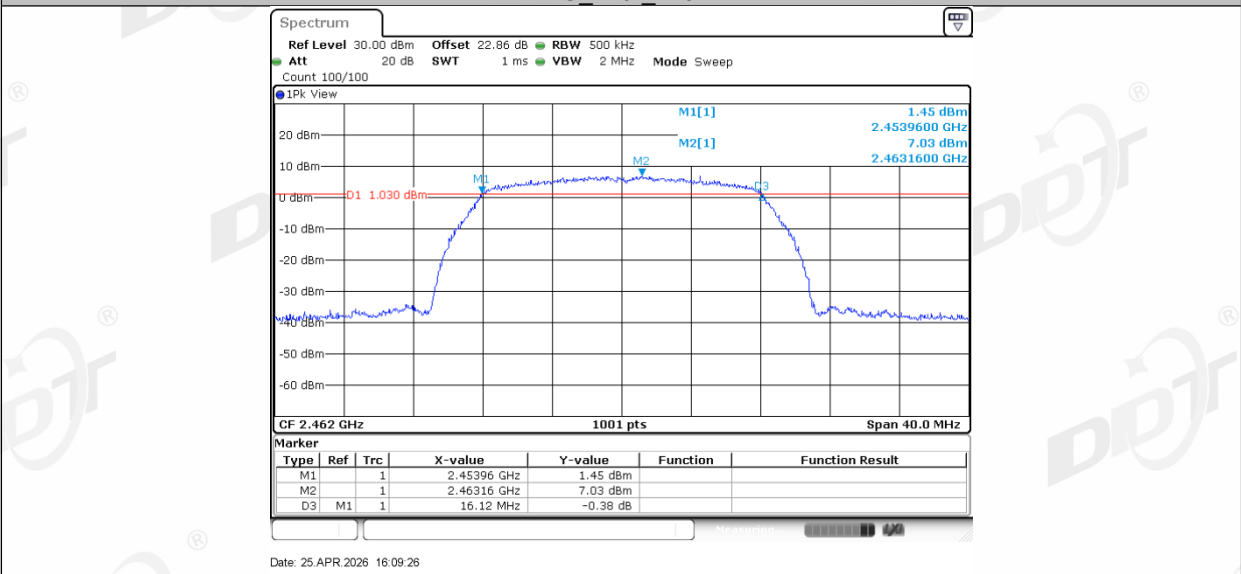


11N20MIMO_Ant1_2412

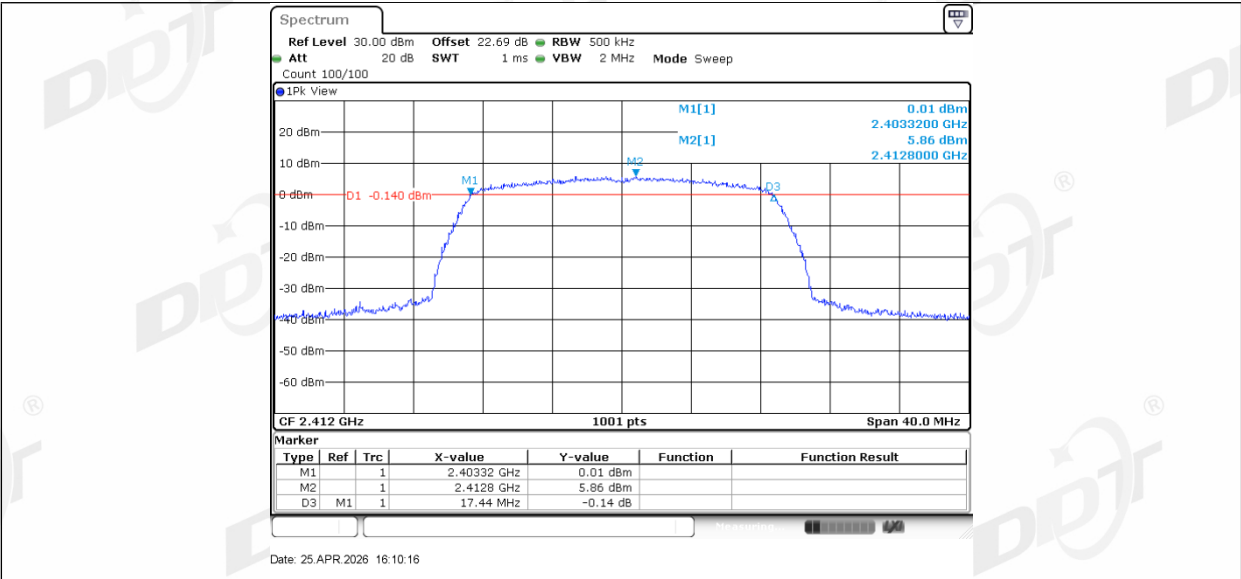


11N20MIMO_Ant2_2412

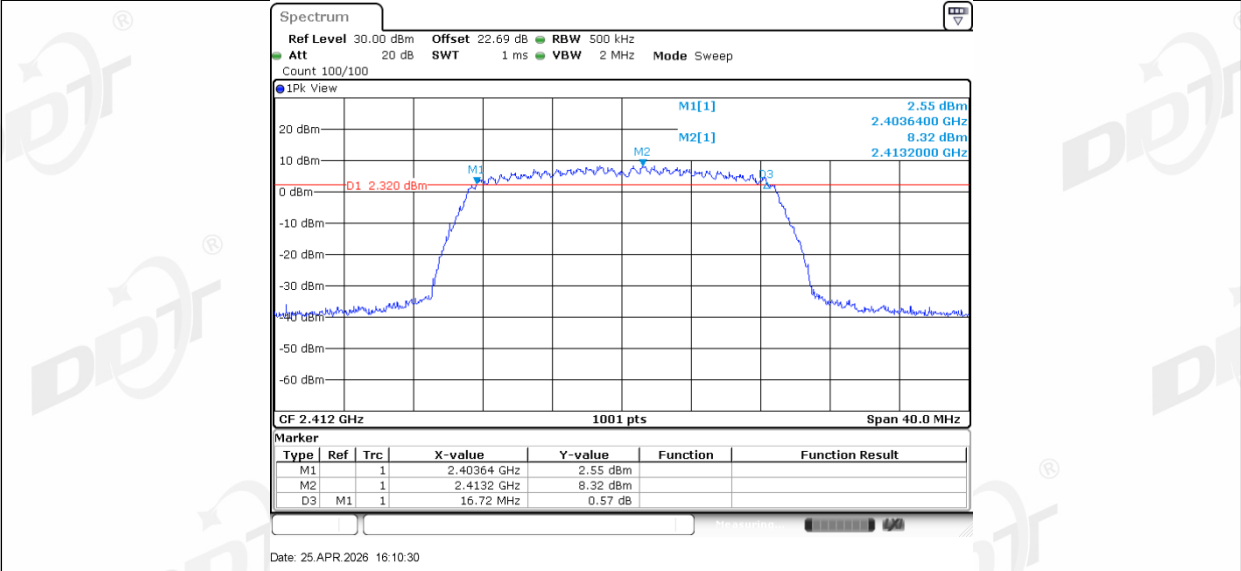


11N20MIMO_Ant1_2437

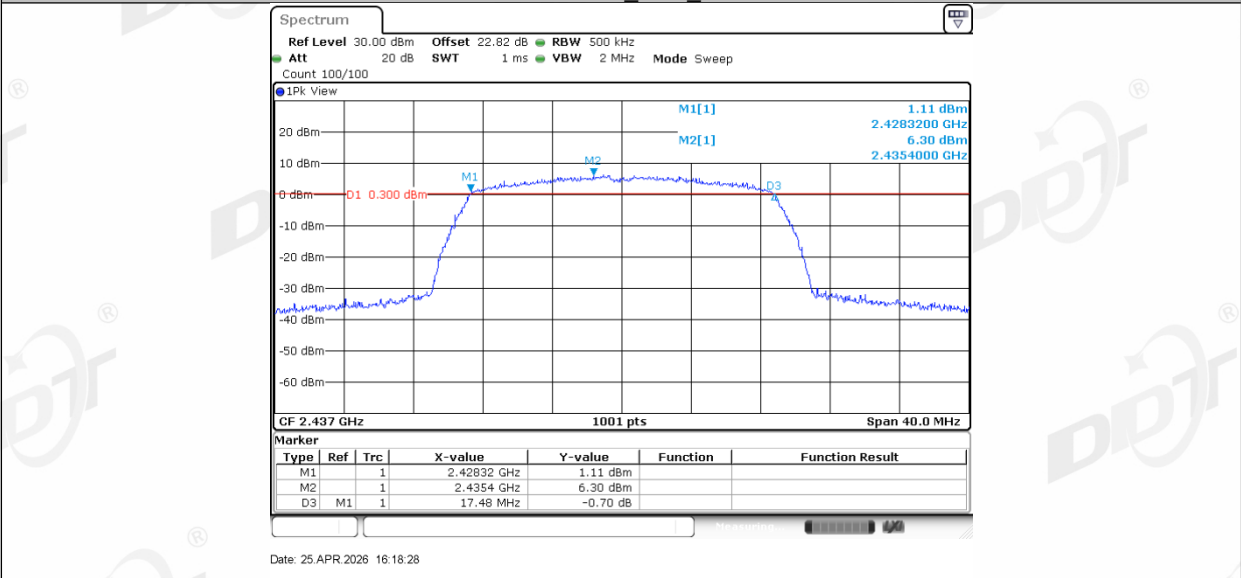


11N20MIMO_Ant2_2437

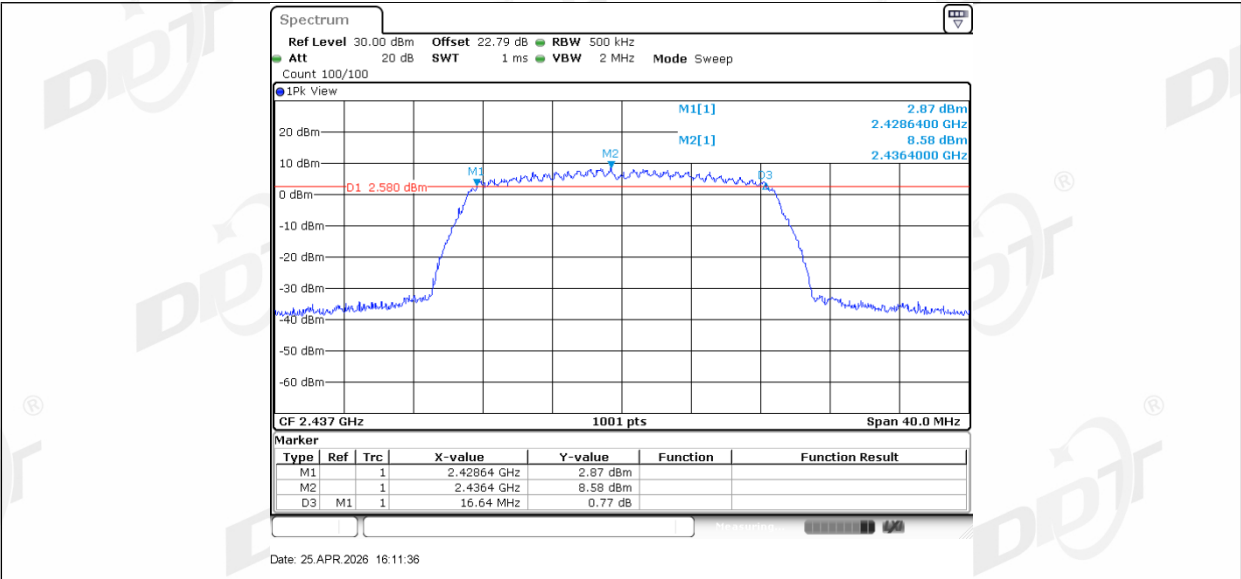


11N20MIMO_Ant1_2462

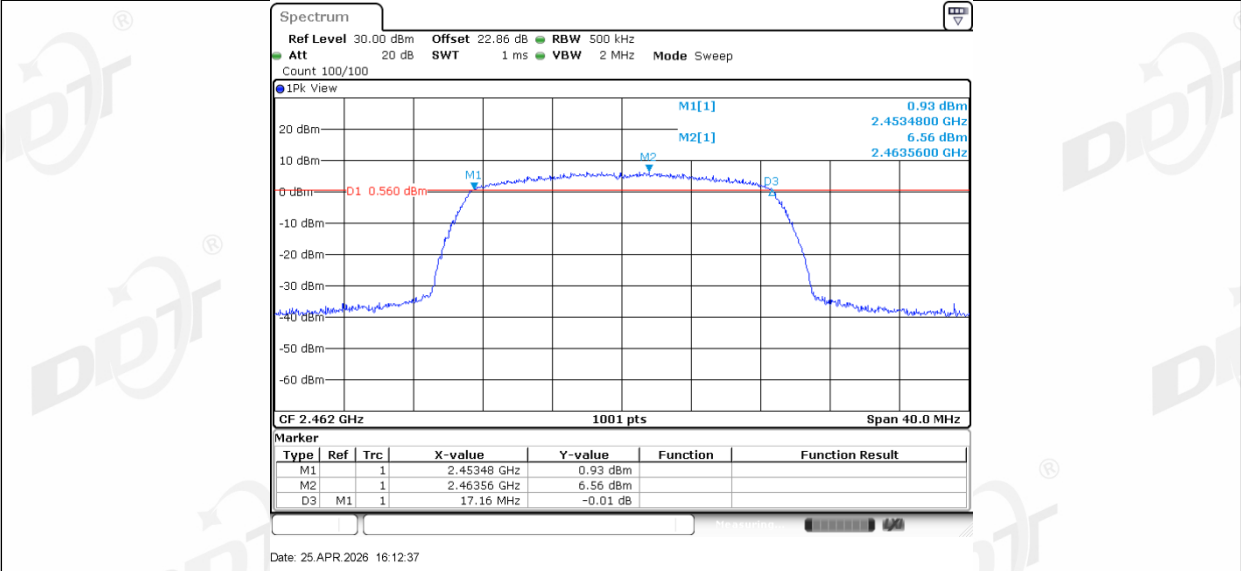


11N20MIMO_Ant2_2462

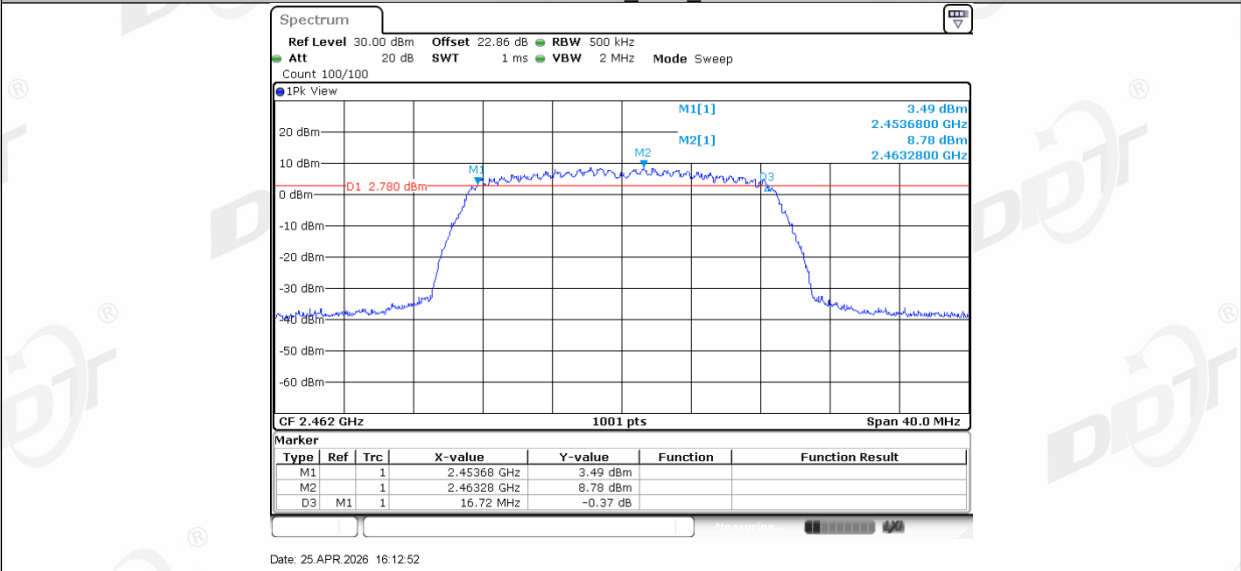


11N40MIMO_Ant1_2422

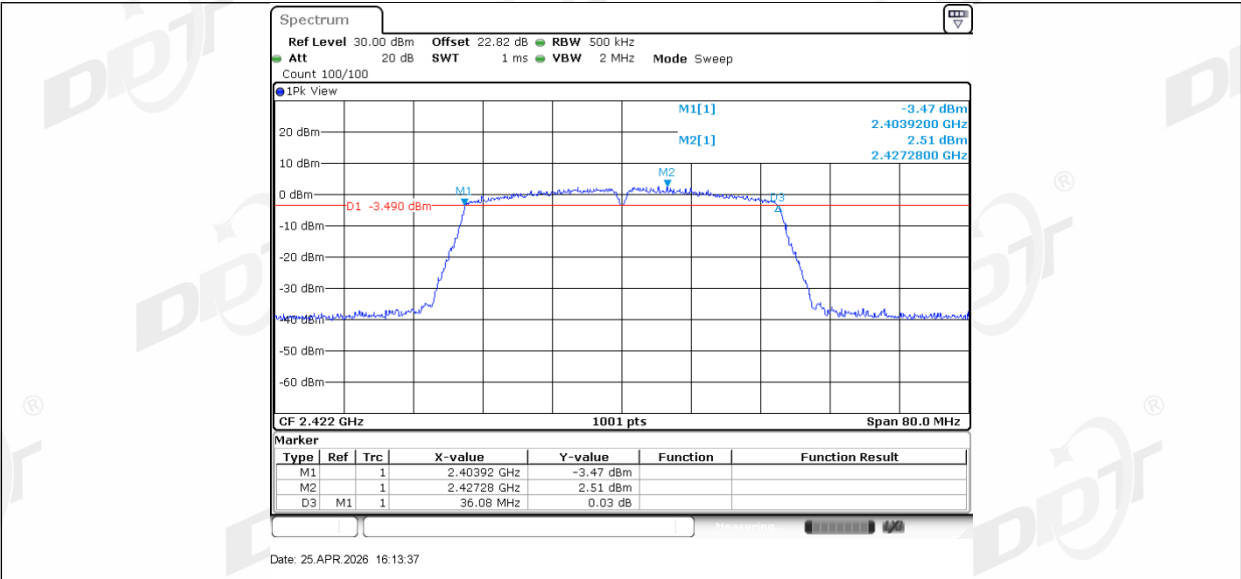

11N40MIMO_Ant2_2422

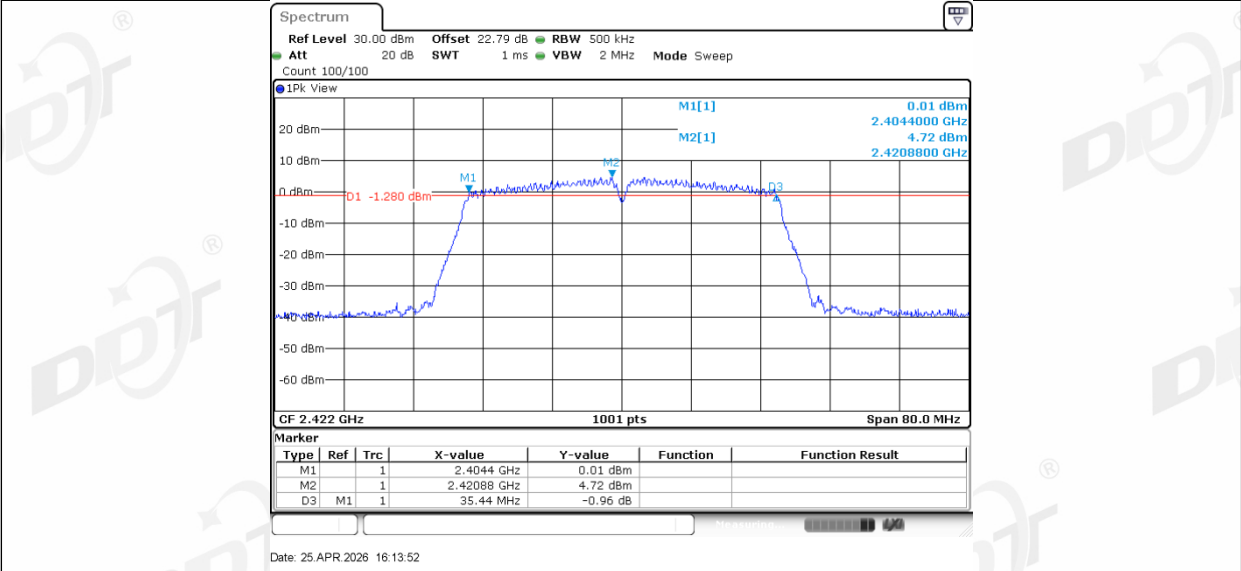

11N40MIMO_Ant1_2437

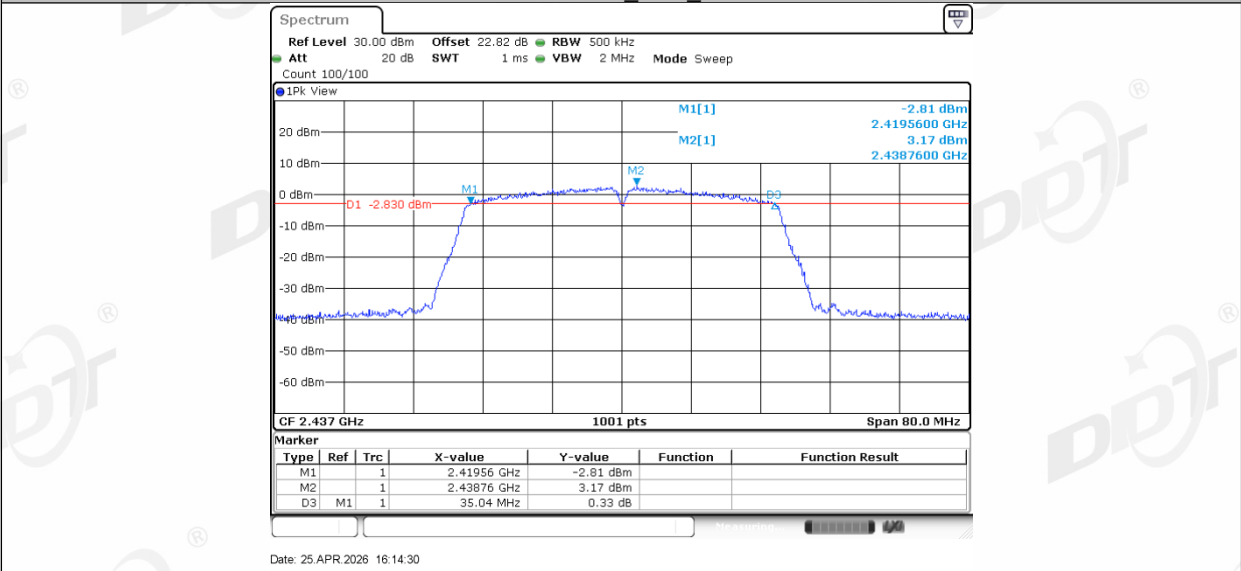


11N40MIMO_Ant2_2437



5. Conducted Output Power

5.1. Block diagram of test setup

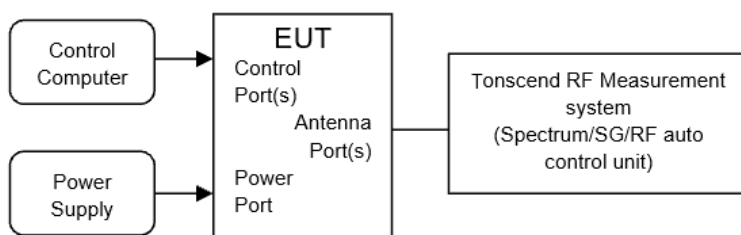

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

5.4. Test result average


Test Engineer:	Tan Shaofeng	Test Site:	RF Test System 5#
Ambient Condition:	24.5℃,44.5%RH	Test Date:	2026.4.22
Test Power Supply:	DC 3.3V	Sample Number:	S26041329-001

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	Verdict
11B	Ant1	2437	10.26	99.29	0.03	10.29	≤30.00	13.25	PASS
	Ant2	2437	10.98	99.11	0.04	11.02	≤30.00	13.98	PASS
11G	Ant1	2462	10.27	96.46	0.16	10.43	≤30.00	13.39	PASS
	Ant2	2462	10.79	96.46	0.16	10.95	≤30.00	13.91	PASS
11N20MIMO	Ant1	2412	9.75	96.21	0.17	9.92	≤30.00	12.88	PASS
	Ant2	2412	10.30	96.21	0.17	10.47	≤30.00	13.43	PASS
	total	2412	---	---	---	13.21	≤30.00	19.18	PASS
11N40MIMO	Ant1	2437	6.97	93.07	0.31	7.28	≤30.00	10.24	PASS
	Ant2	2437	7.36	92.64	0.33	7.69	≤30.00	10.65	PASS
	total	2437	---	---	---	10.50	≤30.00	16.47	PASS

Note: All mode have been pretest, and only the worst case is shown in report.

6. Power Spectral Density

6.1. Block diagram of test setup

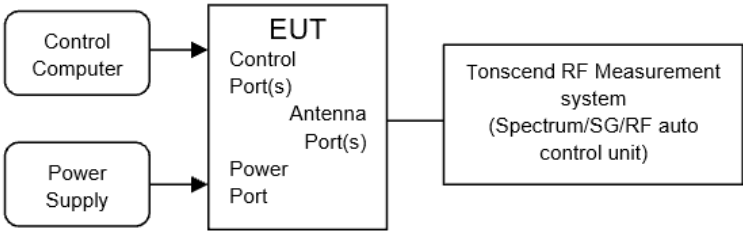

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.10.5.

(2) Connect EUT’s antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.

(3) Set the EUT as maximum power setting and enable the EUT transmit continuously.

(4) Use the following spectrum analyzer settings for Power Spectral Density measurement:
- | | |
|------------------|------------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW: | 3 kHz ≤ RBW ≤ 100 kHz |
| VBW: | ≥ 3RBW |
| Span | 1.5 times the DTS bandwidth |
| Detector Mode: | RMS |
| Sweep time: | auto |
| Trace mode | max hold |
| | Employ trace averaging (rms) |
| Trace | mode over a minimum of 100 traces. |

- (5) Add [10 log (1 / D)], where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF Test System 5#
Ambient Condition:	24.5℃,44.5%RH	Test Date:	2026.4.29
Test Power Supply:	DC 3.3V	Sample Number:	S26041329-001

Test Mode	Antenna	Frequency [MHz]	Average Result[dBm/3-100kHz]	DC Factor [dB]	Total Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant2	2437	-7.10	0.04	-7.06	≤8.00	PASS
11G	Ant2	2437	-8.36	0.16	-8.2	≤8.00	PASS
11N20MIMO	Ant1	2412	-10.26	0.17	-10.09	≤8.00	PASS
	Ant2	2412	-9.01	0.17	-8.84	≤8.00	PASS
	total	2412	---	---	-6.4	≤8.00	PASS
11N40MIMO	Ant1	2452	-14.44	0.31	-14.13	≤8.00	PASS
	Ant2	2452	-14.86	0.33	-14.53	≤8.00	PASS
	total	2452	---	---	-11.32	≤8.00	PASS


Note: All mode have been pretest, and only the worst case is shown in report.

6.5. Test graphs

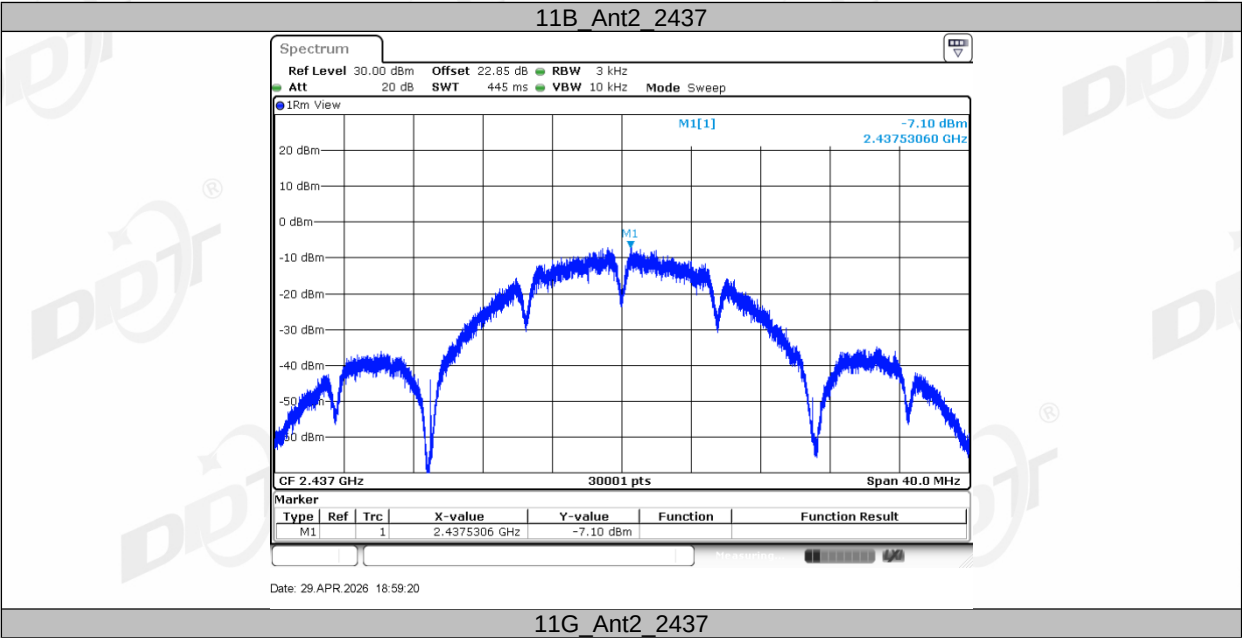


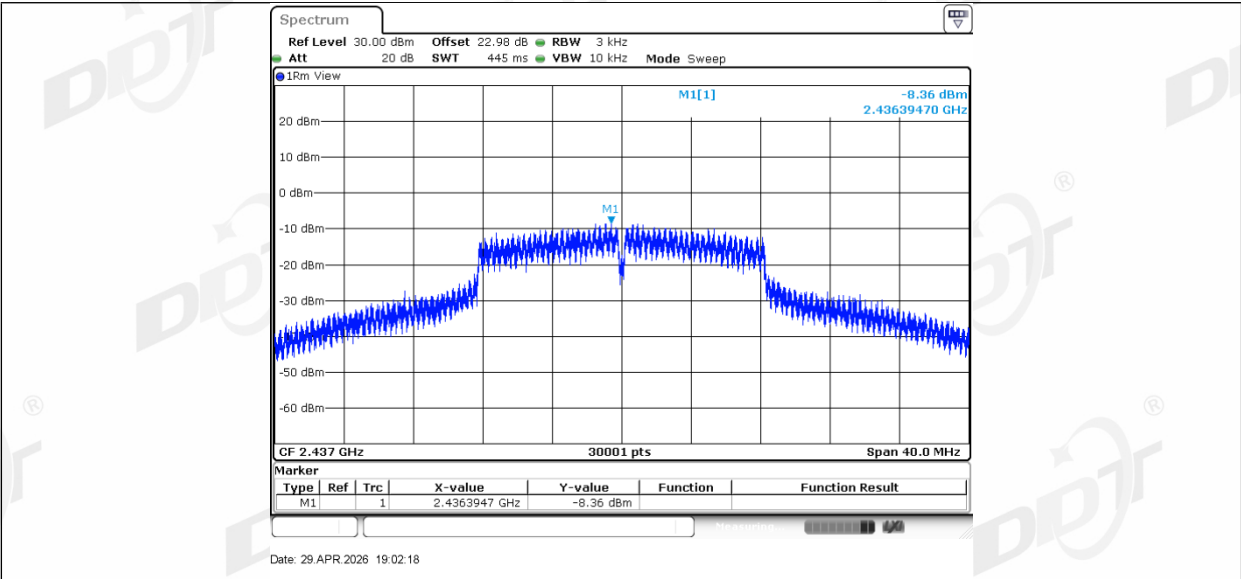


11N20MIMO_Ant1_2412

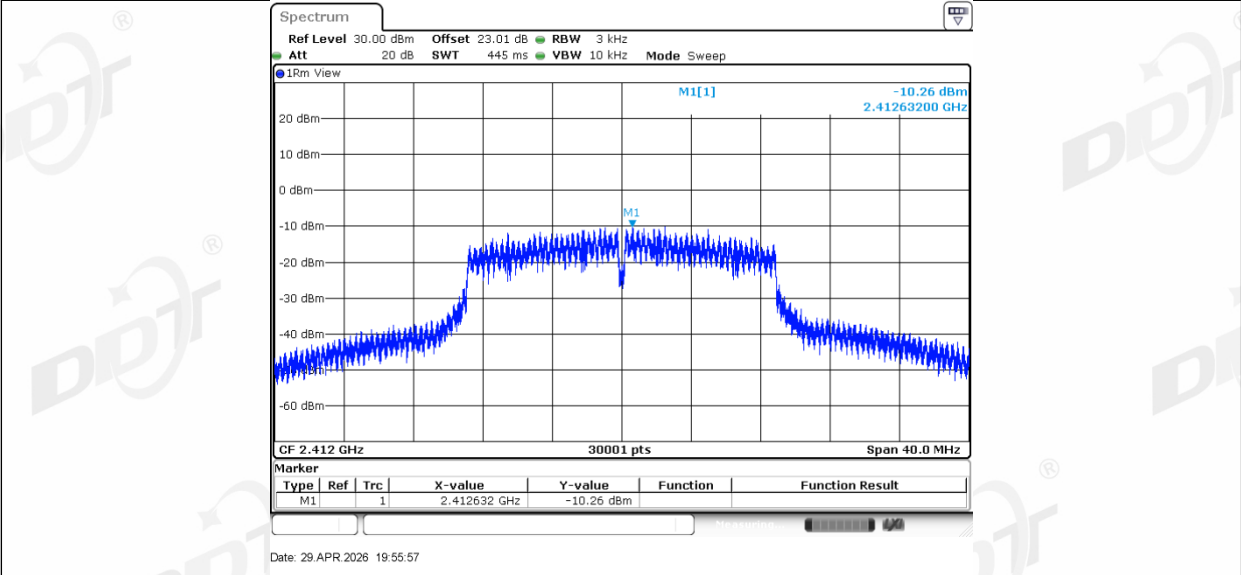

11N20MIMO_Ant2_2412

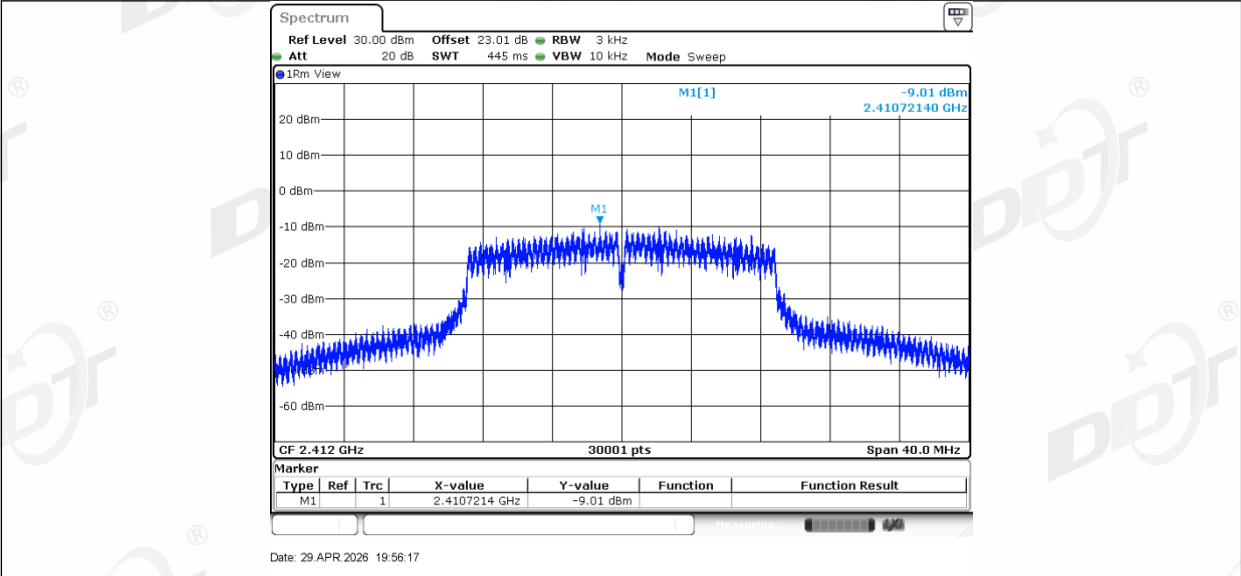

11N40MIMO_Ant1_2452

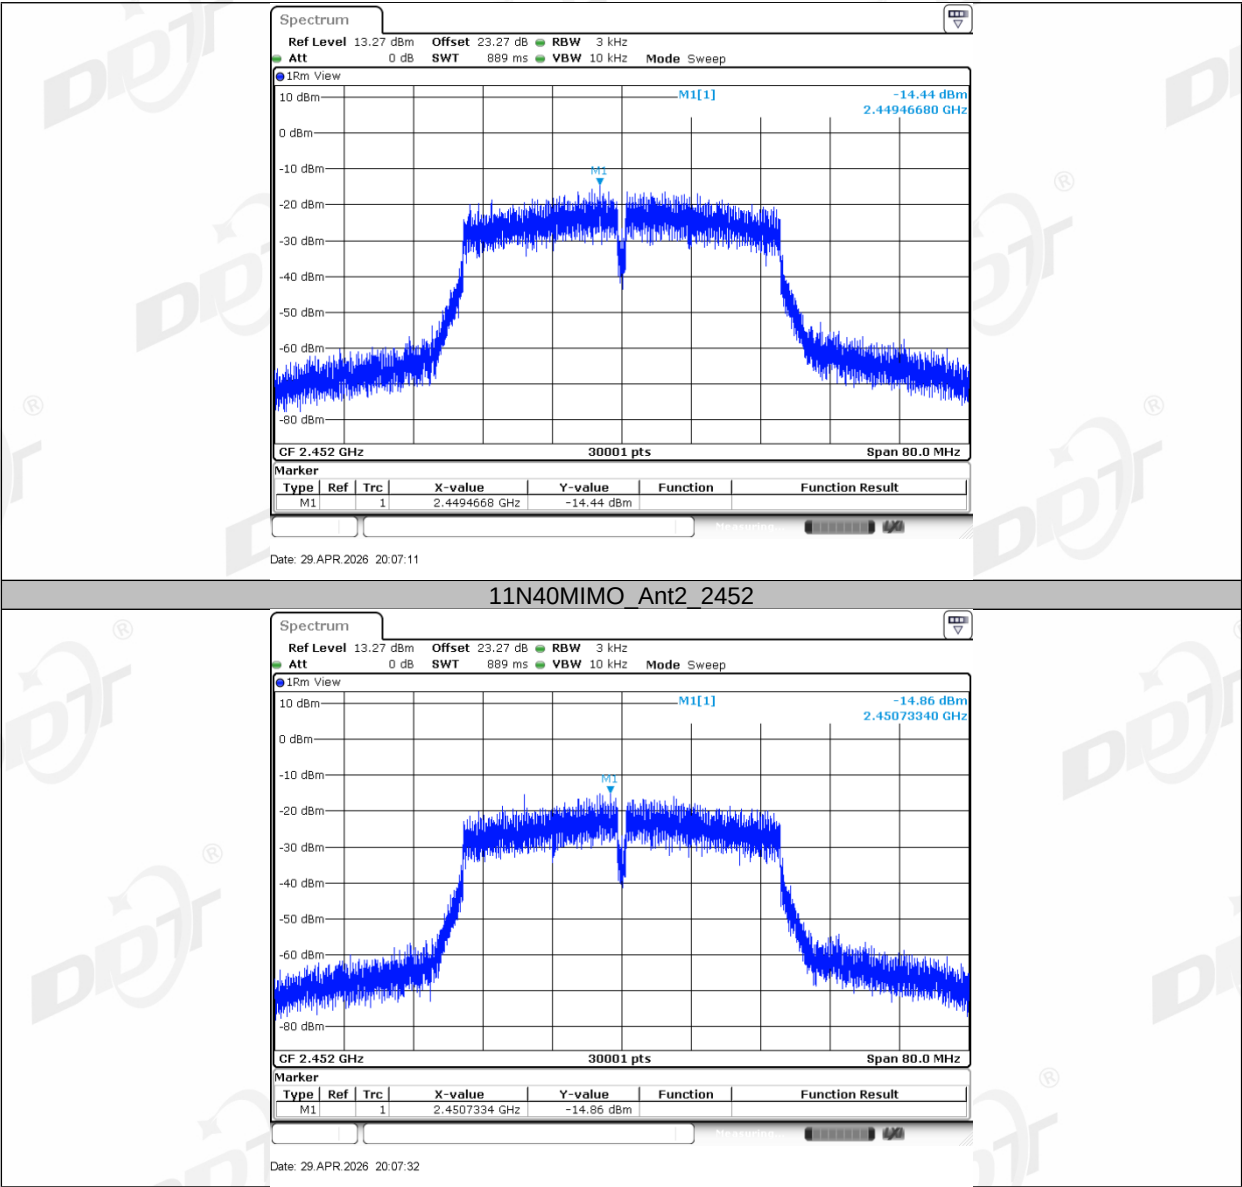

7. Antenna Requirements

7.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


8. Radiated Emission

8.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2026/07/04
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2026/07/06
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27

8.2. Block diagram of test setup

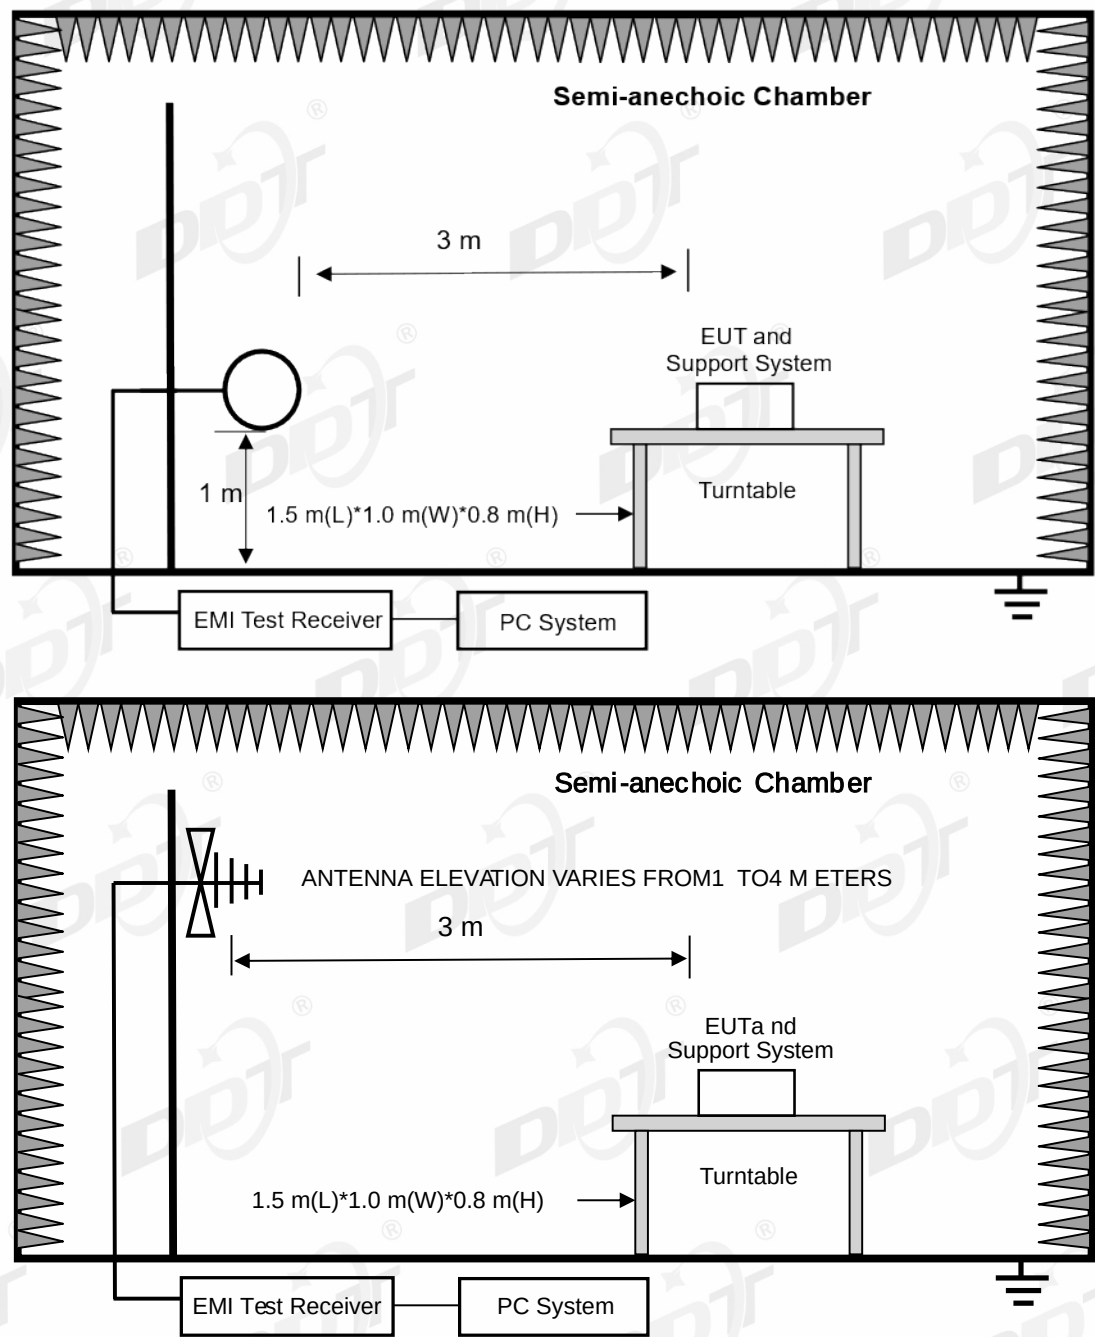

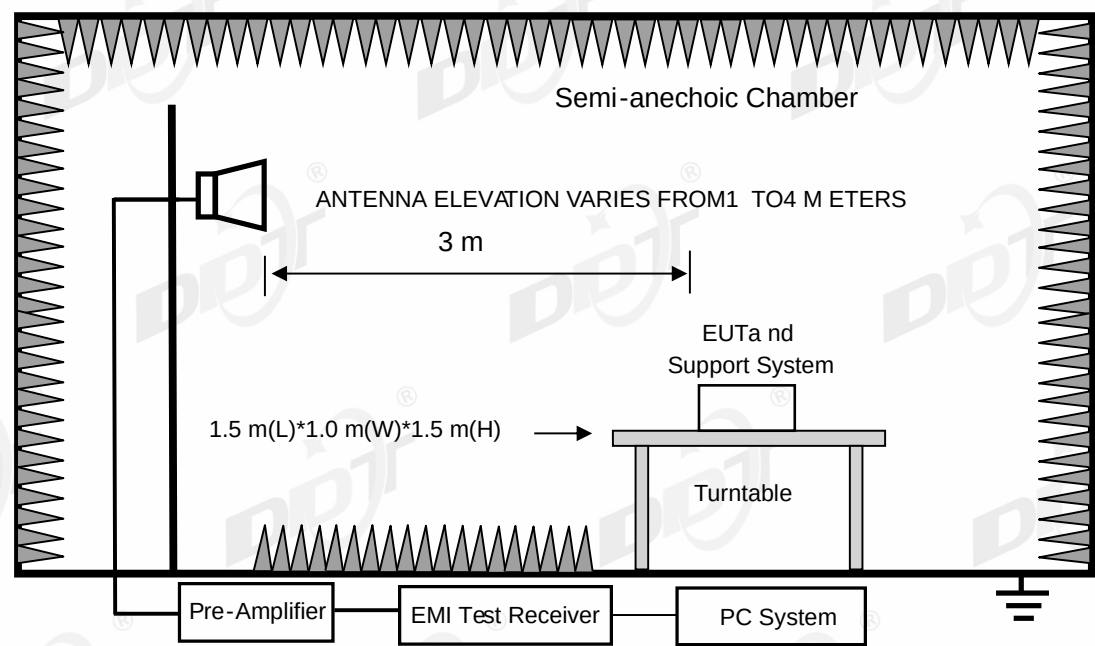

8.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak)	
		54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

8.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

8.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m

18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m
-----------------	-----------------------------	-----

According ANSI C63.10 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10 clause 4.1.5.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is record and report)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with the worst mode.

(12) The worst simultaneous case and was recorded.

8.6. Test result

PASS. (See below detailed test result)

8.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-24

Tested By:

Li Xiongbín

Test Mode:

MIMO TX N20 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:25.5°C;Humi:60.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26041329-1E\FCC Below 1G\7

Memo:

Sample Number:S26041329-001

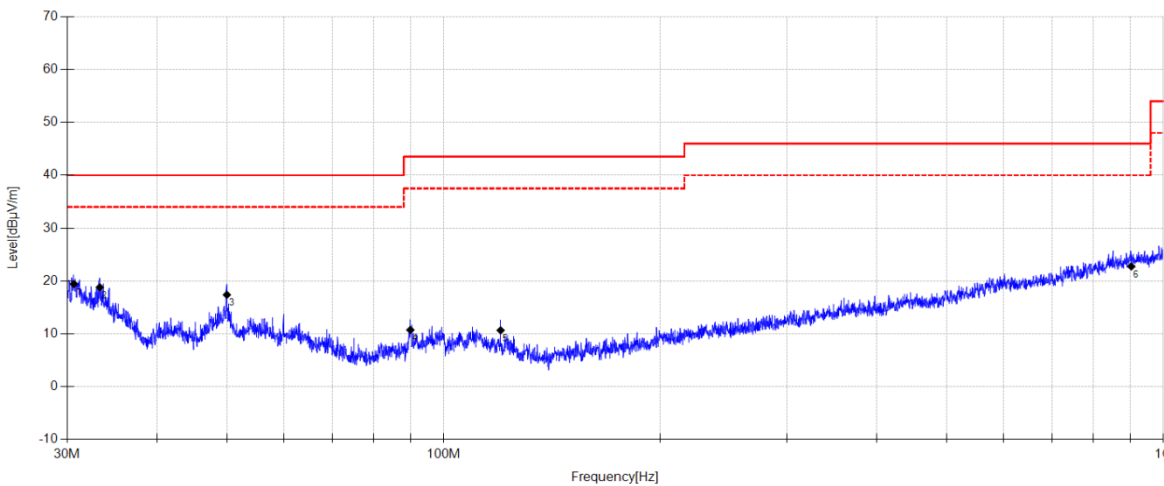

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.638	37.58	10.37	3.79	19.44	40.00	20.56	QP	Horizontal
2	33.280	36.26	11.01	3.83	18.80	40.00	21.20	QP	Horizontal
3	49.981	32.31	13.40	3.98	17.39	40.00	22.61	QP	Horizontal
4	89.885	29.17	9.62	4.25	10.74	43.50	32.76	QP	Horizontal
5	119.991	28.87	9.70	4.42	10.67	43.50	32.83	QP	Horizontal
6	902.695	25.39	22.12	7.12	22.75	46.00	23.25	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-24

Tested By:

Li Xiongbin

Test Mode:

MIMO TX N20 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:25.5°C;Humi:60.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26041329-1E\FCC Below 1G\8

Memo:

Sample Number:S26041329-001

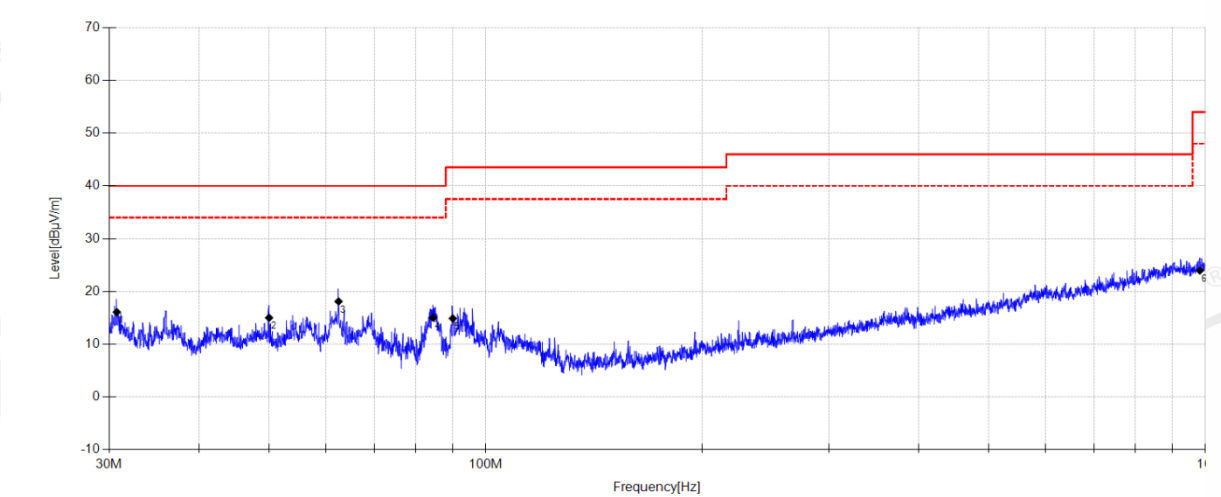

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.724	34.26	10.36	3.79	16.11	40.00	23.89	QP	Vertical
2	50.016	29.95	13.39	3.98	15.02	40.00	24.98	QP	Vertical
3	62.466	33.81	12.51	4.09	18.11	40.00	21.89	QP	Vertical
4	84.506	33.97	9.15	4.22	15.04	40.00	24.96	QP	Vertical
5	90.011	33.24	9.70	4.25	14.89	43.50	28.61	QP	Vertical
6	982.623	25.63	22.41	7.32	23.96	54.00	30.04	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-04-20Tested By:Nan Zhong

Test Mode:MIMO TX N20 2412MHz ModePower Supply:DC 3.3V

Condition:Temp:22.4°C;Humi:46.7%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\1

Memo:Sample Number:S26041329-001 Power setting:1C

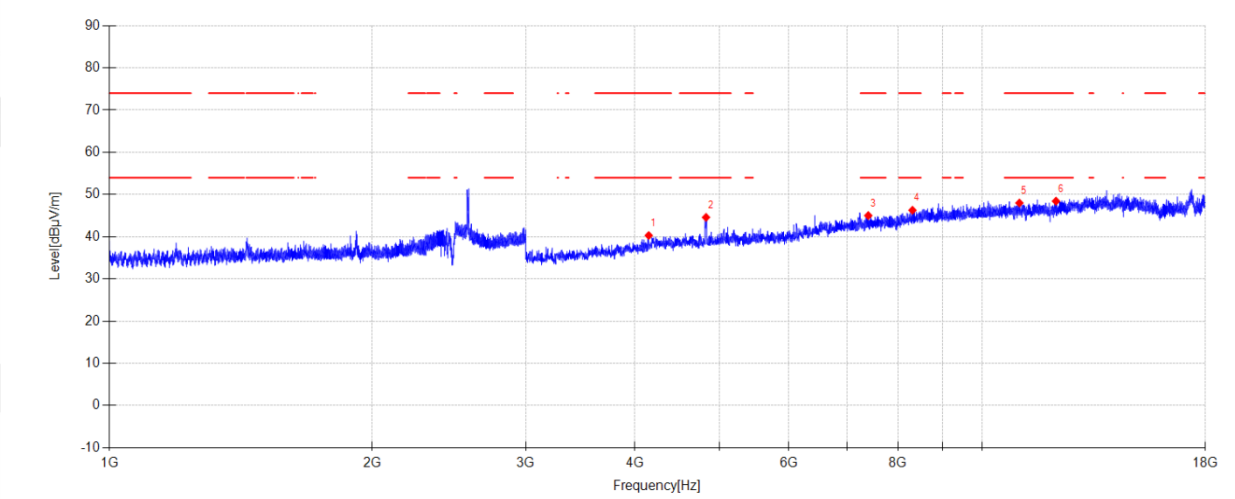

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4147.500	51.97	31.01	-42.69	40.29	74.00	33.71	PK	Horizontal
2	4824.000	54.85	32.43	-42.69	44.59	74.00	29.41	PK	Horizontal
3	7399.500	49.63	36.32	-40.94	45.01	74.00	28.99	PK	Horizontal
4	8314.500	49.90	37.18	-40.81	46.27	74.00	27.73	PK	Horizontal
5	11023.500	47.56	38.90	-38.46	48.00	74.00	26.00	PK	Horizontal
6	12139.500	46.43	38.93	-36.93	48.43	74.00	25.57	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-20

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\2

Memo:

Sample Number:S26041329-001 Power setting:1C

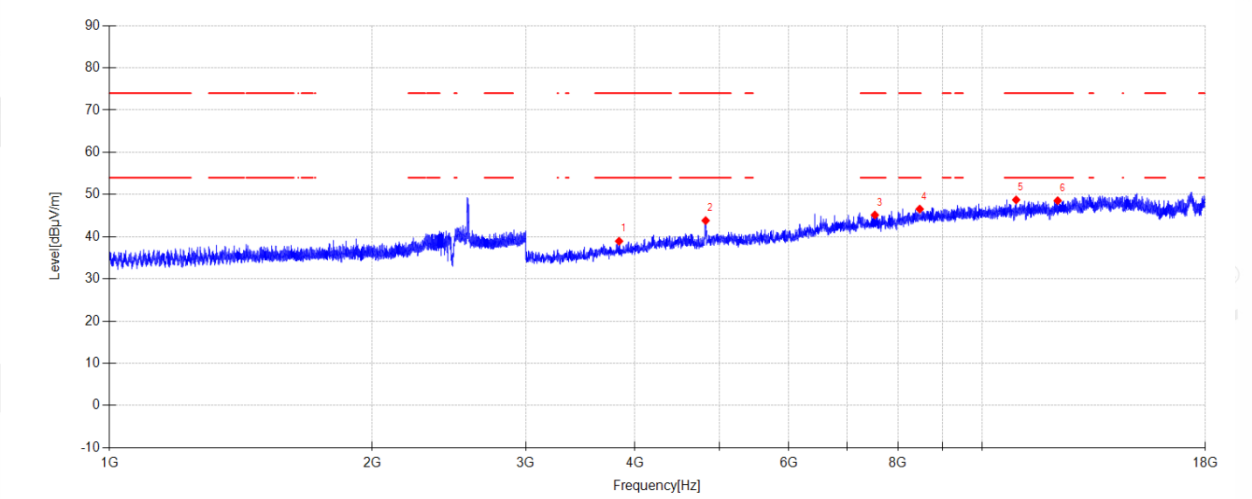

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3835.500	52.51	30.45	-44.02	38.94	74.00	35.06	PK	Vertical
2	4819.500	54.09	32.42	-42.69	43.82	74.00	30.18	PK	Vertical
3	7530.000	49.58	36.42	-40.86	45.14	74.00	28.86	PK	Vertical
4	8475.000	49.75	37.37	-40.57	46.55	74.00	27.45	PK	Vertical
5	10929.000	48.25	38.85	-38.37	48.73	74.00	25.27	PK	Vertical
6	12195.000	46.55	38.98	-36.99	48.54	74.00	25.46	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2437MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\3

Memo:

Sample Number:S26041329-001 Power setting:1C

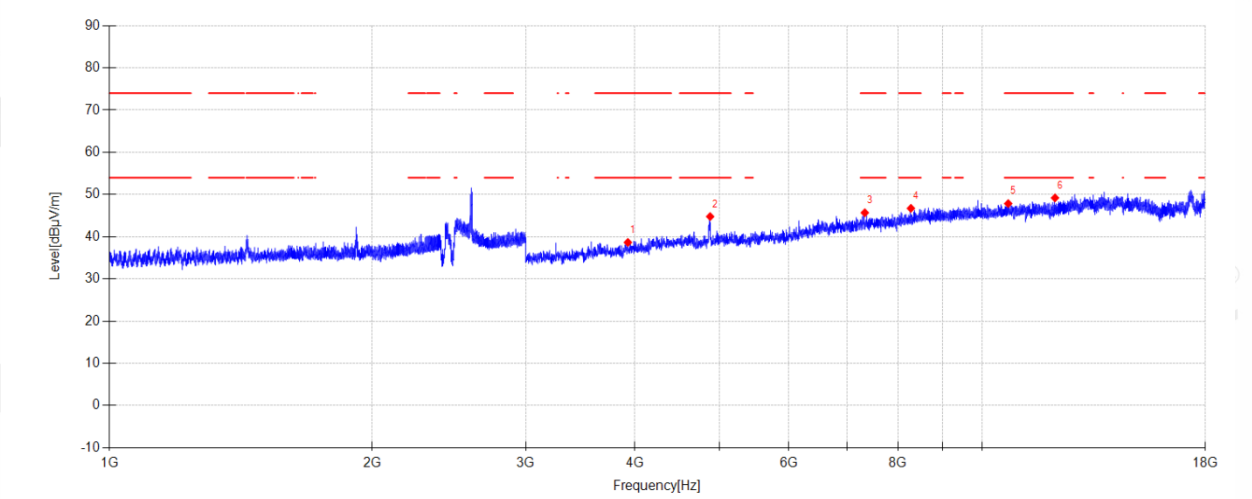

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3925.500	51.65	30.59	-43.59	38.65	74.00	35.35	PK	Horizontal
2	4876.500	54.96	32.54	-42.72	44.78	74.00	29.22	PK	Horizontal
3	7332.000	50.47	36.27	-41.06	45.68	74.00	28.32	PK	Horizontal
4	8280.000	50.39	37.14	-40.81	46.72	74.00	27.28	PK	Horizontal
5	10702.500	47.76	38.69	-38.60	47.85	74.00	26.15	PK	Horizontal
6	12108.000	47.20	38.90	-36.90	49.20	74.00	24.80	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2437MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\4

Memo:

Sample Number:S26041329-001 Power setting:1C

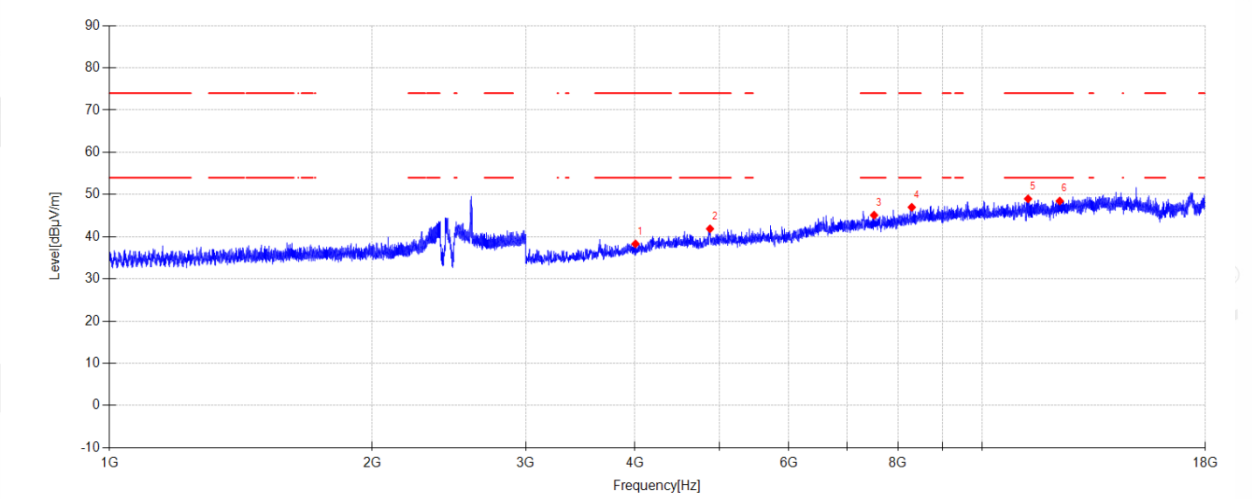

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4005.000	50.66	30.71	-43.07	38.30	74.00	35.70	PK	Vertical
2	4875.000	52.05	32.54	-42.72	41.87	74.00	32.13	PK	Vertical
3	7513.500	49.50	36.41	-40.81	45.10	74.00	28.90	PK	Vertical
4	8299.500	50.65	37.16	-40.83	46.98	74.00	27.02	PK	Vertical
5	11278.500	47.93	38.87	-37.83	48.97	74.00	25.03	PK	Vertical
6	12261.000	46.28	39.03	-36.86	48.45	74.00	25.55	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-04-21Tested By:Nan Zhong

Test Mode:MIMO TX N20 2462MHz ModePower Supply:DC 3.3V

Condition:Temp:22.4°C;Humi:46.7%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\5

Memo:Sample Number:S26041329-001 Power setting:1C

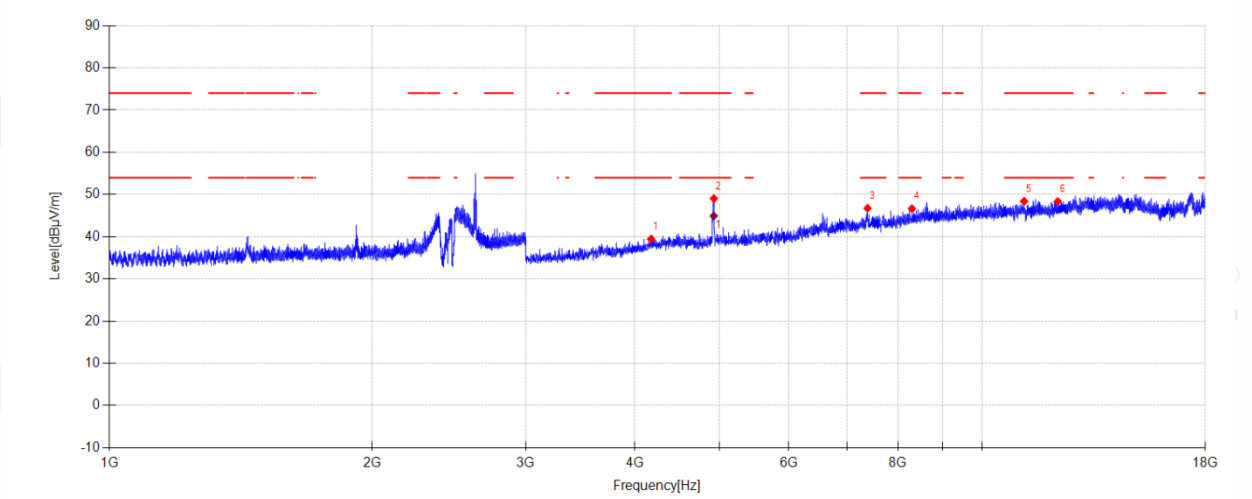

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4173.000	50.81	31.06	-42.42	39.45	74.00	34.55	PK	Horizontal
2	4924.500	59.02	32.64	-42.61	49.05	74.00	24.95	PK	Horizontal
3	7386.000	51.40	36.31	-40.96	46.75	74.00	27.25	PK	Horizontal
4	8304.000	50.31	37.16	-40.82	46.65	74.00	27.35	PK	Horizontal
5	11161.500	47.68	38.88	-38.15	48.41	74.00	25.59	PK	Horizontal
6	12193.500	46.36	38.97	-36.99	48.34	74.00	25.66	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4923.787	54.90	32.64	-42.61	44.93	54.00	9.07	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-04-21Tested By:Nan Zhong

Test Mode:MIMO TX N20 2462MHz ModePower Supply:DC 3.3V

Condition:Temp:22.4°C;Humi:46.7%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\6

Memo:Sample Number:S26041329-001 Power setting:1C

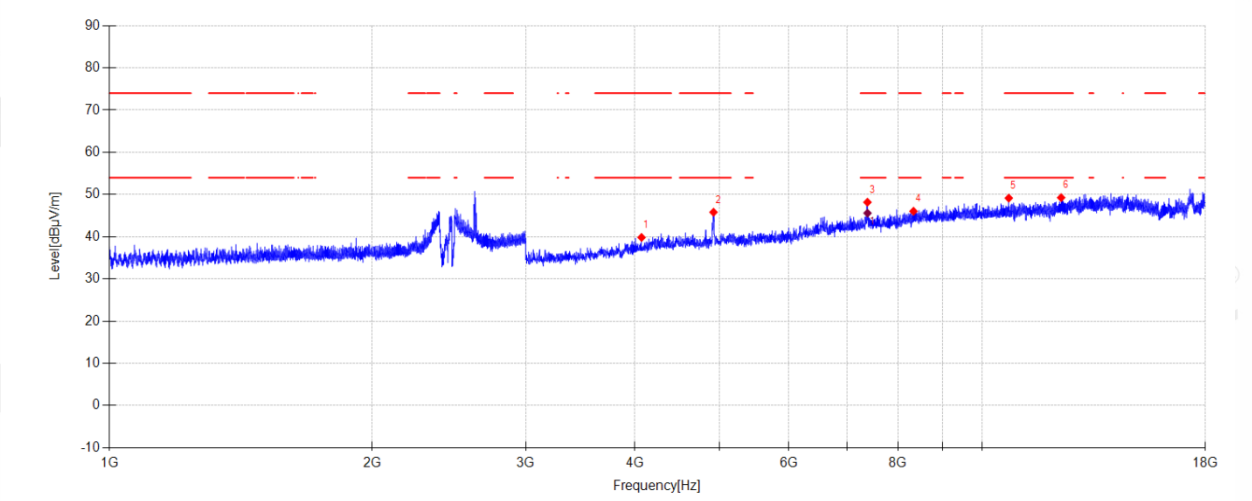

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4069.500	52.12	30.85	-43.14	39.83	74.00	34.17	PK	Vertical
2	4920.000	55.81	32.63	-42.63	45.81	74.00	28.19	PK	Vertical
3	7383.000	52.83	36.31	-40.97	48.17	74.00	25.83	PK	Vertical
4	8337.000	49.61	37.20	-40.78	46.03	74.00	27.97	PK	Vertical
5	10719.000	49.06	38.70	-38.61	49.15	74.00	24.85	PK	Vertical
6	12306.000	46.97	39.08	-36.79	49.26	74.00	24.74	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7384.955	50.25	36.31	-40.97	45.59	54.00	8.41	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. Band Edge Compliance

9.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2026/07/04
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2026/07/06

9.2. Block diagram of test setup

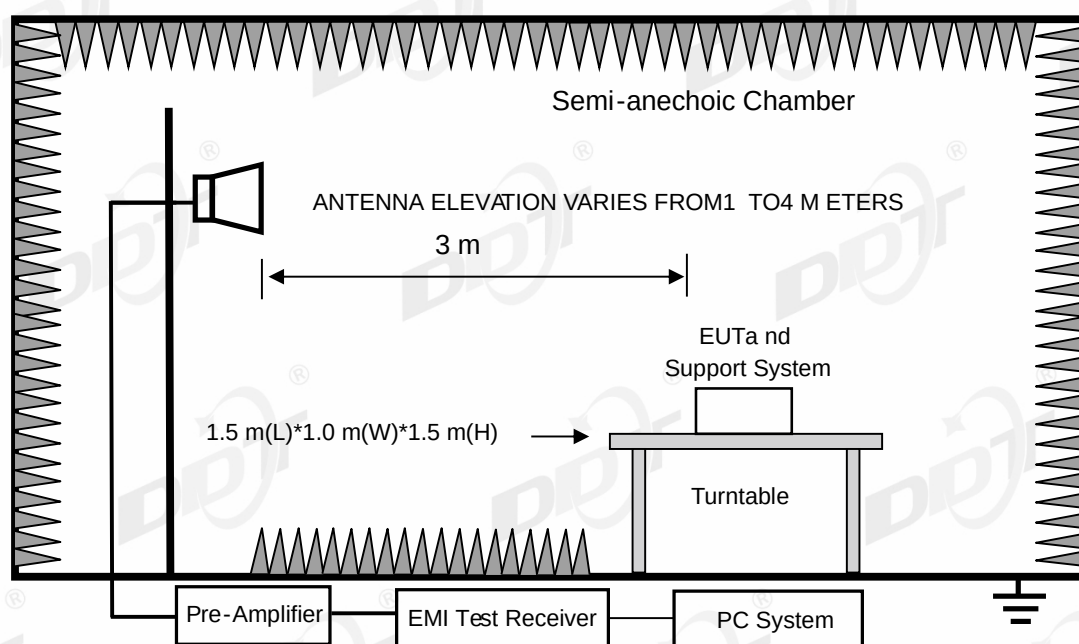

9.3. Limits

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

9.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

9.5. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

9.6. Test result

PASS. (See below detailed test result)

9.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT1 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\15

Memo:

Sample Number:S26041329-001 Power setting:1A

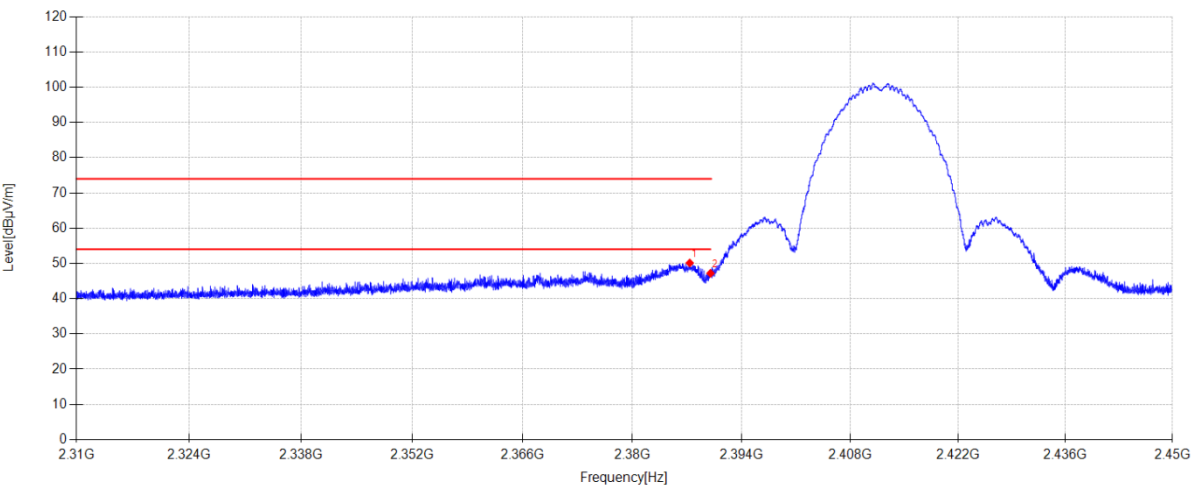

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.336	51.27	27.42	-28.57	50.12	74.00	23.88	PK	Horizontal
2	2390.000	48.32	27.43	-28.56	47.19	74.00	26.81	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT1 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\16

Memo:

Sample Number:S26041329-001 Power setting:1A

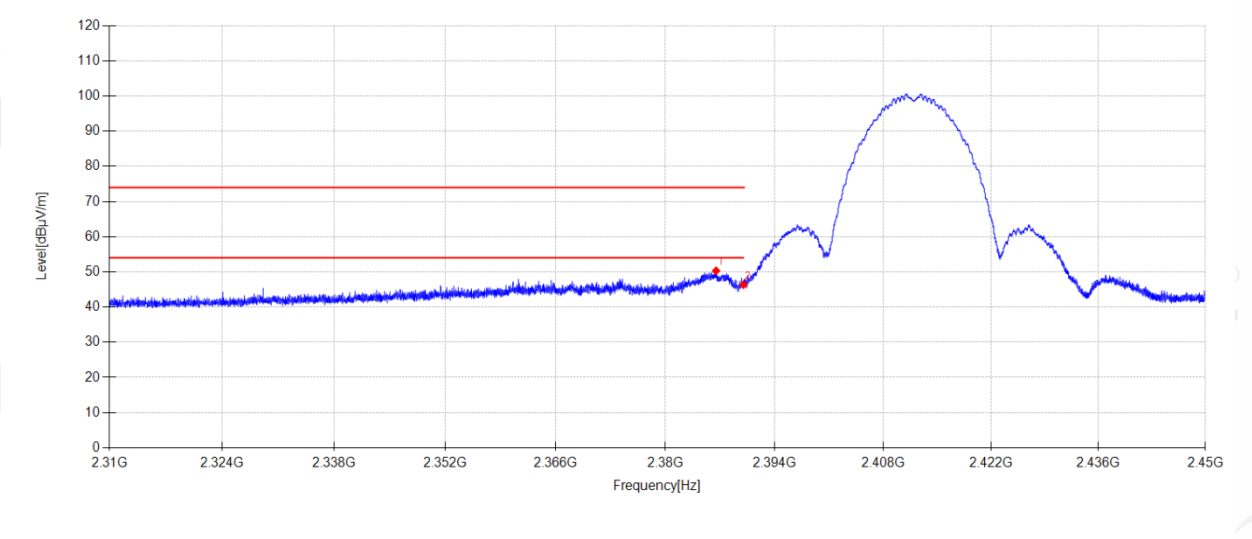

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.482	51.46	27.42	-28.57	50.31	74.00	23.69	PK	Vertical
2	2390.000	47.49	27.43	-28.56	46.36	74.00	27.64	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT1 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\17

Memo:

Sample Number:S26041329-001 Power setting:1A

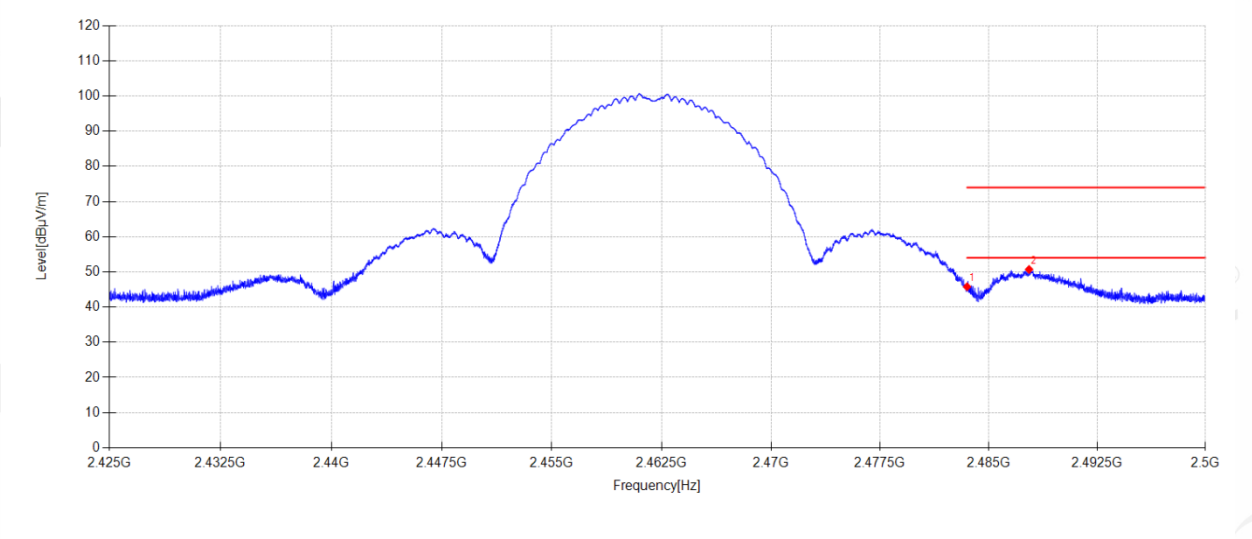

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.61	27.70	-28.53	45.78	74.00	27.82	PK	Horizontal
2	2487.783	51.53	27.71	-28.53	50.71	74.00	23.29	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT1 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\18

Memo:

Sample Number:S26041329-001 Power setting:1A

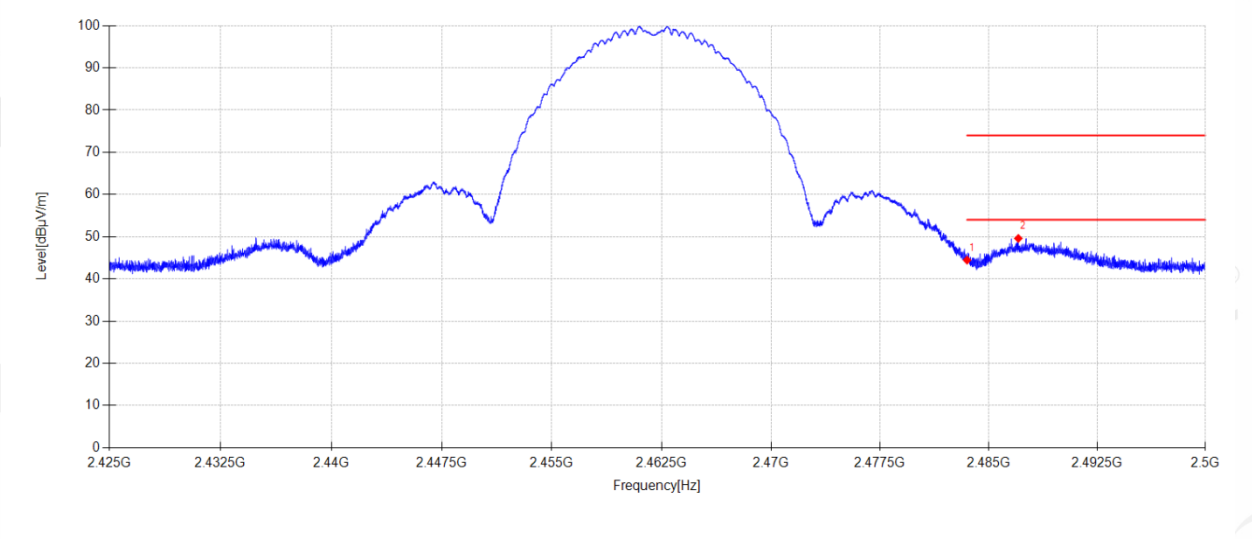

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.29	27.70	-28.53	44.46	74.00	29.54	PK	Vertical
2	2487.040	50.42	27.71	-28.53	49.60	74.00	24.40	PK	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT2 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\19

Memo:

Sample Number:S26041329-001 Power setting:1A

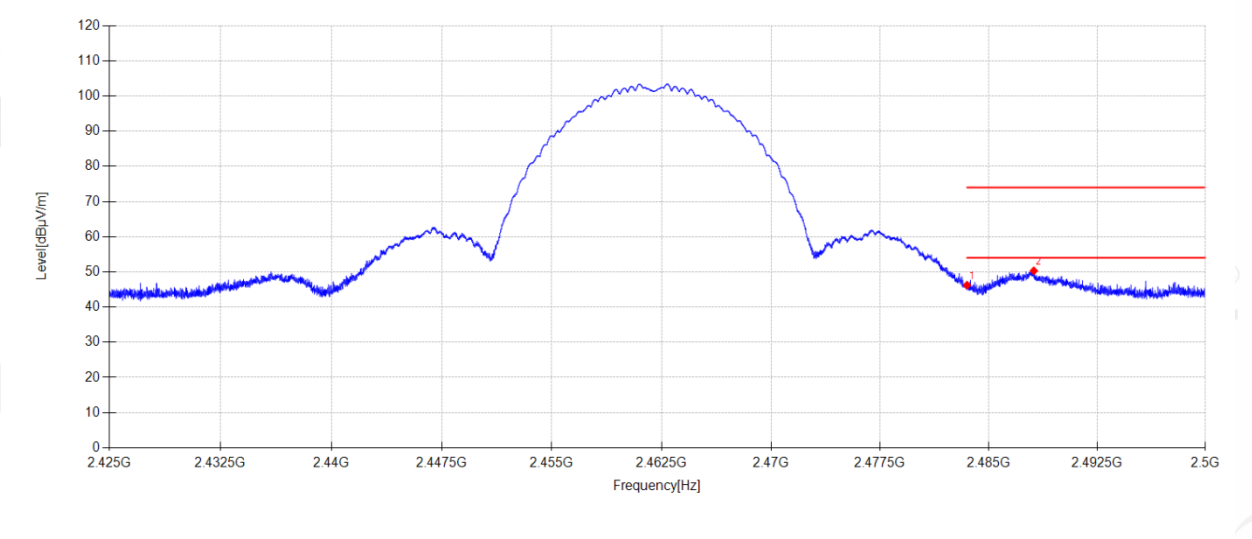

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	47.06	27.70	-28.53	46.23	74.00	27.77	PK	Horizontal
2	2488.113	51.12	27.72	-28.53	50.31	74.00	23.69	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT2 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\20

Memo:

Sample Number:S26041329-001 Power setting:1A

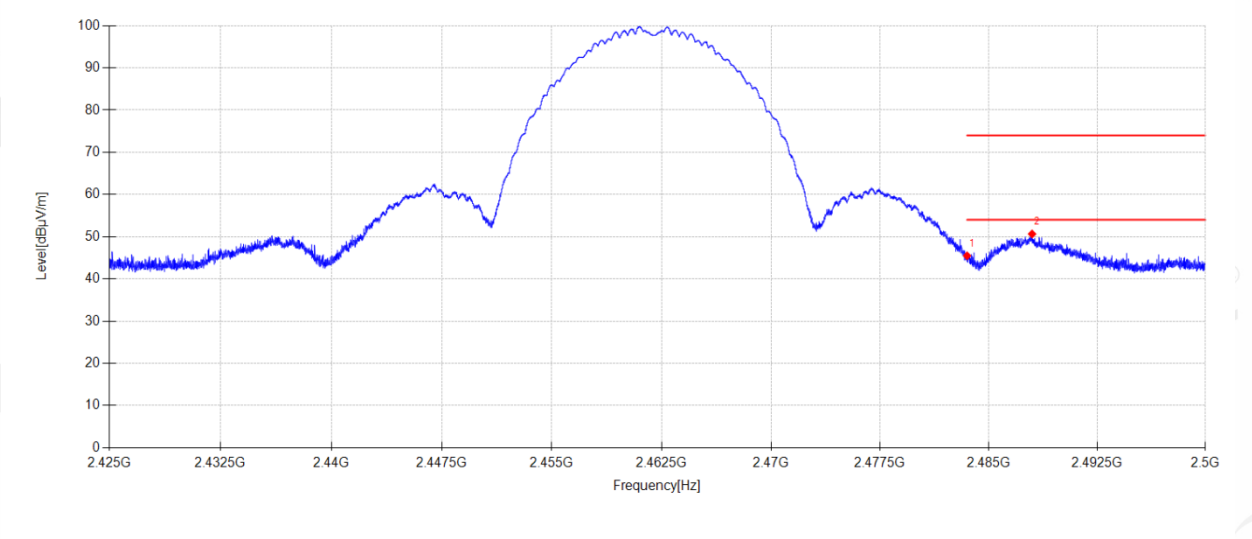

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.32	27.70	-28.53	45.49	74.00	28.51	PK	Vertical
2	2487.993	51.46	27.72	-28.53	50.65	74.00	23.35	PK	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT2 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\21

Memo:

Sample Number:S26041329-001 Power setting:1A

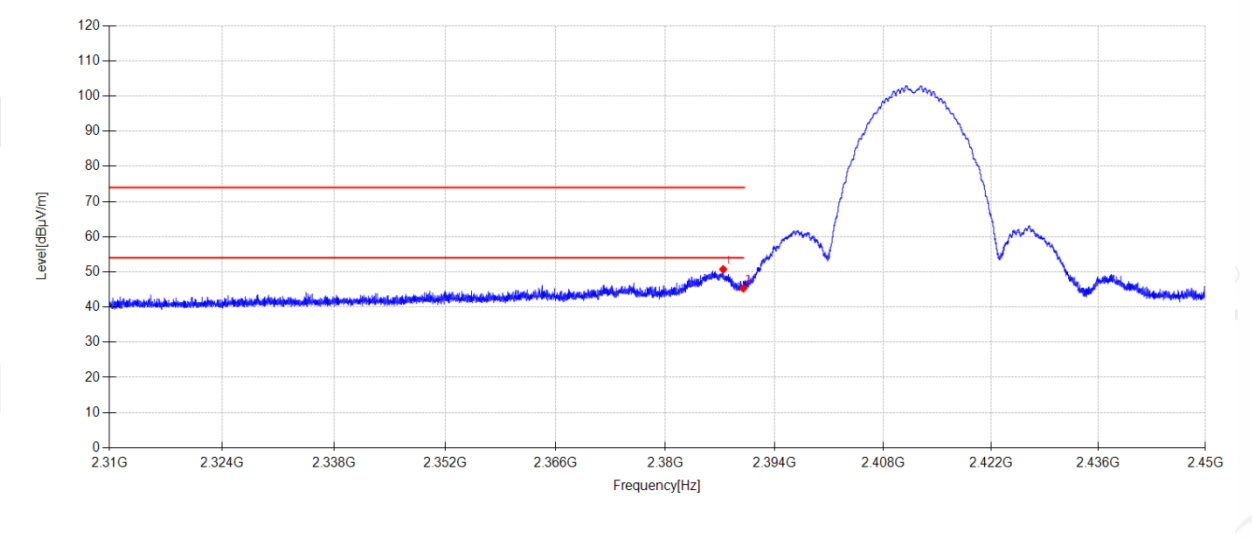

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.392	51.88	27.42	-28.57	50.73	74.00	23.27	PK	Horizontal
2	2390.000	46.49	27.43	-28.56	45.36	74.00	28.64	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11B ANT2 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\22

Memo:

Sample Number:S26041329-001 Power setting:1A

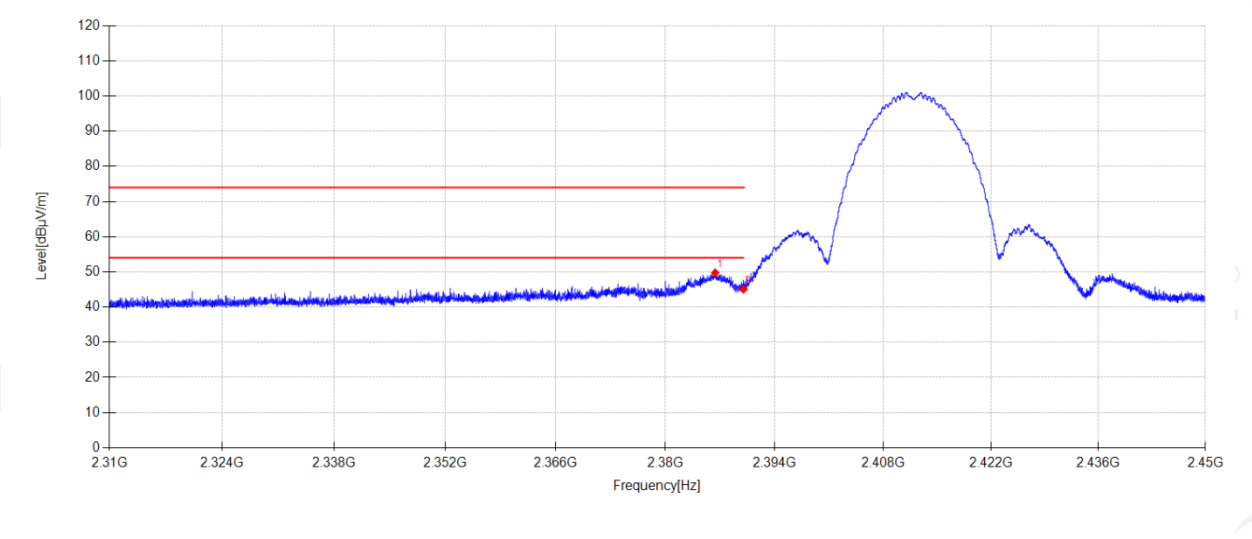

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.370	50.90	27.42	-28.57	49.75	74.00	24.25	PK	Vertical
2	2390.000	46.20	27.43	-28.56	45.07	74.00	28.93	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11G ANT1 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\23

Memo:

Sample Number:S26041329-001 Power setting:1C

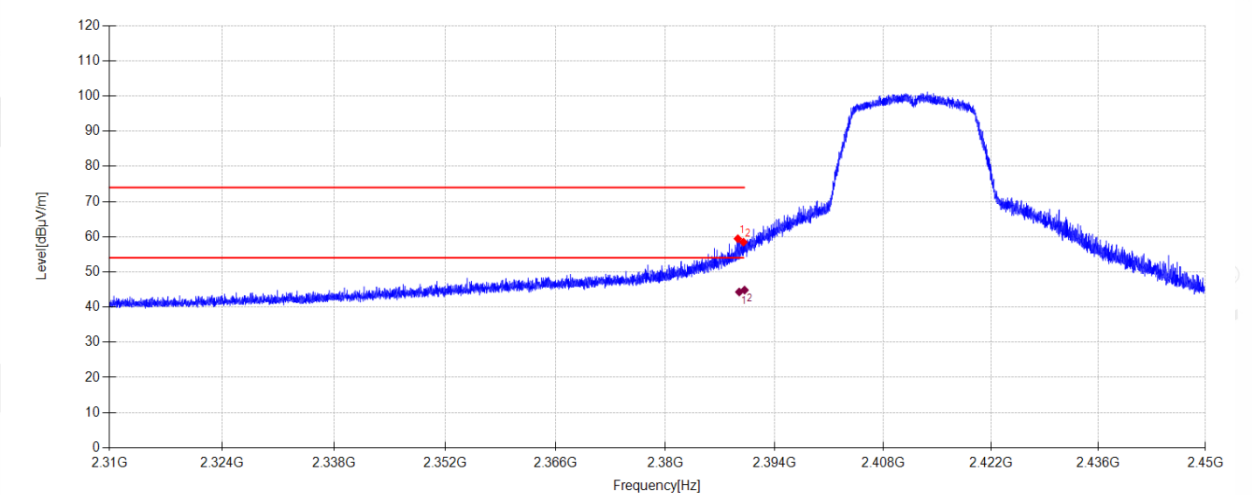

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.282	60.56	27.43	-28.56	59.43	74.00	14.57	PK	Horizontal
2	2390.000	59.59	27.43	-28.56	58.46	74.00	15.54	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.450	45.42	27.43	-28.56	44.29	54.00	9.71	AV	Horizontal
2	2390.138	45.96	27.43	-28.56	44.83	51.97	7.14	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11G ANT1 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\24

Memo:

Sample Number:S26041329-001 Power setting:1C

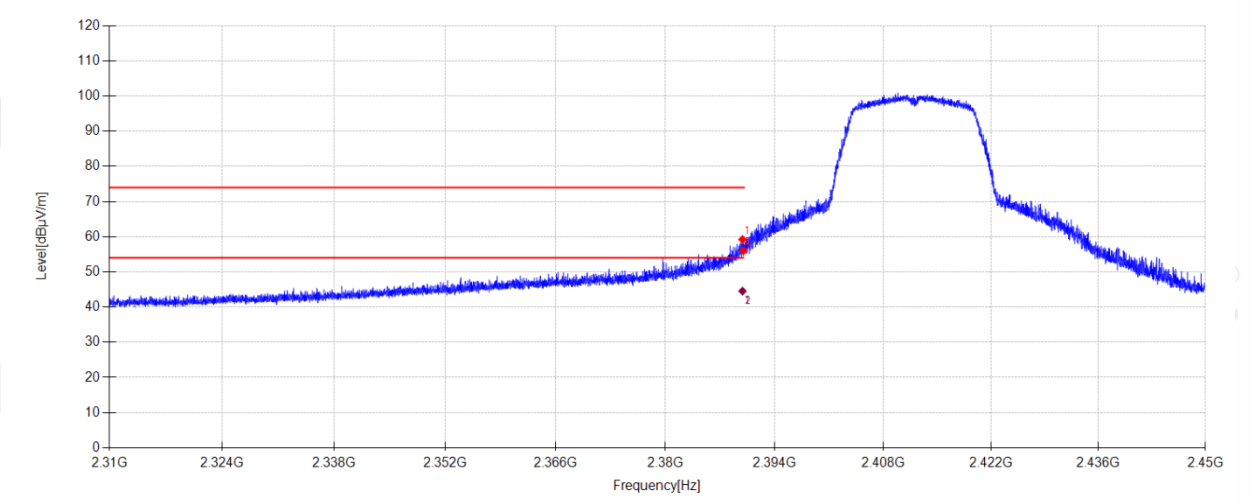

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.870	60.34	27.43	-28.56	59.21	74.00	14.79	PK	Vertical
2	2390.000	57.16	27.43	-28.56	56.03	74.00	17.97	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.870	45.67	27.43	-28.56	44.54	54.00	9.46	AV	Vertical
2	2390.000	45.27	27.43	-28.56	44.14	54.00	9.86	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11G ANT1 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\25

Memo:

Sample Number:S26041329-001 Power setting:1C

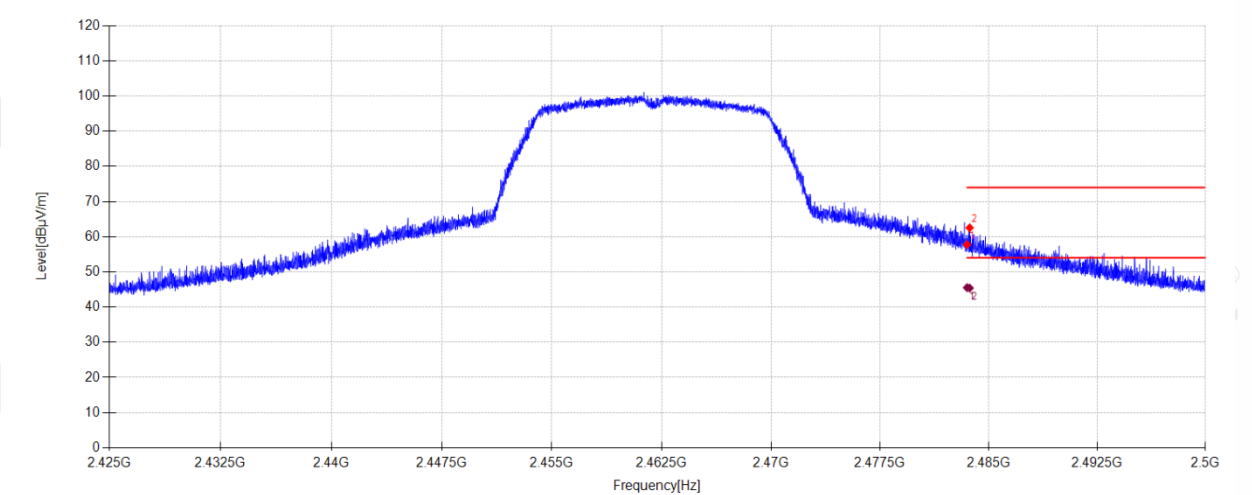

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	58.58	27.70	-28.53	57.75	74.00	16.25	PK	Horizontal
2	2483.680	63.37	27.70	-28.53	62.54	74.00	11.46	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.35	27.70	-28.53	45.52	54.00	8.48	AV	Horizontal
2	2483.680	46.24	27.70	-28.53	45.41	54.00	8.59	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-04-21Tested By:Nan Zhong

Test Mode:TX 11G ANT1 2462MHz ModePower Supply:DC 3.3V

Condition:Temp:22.4°C;Humi:46.7%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\26

Memo:Sample Number:S26041329-001 Power setting:1C

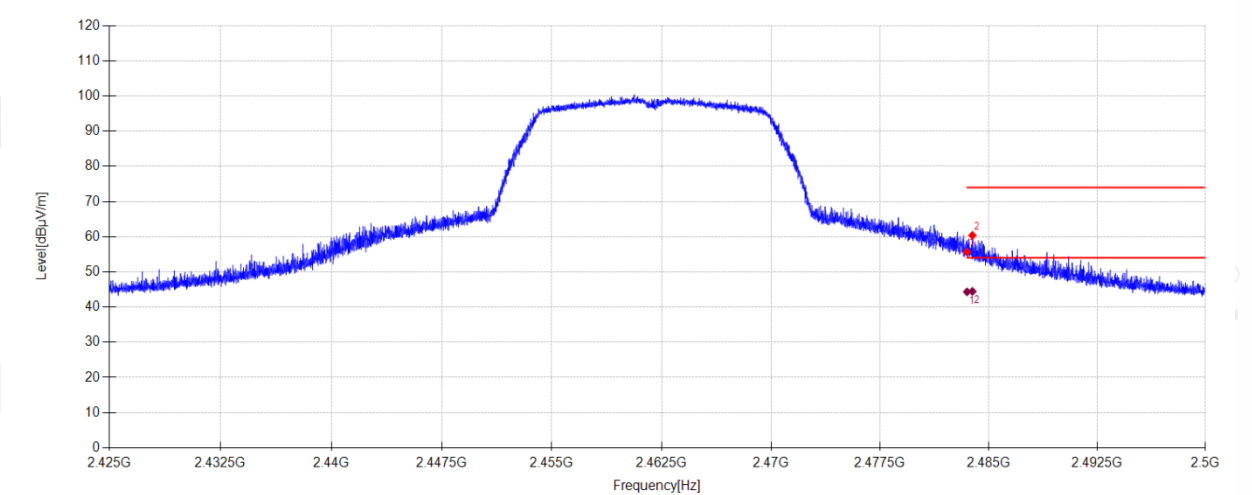

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	56.49	27.70	-28.53	55.66	74.00	18.34	PK	Vertical
2	2483.868	61.22	27.70	-28.53	60.39	74.00	13.61	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.16	27.70	-28.53	44.33	54.00	9.67	AV	Vertical
2	2483.868	45.28	27.70	-28.53	44.45	54.00	9.55	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-21 **Tested By:** Nan Zhong
Test Mode: TX 11G ANT2 2462MHz Mode **Power Supply:** DC 3.3V
Condition: Temp:22.4°C;Humi:46.7% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\27
Memo: Sample Number:S26041329-001 Power setting:1C

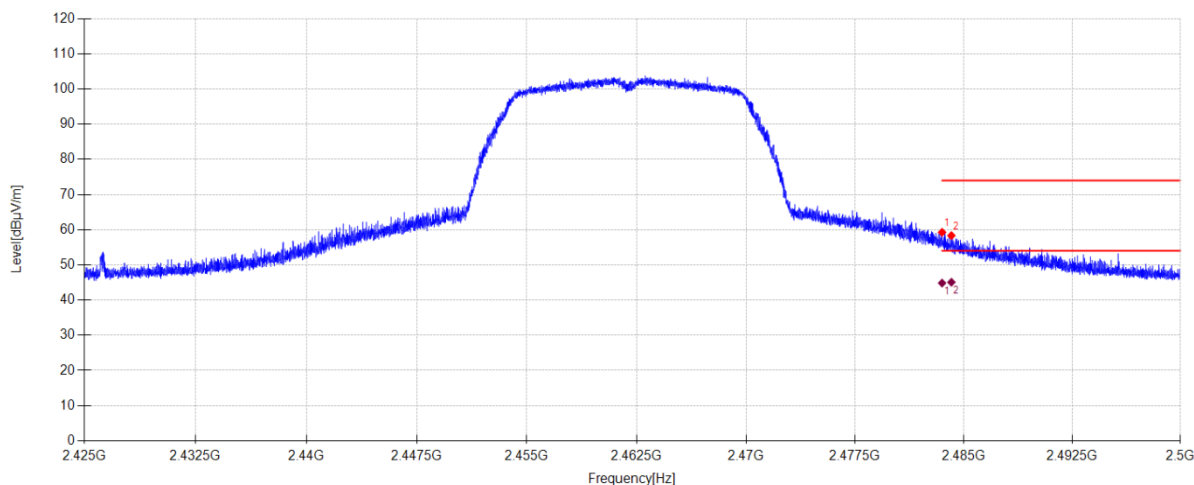**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	60.11	27.70	-28.53	59.28	74.00	14.72	PK	Horizontal
2	2484.145	59.17	27.70	-28.53	58.34	74.00	15.66	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.67	27.70	-28.53	44.84	54.00	9.16	AV	Horizontal
2	2484.145	45.91	27.70	-28.53	45.08	54.00	8.92	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11G ANT2 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\28

Memo:

Sample Number:S26041329-001 Power setting:1C

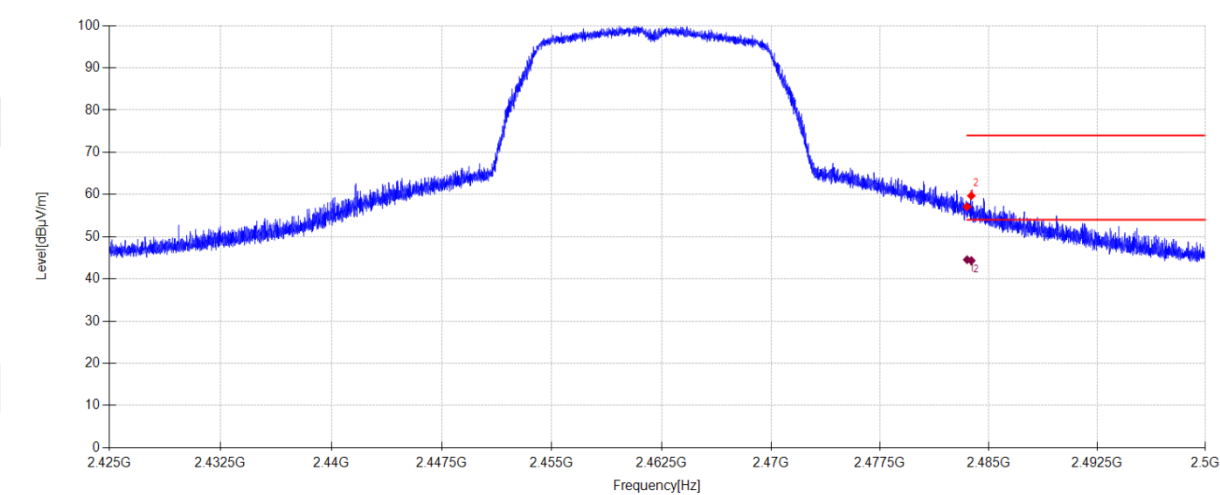

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	57.92	27.70	-28.53	57.09	74.00	16.91	PK	Vertical
2	2483.793	60.54	27.70	-28.53	59.71	74.00	14.29	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.38	27.70	-28.53	44.55	54.00	9.45	AV	Vertical
2	2483.793	45.18	27.70	-28.53	44.35	54.00	9.65	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-21 **Tested By:** Nan Zhong
Test Mode: TX 11G ANT2 2412MHz Mode **Power Supply:** DC 3.3V
Condition: Temp:22.4°C;Humi:46.7% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\29
Memo: Sample Number:S26041329-001 Power setting:1C

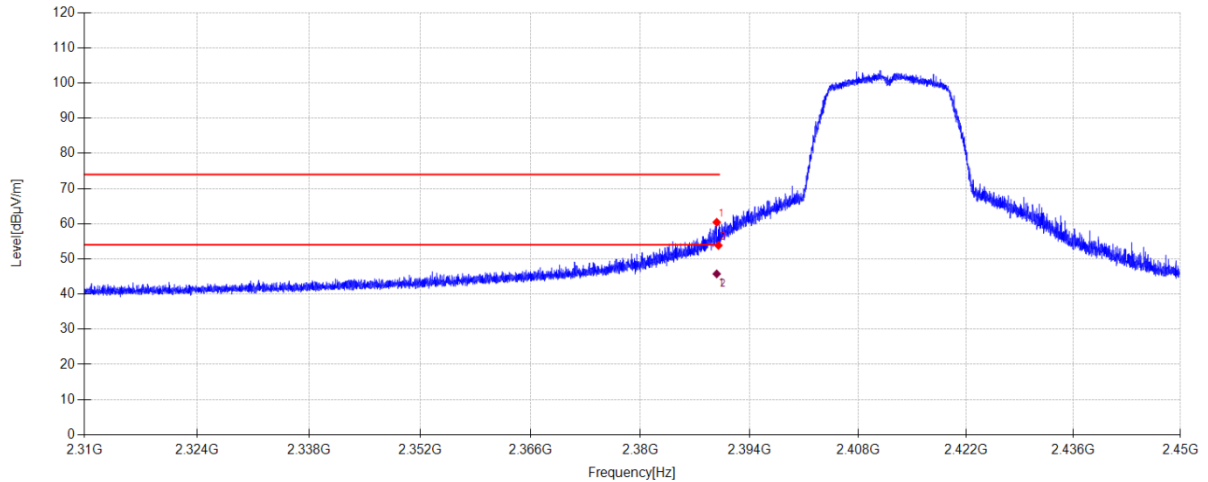

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.772	61.54	27.43	-28.56	60.41	74.00	13.59	PK	Horizontal
2	2390.000	54.95	27.43	-28.56	53.82	74.00	20.18	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.772	46.87	27.43	-28.56	45.74	54.00	8.26	AV	Horizontal
2	2390.000	46.65	27.43	-28.56	45.52	54.00	8.48	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

TX 11G ANT2 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\30

Memo:

Sample Number:S26041329-001 Power setting:1C

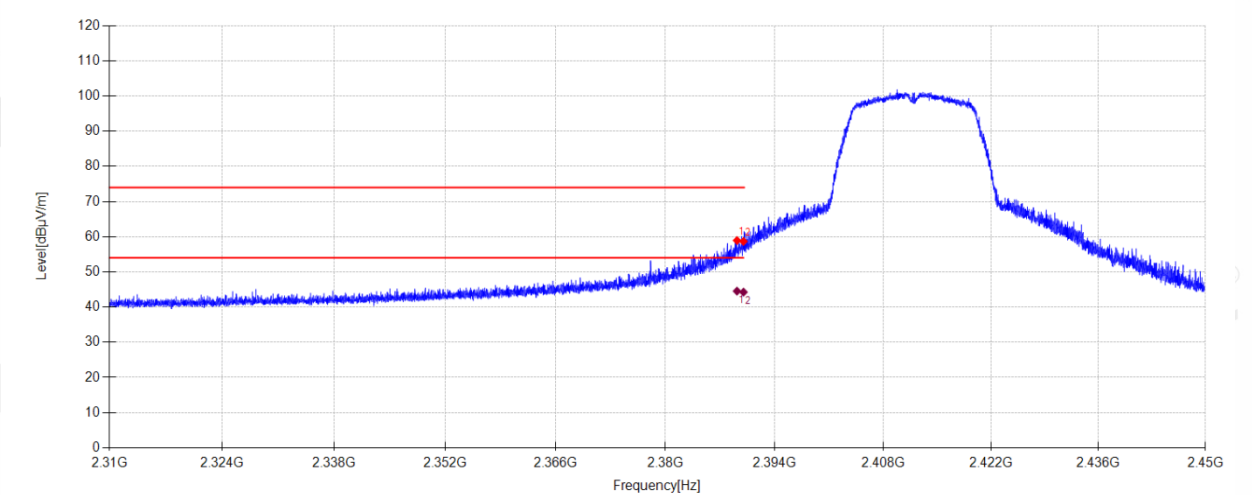

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.170	60.06	27.43	-28.56	58.93	74.00	15.07	PK	Vertical
2	2390.000	59.80	27.43	-28.56	58.67	74.00	15.33	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.170	45.67	27.43	-28.56	44.54	54.00	9.46	AV	Vertical
2	2390.000	45.38	27.43	-28.56	44.25	54.00	9.75	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\9

Memo:

Sample Number:S26041329-001 Power setting:1C

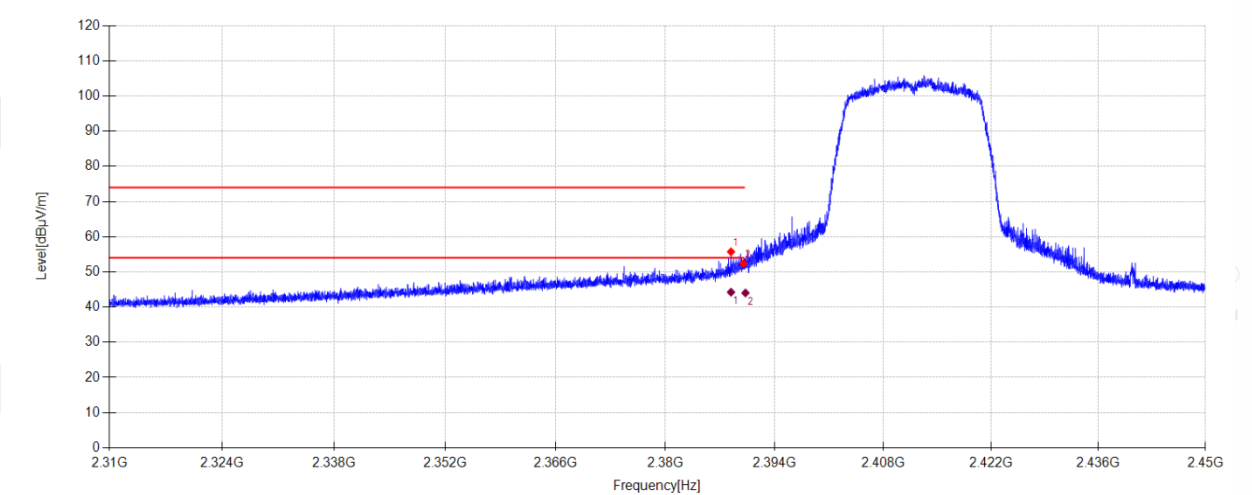

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.400	56.86	27.43	-28.56	55.73	74.00	18.27	PK	Horizontal
2	2390.000	53.50	27.43	-28.56	52.37	74.00	21.63	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.400	45.36	27.43	-28.56	44.23	54.00	9.77	AV	Horizontal
2	2390.250	45.14	27.43	-28.56	44.01	54.00	9.99	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2412MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\10

Memo:

Sample Number:S26041329-001 Power setting:1C

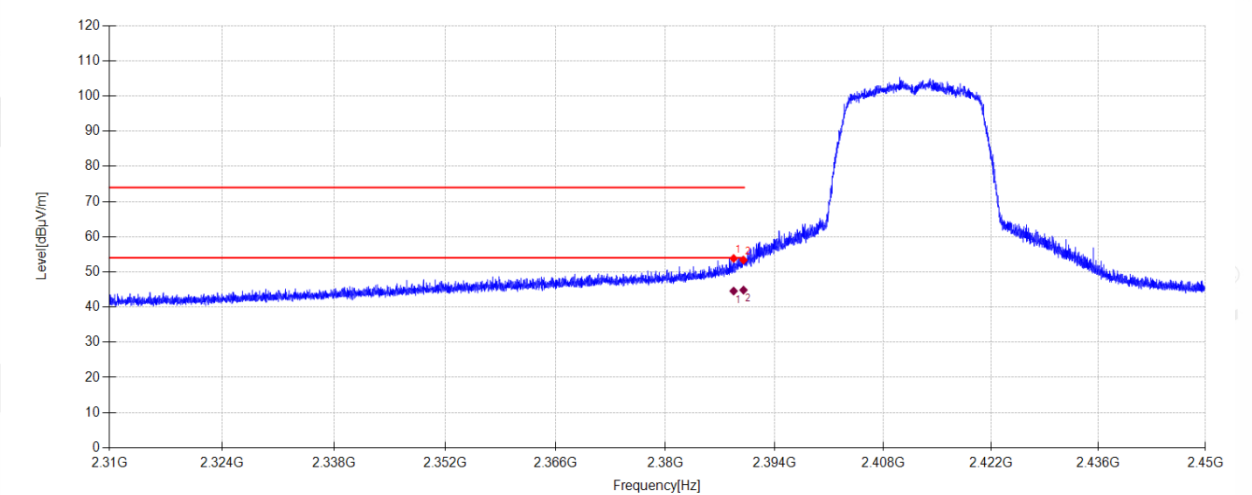

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.736	54.96	27.43	-28.56	53.83	74.00	20.17	PK	Vertical
2	2390.000	54.49	27.43	-28.56	53.36	74.00	20.64	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.736	45.68	27.43	-28.56	44.55	54.00	9.45	AV	Vertical
2	2390.000	45.97	27.43	-28.56	44.84	54.00	9.16	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\7

Memo:

Sample Number:S26041329-001 Power setting:1C

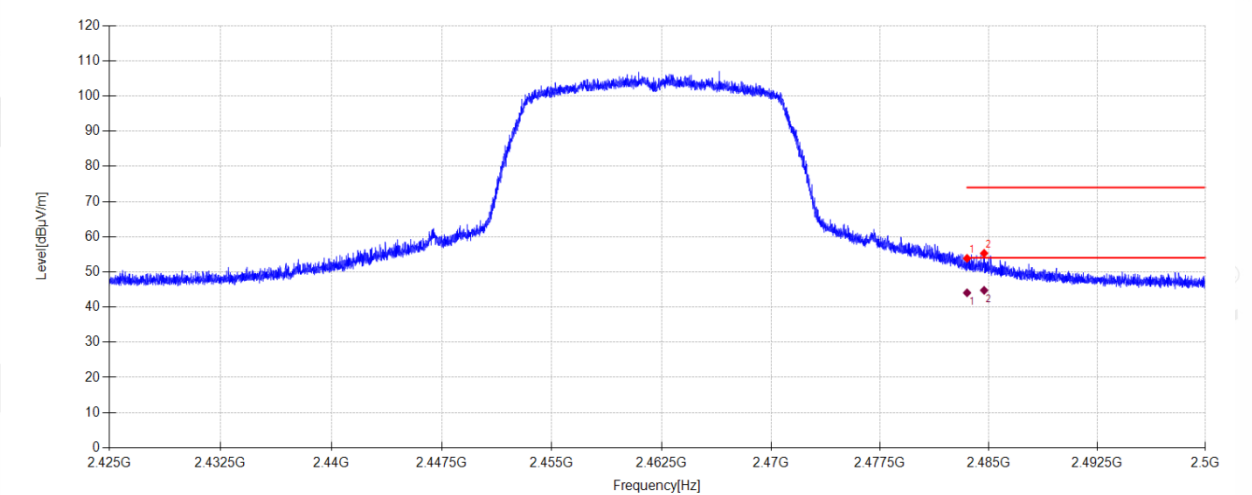

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	54.67	27.70	-28.53	53.84	74.00	20.16	PK	Horizontal
2	2484.678	56.10	27.71	-28.53	55.28	74.00	18.72	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	44.89	27.70	-28.53	44.06	54.00	9.94	AV	Horizontal
2	2484.678	45.58	27.71	-28.53	44.76	54.00	9.24	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N20 2462MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\8

Memo:

Sample Number:S26041329-001 Power setting:1C

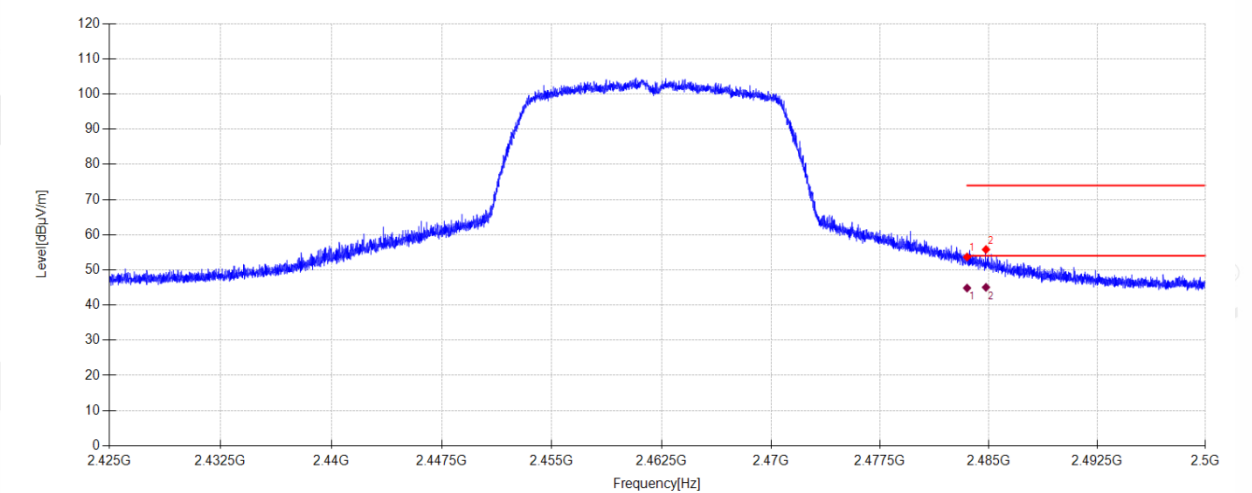

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	54.51	27.70	-28.53	53.68	74.00	20.32	PK	Vertical
2	2484.805	56.61	27.71	-28.53	55.79	74.00	18.21	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.67	27.70	-28.53	44.84	54.00	9.16	AV	Vertical
2	2484.805	45.87	27.71	-28.53	45.05	54.00	8.95	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-21 **Tested By:** Nan Zhong
Test Mode: MIMO TX N40 2422MHz Mode **Power Supply:** DC 3.3V
Condition: Temp:22.4°C;Humi:46.7% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\11
Memo: Sample Number:S26041329-001 Power setting:16

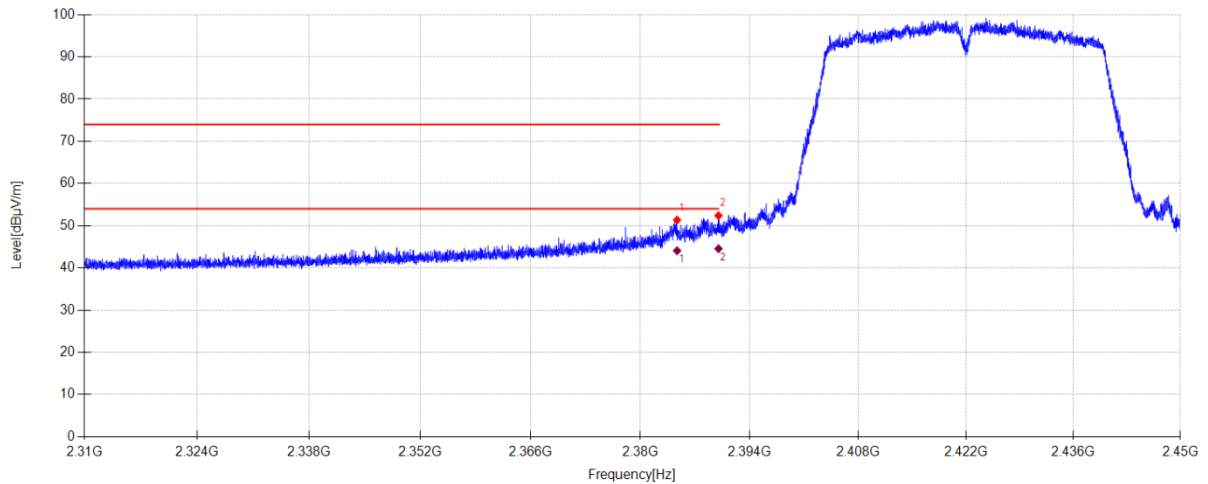

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.690	52.51	27.42	-28.58	51.35	74.00	22.65	PK	Horizontal
2	2390.000	53.52	27.43	-28.56	52.39	74.00	21.61	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.690	45.23	27.42	-28.58	44.07	54.00	9.93	AV	Horizontal
2	2390.000	45.68	27.43	-28.56	44.55	54.00	9.45	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N40 2422MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\12

Memo:

Sample Number:S26041329-001 Power setting:16

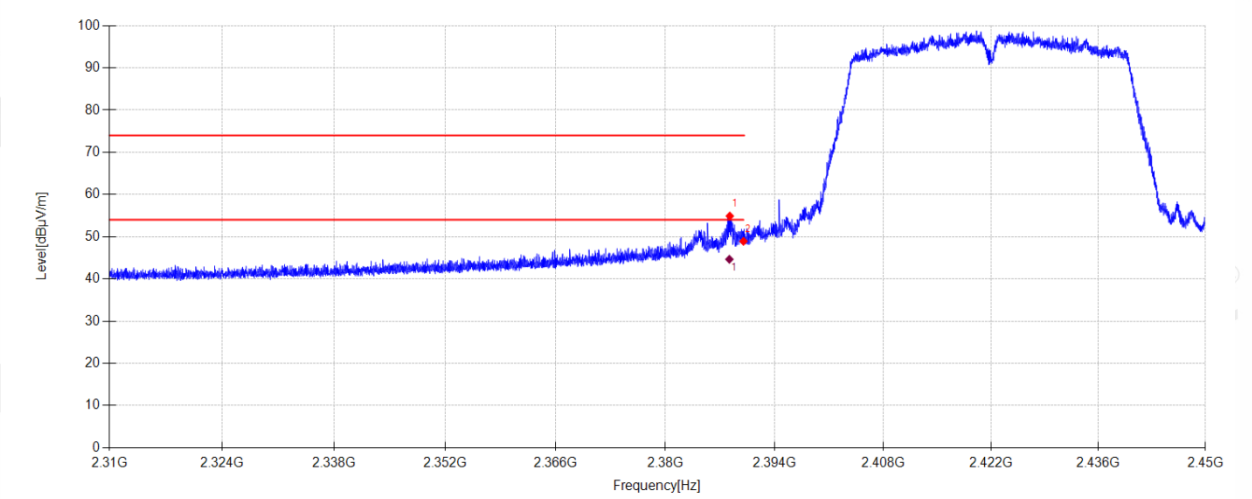

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.246	56.04	27.43	-28.57	54.90	74.00	19.10	PK	Vertical
2	2390.000	50.05	27.43	-28.56	48.92	74.00	25.08	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.188	45.79	27.43	-28.57	44.65	54.00	9.35	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N40 2452MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\13

Memo:

Sample Number:S26041329-001 Power setting:16

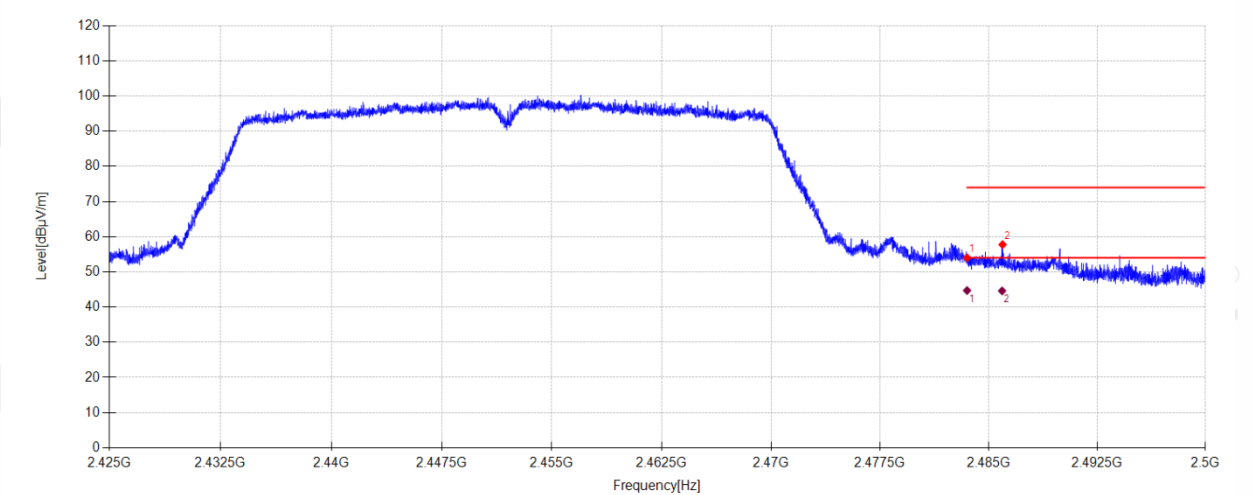

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	54.83	27.70	-28.53	54.00	74.00	20.00	PK	Horizontal
2	2485.953	58.58	27.71	-28.53	57.76	74.00	16.24	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.54	27.70	-28.53	44.71	54.00	9.29	AV	Horizontal
2	2485.923	45.42	27.71	-28.53	44.60	54.00	9.40	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-04-21

Tested By:

Nan Zhong

Test Mode:

MIMO TX N40 2452MHz Mode

Power Supply:

DC 3.3V

Condition:

Temp:22.4°C;Humi:46.7%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26041329-1E\FCC ABOVE 1G 2.4G\14

Memo:

Sample Number:S26041329-001 Power setting:16

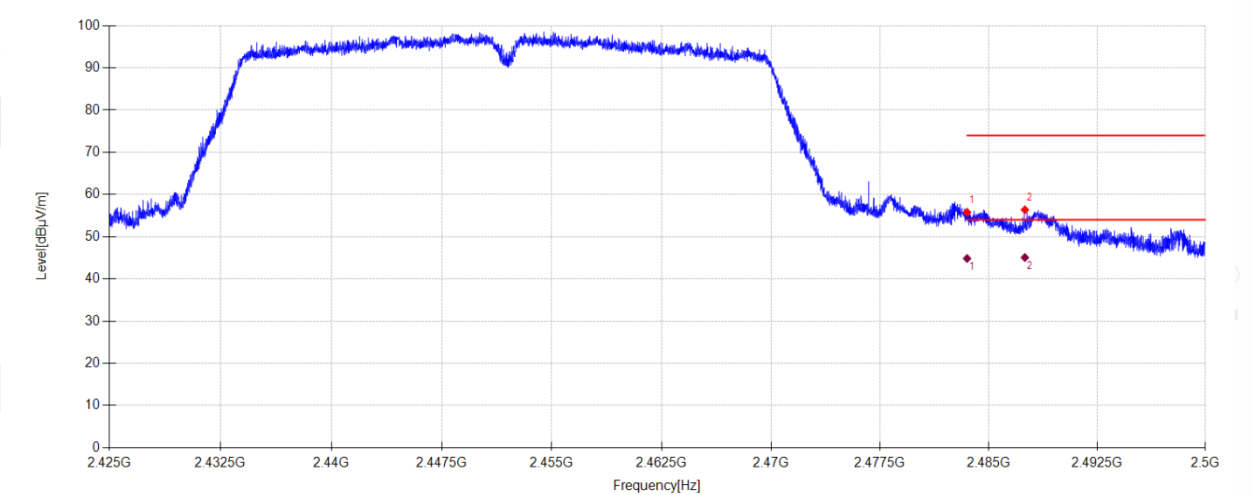

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	56.63	27.70	-28.53	55.80	74.00	18.20	PK	Vertical
2	2487.498	57.20	27.71	-28.53	56.38	74.00	17.62	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.67	27.70	-28.53	44.84	54.00	9.16	AV	Vertical
2	2487.498	45.89	27.71	-28.53	45.07	54.00	8.93	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Photos of the EUT

Please refer to DDT-Q26041329-1E appendix I

-----End Report-----