


Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2462	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:36:26

Test Graph

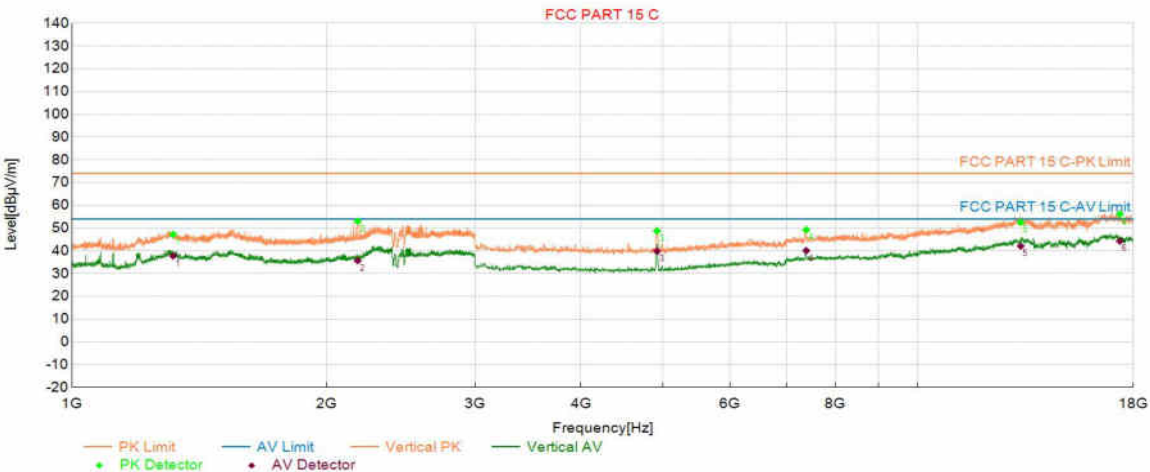

PK Final Data List									
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1317.263	44.51	2.71	47.22	74.00	26.78	150	224	Vertical
2	2177.435	45.52	7.53	53.05	74.00	20.95	150	183	Vertical
3	4920.384	52.25	-3.51	48.74	74.00	25.26	150	1	Vertical
4	7386.877	45.85	3.32	49.17	74.00	24.83	150	198	Vertical
5	13247.049	36.14	16.36	52.50	74.00	21.50	150	98	Vertical
6	17348.870	35.31	20.84	56.15	74.00	17.85	150	0	Vertical
AV Final Data List									
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1317.263	35.03	2.71	37.74	54.00	16.26	150	224	Vertical
2	2177.435	28.21	7.53	35.74	54.00	18.26	150	183	Vertical
3	4920.384	43.38	-3.51	39.87	54.00	14.13	150	1	Vertical
4	7386.877	36.74	3.32	40.06	54.00	13.94	150	198	Vertical
5	13247.049	25.72	16.36	42.08	54.00	11.92	150	98	Vertical
6	17348.870	23.45	20.84	44.29	54.00	9.71	150	0	Vertical


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2412	Voltage:	
Environment:	24.8℃/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:53:59

Test Graph

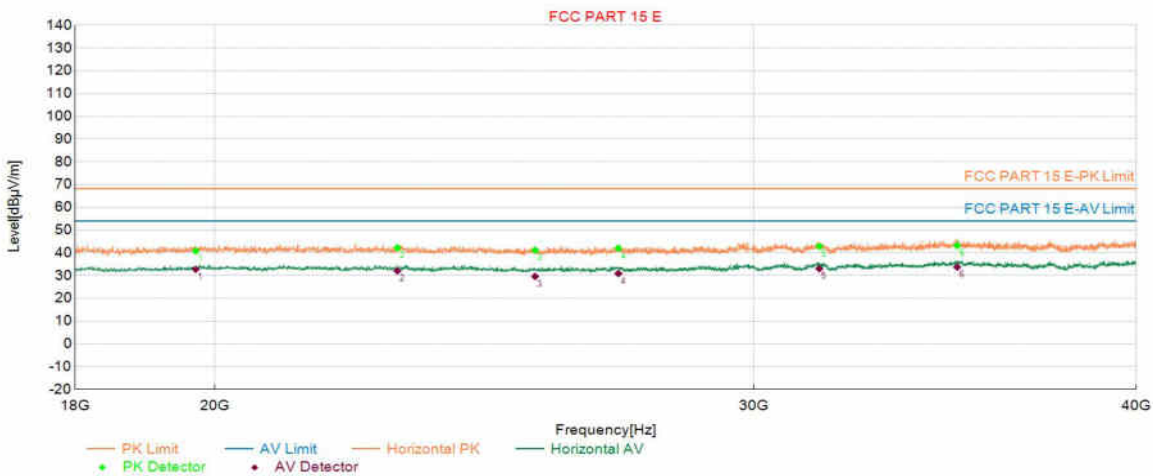

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19711.942	37.36	3.53	40.89	68.20	27.31	150	180	Horizontal
2	22942.188	35.39	6.83	42.22	68.20	25.98	150	340	Horizontal
3	25446.289	35.15	5.97	41.12	68.20	27.08	150	340	Horizontal
4	27092.218	38.6	3.40	42.00	68.20	26.20	150	60	Horizontal
5	31510.702	32.86	10.00	42.86	68.20	25.34	150	360	Horizontal
6	34956.591	32.27	10.94	43.21	68.20	24.99	150	250	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19711.942	29.22	3.53	32.75	54.00	21.25	150	180	Horizontal
2	22942.188	25.22	6.83	32.05	54.00	21.95	150	340	Horizontal
3	25446.289	23.66	5.97	29.63	54.00	24.37	150	340	Horizontal
4	27092.218	27.52	3.40	30.92	54.00	23.08	150	60	Horizontal
5	31510.702	23.04	10.00	33.04	54.00	20.96	150	360	Horizontal
6	34956.591	22.81	10.94	33.75	54.00	20.25	150	250	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2412	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:54:16

Test Graph

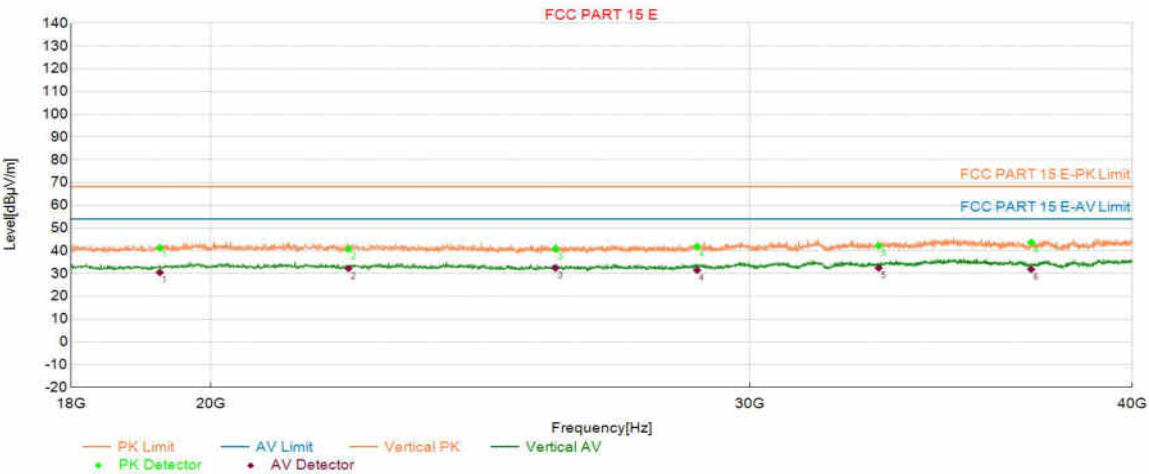

PK Final Data List									
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19245.449	38.51	2.87	41.38	68.20	26.82	150	240	Vertical
2	22180.836	35.17	5.59	40.76	68.20	27.44	150	20	Vertical
3	25917.183	35.61	5.31	40.92	68.20	27.28	150	240	Vertical
4	28830.566	35.5	6.41	41.91	68.20	26.29	150	70	Vertical
5	33051.010	33.13	9.11	42.24	68.20	25.96	150	270	Vertical
6	37069.014	33.89	9.82	43.71	68.20	24.49	150	10	Vertical
AV Final Data List									
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19245.449	27.62	2.87	30.49	54.00	23.51	150	240	Vertical
2	22180.836	26.66	5.59	32.25	54.00	21.75	150	20	Vertical
3	25917.183	27.13	5.31	32.44	54.00	21.56	150	240	Vertical
4	28830.566	25.08	6.41	31.49	54.00	22.51	150	70	Vertical
5	33051.010	23.35	9.11	32.46	54.00	21.54	150	270	Vertical
6	37069.014	22.03	9.82	31.85	54.00	22.15	150	10	Vertical


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2442	Voltage:	
Environment:	24.8℃/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:54:50

Test Graph

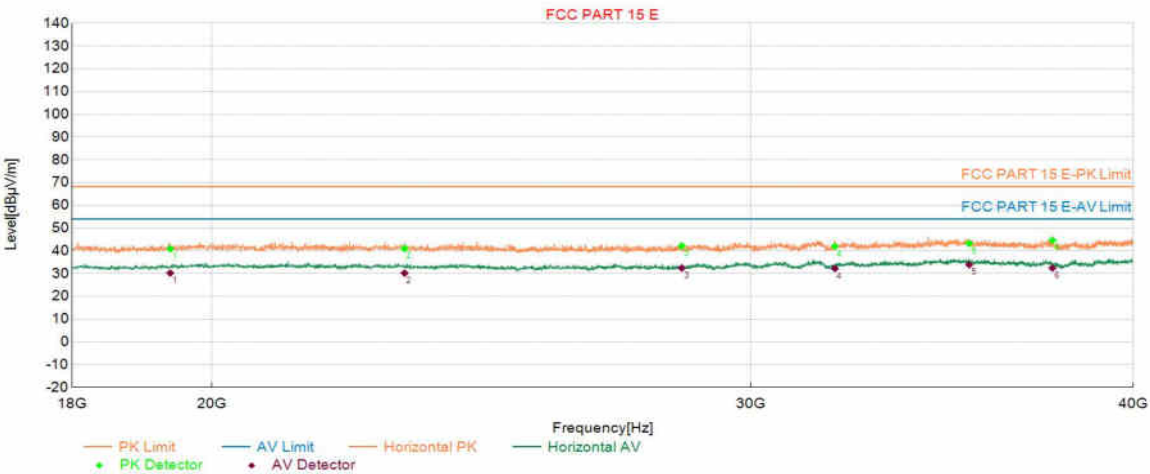

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19381.876	37.79	3.07	40.86	68.20	27.34	150	170	Horizontal
2	23118.224	34.21	6.86	41.07	68.20	27.13	150	110	Horizontal
3	28478.496	36.56	5.58	42.14	68.20	26.06	150	150	Horizontal
4	31955.191	32.16	9.82	41.98	68.20	26.22	150	230	Horizontal
5	35352.671	32.37	10.90	43.27	68.20	24.93	150	190	Horizontal
6	37636.727	35.49	9.17	44.66	68.20	23.54	150	350	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19381.876	27.17	3.07	30.24	54.00	23.76	150	170	Horizontal
2	23118.224	23.35	6.86	30.21	54.00	23.79	150	110	Horizontal
3	28478.496	26.83	5.58	32.41	54.00	21.59	150	150	Horizontal
4	31955.191	22.40	9.82	32.22	54.00	21.78	150	230	Horizontal
5	35352.671	23.01	10.90	33.91	54.00	20.09	150	190	Horizontal
6	37636.727	23.26	9.17	32.43	54.00	21.57	150	350	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2442	Voltage:	
Environment:	24.8℃/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:55:07

Test Graph

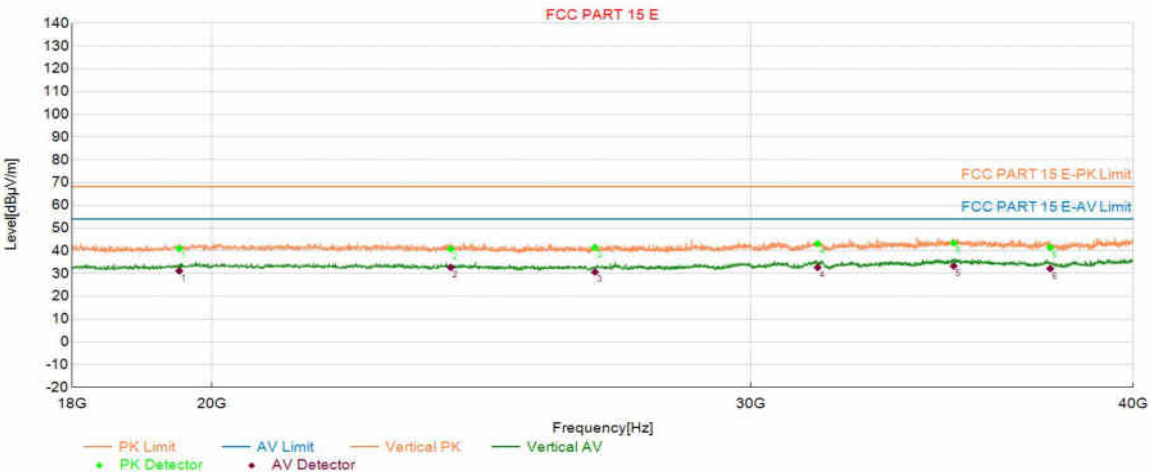

PK Final Data List									
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19513.903	37.84	3.27	41.11	68.20	27.09	150	310	Vertical
2	23936.787	33.3	7.58	40.88	68.20	27.32	150	330	Vertical
3	26678.536	37.72	3.72	41.44	68.20	26.76	150	140	Vertical
4	31545.909	33.15	9.98	43.13	68.20	25.07	150	260	Vertical
5	34943.389	32.51	10.93	43.44	68.20	24.76	150	120	Vertical
6	37575.115	32.2	9.25	41.45	68.20	26.75	150	230	Vertical
AV Final Data List									
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19513.903	27.89	3.27	31.16	54.00	22.84	150	310	Vertical
2	23936.787	25.15	7.58	32.73	54.00	21.27	150	330	Vertical
3	26678.536	26.98	3.72	30.70	54.00	23.30	150	140	Vertical
4	31545.909	22.73	9.98	32.71	54.00	21.29	150	260	Vertical
5	34943.389	22.40	10.93	33.33	54.00	20.67	150	120	Vertical
6	37575.115	22.95	9.25	32.20	54.00	21.80	150	230	Vertical


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2462	Voltage:	
Environment:	24.8℃/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:55:41

Test Graph

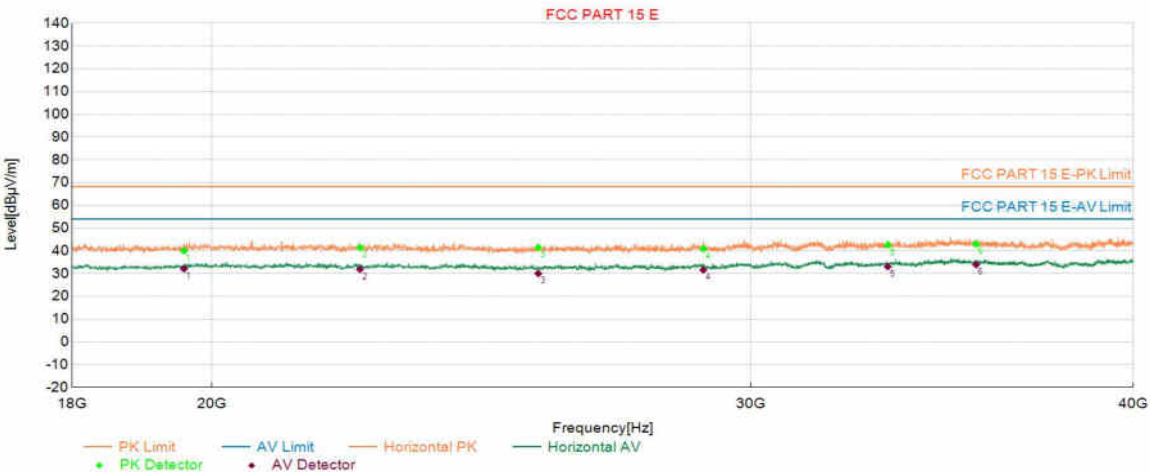

PK Final Data List									
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19584.317	36.69	3.36	40.05	68.20	28.15	150	160	Horizontal
2	22356.871	35.47	5.99	41.46	68.20	26.74	150	190	Horizontal
3	25565.113	35.66	5.81	41.47	68.20	26.73	150	200	Horizontal
4	28944.989	34.24	6.67	40.91	68.20	27.29	150	130	Horizontal
5	33253.451	33.46	9.15	42.61	68.20	25.59	150	160	Horizontal
6	35537.508	32.15	10.85	43.00	68.20	25.20	150	210	Horizontal
AV Final Data List									
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19584.317	28.75	3.36	32.11	54.00	21.89	150	160	Horizontal
2	22356.871	25.90	5.99	31.89	54.00	22.11	150	190	Horizontal
3	25565.113	24.23	5.81	30.04	54.00	23.96	150	200	Horizontal
4	28944.989	24.96	6.67	31.63	54.00	22.37	150	130	Horizontal
5	33253.451	23.90	9.15	33.05	54.00	20.95	150	160	Horizontal
6	35537.508	23.11	10.85	33.96	54.00	20.04	150	210	Horizontal


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2462	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:55:58

Test Graph

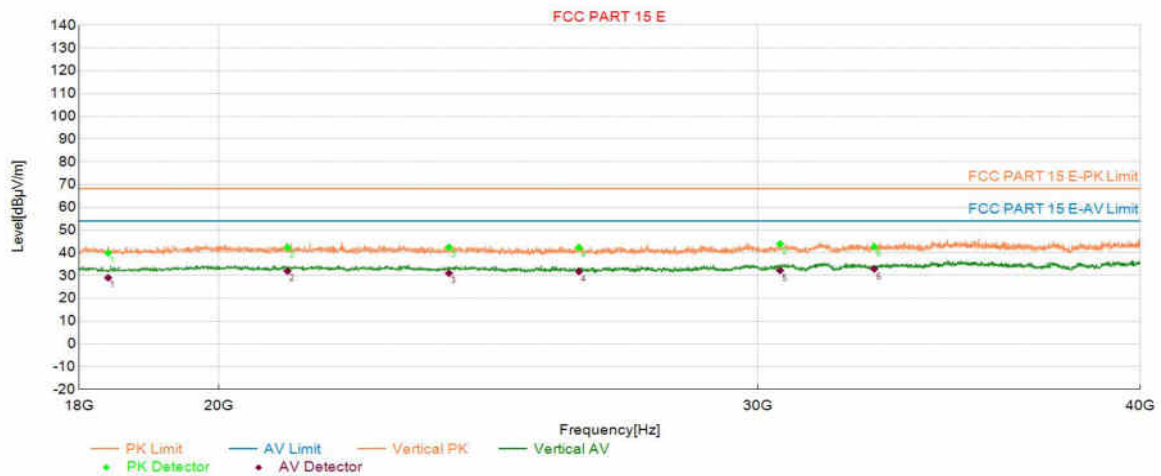

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18400.480	37.64	2.38	40.02	68.20	28.18	150	130	Vertical
2	21058.612	37.97	4.41	42.38	68.20	25.82	150	310	Vertical
3	23778.356	35.16	7.27	42.43	68.20	25.77	150	300	Vertical
4	26220.844	37.75	4.63	42.38	68.20	25.82	150	210	Vertical
5	30502.901	34.56	9.40	43.96	68.20	24.24	150	20	Vertical
6	32742.949	33.45	9.23	42.68	68.20	25.52	150	260	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18400.480	26.65	2.38	29.03	54.00	24.97	150	130	Vertical
2	21058.612	27.54	4.41	31.95	54.00	22.05	150	310	Vertical
3	23778.356	23.78	7.27	31.05	54.00	22.95	150	300	Vertical
4	26220.844	27.12	4.63	31.75	54.00	22.25	150	210	Vertical
5	30502.901	22.84	9.40	32.24	54.00	21.76	150	20	Vertical
6	32742.949	23.68	9.23	32.91	54.00	21.09	150	260	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11B_2412	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 19:32:39

Test Graph

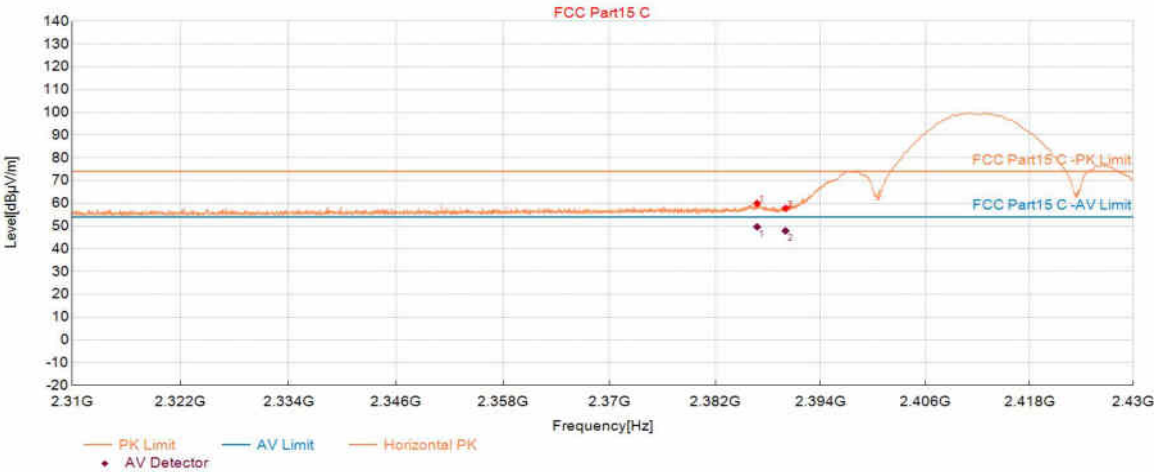

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.767	51.64	59.98	8.34	74.00	14.02	150	219	Horizontal
2	2390.008	49.43	57.79	8.36	74.00	16.21	150	212	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.767	41.33	8.34	49.67	54.00	4.33	150	219	Horizontal
2	2390.008	39.54	8.36	47.90	54.00	6.10	150	212	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11B_2412	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 19:33:37

Test Graph

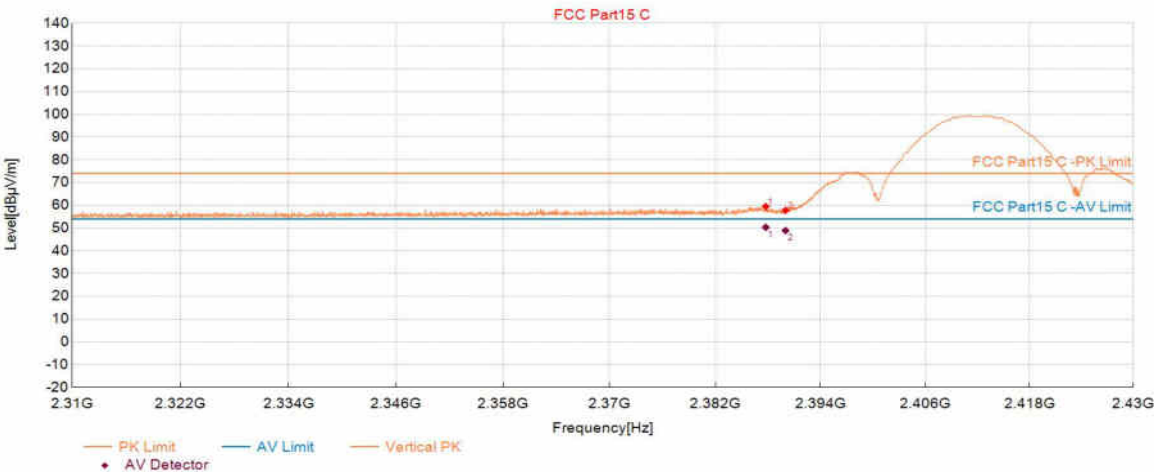

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.752	51.12	59.46	8.34	74.00	14.54	150	148	Vertical
2	2390.008	49.44	57.80	8.36	74.00	16.20	150	43	Vertical

AV Final Data List

NO	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.752	42.00	8.34	50.34	54.00	3.66	150	148	Vertical
2	2390.008	40.54	8.36	48.90	54.00	5.10	150	43	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11B_2462	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 19:43:29

Test Graph

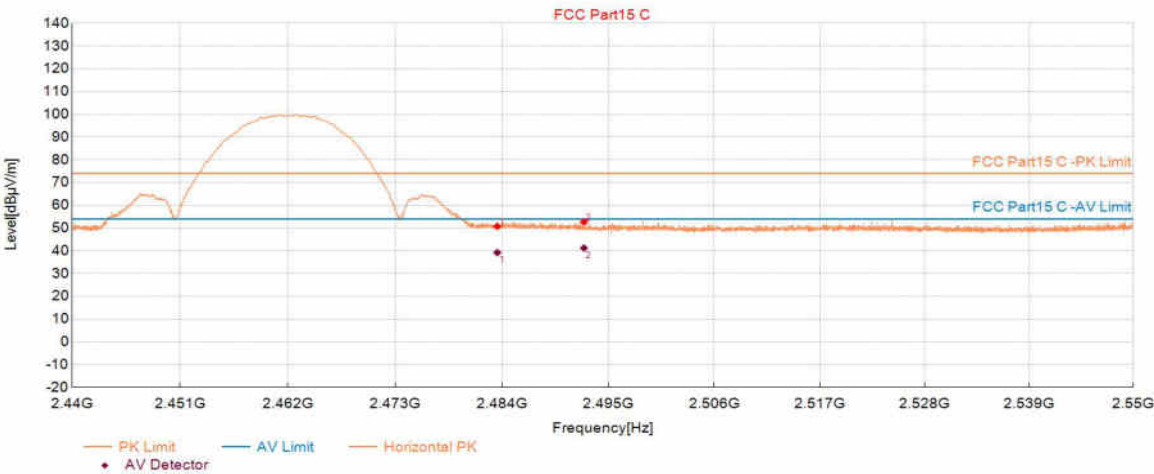

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	42.07	50.75	8.68	74.00	23.25	150	359	Horizontal
2	2492.458	44.01	52.72	8.71	74.00	21.28	150	272	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	30.55	8.68	39.23	54.00	14.77	150	359	Horizontal
2	2492.458	32.51	8.71	41.22	54.00	12.78	150	272	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11B_2462	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 19:44:27

Test Graph

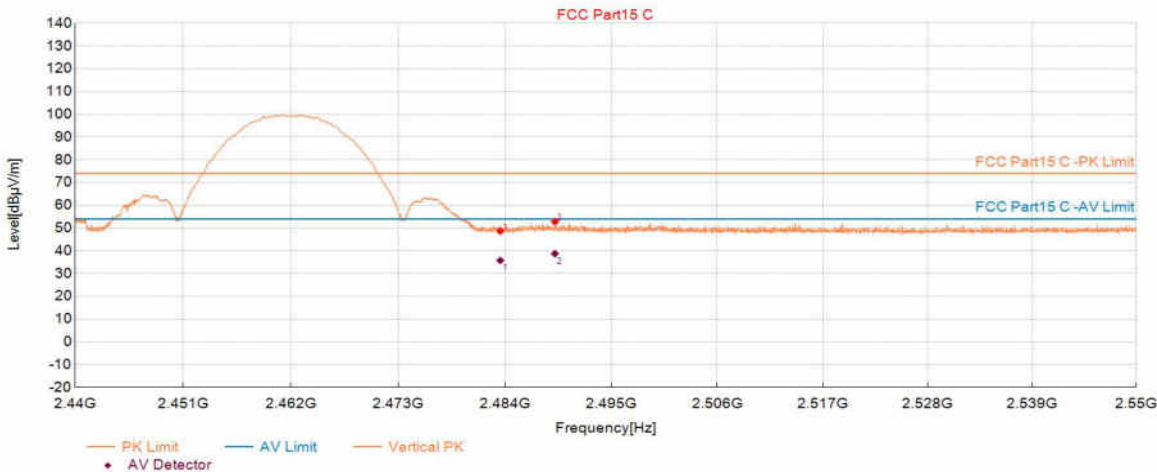

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	39.99	48.67	8.68	74.00	25.33	150	193	Vertical
2	2489.136	44.10	52.81	8.71	74.00	21.19	150	327	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	27.11	8.68	35.79	54.00	18.21	150	193	Vertical
2	2489.136	30.05	8.71	38.76	54.00	15.24	150	327	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11G_2412	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 20:35:40

Test Graph

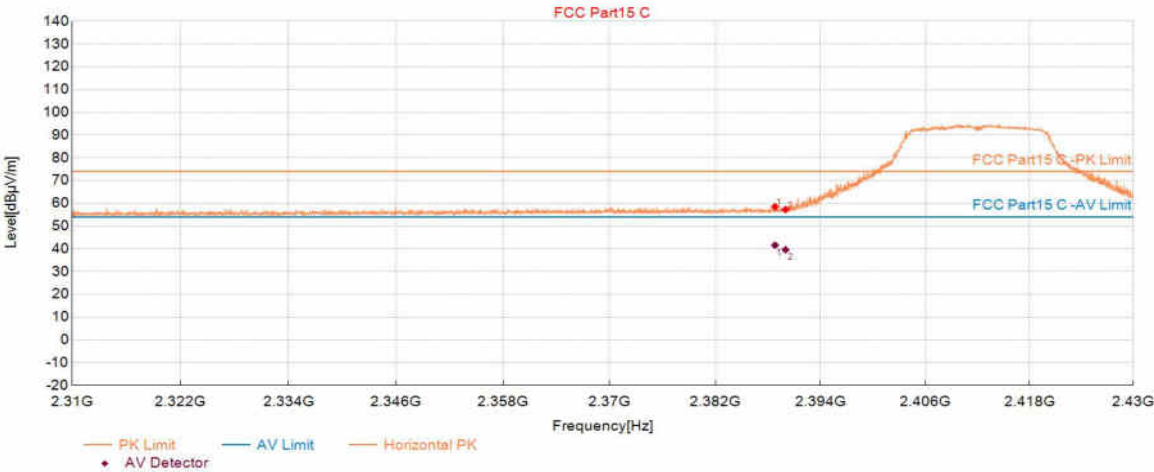

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.808	50.18	58.53	8.35	74.00	15.47	150	166	Horizontal
2	2390.008	48.88	57.24	8.36	74.00	16.76	150	358	Horizontal

AV Final Data List

NO	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.808	33.25	8.35	41.60	54.00	12.40	150	166	Horizontal
2	2390.008	31.25	8.36	39.61	54.00	14.39	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11G_2412	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 20:36:26

Test Graph

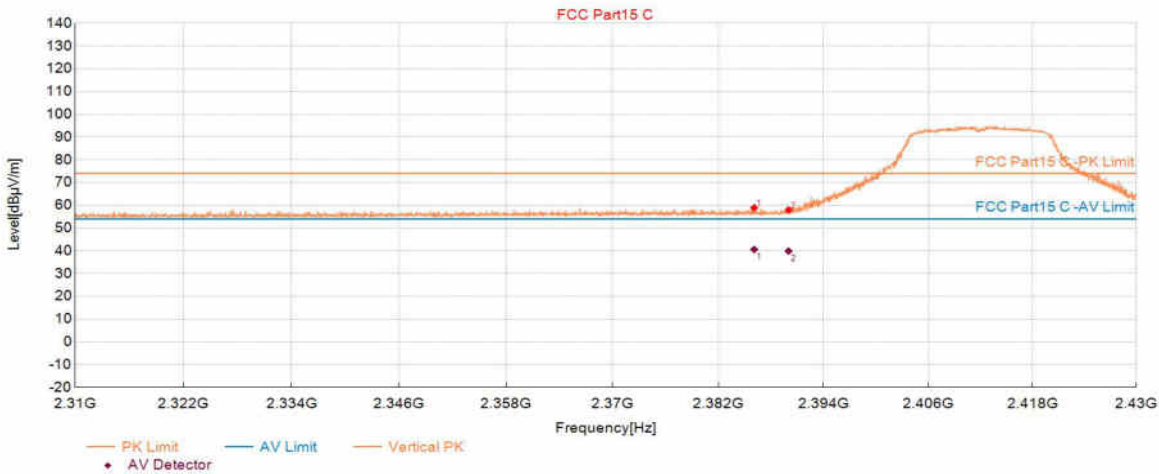

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.095	50.56	58.90	8.34	74.00	15.10	150	150	Vertical
2	2390.008	49.63	57.99	8.36	74.00	16.01	150	187	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.095	32.26	8.34	40.60	54.00	13.40	150	150	Vertical
2	2390.008	31.54	8.36	39.90	54.00	14.10	150	187	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11G_2462	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 20:50:47

Test Graph

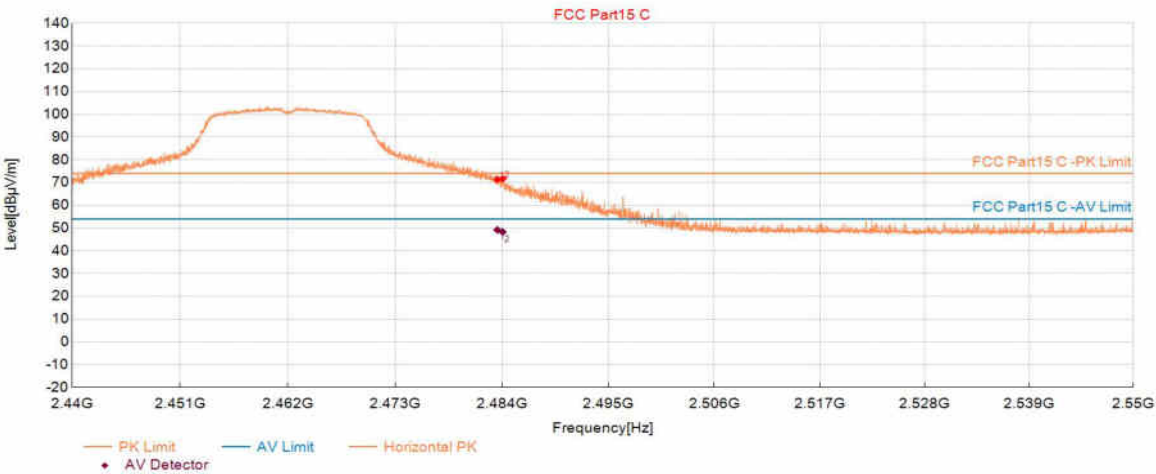

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	62.69	71.37	8.68	74.00	2.63	150	17	Horizontal
2	2484.053	62.99	71.67	8.68	74.00	2.33	150	186	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	40.52	8.68	49.20	54.00	4.80	150	17	Horizontal
2	2484.053	39.65	8.68	48.33	54.00	5.67	150	186	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11G_2462	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 20:51:33

Test Graph

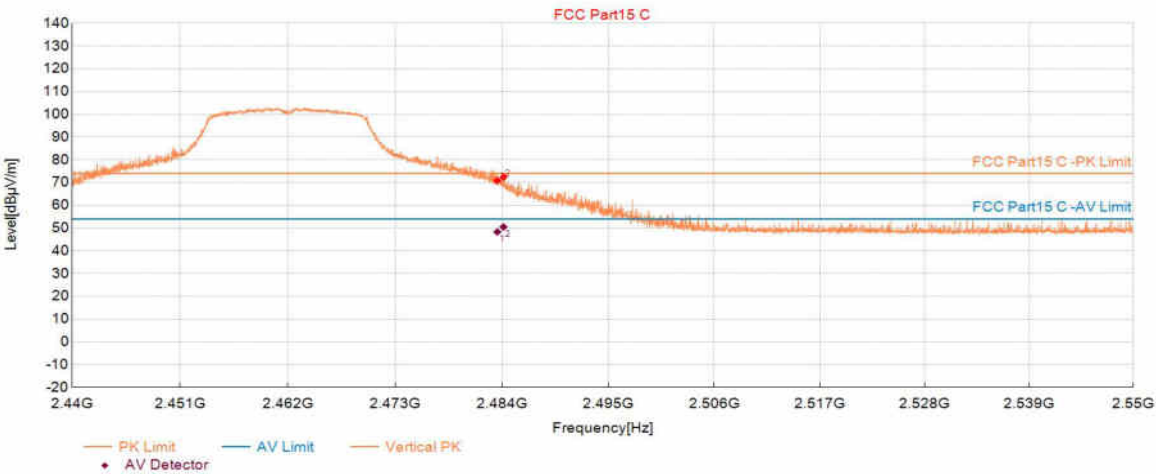

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	62.23	70.91	8.68	74.00	3.09	150	18	Vertical
2	2484.141	63.68	72.36	8.68	74.00	1.64	150	12	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	39.65	8.68	48.33	54.00	5.67	150	18	Vertical
2	2484.141	41.82	8.68	50.50	54.00	3.50	150	12	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N20_2412	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:02:36

Test Graph

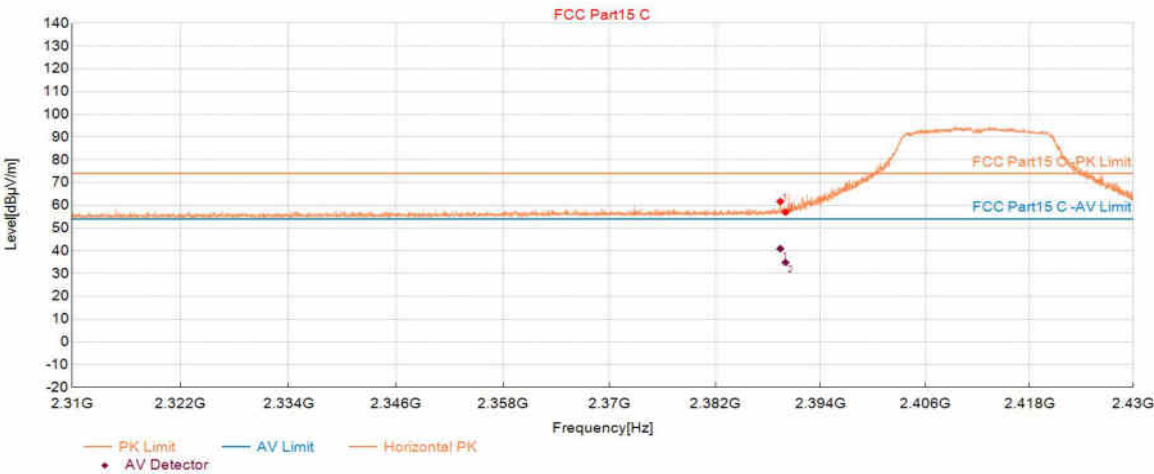

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.408	53.33	61.68	8.35	74.00	12.32	150	53	Horizontal
2	2390.008	48.59	56.95	8.36	74.00	17.05	150	317	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.408	32.60	8.35	40.95	54.00	13.05	150	53	Horizontal
2	2390.008	26.55	8.36	34.91	54.00	19.09	150	317	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N20_2412	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:03:23

Test Graph

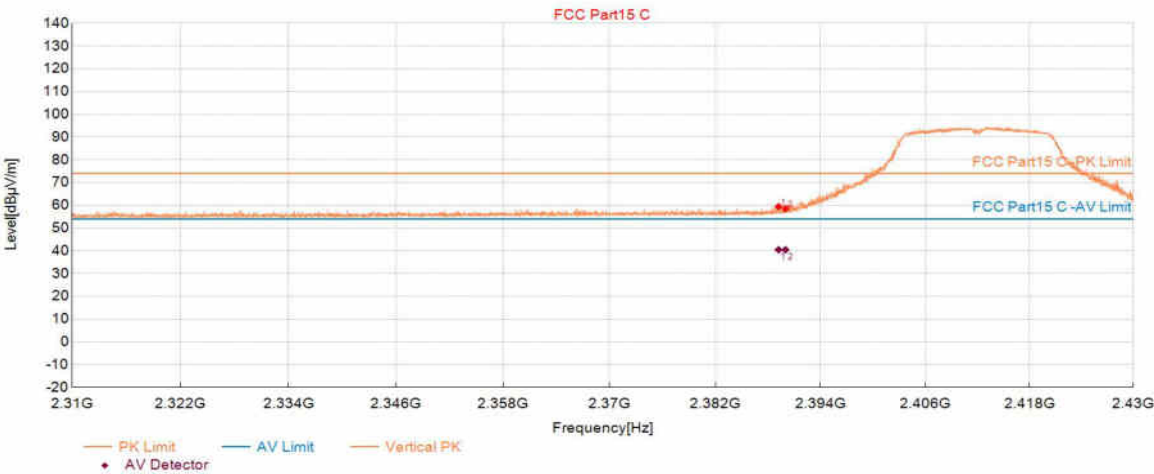

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.216	51.06	59.41	8.35	74.00	14.59	150	203	Vertical
2	2390.008	50.15	58.51	8.36	74.00	15.49	150	107	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.216	32.14	8.35	40.49	54.00	13.51	150	203	Vertical
2	2390.008	32.11	8.36	40.47	54.00	13.53	150	107	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N20_2462	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:12:06

Test Graph

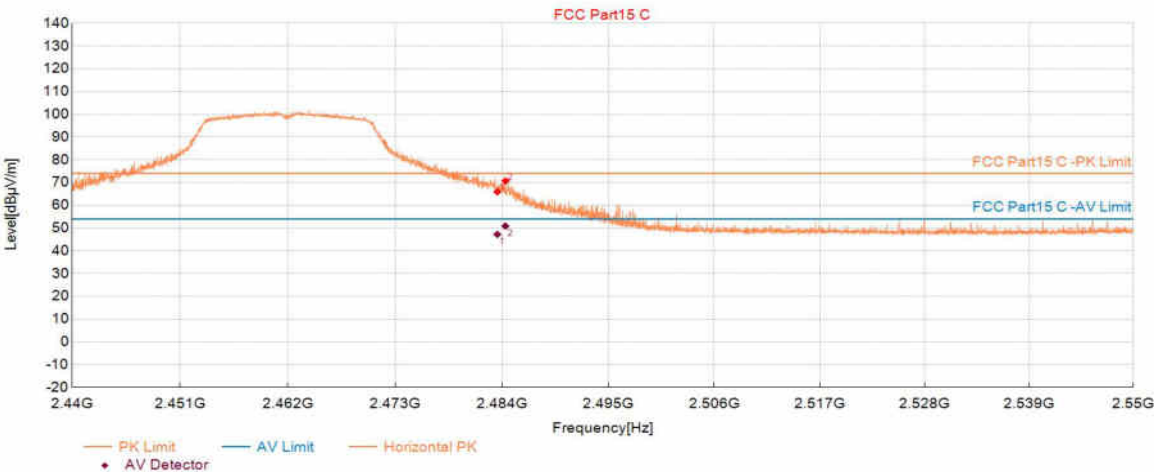

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	57.28	65.96	8.68	74.00	8.04	150	360	Horizontal
2	2484.339	62.02	70.70	8.68	74.00	3.30	150	246	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	38.55	8.68	47.23	54.00	6.77	150	360	Horizontal
2	2484.339	42.21	8.68	50.89	54.00	3.11	150	246	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N20_2462	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:12:51

Test Graph

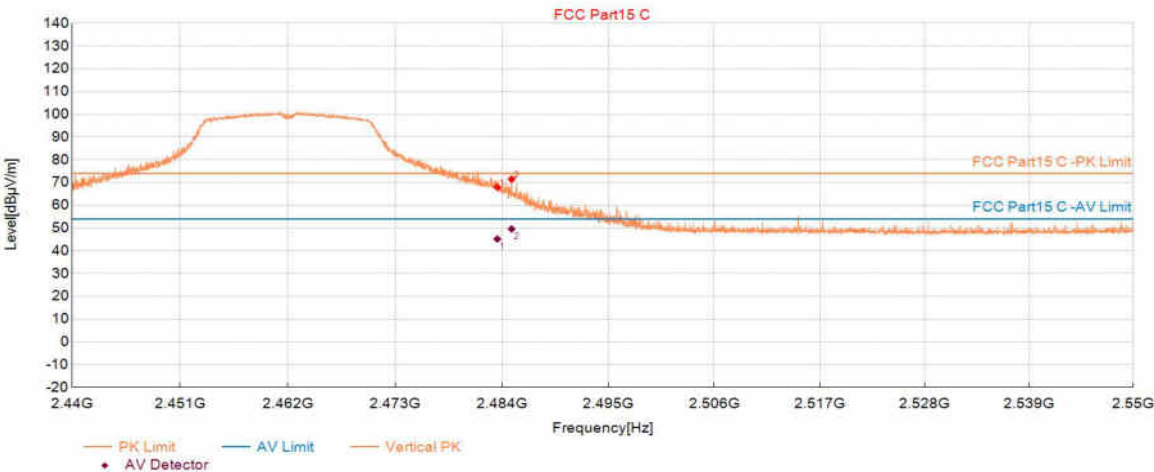

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	59.27	67.95	8.68	74.00	6.05	150	351	Vertical
2	2484.977	62.83	71.52	8.69	74.00	2.48	150	33	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	36.51	8.68	45.19	54.00	8.81	150	351	Vertical
2	2484.977	40.94	8.69	49.63	54.00	4.37	150	33	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N40_2422	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:40:29

Test Graph

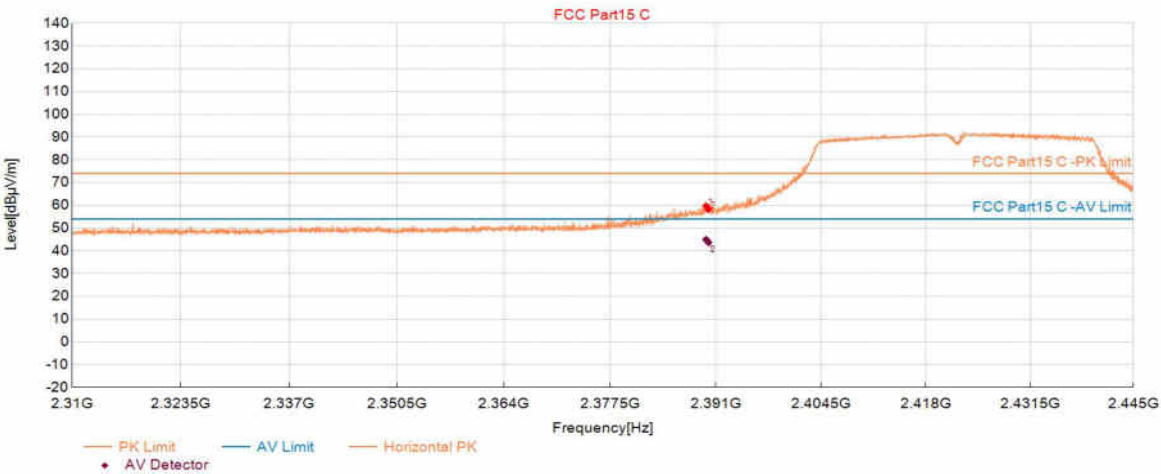

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.747	51.34	59.69	8.35	74.00	14.31	150	52	Horizontal
2	2390.017	49.89	58.25	8.36	74.00	15.75	150	226	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.747	36.62	8.35	44.97	54.00	9.03	150	52	Horizontal
2	2390.017	35.41	8.36	43.77	54.00	10.23	150	226	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N40_2422	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:41:21

Test Graph

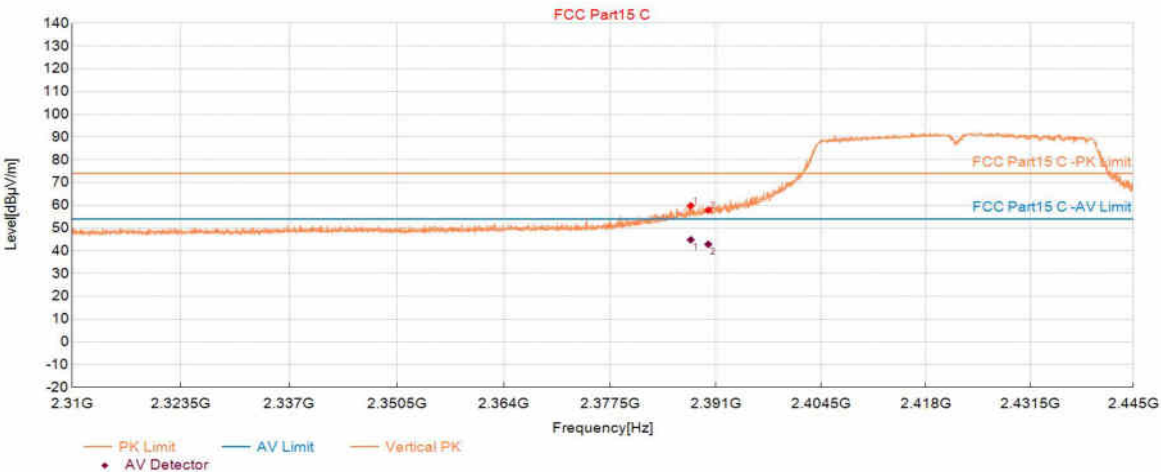

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.776	51.49	59.83	8.34	74.00	14.17	150	50	Vertical
2	2390.017	49.52	57.88	8.36	74.00	16.12	150	36	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.776	36.52	8.34	44.86	54.00	9.14	150	50	Vertical
2	2390.017	34.52	8.36	42.88	54.00	11.12	150	36	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N40_2452	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:49:43

Test Graph

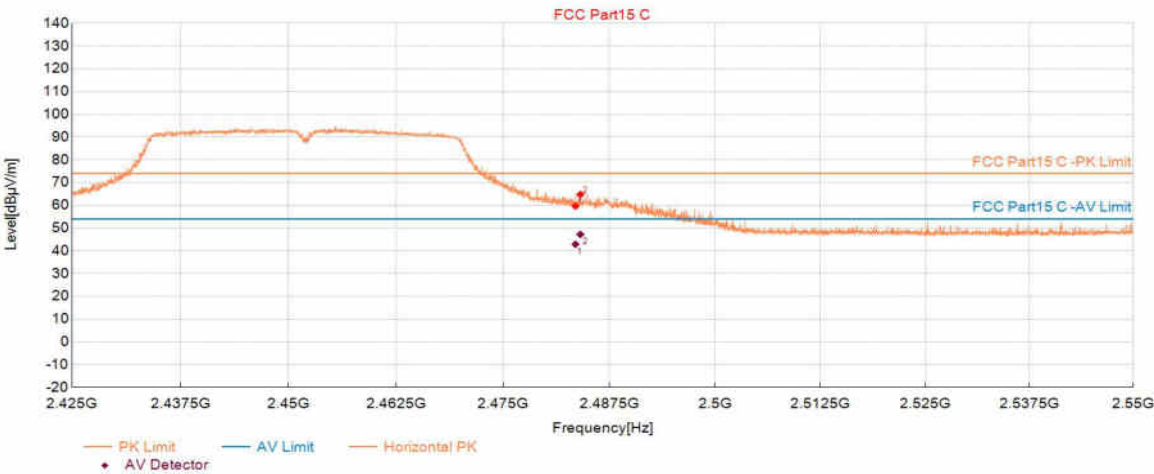

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	50.96	59.64	8.68	74.00	14.36	150	36	Horizontal
2	2484.087	56.04	64.72	8.68	74.00	9.28	150	53	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	34.21	8.68	42.89	54.00	11.11	150	36	Horizontal
2	2484.087	38.54	8.68	47.22	54.00	6.78	150	53	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11N40_2452	Voltage:	
Environment:	25.5℃/50%	Engineer:	
Remark:			

Start of Test:2025-12-15 21:50:33

Test Graph

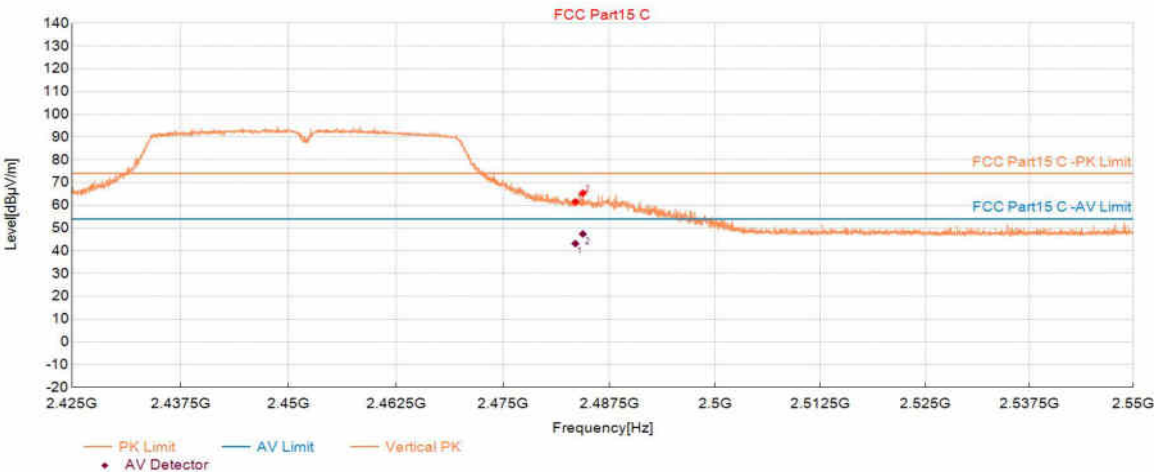

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	52.86	61.54	8.68	74.00	12.46	150	179	Vertical
2	2484.387	56.66	65.34	8.68	74.00	8.66	150	331	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	34.51	8.68	43.19	54.00	10.81	150	179	Vertical
2	2484.387	38.74	8.68	47.42	54.00	6.58	150	331	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2412	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 09:31:06

Test Graph

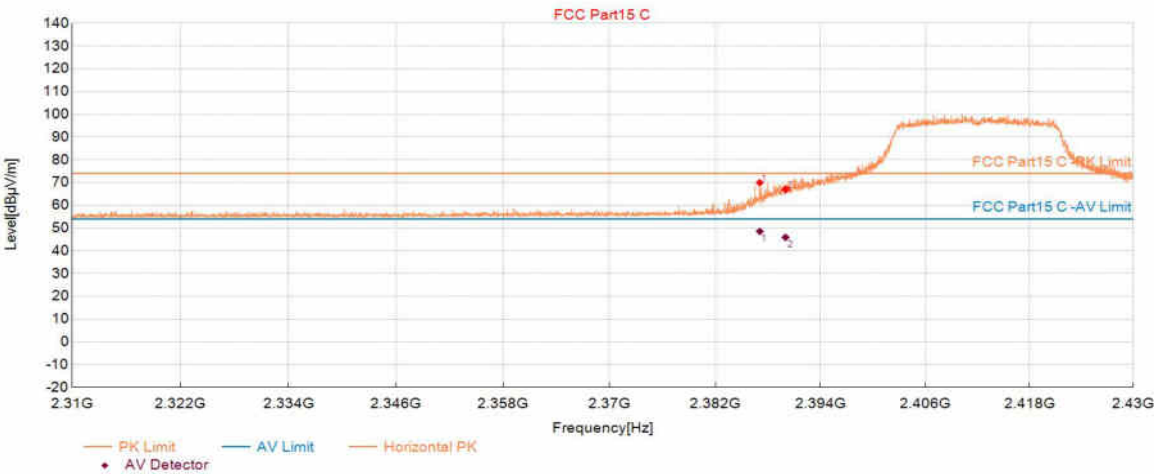

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.079	61.60	69.94	8.34	74.00	4.06	150	0	Horizontal
2	2390.008	58.59	66.95	8.36	74.00	7.05	150	1	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.079	40.21	8.34	48.55	54.00	5.45	150	0	Horizontal
2	2390.008	37.56	8.36	45.92	54.00	8.08	150	1	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2412	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 09:31:52

Test Graph

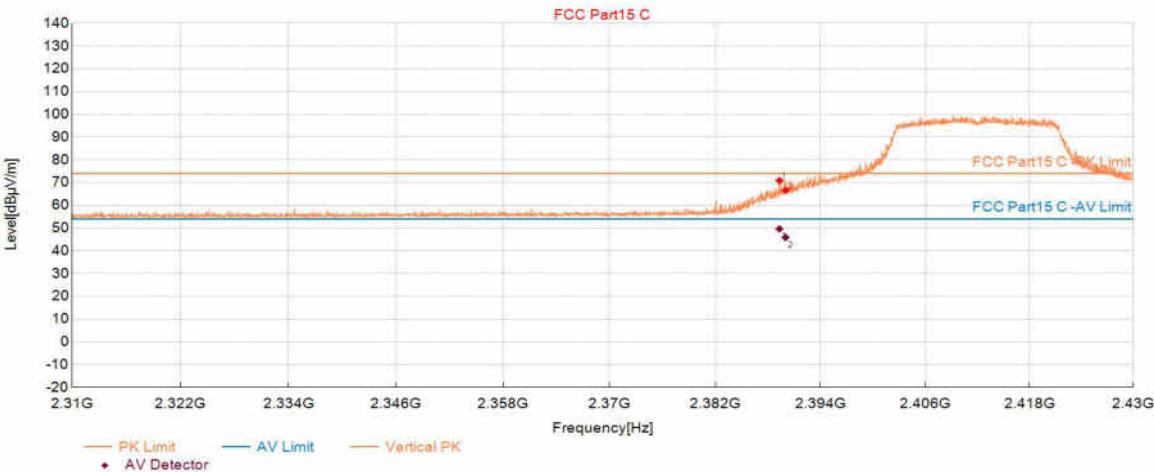

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.312	62.53	70.88	8.35	74.00	3.12	150	42	Vertical
2	2390.008	58.20	66.56	8.36	74.00	7.44	150	333	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.312	41.33	8.35	49.68	54.00	4.32	150	42	Vertical
2	2390.008	37.52	8.36	45.88	54.00	8.12	150	333	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2462	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 10:43:09

Test Graph

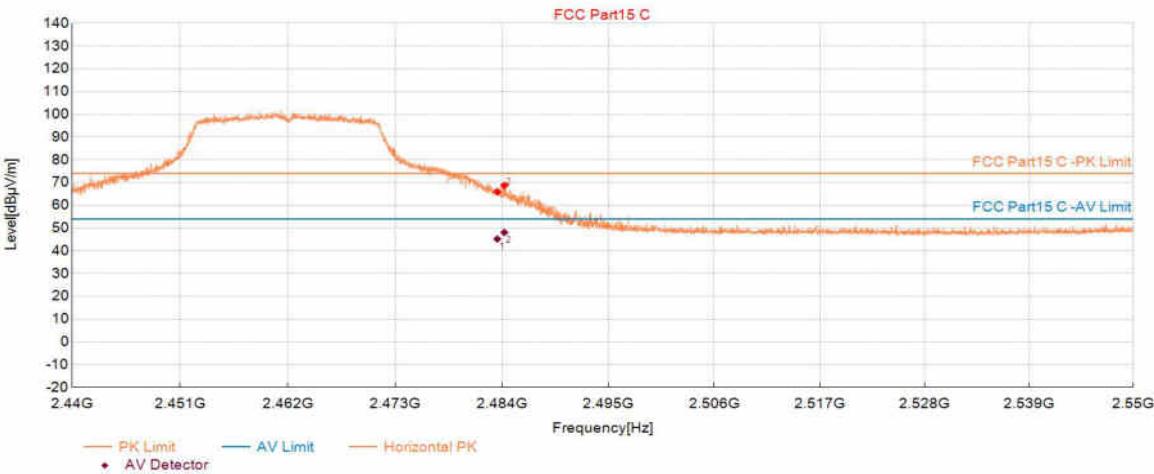

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	57.25	65.93	8.68	74.00	8.07	150	32	Horizontal
2	2484.229	60.03	68.71	8.68	74.00	5.29	150	325	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	36.54	8.68	45.22	54.00	8.78	150	32	Horizontal
2	2484.229	39.40	8.68	48.08	54.00	5.92	150	325	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX20_2462	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 10:43:54

Test Graph

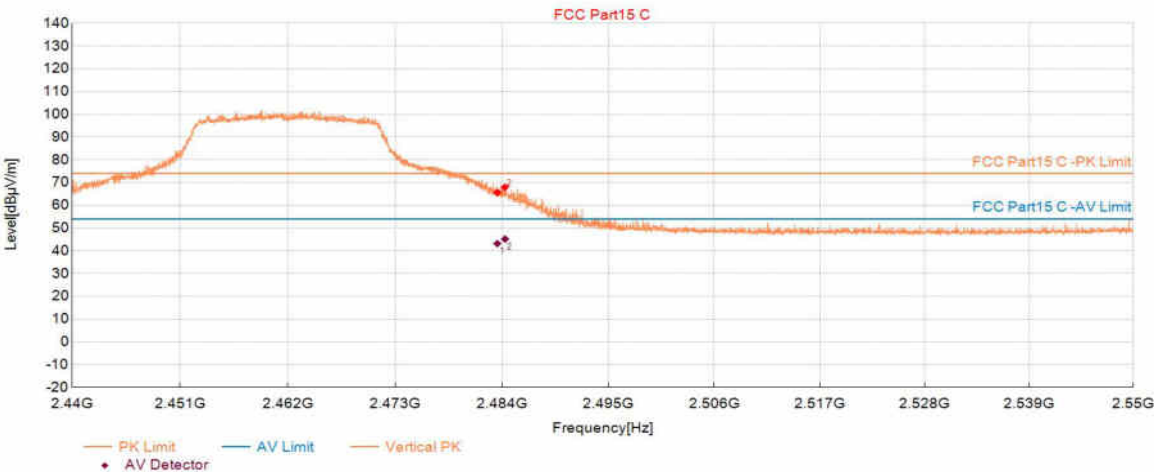

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	56.88	65.56	8.68	74.00	8.44	150	177	Vertical
2	2484.295	59.26	67.94	8.68	74.00	6.06	150	353	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	34.51	8.68	43.19	54.00	10.81	150	177	Vertical
2	2484.295	36.52	8.68	45.20	54.00	8.80	150	353	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX40_2422	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:03:05

Test Graph

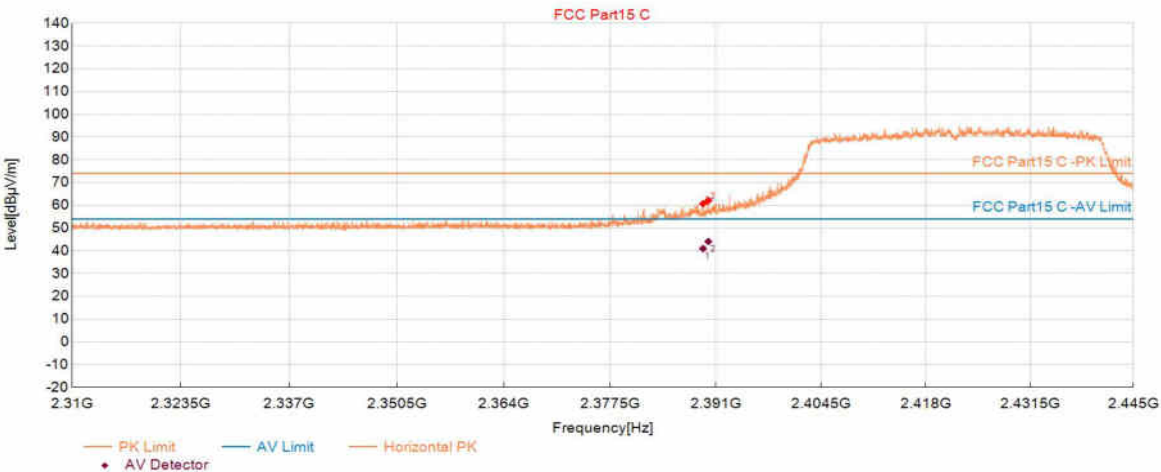

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.342	52.36	60.71	8.35	74.00	13.29	150	167	Horizontal
2	2390.017	53.67	62.03	8.36	74.00	11.97	150	105	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.342	32.65	8.35	41.00	54.00	13.00	150	167	Horizontal
2	2390.017	35.75	8.36	44.11	54.00	9.89	150	105	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX40_2422	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:03:55

Test Graph

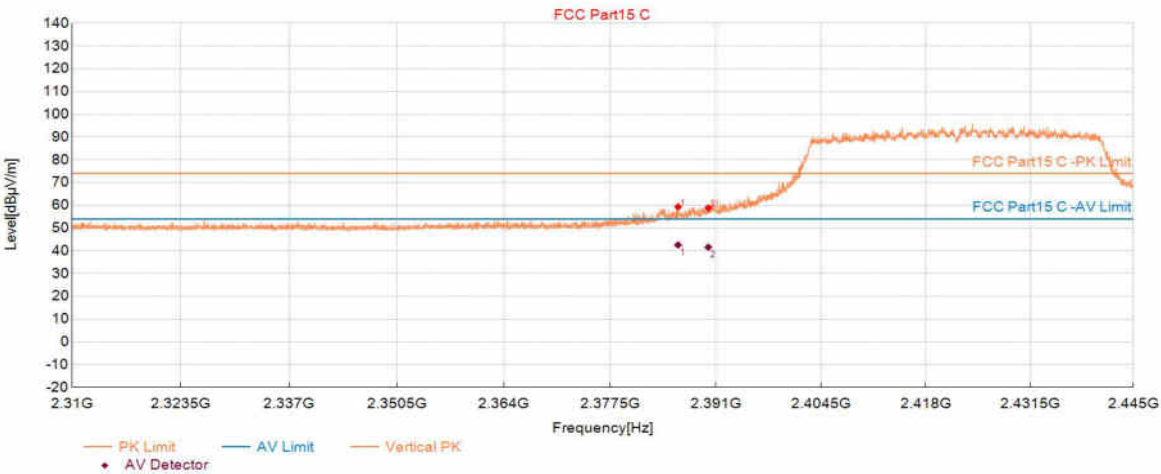

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.155	50.96	59.30	8.34	74.00	14.70	150	117	Vertical
2	2390.017	50.44	58.80	8.36	74.00	15.20	150	177	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.155	34.23	8.34	42.57	54.00	11.43	150	117	Vertical
2	2390.017	33.24	8.36	41.60	54.00	12.40	150	177	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX40_2452	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:12:04

Test Graph

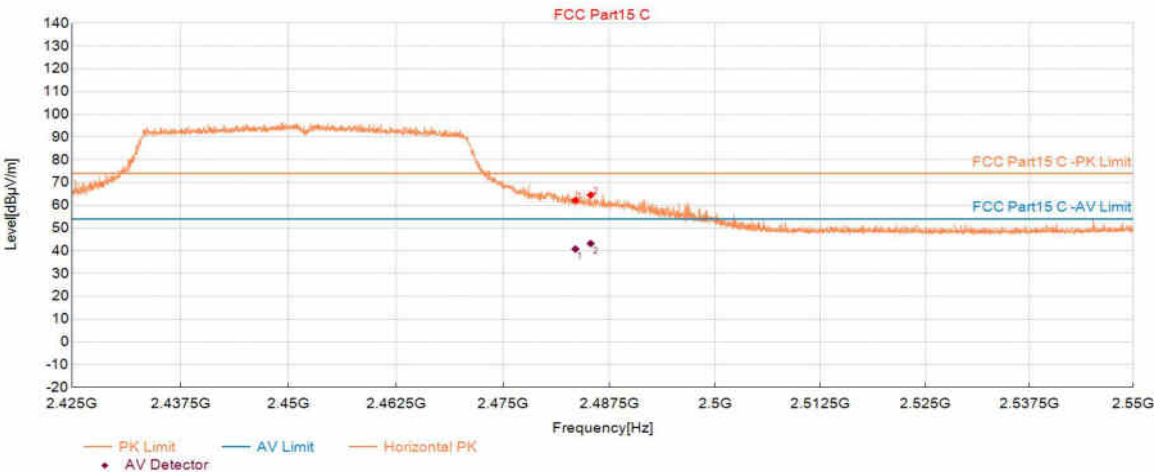

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	53.48	62.16	8.68	74.00	11.84	150	250	Horizontal
2	2485.312	55.82	64.52	8.70	74.00	9.48	150	250	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	32.11	8.68	40.79	54.00	13.21	150	250	Horizontal
2	2485.312	34.52	8.70	43.22	54.00	10.78	150	250	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1	SN:	
Mode:	11AX40_2452	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:12:55

Test Graph

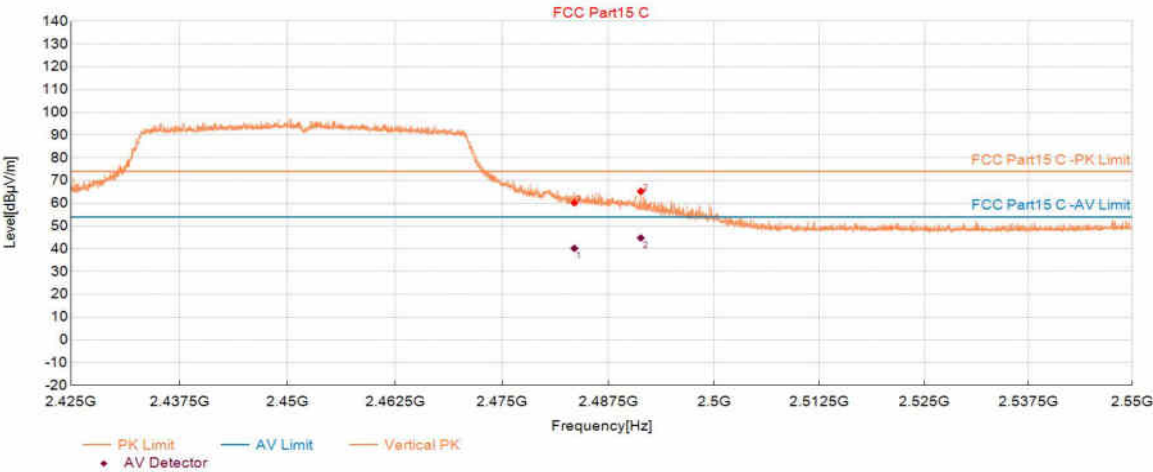


Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	51.49	60.17	8.68	74.00	13.83	150	339	Vertical
2	2491.338	56.54	65.25	8.71	74.00	8.75	150	271	Vertical


AV Final Data List									
NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	31.54	8.68	40.22	54.00	13.78	150	339	Vertical
2	2491.338	36.07	8.71	44.78	54.00	9.22	150	271	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level

APPENDIX C – AC Power Line Conducted Emission Test Data

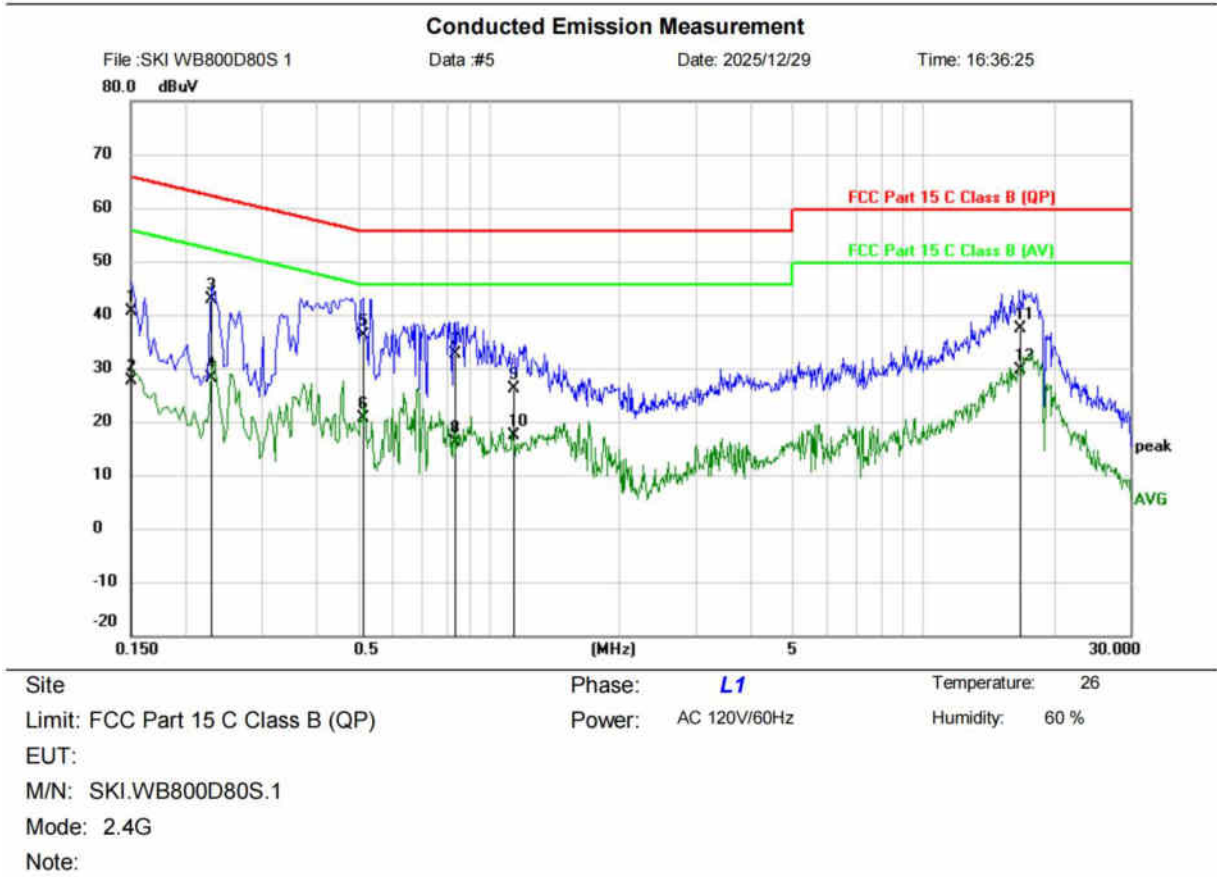

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1508	31.04	9.50	40.54	65.96	-25.42	QP	
2		0.1508	18.10	9.50	27.60	55.96	-28.36	AVG	
3	*	0.2304	33.33	9.52	42.85	62.44	-19.59	QP	
4		0.2304	18.69	9.52	28.21	52.44	-24.23	AVG	
5		0.5140	26.47	9.54	36.01	56.00	-19.99	QP	
6		0.5140	11.15	9.54	20.69	46.00	-25.31	AVG	
7		0.8388	23.03	9.54	32.57	56.00	-23.43	QP	
8		0.8388	6.68	9.54	16.22	46.00	-29.78	AVG	
9		1.1372	16.66	9.54	26.20	56.00	-29.80	QP	
10		1.1372	7.89	9.54	17.43	46.00	-28.57	AVG	
11		16.6778	27.57	9.74	37.31	60.00	-22.69	QP	
12		16.6778	19.89	9.74	29.63	50.00	-20.37	AVG	

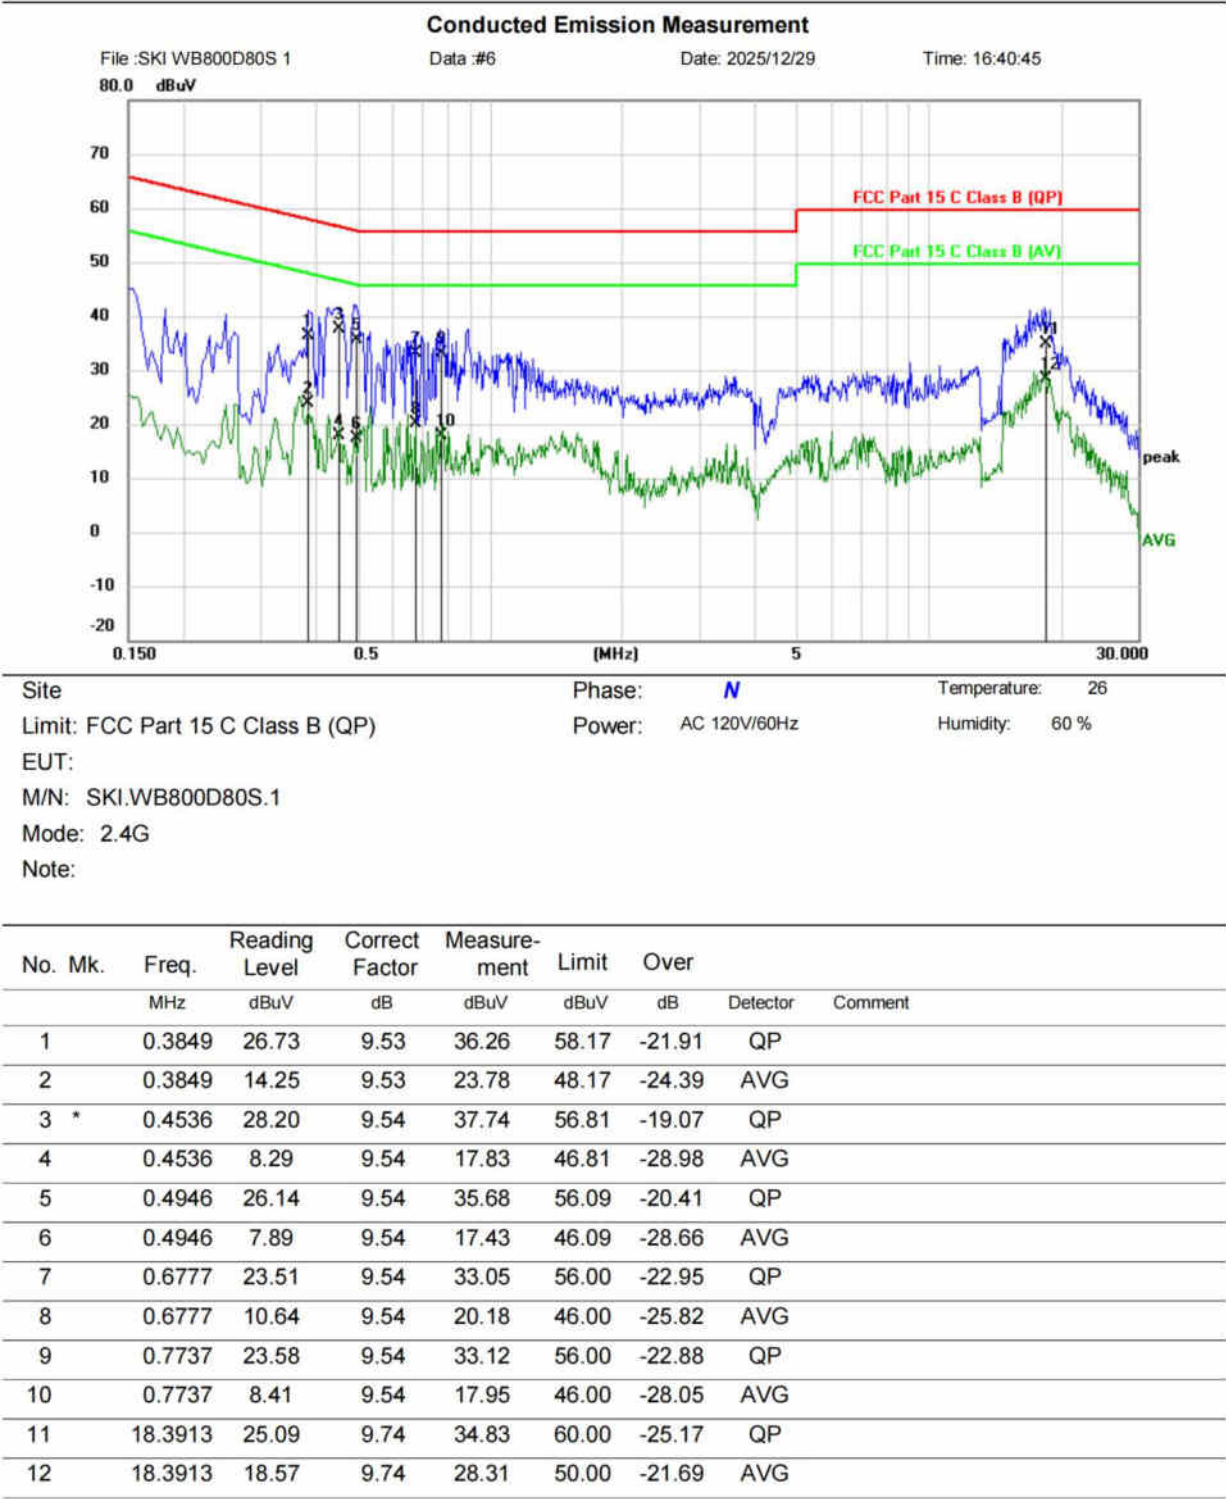

END OF REPORT