


Test Report

Project Information			
EUT:			
Customer:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 20:19:59

Test Graph

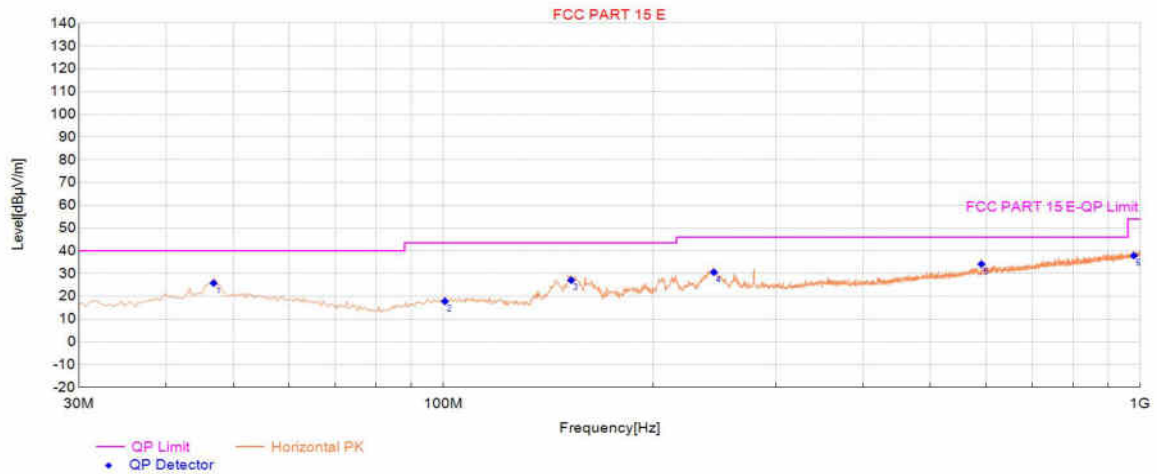

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.819	5.42	20.35	25.77	40.00	14.23	100	359	Horizontal	PASS
2	100.510	-1.31	19.11	17.80	43.50	25.70	100	208	Horizontal	PASS
3	152.584	10.69	16.40	27.09	43.50	16.41	100	3	Horizontal	PASS
4	244.441	9.13	21.48	30.61	46.00	15.39	100	308	Horizontal	PASS
5	591.494	5	29.17	34.17	46.00	11.83	100	175	Horizontal	PASS
6	978.976	1.79	36.12	37.91	54.00	16.09	100	40	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 20:20:45

Test Graph

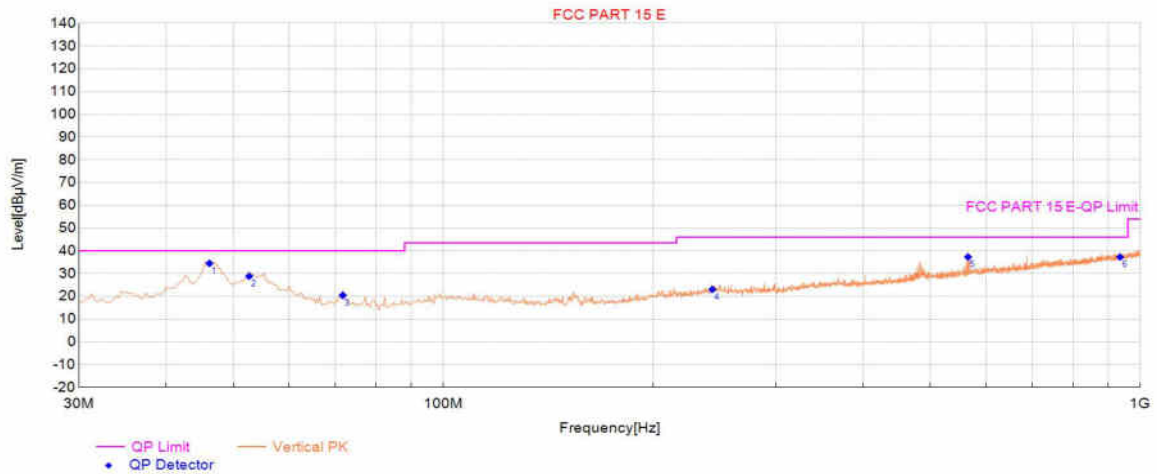

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.172	14.14	20.32	34.46	40.00	5.54	100	338	Vertical	PASS
2	52.641	8.69	20.14	28.83	40.00	11.17	100	357	Vertical	PASS
3	71.724	4.4	16.06	20.46	40.00	19.54	100	1	Vertical	PASS
4	243.148	1.59	21.42	23.01	46.00	22.99	100	86	Vertical	PASS
5	565.942	8.1	29.18	37.28	46.00	8.72	100	136	Vertical	PASS
6	935.312	1.83	35.42	37.25	46.00	8.75	100	145	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 20:25:52

Test Graph

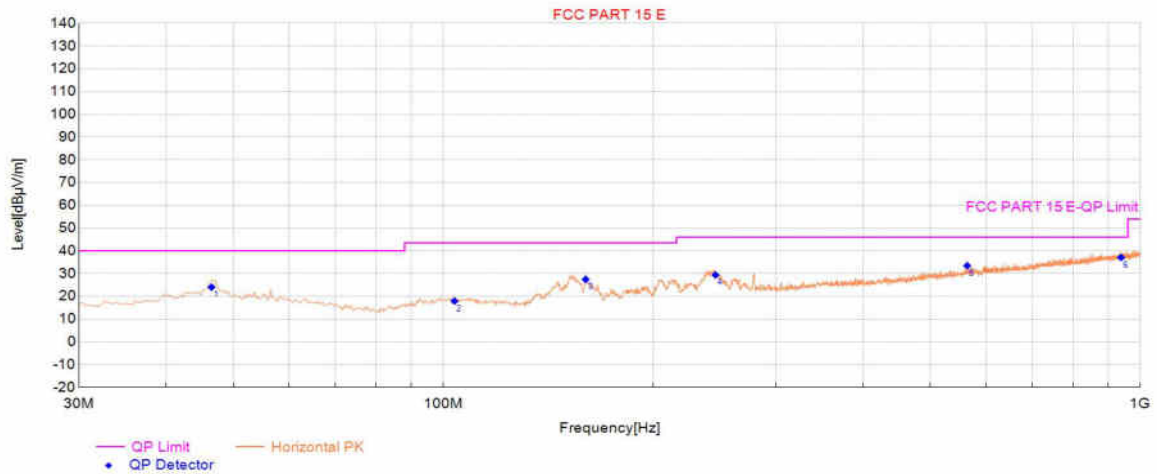

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.495	3.71	20.33	24.04	40.00	15.96	100	360	Horizontal	PASS
2	103.745	-1.04	18.95	17.91	43.50	25.59	100	128	Horizontal	PASS
3	160.023	10.7	16.76	27.46	43.50	16.04	100	354	Horizontal	PASS
4	245.735	7.85	21.54	29.39	46.00	16.61	100	321	Horizontal	PASS
5	564.325	4.29	29.13	33.42	46.00	12.58	100	71	Horizontal	PASS
6	938.546	1.63	35.46	37.09	46.00	8.91	100	88	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 20:28:24

Test Graph

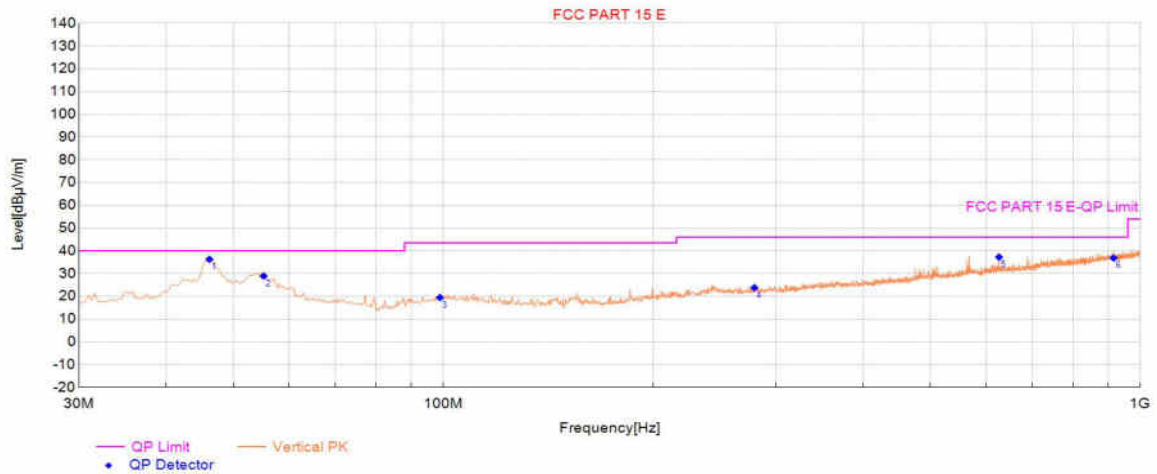

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.172	15.99	20.32	36.31	40.00	3.69	100	359	Vertical	PASS
2	55.228	9.1	19.83	28.93	40.00	11.07	100	360	Vertical	PASS
3	98.893	0.58	18.91	19.49	43.50	24.01	100	360	Vertical	PASS
4	279.373	1.59	22.18	23.77	46.00	22.23	100	213	Vertical	PASS
5	627.072	6.7	30.54	37.24	46.00	8.76	100	173	Vertical	PASS
6	915.582	1.63	35.21	36.84	46.00	9.16	100	122	Vertical	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 20:31:56

Test Graph

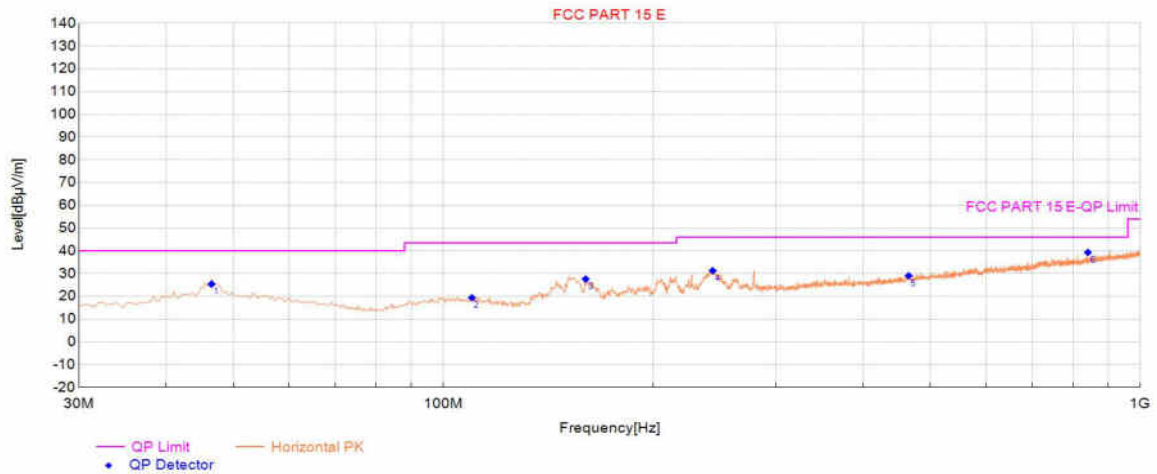

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.495	5.06	20.33	25.39	40.00	14.61	100	12	Horizontal	PASS
2	109.890	0.73	18.65	19.38	43.50	24.12	100	296	Horizontal	PASS
3	160.023	10.86	16.76	27.62	43.50	15.88	100	360	Horizontal	PASS
4	243.471	9.84	21.44	31.28	46.00	14.72	100	305	Horizontal	PASS
5	465.028	2.12	26.88	29.00	46.00	17.00	100	262	Horizontal	PASS
6	840.867	5.41	33.89	39.30	46.00	6.70	100	360	Horizontal	PASS


Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 20:32:42

Test Graph

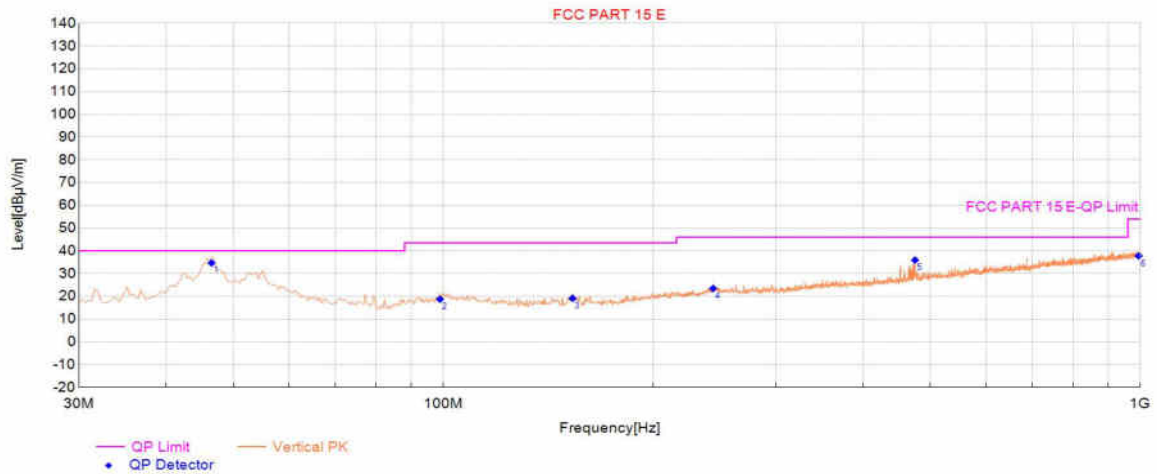

Final Data List

NO.	Freq. (MHz)	QP Reading (dBμV/m)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	46.495	14.36	20.33	34.69	40.00	5.31	100	296	Vertical	PASS
2	98.893	-0.17	18.91	18.74	43.50	24.76	100	353	Vertical	PASS
3	153.231	2.7	16.43	19.13	43.50	24.37	100	279	Vertical	PASS
4	243.795	2.02	21.45	23.47	46.00	22.53	100	179	Vertical	PASS
5	475.055	8.8	27.17	35.97	46.00	10.03	100	0	Vertical	PASS
6	994.502	1.28	36.49	37.77	54.00	16.23	100	146	Vertical	PASS

Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:44:02

Test Graph

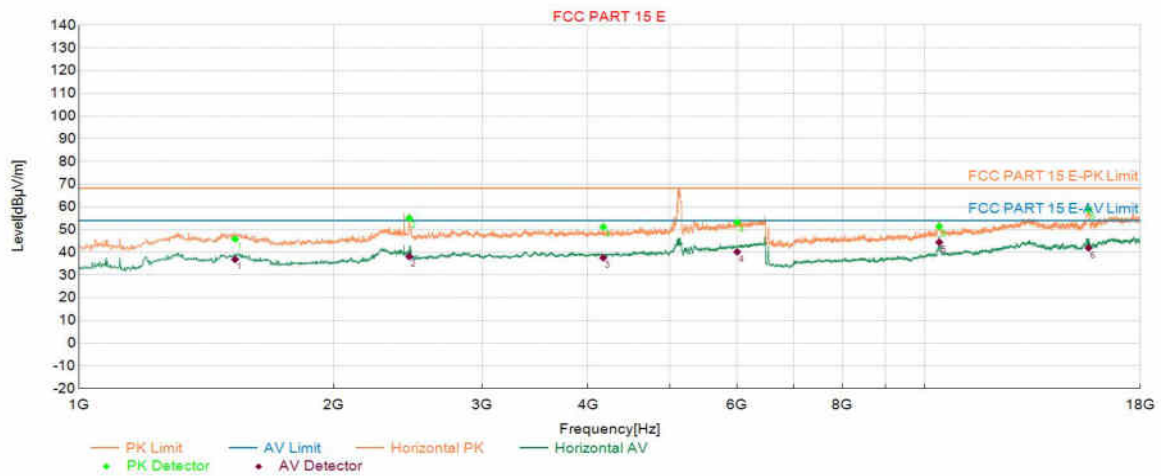

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1530.010	42.36	45.90	68.20	22.30	150	348	Horizontal
2	2457.986	45.51	55.05	68.20	13.15	150	358	Horizontal
3	4169.056	36.62	51.14	68.20	17.06	150	155	Horizontal
4	6004.835	33.71	53.19	68.20	15.01	150	258	Horizontal
5	10411.304	42.88	51.38	68.20	16.82	150	222	Horizontal
6	15634.045	43.37	58.93	68.20	9.27	150	289	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1530.010	33.30	36.84	54.00	17.16	150	348	Horizontal
2	2457.986	28.63	38.17	54.00	15.83	150	358	Horizontal
3	4169.056	23.05	37.57	54.00	16.43	150	155	Horizontal
4	6004.835	20.71	40.19	54.00	13.81	150	258	Horizontal
5	10411.304	35.92	44.42	54.00	9.58	150	222	Horizontal
6	15634.045	26.38	41.94	54.00	12.06	150	289	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:45:30

Test Graph

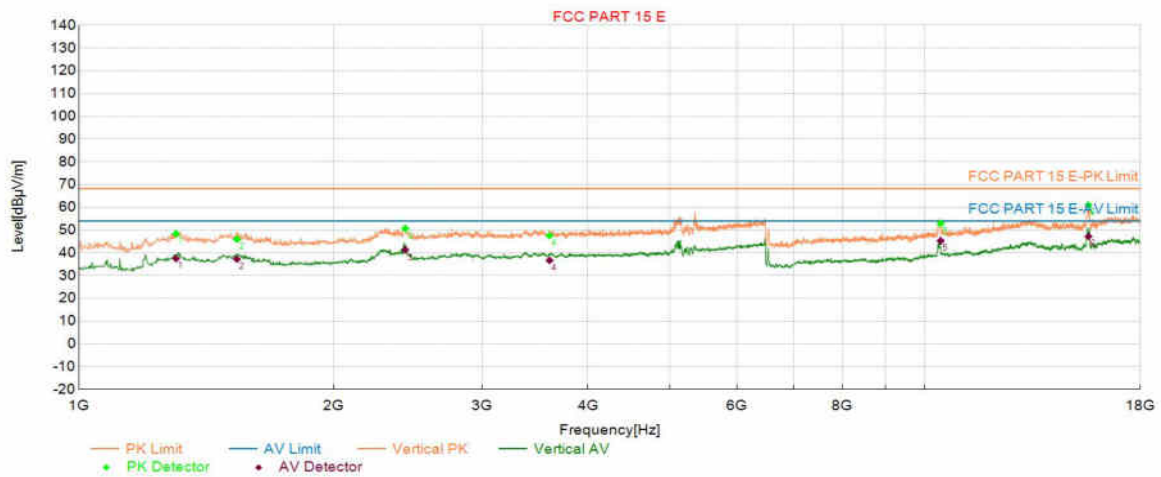

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1302.601	45.39	48.38	68.20	19.82	150	230	Vertical
2	1537.346	42.49	46.04	68.20	22.16	150	348	Vertical
3	2432.311	41.32	50.74	68.20	17.46	150	211	Vertical
4	3602.367	33.93	47.56	68.20	20.64	150	108	Vertical
5	10449.650	44.19	52.92	68.20	15.28	150	232	Vertical
6	15626.375	45.41	61.00	68.20	7.20	150	279	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1302.601	34.50	37.49	54.00	16.51	150	230	Vertical
2	1537.346	33.69	37.24	54.00	16.76	150	348	Vertical
3	2432.311	31.83	41.25	54.00	12.75	150	211	Vertical
4	3602.367	23.03	36.66	54.00	17.34	150	108	Vertical
5	10449.650	36.58	45.31	54.00	8.69	150	232	Vertical
6	15626.375	31.62	47.21	54.00	6.79	150	279	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:49:47

Test Graph

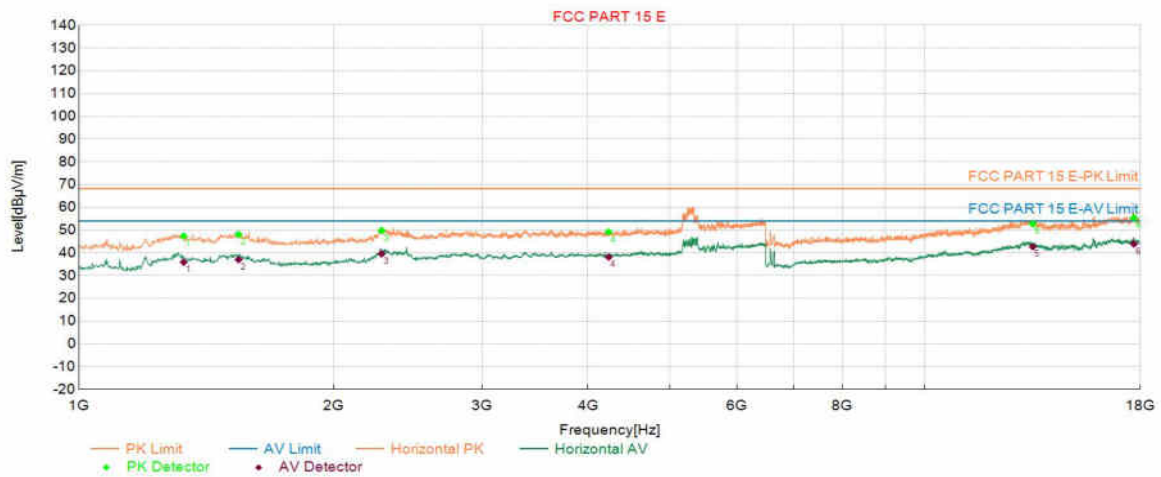

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1330.110	44.41	47.41	68.20	20.79	150	222	Horizontal
2	1544.682	44.5	48.10	68.20	20.10	150	305	Horizontal
3	2280.093	41.29	49.80	68.20	18.40	150	267	Horizontal
4	4231.410	34.53	49.15	68.20	19.05	150	360	Horizontal
5	13429.143	36.27	52.74	68.20	15.46	150	178	Horizontal
6	17689.396	33.78	55.47	68.20	12.73	150	197	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1330.110	32.89	35.89	54.00	18.11	150	222	Horizontal
2	1544.682	33.42	37.02	54.00	16.98	150	305	Horizontal
3	2280.093	31.04	39.55	54.00	14.45	150	267	Horizontal
4	4231.410	23.55	38.17	54.00	15.83	150	360	Horizontal
5	13429.143	26.20	42.67	54.00	11.33	150	178	Horizontal
6	17689.396	22.22	43.91	54.00	10.09	150	197	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:51:16

Test Graph

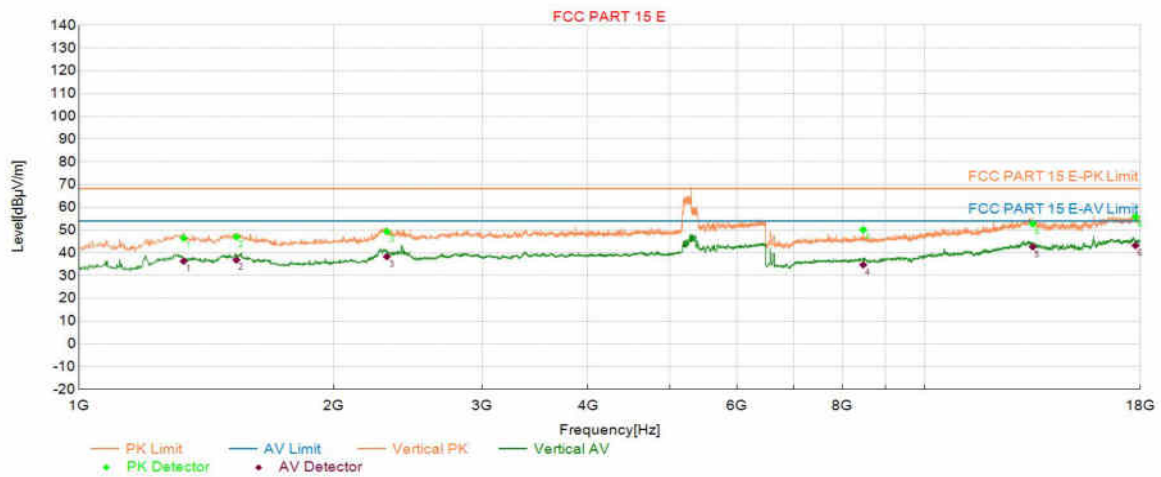

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1330.110	43.49	46.49	68.20	21.71	150	231	Vertical
2	1535.512	43.42	47.01	68.20	21.19	150	345	Vertical
3	2313.104	40.61	49.36	68.20	18.84	150	270	Vertical
4	8463.321	44.79	50.13	68.20	18.07	150	345	Vertical
5	13429.143	36.24	52.71	68.20	15.49	150	62	Vertical
6	17762.254	34.7	55.87	68.20	12.33	150	358	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1330.110	33.37	36.37	54.00	17.63	150	231	Vertical
2	1535.512	33.27	36.86	54.00	17.14	150	345	Vertical
3	2313.104	29.58	38.33	54.00	15.67	150	270	Vertical
4	8463.321	29.39	34.73	54.00	19.27	150	345	Vertical
5	13429.143	26.17	42.64	54.00	11.36	150	62	Vertical
6	17762.254	22.08	43.25	54.00	10.75	150	358	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:55:19

Test Graph

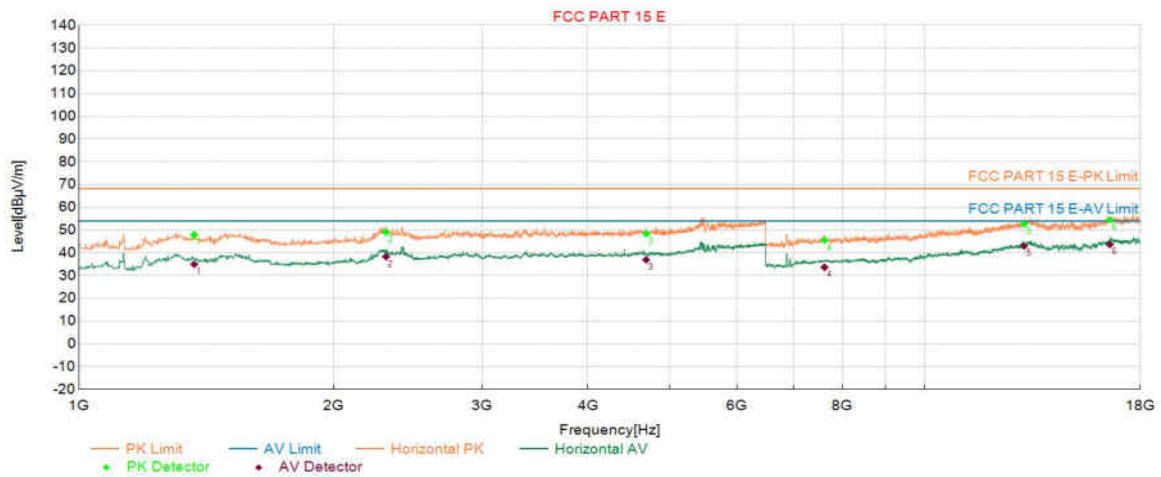

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1368.623	44.87	47.88	68.20	20.32	150	205	Horizontal
2	2307.603	40.42	49.13	68.20	19.07	150	273	Horizontal
3	4686.229	32.81	48.46	68.20	19.74	150	246	Horizontal
4	7615.872	41.58	45.57	68.20	22.63	150	56	Horizontal
5	13114.705	36.93	52.63	68.20	15.57	150	114	Horizontal
6	16565.855	35.9	54.54	68.20	13.66	150	2	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1368.623	31.95	34.96	54.00	19.04	150	205	Horizontal
2	2307.603	29.61	38.32	54.00	15.68	150	273	Horizontal
3	4686.229	21.29	36.94	54.00	17.06	150	246	Horizontal
4	7615.872	29.68	33.67	54.00	20.33	150	56	Horizontal
5	13114.705	27.29	42.99	54.00	11.01	150	114	Horizontal
6	16565.855	25.01	43.65	54.00	10.35	150	2	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:56:48

Test Graph

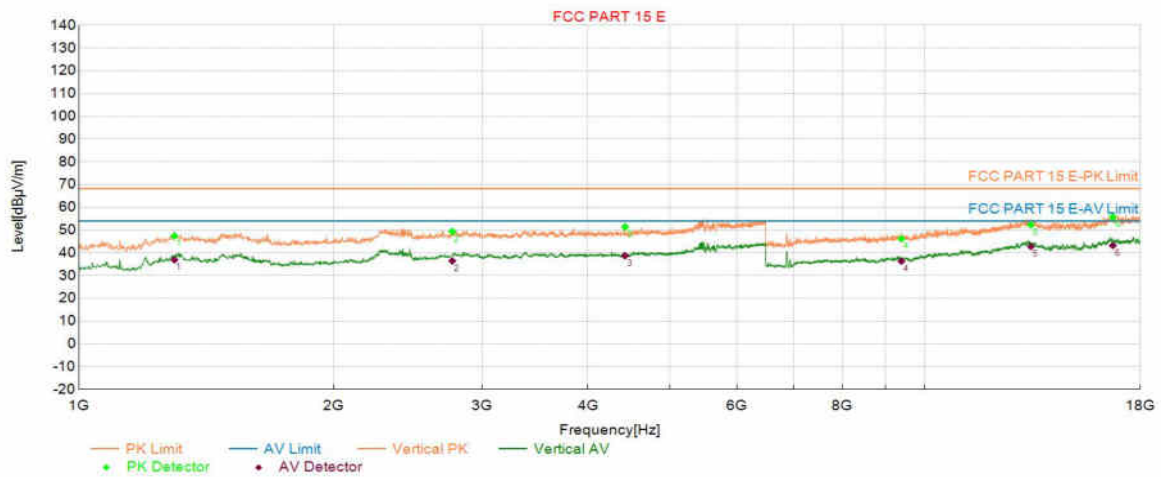

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1297.099	44.38	47.38	68.20	20.82	150	225	Vertical
2	2764.255	38.68	49.37	68.20	18.83	150	360	Vertical
3	4423.975	36.66	51.40	68.20	16.80	150	216	Vertical
4	9391.297	39.64	46.25	68.20	21.95	150	281	Vertical
5	13363.955	35.96	52.31	68.20	15.89	150	38	Vertical
6	16700.067	36.01	55.78	68.20	12.42	150	242	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1297.099	33.89	36.89	54.00	17.11	150	225	Vertical
2	2764.255	25.77	36.46	54.00	17.54	150	360	Vertical
3	4423.975	23.95	38.69	54.00	15.31	150	216	Vertical
4	9391.297	29.72	36.33	54.00	17.67	150	281	Vertical
5	13363.955	26.42	42.77	54.00	11.23	150	38	Vertical
6	16700.067	23.48	43.25	54.00	10.75	150	242	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5610	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 21:59:05

Test Graph

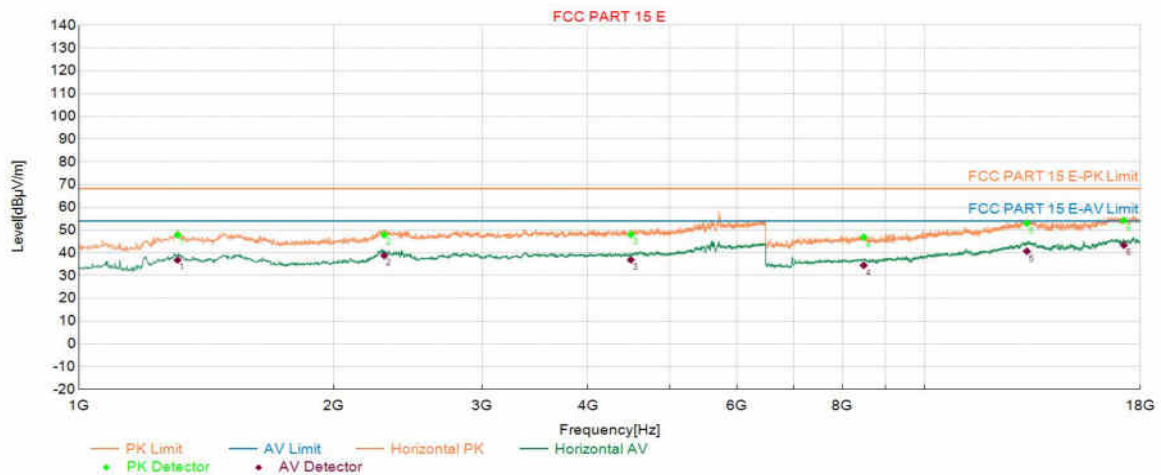

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1308.103	44.81	47.82	68.20	20.38	150	225	Horizontal
2	2296.599	39.24	47.88	68.20	20.32	150	340	Horizontal
3	4495.499	33.01	48.08	68.20	20.12	150	168	Horizontal
4	8474.825	41.47	46.88	68.20	21.32	150	2	Horizontal
5	13214.405	36.73	52.97	68.20	15.23	150	278	Horizontal
6	17210.070	35.27	54.23	68.20	13.97	150	83	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1308.103	33.82	36.83	54.00	17.17	150	225	Horizontal
2	2296.599	30.17	38.81	54.00	15.19	150	340	Horizontal
3	4495.499	21.85	36.92	54.00	17.08	150	168	Horizontal
4	8474.825	29.09	34.50	54.00	19.50	150	2	Horizontal
5	13214.405	24.47	40.71	54.00	13.29	150	278	Horizontal
6	17210.070	24.39	43.35	54.00	10.65	150	83	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5610	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 22:00:34

Test Graph

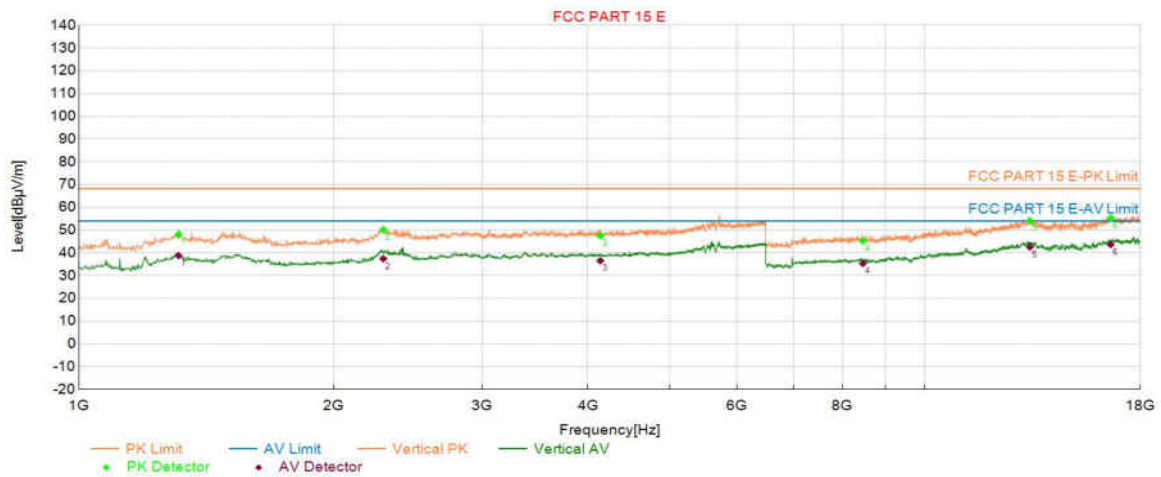

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1311.771	44.98	47.99	68.20	20.21	150	222	Vertical
2	2291.097	41.56	50.16	68.20	18.04	150	286	Vertical
3	4136.045	33.02	47.52	68.20	20.68	150	63	Vertical
4	8455.652	39.93	45.22	68.20	22.98	150	167	Vertical
5	13321.774	37.64	54.07	68.20	14.13	150	357	Vertical
6	16604.201	36.42	55.27	68.20	12.93	150	12	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1311.771	35.76	38.77	54.00	15.23	150	222	Vertical
2	2291.097	28.84	37.44	54.00	16.56	150	286	Vertical
3	4136.045	22.04	36.54	54.00	17.46	150	63	Vertical
4	8455.652	30.07	35.36	54.00	18.64	150	167	Vertical
5	13321.774	26.15	42.58	54.00	11.42	150	357	Vertical
6	16604.201	24.78	43.63	54.00	10.37	150	12	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5775	Voltage:	
Environment:	23.5℃/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 22:03:57

Test Graph

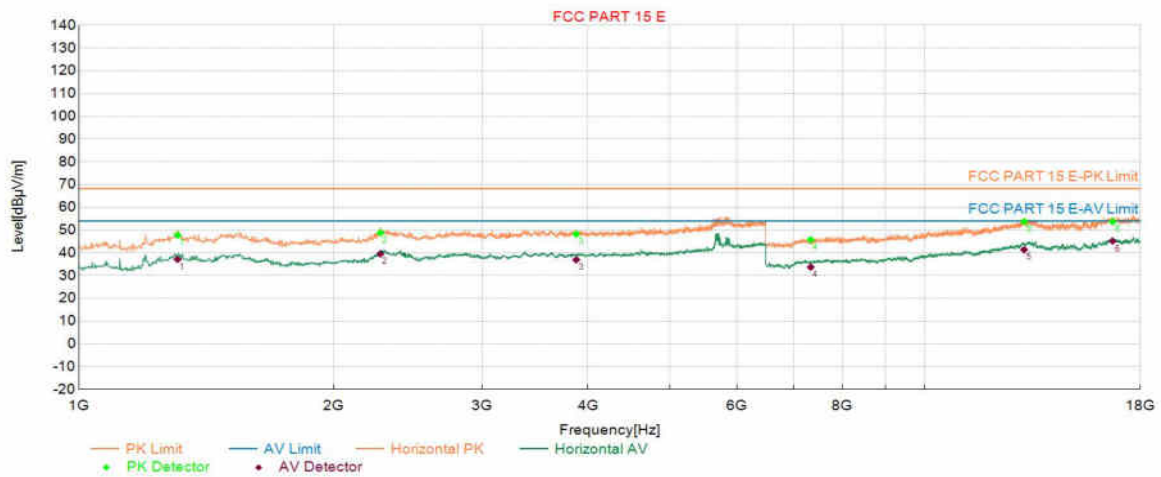

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1308.103	44.69	47.73	68.20	20.47	150	217	Horizontal
2	2272.758	40.31	48.77	68.20	19.43	150	274	Horizontal
3	3873.791	34.04	48.24	68.20	19.96	150	160	Horizontal
4	7335.945	42.55	45.76	68.20	22.44	150	324	Horizontal
5	13114.705	38.07	53.77	68.20	14.43	150	217	Horizontal
6	16692.397	34.05	53.75	68.20	14.45	150	15	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1308.103	34.08	37.12	54.00	16.88	150	217	Horizontal
2	2272.758	31.06	39.52	54.00	14.48	150	274	Horizontal
3	3873.791	22.76	36.96	54.00	17.04	150	160	Horizontal
4	7335.945	30.52	33.73	54.00	20.27	150	324	Horizontal
5	13114.705	25.68	41.38	54.00	12.62	150	217	Horizontal
6	16692.397	25.50	45.20	54.00	8.80	150	15	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5775	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 22:05:27

Test Graph

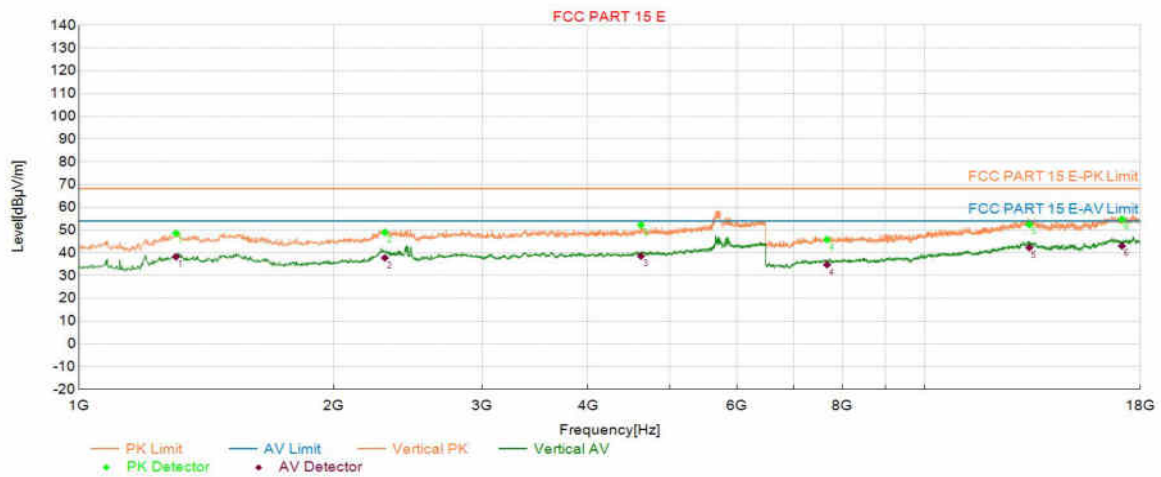

PK Final Data List

NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1302.601	45.59	48.63	68.20	19.57	150	231	Vertical
2	2300.267	40.35	49.01	68.20	19.19	150	285	Vertical
3	4620.207	36.4	52.22	68.20	15.98	150	174	Vertical
4	7669.557	41.7	45.81	68.20	22.39	150	358	Vertical
5	13302.601	35.97	52.43	68.20	15.77	150	251	Vertical
6	17121.874	35.79	54.76	68.20	13.44	150	22	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1302.601	35.23	38.27	54.00	15.73	150	231	Vertical
2	2300.267	29.13	37.79	54.00	16.21	150	285	Vertical
3	4620.207	22.76	38.58	54.00	15.42	150	174	Vertical
4	7669.557	30.67	34.78	54.00	19.22	150	358	Vertical
5	13302.601	25.84	42.30	54.00	11.70	150	251	Vertical
6	17121.874	24.04	43.01	54.00	10.99	150	22	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:39:54

Test Graph

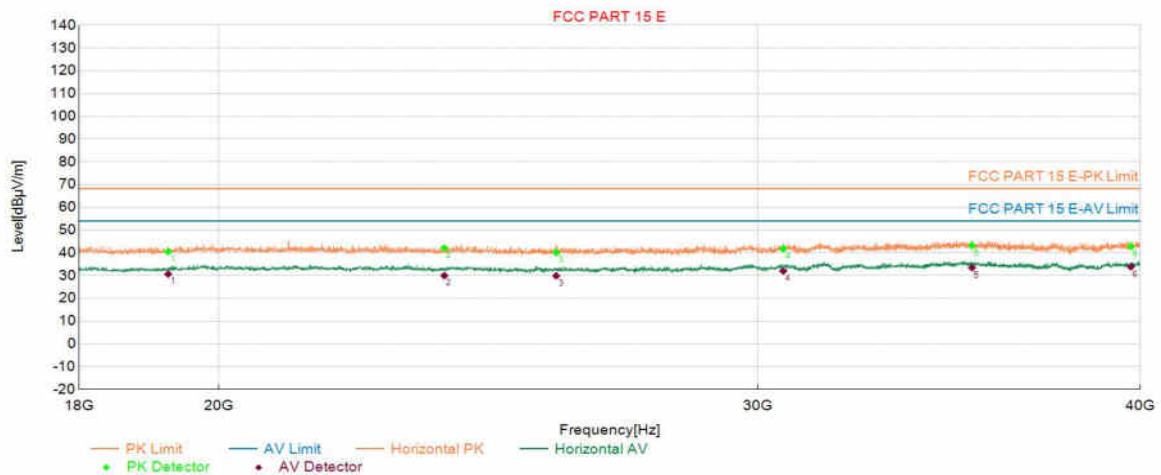

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19249.850	37.67	2.87	40.54	68.20	27.66	150	70	Horizontal
2	23694.739	35.01	7.12	42.13	68.20	26.07	150	180	Horizontal
3	25776.355	34.64	5.51	40.15	68.20	28.05	150	120	Horizontal
4	30577.716	32.28	9.48	41.76	68.20	26.44	150	210	Horizontal
5	35242.649	32.33	10.93	43.26	68.20	24.94	150	70	Horizontal
6	39718.344	33.67	9.09	42.76	68.20	25.44	150	140	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19249.850	27.79	2.87	30.66	54.00	23.34	150	70	Horizontal
2	23694.739	22.88	7.12	30.00	54.00	24.00	150	180	Horizontal
3	25776.355	24.38	5.51	29.89	54.00	24.11	150	120	Horizontal
4	30577.716	22.54	9.48	32.02	54.00	21.98	150	210	Horizontal
5	35242.649	22.52	10.93	33.45	54.00	20.55	150	70	Horizontal
6	39718.344	24.74	9.09	33.83	54.00	20.17	150	140	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:40:12

Test Graph

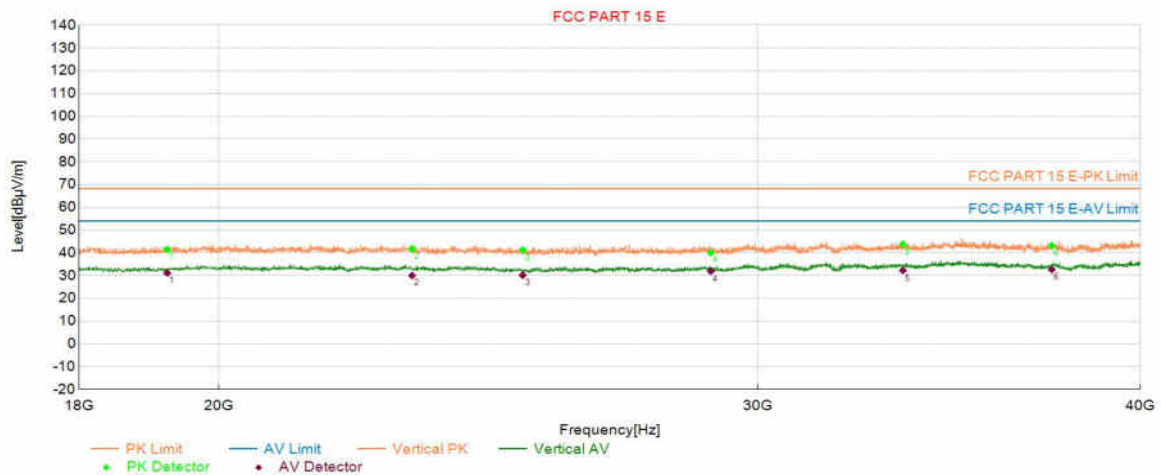

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19236.647	38.61	2.86	41.47	68.20	26.73	150	0	Vertical
2	23127.025	34.93	6.86	41.79	68.20	26.41	150	310	Vertical
3	25133.827	34.93	6.34	41.27	68.20	26.93	150	70	Vertical
4	28953.791	33.39	6.69	40.08	68.20	28.12	150	160	Vertical
5	33455.891	34.64	9.19	43.83	68.20	24.37	150	0	Vertical
6	37421.084	33.64	9.44	43.08	68.20	25.12	150	10	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19236.647	28.25	2.86	31.11	54.00	22.89	150	0	Vertical
2	23127.025	23.16	6.86	30.02	54.00	23.98	150	310	Vertical
3	25133.827	23.80	6.34	30.14	54.00	23.86	150	70	Vertical
4	28953.791	25.24	6.69	31.93	54.00	22.07	150	160	Vertical
5	33455.891	23.08	9.19	32.27	54.00	21.73	150	0	Vertical
6	37421.084	23.24	9.44	32.68	54.00	21.32	150	10	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:40:45

Test Graph

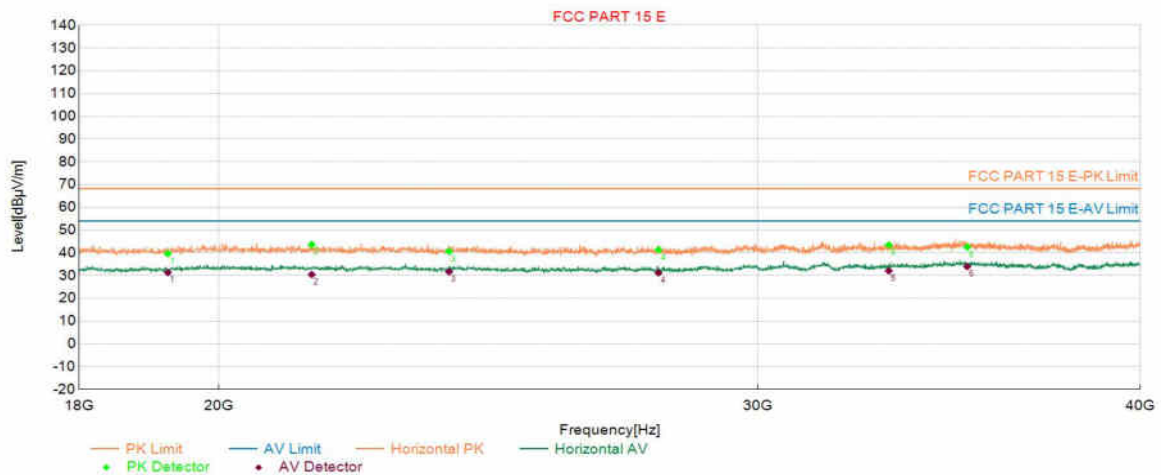

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19245.449	36.82	2.87	39.69	68.20	28.51	150	210	Horizontal
2	21445.889	38.56	5.11	43.67	68.20	24.53	150	20	Horizontal
3	23778.356	33.4	7.27	40.67	68.20	27.53	150	70	Horizontal
4	27835.967	37.6	3.76	41.36	68.20	26.84	150	50	Horizontal
5	33103.821	34.29	9.12	43.41	68.20	24.79	150	50	Horizontal
6	35115.023	31.56	10.97	42.53	68.20	25.67	150	30	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19245.449	28.45	2.87	31.32	54.00	22.68	150	210	Horizontal
2	21445.889	25.37	5.11	30.48	54.00	23.52	150	20	Horizontal
3	23778.356	24.44	7.27	31.71	54.00	22.29	150	70	Horizontal
4	27835.967	27.44	3.76	31.20	54.00	22.80	150	50	Horizontal
5	33103.821	22.99	9.12	32.11	54.00	21.89	150	50	Horizontal
6	35115.023	23.00	10.97	33.97	54.00	20.03	150	30	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:41:03

Test Graph

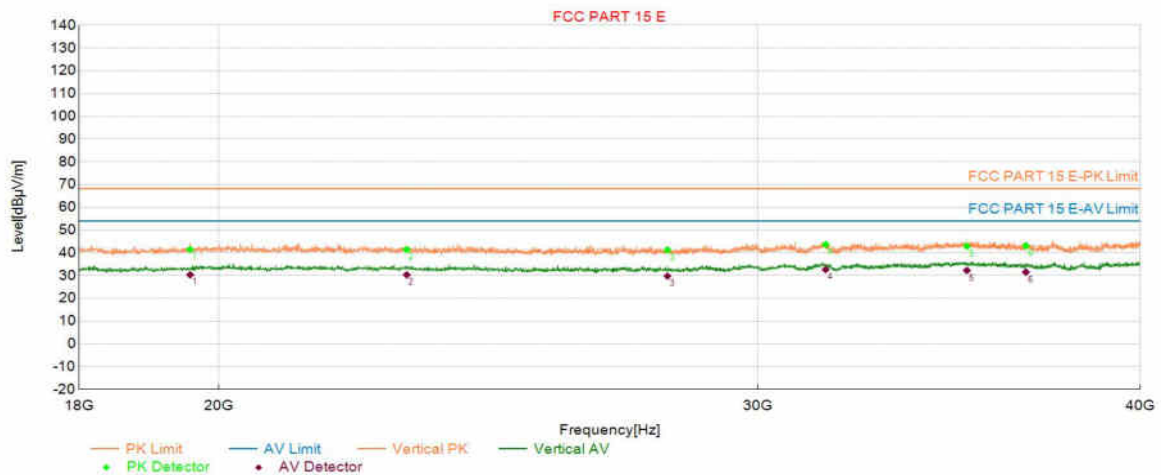

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19571.114	38.09	3.35	41.44	68.20	26.76	150	340	Vertical
2	23034.607	34.55	6.89	41.44	68.20	26.76	150	130	Vertical
3	28025.205	37.28	3.99	41.27	68.20	26.93	150	230	Vertical
4	31567.914	33.71	9.98	43.69	68.20	24.51	150	20	Vertical
5	35106.221	31.97	10.97	42.94	68.20	25.26	150	80	Vertical
6	36699.340	32.89	10.23	43.12	68.20	25.08	150	60	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19571.114	27.01	3.35	30.36	54.00	23.64	150	340	Vertical
2	23034.607	23.45	6.89	30.34	54.00	23.66	150	130	Vertical
3	28025.205	25.78	3.99	29.77	54.00	24.23	150	230	Vertical
4	31567.914	22.68	9.98	32.66	54.00	21.34	150	20	Vertical
5	35106.221	21.30	10.97	32.27	54.00	21.73	150	80	Vertical
6	36699.340	21.31	10.23	31.54	54.00	22.46	150	60	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:41:33

Test Graph

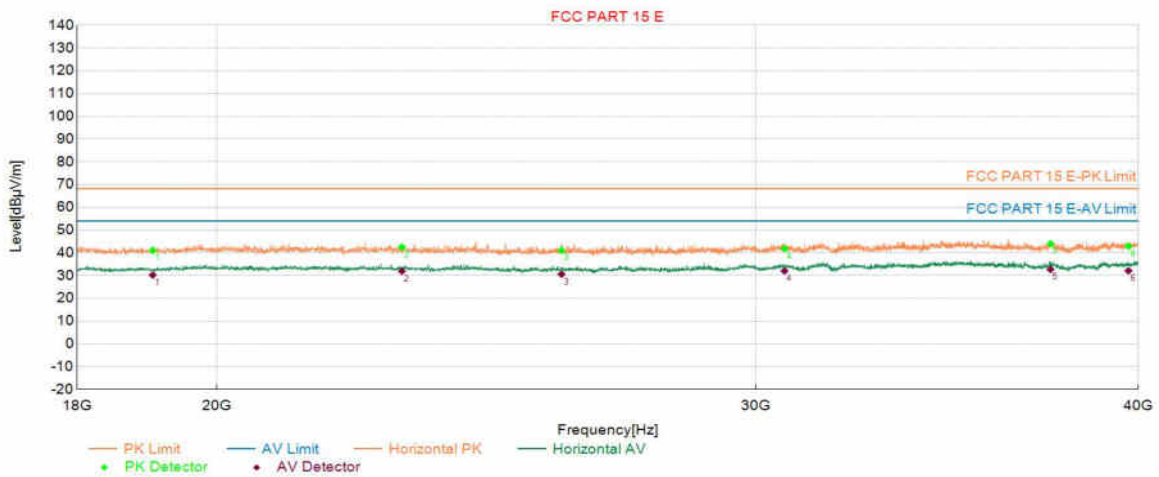

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19056.211	38.53	2.59	41.12	68.20	27.08	150	250	Horizontal
2	22986.197	35.65	6.88	42.53	68.20	25.67	150	300	Horizontal
3	25917.183	35.74	5.31	41.05	68.20	27.15	150	190	Horizontal
4	30652.531	32.28	9.55	41.83	68.20	26.37	150	260	Horizontal
5	37443.089	34.59	9.41	44.00	68.20	24.20	150	260	Horizontal
6	39705.141	33.84	9.08	42.92	68.20	25.28	150	160	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19056.211	27.66	2.59	30.25	54.00	23.75	150	250	Horizontal
2	22986.197	25.05	6.88	31.93	54.00	22.07	150	300	Horizontal
3	25917.183	25.31	5.31	30.62	54.00	23.38	150	190	Horizontal
4	30652.531	22.50	9.55	32.05	54.00	21.95	150	260	Horizontal
5	37443.089	23.31	9.41	32.72	54.00	21.28	150	260	Horizontal
6	39705.141	23.04	9.08	32.12	54.00	21.88	150	160	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:41:51

Test Graph

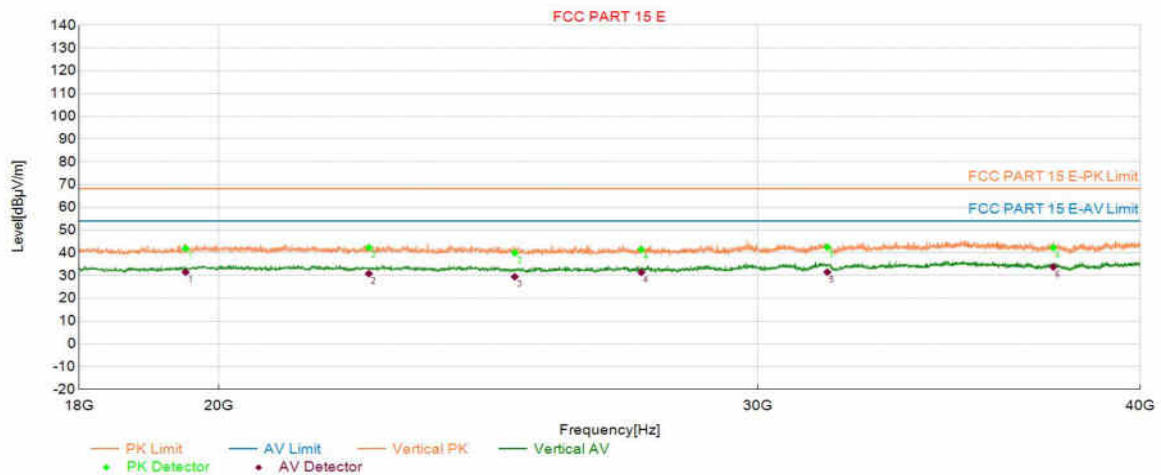

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19505.101	38.71	3.25	41.96	68.20	26.24	150	190	Vertical
2	22387.678	36.23	6.05	42.28	68.20	25.92	150	330	Vertical
3	24984.197	33.49	6.52	40.01	68.20	28.19	150	170	Vertical
4	27479.496	37.99	3.45	41.44	68.20	26.76	150	120	Vertical
5	31607.522	32.46	9.96	42.42	68.20	25.78	150	150	Vertical
6	37465.093	32.88	9.39	42.27	68.20	25.93	150	130	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19505.101	28.25	3.25	31.50	54.00	22.50	150	190	Vertical
2	22387.678	24.80	6.05	30.85	54.00	23.15	150	330	Vertical
3	24984.197	23.00	6.52	29.52	54.00	24.48	150	170	Vertical
4	27479.496	27.96	3.45	31.41	54.00	22.59	150	120	Vertical
5	31607.522	21.56	9.96	31.52	54.00	22.48	150	150	Vertical
6	37465.093	24.36	9.39	33.75	54.00	20.25	150	130	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5775	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:42:15

Test Graph

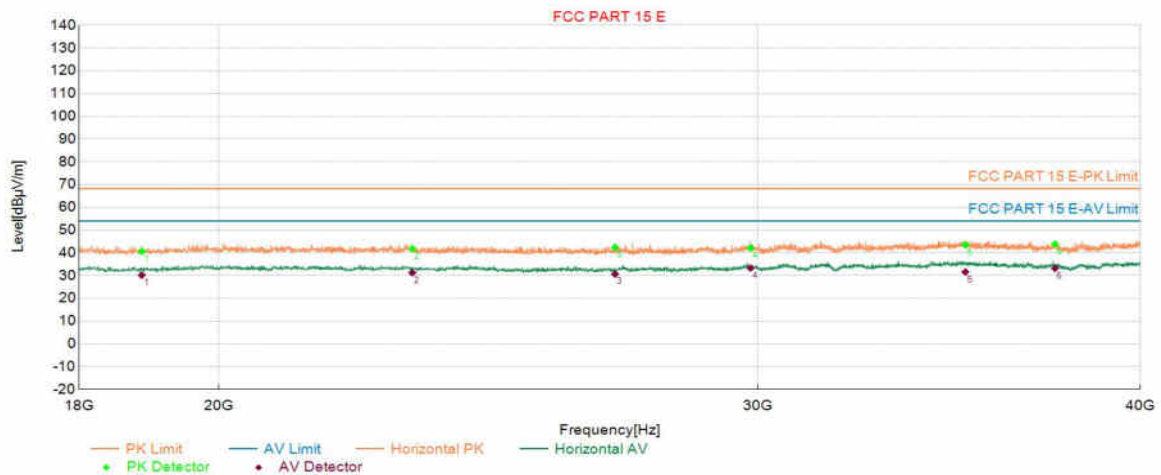

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18871.374	38.2	2.46	40.66	68.20	27.54	150	330	Horizontal
2	23131.426	35.01	6.86	41.87	68.20	26.33	150	110	Horizontal
3	26942.589	38.96	3.45	42.41	68.20	25.79	150	160	Horizontal
4	29833.967	33.35	8.82	42.17	68.20	26.03	150	20	Horizontal
5	35066.613	32.53	10.98	43.51	68.20	24.69	150	90	Horizontal
6	37513.503	34.5	9.34	43.84	68.20	24.36	150	60	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18871.374	27.73	2.46	30.19	54.00	23.81	150	330	Horizontal
2	23131.426	24.38	6.86	31.24	54.00	22.76	150	110	Horizontal
3	26942.589	27.21	3.45	30.66	54.00	23.34	150	160	Horizontal
4	29833.967	24.47	8.82	33.29	54.00	20.71	150	20	Horizontal
5	35066.613	20.63	10.98	31.61	54.00	22.39	150	90	Horizontal
6	37513.503	23.82	9.34	33.16	54.00	20.84	150	60	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5775	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-08 19:42:33

Test Graph

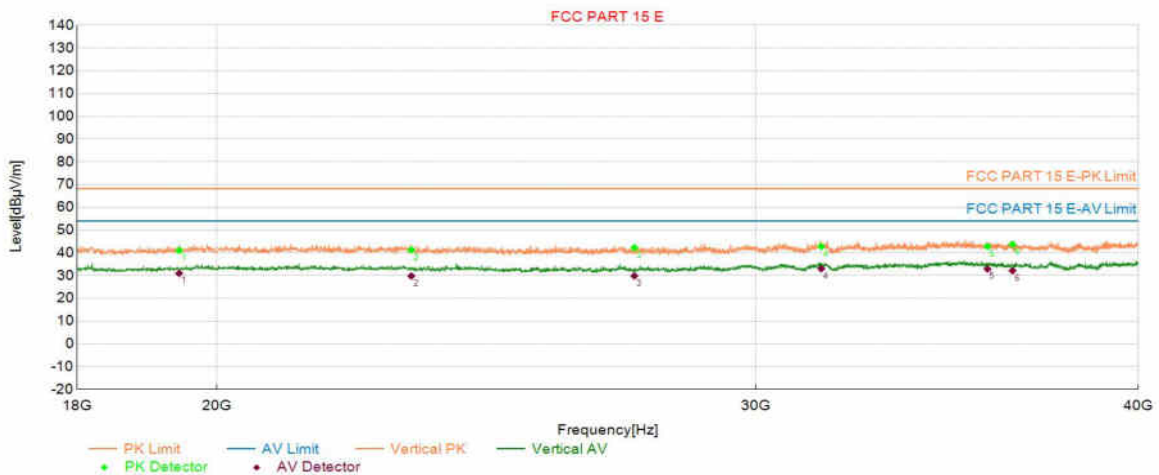

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dB μ V/m)	Factor (dB)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19439.088	37.94	3.16	41.10	68.20	27.10	150	310	Vertical
2	23149.030	34.38	6.85	41.23	68.20	26.97	150	280	Vertical
3	27378.276	38.86	3.43	42.29	68.20	25.91	150	340	Vertical
4	31510.702	32.82	10.00	42.82	68.20	25.38	150	10	Vertical
5	35709.142	31.96	10.87	42.83	68.20	25.37	150	100	Vertical
6	36386.877	33.16	10.56	43.72	68.20	24.48	150	80	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dB μ V/m)	Factor (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19439.088	27.84	3.16	31.00	54.00	23.00	150	310	Vertical
2	23149.030	22.98	6.85	29.83	54.00	24.17	150	280	Vertical
3	27378.276	26.42	3.43	29.85	54.00	24.15	150	340	Vertical
4	31510.702	23.04	10.00	33.04	54.00	20.96	150	10	Vertical
5	35709.142	22.07	10.87	32.94	54.00	21.06	150	100	Vertical
6	36386.877	21.60	10.56	32.16	54.00	21.84	150	80	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5180	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:26:43

Test Graph

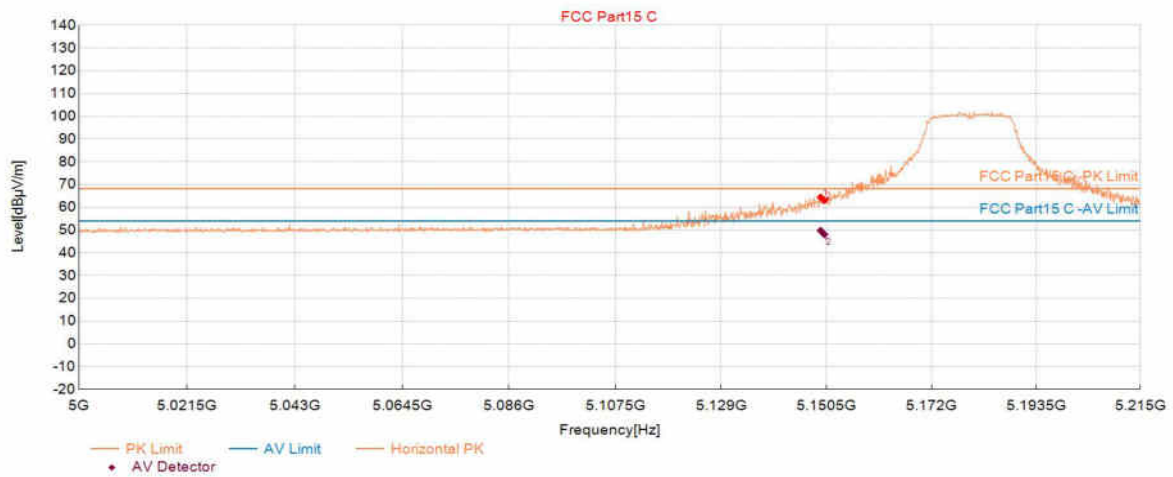

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.285	49.21	64.40	15.19	68.20	3.80	150	265	Horizontal
2	5150.038	47.86	63.07	15.21	68.20	5.13	150	329	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.285	34.63	15.19	49.82	54.00	4.18	150	265	Horizontal
2	5150.038	32.88	15.21	48.09	54.00	5.91	150	329	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5180	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:27:29

Test Graph

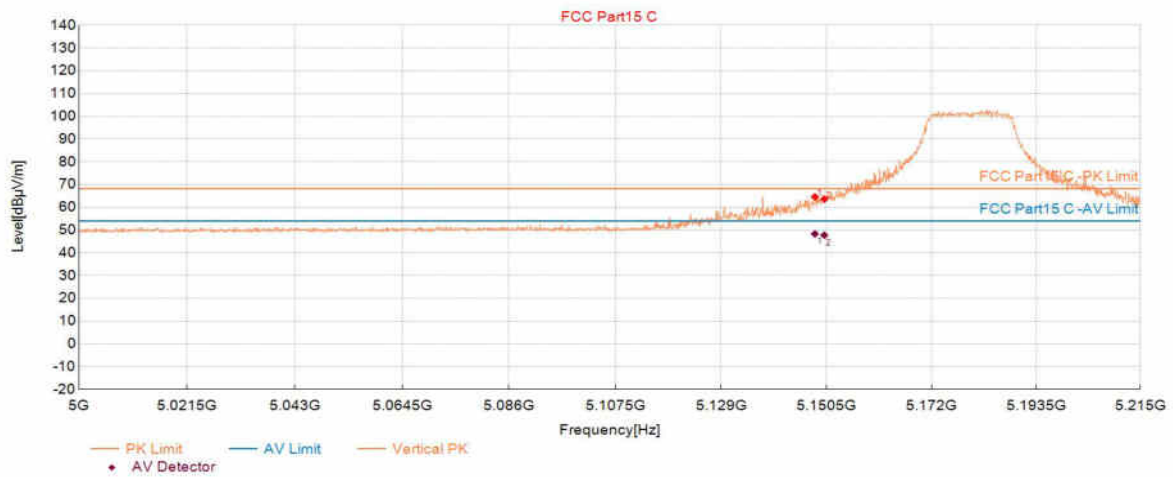

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.102	49.42	64.61	15.19	68.20	3.59	150	280	Vertical
2	5150.038	48.41	63.62	15.21	68.20	4.58	150	337	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.102	33.15	15.19	48.34	54.00	5.66	150	280	Vertical
2	5150.038	32.54	15.21	47.75	54.00	6.25	150	337	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5320	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:46:48

Test Graph

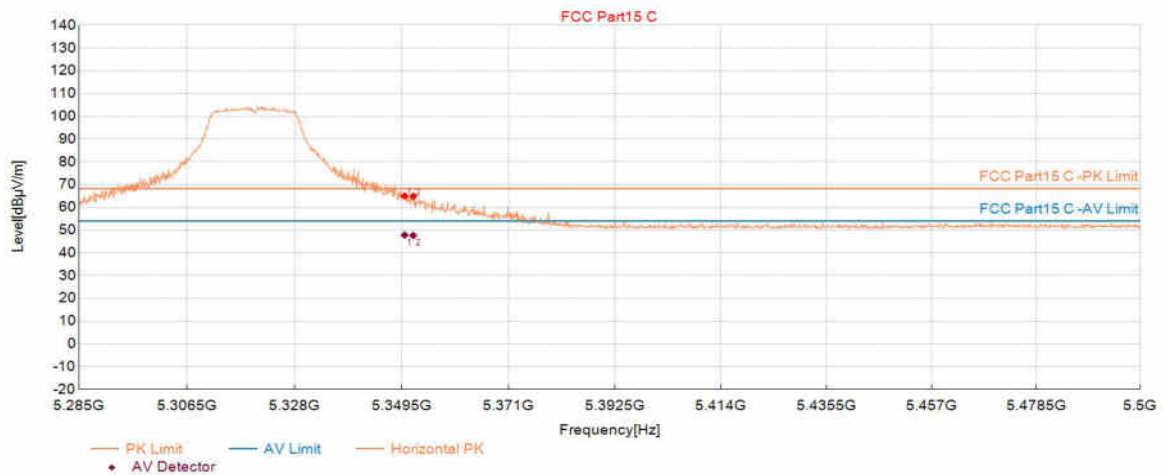

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	48.74	65.03	16.29	68.20	3.74	150	336	Horizontal
2	5351.791	48.56	64.86	16.30	68.20	3.34	150	10	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	31.52	16.29	47.81	54.00	6.19	150	336	Horizontal
2	5351.791	31.32	16.30	47.62	54.00	6.38	150	10	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5320	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:47:35

Test Graph

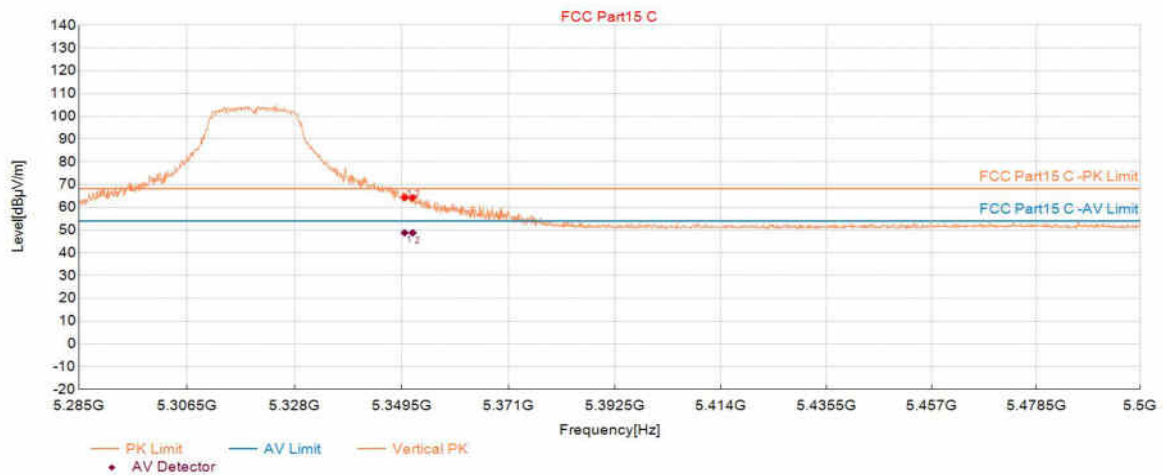

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	47.96	64.25	16.29	68.20	4.21	150	2	Vertical
2	5351.683	47.97	64.27	16.30	68.20	3.93	150	346	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	32.55	16.29	48.84	54.00	5.16	150	2	Vertical
2	5351.683	32.51	16.30	48.81	54.00	5.19	150	346	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:54:53

Test Graph

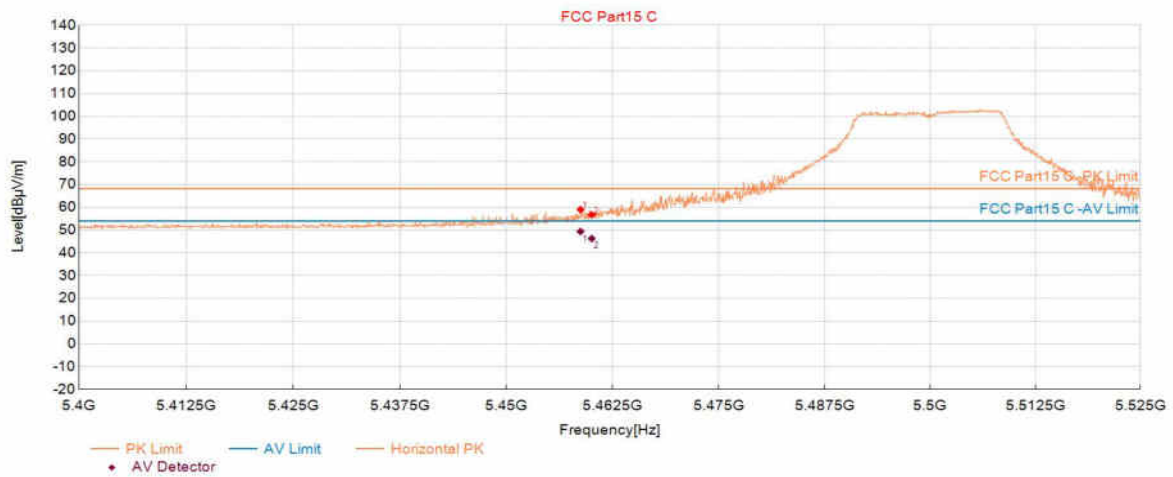

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.717	42.30	59.03	16.73	68.20	9.17	150	328	Horizontal
2	5460.030	39.98	56.72	16.74	68.20	11.48	150	14	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.717	32.66	16.73	49.39	54.00	4.61	150	328	Horizontal
2	5460.030	29.54	16.74	46.28	54.00	7.72	150	14	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 11:55:49

Test Graph

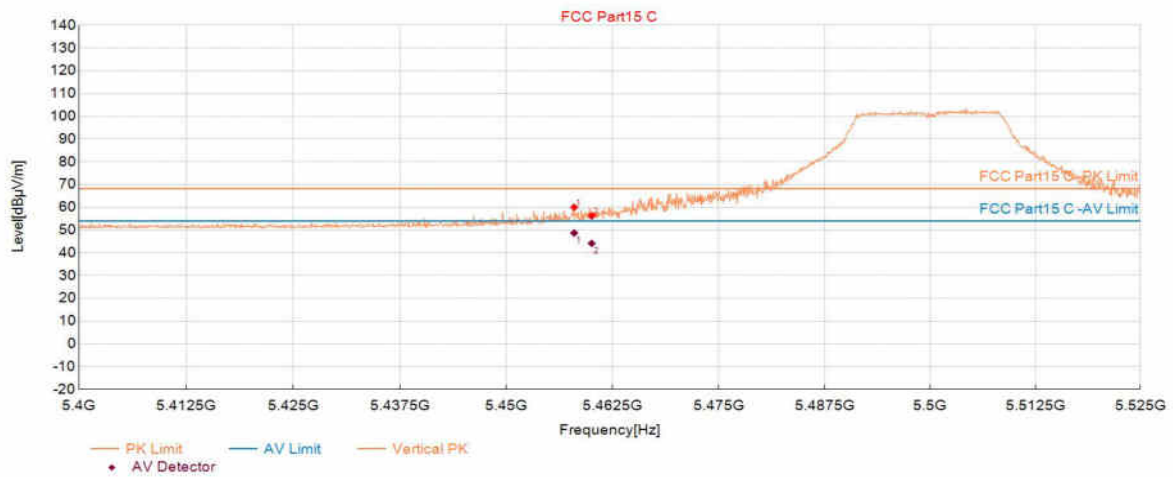

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.966	43.29	60.02	16.73	68.20	8.18	150	12	Vertical
2	5460.030	39.44	56.18	16.74	68.20	12.02	150	184	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.966	31.99	16.73	48.72	54.00	5.28	150	12	Vertical
2	5460.030	27.42	16.74	44.16	54.00	9.84	150	184	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5700	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 21:43:33

Test Graph

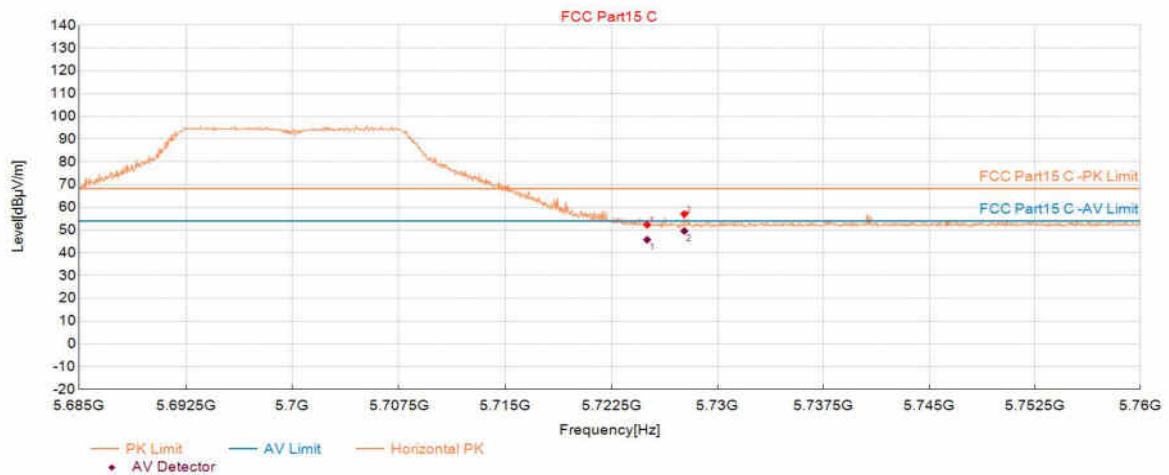

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	35.10	52.30	17.20	68.20	15.90	150	332	Horizontal
2	5727.659	39.85	57.05	17.20	68.20	11.15	150	332	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	28.54	17.20	45.74	54.00	8.26	150	332	Horizontal
2	5727.659	32.41	17.20	49.61	54.00	4.39	150	332	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5700	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 21:44:31

Test Graph

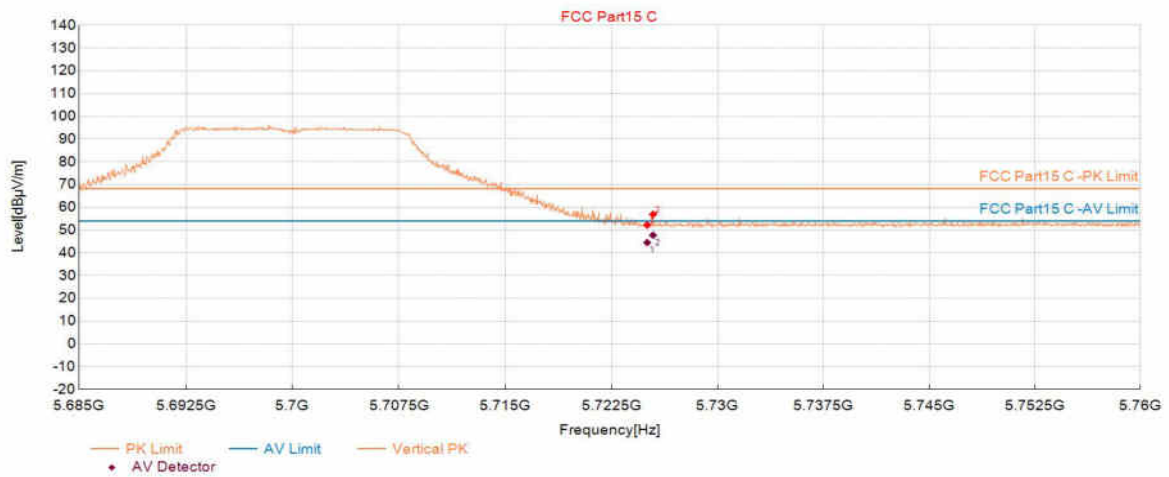

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	35.02	52.22	17.20	68.20	15.98	150	94	Vertical
2	5725.445	39.69	56.89	17.20	68.20	11.31	150	226	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	27.30	17.20	44.50	54.00	9.50	150	94	Vertical
2	5725.445	30.54	17.20	47.74	54.00	6.26	150	226	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5180	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:42:07

Test Graph

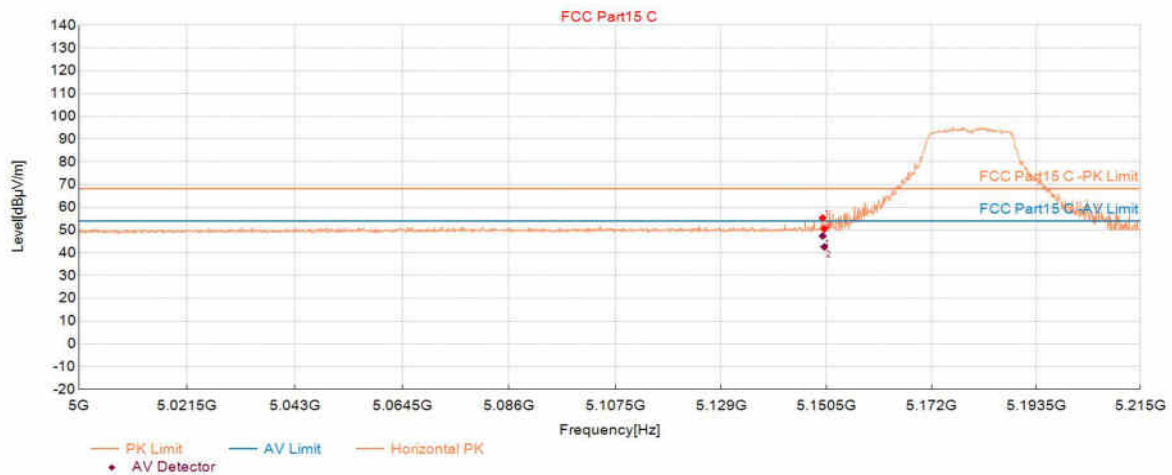

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.715	40.16	55.35	15.19	68.20	12.85	150	249	Horizontal
2	5150.038	35.30	50.51	15.21	68.20	17.69	150	256	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.715	32.21	15.19	47.40	54.00	6.60	150	249	Horizontal
2	5150.038	27.41	15.21	42.62	54.00	11.38	150	256	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5180	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:43:04

Test Graph

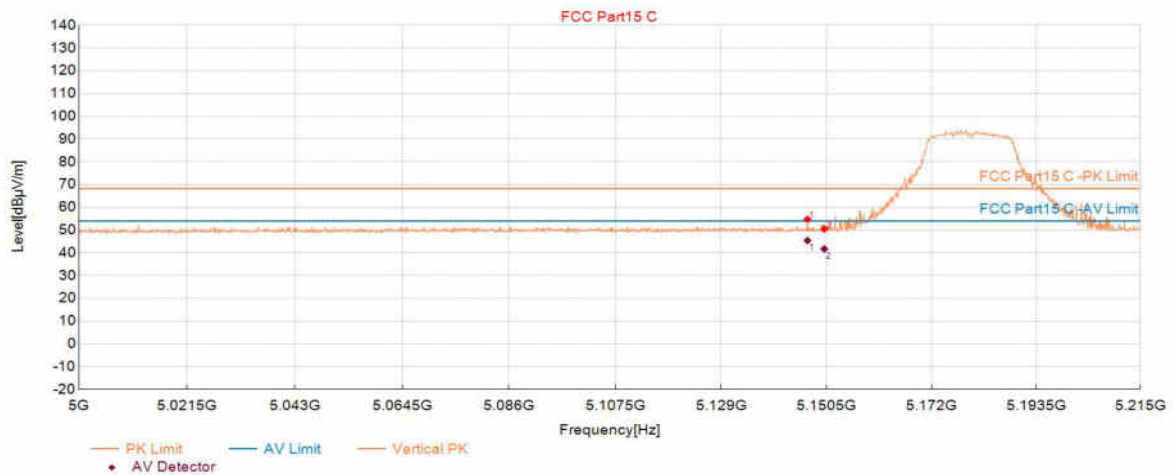

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.596	39.57	54.76	15.19	68.20	13.44	150	223	Vertical
2	5150.038	35.26	50.47	15.21	68.20	17.73	150	240	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.596	30.21	15.19	45.40	54.00	8.60	150	223	Vertical
2	5150.038	26.54	15.21	41.75	54.00	12.25	150	240	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5320	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:46:59

Test Graph

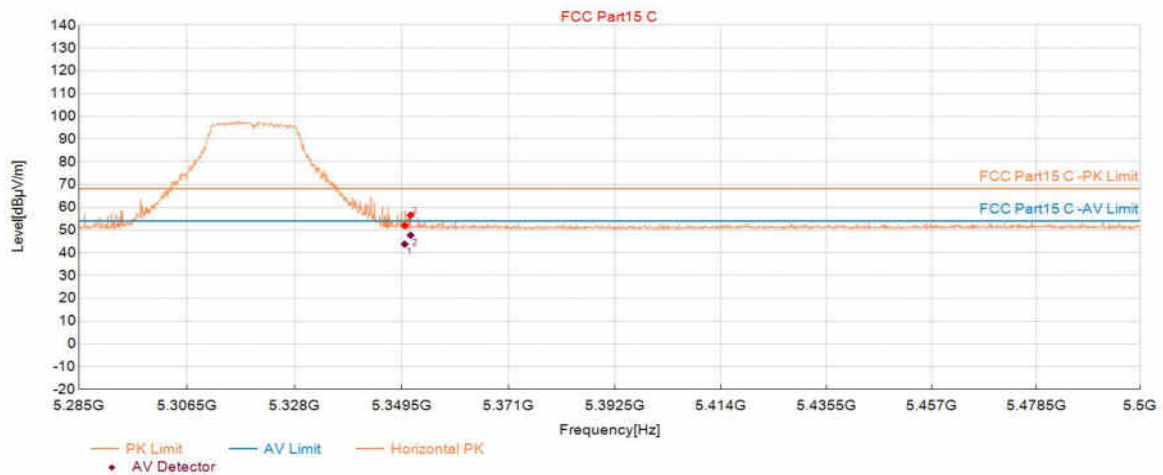

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	35.62	51.91	16.29	68.20	16.29	150	315	Horizontal
2	5351.253	40.20	56.50	16.30	68.20	11.70	150	358	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	27.51	16.29	43.80	54.00	10.20	150	315	Horizontal
2	5351.253	31.41	16.30	47.71	54.00	6.29	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5320	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:47:56

Test Graph

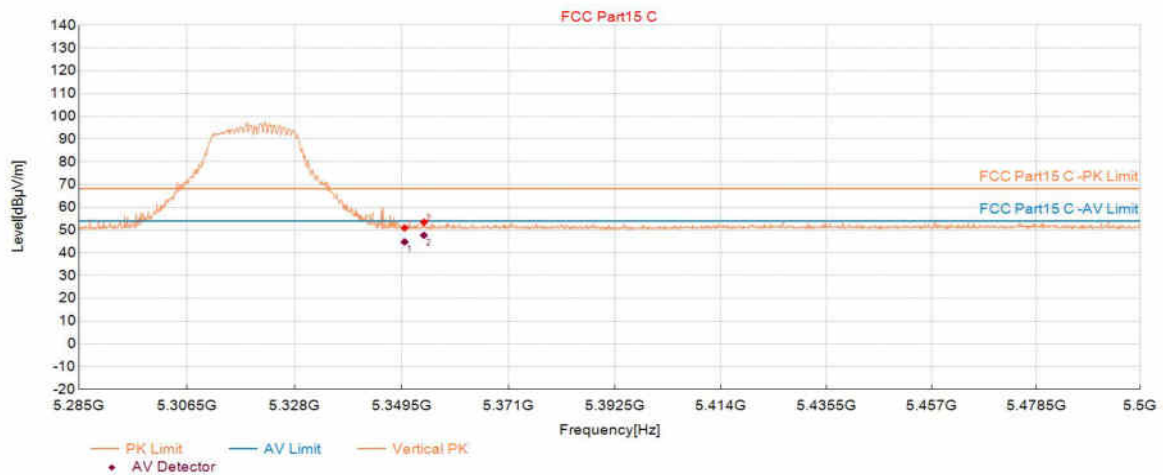

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	34.66	50.95	16.29	68.20	17.25	150	10	Vertical
2	5353.942	37.15	53.46	16.31	68.20	14.74	150	298	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	28.51	16.29	44.80	54.00	9.20	150	10	Vertical
2	5353.942	31.41	16.31	47.72	54.00	6.28	150	298	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:15:37

Test Graph

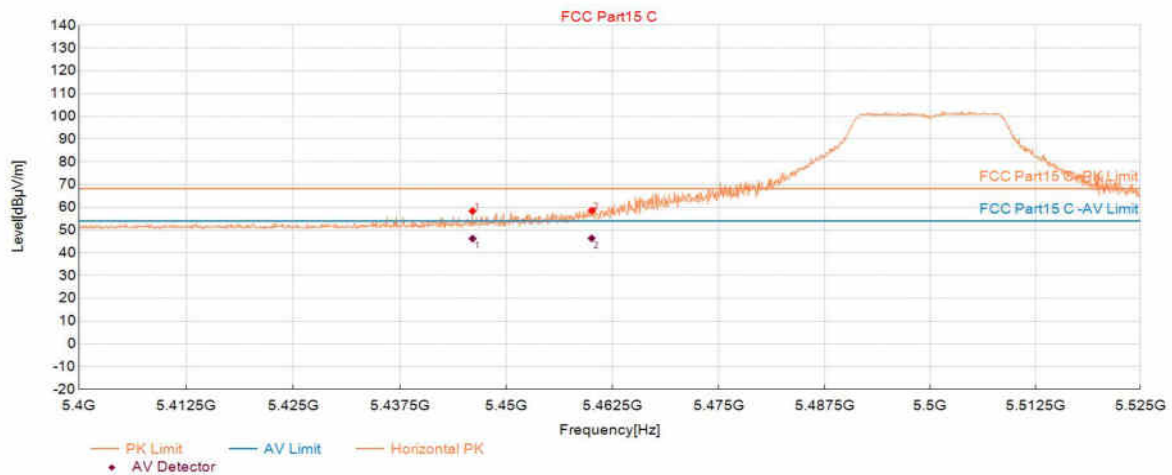

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5446.023	41.69	58.38	16.69	68.20	9.82	150	3	Horizontal
2	5460.030	41.88	58.62	16.74	68.20	9.58	150	323	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5446.023	29.55	16.69	46.24	54.00	7.76	150	3	Horizontal
2	5460.030	29.65	16.74	46.39	54.00	7.61	150	323	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:16:32

Test Graph

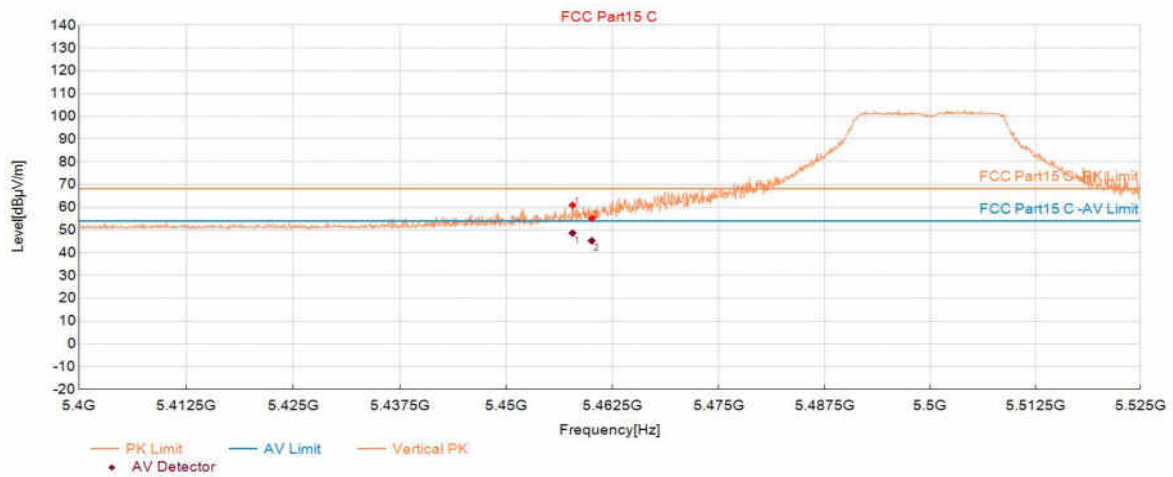

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.779	44.22	60.95	16.73	68.20	7.25	150	323	Vertical
2	5460.030	38.42	55.16	16.74	68.20	13.04	150	273	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.779	31.95	16.73	48.68	54.00	5.32	150	323	Vertical
2	5460.030	28.55	16.74	45.29	54.00	8.71	150	273	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5700	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:50:46

Test Graph

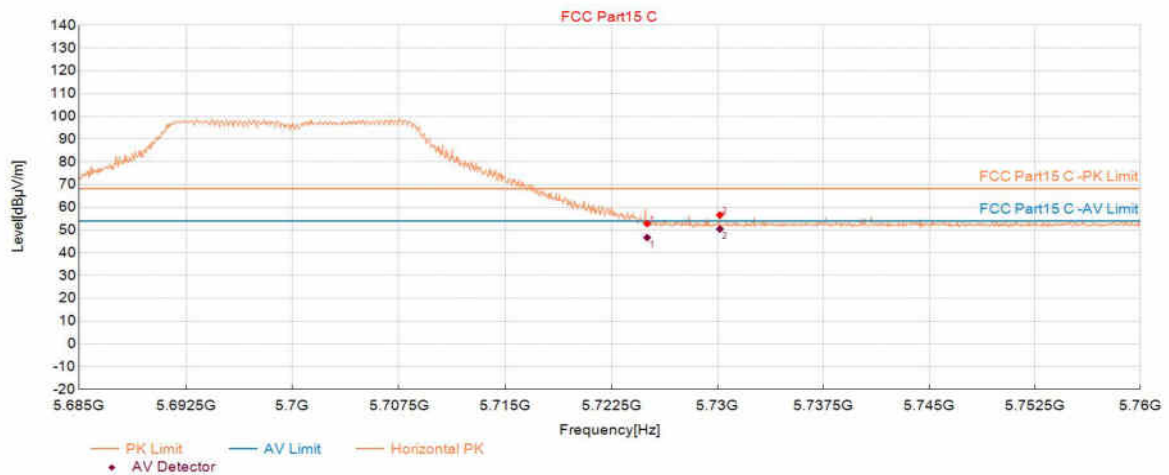

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	35.64	52.84	17.20	68.20	15.81	150	118	Horizontal
2	5730.173	39.42	56.64	17.22	68.20	11.56	150	167	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	29.51	17.20	46.71	54.00	7.29	150	118	Horizontal
2	5730.173	33.24	17.22	50.46	54.00	3.54	150	167	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5700	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:51:43

Test Graph

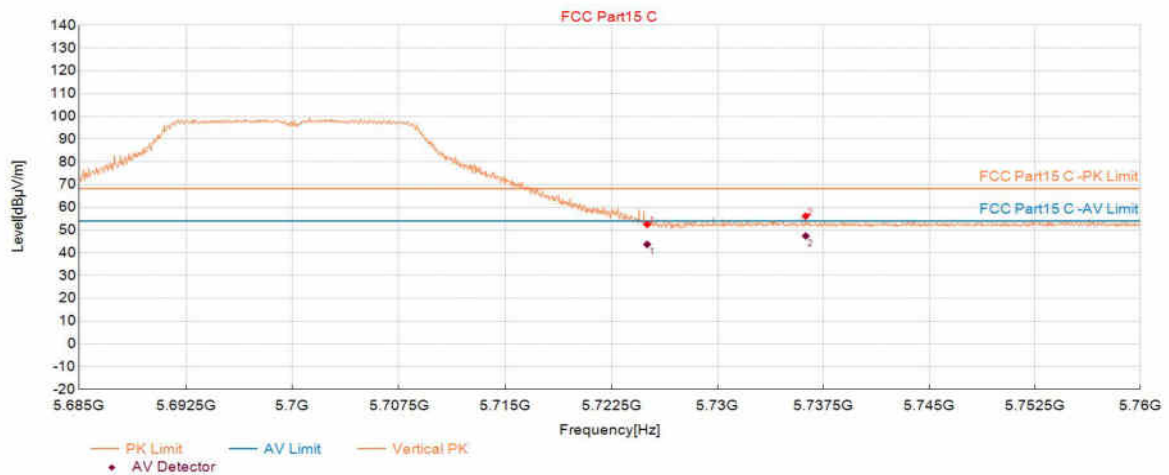

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	35.25	52.45	17.20	68.20	15.44	150	142	Vertical
2	5736.251	38.91	56.14	17.23	68.20	12.06	150	223	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	26.51	17.20	43.71	54.00	10.29	150	142	Vertical
2	5736.251	30.17	17.23	47.40	54.00	6.60	150	223	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5190	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:35:54

Test Graph

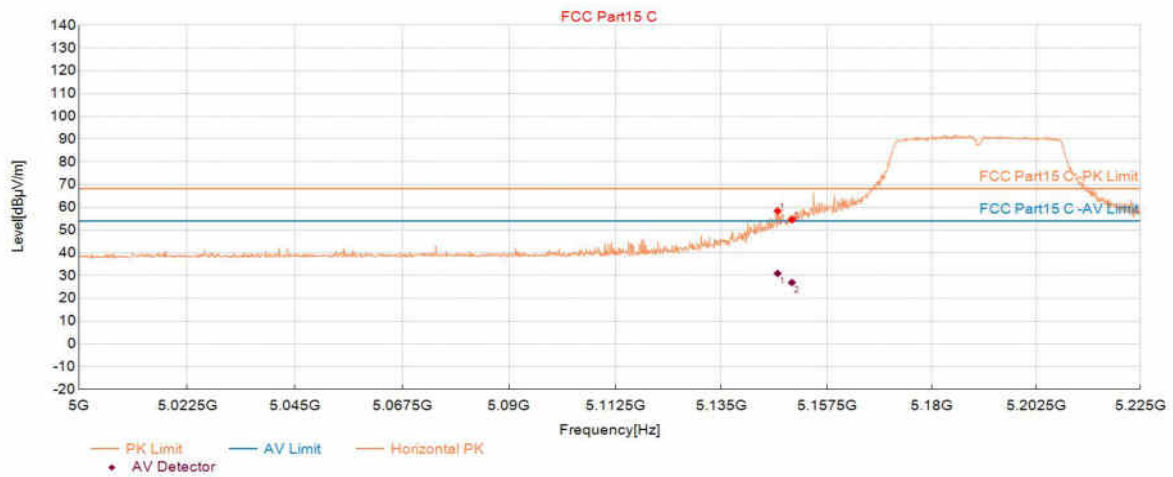

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.998	64.00	58.39	-5.61	68.20	9.81	150	329	Horizontal
2	5150.038	60.11	54.52	-5.59	68.20	13.68	150	329	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.998	36.55	-5.61	30.94	54.00	23.06	150	329	Horizontal
2	5150.038	32.54	-5.59	26.95	54.00	27.05	150	329	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5190	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:36:39

Test Graph

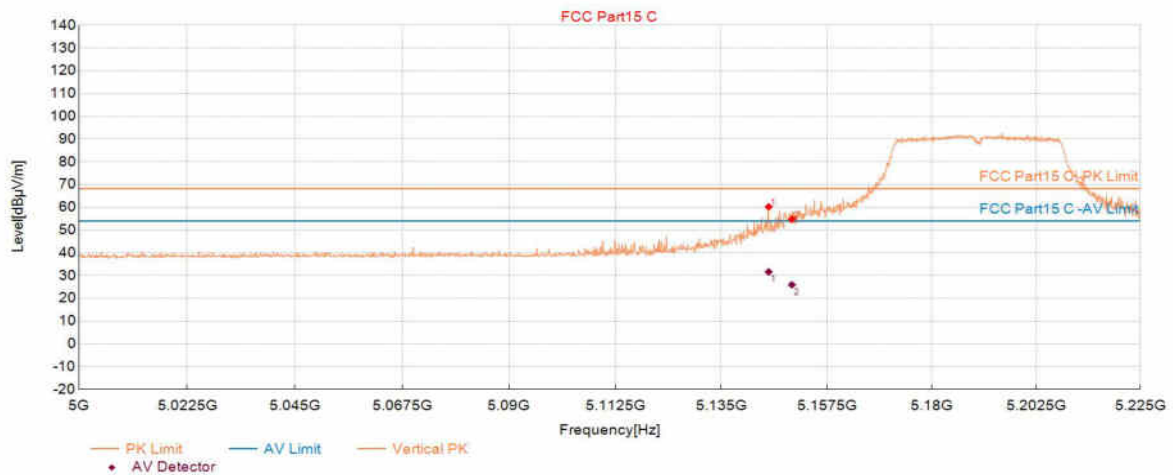

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.085	65.84	60.22	-5.62	68.20	7.98	150	225	Vertical
2	5150.038	60.33	54.74	-5.59	68.20	13.46	150	337	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.085	37.26	-5.62	31.64	54.00	22.36	150	225	Vertical
2	5150.038	31.55	-5.59	25.96	54.00	28.04	150	337	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5310	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:49:57

Test Graph

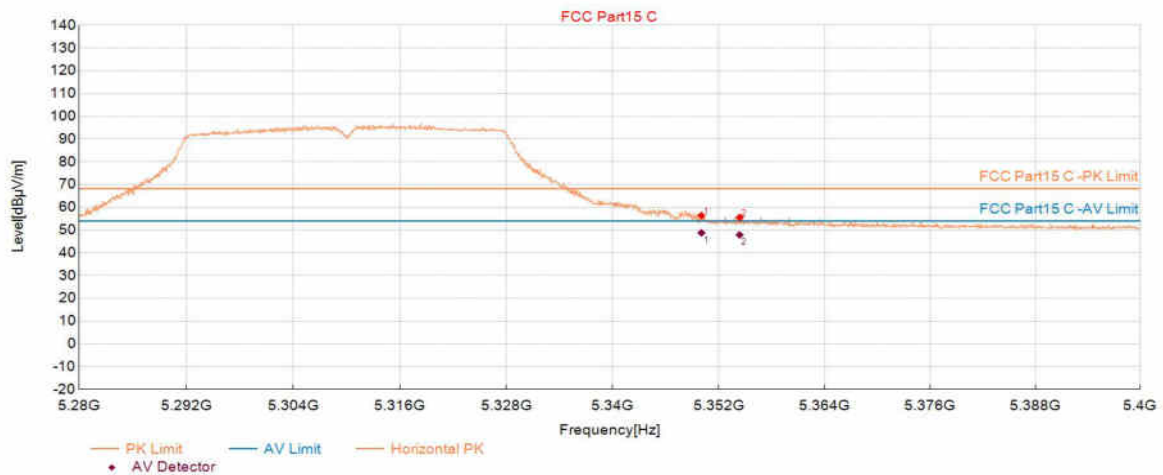

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	40.09	56.38	16.29	68.20	11.82	150	355	Horizontal
2	5354.377	39.23	55.54	16.31	68.20	12.66	150	345	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	32.51	16.29	48.80	54.00	5.20	150	355	Horizontal
2	5354.377	31.59	16.31	47.90	54.00	6.10	150	345	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5310	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:50:43

Test Graph

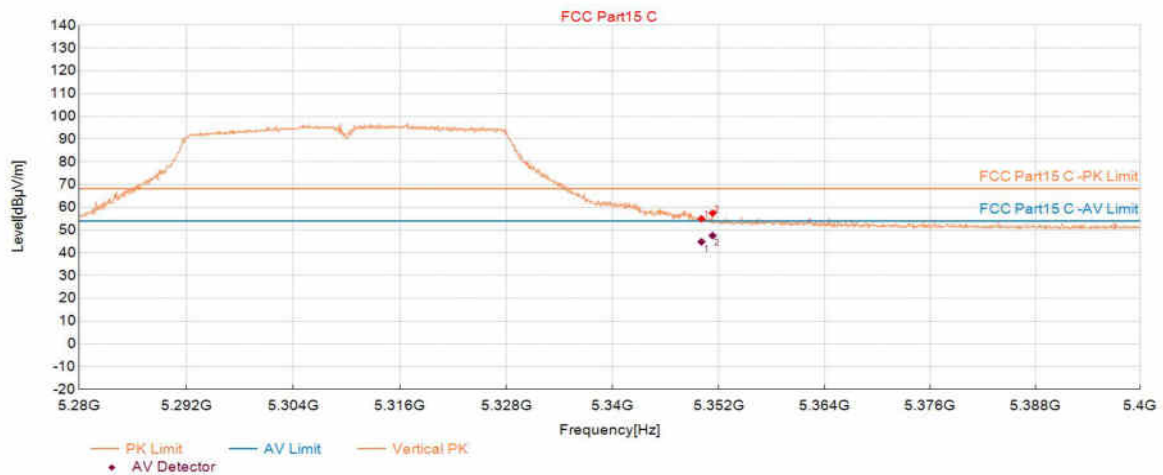

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	38.65	54.94	16.29	68.20	13.26	150	341	Vertical
2	5351.316	41.12	57.42	16.30	68.20	10.78	150	209	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	28.55	16.29	44.84	54.00	9.16	150	341	Vertical
2	5351.316	31.24	16.30	47.54	54.00	6.46	150	209	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5510	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:54:01

Test Graph

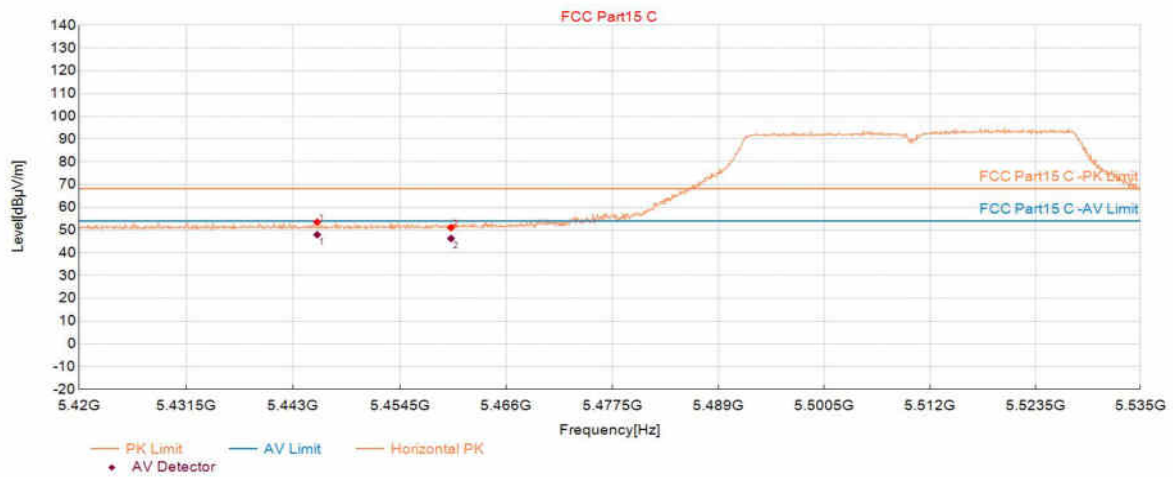

Suspected Data List

NO.	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5445.600	36.83	53.52	16.69	68.20	14.68	150	191	Horizontal
2	5460.040	34.34	51.08	16.74	68.20	17.12	150	231	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5445.600	31.25	16.69	47.94	54.00	6.06	150	191	Horizontal
2	5460.040	29.55	16.74	46.29	54.00	7.71	150	231	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5510	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:54:46

Test Graph

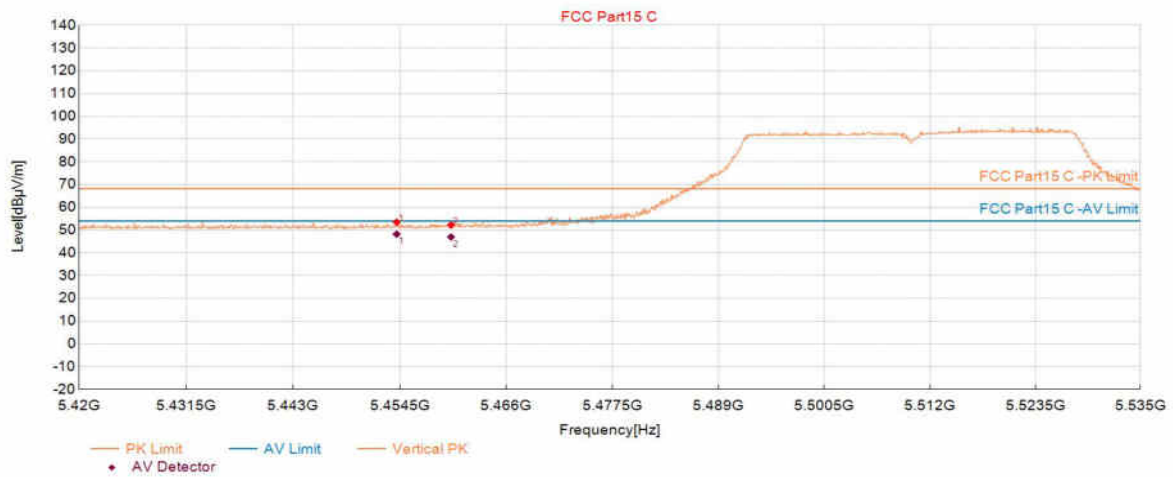

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.172	36.81	53.52	16.71	68.20	14.68	150	272	Vertical
2	5460.040	35.51	52.25	16.74	68.20	15.95	150	87	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.172	31.51	16.71	48.22	54.00	5.78	150	272	Vertical
2	5460.040	30.22	16.74	46.96	54.00	7.04	150	87	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5670	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:57:41

Test Graph

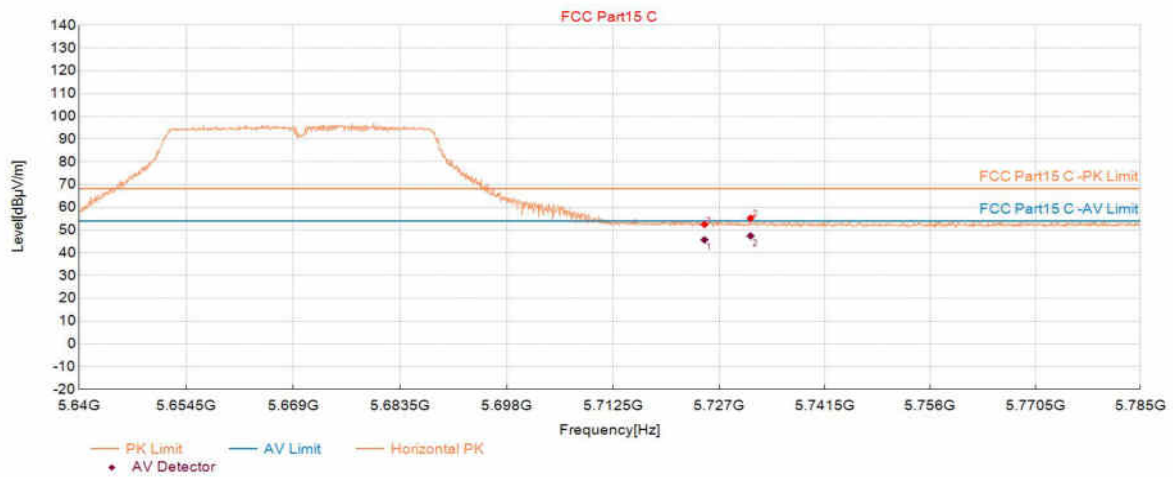

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	35.28	52.48	17.20	68.20	15.72	150	199	Horizontal
2	5731.323	38.02	55.24	17.22	68.20	12.96	150	224	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	28.51	17.20	45.71	54.00	8.29	150	199	Horizontal
2	5731.323	30.22	17.22	47.44	54.00	6.56	150	224	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5670	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 15:58:27

Test Graph

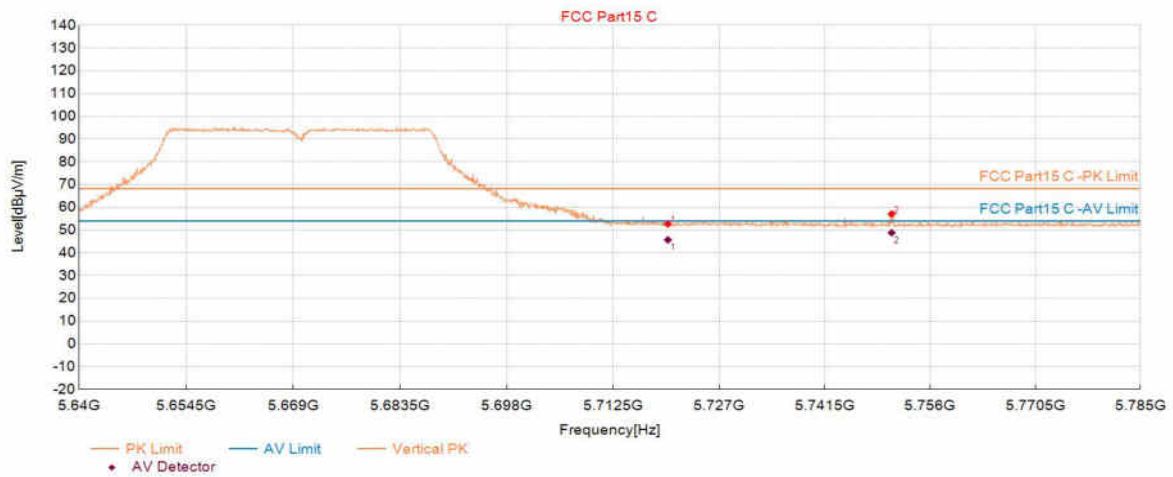

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5720.008	35.48	52.65	17.17	68.20	15.55	150	201	Vertical
2	5750.690	39.77	57.06	17.29	68.20	11.14	150	306	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5720.008	28.55	17.17	45.72	54.00	8.28	150	201	Vertical
2	5750.690	31.54	17.29	48.83	54.00	5.17	150	306	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5180	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:02:13

Test Graph

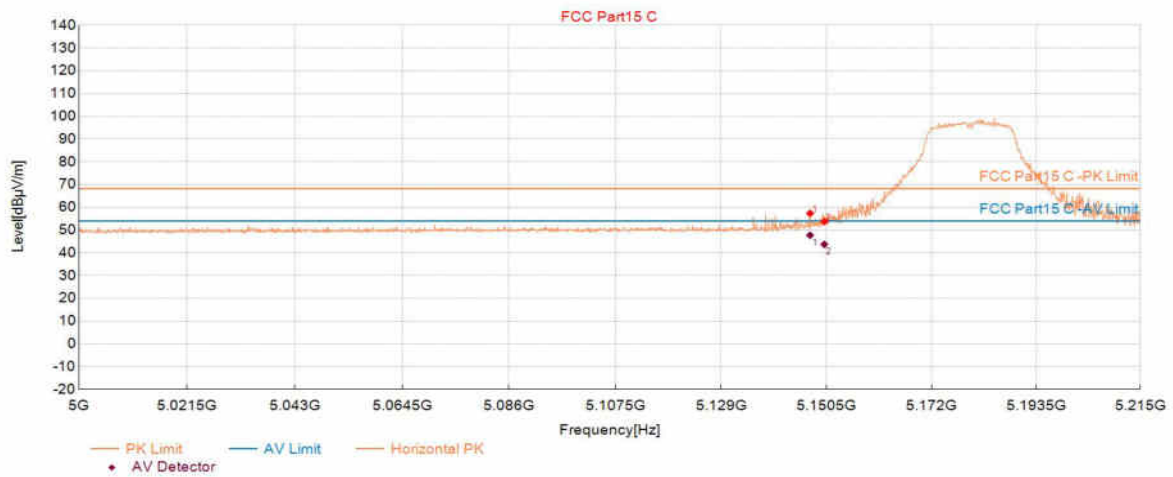

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.134	42.18	57.37	15.19	68.20	10.83	150	223	Horizontal
2	5150.038	38.53	53.74	15.21	68.20	14.46	150	337	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.134	32.55	15.19	47.74	54.00	6.26	150	223	Horizontal
2	5150.038	28.51	15.21	43.72	54.00	10.28	150	337	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5180	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:02:59

Test Graph

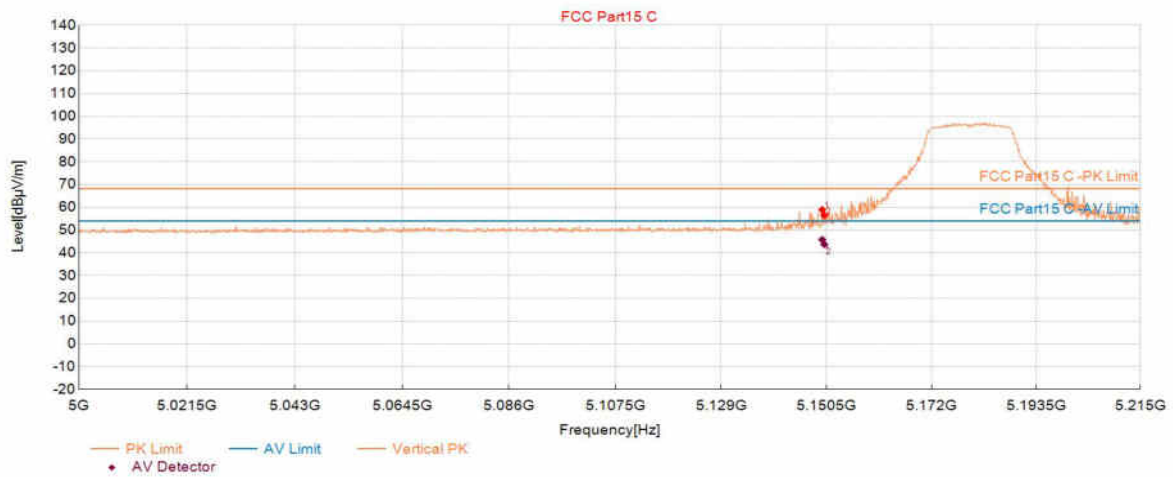

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.607	43.74	58.93	15.19	68.20	9.27	150	292	Vertical
2	5150.038	41.27	56.48	15.21	68.20	11.72	150	250	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.607	30.64	15.19	45.83	54.00	8.17	150	292	Vertical
2	5150.038	28.52	15.21	43.73	54.00	10.27	150	250	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level