


Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5320	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:10:17

Test Graph

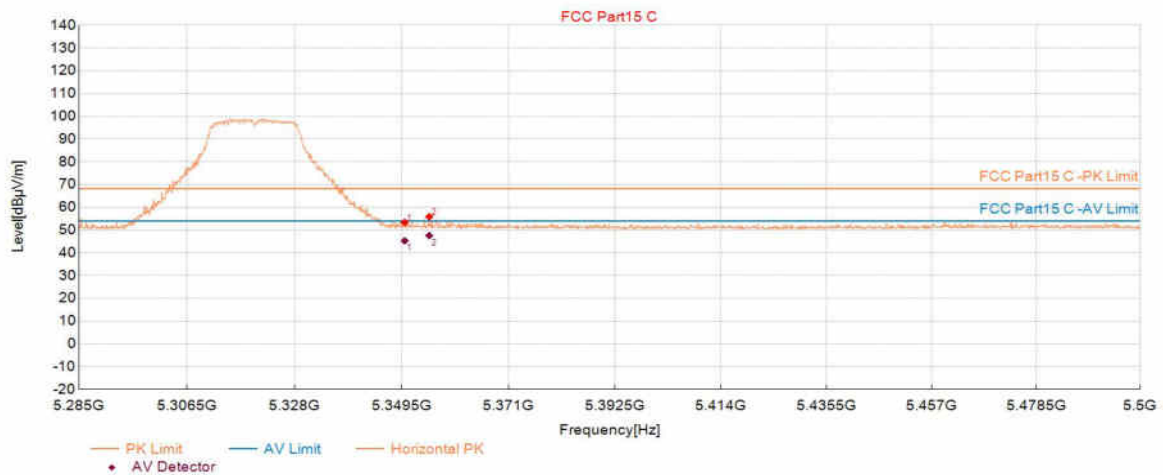

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	37.08	53.37	16.29	68.20	14.83	150	255	Horizontal
2	5355.018	39.55	55.86	16.31	68.20	12.34	150	191	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	28.99	16.29	45.28	54.00	8.72	150	255	Horizontal
2	5355.018	31.27	16.31	47.58	54.00	6.42	150	191	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5320	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:11:03

Test Graph

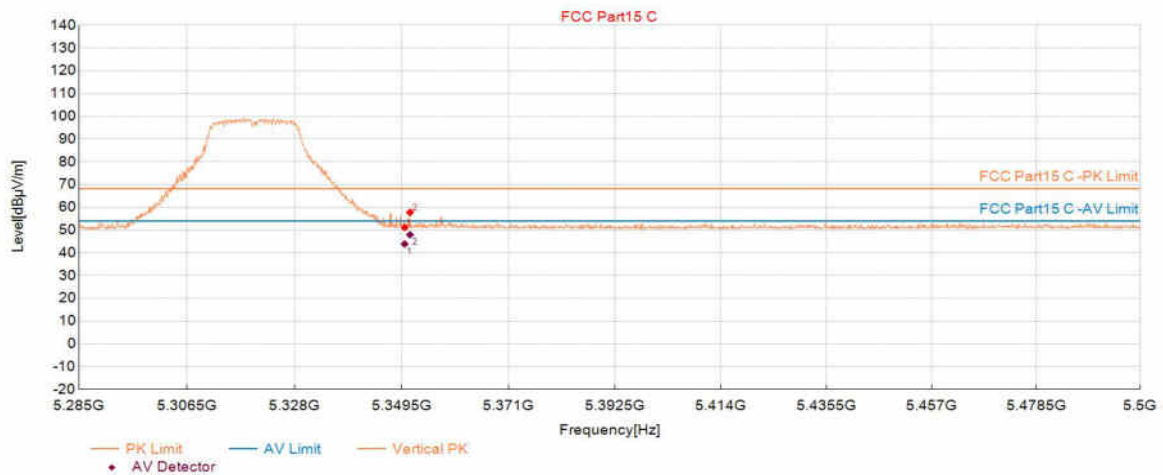

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	34.84	51.13	16.29	68.20	17.07	150	0	Vertical
2	5351.146	41.51	57.81	16.30	68.20	10.39	150	200	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	27.58	16.29	43.87	54.00	10.13	150	0	Vertical
2	5351.146	31.65	16.30	47.95	54.00	6.05	150	200	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:17:18

Test Graph

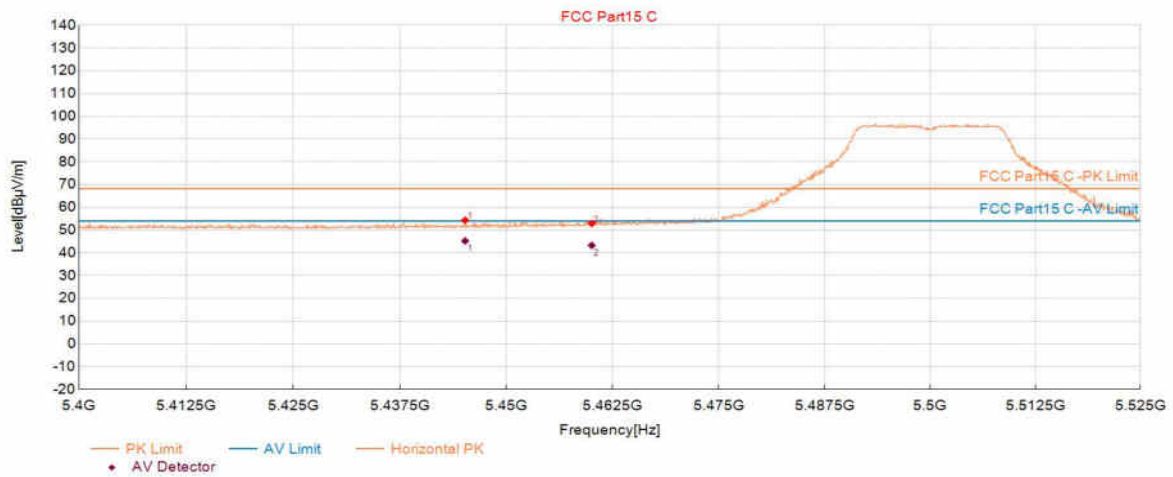

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5445.148	37.62	54.31	16.69	68.20	13.89	150	174	Horizontal
2	5460.030	36.14	52.88	16.74	68.20	15.32	150	242	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5445.148	28.56	16.69	45.25	54.00	8.75	150	174	Horizontal
2	5460.030	26.54	16.74	43.28	54.00	10.72	150	242	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:18:13

Test Graph

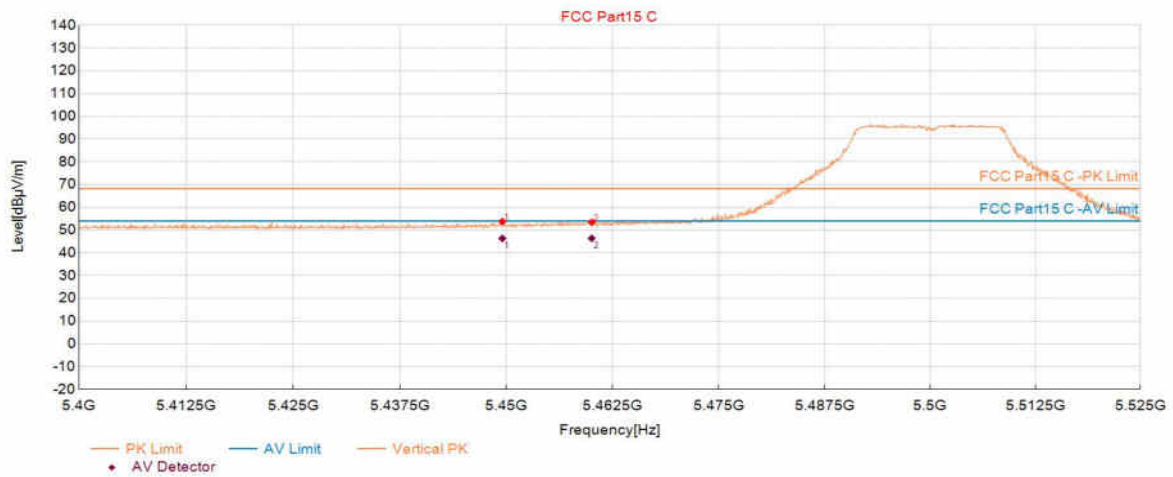

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5449.525	37.06	53.76	16.70	68.20	14.44	150	0	Vertical
2	5460.030	36.70	53.44	16.74	68.20	14.76	150	244	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5449.525	29.65	16.70	46.35	54.00	7.65	150	0	Vertical
2	5460.030	29.64	16.74	46.38	54.00	7.62	150	244	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5700	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:20:53

Test Graph

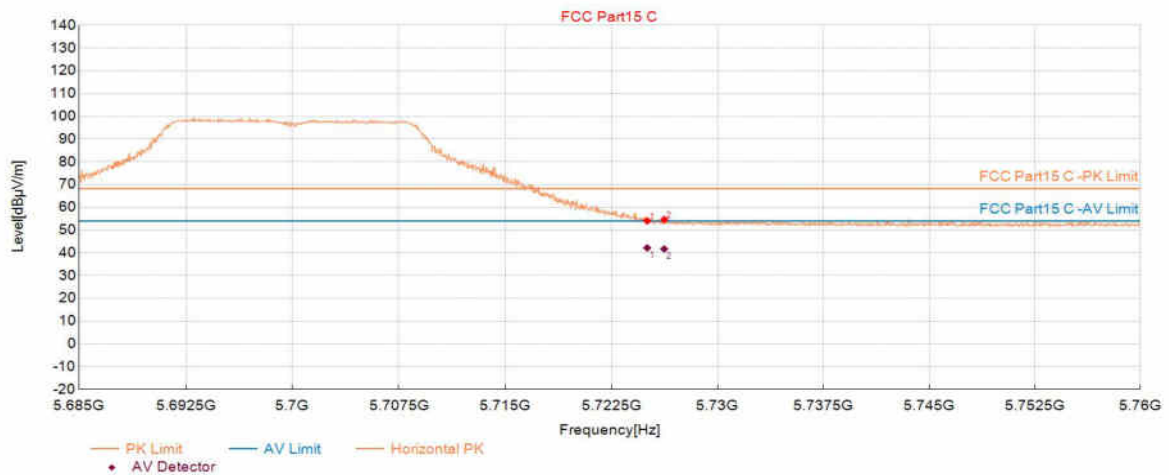

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	36.86	54.06	17.20	68.20	14.14	150	287	Horizontal
2	5726.233	37.41	54.61	17.20	68.20	13.59	150	238	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	24.99	17.20	42.19	54.00	11.81	150	287	Horizontal
2	5726.233	24.51	17.20	41.71	54.00	12.29	150	238	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5700	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:21:38

Test Graph

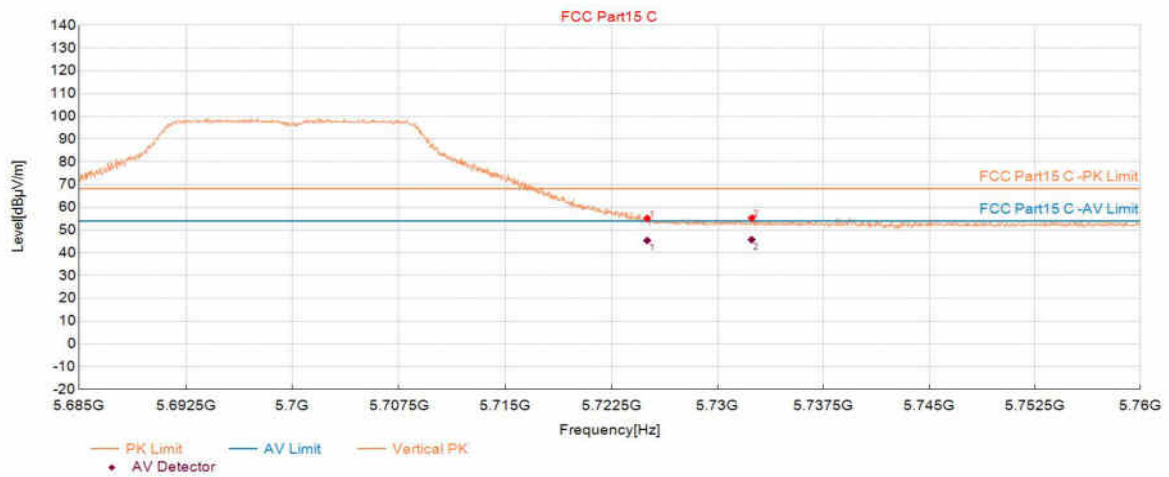

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	37.98	55.18	17.20	68.20	13.02	150	298	Vertical
2	5732.424	38.08	55.30	17.22	68.20	12.90	150	226	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	28.21	17.20	45.41	54.00	8.59	150	298	Vertical
2	5732.424	28.56	17.22	45.78	54.00	8.22	150	226	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5190	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:27:01

Test Graph

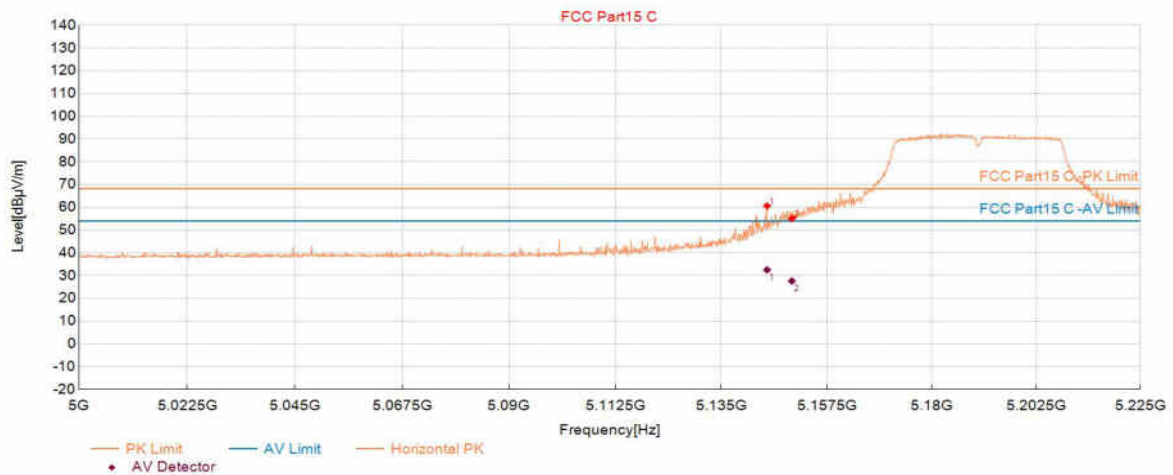

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.747	66.26	60.64	-5.62	68.20	7.56	150	243	Horizontal
2	5150.038	60.71	55.12	-5.59	68.20	13.08	150	291	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.747	38.12	-5.62	32.50	54.00	21.50	150	243	Horizontal
2	5150.038	33.21	-5.59	27.62	54.00	26.38	150	291	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5190	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:27:46

Test Graph

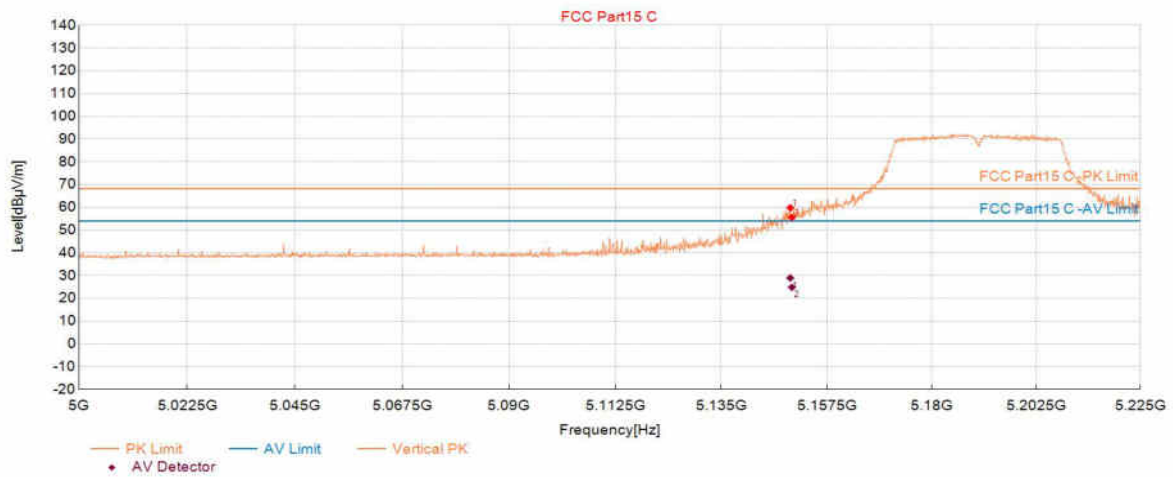

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.700	65.38	59.78	-5.60	68.20	8.42	150	246	Vertical
2	5150.038	61.14	55.55	-5.59	68.20	12.65	150	280	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.700	34.55	-5.60	28.95	54.00	25.05	150	246	Vertical
2	5150.038	30.45	-5.59	24.86	54.00	29.14	150	280	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5310	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:37:19

Test Graph

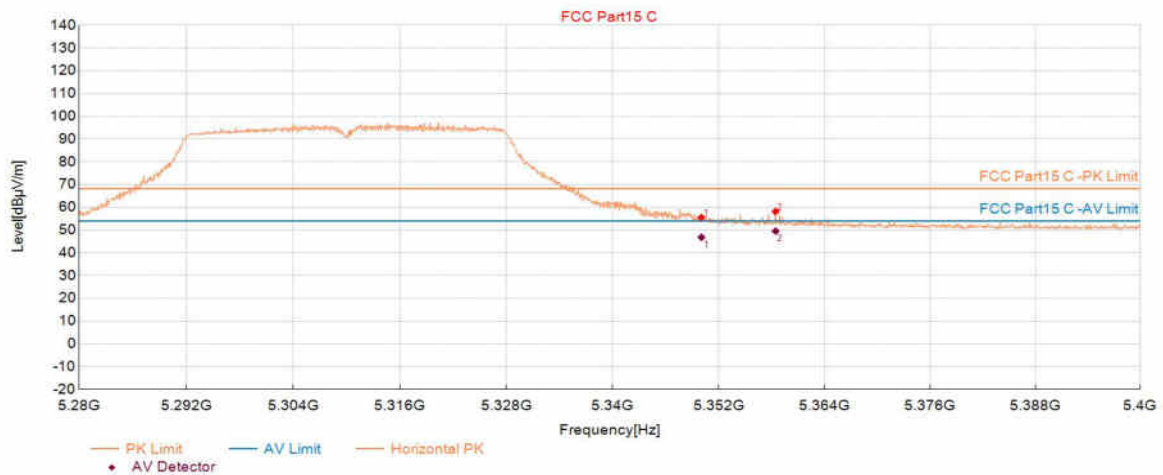

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	39.27	55.56	16.29	68.20	12.64	150	334	Horizontal
2	5358.459	41.84	58.17	16.33	68.20	10.03	150	334	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	30.54	16.29	46.83	54.00	7.17	150	334	Horizontal
2	5358.459	33.21	16.33	49.54	54.00	4.46	150	334	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5310	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:38:05

Test Graph

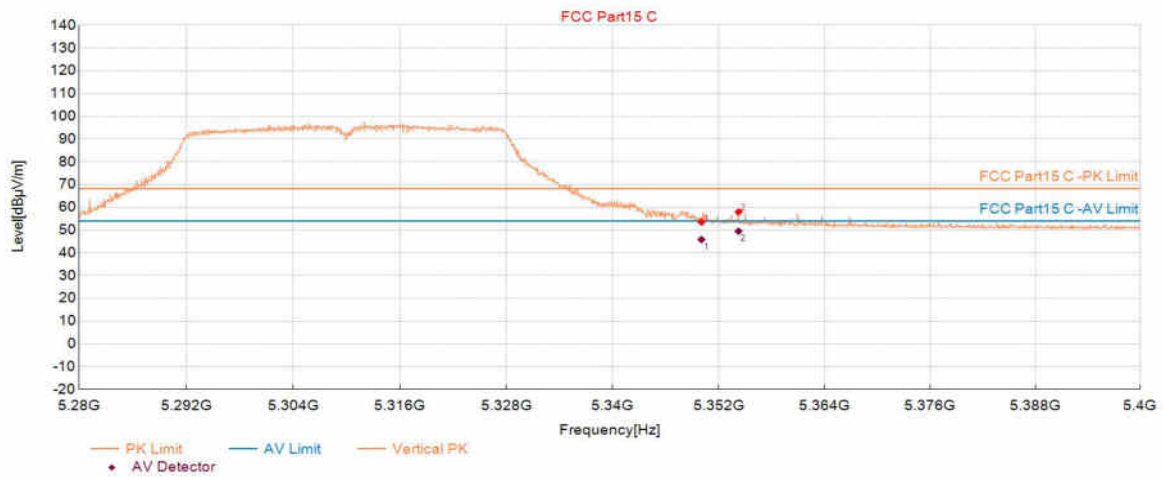

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	37.24	53.53	16.29	68.20	14.67	150	241	Vertical
2	5354.257	41.67	57.98	16.31	68.20	10.22	150	352	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	29.54	16.29	45.83	54.00	8.17	150	241	Vertical
2	5354.257	33.21	16.31	49.52	54.00	4.48	150	352	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5510	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:41:34

Test Graph

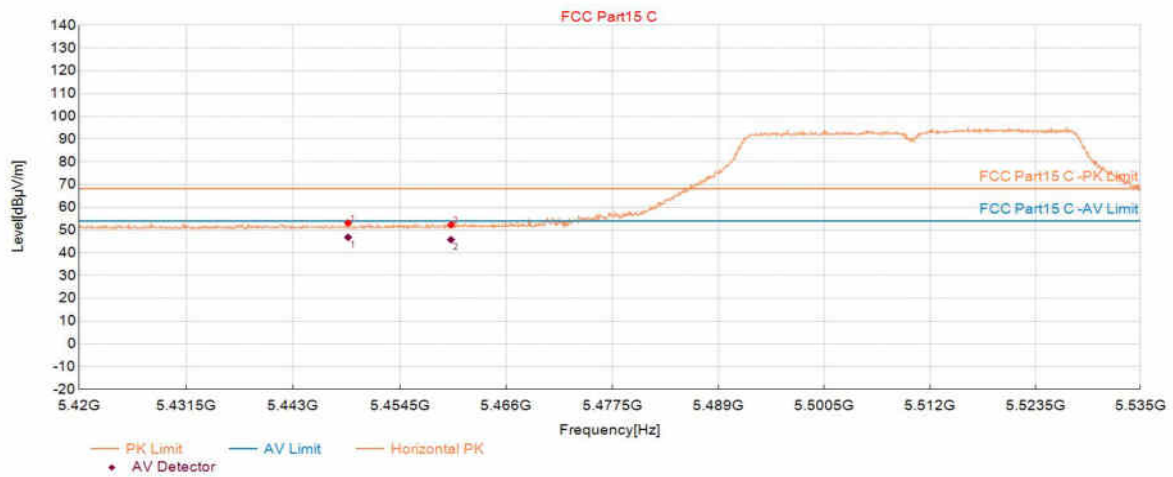

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5448.937	36.44	53.14	16.70	68.20	15.06	150	52	Horizontal
2	5460.040	35.54	52.28	16.74	68.20	15.92	150	347	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5448.937	30.11	16.70	46.81	54.00	7.19	150	52	Horizontal
2	5460.040	29.02	16.74	45.76	54.00	8.24	150	347	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5510	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:42:19

Test Graph

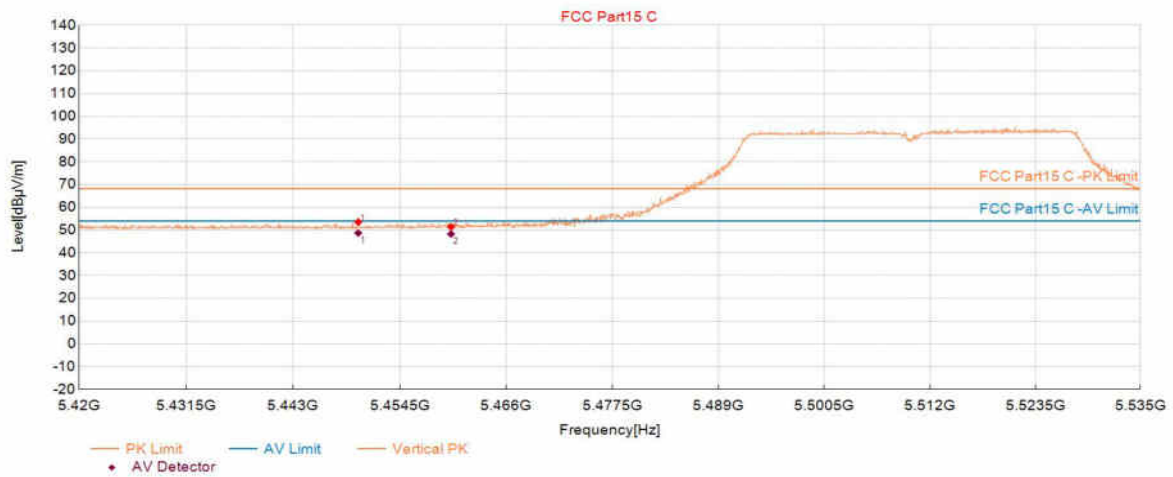

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5450.030	36.87	53.57	16.70	68.20	14.63	150	216	Vertical
2	5460.040	34.66	51.40	16.74	68.20	16.80	150	321	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5450.030	32.00	16.70	48.70	54.00	5.30	150	216	Vertical
2	5460.040	31.54	16.74	48.28	54.00	5.72	150	321	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5670	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:44:41

Test Graph

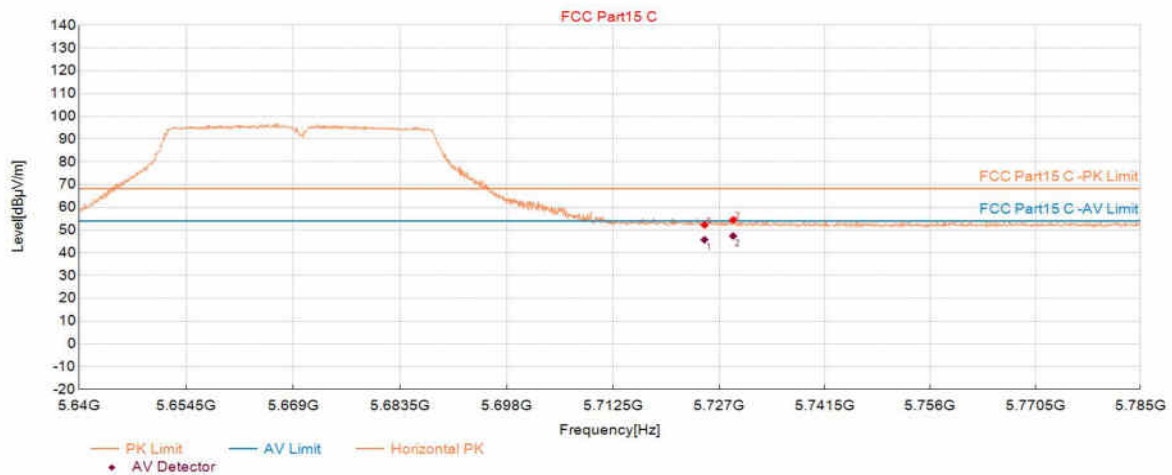

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	35.01	52.21	17.20	68.20	15.99	150	200	Horizontal
2	5728.929	37.29	54.49	17.20	68.20	13.71	150	234	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	28.54	17.20	45.74	54.00	8.26	150	200	Horizontal
2	5728.929	30.21	17.20	47.41	54.00	6.59	150	234	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5670	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:45:26

Test Graph

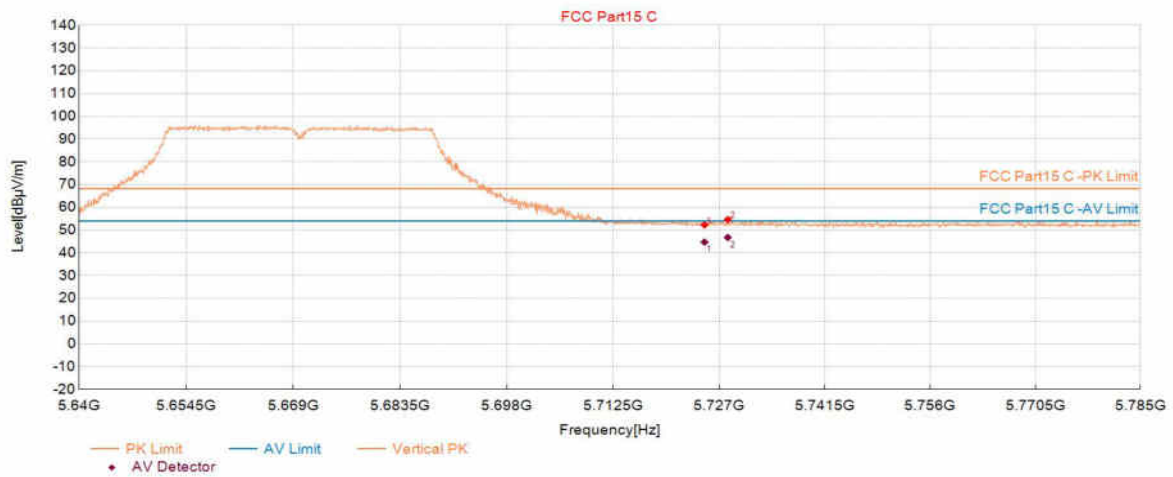

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	35.07	52.27	17.20	68.20	15.93	150	289	Vertical
2	5728.204	37.43	54.63	17.20	68.20	13.57	150	183	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	27.54	17.20	44.74	54.00	9.26	150	289	Vertical
2	5728.204	29.55	17.20	46.75	54.00	7.25	150	183	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:50:32

Test Graph

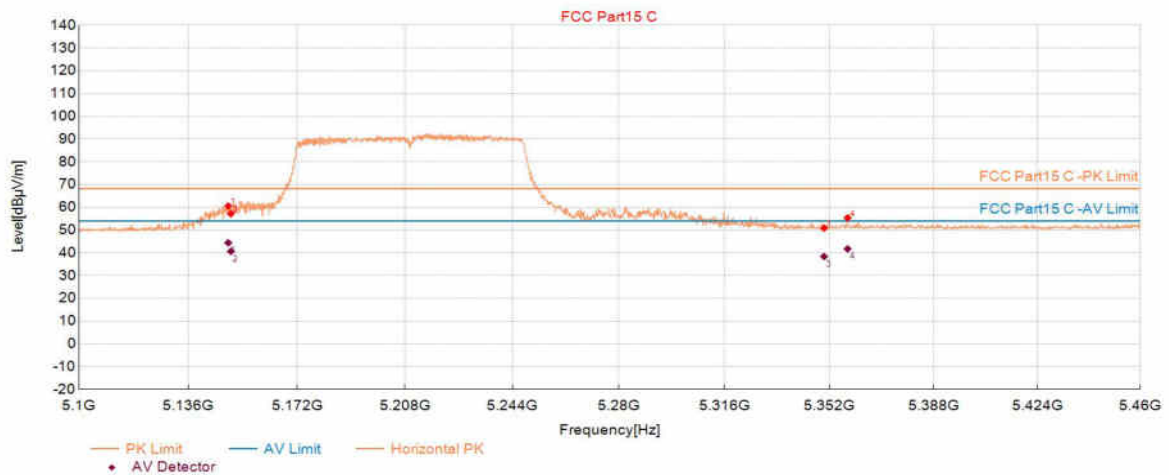

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.165	45.41	60.60	15.19	68.20	7.60	150	240	Horizontal
2	5150.065	41.99	57.20	15.21	68.20	11.00	150	175	Horizontal
3	5350.145	34.58	50.87	16.29	68.20	17.33	150	359	Horizontal
4	5358.249	39.01	55.34	16.33	68.20	12.86	150	2	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.165	29.22	15.19	44.41	54.00	9.59	150	240	Horizontal
2	5150.065	25.45	15.21	40.66	54.00	13.34	150	175	Horizontal
3	5350.145	22.11	16.29	38.40	54.00	15.60	150	359	Horizontal
4	5358.249	25.42	16.33	41.75	54.00	12.25	150	2	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5210	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 16:51:17

Test Graph

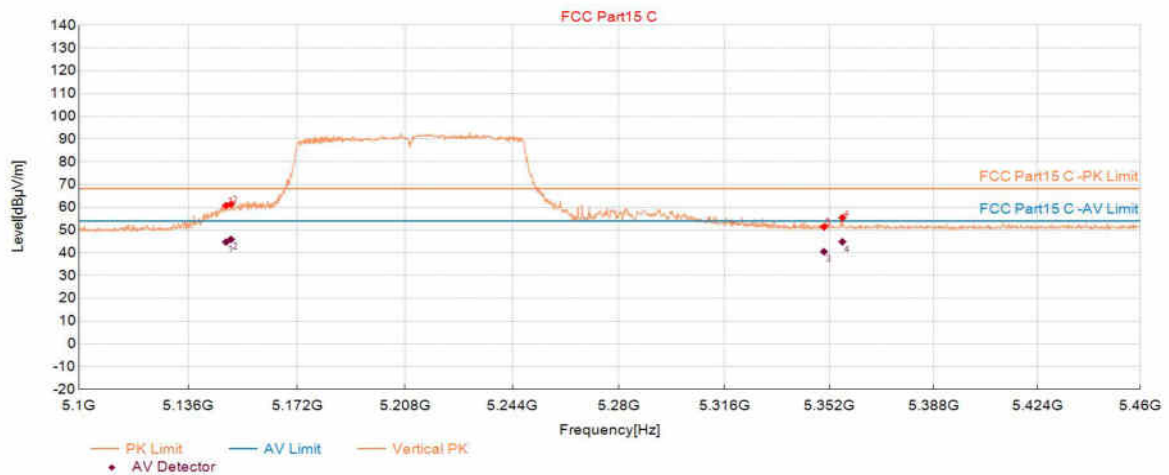

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.444	45.58	60.77	15.19	68.20	7.43	150	240	Vertical
2	5150.065	46.16	61.37	15.21	68.20	6.83	150	240	Vertical
3	5350.145	35.11	51.40	16.29	68.20	16.80	150	247	Vertical
4	5356.448	39.11	55.43	16.32	68.20	12.77	150	320	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.444	29.54	15.19	44.73	54.00	9.27	150	240	Vertical
2	5150.065	30.74	15.21	45.95	54.00	8.05	150	240	Vertical
3	5350.145	24.21	16.29	40.50	54.00	13.50	150	247	Vertical
4	5356.448	28.54	16.32	44.86	54.00	9.14	150	320	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:39:41

Test Graph

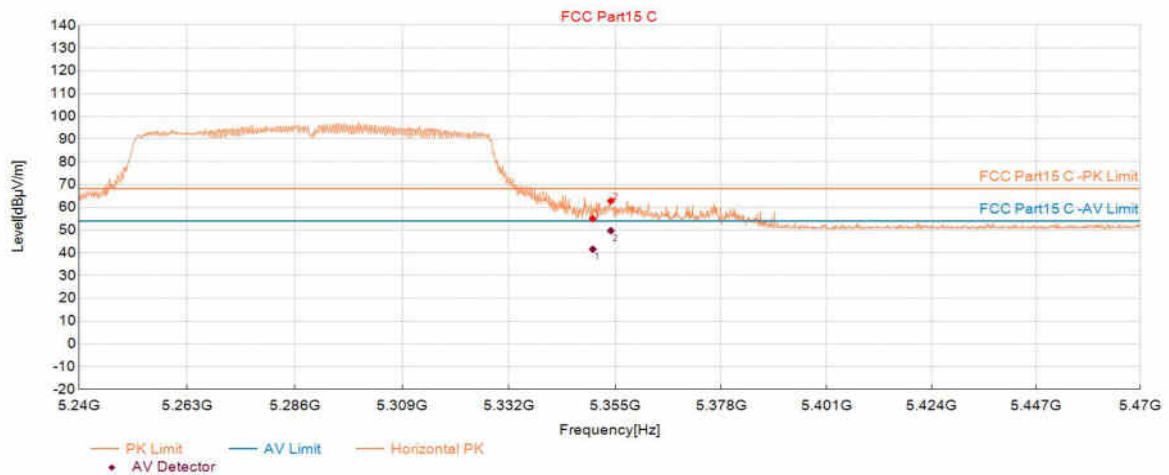

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.110	38.69	54.98	16.29	68.20	13.22	150	3	Horizontal
2	5354.022	46.51	62.82	16.31	68.20	5.38	150	168	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.110	25.31	16.29	41.60	54.00	12.40	150	3	Horizontal
2	5354.022	33.41	16.31	49.72	54.00	4.28	150	168	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5290	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:40:38

Test Graph

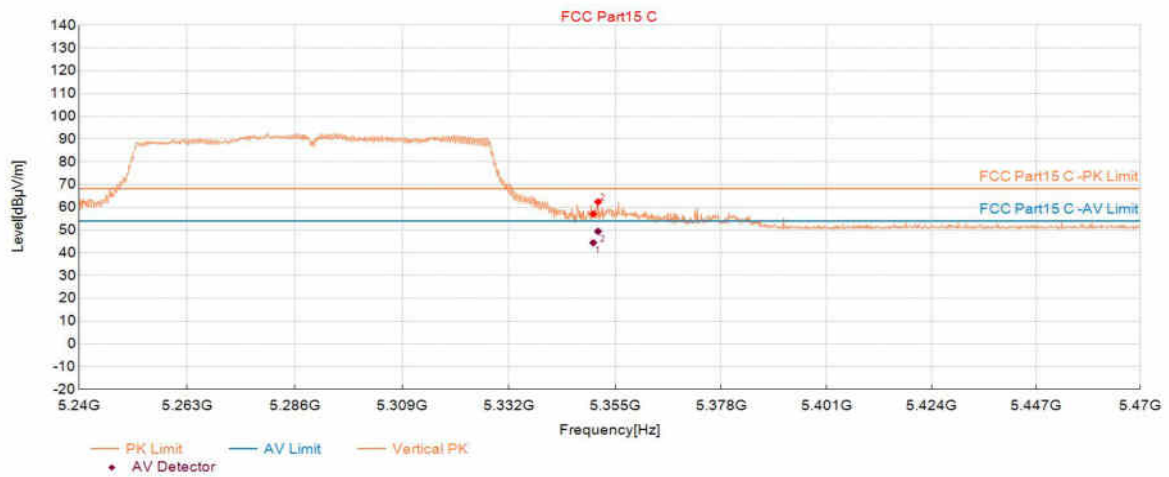

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.225	40.75	57.04	16.29	68.20	11.16	150	46	Vertical
2	5351.261	46.07	62.37	16.30	68.20	5.83	150	225	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.225	28.14	16.29	44.43	54.00	9.57	150	46	Vertical
2	5351.261	33.14	16.30	49.44	54.00	4.56	150	225	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:20:03

Test Graph

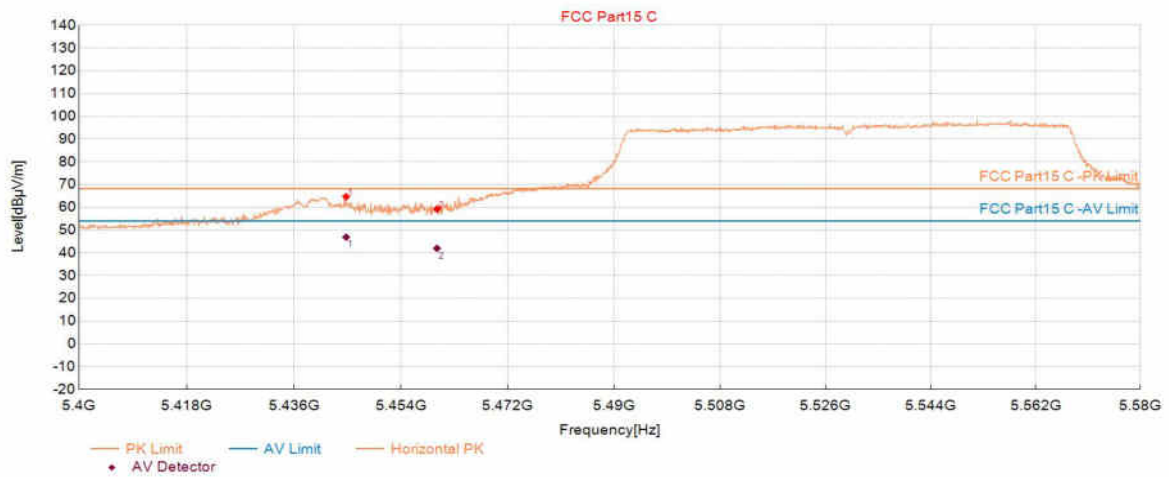

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5444.752	47.98	64.66	16.68	68.20	3.54	150	359	Horizontal
2	5460.060	42.49	59.23	16.74	68.20	8.97	150	311	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5444.752	30.21	16.68	46.89	54.00	7.11	150	359	Horizontal
2	5460.060	25.24	16.74	41.98	54.00	12.02	150	311	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5530	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:20:49

Test Graph

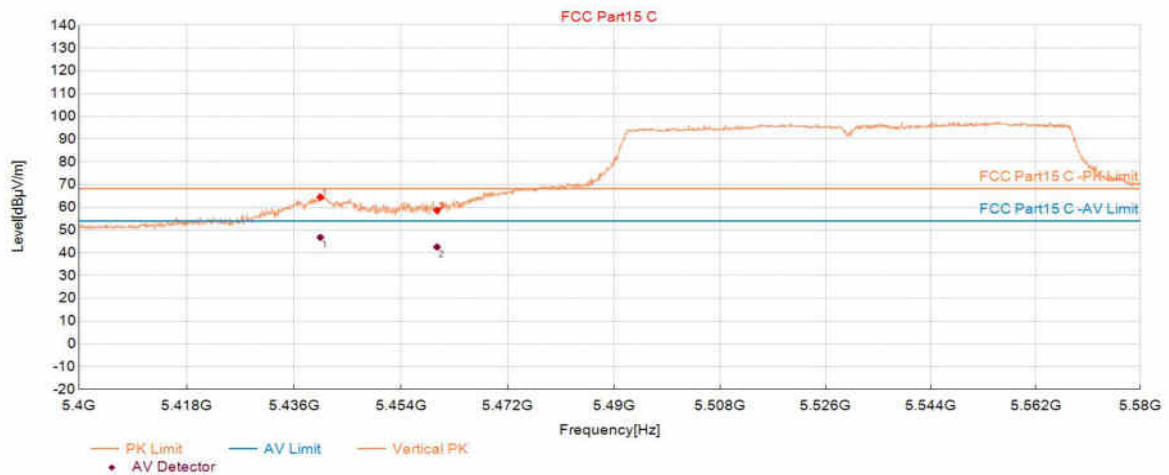

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.430	47.84	64.51	16.67	68.20	3.69	150	358	Vertical
2	5460.060	42.00	58.74	16.74	68.20	9.46	150	4	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.430	30.11	16.67	46.78	54.00	7.22	150	358	Vertical
2	5460.060	25.84	16.74	42.58	54.00	11.42	150	4	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5610	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:24:32

Test Graph

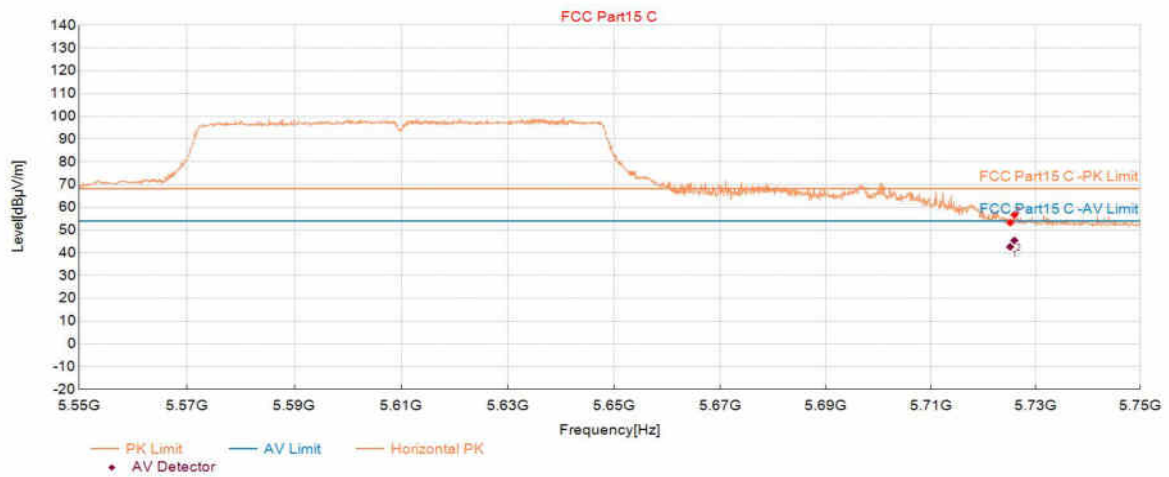

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	36.03	53.23	17.20	68.20	14.97	150	297	Horizontal
2	5725.888	39.47	56.67	17.20	68.20	11.53	150	280	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	25.46	17.20	42.66	54.00	11.34	150	297	Horizontal
2	5725.888	28.25	17.20	45.45	54.00	8.55	150	280	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5610	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:25:17

Test Graph

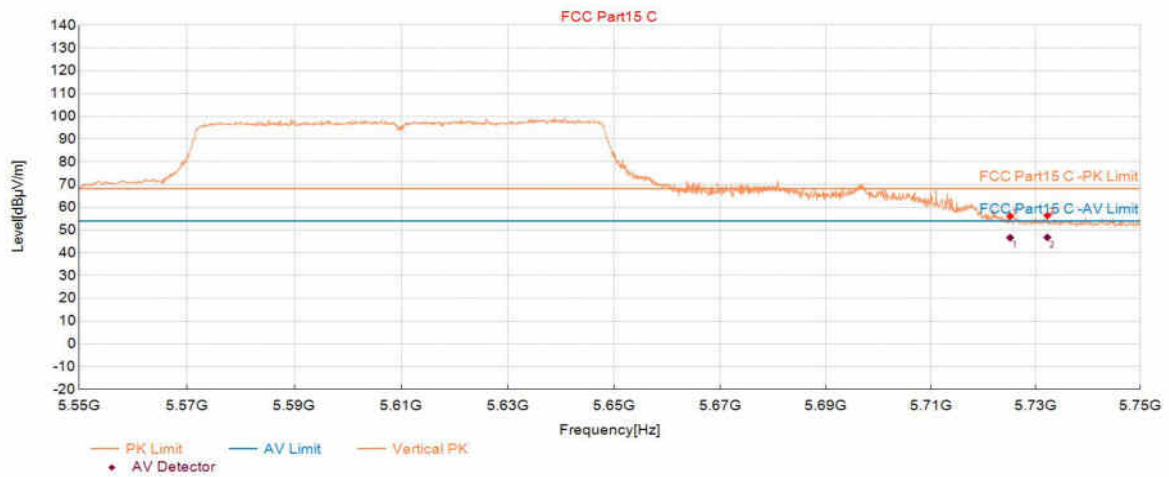

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	38.91	56.11	17.20	68.20	12.09	150	240	Vertical
2	5732.191	39.18	56.40	17.22	68.20	11.80	150	240	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	29.44	17.20	46.64	54.00	7.36	150	240	Vertical
2	5732.191	29.56	17.22	46.78	54.00	7.22	150	240	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5180	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:35:41

Test Graph

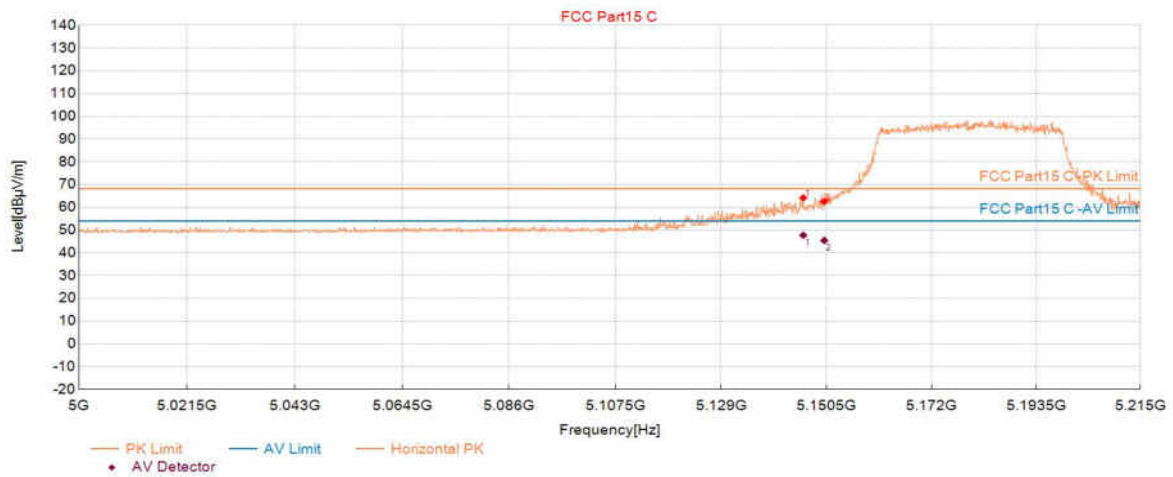

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.735	48.99	64.16	15.17	68.20	4.04	150	280	Horizontal
2	5150.038	47.32	62.53	15.21	68.20	5.67	150	335	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.735	32.55	15.17	47.72	54.00	6.28	150	280	Horizontal
2	5150.038	30.25	15.21	45.46	54.00	8.54	150	335	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5180	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:36:27

Test Graph

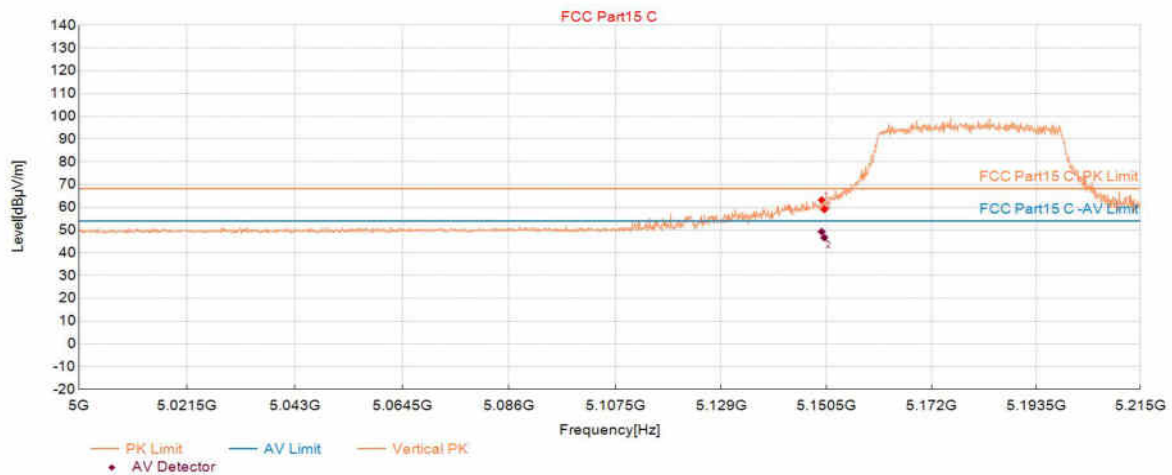

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.500	48.04	63.23	15.19	68.20	4.97	150	336	Vertical
2	5150.038	43.87	59.08	15.21	68.20	9.12	150	190	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.500	34.11	15.19	49.30	54.00	4.70	150	336	Vertical
2	5150.038	31.44	15.21	46.65	54.00	7.35	150	190	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5320	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:38:48

Test Graph

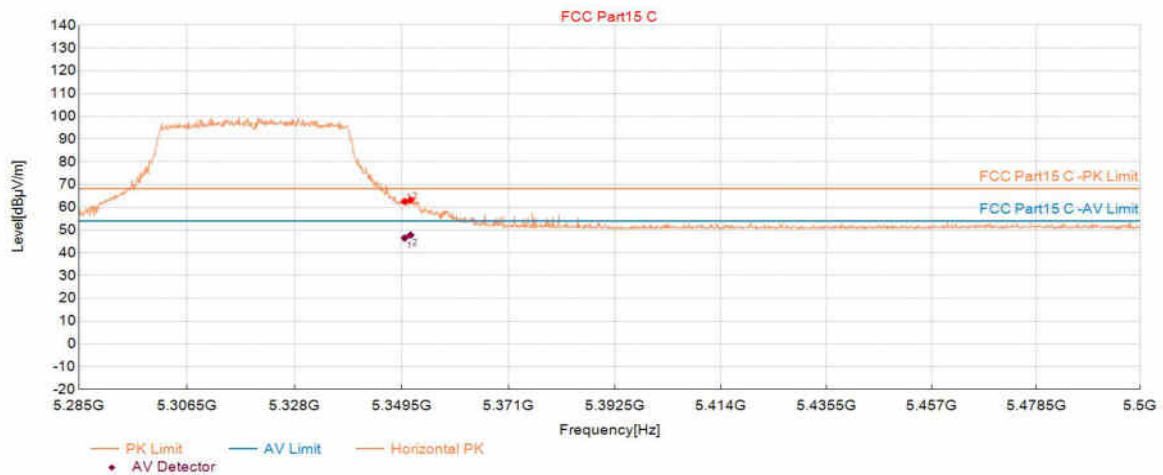

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	46.27	62.56	16.29	68.20	5.64	150	5	Horizontal
2	5351.253	46.90	63.20	16.30	68.20	5.00	150	329	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	30.21	16.29	46.50	54.00	7.50	150	5	Horizontal
2	5351.253	31.51	16.30	47.81	54.00	6.19	150	329	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5320	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:39:37

Test Graph

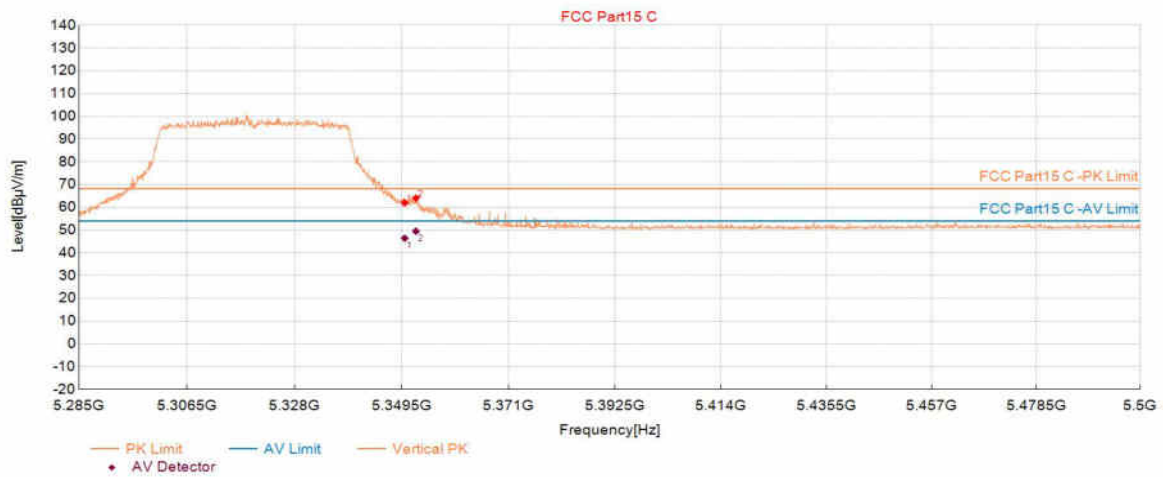

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	45.60	61.89	16.29	68.20	6.31	150	344	Vertical
2	5352.329	47.78	64.08	16.30	68.20	4.12	150	327	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.070	30.11	16.29	46.40	54.00	7.60	150	344	Vertical
2	5352.329	33.21	16.30	49.51	54.00	4.49	150	327	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:47:58

Test Graph

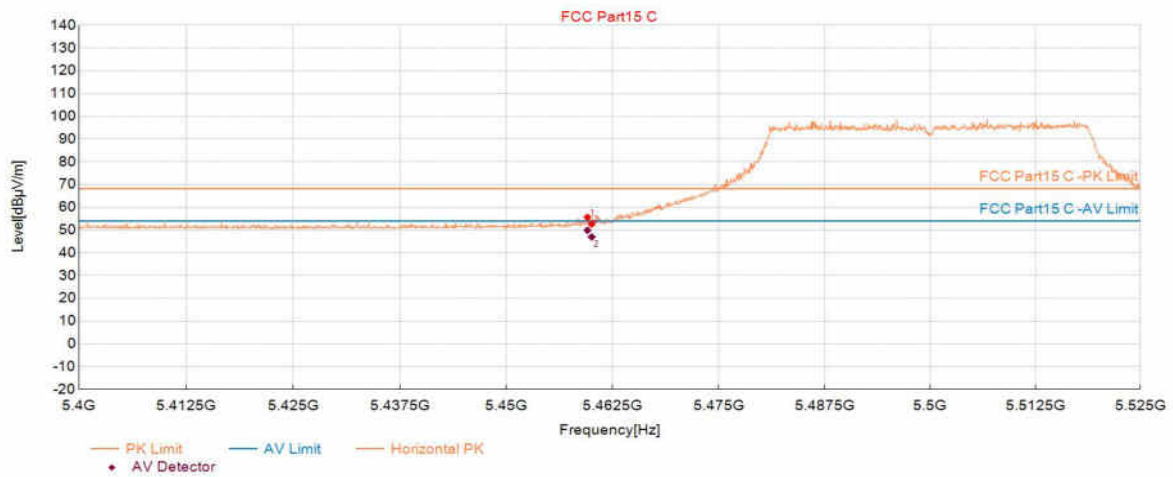

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.530	38.92	55.65	16.73	68.20	12.55	150	341	Horizontal
2	5460.030	35.89	52.63	16.74	68.20	15.57	150	274	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.530	33.21	16.73	49.94	54.00	4.06	150	341	Horizontal
2	5460.030	30.24	16.74	46.98	54.00	7.02	150	274	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5500	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 17:48:52

Test Graph

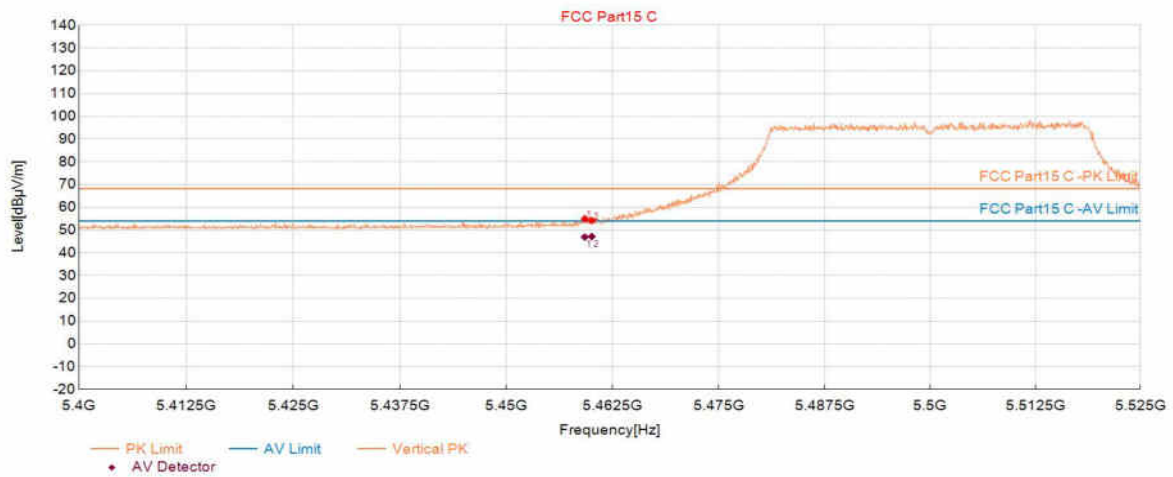

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.217	38.26	54.99	16.73	68.20	13.21	150	322	Vertical
2	5460.030	37.48	54.22	16.74	68.20	13.98	150	2	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.217	30.21	16.73	46.94	54.00	7.06	150	322	Vertical
2	5460.030	30.44	16.74	47.18	54.00	6.82	150	2	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5700	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:02:50

Test Graph

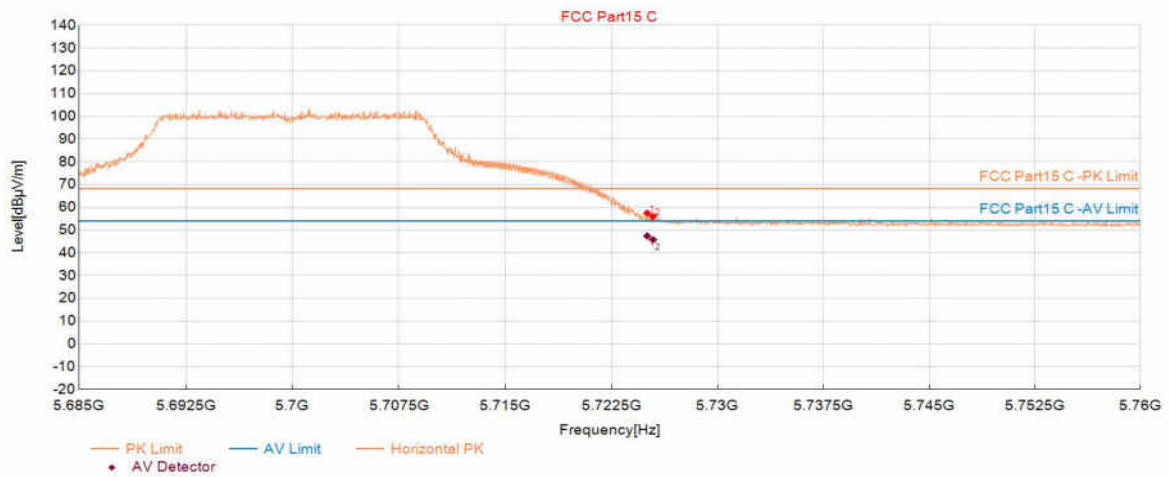

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	40.20	57.40	17.20	68.20	10.80	150	225	Horizontal
2	5725.445	38.76	55.96	17.20	68.20	12.24	150	225	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading(dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	30.22	17.20	47.42	54.00	6.58	150	225	Horizontal
2	5725.445	28.56	17.20	45.76	54.00	8.24	150	225	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5700	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:03:35

Test Graph

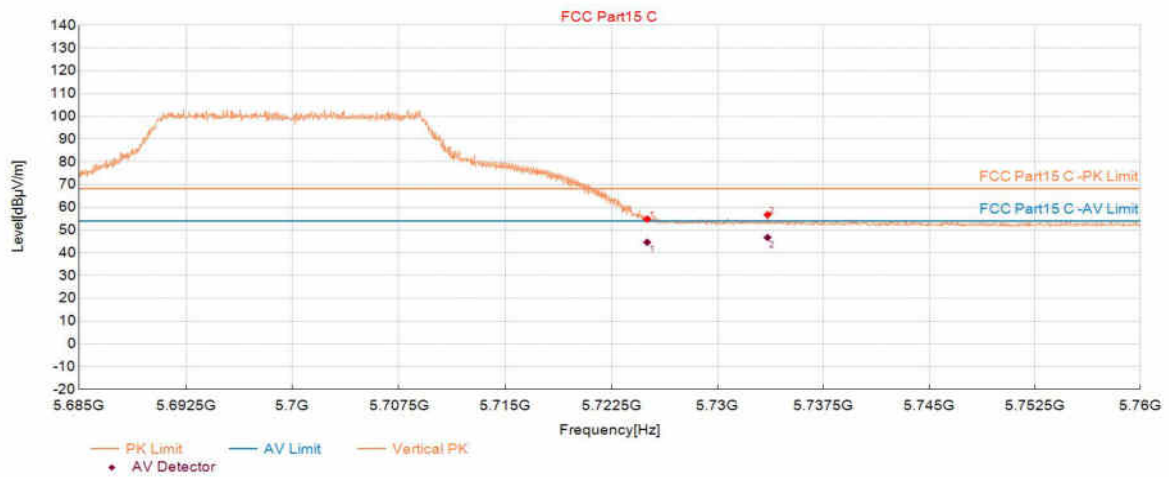

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	37.60	54.80	17.20	68.20	13.40	150	299	Vertical
2	5733.549	39.51	56.73	17.22	68.20	11.47	150	281	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.033	27.45	17.20	44.65	54.00	9.35	150	299	Vertical
2	5733.549	29.50	17.22	46.72	54.00	7.28	150	281	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5190	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:06:04

Test Graph

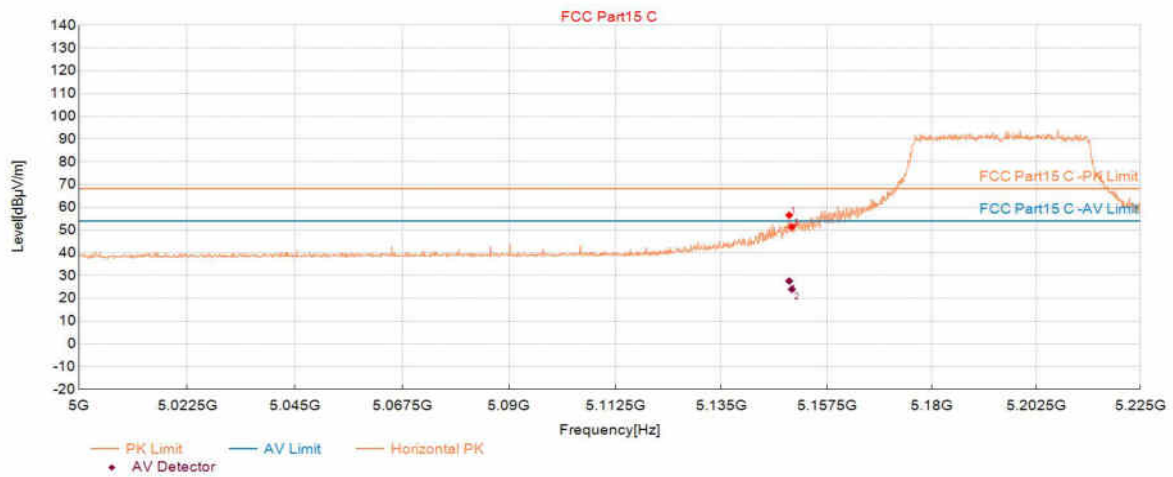

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.475	62.13	56.53	-5.60	68.20	11.67	150	250	Horizontal
2	5150.038	56.96	51.37	-5.59	68.20	16.83	150	250	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.475	33.21	-5.60	27.61	54.00	26.39	150	250	Horizontal
2	5150.038	29.56	-5.59	23.97	54.00	30.03	150	250	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5190	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:06:50

Test Graph

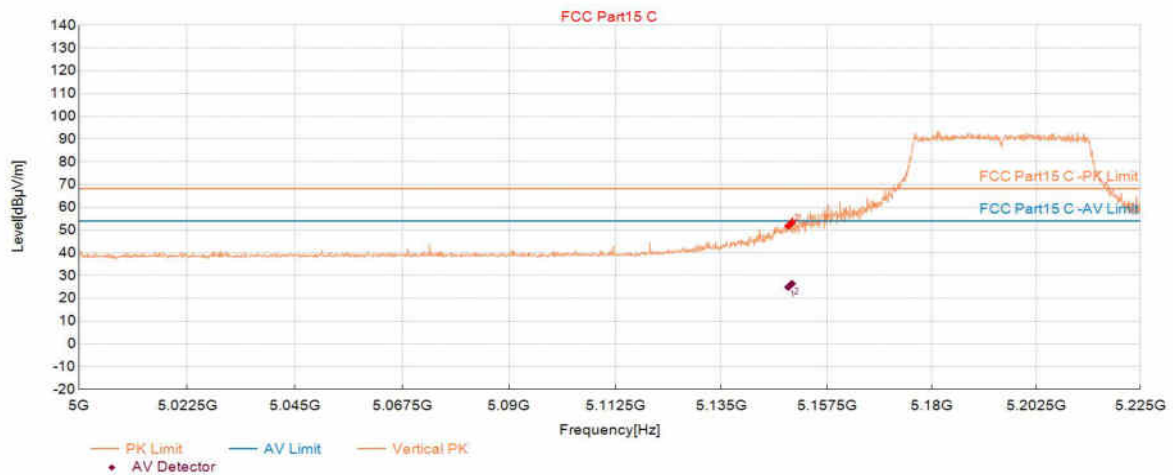

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.250	57.39	51.79	-5.60	68.20	16.41	150	223	Vertical
2	5150.038	58.88	53.29	-5.59	68.20	14.91	150	223	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.250	30.52	-5.60	24.92	54.00	29.08	150	223	Vertical
2	5150.038	32.00	-5.59	26.41	54.00	27.59	150	223	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5310	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:52:02

Test Graph

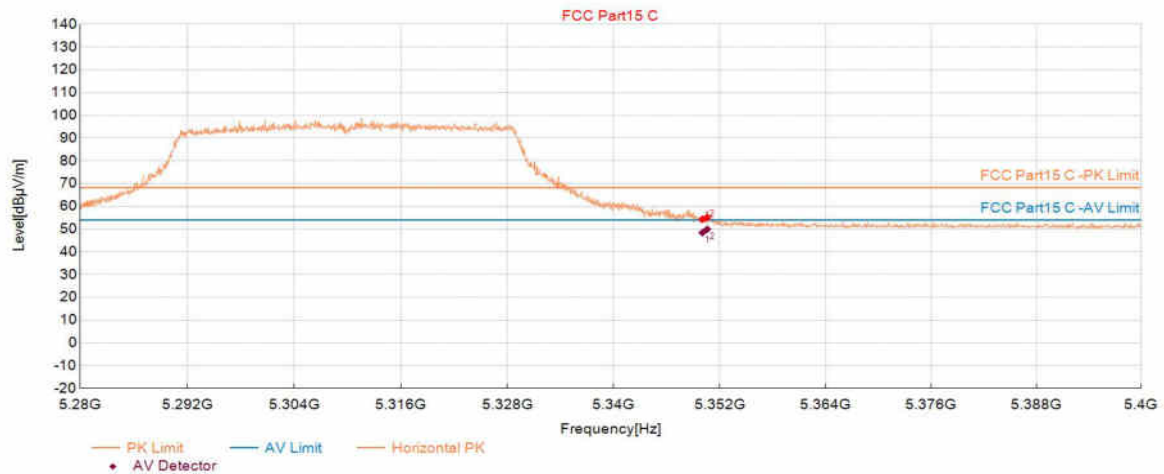

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	38.05	54.34	16.29	68.20	13.86	150	289	Horizontal
2	5350.595	38.89	55.18	16.29	68.20	13.02	150	332	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	32.14	16.29	48.43	54.00	5.57	150	289	Horizontal
2	5350.595	33.64	16.29	49.93	54.00	4.07	150	332	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5310	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:52:47

Test Graph

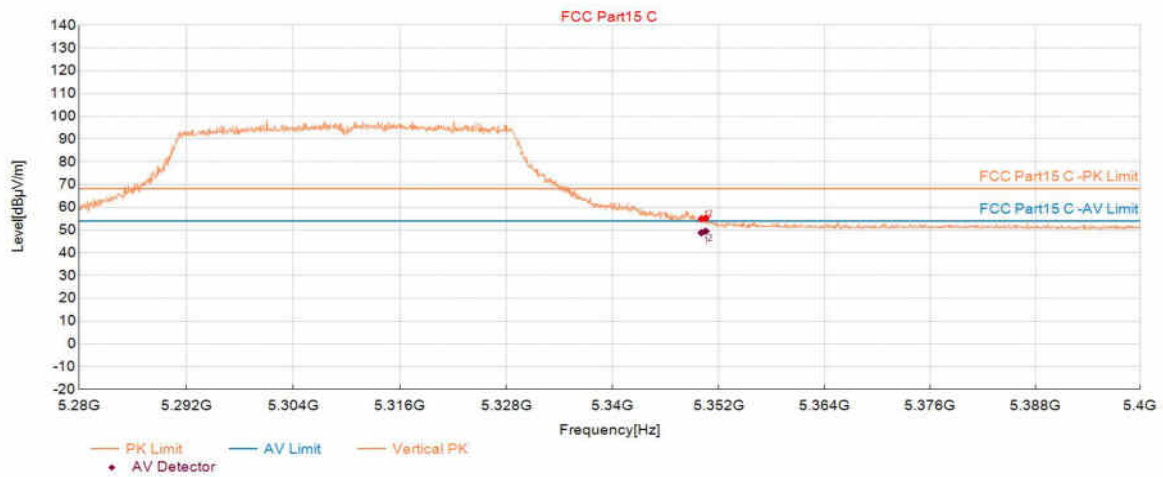

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	38.66	54.95	16.29	68.20	13.25	150	289	Vertical
2	5350.535	38.95	55.24	16.29	68.20	12.96	150	6	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.055	32.54	16.29	48.83	54.00	5.17	150	289	Vertical
2	5350.535	33.21	16.29	49.50	54.00	4.50	150	6	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5510	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:54:48

Test Graph

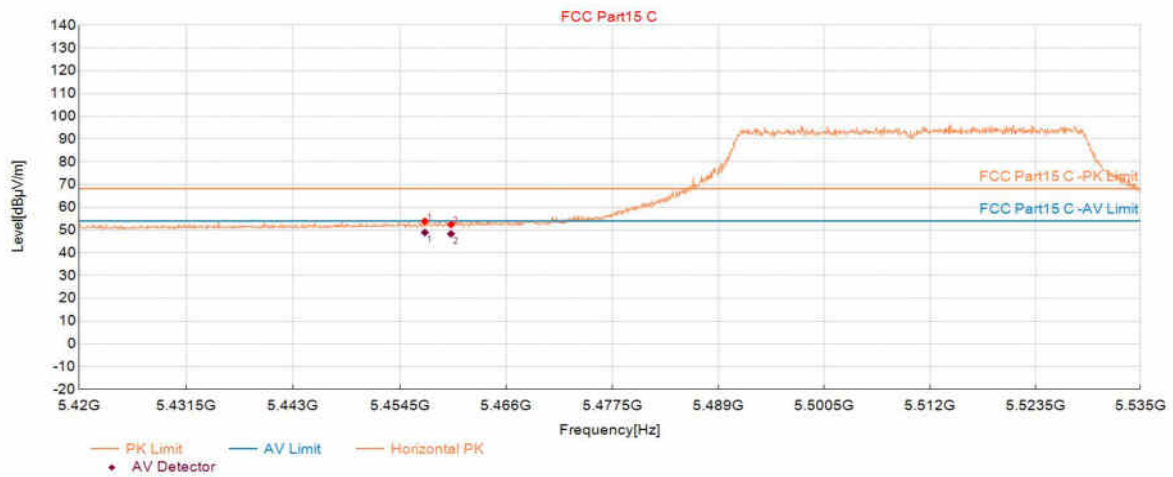

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.221	37.16	53.89	16.73	68.20	14.31	150	304	Horizontal
2	5460.040	35.67	52.41	16.74	68.20	15.79	150	182	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.221	32.21	16.73	48.94	54.00	5.06	150	304	Horizontal
2	5460.040	31.59	16.74	48.33	54.00	5.67	150	182	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5510	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 18:55:33

Test Graph

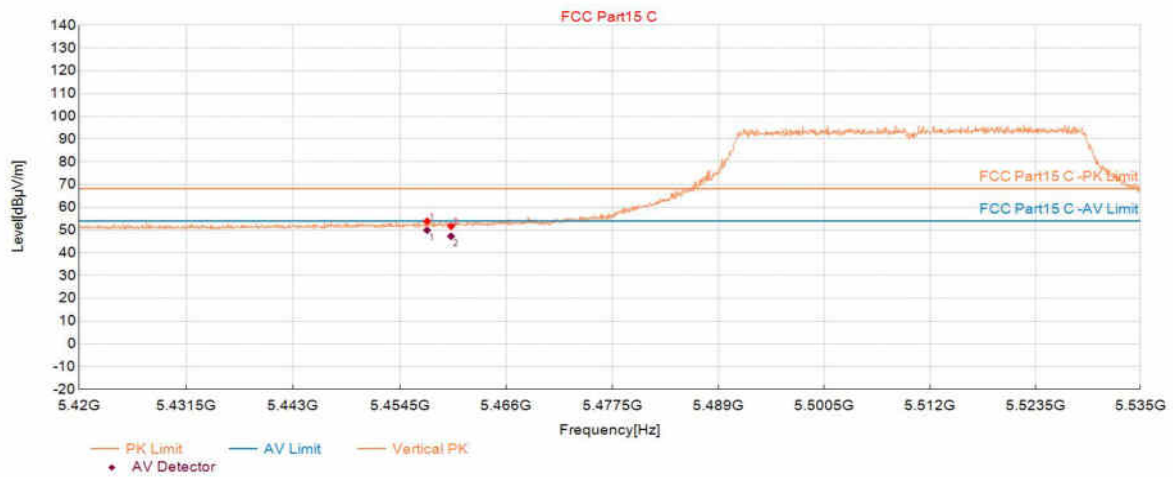

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.451	37.15	53.88	16.73	68.20	14.32	150	264	Vertical
2	5460.040	34.96	51.70	16.74	68.20	16.50	150	190	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.451	33.21	16.73	49.94	54.00	4.06	150	264	Vertical
2	5460.040	30.54	16.74	47.28	54.00	6.72	150	190	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5670	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:01:54

Test Graph

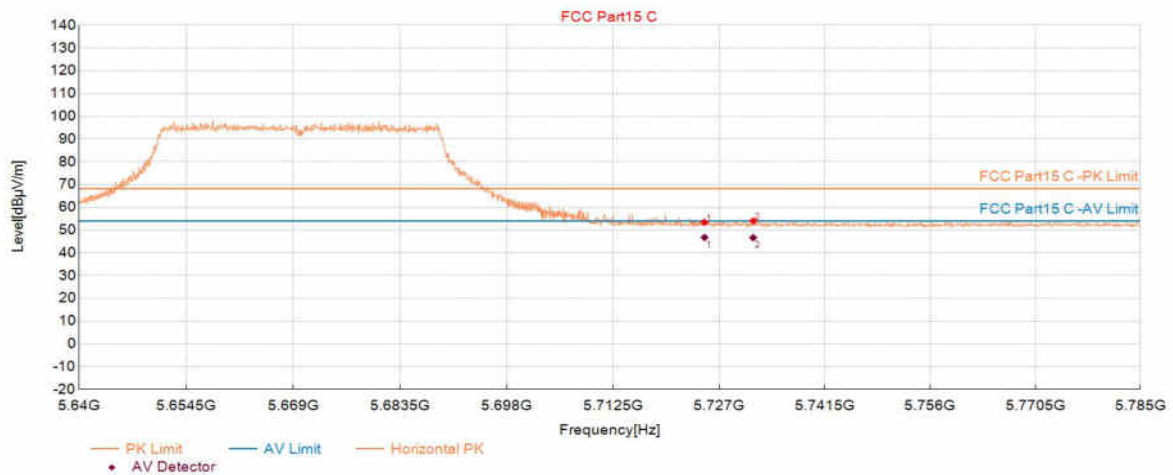

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	36.21	53.41	17.20	68.20	14.79	150	241	Horizontal
2	5731.686	36.73	53.95	17.22	68.20	14.25	150	298	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	29.54	17.20	46.74	54.00	7.26	150	241	Horizontal
2	5731.686	29.44	17.22	46.66	54.00	7.34	150	298	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5670	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:02:40

Test Graph

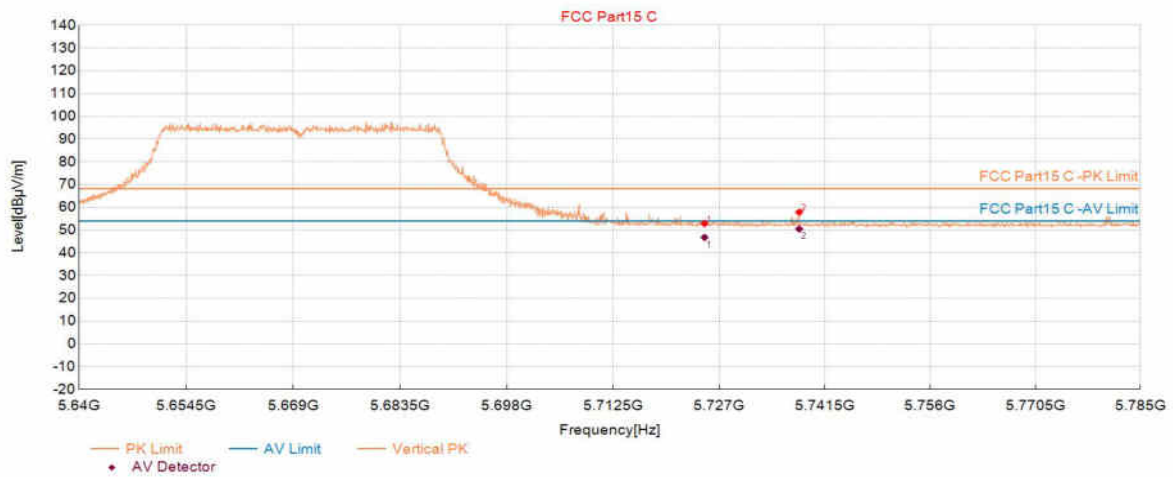

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	35.65	52.85	17.20	68.20	15.35	150	119	Vertical
2	5737.996	40.63	57.87	17.24	68.20	10.33	150	177	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.013	29.58	17.20	46.78	54.00	7.22	150	119	Vertical
2	5737.996	33.25	17.24	50.49	54.00	3.51	150	177	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5210	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:06:00

Test Graph

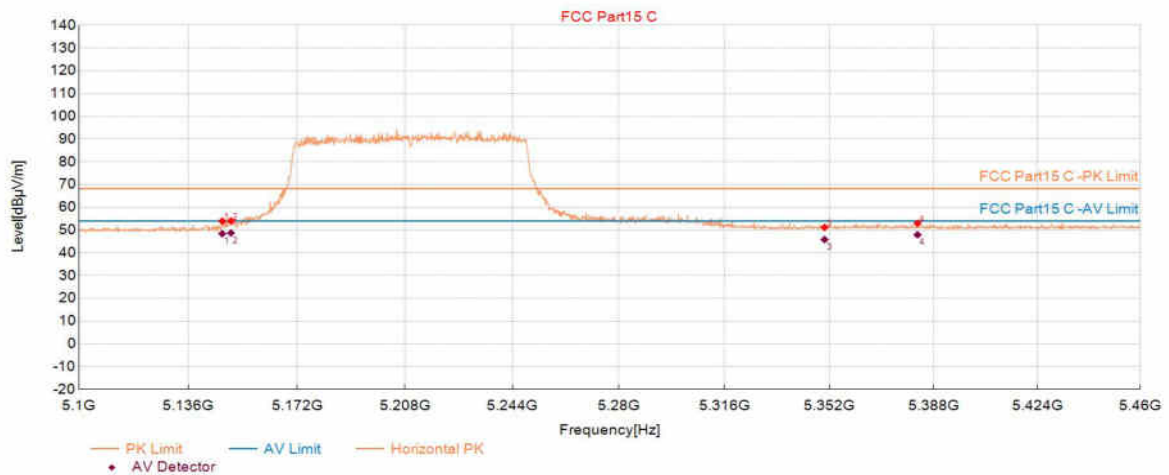

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.184	38.74	53.93	15.19	68.20	14.27	150	336	Horizontal
2	5150.065	38.79	54.00	15.21	68.20	14.20	150	248	Horizontal
3	5350.325	34.89	51.18	16.29	68.20	17.02	150	184	Horizontal
4	5382.381	36.51	52.95	16.44	68.20	15.25	150	358	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.184	33.25	15.19	48.44	54.00	5.56	150	336	Horizontal
2	5150.065	33.54	15.21	48.75	54.00	5.25	150	248	Horizontal
3	5350.325	29.54	16.29	45.83	54.00	8.17	150	184	Horizontal
4	5382.381	31.48	16.44	47.92	54.00	6.08	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5210	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:06:45

Test Graph

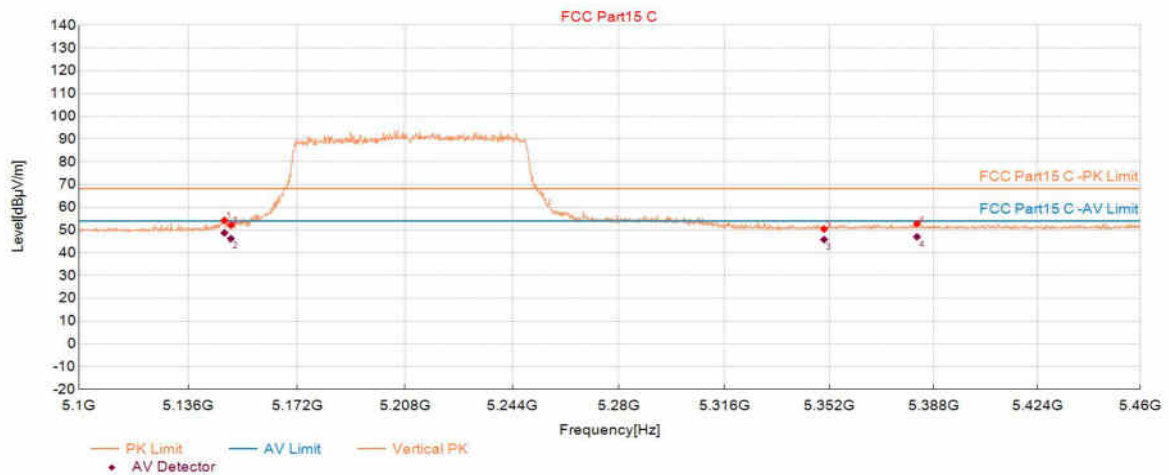

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.904	39.04	54.23	15.19	68.20	13.97	150	296	Vertical
2	5150.065	36.90	52.11	15.21	68.20	16.09	150	337	Vertical
3	5350.145	34.16	50.45	16.29	68.20	17.75	150	330	Vertical
4	5382.201	36.37	52.81	16.44	68.20	15.39	150	6	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.904	33.56	15.19	48.75	54.00	5.25	150	296	Vertical
2	5150.065	31.05	15.21	46.26	54.00	7.74	150	337	Vertical
3	5350.145	29.54	16.29	45.83	54.00	8.17	150	330	Vertical
4	5382.201	30.58	16.44	47.02	54.00	6.98	150	6	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5290	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:09:33

Test Graph

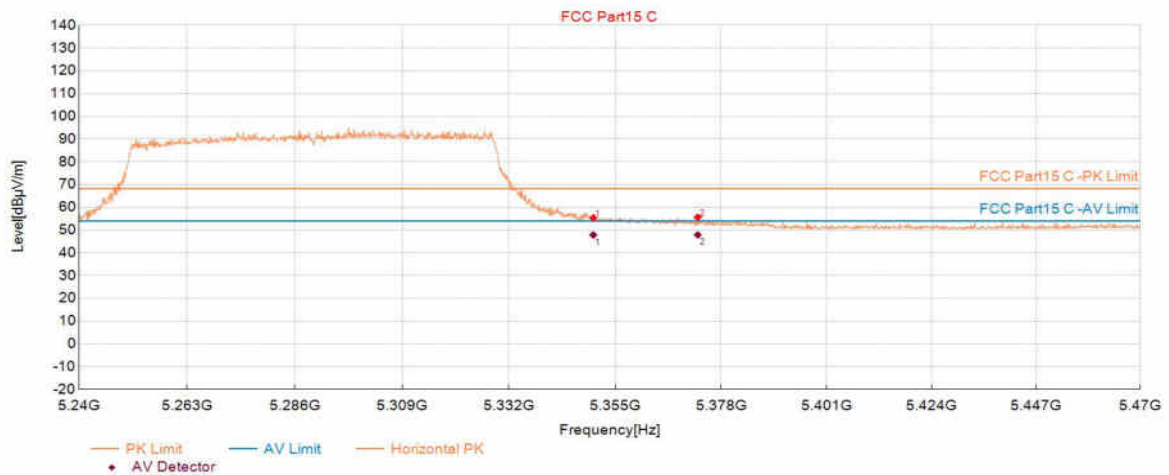

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.225	39.07	55.36	16.29	68.20	12.84	150	342	Horizontal
2	5372.891	39.22	55.62	16.40	68.20	12.58	150	272	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.225	31.56	16.29	47.85	54.00	6.15	150	342	Horizontal
2	5372.891	31.48	16.40	47.88	54.00	6.12	150	272	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5290	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:10:19

Test Graph

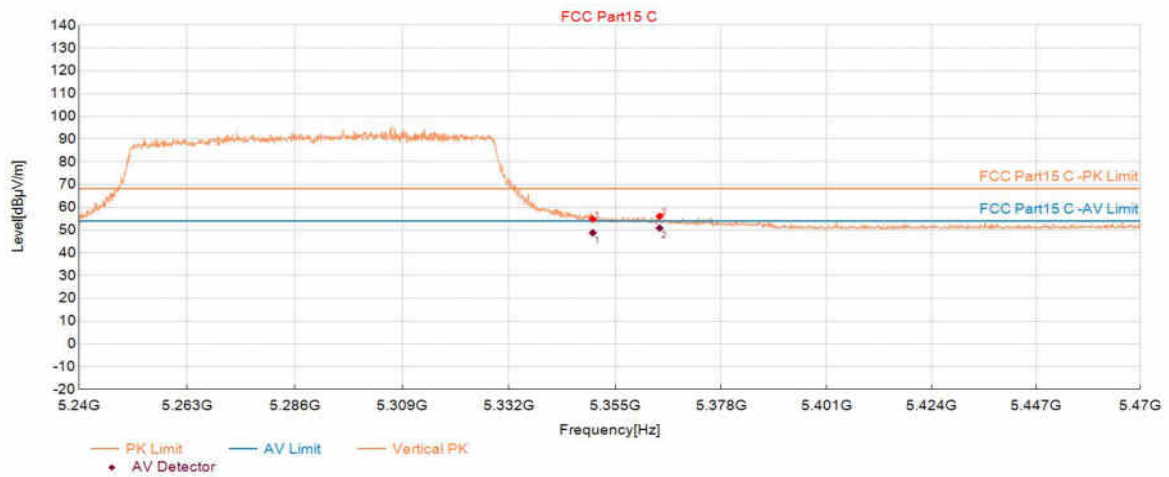

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.110	38.56	54.85	16.29	68.20	13.35	150	330	Vertical
2	5364.607	39.68	56.04	16.36	68.20	12.16	150	239	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.110	32.54	16.29	48.83	54.00	5.17	150	330	Vertical
2	5364.607	34.52	16.36	50.88	54.00	3.12	150	239	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5530	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:12:50

Test Graph

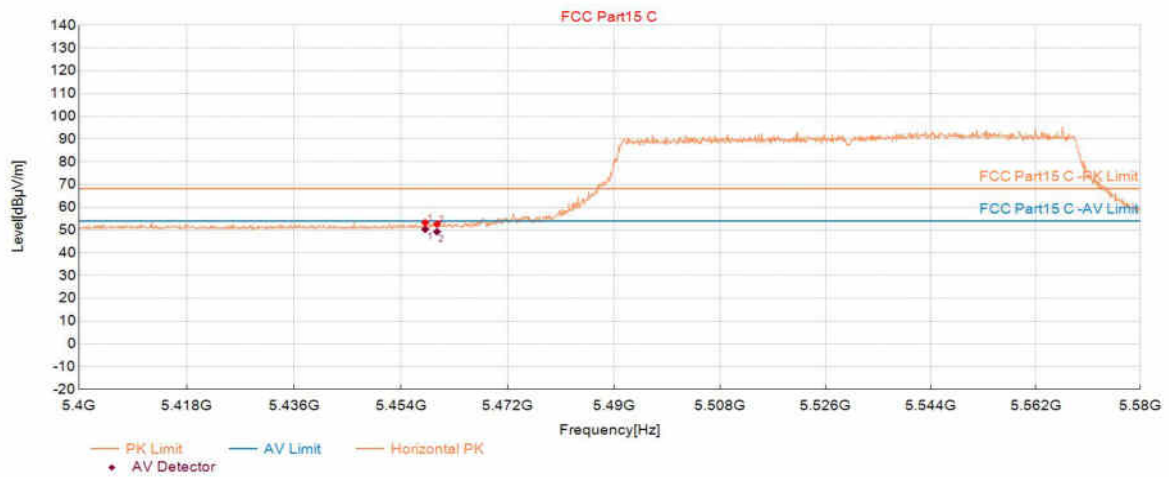

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.079	36.53	53.26	16.73	68.20	14.94	150	191	Horizontal
2	5460.060	35.94	52.68	16.74	68.20	15.52	150	200	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.079	33.59	16.73	50.32	54.00	3.68	150	191	Horizontal
2	5460.060	32.54	16.74	49.28	54.00	4.72	150	200	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5530	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:13:35

Test Graph

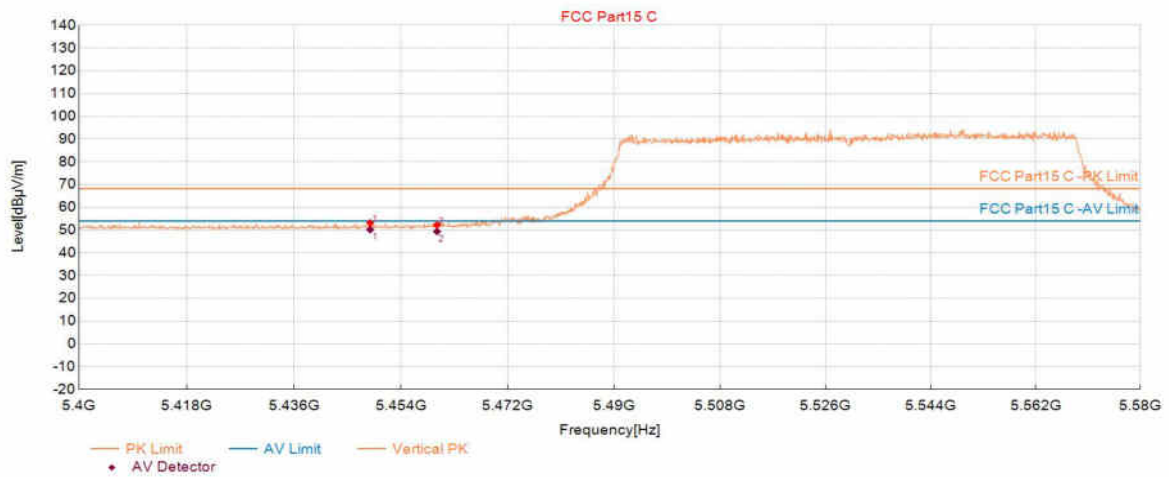

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5448.804	36.45	53.15	16.70	68.20	15.05	150	101	Vertical
2	5460.060	35.51	52.25	16.74	68.20	15.95	150	4	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5448.804	33.52	16.70	50.22	54.00	3.78	150	101	Vertical
2	5460.060	32.65	16.74	49.39	54.00	4.61	150	4	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5610	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:15:53

Test Graph

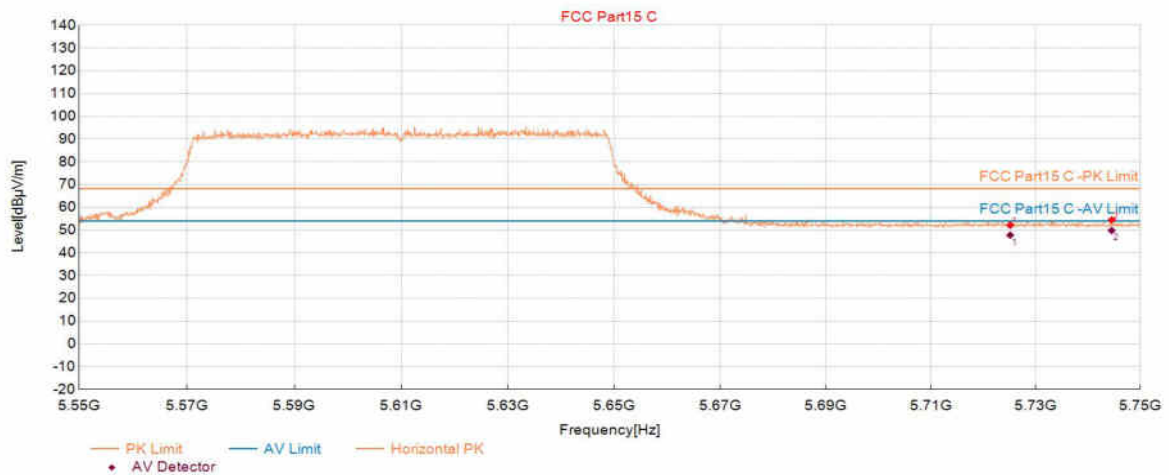

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	34.95	52.15	17.20	68.20	16.05	150	167	Horizontal
2	5744.497	37.16	54.43	17.27	68.20	13.77	150	45	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	30.59	17.20	47.79	54.00	6.21	150	167	Horizontal
2	5744.497	32.55	17.27	49.82	54.00	4.18	150	45	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5610	Voltage:	
Environment:	23.5°C/41%	Engineer:	
Remark:			

Start of Test:2025-12-16 19:16:39

Test Graph

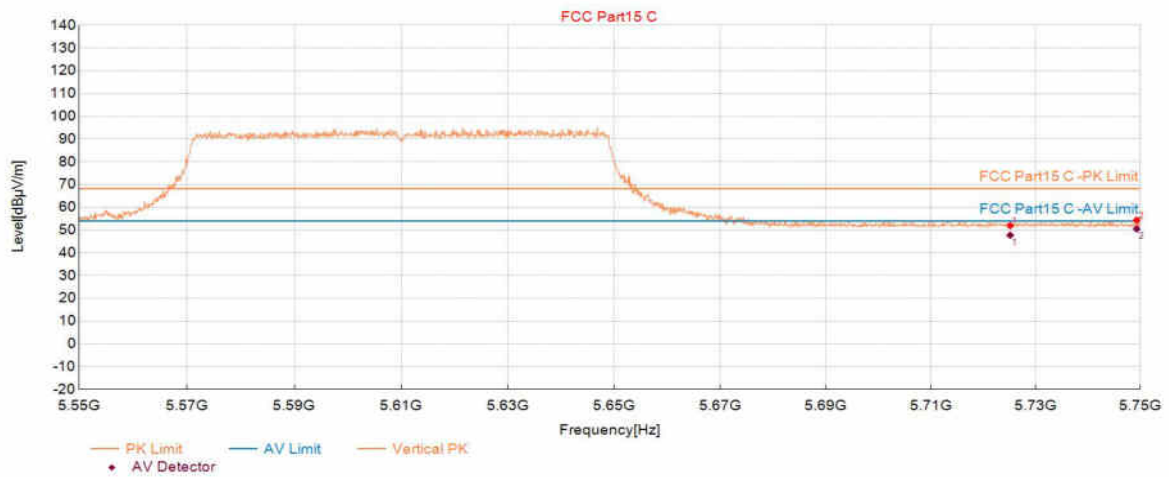

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	34.76	51.96	17.20	68.20	16.24	150	192	Vertical
2	5749.300	37.07	54.35	17.28	68.20	13.85	150	38	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.088	30.54	17.20	47.74	54.00	6.26	150	192	Vertical
2	5749.300	33.24	17.28	50.52	54.00	3.48	150	38	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 21:51:08

Test Graph

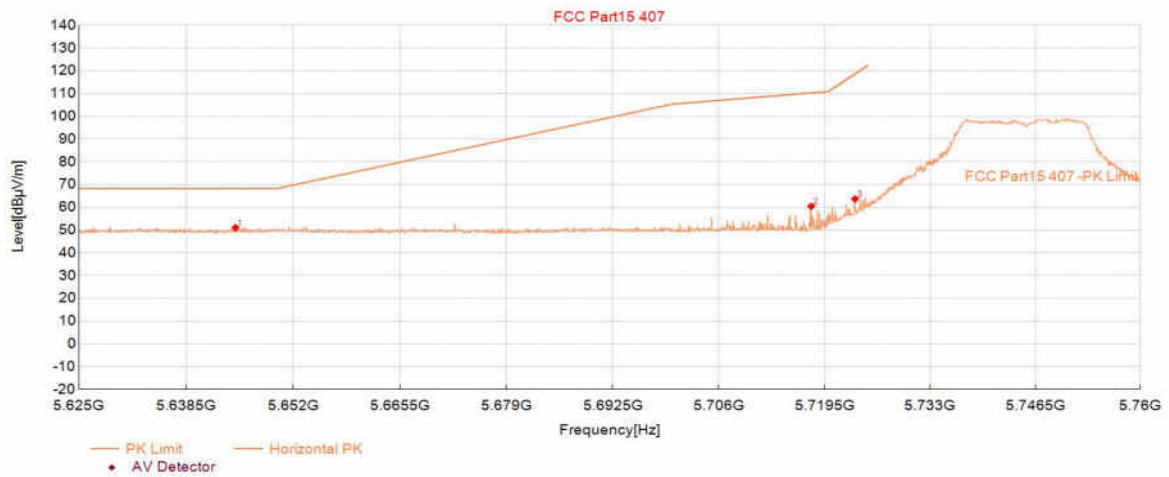

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5644.720	34.09	51.09	17.00	68.30	17.21	150	2	Horizontal
2	5717.791	43.24	60.41	17.17	110.28	49.87	150	138	Horizontal
3	5723.397	46.49	63.68	17.19	118.65	54.97	150	128	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 21:52:05

Test Graph

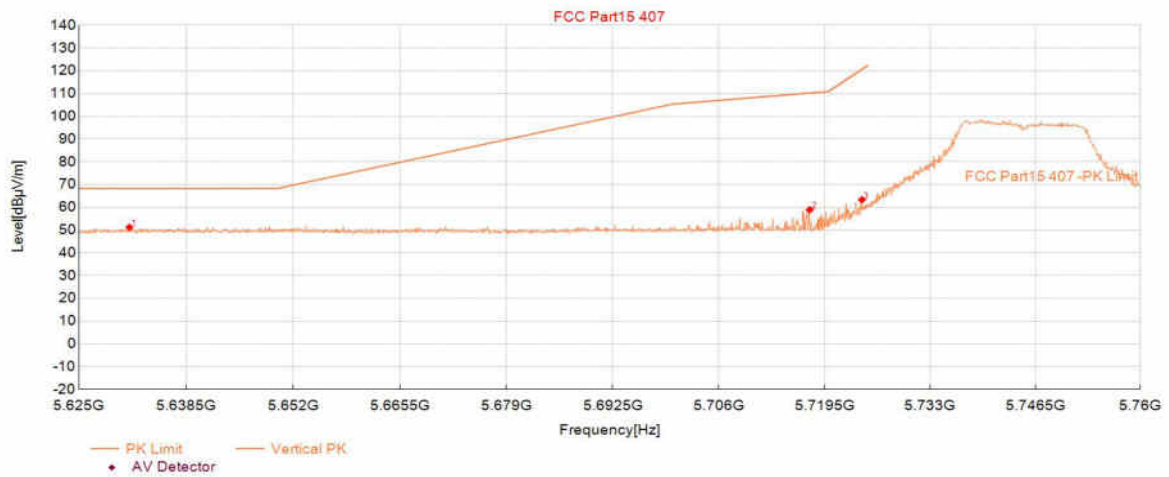

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5631.348	34.24	51.21	16.97	68.30	17.09	150	149	Vertical
2	5717.589	41.74	58.91	17.17	110.23	51.32	150	190	Vertical
3	5724.275	46.12	63.31	17.19	120.65	57.34	150	215	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 21:57:10

Test Graph

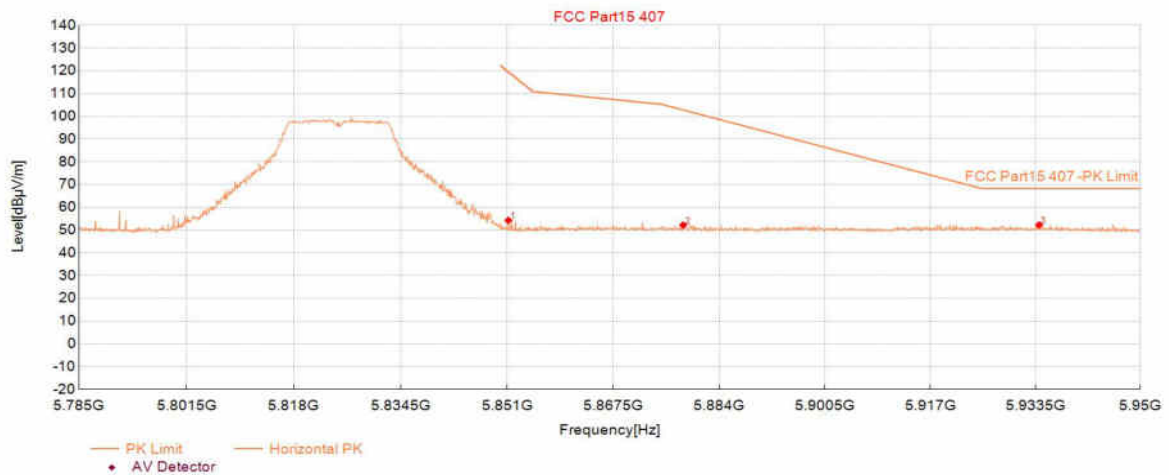

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5851.198	36.66	54.28	17.62	119.57	65.29	150	128	Horizontal
2	5878.354	34.54	52.24	17.70	102.81	50.57	150	128	Horizontal
3	5934.070	34.42	52.30	17.88	68.30	16.00	150	307	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11A_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 21:58:07

Test Graph

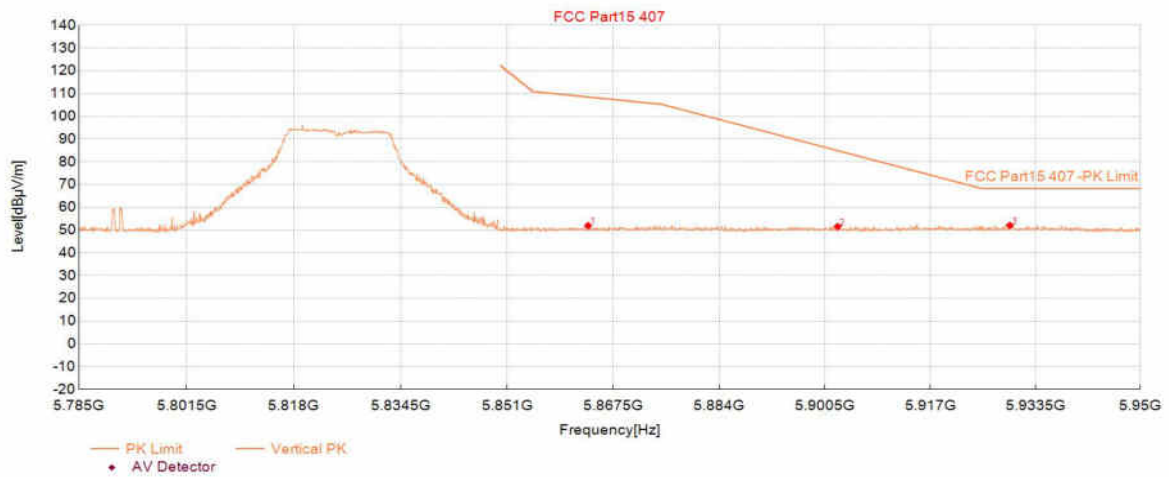

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5863.579	34.31	51.97	17.66	108.50	56.53	150	357	Vertical
2	5902.456	33.76	51.54	17.78	84.94	33.40	150	200	Vertical
3	5929.447	34.21	52.08	17.87	68.30	16.22	150	345	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level