


Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 22:56:05

Test Graph

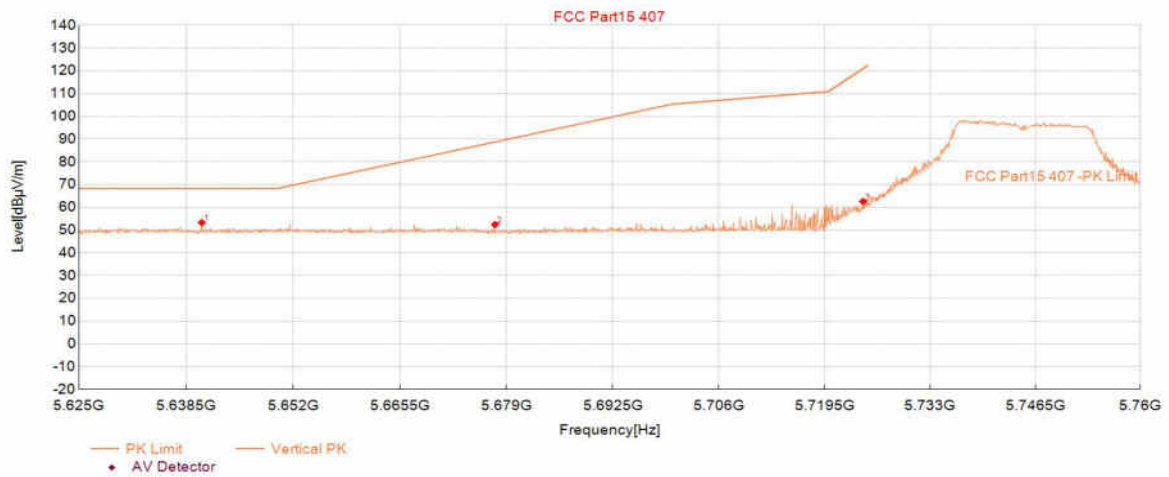

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5640.465	36.28	53.27	16.99	68.30	15.03	150	223	Vertical
2	5677.541	35.37	52.43	17.06	88.72	36.29	150	190	Vertical
3	5724.410	45.38	62.57	17.19	120.95	58.38	150	0	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:03:19

Test Graph

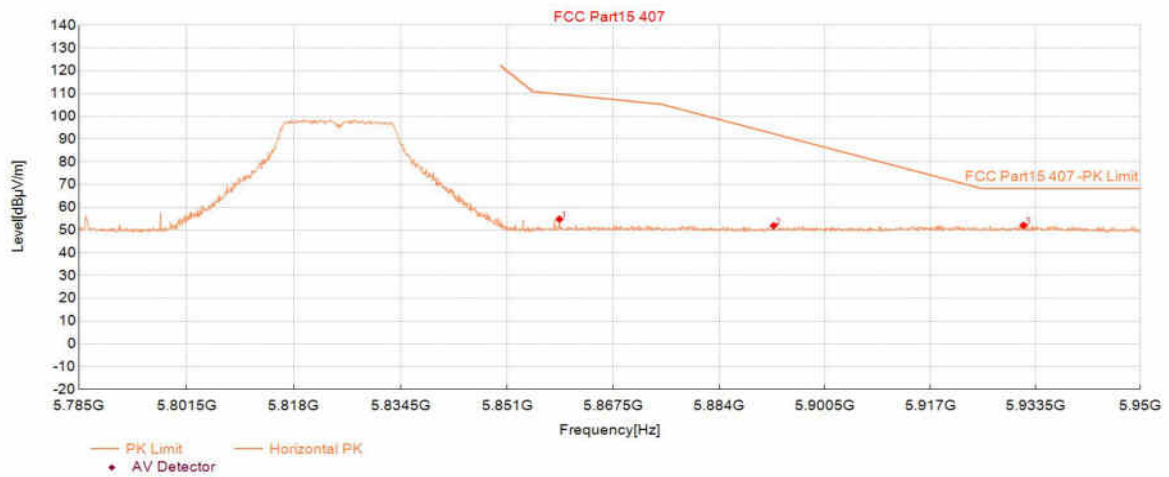

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5859.122	37.14	54.79	17.65	109.74	54.95	150	151	Horizontal
2	5892.469	34.19	51.93	17.74	92.34	40.41	150	134	Horizontal
3	5931.593	34.21	52.08	17.87	68.30	16.22	150	338	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N20_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:04:16

Test Graph

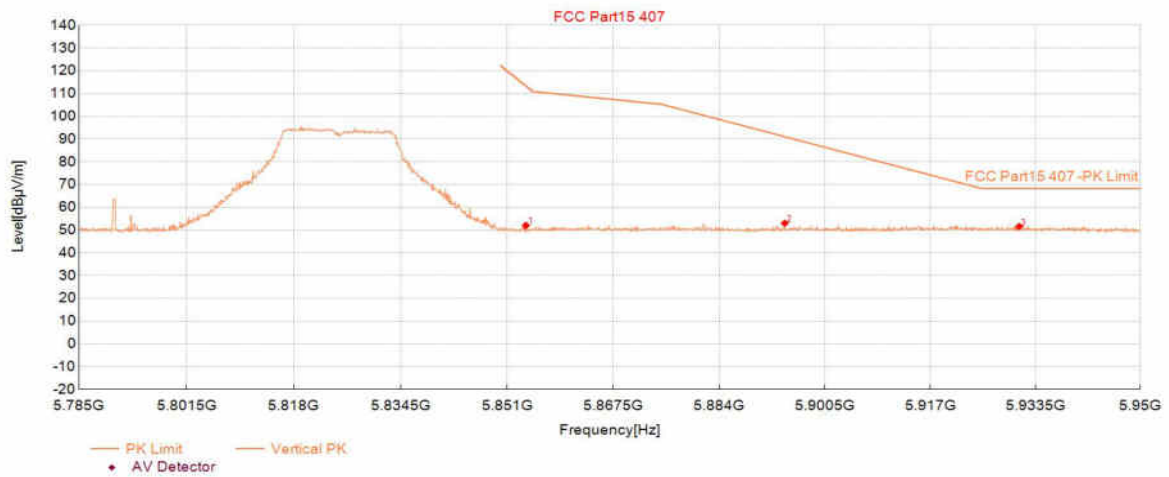

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5853.922	34.41	52.04	17.63	113.36	61.32	150	198	Vertical
2	5894.202	35.25	53.00	17.75	91.05	38.05	150	118	Vertical
3	5930.933	33.72	51.59	17.87	68.30	16.71	150	191	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5755	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:08:50

Test Graph

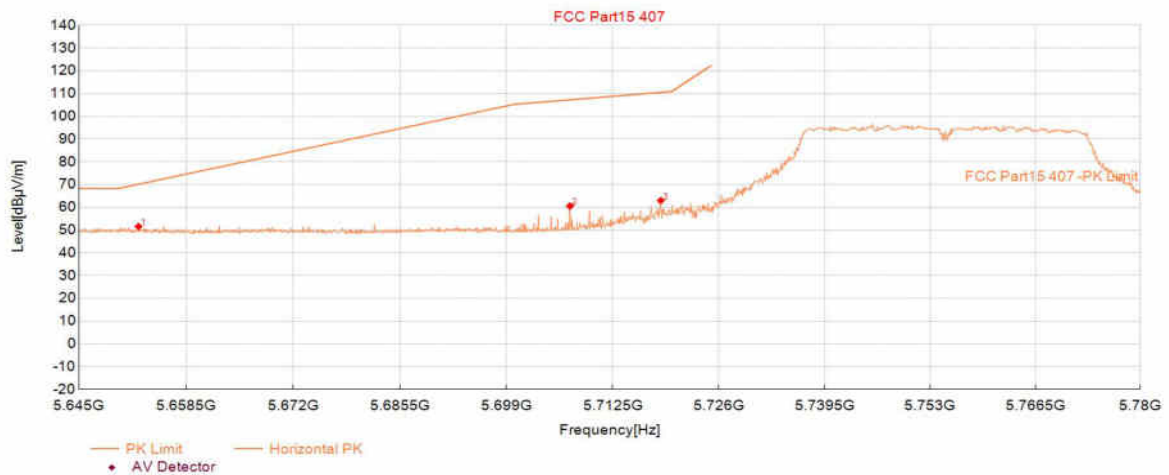

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5652.496	34.57	51.58	17.01	70.15	18.57	150	296	Horizontal
2	5707.064	43.43	60.56	17.13	107.28	46.72	150	101	Horizontal
3	5718.612	45.81	62.98	17.17	110.51	47.53	150	118	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5755	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:09:48

Test Graph

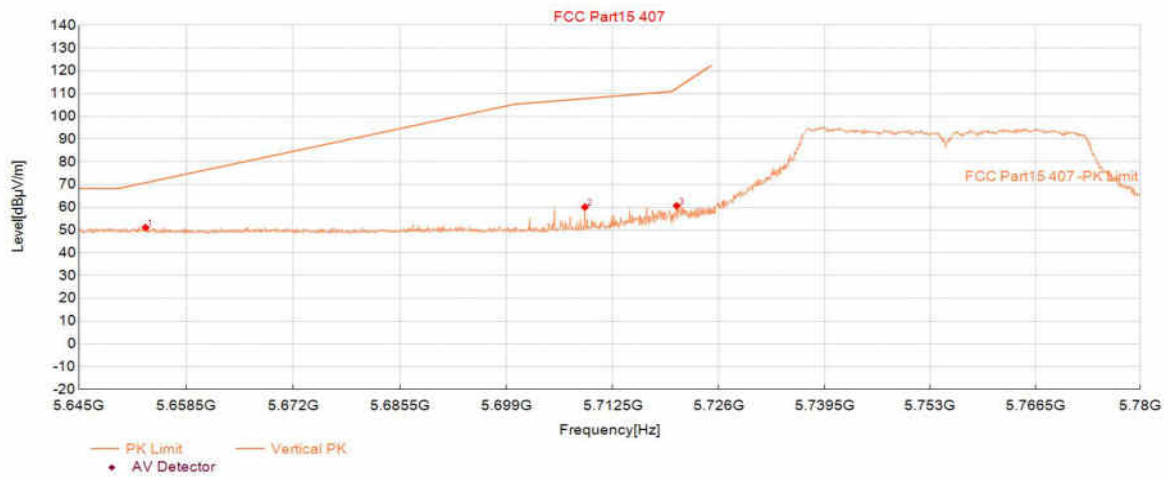

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5653.374	34.13	51.14	17.01	70.81	19.67	150	0	Vertical
2	5708.954	42.98	60.11	17.13	107.81	47.70	150	10	Vertical
3	5720.638	43.50	60.68	17.18	112.35	51.67	150	3	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5795	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:11:54

Test Graph

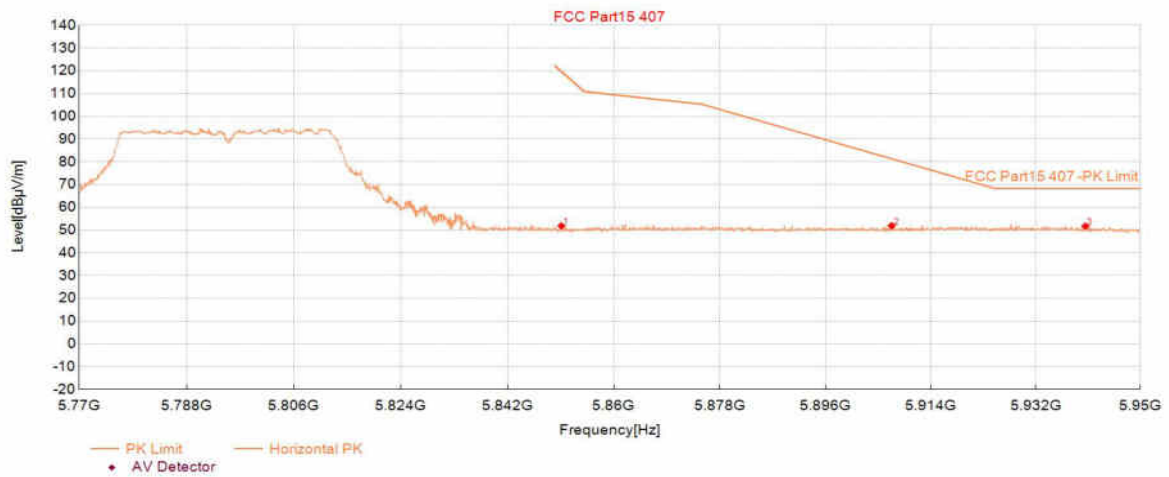

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5851.131	34.23	51.85	17.62	119.72	67.87	150	12	Horizontal
2	5907.319	34.11	51.91	17.80	81.35	29.44	150	6	Horizontal
3	5940.545	33.82	51.72	17.90	68.30	16.58	150	142	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11N40_5795	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:12:51

Test Graph

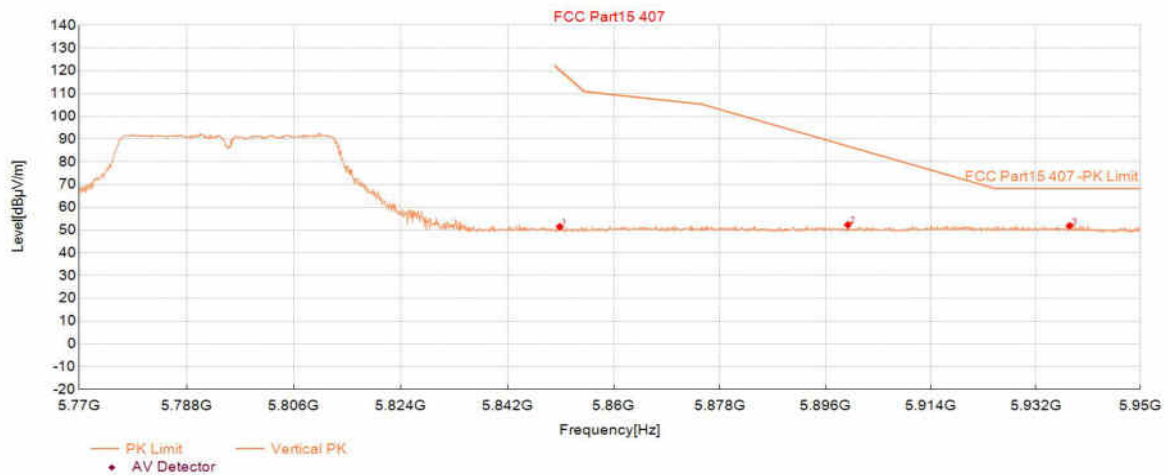

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5850.860	33.86	51.48	17.62	120.34	68.86	150	214	Vertical
2	5899.845	34.56	52.33	17.77	86.88	34.55	150	118	Vertical
3	5937.844	34.02	51.91	17.89	68.30	16.39	150	166	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:20:05

Test Graph

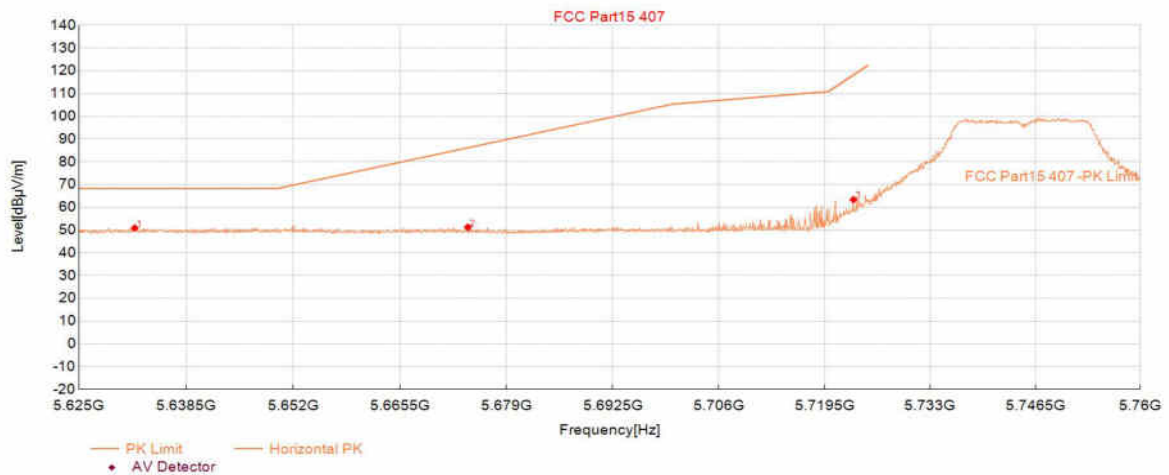

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5632.024	33.98	50.95	16.97	68.30	17.35	150	30	Horizontal
2	5674.097	34.21	51.26	17.05	86.17	34.91	150	95	Horizontal
3	5723.194	46.23	63.41	17.18	118.18	54.77	150	143	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:21:03

Test Graph

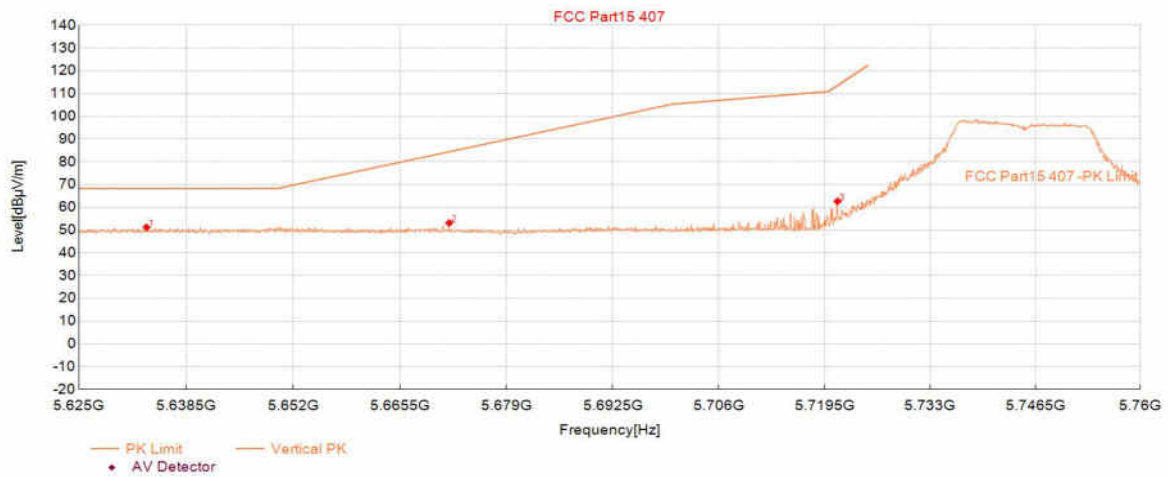

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5633.509	34.29	51.26	16.97	68.30	17.04	150	241	Vertical
2	5671.733	36.08	53.13	17.05	84.42	31.29	150	176	Vertical
3	5721.168	45.48	62.66	17.18	113.56	50.90	150	225	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:23:59

Test Graph

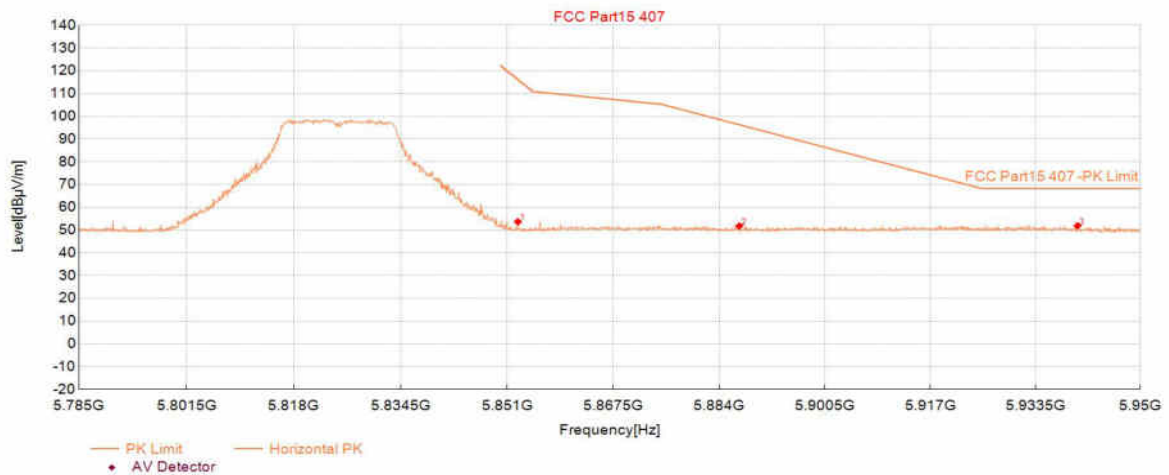

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5852.684	36.04	53.66	17.62	116.18	62.52	150	200	Horizontal
2	5887.104	34.05	51.78	17.73	96.31	44.53	150	160	Horizontal
3	5940.095	34.03	51.93	17.90	68.30	16.37	150	359	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC20_5825	Voltage:	
Environment:	24.8℃/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:24:56

Test Graph

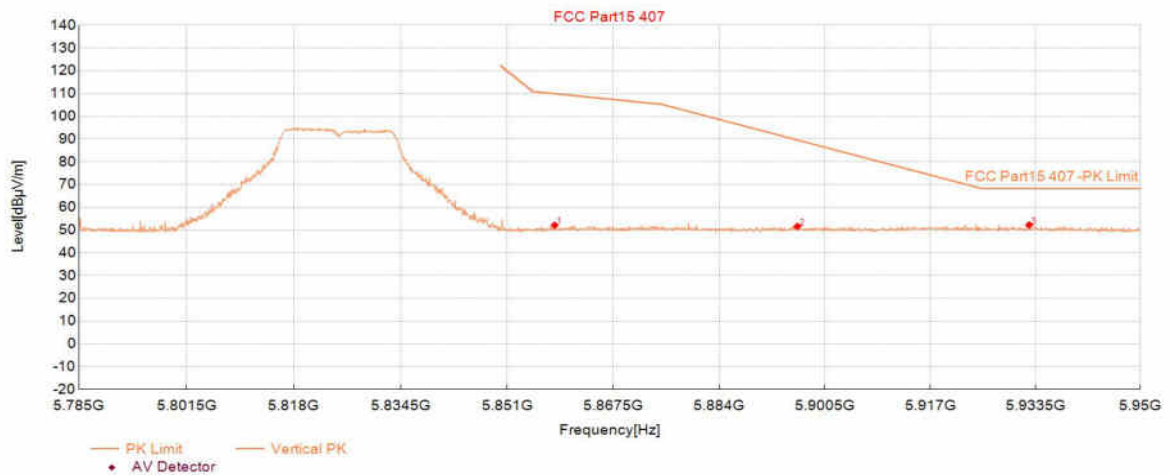

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5858.379	34.49	52.13	17.64	109.95	57.82	150	111	Vertical
2	5896.183	33.86	51.62	17.76	89.59	37.97	150	217	Vertical
3	5932.501	34.39	52.26	17.87	68.30	16.04	150	104	Vertical


Note1: $\text{Level} = \text{Reading} + \text{Factor}$, $\text{Margin} = \text{Limit} - \text{Level}$

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5755	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:28:09

Test Graph

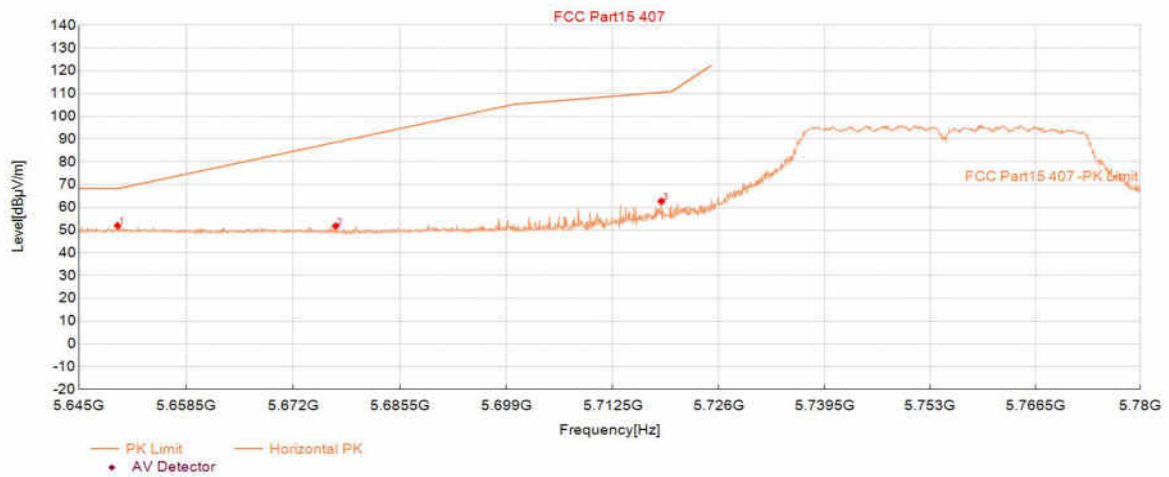

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5649.862	34.96	51.96	17.00	68.30	16.34	150	127	Horizontal
2	5677.349	34.71	51.77	17.06	88.58	36.81	150	127	Horizontal
3	5718.679	45.50	62.67	17.17	110.53	47.86	150	169	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5755	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:29:06

Test Graph

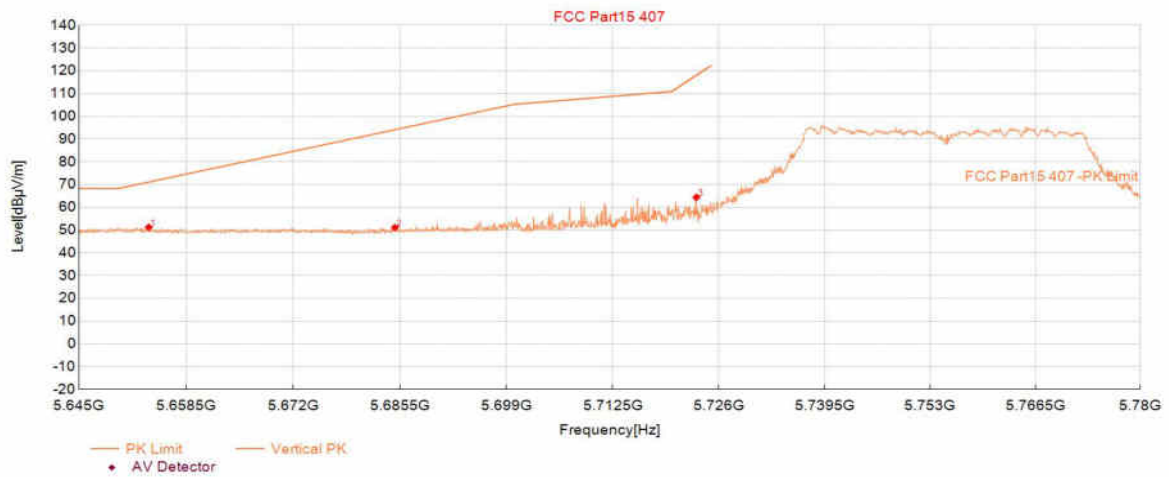

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5653.779	34.25	51.26	17.01	71.11	19.85	150	223	Vertical
2	5684.845	34.05	51.12	17.07	94.12	43.00	150	0	Vertical
3	5723.137	47.21	64.39	17.18	118.05	53.66	150	216	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5795	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:31:29

Test Graph

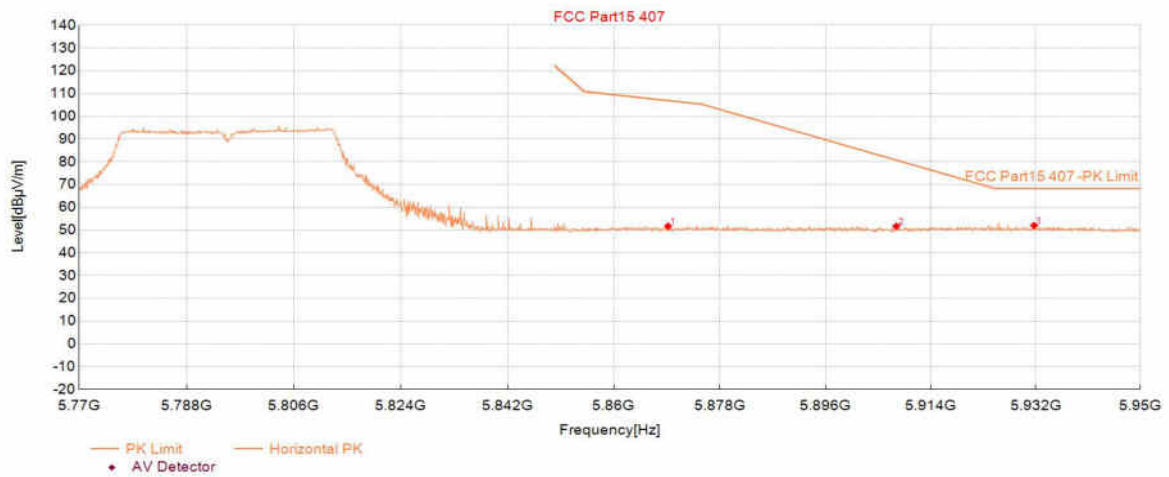

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5869.230	34.02	51.70	17.68	106.91	55.21	150	305	Horizontal
2	5908.129	33.89	51.69	17.80	80.75	29.06	150	349	Horizontal
3	5931.721	34.09	51.96	17.87	68.30	16.34	150	332	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC40_5795	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:32:26

Test Graph

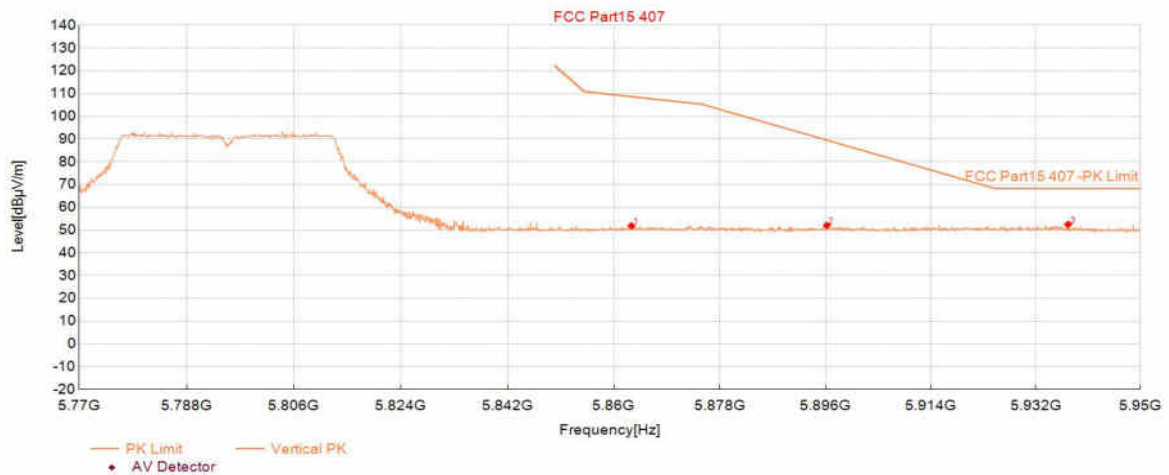

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5863.017	34.21	51.87	17.66	108.65	56.78	150	274	Vertical
2	5896.243	34.28	52.04	17.76	89.54	37.50	150	1	Vertical
3	5937.574	34.60	52.49	17.89	68.30	15.81	150	357	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5775	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:	powerset:18		

Start of Test:2026-01-12 23:44:12

Test Graph

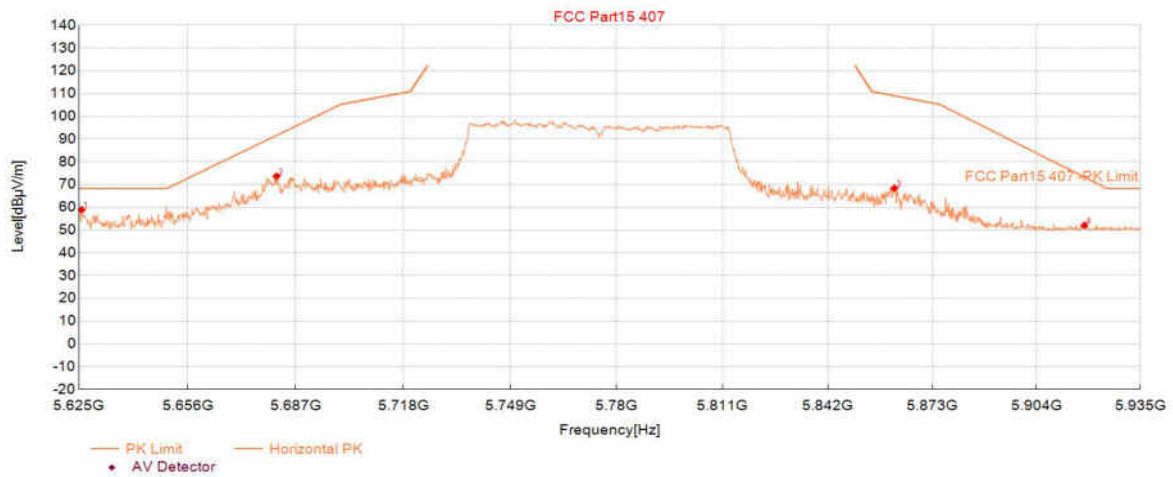

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5625.775	41.98	58.94	16.96	68.30	9.36	150	143	Horizontal
2	5681.448	56.59	73.65	17.06	91.61	17.96	150	126	Horizontal
3	5861.648	50.74	68.40	17.66	109.04	40.64	150	143	Horizontal
4	5918.252	34.29	52.12	17.83	73.28	21.16	150	167	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AC80_5775	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:	powerset:18		

Start of Test:2026-01-12 23:45:10

Test Graph

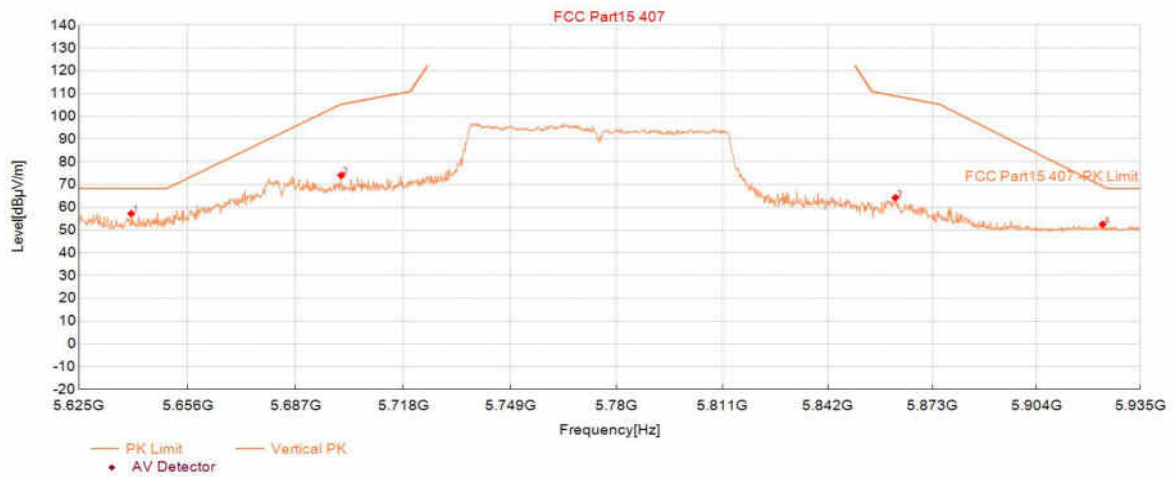

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5639.887	40.27	57.26	16.99	68.30	11.04	150	192	Vertical
2	5700.058	56.97	74.07	17.10	105.32	31.25	150	176	Vertical
3	5861.958	46.57	64.23	17.66	108.95	44.72	150	200	Vertical
4	5923.679	34.66	52.51	17.85	69.27	16.76	150	281	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:54:07

Test Graph

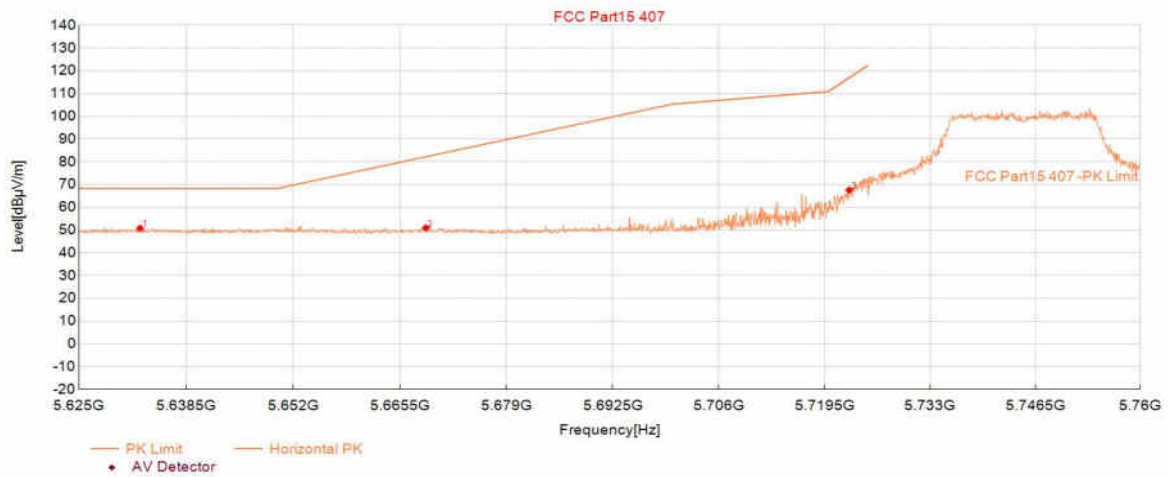

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5632.699	33.83	50.80	16.97	68.30	17.50	150	258	Horizontal
2	5668.762	33.87	50.91	17.04	82.22	31.31	150	250	Horizontal
3	5722.654	50.41	67.59	17.18	116.95	49.36	150	143	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5745	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:55:04

Test Graph

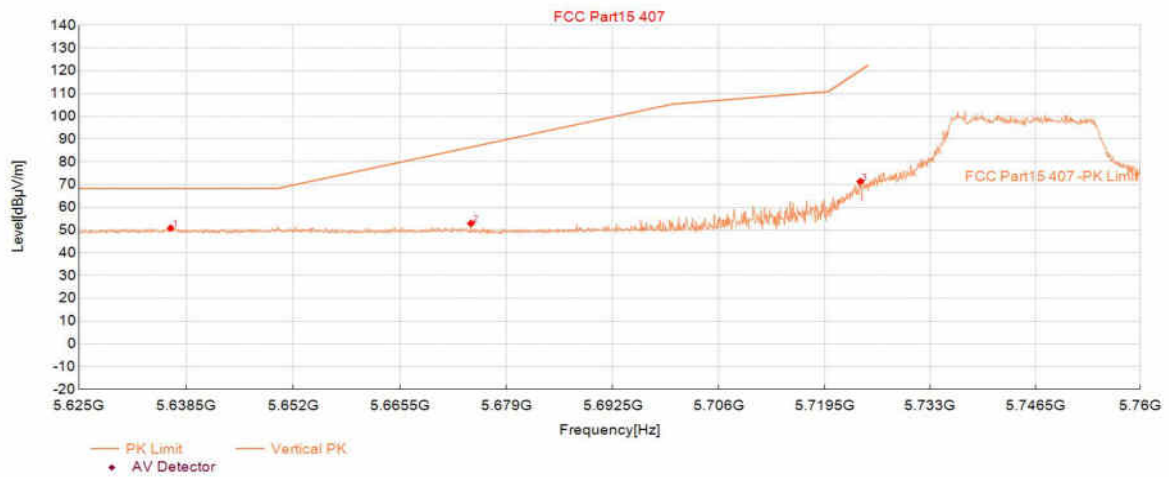

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5636.548	33.90	50.87	16.97	68.30	17.43	150	69	Vertical
2	5674.502	35.88	52.93	17.05	86.47	33.54	150	185	Vertical
3	5724.072	54.16	71.35	17.19	120.18	48.83	150	226	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:56:52

Test Graph

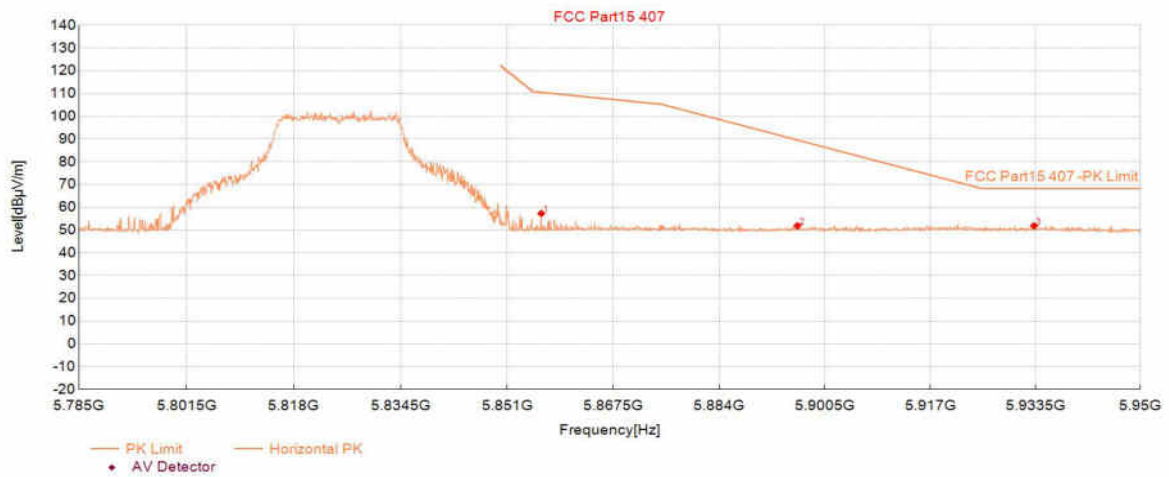

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5856.316	39.65	57.29	17.64	110.53	53.24	150	152	Horizontal
2	5896.183	34.14	51.90	17.76	89.59	37.69	150	169	Horizontal
3	5933.244	33.99	51.87	17.88	68.30	16.43	150	226	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX20_5825	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:57:49

Test Graph

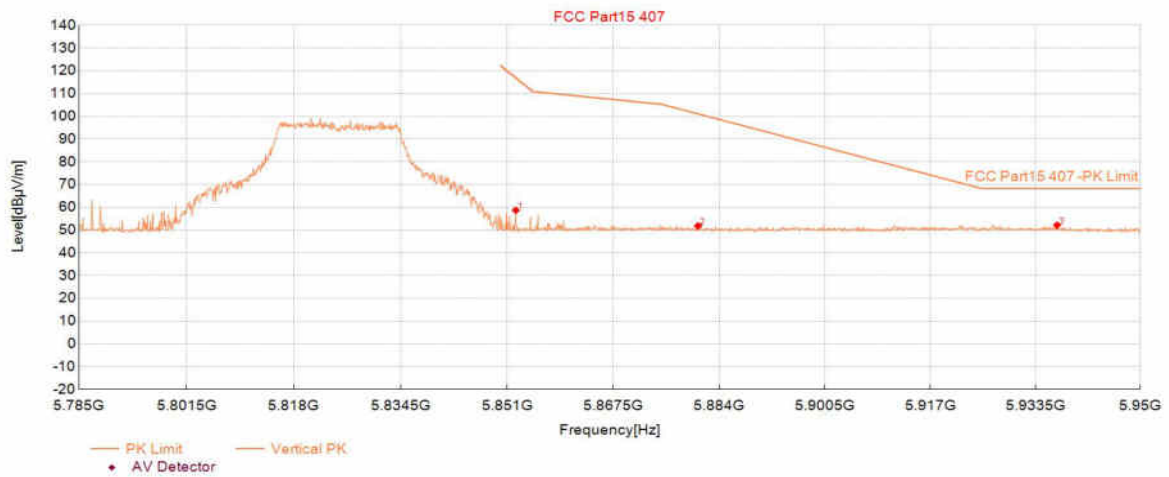

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5852.354	41.05	58.67	17.62	116.93	58.26	150	183	Vertical
2	5880.665	34.15	51.86	17.71	101.09	49.23	150	257	Vertical
3	5936.876	34.25	52.14	17.89	68.30	16.16	150	102	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5755	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-12 23:59:33

Test Graph

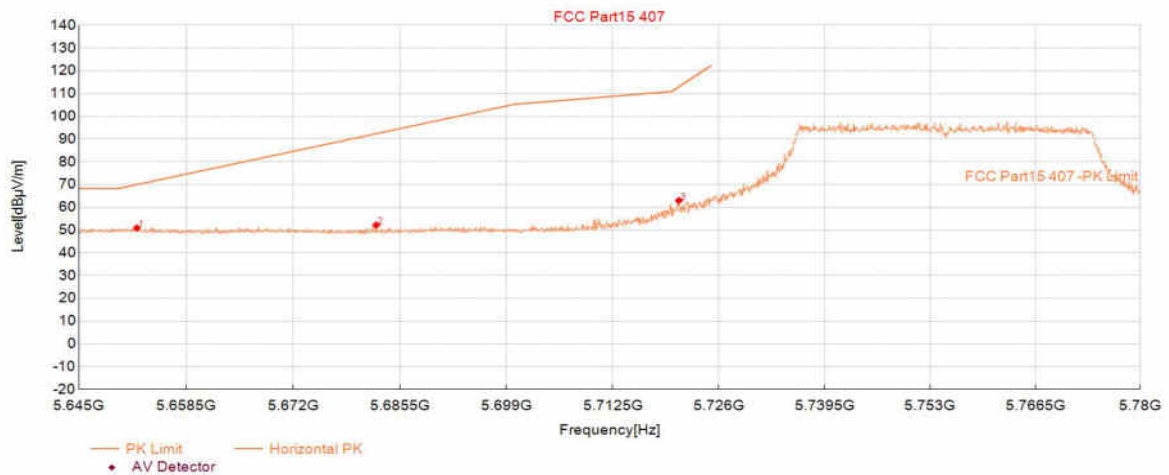

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5652.294	33.90	50.91	17.01	70.00	19.09	150	119	Horizontal
2	5682.481	35.12	52.18	17.06	92.37	40.19	150	160	Horizontal
3	5720.908	45.80	62.98	17.18	112.97	49.99	150	128	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5755	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-13 00:00:30

Test Graph

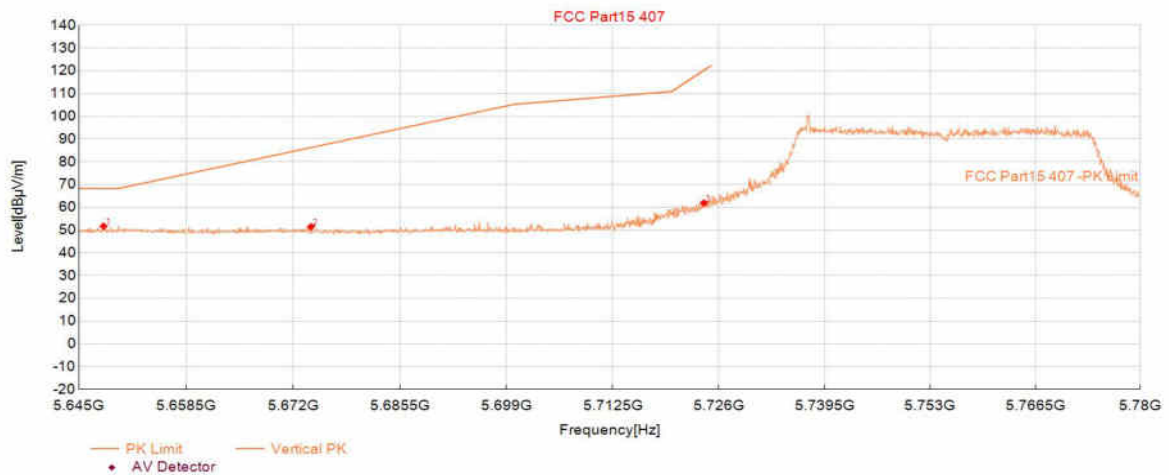

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5648.107	34.70	51.70	17.00	68.30	16.60	150	1	Vertical
2	5674.242	34.40	51.45	17.05	86.28	34.83	150	6	Vertical
3	5724.082	44.69	61.88	17.19	120.21	58.33	150	223	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5795	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-13 00:01:57

Test Graph

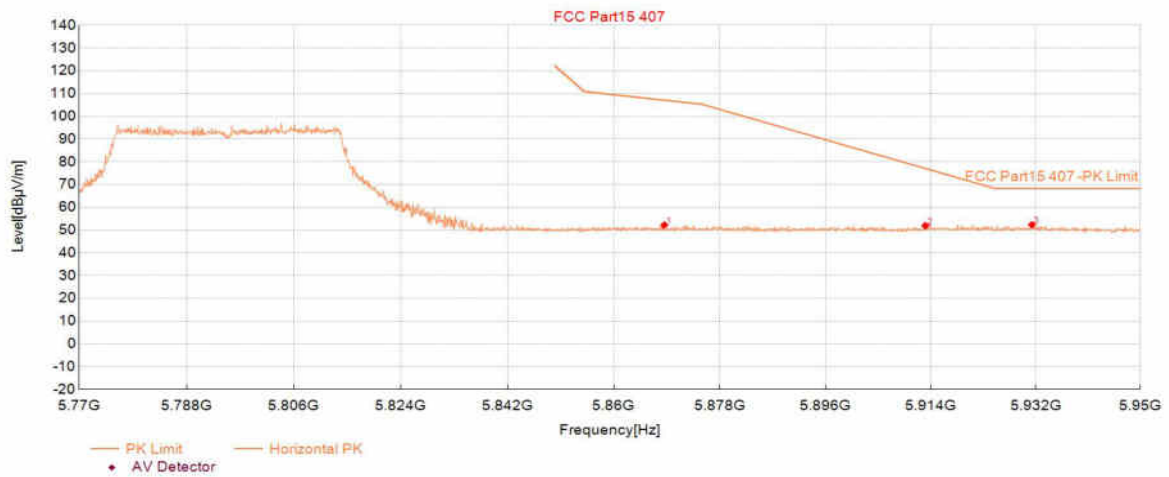

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5868.599	34.55	52.23	17.68	107.09	54.86	150	322	Horizontal
2	5913.082	34.11	51.92	17.81	77.09	25.17	150	184	Horizontal
3	5931.361	34.48	52.35	17.87	68.30	15.95	150	359	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX40_5795	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-13 00:02:55

Test Graph

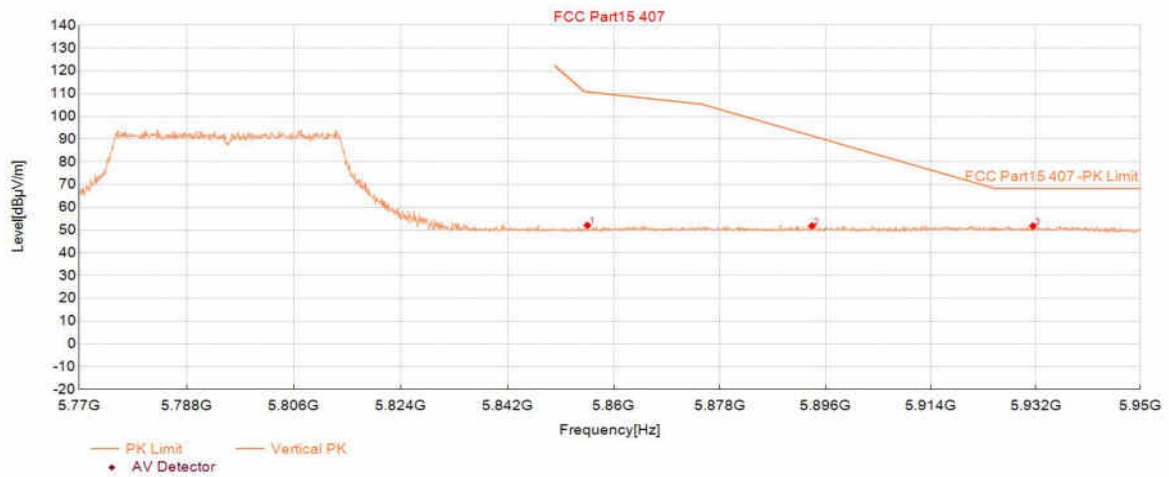

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5855.543	34.49	52.12	17.63	110.75	58.63	150	258	Vertical
2	5893.722	34.07	51.82	17.75	91.41	39.59	150	348	Vertical
3	5931.541	33.92	51.79	17.87	68.30	16.51	150	103	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5775	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-13 00:05:39

Test Graph

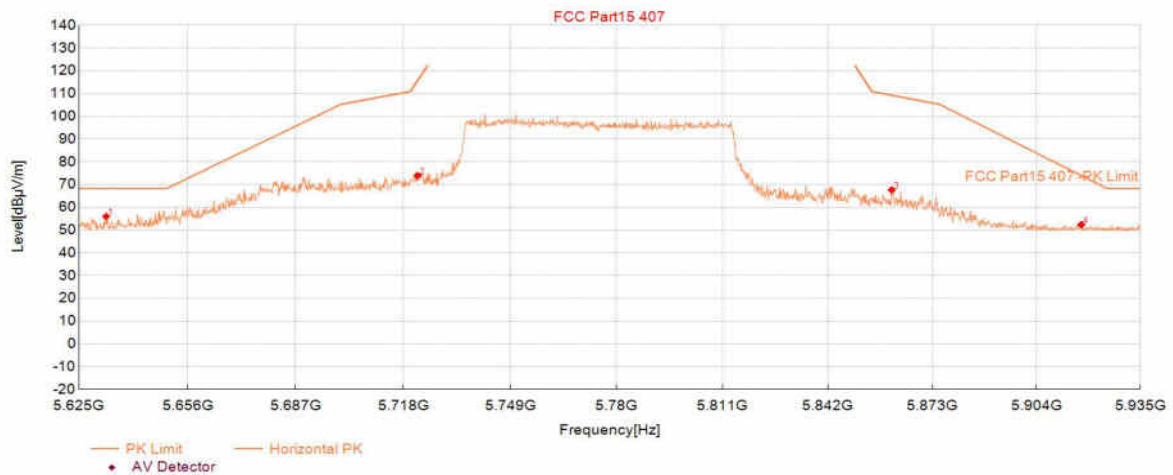

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5632.754	39.04	56.01	16.97	68.30	12.29	150	139	Horizontal
2	5722.079	56.80	73.98	17.18	115.64	41.66	150	139	Horizontal
3	5860.873	49.99	67.64	17.65	109.25	41.61	150	146	Horizontal
4	5917.321	34.57	52.40	17.83	73.96	21.56	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKO.WB800D40.1	SN:	
Mode:	11AX80_5775	Voltage:	
Environment:	24.8°C/50%	Engineer:	
Remark:			

Start of Test:2026-01-13 00:06:36

Test Graph

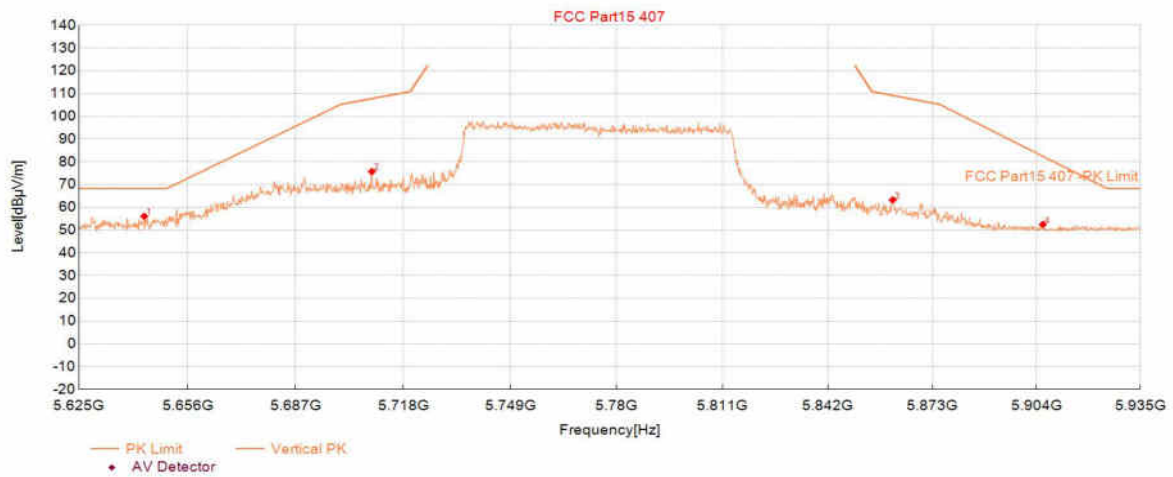

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5643.609	39.05	56.05	17.00	68.30	12.25	150	216	Vertical
2	5708.897	58.59	75.72	17.13	107.79	32.07	150	216	Vertical
3	5861.183	45.61	63.26	17.65	109.17	45.91	150	240	Vertical
4	5905.845	34.70	52.49	17.79	82.44	29.95	150	166	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level


Conducted Emission Measurement

File :SKI WB800D80S 1
80.0 dBuV

Data :#8

Date: 2025/12/29

Time: 17:22:34

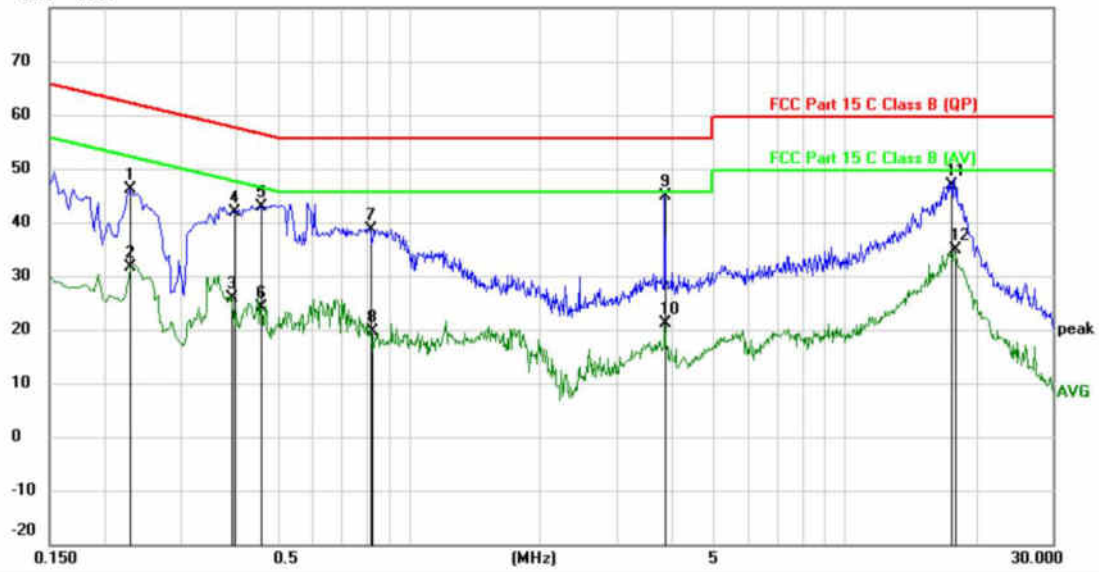

Site

Phase: **L1**

Temperature: 26

Limit: FCC Part 15 C Class B (QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT:

M/N: SKI.WB800D80S.1

Mode: 5G

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.2300	36.65	9.51	46.16	62.45	-16.29	QP	
2	0.2303	22.08	9.51	31.59	52.44	-20.85	AVG	
3	0.3914	16.26	9.53	25.79	48.03	-22.24	AVG	
4	0.3980	32.39	9.53	41.92	57.90	-15.98	QP	
5	0.4580	33.41	9.54	42.95	56.73	-13.78	QP	
6	0.4580	14.70	9.54	24.24	46.73	-22.49	AVG	
7	0.8139	29.08	9.54	38.62	56.00	-17.38	QP	
8	0.8259	9.99	9.54	19.53	46.00	-26.47	AVG	
9 *	3.8620	35.21	9.58	44.79	56.00	-11.21	QP	
10	3.8620	11.43	9.58	21.01	46.00	-24.99	AVG	
11	17.4779	37.01	9.76	46.77	60.00	-13.23	QP	
12	17.8579	25.13	9.77	34.90	50.00	-15.10	AVG	

END OF REPORT