


Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5700	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:08:50

Test Graph

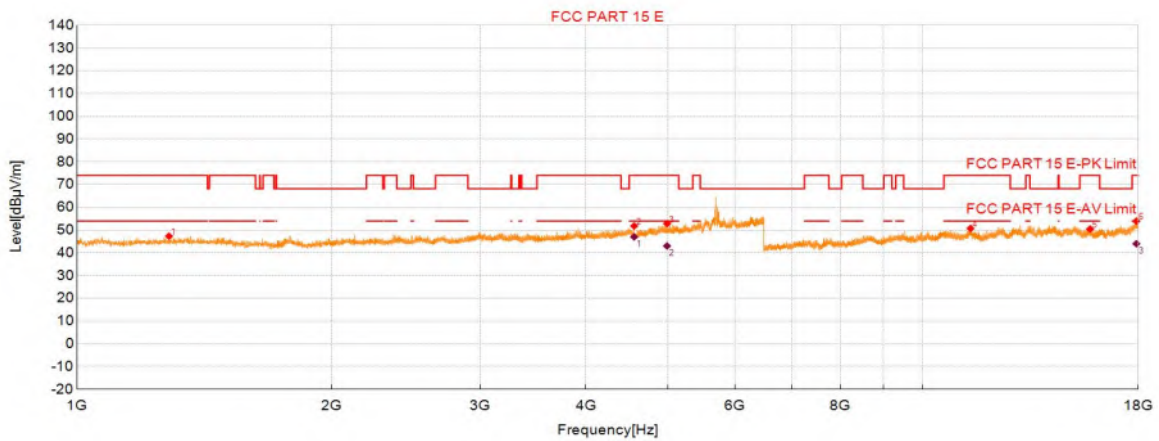

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1284.93	43.45	47.35	3.90	74.00	26.65	150	120	Horizontal
2	4559.96	35.44	51.80	16.36	74.00	22.20	150	10	Horizontal
3	4987.90	33.73	52.85	19.12	74.00	21.15	150	272	Horizontal
4	11397.19	42.83	50.74	7.91	74.00	23.26	150	360	Horizontal
5	15781.43	38.69	50.46	11.77	74.00	23.54	150	360	Horizontal
6	17903.39	36.91	53.95	17.04	74.00	20.05	150	87	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4559.96	30.65	16.36	47.01	54.00	6.99	150	10	Horizontal
2	4987.90	23.90	19.12	43.02	54.00	10.98	150	272	Horizontal
3	17903.39	26.96	17.04	44.00	54.00	10.00	150	87	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:10:11

Test Graph

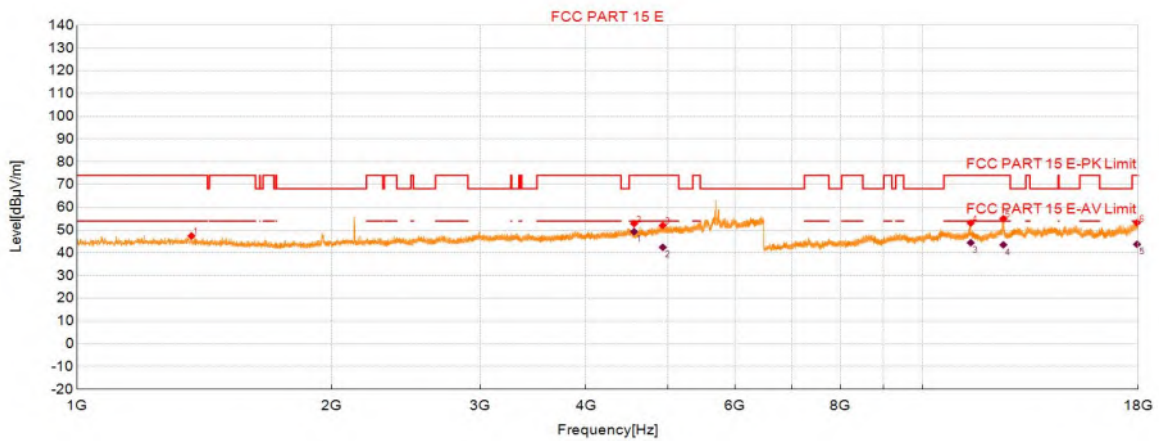

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1366.34	42.94	47.42	4.48	74.00	26.58	150	121	Vertical
2	4559.96	36.49	52.85	16.36	74.00	21.15	150	302	Vertical
3	4930.14	33.48	52.07	18.59	74.00	21.93	150	57	Vertical
4	11402.94	45.17	53.07	7.90	74.00	20.93	150	235	Vertical
5	12463.35	46.05	55.05	9.00	74.00	18.95	150	141	Vertical
6	17936.74	36.40	53.23	16.83	74.00	20.77	150	235	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4559.96	32.94	16.36	49.30	54.00	4.70	150	302	Vertical
2	4930.14	23.84	18.59	42.43	54.00	11.57	150	57	Vertical
3	11402.94	36.54	7.90	44.44	54.00	9.56	150	235	Vertical
4	12463.35	34.52	9.00	43.52	54.00	10.48	150	141	Vertical
5	17936.74	26.92	16.83	43.75	54.00	10.25	150	235	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5720	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-09-08 19:57:59

Test Graph

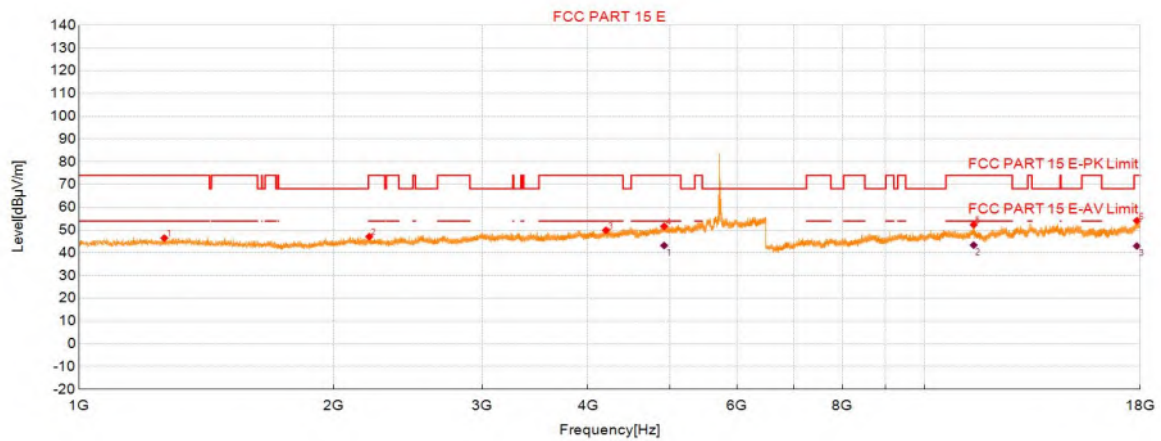

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1261.83	42.71	46.50	3.79	74.00	27.50	150	96	Horizontal
2	2204.62	39.57	47.15	7.58	74.00	26.85	150	193	Horizontal
3	4200.22	34.82	49.92	15.10	74.00	24.08	150	218	Horizontal
4	4921.34	33.13	51.66	18.53	74.00	22.34	150	175	Horizontal
5	11431.69	44.47	52.35	7.88	74.00	21.65	150	40	Horizontal
6	17828.63	37.13	54.17	17.04	74.00	19.83	150	112	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4921.34	24.69	18.53	43.22	54.00	10.78	150	175	Horizontal
2	11431.69	35.51	7.88	43.39	54.00	10.61	150	40	Horizontal
3	17828.63	25.95	17.04	42.99	54.00	11.01	150	112	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5720	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-09-08 20:00:33

Test Graph

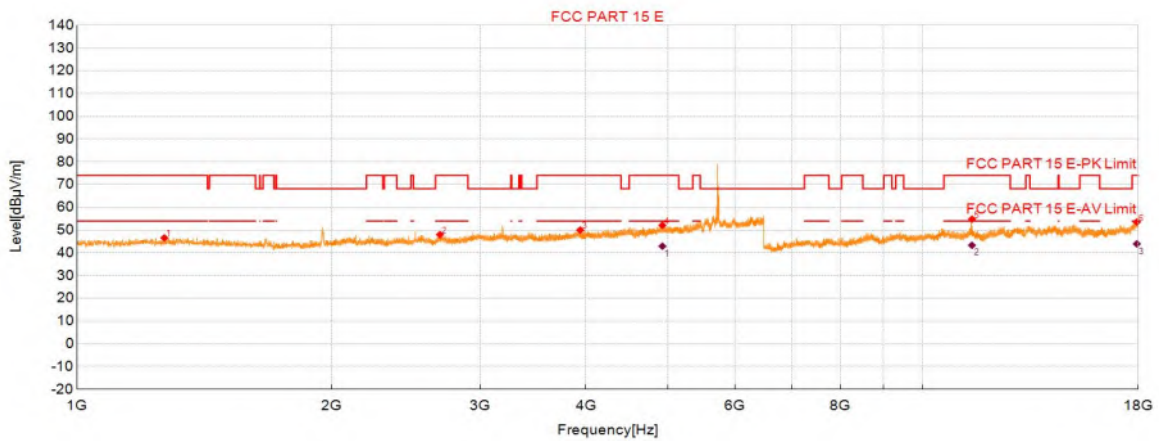

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1268.98	42.75	46.57	3.82	74.00	27.43	150	210	Vertical
2	2687.02	38.98	47.99	9.01	74.00	26.01	150	304	Vertical
3	3937.29	35.92	50.01	14.09	74.00	23.99	150	199	Vertical
4	4925.19	33.53	52.09	18.56	74.00	21.91	150	350	Vertical
5	11442.04	46.93	54.80	7.87	74.00	19.20	150	202	Vertical
6	17927.54	36.69	53.57	16.88	74.00	20.43	150	69	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4925.19	24.36	18.56	42.92	54.00	11.08	150	350	Vertical
2	11442.04	35.45	7.87	43.32	54.00	10.68	150	202	Vertical
3	17927.54	27.06	16.88	43.94	54.00	10.06	150	69	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5745	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:15:32

Test Graph

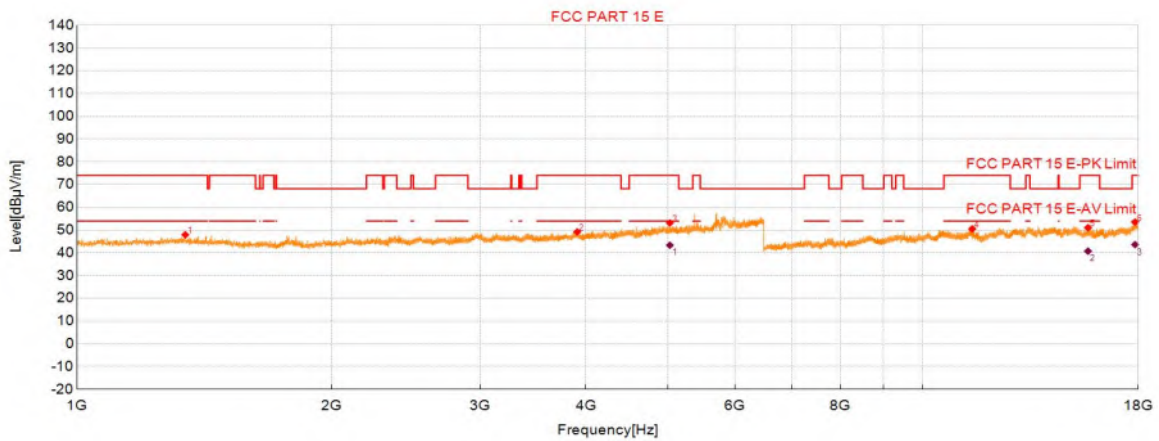

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1343.23	43.67	47.94	4.27	74.00	26.06	150	146	Horizontal
2	3905.39	35.34	49.20	13.86	74.00	24.80	150	92	Horizontal
3	5026.40	33.89	53.12	19.23	74.00	20.88	150	180	Horizontal
4	11450.10	42.69	50.55	7.86	74.00	23.45	150	315	Horizontal
5	15694.02	38.79	51.06	12.27	74.00	22.94	150	8	Horizontal
6	17840.13	36.48	53.52	17.04	74.00	20.48	150	297	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5026.40	24.11	19.23	43.34	54.00	10.66	150	180	Horizontal
2	15694.02	28.48	12.27	40.75	54.00	13.25	150	8	Horizontal
3	17840.13	26.58	17.04	43.62	54.00	10.38	150	297	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5745	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:16:53

Test Graph

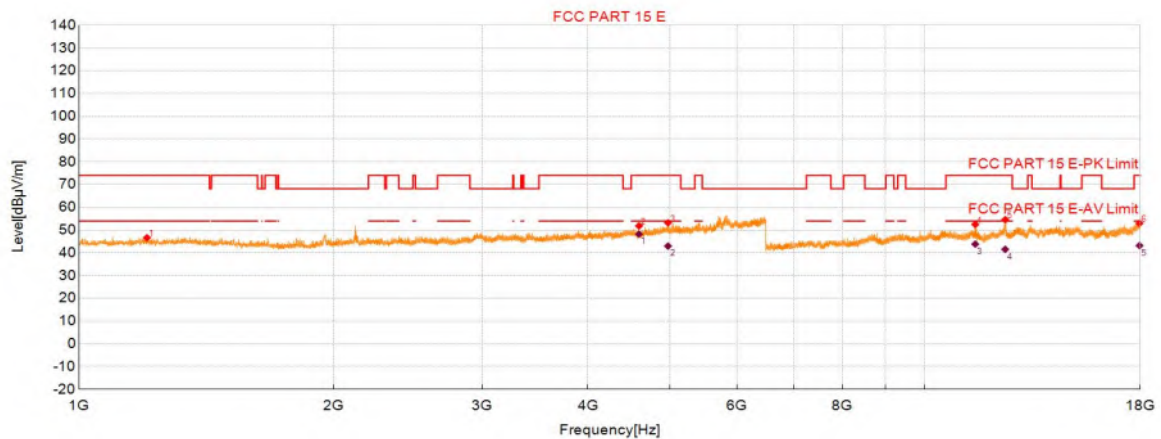

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1203.52	43.18	46.63	3.45	74.00	27.37	150	18	Vertical
2	4596.26	35.39	51.84	16.45	74.00	22.16	150	300	Vertical
3	4973.60	34.30	53.22	18.92	74.00	20.78	150	217	Vertical
4	11483.45	44.68	52.50	7.82	74.00	21.50	150	299	Vertical
5	12457.60	45.63	54.57	8.94	74.00	19.43	150	137	Vertical
6	17959.75	36.28	52.96	16.68	74.00	21.04	150	118	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4596.26	31.81	16.45	48.26	54.00	5.74	150	300	Vertical
2	4973.60	24.07	18.92	42.99	54.00	11.01	150	217	Vertical
3	11483.45	36.01	7.82	43.83	54.00	10.17	150	299	Vertical
4	12457.60	32.61	8.94	41.55	54.00	12.45	150	137	Vertical
5	17959.75	26.52	16.68	43.20	54.00	10.80	150	118	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5785	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:19:23

Test Graph

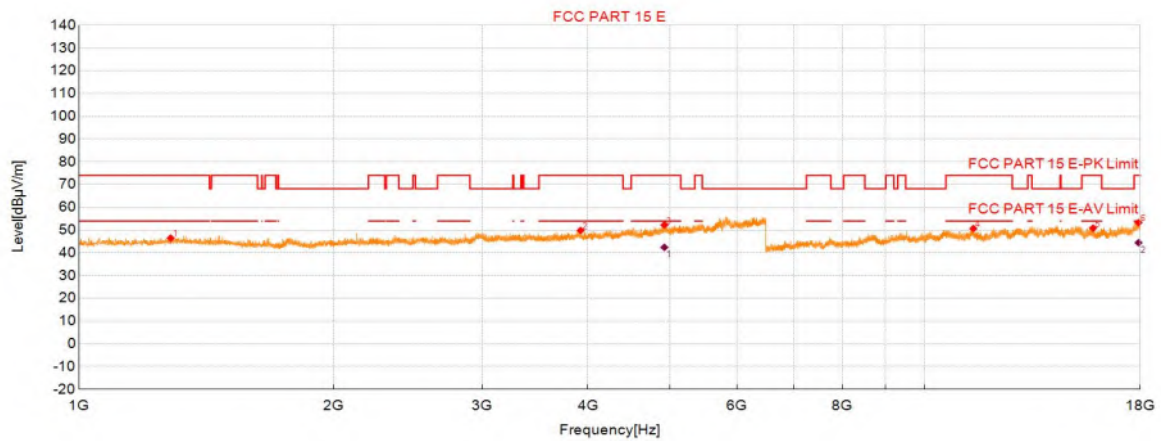

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1283.83	42.61	46.51	3.90	74.00	27.49	150	116	Horizontal
2	3919.69	35.93	49.83	13.90	74.00	24.17	150	175	Horizontal
3	4924.64	33.78	52.25	18.47	74.00	21.75	150	302	Horizontal
4	11423.64	42.78	50.66	7.88	74.00	23.34	150	330	Horizontal
5	15825.13	39.14	50.87	11.73	74.00	23.13	150	4	Horizontal
6	17910.29	36.27	53.27	17.00	74.00	20.73	150	204	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4924.64	23.97	18.47	42.44	54.00	11.56	150	302	Horizontal
2	17910.29	27.46	17.00	44.46	54.00	9.54	150	204	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5785	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:20:44

Test Graph

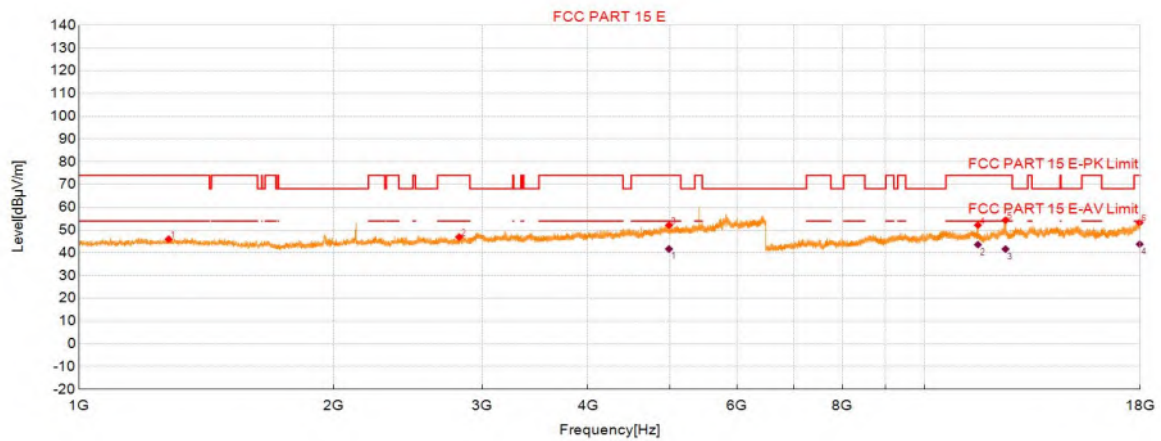

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1276.68	42.14	46.01	3.87	74.00	27.99	150	245	Vertical
2	2815.73	37.68	46.94	9.26	74.00	27.06	150	336	Vertical
3	4986.80	32.99	52.09	19.10	74.00	21.91	150	294	Vertical
4	11566.26	44.88	52.17	7.29	74.00	21.83	150	230	Vertical
5	12466.80	45.30	54.34	9.04	74.00	19.66	150	135	Vertical
6	17968.95	36.63	53.26	16.63	74.00	20.74	150	230	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4986.80	22.59	19.10	41.69	54.00	12.31	150	294	Vertical
2	11566.26	36.32	7.29	43.61	54.00	10.39	150	230	Vertical
3	12466.80	32.59	9.04	41.63	54.00	12.37	150	135	Vertical
4	17968.95	27.17	16.63	43.80	54.00	10.20	150	230	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5825	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:23:13

Test Graph

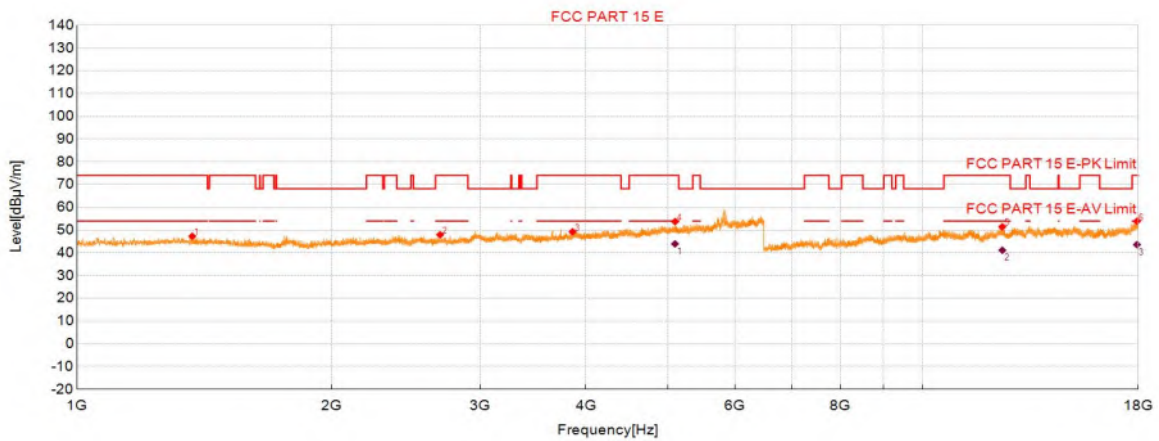

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1369.09	42.92	47.29	4.37	74.00	26.71	150	133	Horizontal
2	2688.12	39.19	47.93	8.74	74.00	26.07	150	145	Horizontal
3	3855.89	35.77	49.28	13.51	74.00	24.72	150	337	Horizontal
4	5097.36	34.60	53.74	19.14	74.00	20.26	150	307	Horizontal
5	12428.84	42.83	51.44	8.61	74.00	22.56	150	205	Horizontal
6	17932.14	37.02	53.87	16.85	74.00	20.13	150	315	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5097.36	24.80	19.14	43.94	54.00	10.06	150	307	Horizontal
2	12428.84	32.53	8.61	41.14	54.00	12.86	150	205	Horizontal
3	17932.14	26.75	16.85	43.60	54.00	10.40	150	315	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5825	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:24:33

Test Graph

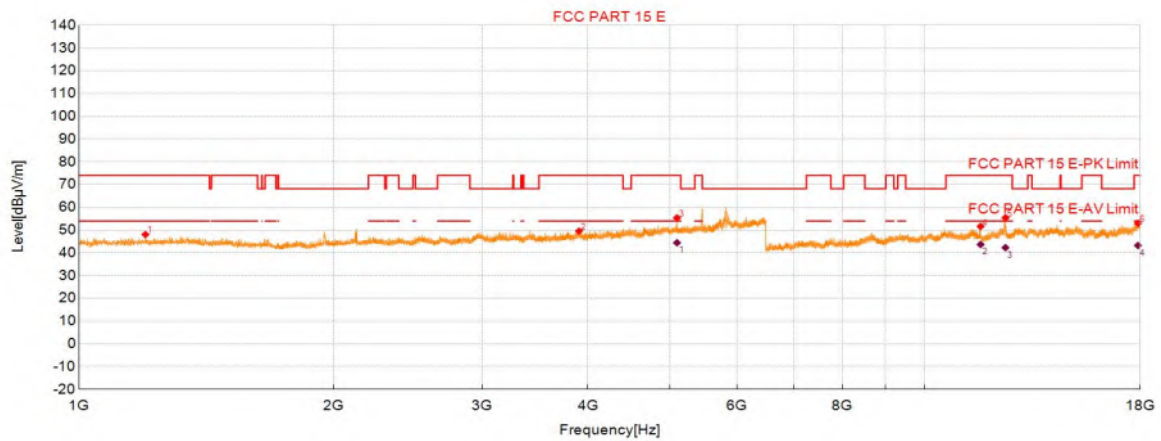

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1198.57	44.65	48.06	3.41	74.00	25.94	150	235	Vertical
2	3903.74	35.69	49.55	13.86	74.00	24.45	150	181	Vertical
3	5096.81	36.23	55.37	19.14	74.00	18.63	150	235	Vertical
4	11651.37	44.47	51.62	7.15	74.00	22.38	150	118	Vertical
5	12467.95	46.36	55.41	9.05	74.00	18.59	150	136	Vertical
6	17881.54	35.88	52.94	17.06	74.00	21.06	150	112	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5096.81	25.30	19.14	44.44	54.00	9.56	150	235	Vertical
2	11651.37	36.52	7.15	43.67	54.00	10.33	150	118	Vertical
3	12467.95	33.24	9.05	42.29	54.00	11.71	150	136	Vertical
4	17881.54	26.19	17.06	43.25	54.00	10.75	150	112	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5180	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 11:31:59

Test Graph

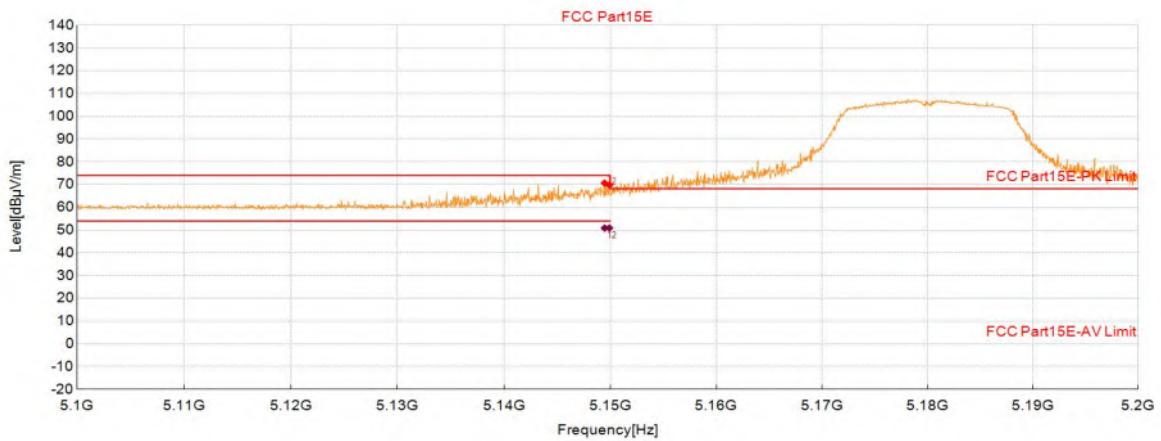

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.47	52.93	70.65	17.72	74.00	3.35	150	173	Horizontal
2	5149.92	52.08	69.80	17.72	74.00	4.20	150	184	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.47	33.18	17.72	50.90	54.00	3.10	150	173	Horizontal
2	5149.92	33.20	17.72	50.92	54.00	3.08	150	184	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5180	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 11:32:39

Test Graph

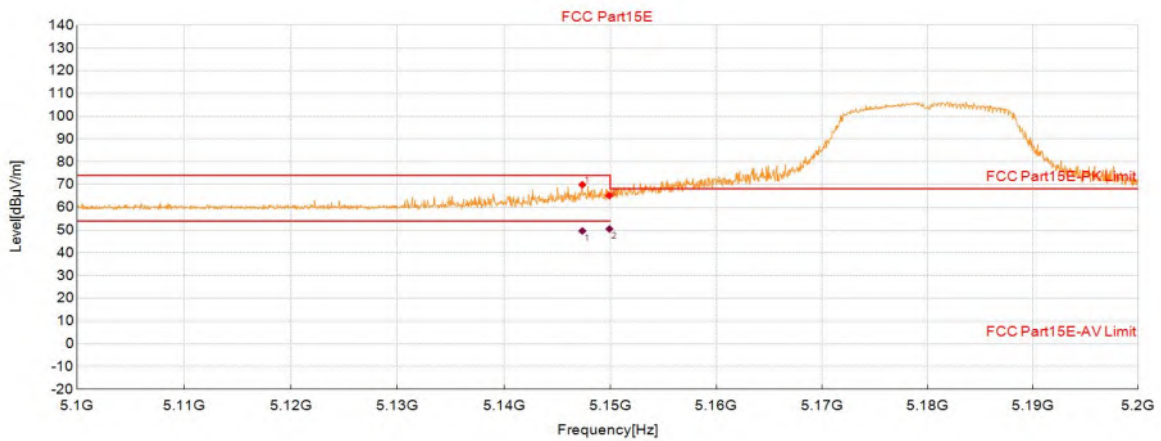

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.37	52.22	69.94	17.72	74.00	4.06	150	287	Vertical
2	5149.92	47.44	65.16	17.72	74.00	8.84	150	317	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.37	31.90	17.72	49.62	54.00	4.38	150	287	Vertical
2	5149.92	32.78	17.72	50.50	54.00	3.50	150	317	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5320	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:27:16

Test Graph

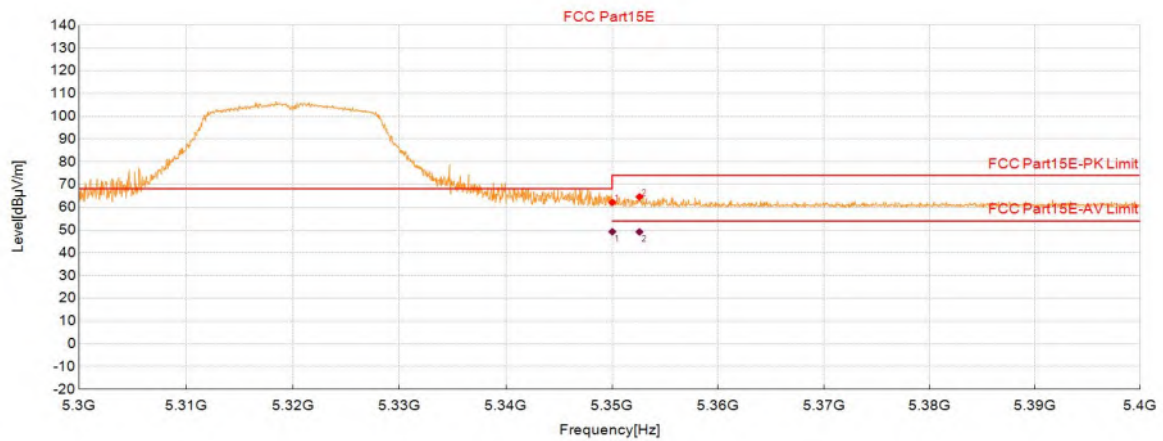

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	43.97	62.15	18.18	74.00	11.85	150	1	Horizontal
2	5352.58	46.42	64.61	18.19	74.00	9.39	150	280	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.08	18.18	49.26	54.00	4.74	150	1	Horizontal
2	5352.58	31.01	18.19	49.20	54.00	4.80	150	280	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5320	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:27:56

Test Graph

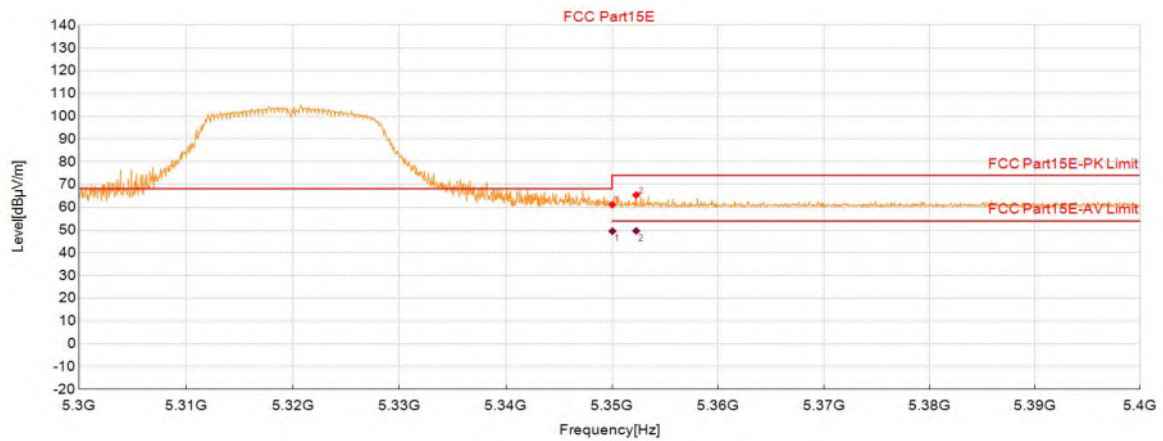

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	42.94	61.12	18.18	74.00	12.88	150	133	Vertical
2	5352.28	47.25	65.44	18.19	74.00	8.56	150	2	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.32	18.18	49.50	54.00	4.50	150	133	Vertical
2	5352.28	31.47	18.19	49.66	54.00	4.34	150	2	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5500	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:30:09

Test Graph

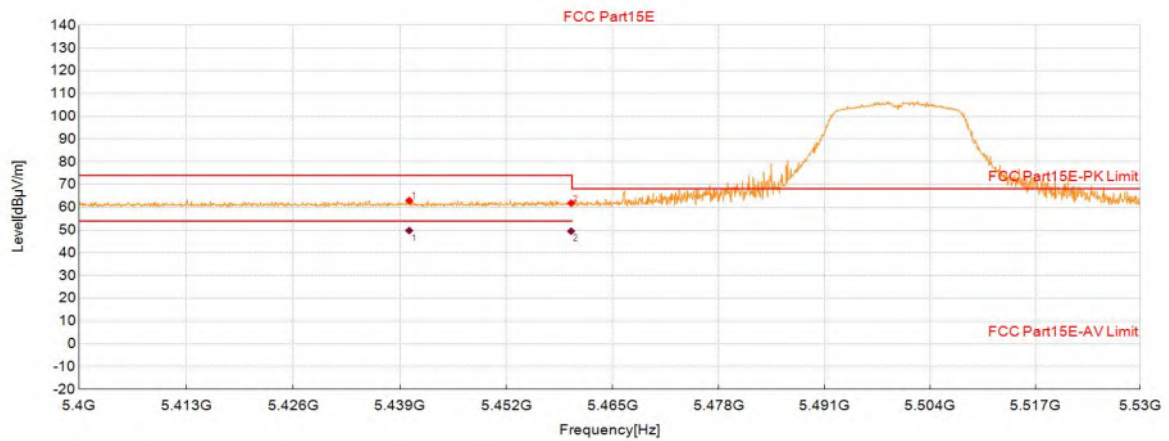

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.13	44.50	62.99	18.49	74.00	11.01	150	0	Horizontal
2	5459.89	43.32	61.84	18.52	74.00	12.16	150	310	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.13	31.31	18.49	49.80	54.00	4.20	150	0	Horizontal
2	5459.89	31.00	18.52	49.52	54.00	4.48	150	310	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5500	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 12:30:49

Test Graph

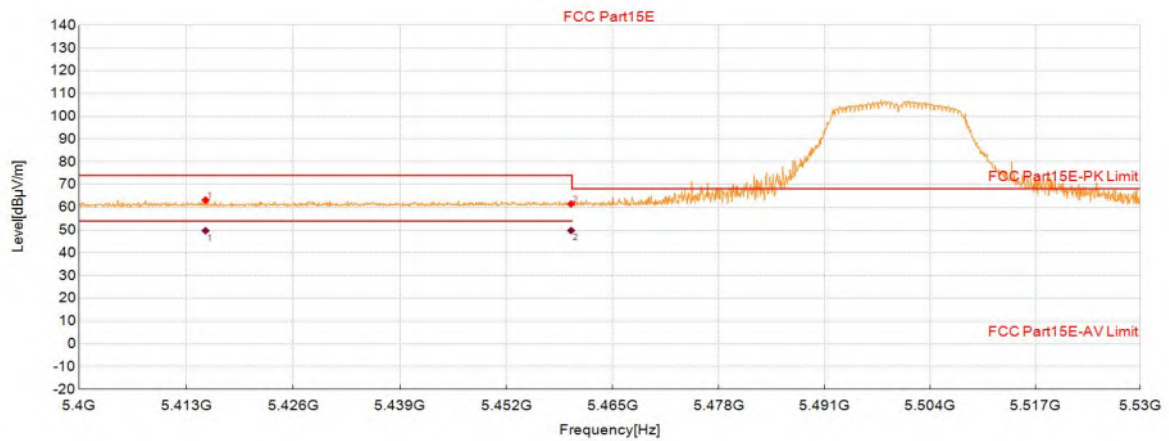

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5415.35	44.73	63.19	18.46	74.00	10.81	150	121	Vertical
2	5459.89	42.97	61.49	18.52	74.00	12.51	150	286	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5415.35	31.26	18.46	49.72	54.00	4.28	150	121	Vertical
2	5459.89	31.29	18.52	49.81	54.00	4.19	150	286	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5700	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 15		

Start of Test:2026-08-16 13:17:24

Test Graph

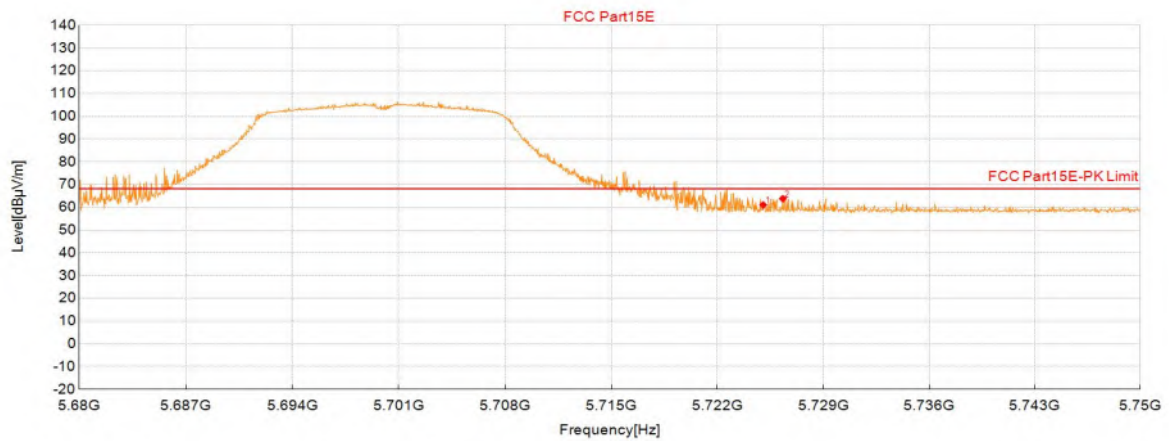

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	41.33	61.06	19.73	68.20	7.14	150	359	Horizontal
2	5726.33	44.09	63.82	19.73	68.20	4.38	150	192	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 15		

Start of Test:2026-08-16 13:18:04

Test Graph

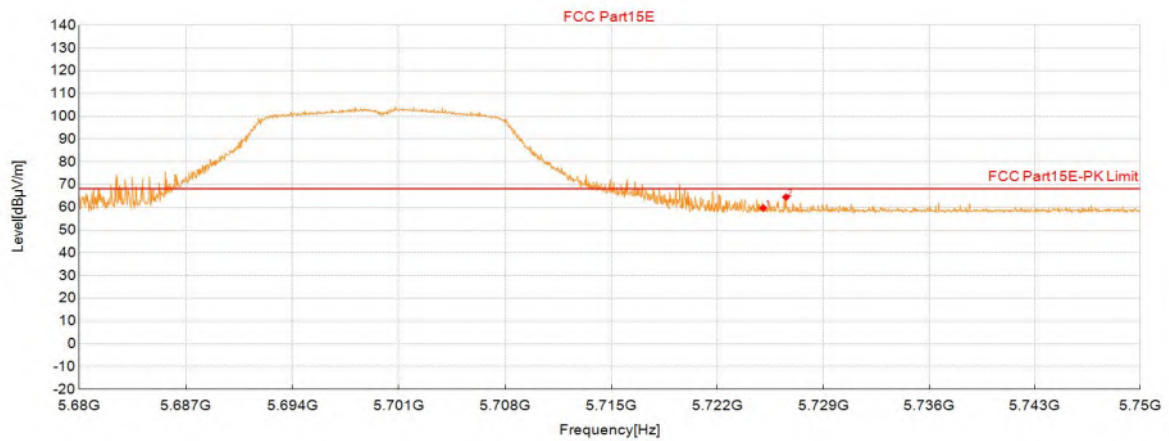

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	39.98	59.71	19.73	68.20	8.49	150	30	Vertical
2	5726.54	44.75	64.48	19.73	68.20	3.72	150	237	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:21:55

Test Graph

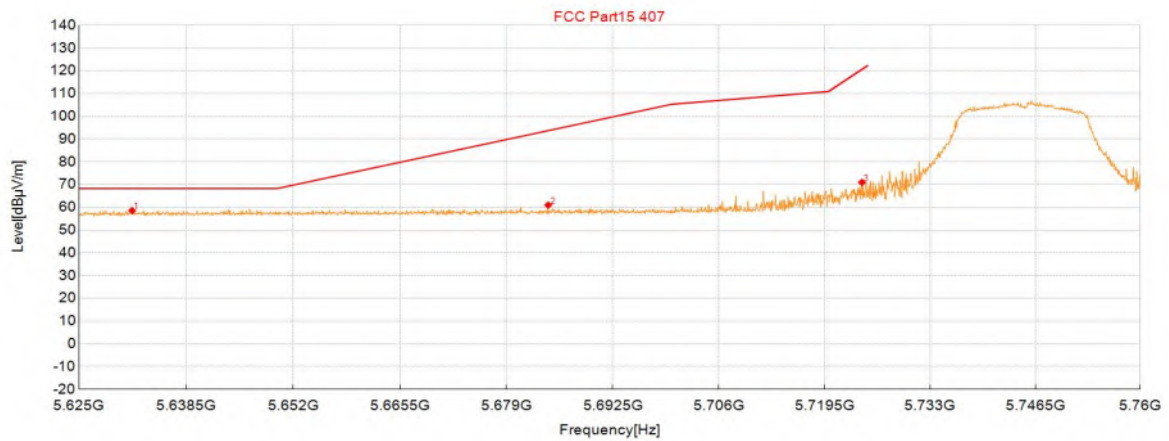

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5631.69	39.41	58.56	19.15	68.30	9.74	150	140	Horizontal
2	5684.29	41.46	60.96	19.50	93.71	32.75	150	166	Horizontal
3	5724.27	51.27	70.99	19.72	120.65	49.66	150	296	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:22:35

Test Graph

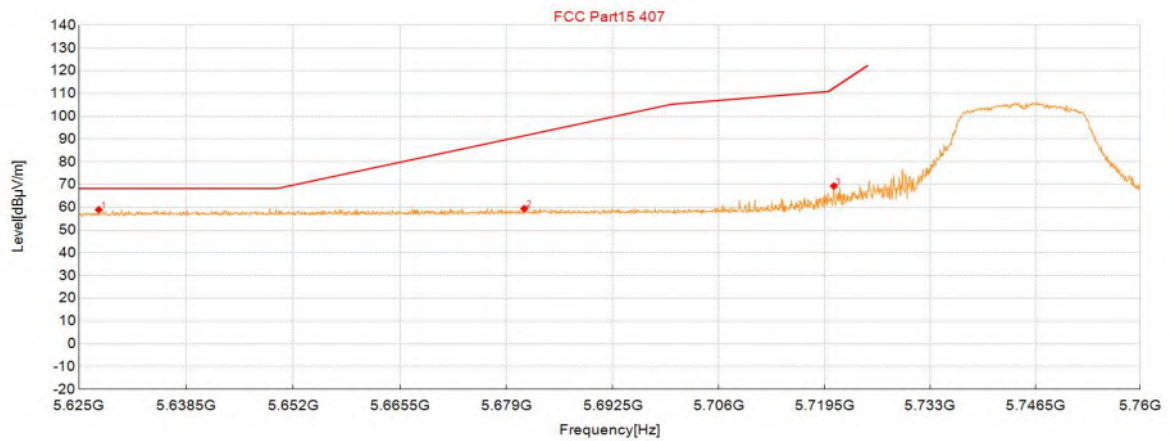

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5627.50	39.85	58.98	19.13	68.30	9.32	150	54	Vertical
2	5681.26	39.94	59.43	19.49	91.47	32.04	150	237	Vertical
3	5720.70	49.67	69.37	19.70	112.49	43.12	150	12	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5825	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:24:06

Test Graph

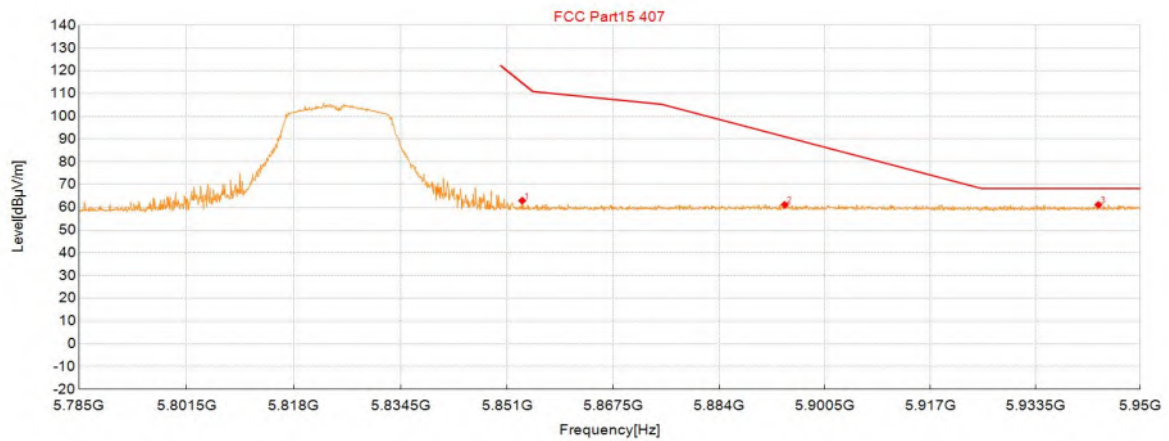

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5853.34	42.41	62.94	20.53	114.67	51.73	150	194	Horizontal
2	5894.20	40.26	61.13	20.87	91.05	29.92	150	211	Horizontal
3	5943.40	40.21	61.09	20.88	68.30	7.21	150	299	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5825	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:24:46

Test Graph

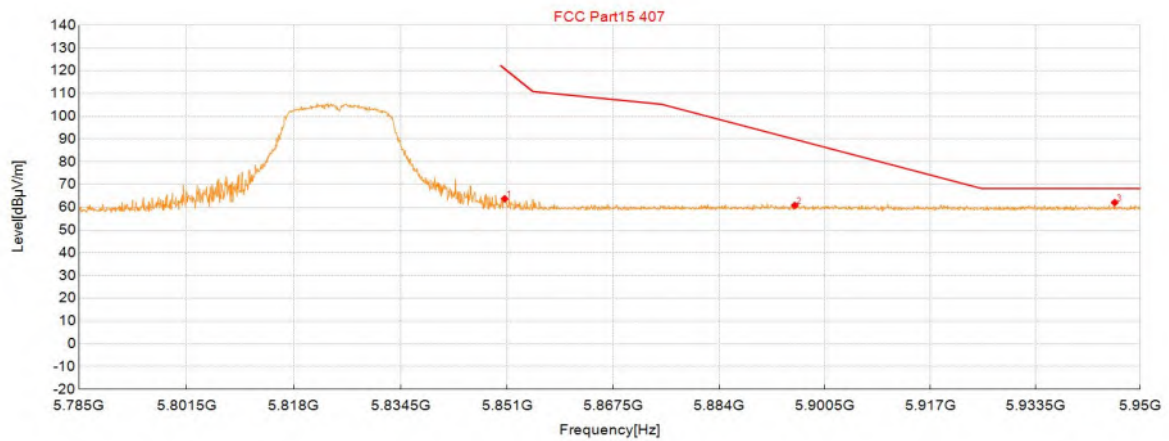

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5850.62	43.24	63.75	20.51	120.89	57.14	150	270	Vertical
2	5895.77	39.95	60.84	20.89	89.89	29.05	150	179	Vertical
3	5945.96	41.20	62.08	20.88	68.30	6.22	150	135	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5180	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:26:52

Test Graph

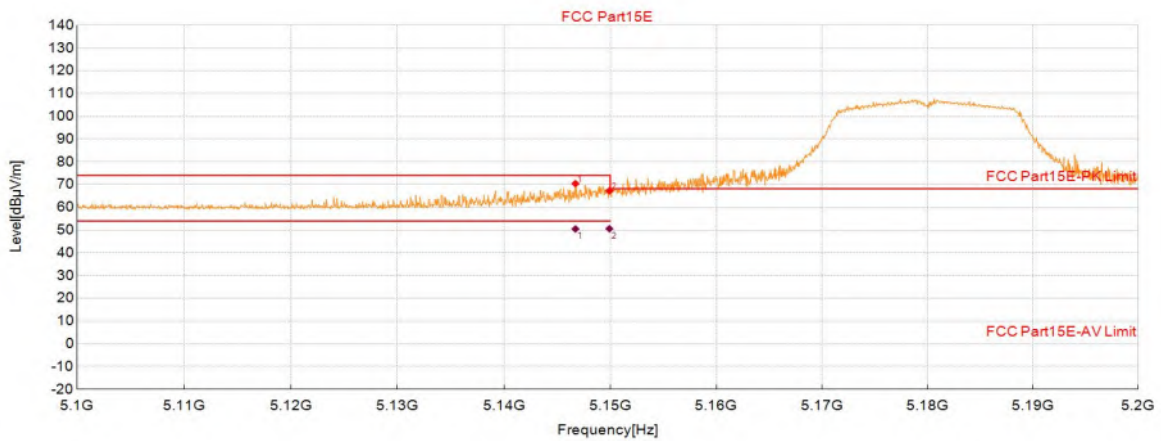

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.72	52.69	70.41	17.72	74.00	3.59	150	190	Horizontal
2	5149.92	49.55	67.27	17.72	74.00	6.73	150	298	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.72	32.80	17.72	50.52	54.00	3.48	150	190	Horizontal
2	5149.92	32.88	17.72	50.60	54.00	3.40	150	298	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5180	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:27:32

Test Graph

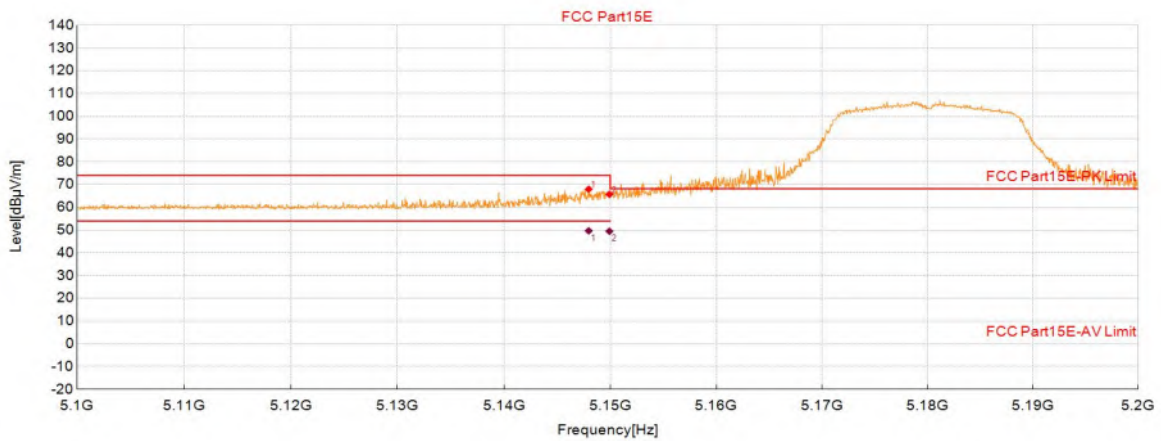

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.97	50.25	67.97	17.72	74.00	6.03	150	282	Vertical
2	5149.92	48.01	65.73	17.72	74.00	8.27	150	325	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.97	31.96	17.72	49.68	54.00	4.32	150	282	Vertical
2	5149.92	31.78	17.72	49.50	54.00	4.50	150	325	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5320	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:29:13

Test Graph

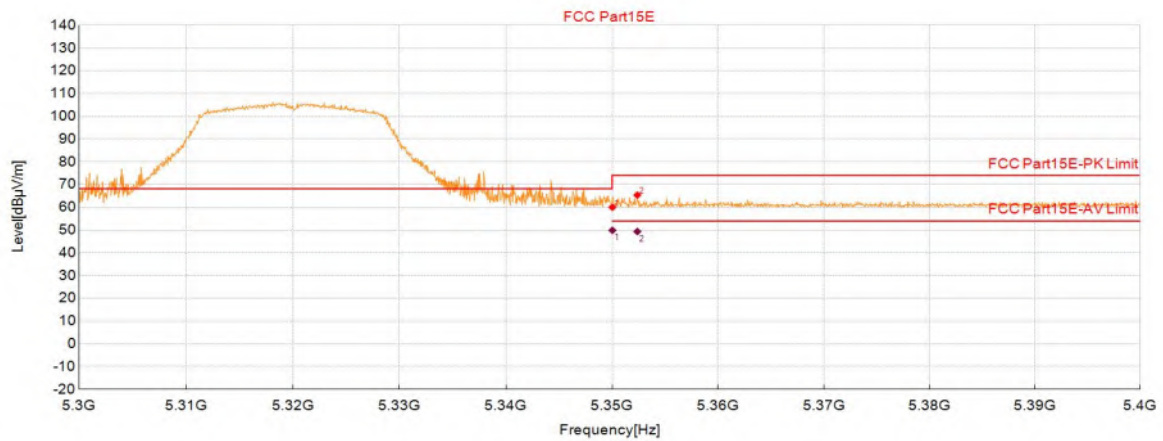

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	41.87	60.05	18.18	74.00	13.95	150	105	Horizontal
2	5352.38	47.19	65.38	18.19	74.00	8.62	150	190	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.72	18.18	49.90	54.00	4.10	150	105	Horizontal
2	5352.38	31.18	18.19	49.37	54.00	4.63	150	190	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5320	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:29:52

Test Graph

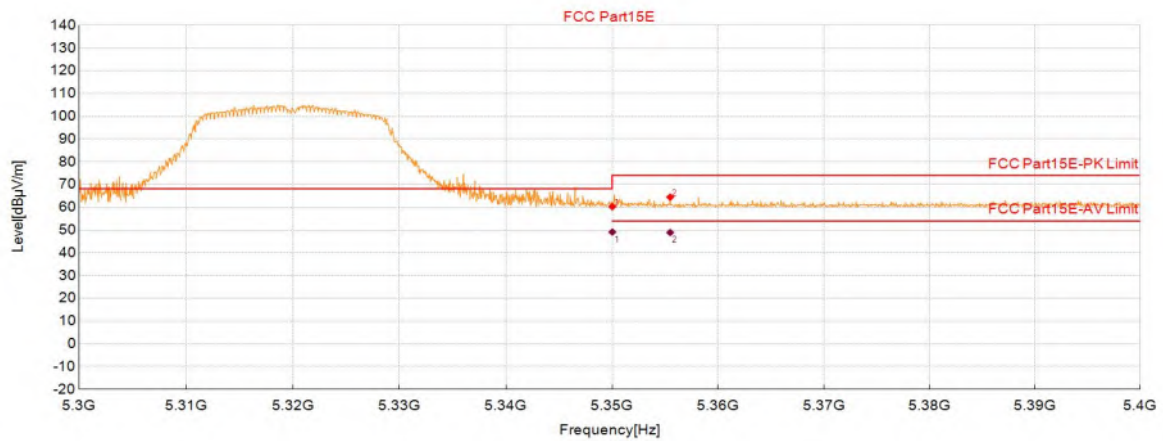

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	42.13	60.31	18.18	74.00	13.69	150	318	Vertical
2	5355.48	46.27	64.48	18.21	74.00	9.52	150	200	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	30.96	18.18	49.14	54.00	4.86	150	318	Vertical
2	5355.48	30.71	18.21	48.92	54.00	5.08	150	200	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5500	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:32:38

Test Graph

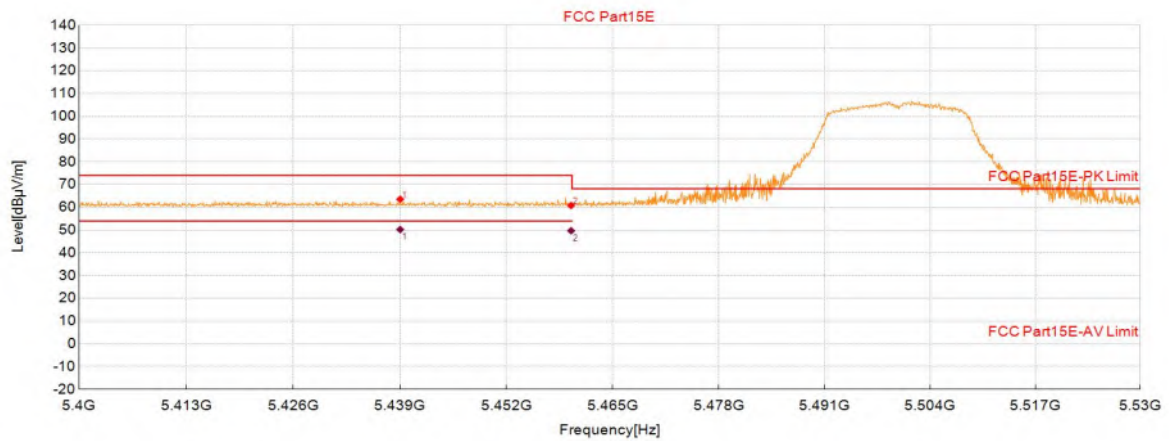

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5439.02	45.05	63.54	18.49	74.00	10.46	150	261	Horizontal
2	5459.89	42.28	60.80	18.52	74.00	13.20	150	83	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5439.02	31.77	18.49	50.26	54.00	3.74	150	261	Horizontal
2	5459.89	31.18	18.52	49.70	54.00	4.30	150	83	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5500	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:33:18

Test Graph

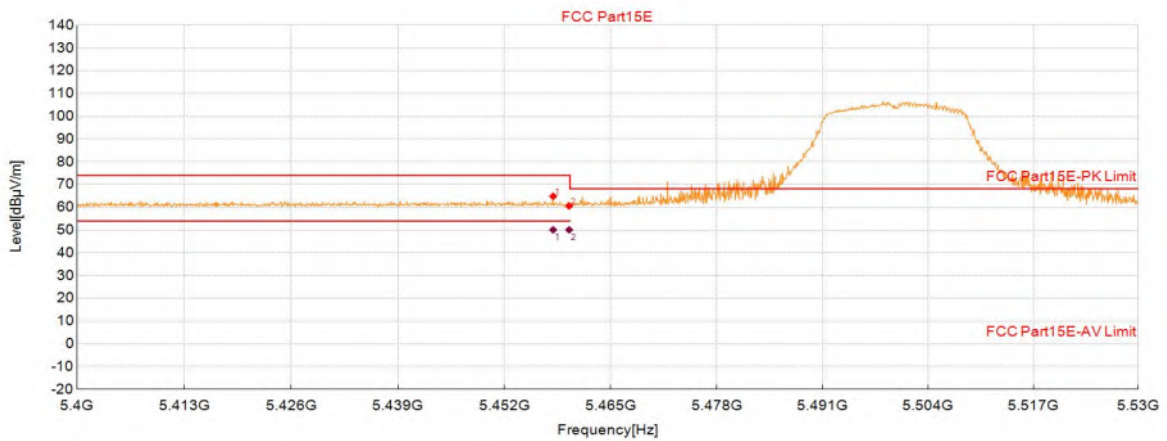

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.94	46.33	64.85	18.52	74.00	9.15	150	224	Vertical
2	5459.89	42.07	60.59	18.52	74.00	13.41	150	29	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.94	31.58	18.52	50.10	54.00	3.90	150	224	Vertical
2	5459.89	31.60	18.52	50.12	54.00	3.88	150	29	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 13:40:11

Test Graph

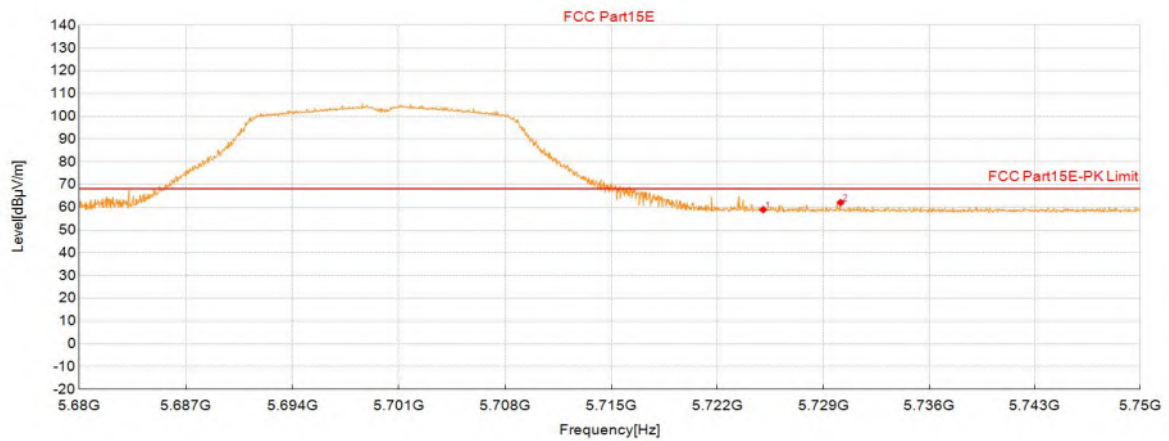

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	39.27	59.00	19.73	68.20	9.20	150	341	Horizontal
2	5730.15	42.35	62.10	19.75	68.20	6.10	150	196	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 13:40:52

Test Graph

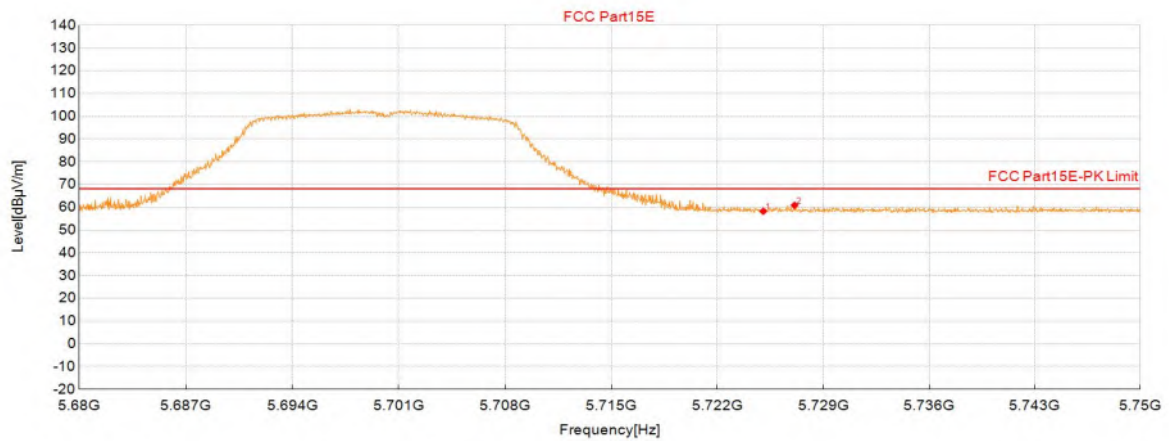

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	38.55	58.28	19.73	68.20	9.92	150	341	Vertical
2	5727.10	41.16	60.90	19.74	68.20	7.30	150	337	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:42:40

Test Graph

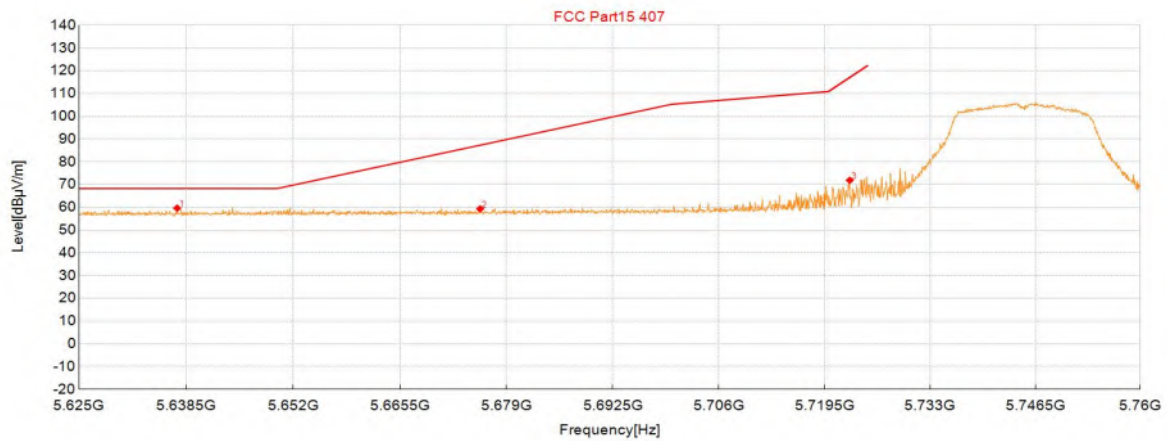

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5637.36	40.45	59.64	19.19	68.30	8.66	150	2	Horizontal
2	5675.65	39.87	59.32	19.45	87.32	28.00	150	2	Horizontal
3	5722.72	52.17	71.88	19.71	117.11	45.23	150	188	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5745	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:43:20

Test Graph

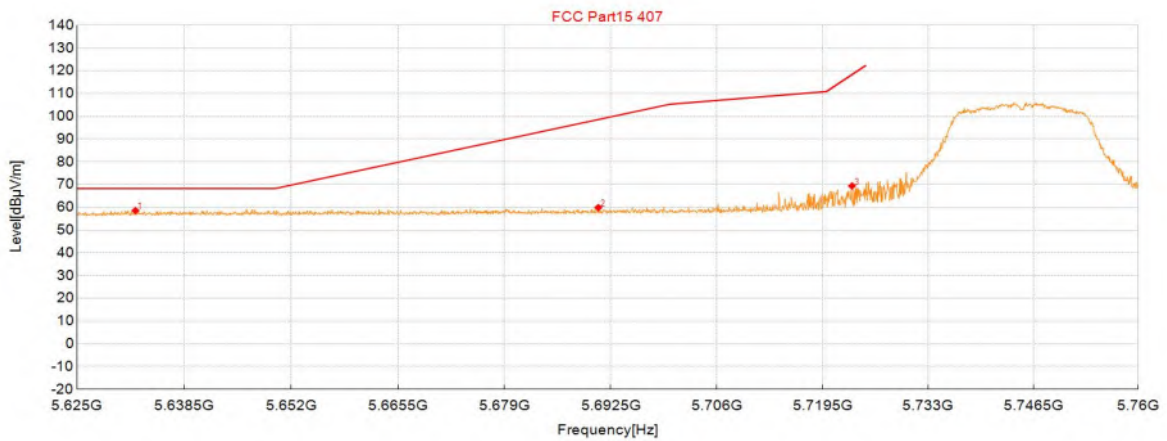

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5632.36	39.42	58.58	19.16	68.30	9.72	150	84	Vertical
2	5690.91	40.34	59.88	19.54	98.60	38.72	150	215	Vertical
3	5723.26	49.71	69.43	19.72	118.34	48.91	150	32	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5825	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:47:26

Test Graph

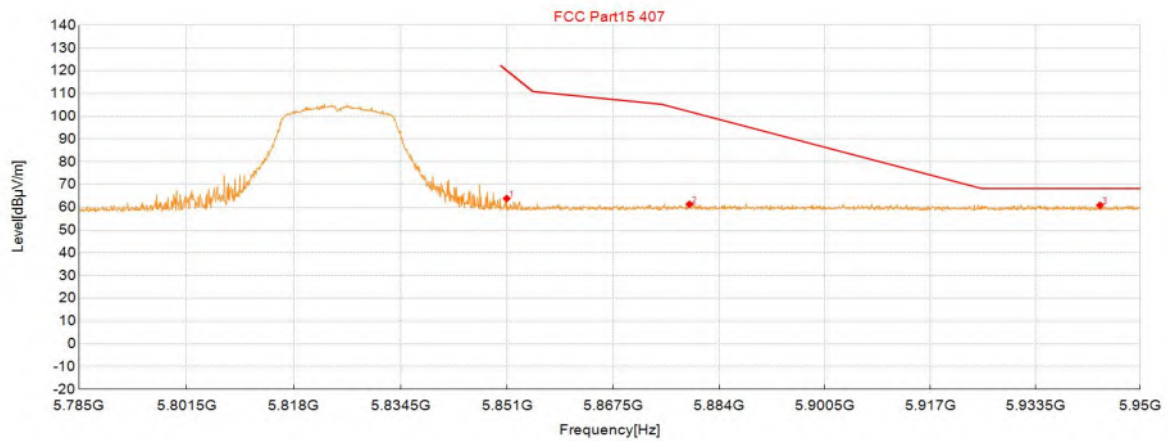

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5850.95	43.37	63.88	20.51	120.13	56.25	150	191	Horizontal
2	5879.34	40.58	61.33	20.75	102.07	40.74	150	186	Horizontal
3	5943.64	40.03	60.91	20.88	68.30	7.39	150	312	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N20_MCS0_5825	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 13:48:06

Test Graph

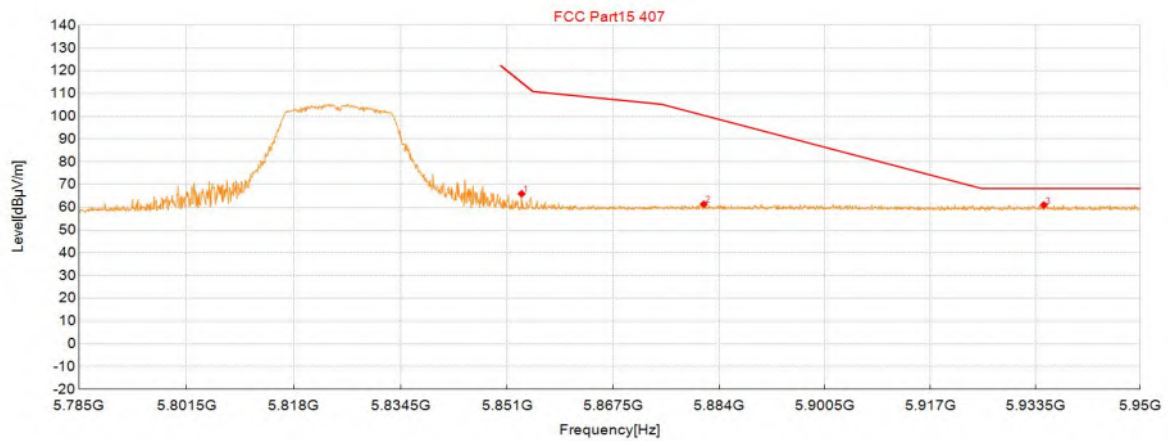

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5853.26	45.43	65.96	20.53	114.86	48.90	150	218	Vertical
2	5881.57	40.62	61.38	20.76	100.42	39.04	150	270	Vertical
3	5934.81	40.15	61.04	20.89	68.30	7.26	150	323	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5190	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 14:26:24

Test Graph

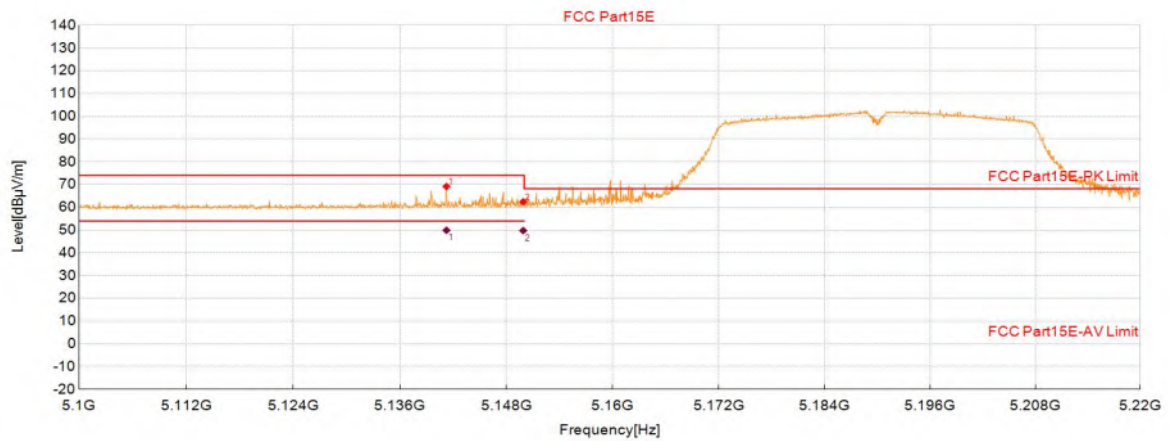

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5141.24	51.47	69.18	17.71	74.00	4.82	150	182	Horizontal
2	5149.88	44.67	62.39	17.72	74.00	11.61	150	182	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5141.24	32.21	17.71	49.92	54.00	4.08	150	182	Horizontal
2	5149.88	32.06	17.72	49.78	54.00	4.22	150	182	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5190	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 14:27:04

Test Graph

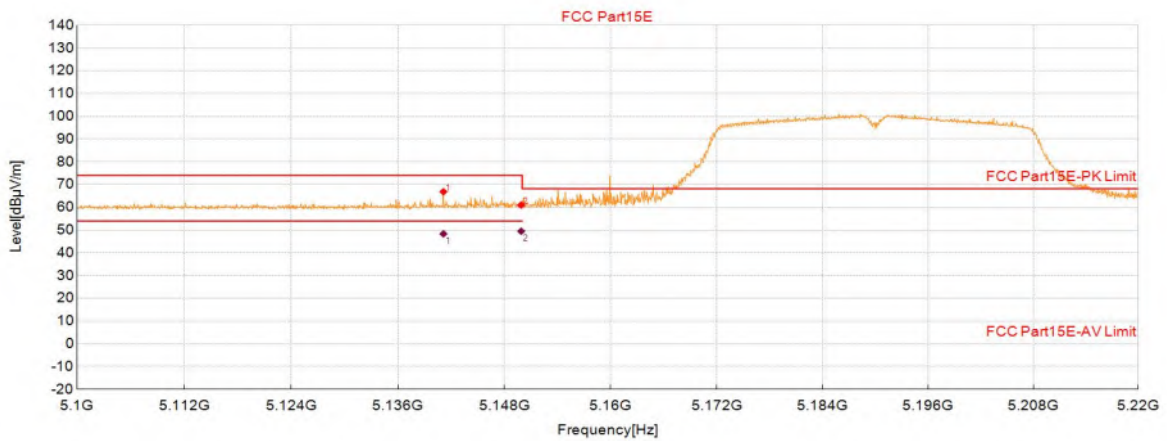

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5141.12	49.15	66.86	17.71	74.00	7.14	150	313	Vertical
2	5149.88	43.30	61.02	17.72	74.00	12.98	150	256	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5141.12	30.64	17.71	48.35	54.00	5.65	150	313	Vertical
2	5149.88	31.80	17.72	49.52	54.00	4.48	150	256	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5310	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:33:48

Test Graph

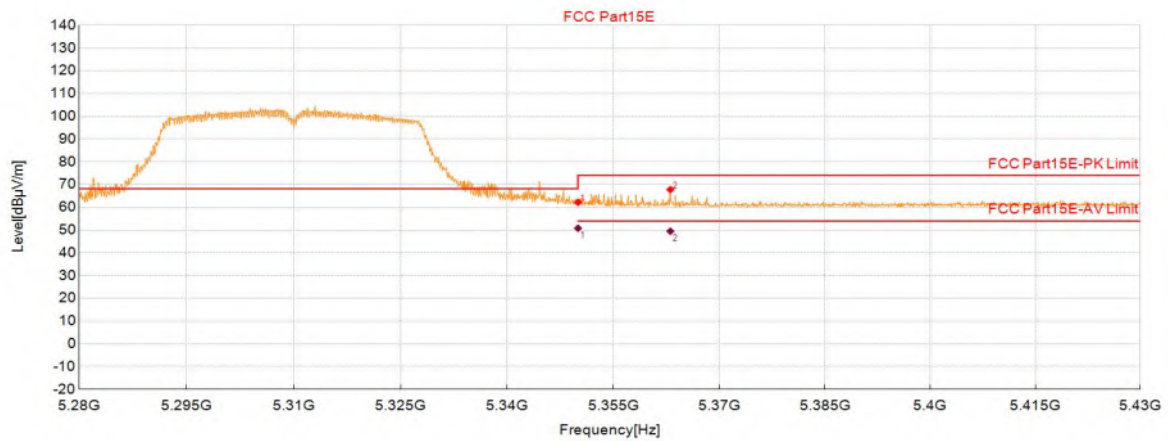

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	44.02	62.20	18.18	74.00	11.80	150	286	Horizontal
2	5363.07	49.54	67.79	18.25	74.00	6.21	150	181	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	32.63	18.18	50.81	54.00	3.19	150	286	Horizontal
2	5363.07	31.25	18.25	49.50	54.00	4.50	150	181	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5310	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:34:28

Test Graph

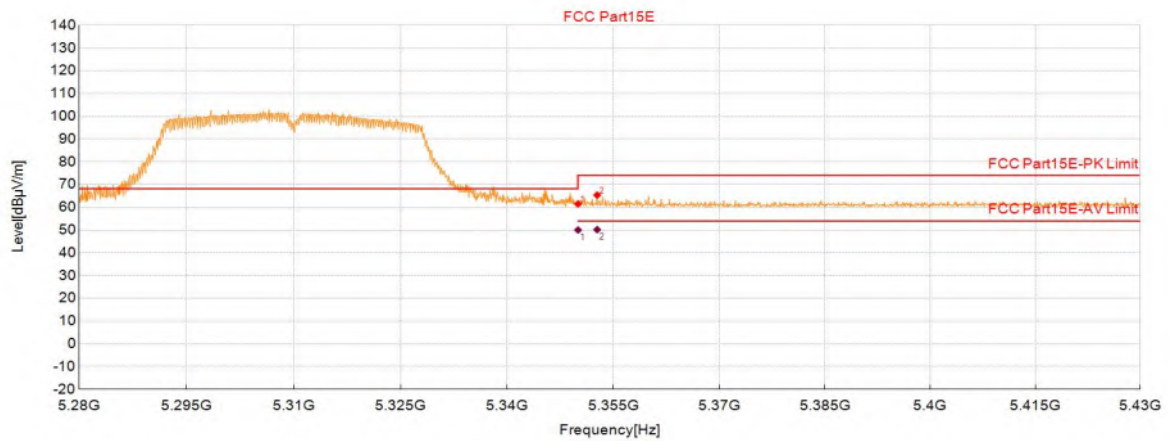

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	43.33	61.51	18.18	74.00	12.49	150	347	Vertical
2	5352.71	47.18	65.37	18.19	74.00	8.63	150	230	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	31.87	18.18	50.05	54.00	3.95	150	347	Vertical
2	5352.71	32.01	18.19	50.20	54.00	3.80	150	230	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5510	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:36:26

Test Graph

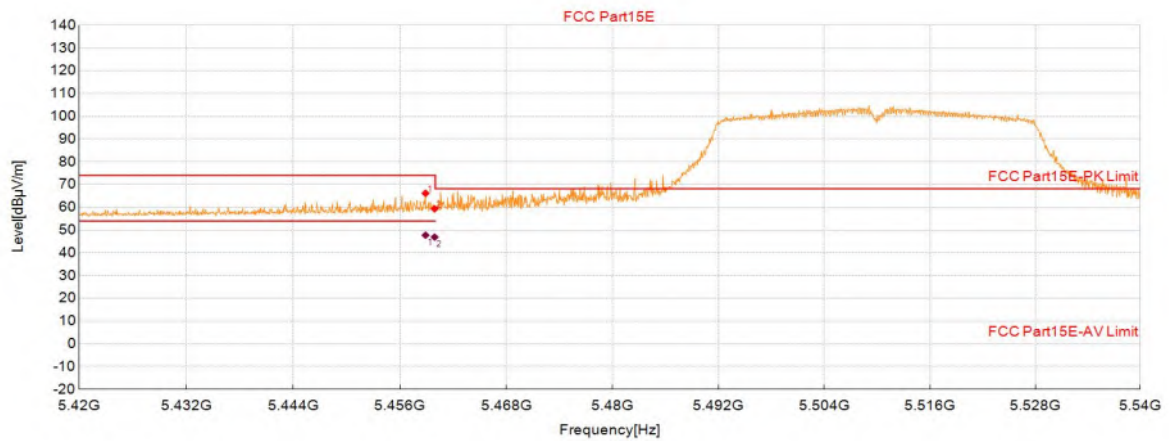

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.90	47.66	66.18	18.52	74.00	7.82	150	303	Horizontal
2	5459.92	40.80	59.32	18.52	74.00	14.68	150	196	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.90	29.23	18.52	47.75	54.00	6.25	150	303	Horizontal
2	5459.92	28.41	18.52	46.93	54.00	7.07	150	196	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5510	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:37:06

Test Graph

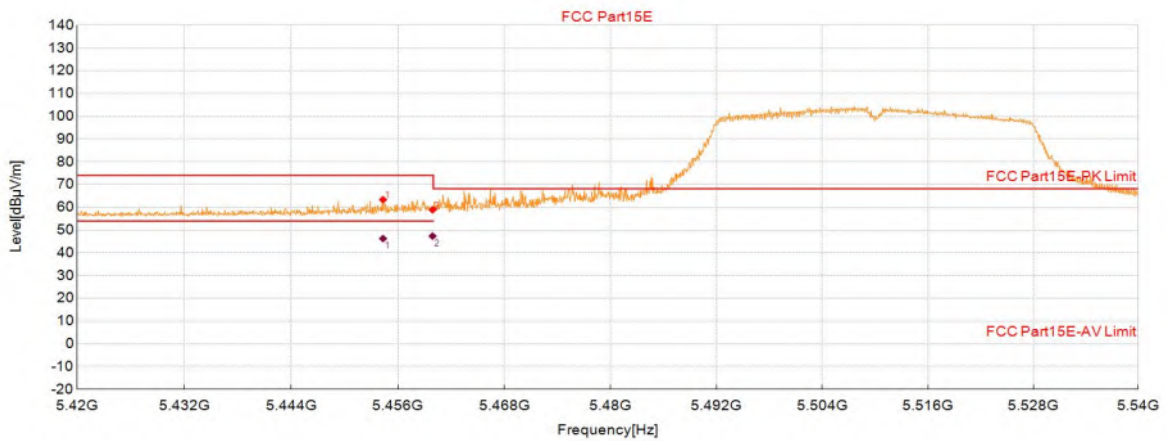

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.34	44.86	63.37	18.51	74.00	10.63	150	239	Vertical
2	5459.92	40.40	58.92	18.52	74.00	15.08	150	10	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.34	27.77	18.51	46.28	54.00	7.72	150	239	Vertical
2	5459.92	28.84	18.52	47.36	54.00	6.64	150	10	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5670	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:39:04

Test Graph

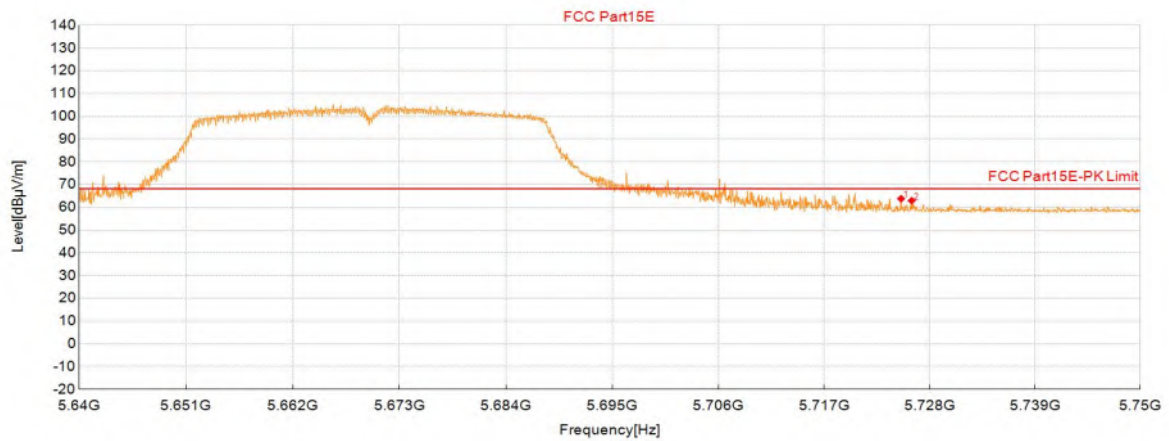

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	44.06	63.79	19.73	68.20	4.41	150	295	Horizontal
2	5726.12	43.23	62.96	19.73	68.20	5.24	150	184	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5670	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:39:44

Test Graph

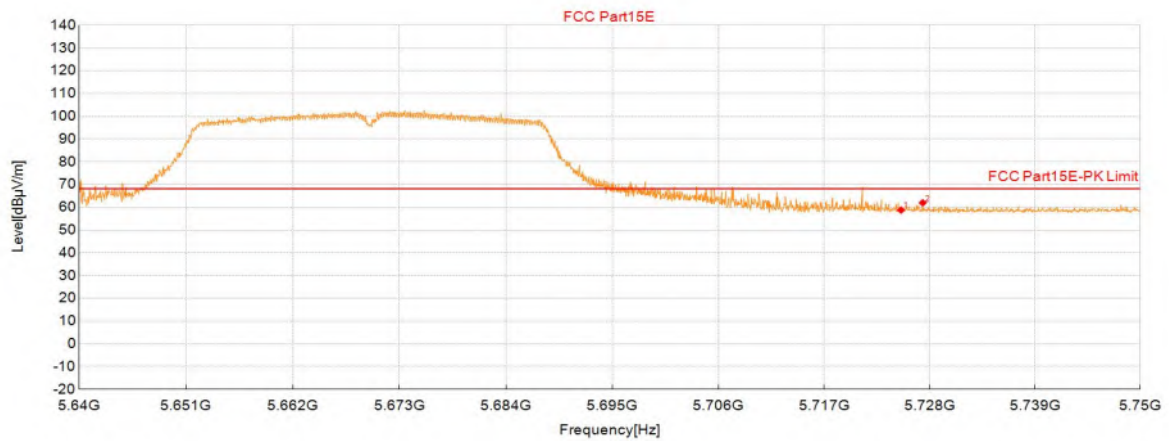

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	39.06	58.79	19.73	68.20	9.41	150	231	Vertical
2	5727.27	42.26	62.00	19.74	68.20	6.20	150	305	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5755	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:16:25

Test Graph

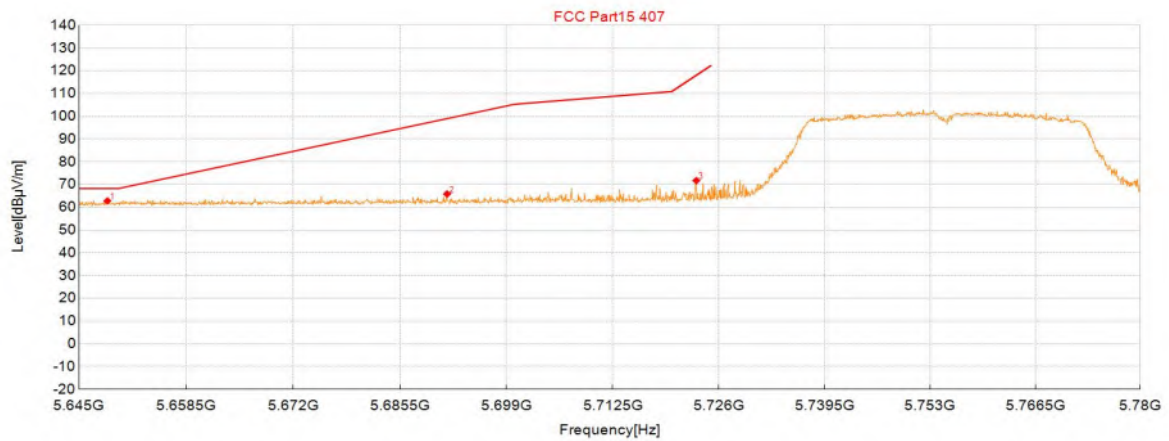

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5648.58	43.58	62.84	19.26	68.30	5.46	150	356	Horizontal
2	5691.46	46.31	65.87	19.56	99.01	33.14	150	204	Horizontal
3	5723.14	52.04	71.76	19.72	118.05	46.29	150	204	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5755	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:17:02

Test Graph

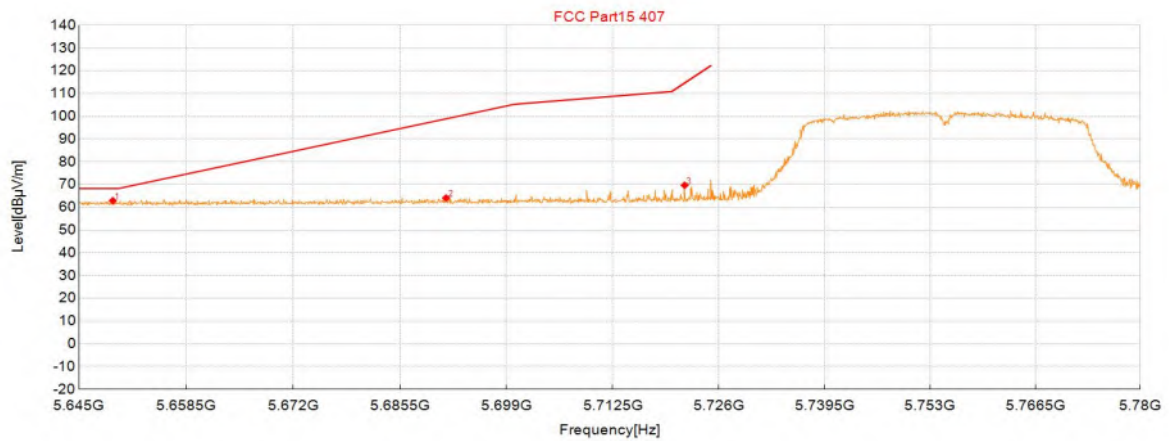

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5649.25	43.65	62.92	19.27	68.30	5.38	150	135	Vertical
2	5691.33	44.55	64.11	19.56	98.91	34.80	150	238	Vertical
3	5721.65	50.00	69.71	19.71	114.66	44.95	150	319	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5795	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:20:31

Test Graph

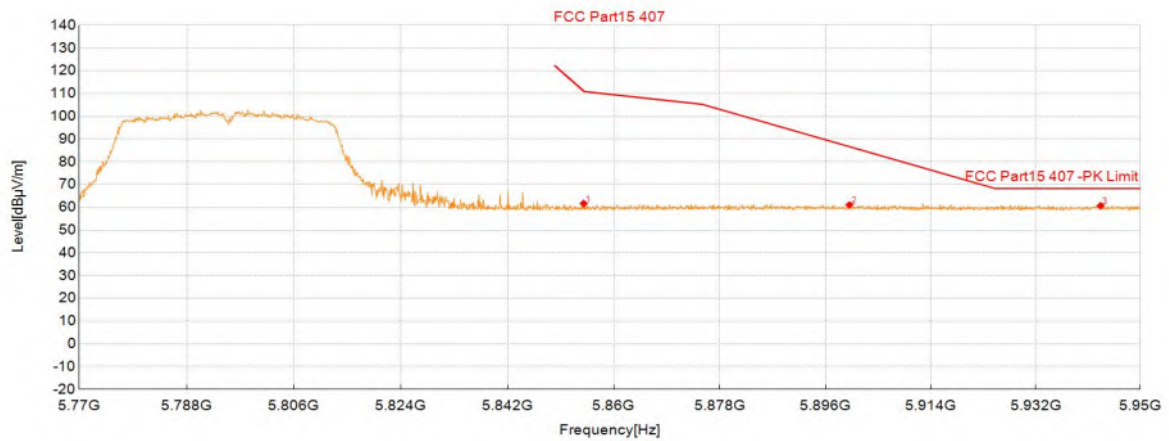

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5854.91	41.14	61.68	20.54	111.10	49.42	150	286	Horizontal
2	5900.12	40.17	61.09	20.92	86.68	25.59	150	16	Horizontal
3	5943.16	39.84	60.72	20.88	68.30	7.58	150	317	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11N40_MCS0_5795	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:21:11

Test Graph

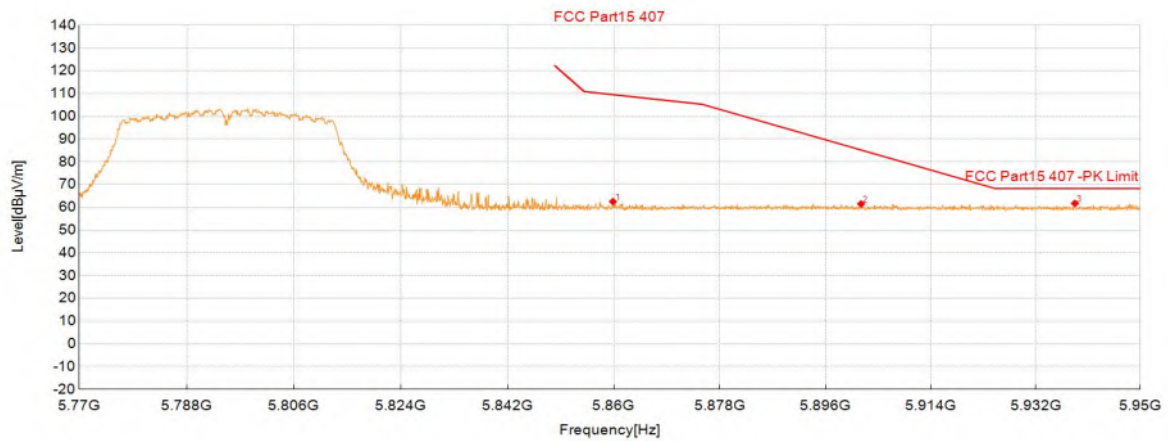

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5859.86	41.96	62.54	20.58	109.54	47.00	150	226	Vertical
2	5902.10	40.58	61.50	20.92	85.21	23.71	150	296	Vertical
3	5938.74	40.84	61.73	20.89	68.30	6.57	150	284	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5180	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:42:12

Test Graph

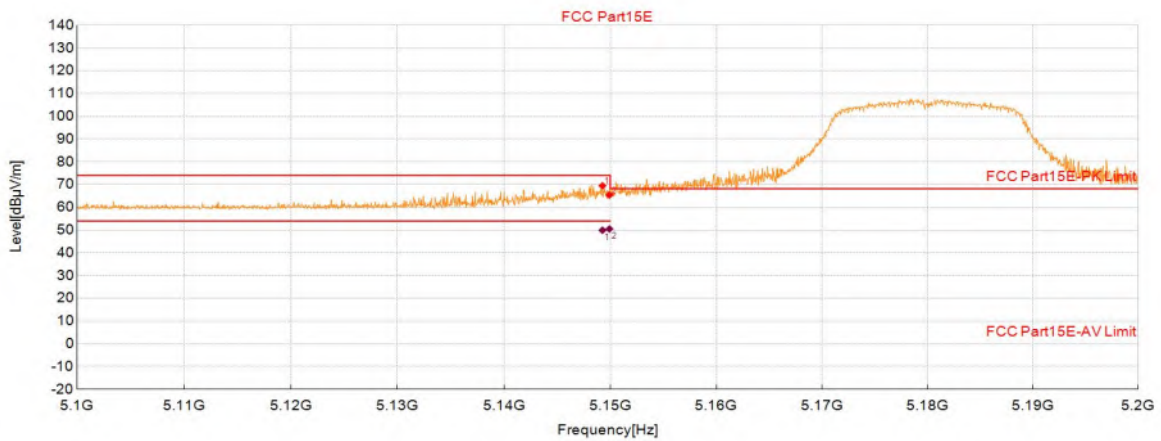

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.27	51.77	69.49	17.72	74.00	4.51	150	191	Horizontal
2	5149.92	47.67	65.39	17.72	74.00	8.61	150	36	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.27	32.22	17.72	49.94	54.00	4.06	150	191	Horizontal
2	5149.92	32.77	17.72	50.49	54.00	3.51	150	36	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5180	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:42:52

Test Graph

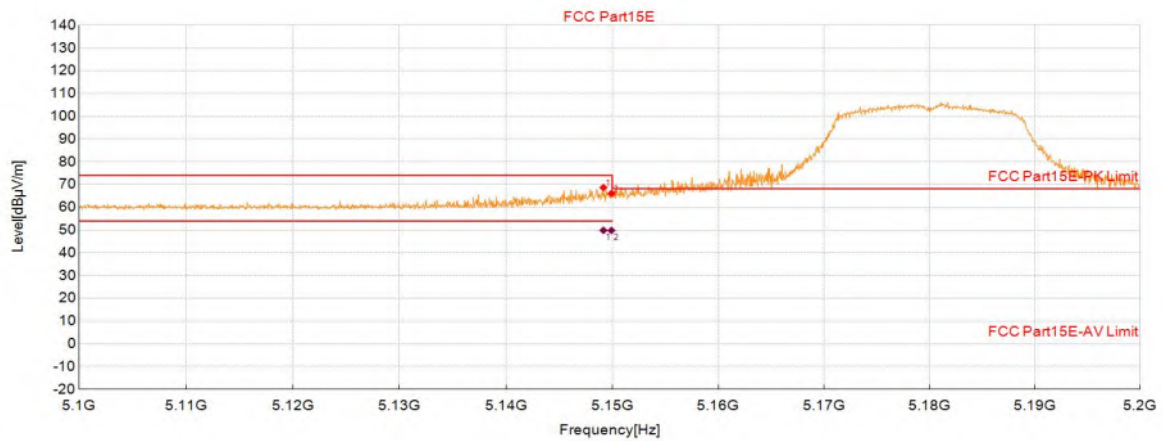

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.17	50.95	68.67	17.72	74.00	5.33	150	238	Vertical
2	5149.92	48.36	66.08	17.72	74.00	7.92	150	229	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.17	32.18	17.72	49.90	54.00	4.10	150	238	Vertical
2	5149.92	32.13	17.72	49.85	54.00	4.15	150	229	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5320	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:44:36

Test Graph

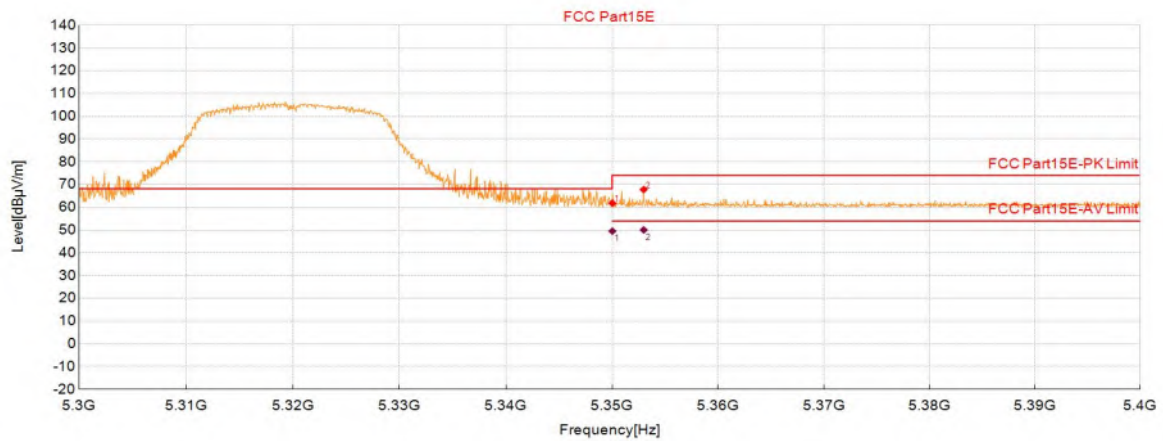

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	43.67	61.85	18.18	74.00	12.15	150	191	Horizontal
2	5352.98	49.62	67.81	18.19	74.00	6.19	150	180	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.35	18.18	49.53	54.00	4.47	150	191	Horizontal
2	5352.98	31.87	18.19	50.06	54.00	3.94	150	180	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5320	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:45:16

Test Graph

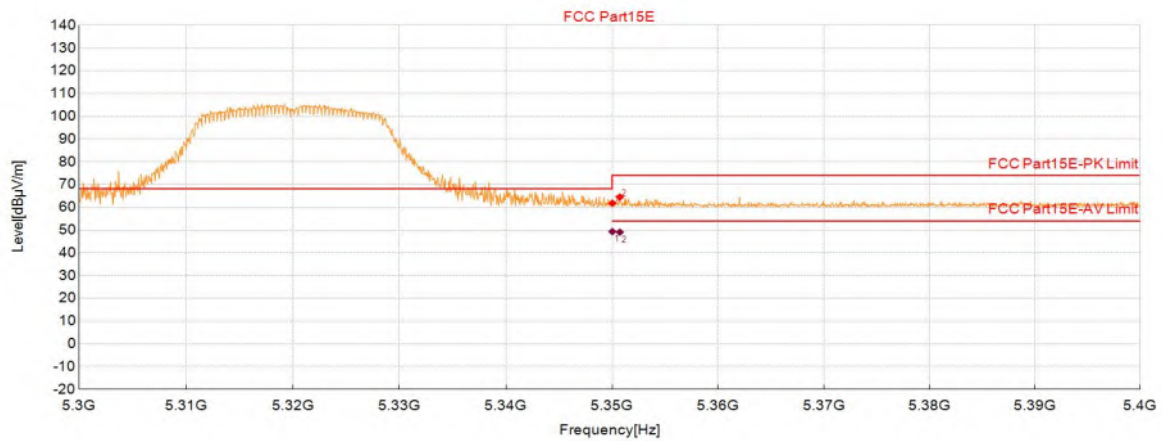

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	43.66	61.84	18.18	74.00	12.16	150	243	Vertical
2	5350.73	46.32	64.50	18.18	74.00	9.50	150	233	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.16	18.18	49.34	54.00	4.66	150	243	Vertical
2	5350.73	30.88	18.18	49.06	54.00	4.94	150	233	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level