


Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5500	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:47:02

Test Graph

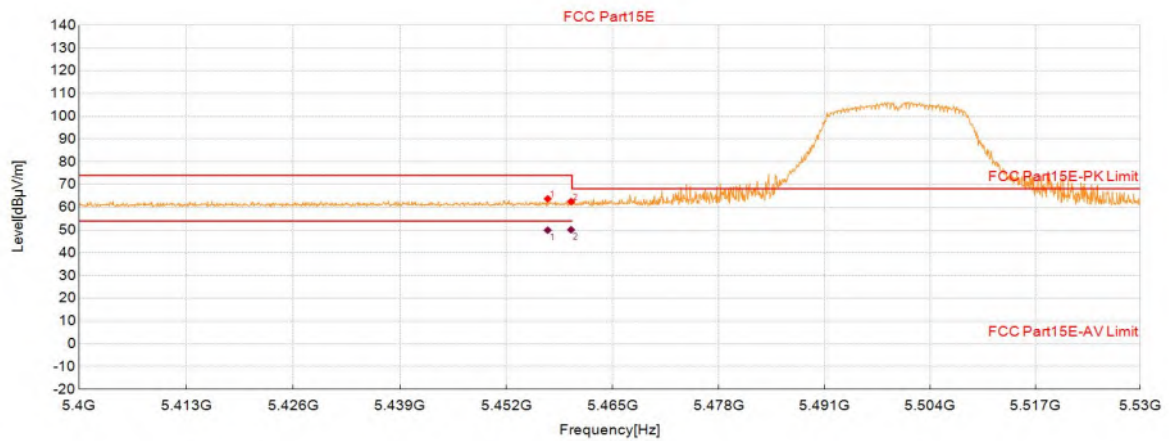

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.03	45.22	63.74	18.52	74.00	10.26	150	189	Horizontal
2	5459.89	44.02	62.54	18.52	74.00	11.46	150	53	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.03	31.43	18.52	49.95	54.00	4.05	150	189	Horizontal
2	5459.89	31.62	18.52	50.14	54.00	3.86	150	53	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5500	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:47:42

Test Graph

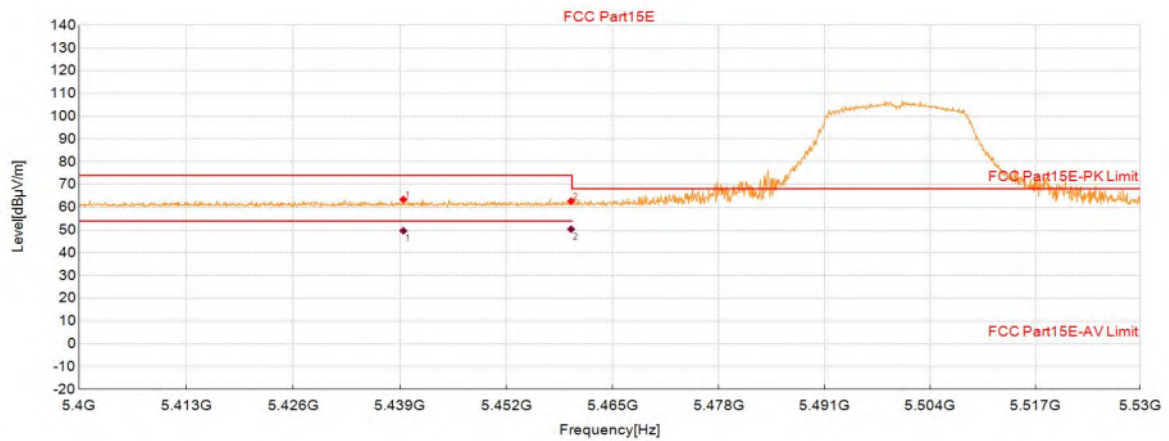

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5439.41	44.96	63.45	18.49	74.00	10.55	150	281	Vertical
2	5459.89	44.20	62.72	18.52	74.00	11.28	150	238	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5439.41	31.20	18.49	49.69	54.00	4.31	150	281	Vertical
2	5459.89	31.88	18.52	50.40	54.00	3.60	150	238	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 14:51:56

Test Graph

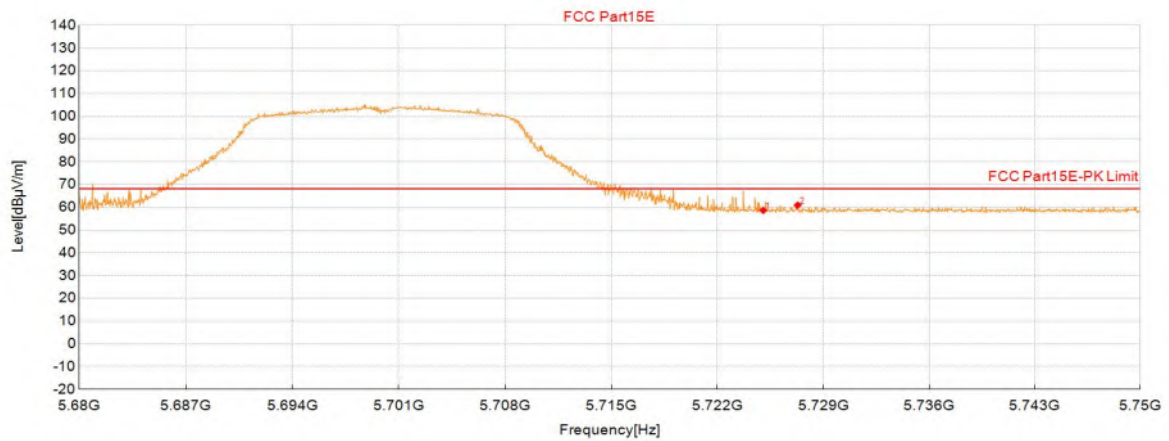

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	38.94	58.67	19.73	68.20	9.53	150	190	Horizontal
2	5727.31	41.18	60.92	19.74	68.20	7.28	150	298	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 14:52:36

Test Graph

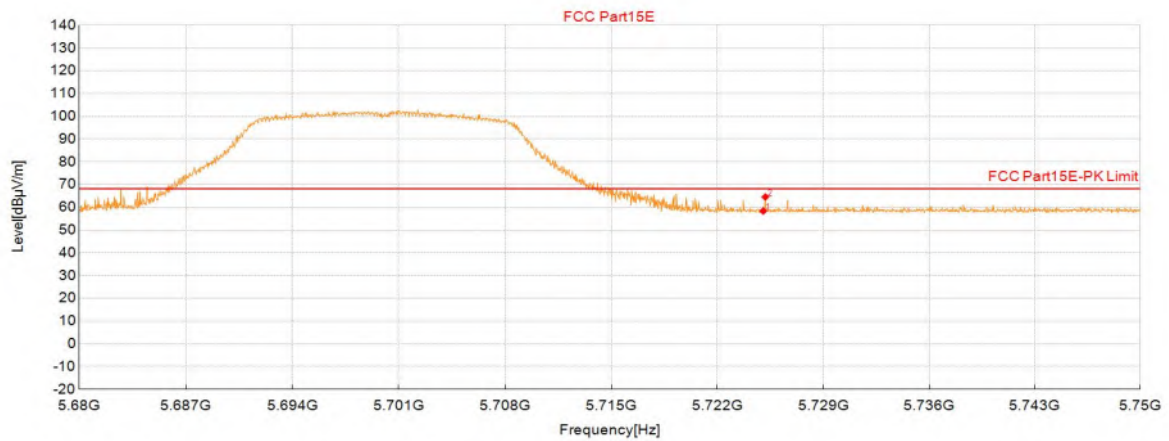

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	38.68	58.41	19.73	68.20	9.79	150	214	Vertical
2	5725.17	44.83	64.56	19.73	68.20	3.64	150	32	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:54:17

Test Graph

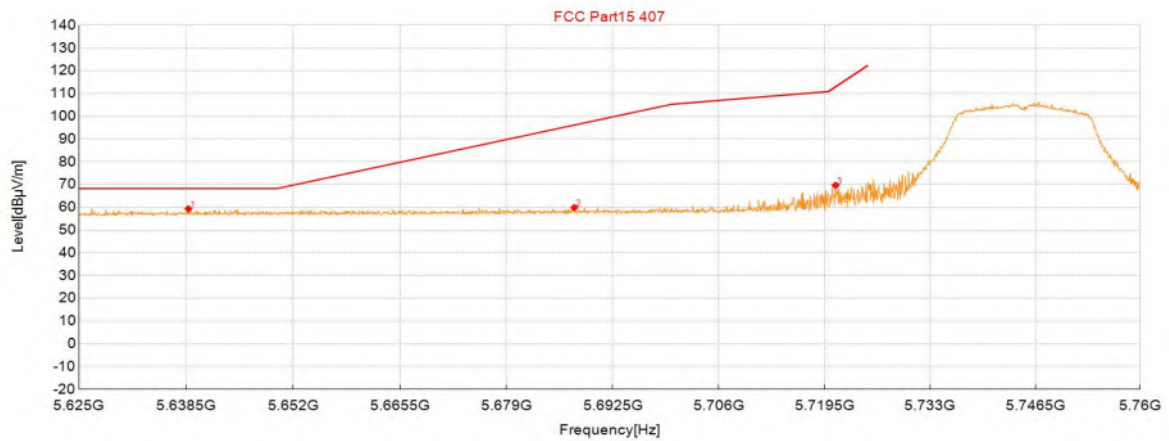

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5638.78	40.11	59.31	19.20	68.30	8.99	150	285	Horizontal
2	5687.60	40.33	59.86	19.53	96.16	36.30	150	122	Horizontal
3	5720.90	49.98	69.68	19.70	112.95	43.27	150	288	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:54:57

Test Graph

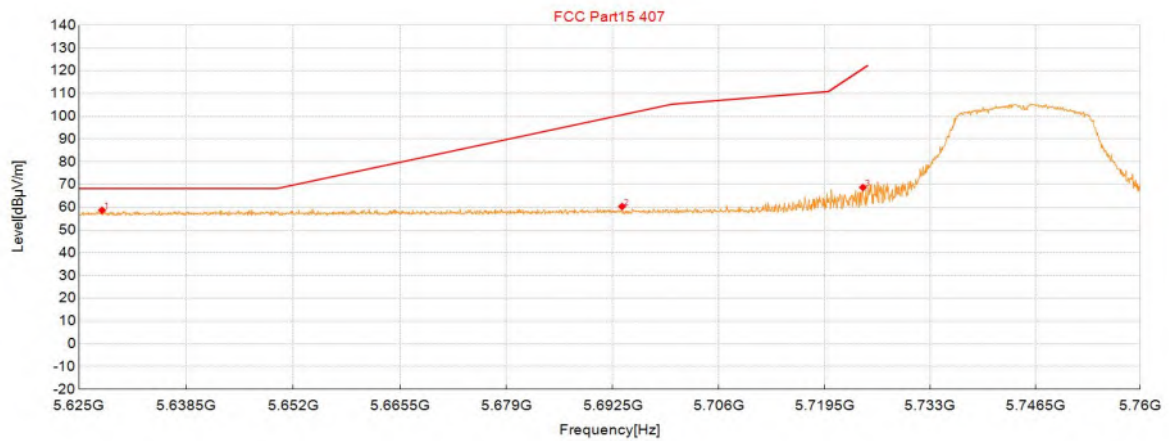

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5627.90	39.59	58.72	19.13	68.30	9.58	150	247	Vertical
2	5693.68	40.80	60.37	19.57	100.64	40.27	150	225	Vertical
3	5724.41	49.01	68.73	19.72	120.95	52.22	150	39	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5825	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:56:19

Test Graph

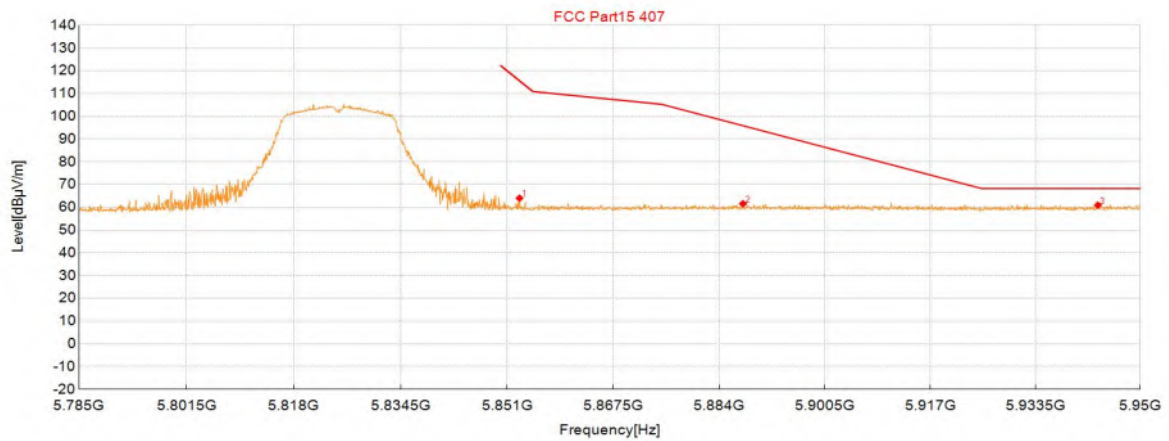

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5852.93	43.50	64.03	20.53	115.62	51.59	150	280	Horizontal
2	5887.68	40.78	61.59	20.81	95.89	34.30	150	128	Horizontal
3	5943.31	40.07	60.95	20.88	68.30	7.35	150	152	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC20_MCS0_5825	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 14:56:59

Test Graph

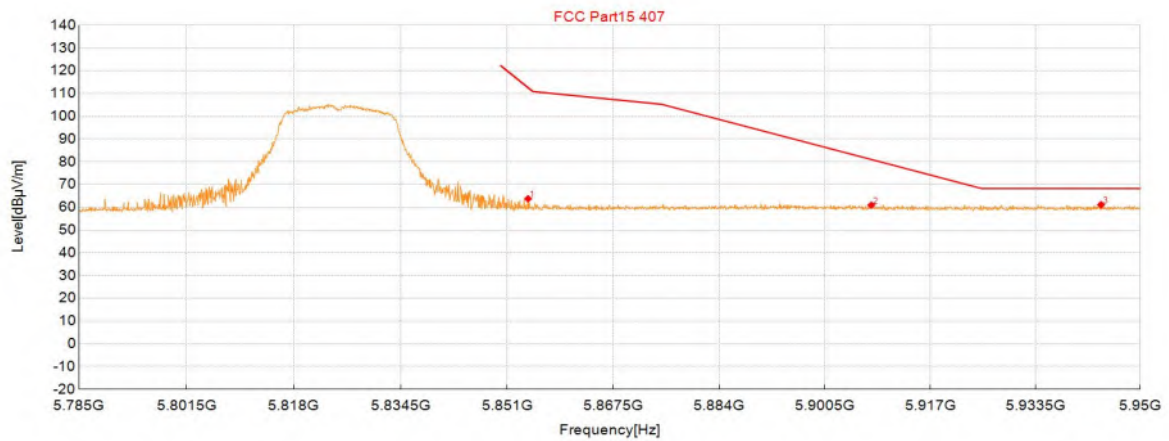

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5854.25	43.21	63.75	20.54	112.60	48.85	150	355	Vertical
2	5907.74	40.06	60.97	20.91	81.04	20.07	150	217	Vertical
3	5943.81	40.26	61.14	20.88	68.30	7.16	150	126	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5190	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 15:01:11

Test Graph

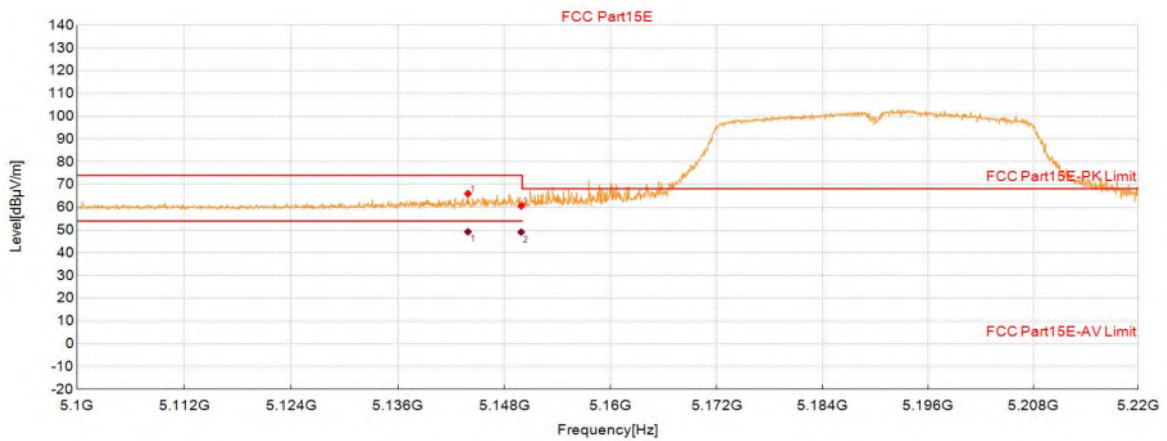

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.88	48.29	66.01	17.72	74.00	7.99	150	187	Horizontal
2	5149.88	42.87	60.59	17.72	74.00	13.41	150	161	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.88	31.54	17.72	49.26	54.00	4.74	150	187	Horizontal
2	5149.88	31.39	17.72	49.11	54.00	4.89	150	161	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5190	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 14		

Start of Test:2026-08-16 15:01:51

Test Graph

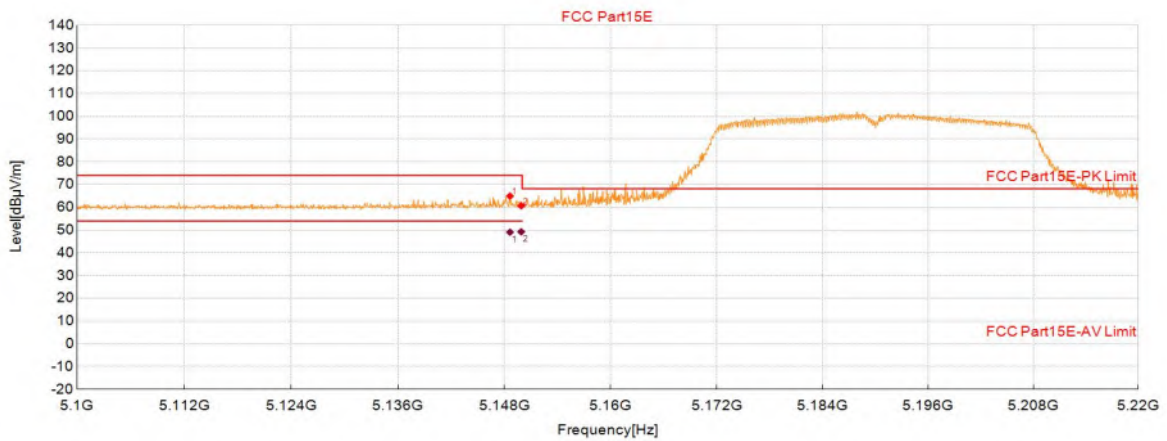

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.62	47.24	64.96	17.72	74.00	9.04	150	249	Vertical
2	5149.88	42.95	60.67	17.72	74.00	13.33	150	357	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.62	31.34	17.72	49.06	54.00	4.94	150	249	Vertical
2	5149.88	31.52	17.72	49.24	54.00	4.76	150	357	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5310	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:03:22

Test Graph

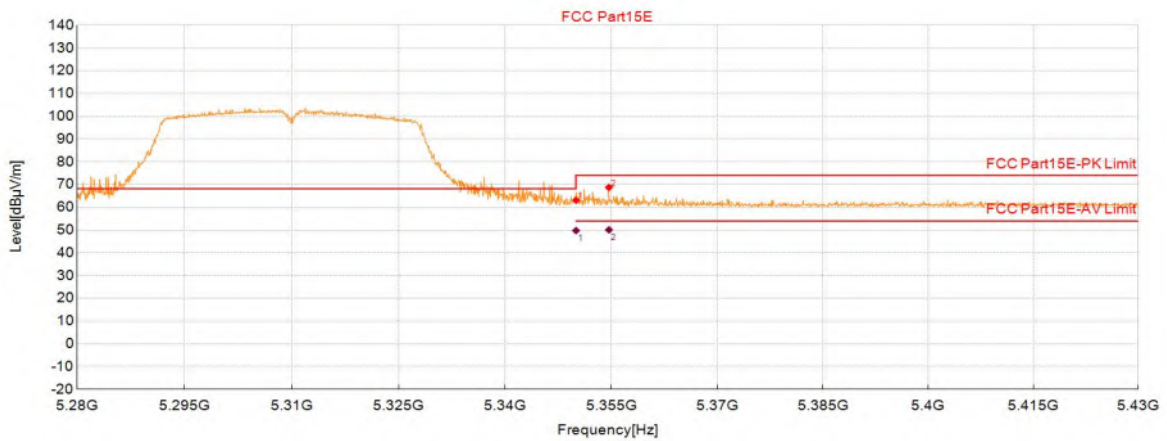

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	44.91	63.09	18.18	74.00	10.91	150	195	Horizontal
2	5354.66	50.55	68.75	18.20	74.00	5.25	150	200	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	31.60	18.18	49.78	54.00	4.22	150	195	Horizontal
2	5354.66	31.91	18.20	50.11	54.00	3.89	150	200	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5310	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:04:02

Test Graph

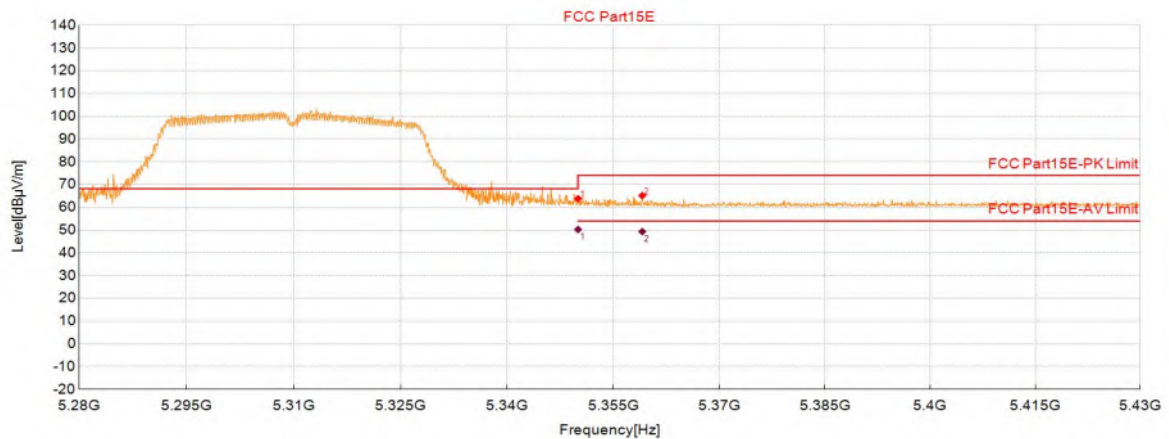

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	45.64	63.82	18.18	74.00	10.18	150	27	Vertical
2	5359.09	46.91	65.13	18.22	74.00	8.87	150	319	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	32.10	18.18	50.28	54.00	3.72	150	27	Vertical
2	5359.09	31.12	18.22	49.34	54.00	4.66	150	319	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5510	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:05:36

Test Graph

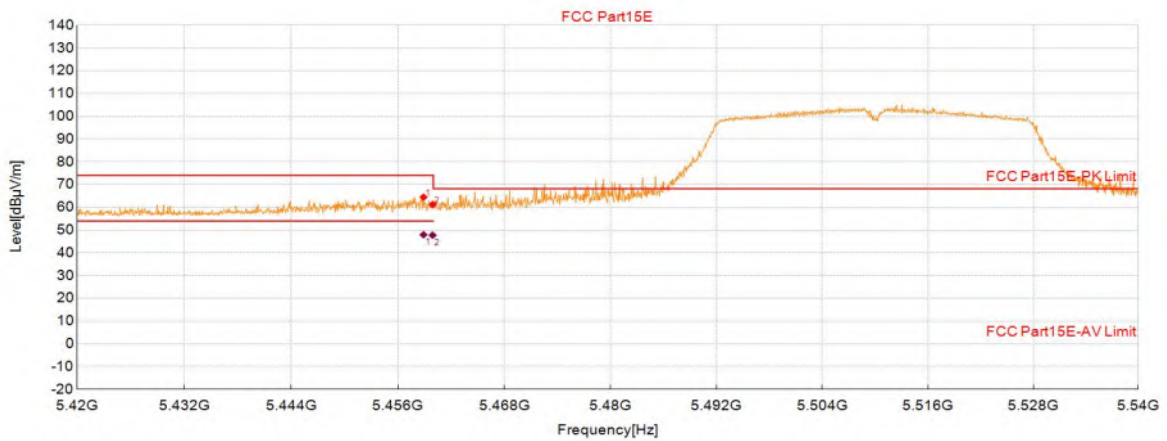

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.90	45.96	64.48	18.52	74.00	9.52	150	291	Horizontal
2	5459.92	42.69	61.21	18.52	74.00	12.79	150	286	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.90	29.46	18.52	47.98	54.00	6.02	150	291	Horizontal
2	5459.92	29.21	18.52	47.73	54.00	6.27	150	286	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5510	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:06:15

Test Graph

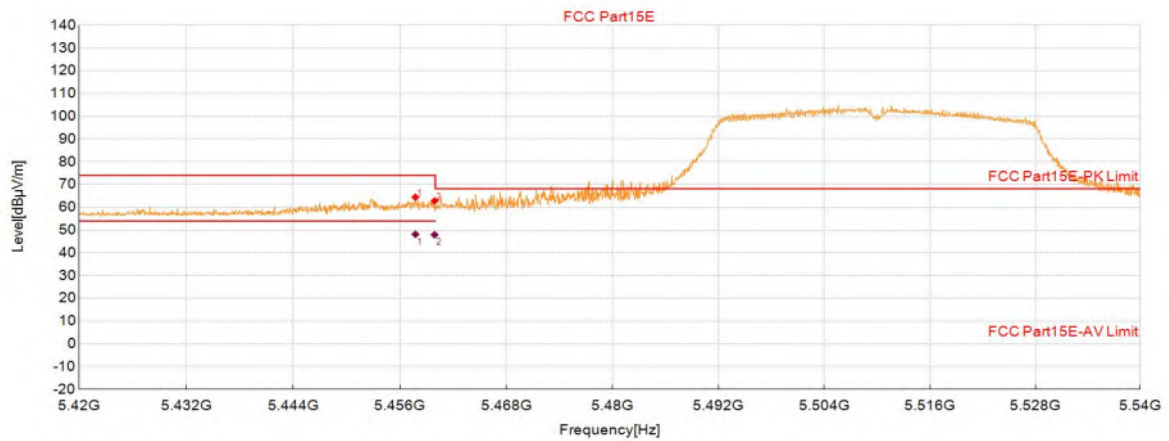

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.76	45.93	64.45	18.52	74.00	9.55	150	237	Vertical
2	5459.92	44.30	62.82	18.52	74.00	11.18	150	276	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.76	29.64	18.52	48.16	54.00	5.84	150	237	Vertical
2	5459.92	29.42	18.52	47.94	54.00	6.06	150	276	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5670	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:08:02

Test Graph

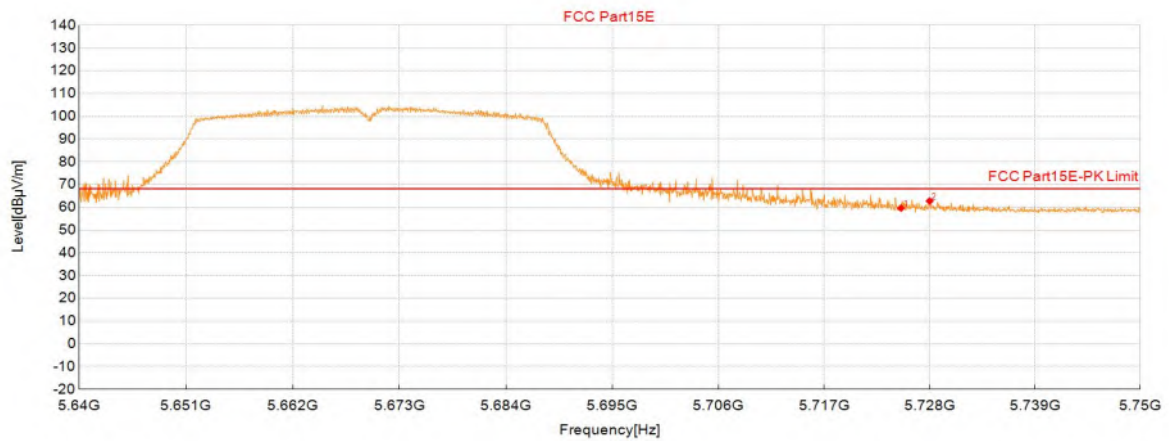

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	39.94	59.67	19.73	68.20	8.53	150	286	Horizontal
2	5727.99	43.04	62.78	19.74	68.20	5.42	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5670	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:08:42

Test Graph

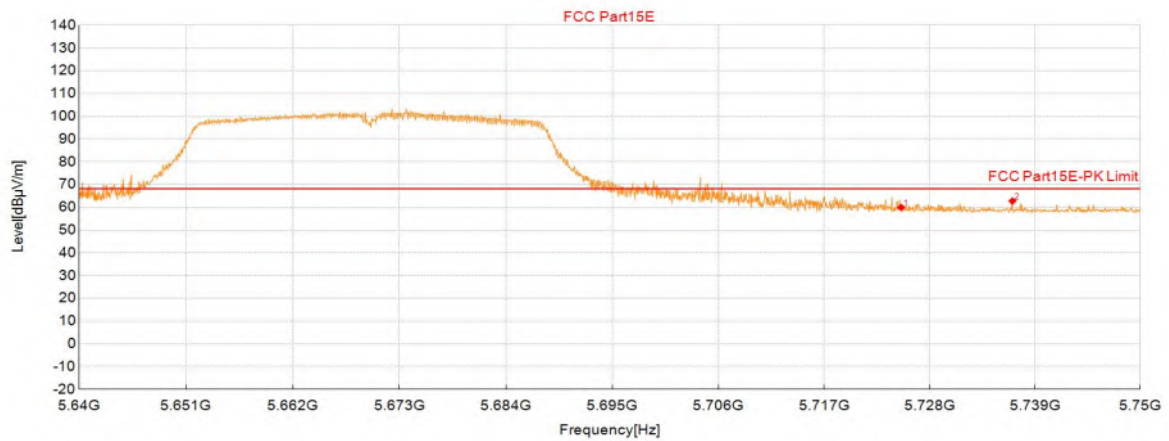

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	40.23	59.96	19.73	68.20	8.24	150	292	Vertical
2	5736.63	42.99	62.77	19.78	68.20	5.43	150	238	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5755	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:10:43

Test Graph

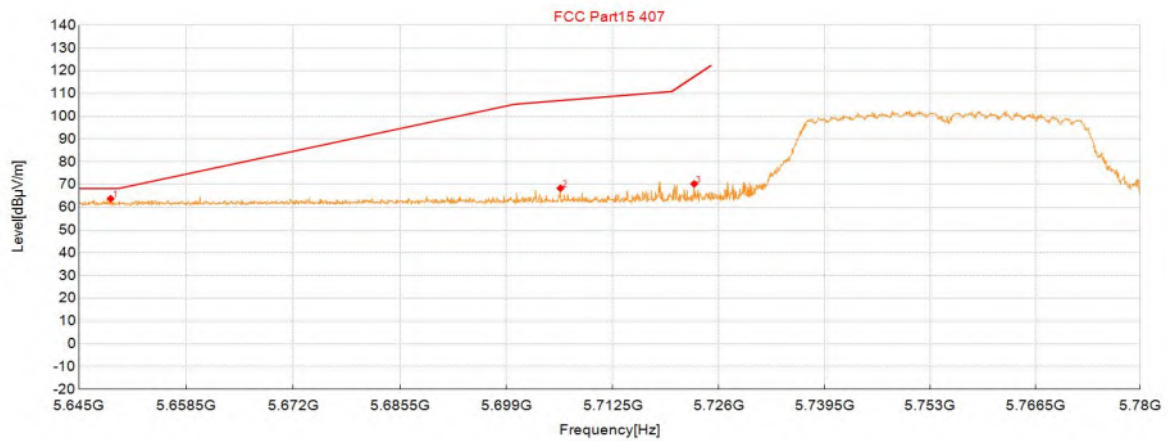

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5648.98	44.51	63.77	19.26	68.30	4.53	150	267	Horizontal
2	5705.85	48.77	68.41	19.64	106.94	38.53	150	283	Horizontal
3	5722.87	50.60	70.31	19.71	117.44	47.13	150	166	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5755	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:11:19

Test Graph

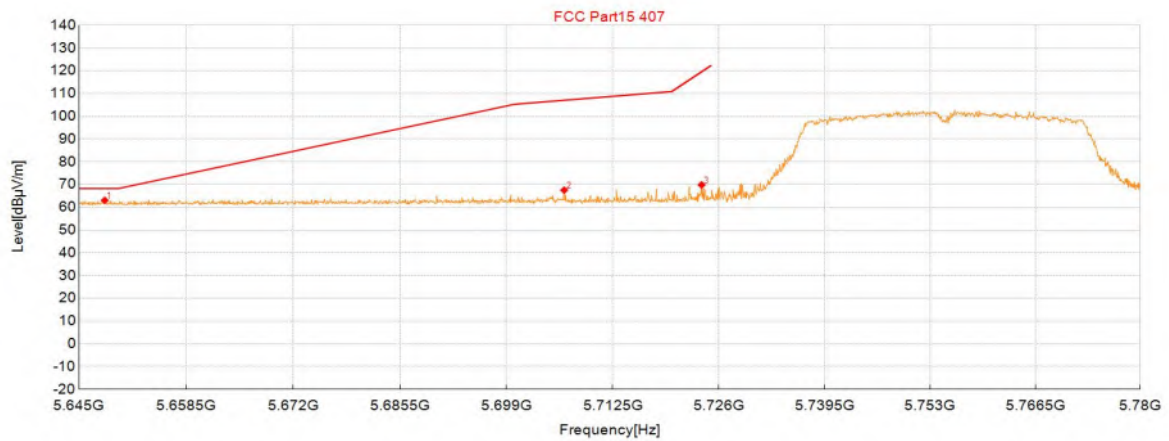

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5648.24	43.82	63.08	19.26	68.30	5.22	150	0	Vertical
2	5706.32	47.92	67.56	19.64	107.07	39.51	150	239	Vertical
3	5723.81	50.14	69.86	19.72	119.59	49.73	150	24	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5795	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:14:21

Test Graph

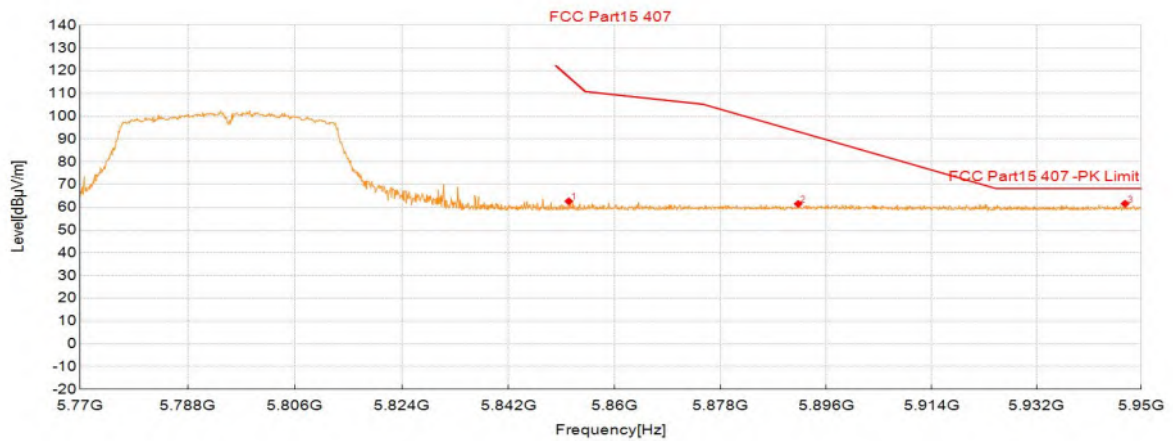

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5852.21	42.16	62.68	20.52	117.26	54.58	150	190	Horizontal
2	5891.20	40.67	61.52	20.85	93.28	31.76	150	86	Horizontal
3	5947.21	40.72	61.60	20.88	68.30	6.70	150	224	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AC40_MCS0_5795	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:15:01

Test Graph

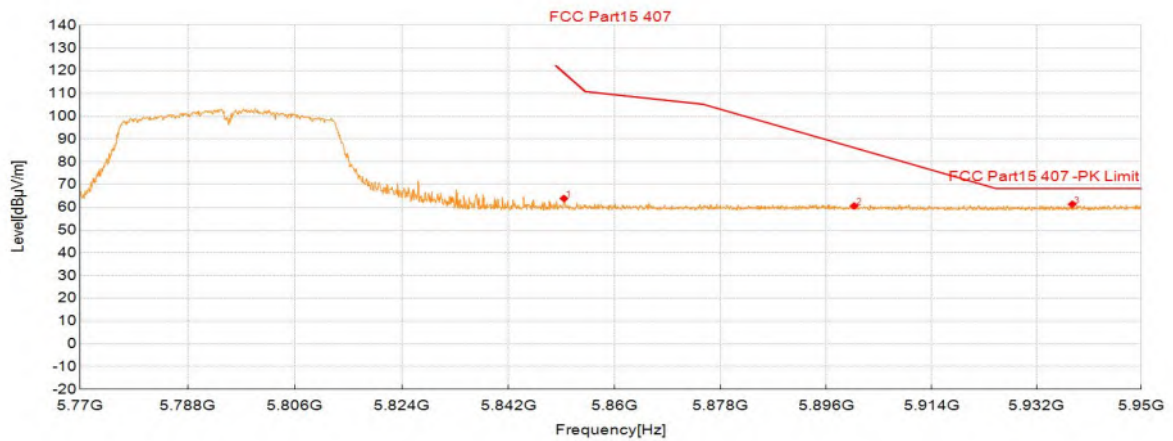

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5851.40	43.39	63.91	20.52	119.11	55.20	150	255	Vertical
2	5900.75	39.70	60.62	20.92	86.21	25.59	150	155	Vertical
3	5938.11	40.46	61.35	20.89	68.30	6.95	150	356	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5180	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:23:53

Test Graph

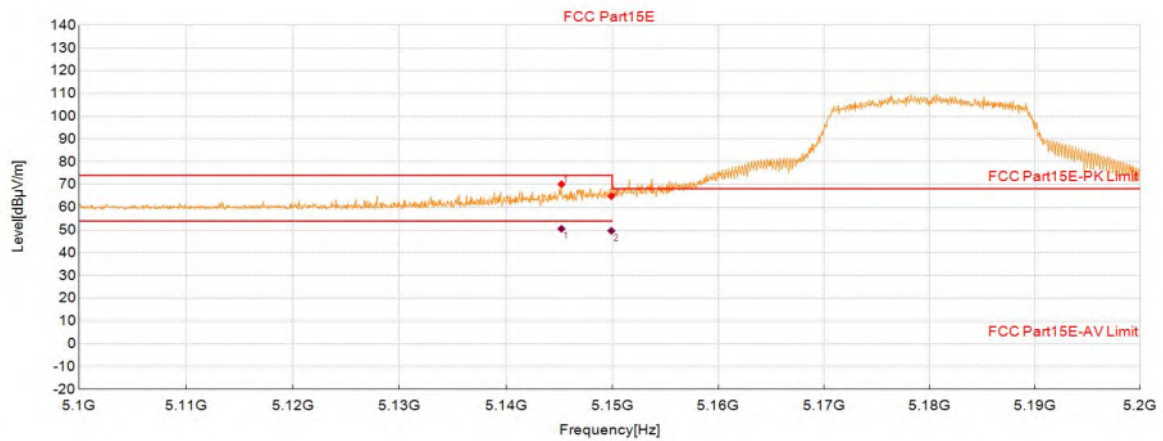

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.22	52.43	70.15	17.72	74.00	3.85	150	191	Horizontal
2	5149.92	47.18	64.90	17.72	74.00	9.10	150	358	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.22	32.85	17.72	50.57	54.00	3.43	150	191	Horizontal
2	5149.92	31.95	17.72	49.67	54.00	4.33	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5180	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:24:33

Test Graph

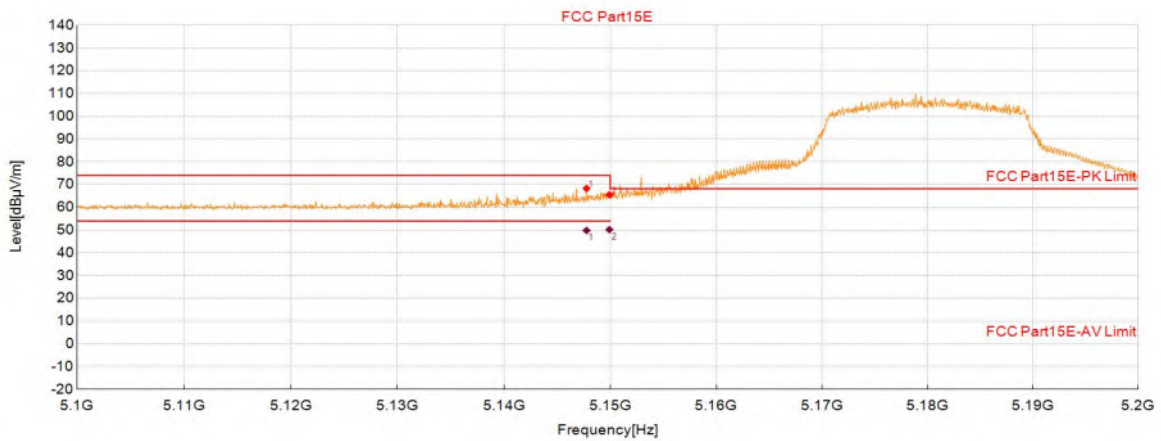

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.77	50.58	68.30	17.72	74.00	5.70	150	247	Vertical
2	5149.92	47.74	65.46	17.72	74.00	8.54	150	281	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.77	32.10	17.72	49.82	54.00	4.18	150	247	Vertical
2	5149.92	32.49	17.72	50.21	54.00	3.79	150	281	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5320	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:26:16

Test Graph

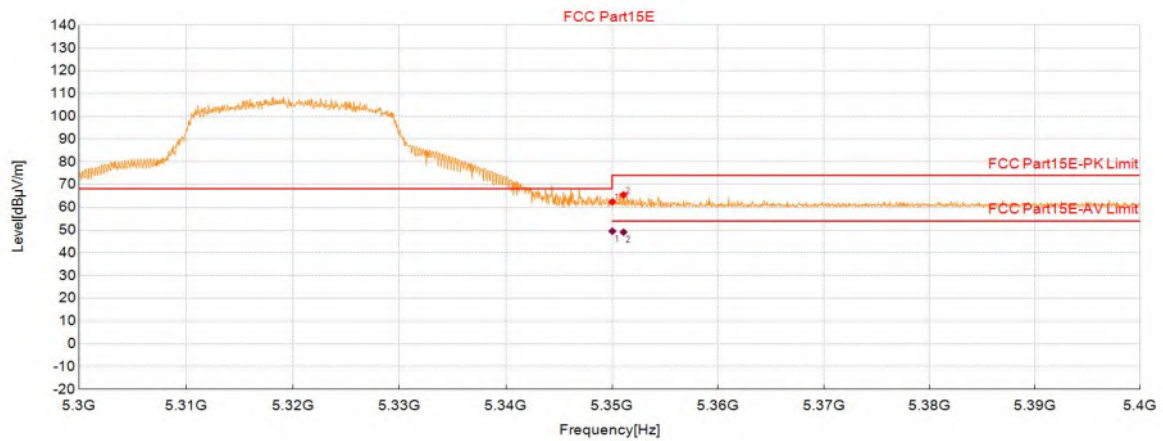

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	44.19	62.37	18.18	74.00	11.63	150	278	Horizontal
2	5351.08	47.29	65.47	18.18	74.00	8.53	150	302	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.30	18.18	49.48	54.00	4.52	150	278	Horizontal
2	5351.08	30.90	18.18	49.08	54.00	4.92	150	302	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5320	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:26:56

Test Graph

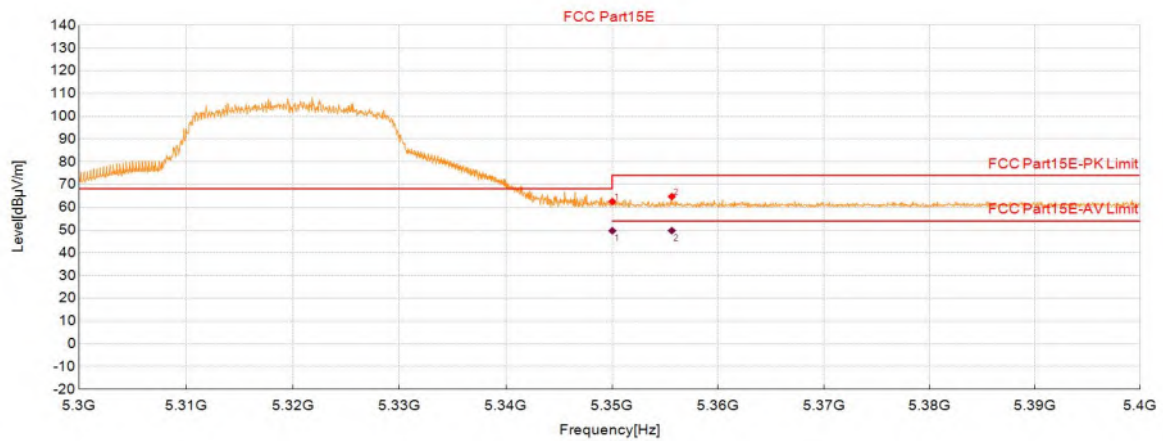

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	44.32	62.50	18.18	74.00	11.50	150	260	Vertical
2	5355.63	46.51	64.72	18.21	74.00	9.28	150	203	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	31.52	18.18	49.70	54.00	4.30	150	260	Vertical
2	5355.63	31.56	18.21	49.77	54.00	4.23	150	203	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5500	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:28:29

Test Graph

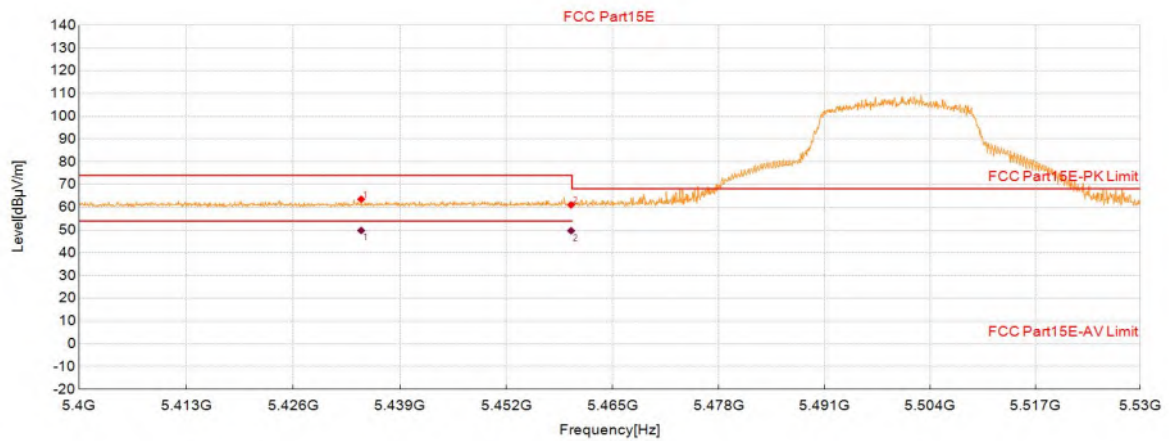

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5434.27	45.06	63.54	18.48	74.00	10.46	150	308	Horizontal
2	5459.89	42.56	61.08	18.52	74.00	12.92	150	9	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5434.27	31.35	18.48	49.83	54.00	4.17	150	308	Horizontal
2	5459.89	31.19	18.52	49.71	54.00	4.29	150	9	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5500	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:29:09

Test Graph

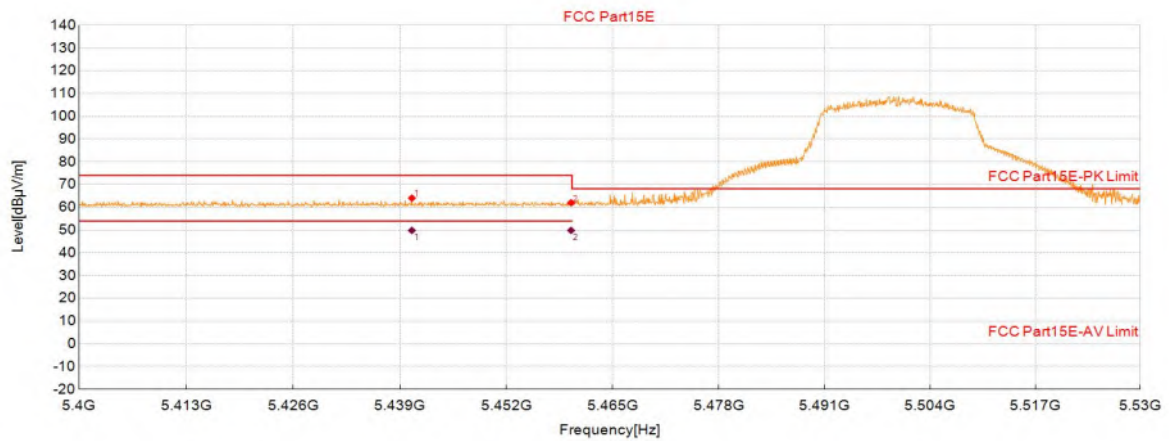

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.45	45.57	64.06	18.49	74.00	9.94	150	242	Vertical
2	5459.89	43.48	62.00	18.52	74.00	12.00	150	261	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.45	31.37	18.49	49.86	54.00	4.14	150	242	Vertical
2	5459.89	31.35	18.52	49.87	54.00	4.13	150	261	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 14		

Start of Test:2026-08-16 15:33:02

Test Graph

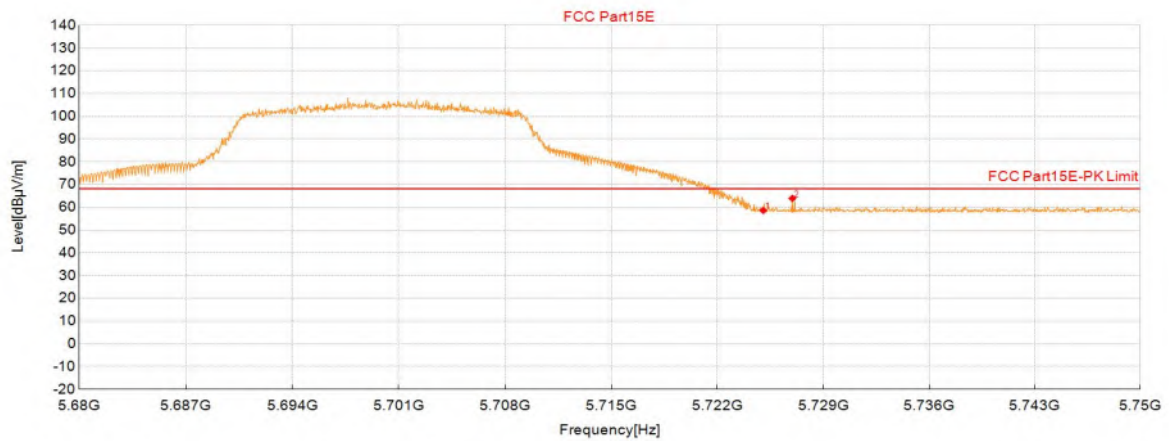

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	38.94	58.67	19.73	68.20	9.53	150	339	Horizontal
2	5726.96	44.21	63.94	19.73	68.20	4.26	150	339	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5700	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 14		

Start of Test:2026-08-16 15:33:42

Test Graph

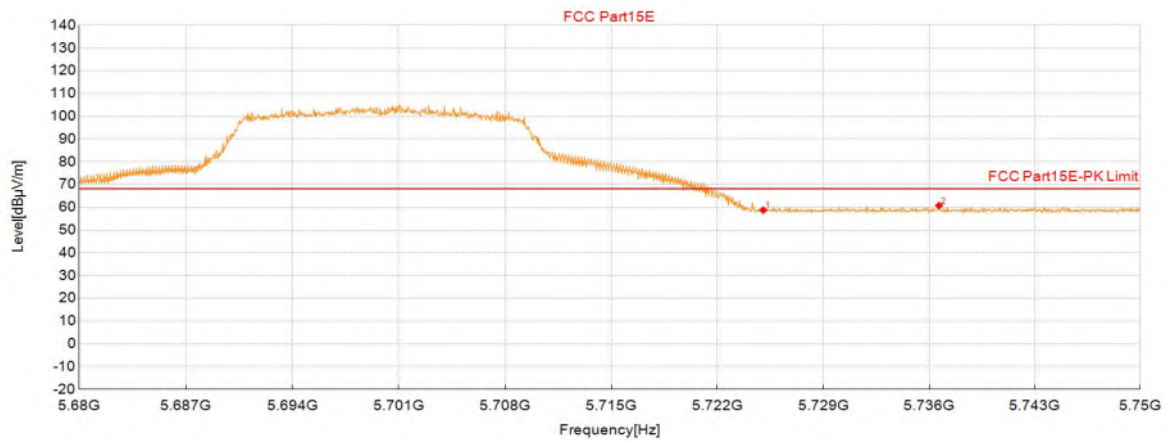

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	39.04	58.77	19.73	68.20	9.43	150	48	Vertical
2	5736.66	40.98	60.76	19.78	68.20	7.44	150	343	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:34:58

Test Graph

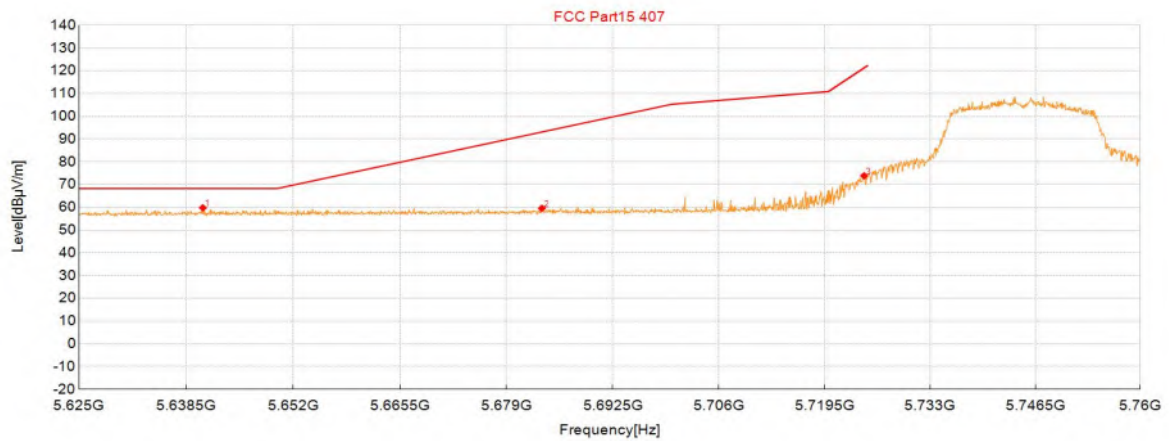

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5640.60	40.58	59.79	19.21	68.30	8.51	150	86	Horizontal
2	5683.48	40.09	59.59	19.50	93.11	33.52	150	277	Horizontal
3	5724.54	54.15	73.87	19.72	121.26	47.39	150	188	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5745	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:35:37

Test Graph

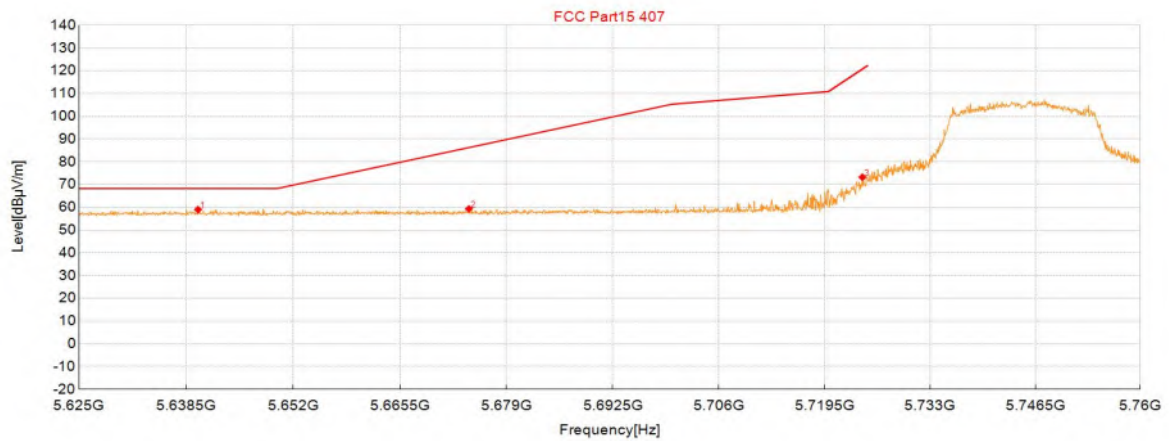

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5639.99	39.80	59.01	19.21	68.30	9.29	150	164	Vertical
2	5674.23	39.87	59.31	19.44	86.27	26.96	150	335	Vertical
3	5724.34	53.52	73.24	19.72	120.80	47.56	150	234	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5825	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:36:38

Test Graph

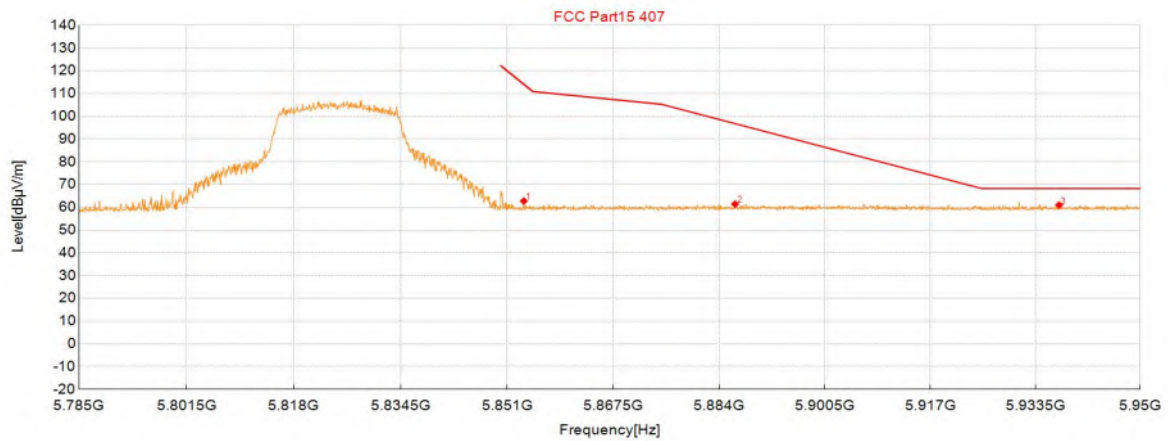

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5853.59	42.25	62.78	20.53	114.11	51.33	150	196	Horizontal
2	5886.44	40.62	61.42	20.80	96.80	35.38	150	340	Horizontal
3	5937.21	40.13	61.02	20.89	68.30	7.28	150	26	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX20_MCS0_5825	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:37:18

Test Graph

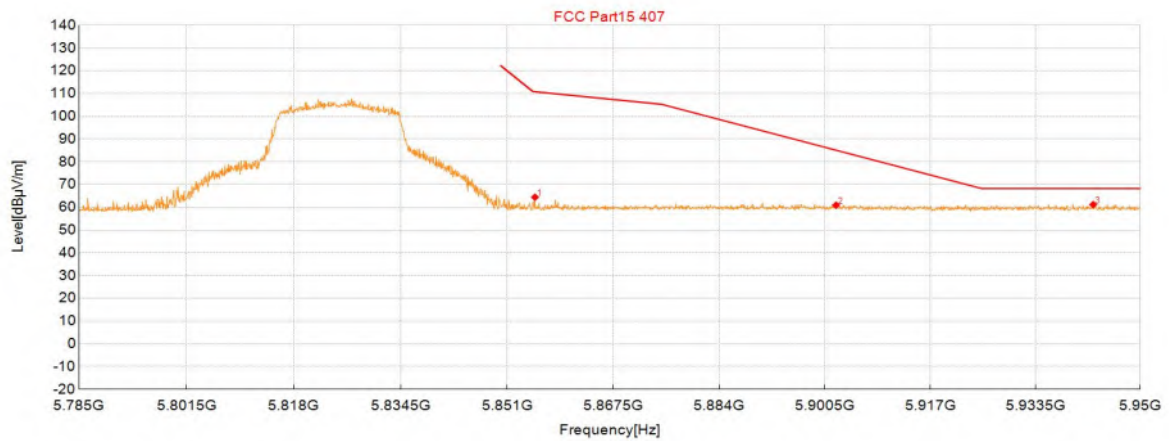

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5855.33	43.91	64.46	20.55	110.81	46.35	150	215	Vertical
2	5902.21	40.01	60.93	20.92	85.13	24.20	150	257	Vertical
3	5942.57	40.34	61.22	20.88	68.30	7.08	150	356	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5190	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 13		

Start of Test:2026-08-16 15:41:28

Test Graph

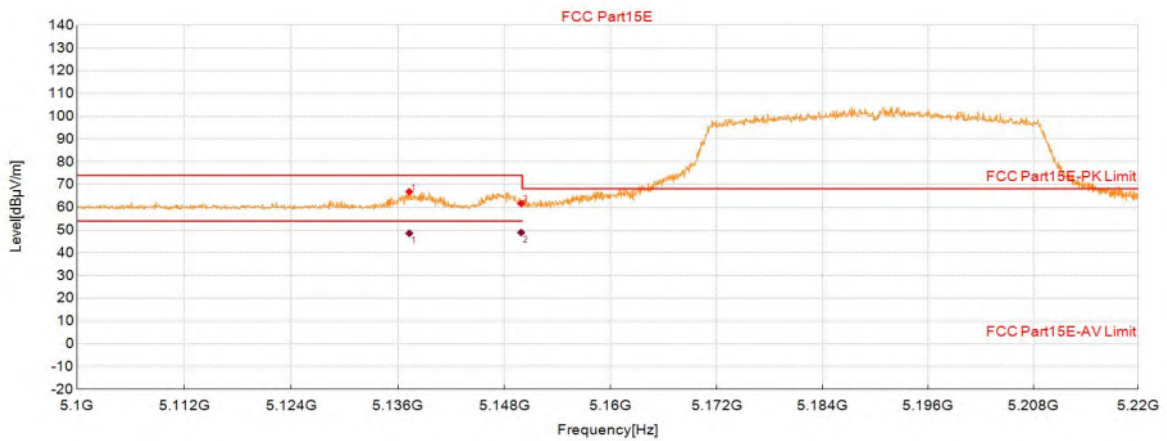

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5137.28	49.12	66.83	17.71	74.00	7.17	150	177	Horizontal
2	5149.88	43.98	61.70	17.72	74.00	12.30	150	357	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5137.28	30.87	17.71	48.58	54.00	5.42	150	177	Horizontal
2	5149.88	31.20	17.72	48.92	54.00	5.08	150	357	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5190	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 13		

Start of Test:2026-08-16 15:42:08

Test Graph

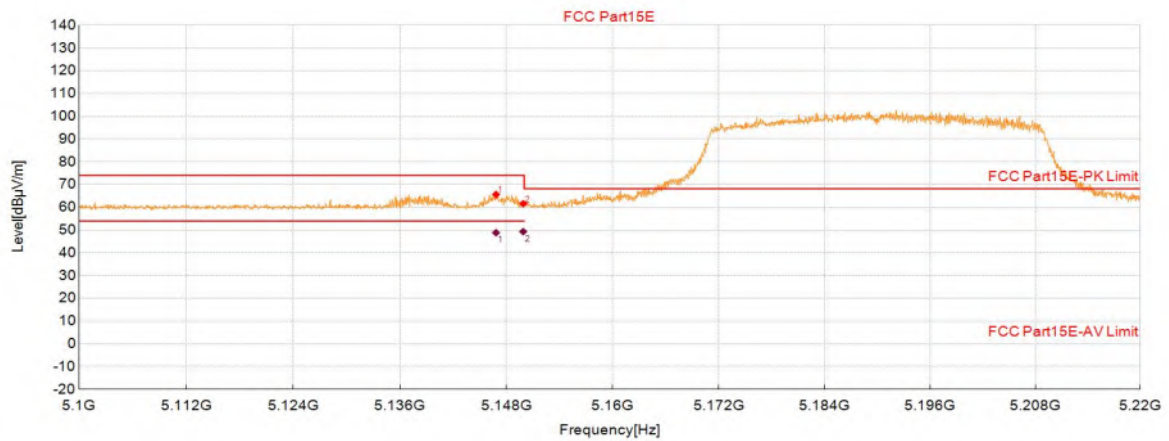

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.82	47.94	65.66	17.72	74.00	8.34	150	257	Vertical
2	5149.88	43.86	61.58	17.72	74.00	12.42	150	322	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.82	31.13	17.72	48.85	54.00	5.15	150	257	Vertical
2	5149.88	31.61	17.72	49.33	54.00	4.67	150	322	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5310	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:43:46

Test Graph

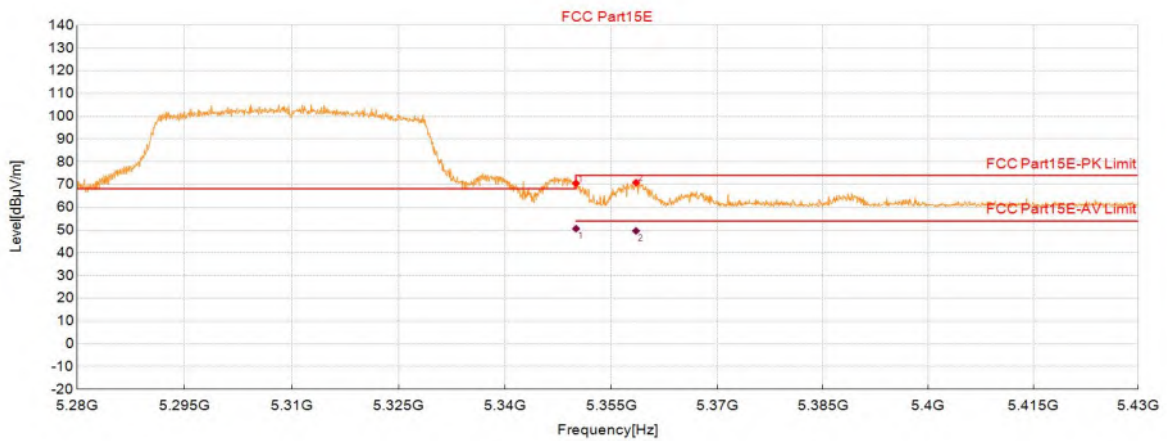

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	52.41	70.59	18.18	74.00	3.41	150	190	Horizontal
2	5358.49	52.66	70.88	18.22	74.00	3.12	150	190	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	32.46	18.18	50.64	54.00	3.36	150	190	Horizontal
2	5358.49	31.42	18.22	49.64	54.00	4.36	150	190	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5310	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:44:26

Test Graph

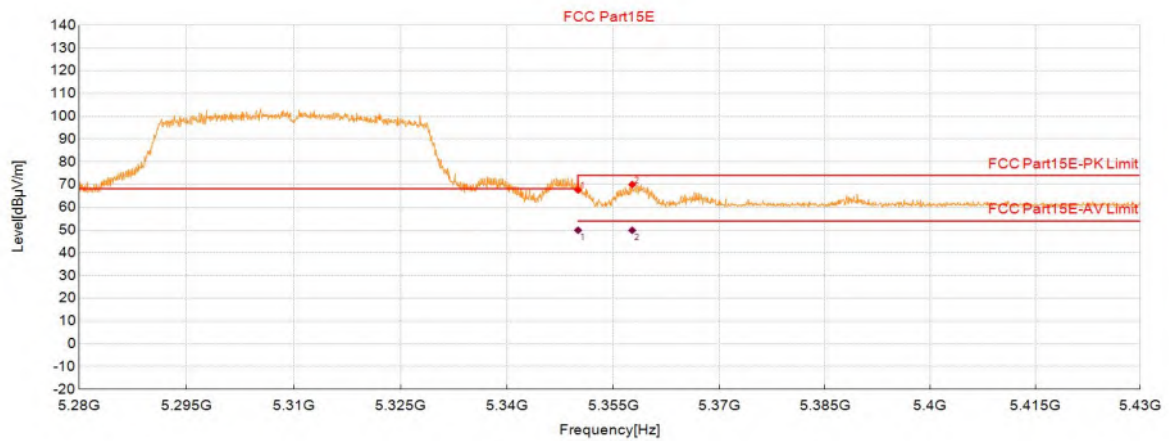

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	49.45	67.63	18.18	74.00	6.37	150	228	Vertical
2	5357.66	51.79	70.01	18.22	74.00	3.99	150	238	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	31.75	18.18	49.93	54.00	4.07	150	228	Vertical
2	5357.66	31.67	18.22	49.89	54.00	4.11	150	238	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5510	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:46:17

Test Graph

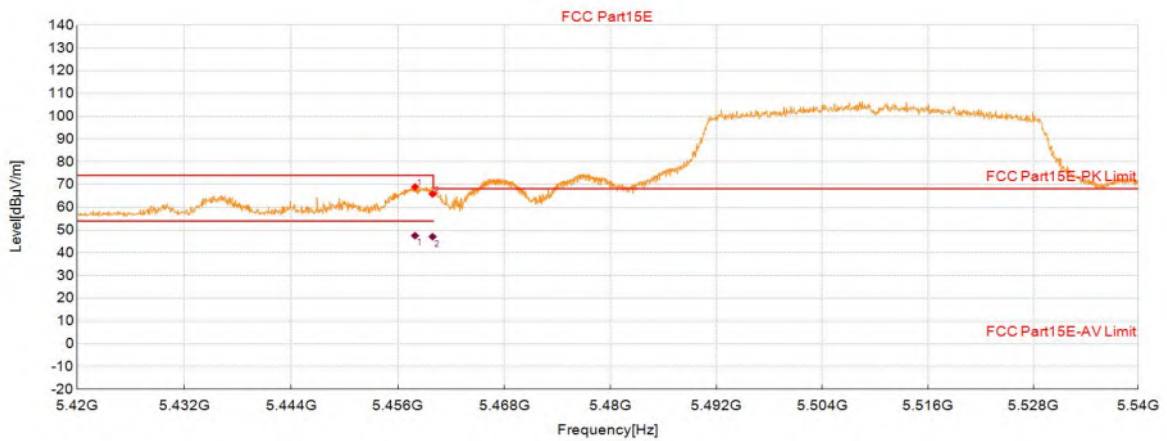

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.94	50.50	69.02	18.52	74.00	4.98	150	185	Horizontal
2	5459.92	47.32	65.84	18.52	74.00	8.16	150	357	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.94	29.05	18.52	47.57	54.00	6.43	150	185	Horizontal
2	5459.92	28.57	18.52	47.09	54.00	6.91	150	357	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5510	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:46:57

Test Graph

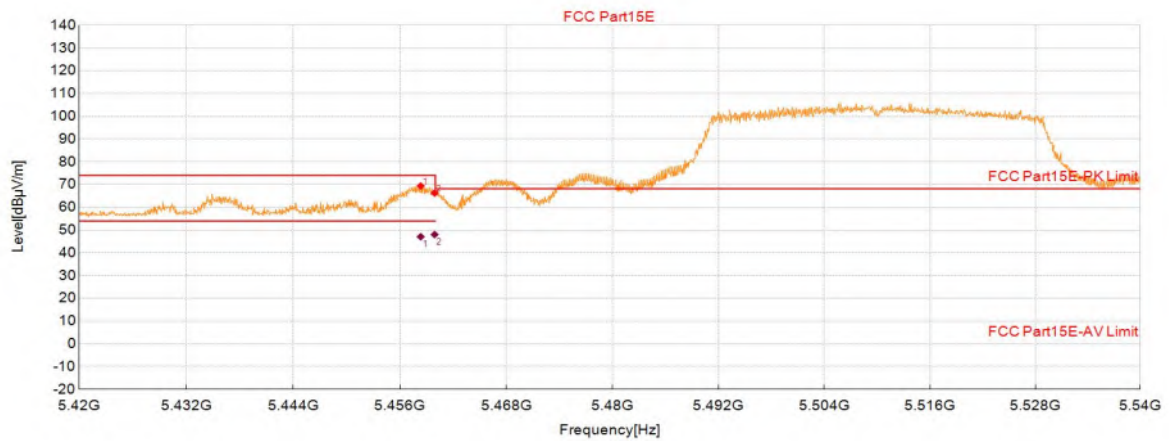

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.36	50.86	69.38	18.52	74.00	4.62	150	238	Vertical
2	5459.92	47.77	66.29	18.52	74.00	7.71	150	279	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.36	28.56	18.52	47.08	54.00	6.92	150	238	Vertical
2	5459.92	29.52	18.52	48.04	54.00	5.96	150	279	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5670	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 14		

Start of Test:2026-08-16 15:50:34

Test Graph

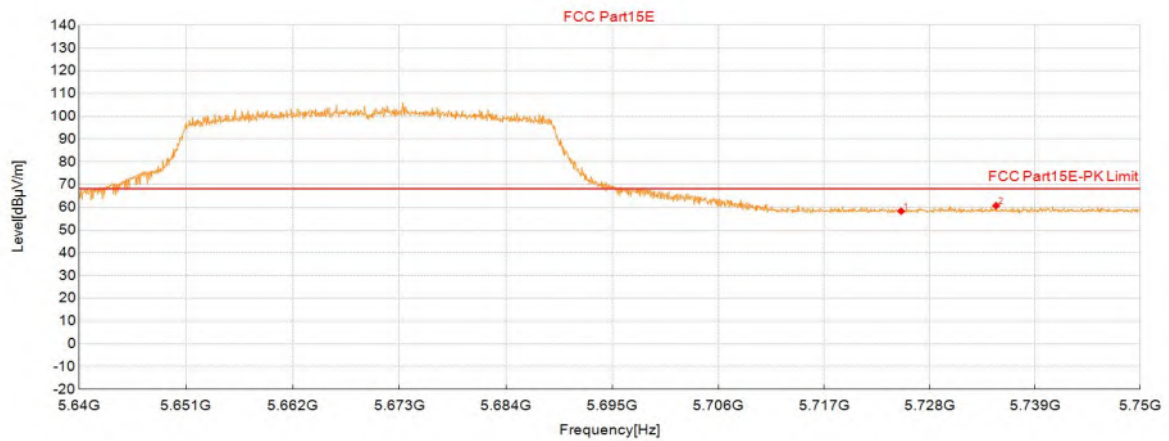

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	38.61	58.34	19.73	68.20	9.86	150	305	Horizontal
2	5734.92	40.96	60.73	19.77	68.20	7.47	150	0	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5670	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 14		

Start of Test:2026-08-16 15:51:14

Test Graph

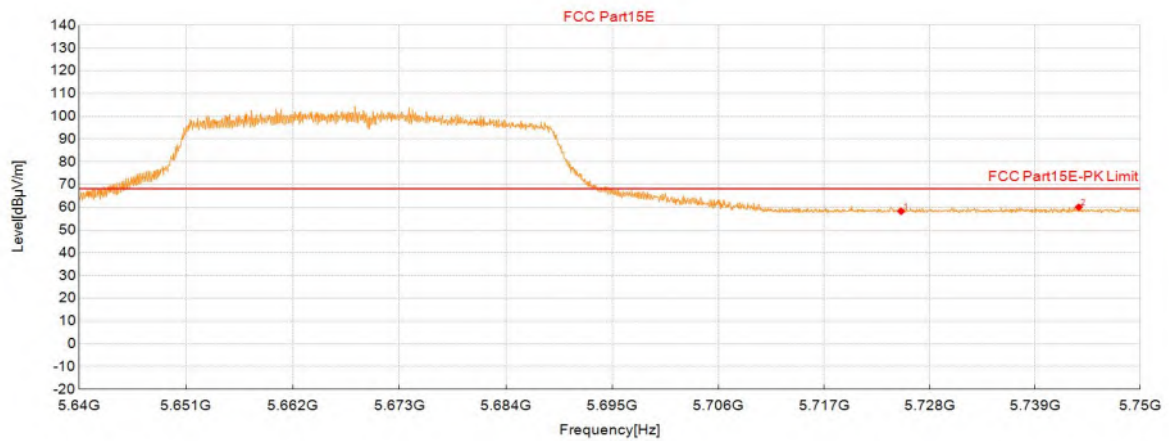

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	38.56	58.29	19.73	68.20	9.91	150	214	Vertical
2	5743.56	40.26	60.08	19.82	68.20	8.12	150	68	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5755	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:52:37

Test Graph

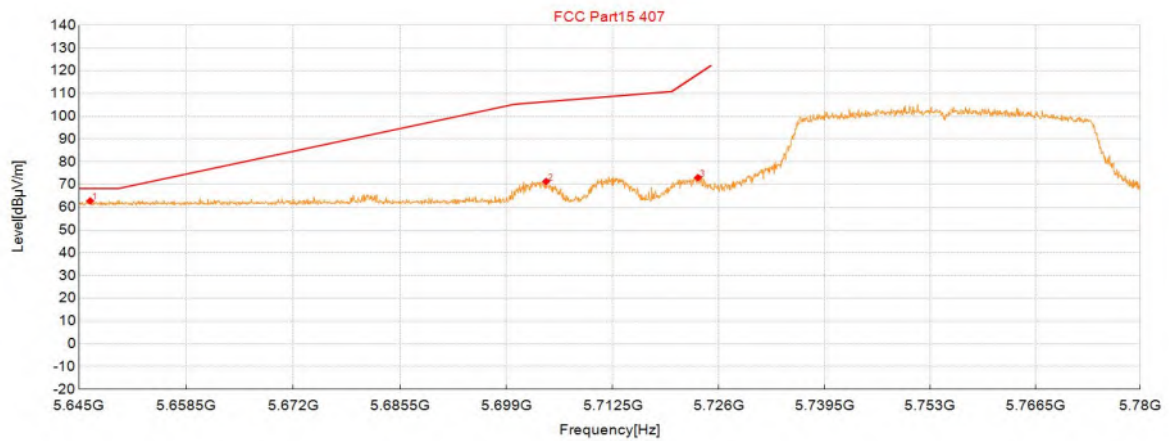

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5646.42	43.58	62.83	19.25	68.30	5.47	150	251	Horizontal
2	5704.02	51.71	71.34	19.63	106.43	35.09	150	185	Horizontal
3	5723.34	53.31	73.03	19.72	118.51	45.48	150	185	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5755	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:53:13

Test Graph

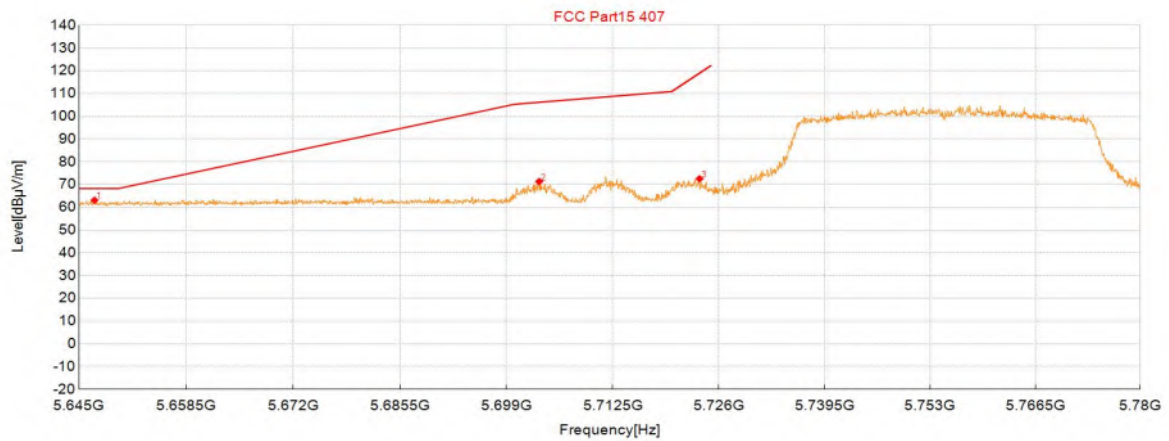

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5646.96	43.86	63.11	19.25	68.30	5.19	150	358	Vertical
2	5703.15	51.71	71.34	19.63	106.18	34.84	150	239	Vertical
3	5723.54	52.81	72.53	19.72	118.98	46.45	150	239	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5795	Voltage:	DC 3.3V
Environment:	25.3°C 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:54:31

Test Graph

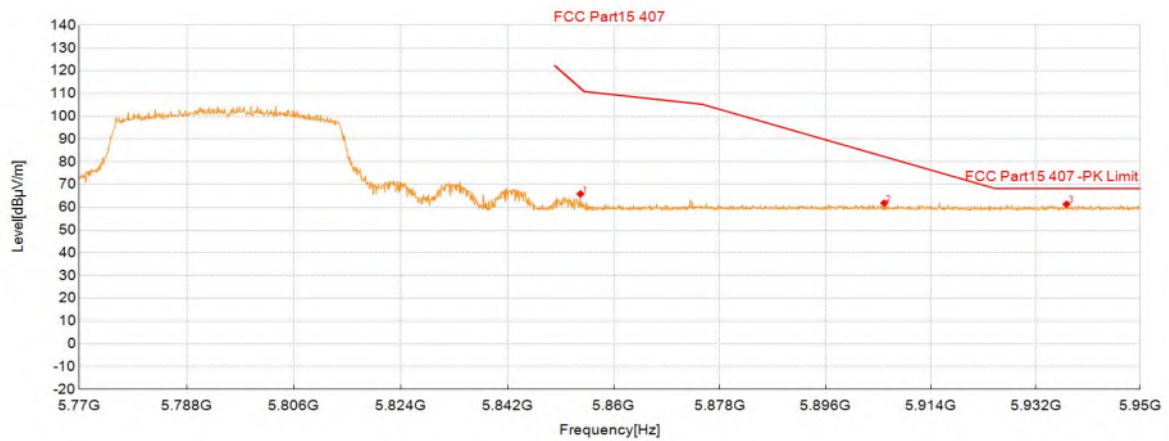

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5854.37	45.35	65.89	20.54	112.33	46.44	150	194	Horizontal
2	5906.06	40.94	61.85	20.91	82.28	20.43	150	63	Horizontal
3	5937.30	40.49	61.38	20.89	68.30	6.92	150	198	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11AX40_MCS0_5795	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-16 15:55:10

Test Graph

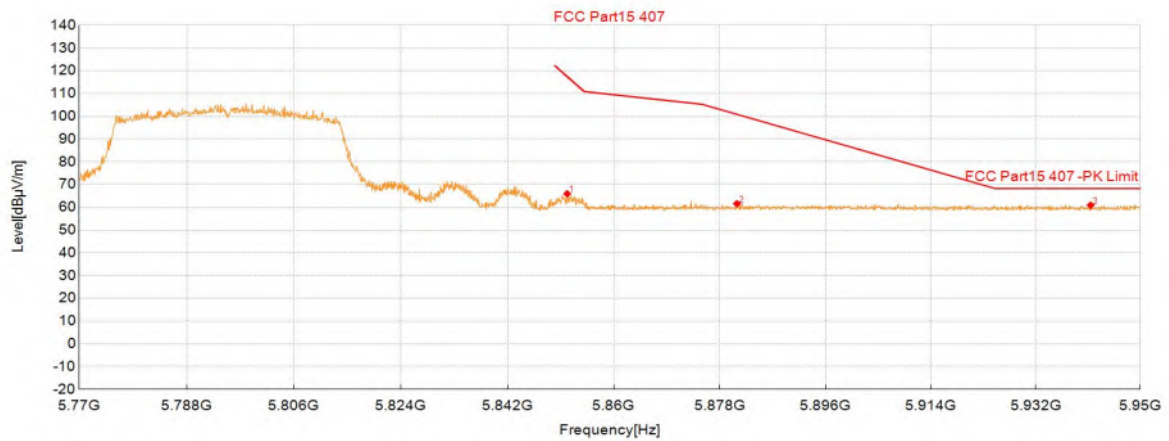

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5852.12	45.45	65.97	20.52	117.46	51.49	150	231	Vertical
2	5880.94	40.83	61.59	20.76	100.89	39.30	150	248	Vertical
3	5941.45	40.04	60.93	20.89	68.30	7.37	150	359	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5180	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-19 20:03:05

Test Graph

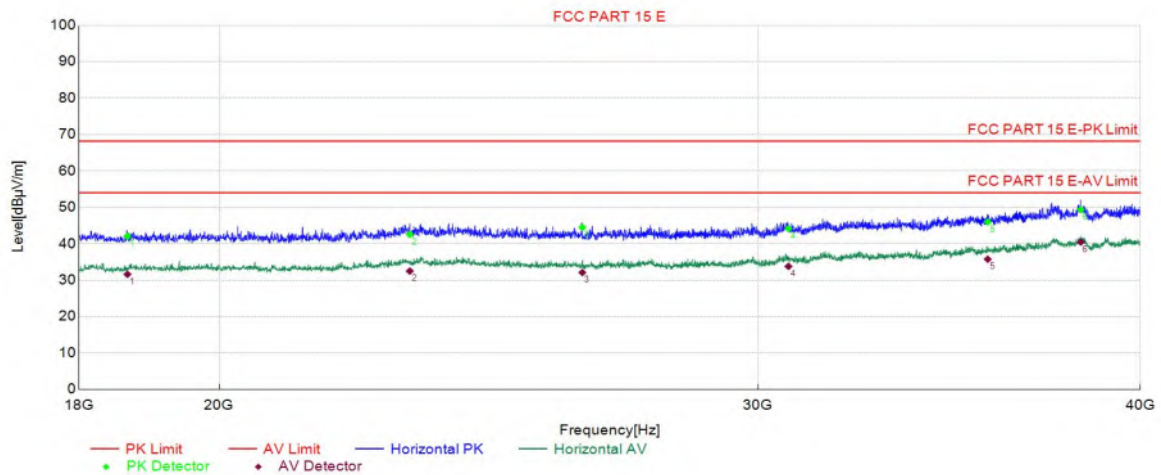

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18668.934	39.23	2.80	42.03	68.20	26.17	150	136	Horizontal
2	23087.417	34.09	8.47	42.56	68.20	25.64	150	0	Horizontal
3	26286.857	38.69	5.80	44.49	68.20	23.71	150	149	Horizontal
4	30696.539	32.84	11.31	44.15	68.20	24.05	150	307	Horizontal
5	35660.732	31.96	14.01	45.97	68.20	22.23	150	238	Horizontal
6	38248.450	34.69	14.67	49.36	68.20	18.84	150	178	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV)	Factor (dB/m)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18668.934	28.81	2.80	31.61	54.00	22.39	150	136	Horizontal
2	23087.417	24.03	8.47	32.50	54.00	21.50	150	0	Horizontal
3	26286.857	26.30	5.80	32.10	54.00	21.90	150	149	Horizontal
4	30696.539	22.47	11.31	33.78	54.00	20.22	150	307	Horizontal
5	35660.732	21.75	14.01	35.76	54.00	18.24	150	238	Horizontal
6	38248.450	25.80	14.67	40.47	54.00	13.53	150	178	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5180	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-19 20:03:50

Test Graph

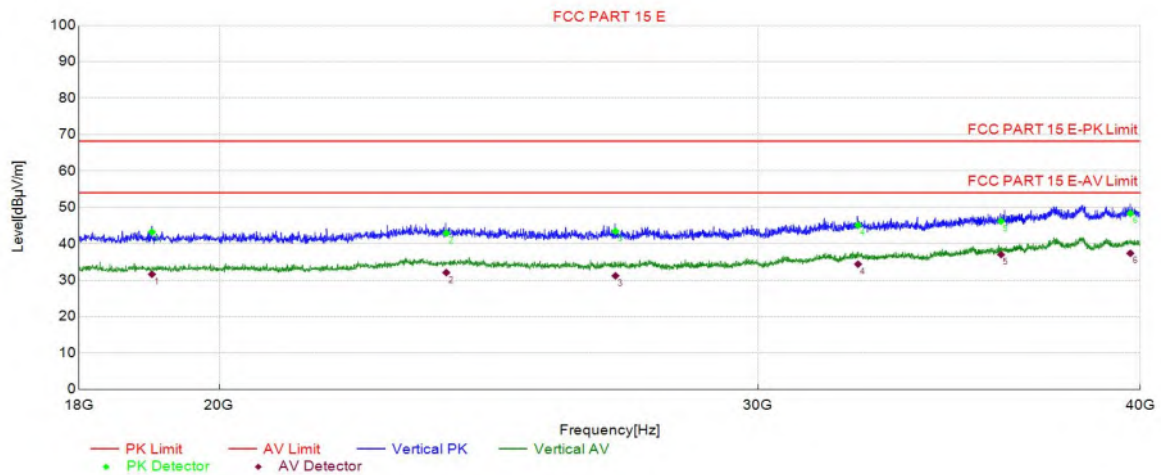

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19016.603	40.26	2.96	43.22	68.20	24.98	150	53	Vertical
2	23729.946	33.94	8.96	42.90	68.20	25.30	150	193	Vertical
3	26951.390	38.96	4.46	43.42	68.20	24.78	150	8	Vertical
4	32346.869	33.1	11.98	45.08	68.20	23.12	150	27	Vertical
5	36021.604	31.88	14.31	46.19	68.20	22.01	150	358	Vertical
6	39700.740	34.37	13.96	48.33	68.20	19.87	150	310	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV)	Factor (dB/m)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19016.603	28.66	2.96	31.62	54.00	22.38	150	53	Vertical
2	23729.946	23.11	8.96	32.07	54.00	21.93	150	193	Vertical
3	26951.390	26.74	4.46	31.20	54.00	22.80	150	8	Vertical
4	32346.869	22.41	11.98	34.39	54.00	19.61	150	27	Vertical
5	36021.604	22.70	14.31	37.01	54.00	16.99	150	358	Vertical
6	39700.740	23.42	13.96	37.38	54.00	16.62	150	310	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5320	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-19 21:21:37

Test Graph

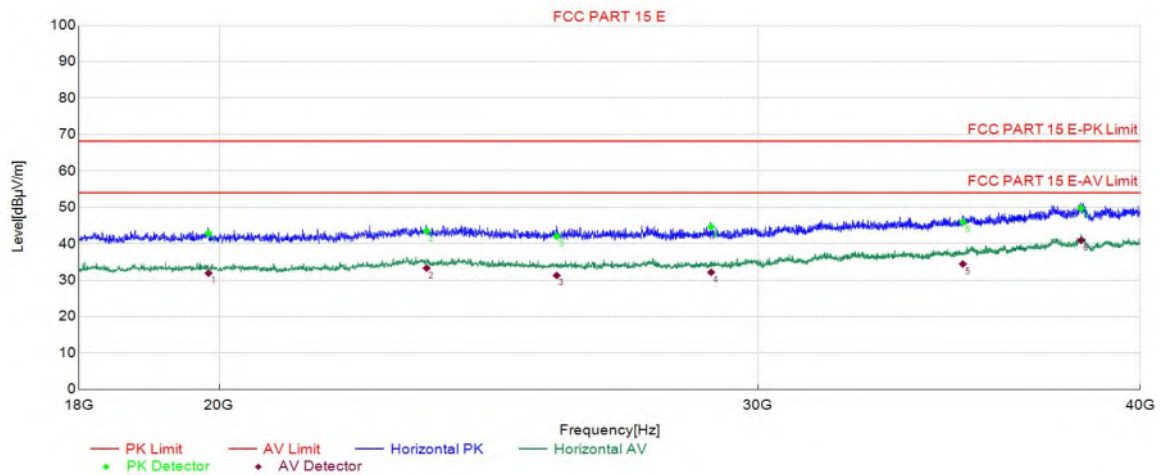

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19843.969	39.49	3.39	42.88	68.20	25.32	150	67	Horizontal
2	23382.276	34.84	8.69	43.53	68.20	24.67	150	202	Horizontal
3	25785.157	35.28	6.77	42.05	68.20	26.15	150	288	Horizontal
4	28962.593	36.69	7.94	44.63	68.20	23.57	150	307	Horizontal
5	35000.600	32.51	13.45	45.96	68.20	22.24	150	259	Horizontal
6	38257.251	35.06	14.66	49.72	68.20	18.48	150	336	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV)	Factor (dB/m)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19843.969	28.52	3.39	31.91	54.00	22.09	150	67	Horizontal
2	23382.276	24.59	8.69	33.28	54.00	20.72	150	202	Horizontal
3	25785.157	24.51	6.77	31.28	54.00	22.72	150	288	Horizontal
4	28962.593	24.21	7.94	32.15	54.00	21.85	150	307	Horizontal
5	35000.600	20.98	13.45	34.43	54.00	19.57	150	259	Horizontal
6	38257.251	26.23	14.66	40.89	54.00	13.11	150	336	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5320	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-19 21:22:22

Test Graph

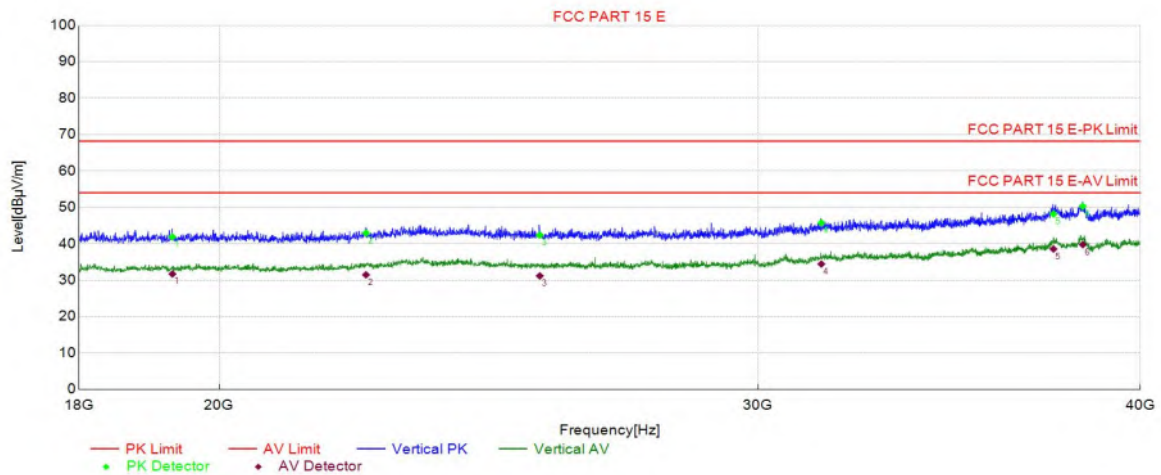

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19311.462	38.77	3.11	41.88	68.20	26.32	150	180	Vertical
2	22339.268	36.54	6.41	42.95	68.20	25.25	150	360	Vertical
3	25459.492	35.02	7.35	42.37	68.20	25.83	150	65	Vertical
4	31466.693	33.72	12.01	45.73	68.20	22.47	150	8	Vertical
5	37469.494	33.3	14.87	48.17	68.20	20.03	150	122	Vertical
6	38305.661	35.67	14.62	50.29	68.20	17.91	150	353	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV)	Factor (dB/m)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19311.462	28.59	3.11	31.70	54.00	22.30	150	180	Vertical
2	22339.268	25.05	6.41	31.46	54.00	22.54	150	360	Vertical
3	25459.492	23.81	7.35	31.16	54.00	22.84	150	65	Vertical
4	31466.693	22.42	12.01	34.43	54.00	19.57	150	8	Vertical
5	37469.494	23.67	14.87	38.54	54.00	15.46	150	122	Vertical
6	38305.661	25.14	14.62	39.76	54.00	14.24	150	353	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5500	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-19 21:23:19

Test Graph

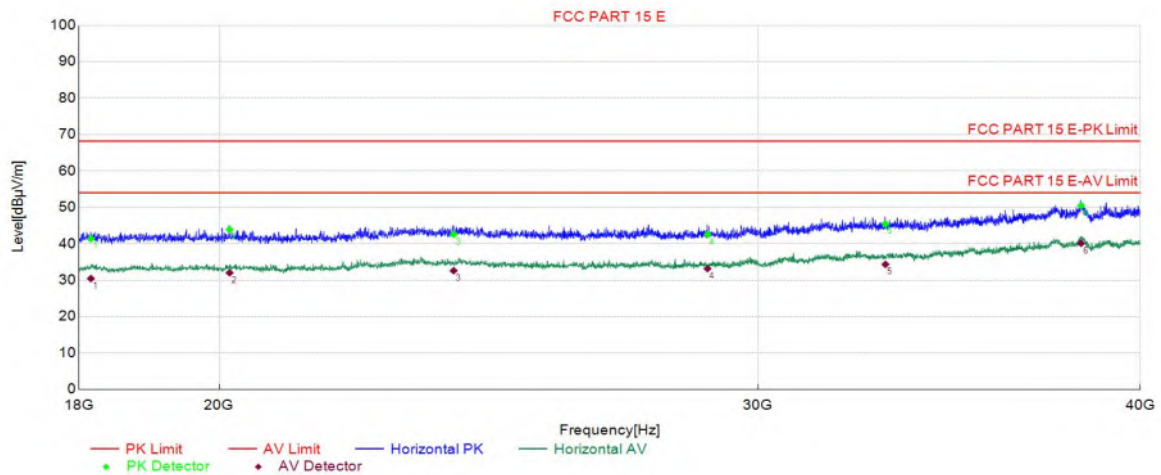

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18162.833	38.83	2.58	41.41	68.20	26.79	150	63	Horizontal
2	20160.832	40.39	3.50	43.89	68.20	24.31	150	74	Horizontal
3	23861.972	33.51	9.06	42.57	68.20	25.63	150	17	Horizontal
4	28883.377	34.84	7.72	42.56	68.20	25.64	150	11	Horizontal
5	33020.204	33.91	11.54	45.45	68.20	22.75	150	0	Horizontal
6	38257.251	35.81	14.66	50.47	68.20	17.73	150	179	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV)	Factor (dB/m)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18162.833	27.86	2.58	30.44	54.00	23.56	150	63	Horizontal
2	20160.832	28.52	3.50	32.02	54.00	21.98	150	74	Horizontal
3	23861.972	23.55	9.06	32.61	54.00	21.39	150	17	Horizontal
4	28883.377	25.44	7.72	33.16	54.00	20.84	150	11	Horizontal
5	33020.204	22.79	11.54	34.33	54.00	19.67	150	0	Horizontal
6	38257.251	25.45	14.66	40.11	54.00	13.89	150	179	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB800D80S.1_D40	SN:	
Mode:	11A_6Mbps_5500	Voltage:	DC 3.3V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-08-19 21:24:04

Test Graph

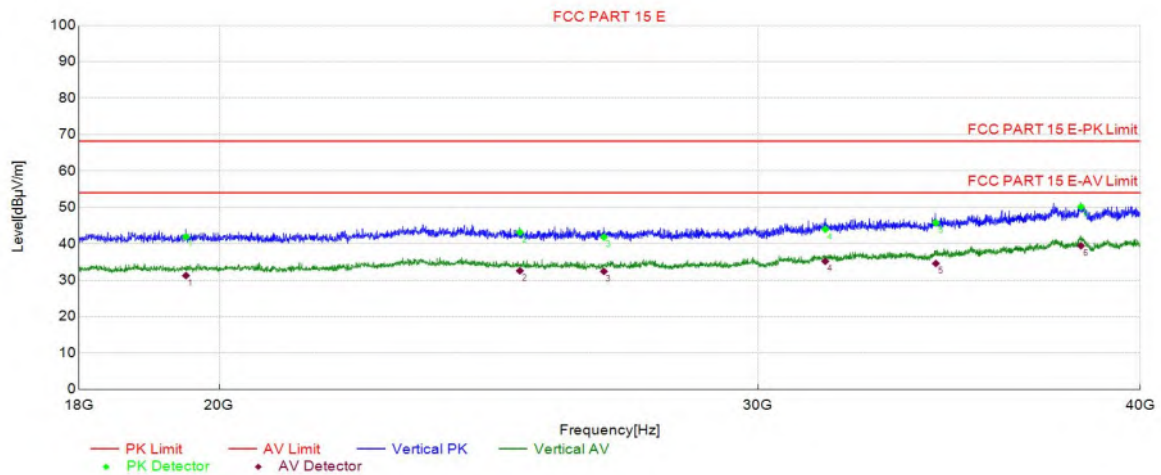

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19509.502	38.69	3.21	41.90	68.20	26.30	150	246	Vertical
2	25081.016	35.1	8.04	43.14	68.20	25.06	150	45	Vertical
3	26718.144	36.9	4.93	41.83	68.20	26.37	150	14	Vertical
4	31559.112	31.93	12.04	43.97	68.20	24.23	150	267	Vertical
5	34296.459	33.66	12.08	45.74	68.20	22.46	150	73	Vertical
6	38252.851	35.49	14.66	50.15	68.20	18.05	150	169	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV)	Factor (dB/m)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19509.502	28.04	3.21	31.25	54.00	22.75	150	246	Vertical
2	25081.016	24.52	8.04	32.56	54.00	21.44	150	45	Vertical
3	26718.144	27.47	4.93	32.40	54.00	21.60	150	14	Vertical
4	31559.112	23.14	12.04	35.18	54.00	18.82	150	267	Vertical
5	34296.459	22.49	12.08	34.57	54.00	19.43	150	73	Vertical
6	38252.851	24.79	14.66	39.45	54.00	14.55	150	169	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value

Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value