



正面

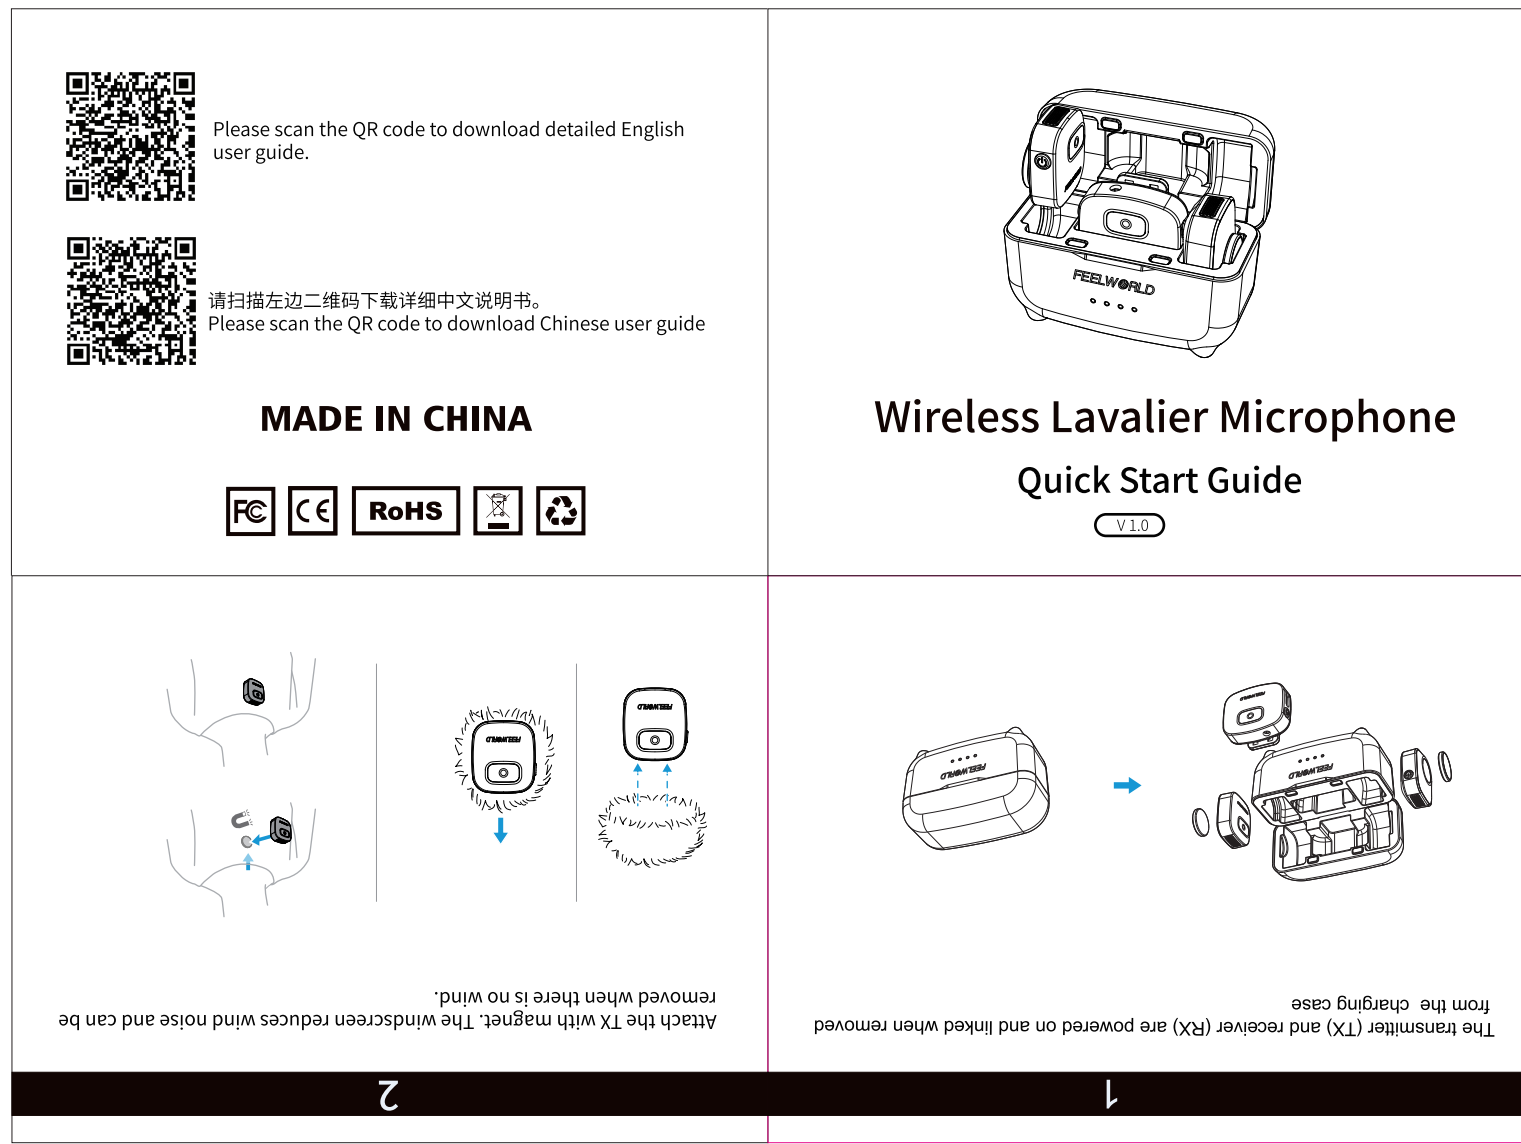

反面

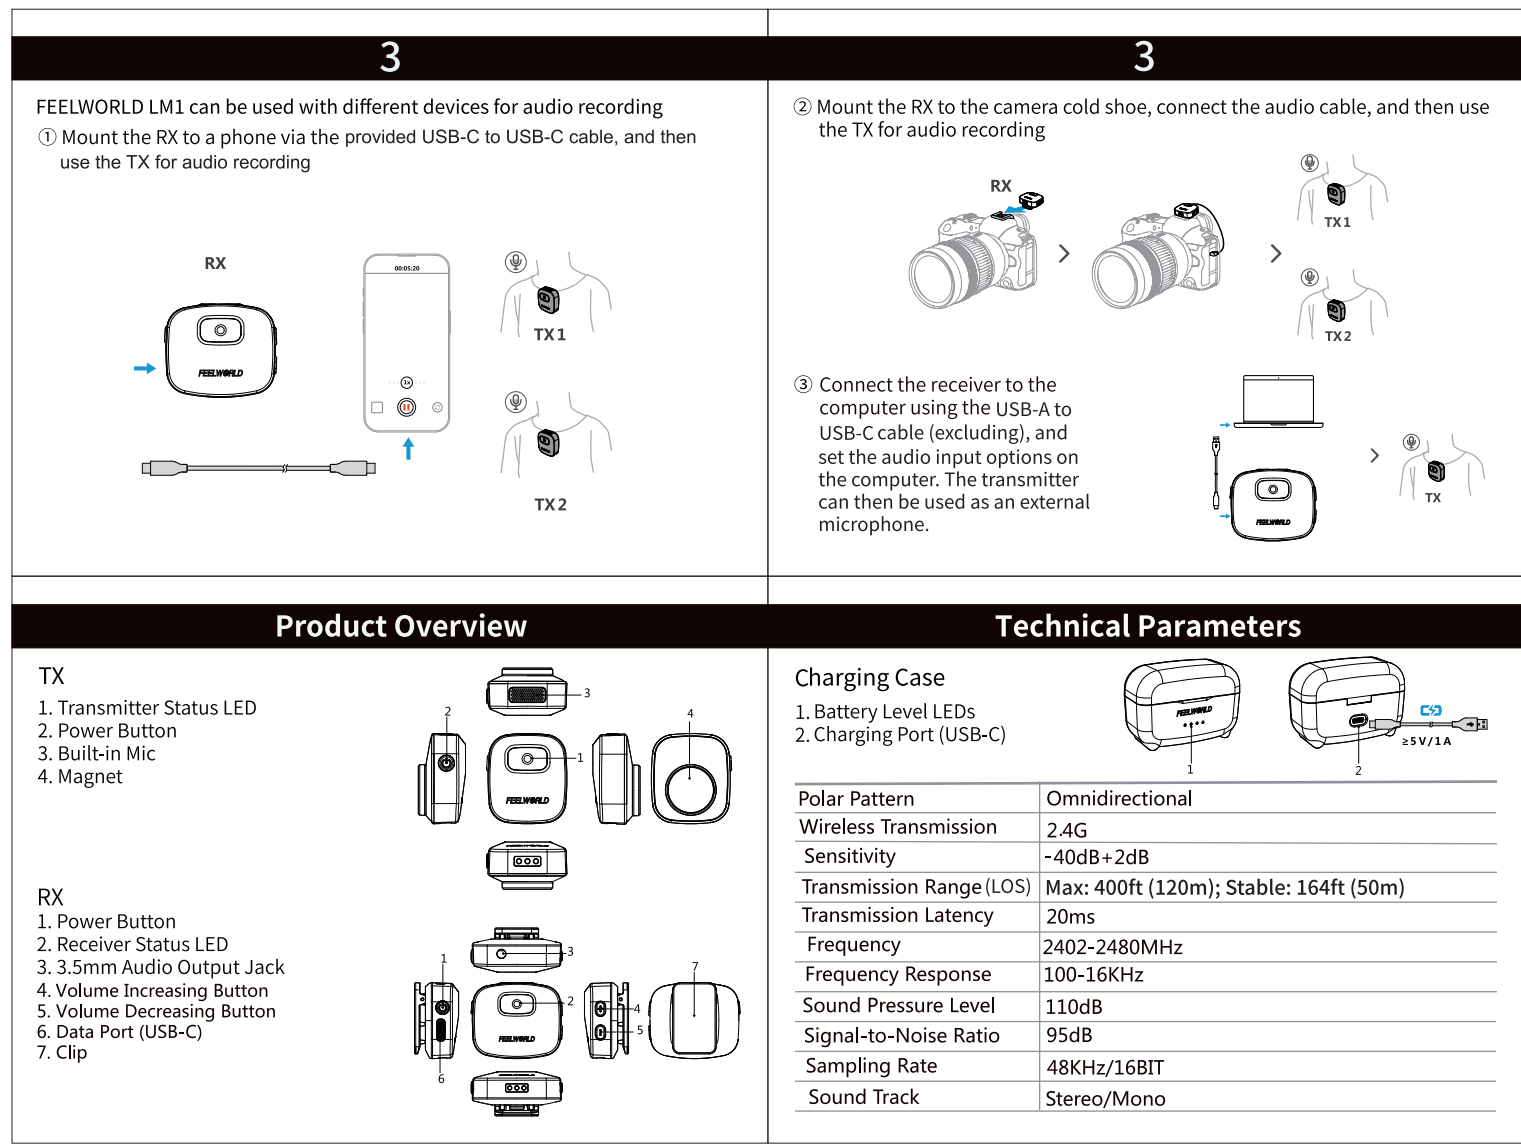

公差等级	线性尺寸的极限偏差数值mm(GB/T 1804-2000)								角度尺寸的极限偏差数值				
	基本尺寸分段/mm								角度短边长度尺寸分段/mm				
	0.5~3	>3~6	>6~30	>30~120	>120~400	>400~1000	>1000~3000	>2000~4000	~10	>10~50	>50~120	>120~400	>400
精密F	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	±2	±1°	±30′	±20′	±10′	±5′
中等M	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±1°30′	±1°	±20′	±15′	±10′
粗糙C	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	±3°	±2°	±1°	±30′	±20′
最粗V	±0.5	±1	±1.5	±2.5	±4	±6	±8						



技术要求

- 尺寸: 成品尺寸100*75mm。
- 材质说明: 100g双胶纸, 彩色印刷
- 折页方式: 十字折
- 说明书不可出现褶皱及明显污渍
- 折页需对齐, 折页后成品长宽尺寸公差需控制在正负2mm以内
- 当图纸版本为1.0 (含1.0) 以上时方可用于量产, 1.0以下的版本为打样版本, 除特殊情况外, 不可用于批量生产。

变更履历	4			KB-21 (FEELWORLD)说明书	TZ-YS-KB2107	版本
	3					
	2					V1.0
	1					比例
	变更标记	变更内容	版本			单位
设计				材质: 见工艺要求	第 1 张	mm
审核	XXXXX	XXXX-XX-XX				
工艺	XXXXX	XXXX-XX-XX				
标准化	XXXXX	XXXX-XX-XX				
审批	XXXXX	XXXX-XX-XX		福州金威航信息科技有限公司	共 1 张	

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.