

RF Test Report

Applicant : LEXON
Product Type : TYKHO 3
Trade Name : LEXON
Model Number : LA119
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Mar. 22, 2019
Test Period : Apr. 19 ~ Apr. 21, 2019
Issue Date : May 08, 2019

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	May 08, 2019	Initial Issue	Nina Lin

Verification of Compliance

Issued Date: May 08, 2019


Applicant : LEXON
Product Type : TYKHO 3
Trade Name : LEXON
Model Number : LA119
FCC ID : 2ARD3-LA119
EUT Rated Voltage : DC 5 V
Test Voltage : 120 Vac / 60 Hz
DC 3.7 V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>




A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By



(Manager)

Reviewed By



(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty.....	6
2	EUT Description.....	7
3	Test Methodology.....	8
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step.....	8
3.3.	Configuration of Test System Details.....	9
3.4.	Test Instruments.....	11
3.5.	Test Site Environment.....	12
4	Measurement Procedure.....	13
4.1.	Maximum Conducted Output Power Measurement.....	13
4.2.	AC Power Line Conducted Emission Measurement.....	14
4.3.	Radiated Emission Measurement.....	16
4.4.	20 dB RF Bandwidth Measurement.....	19
4.5.	Carrier Frequency Separation Measurement.....	20
4.6.	Number of Hopping Measurement.....	21
4.7.	Time of Occupancy (Dwell Time) Measurement.....	22
4.8.	Out of Band Conducted Emissions Measurement.....	23
4.9.	Antenna Measurement.....	23
5	Test Results.....	24
	Annex A. Conducted Emission.....	24
	Annex B. Conducted Test Results.....	26
	Annex C. Radiated Emission Measurement.....	44



1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.207	AC Power Conducted Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20 dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems



1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	LEXON 91 avenue Jean-Baptiste Clément - 92100 Boulogne - FRANCE		
Manufacturer	LEXON 91 avenue Jean-Baptiste Clément - 92100 Boulogne - FRANCE		
Product	TYKHO 3		
Trade Name	LEXON		
Model Number	LA119		
FCC ID	2ARD3-LA119		
Frequency Range	2402 ~ 2480 MHz		
Modulation Type	GFSK for 1 Mbps		
	$\pi/4$ -DQPSK for 2 Mbps		
Operate Temp. Range	0 ~ +40 °C		
Antenna information	Type	Max. Gain (dBi)	
	Inverted F Antenna	-0.58	
Max. RF Output Power	GFSK for 1 Mbps	0.00058	W
	$\pi/4$ -DQPSK for 2 Mbps	0.00066	W

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Final-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.


3.2. EUT Test Step

1	Setup the EUT shown on “Configuration of Test System Details.”
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Conducted Emission

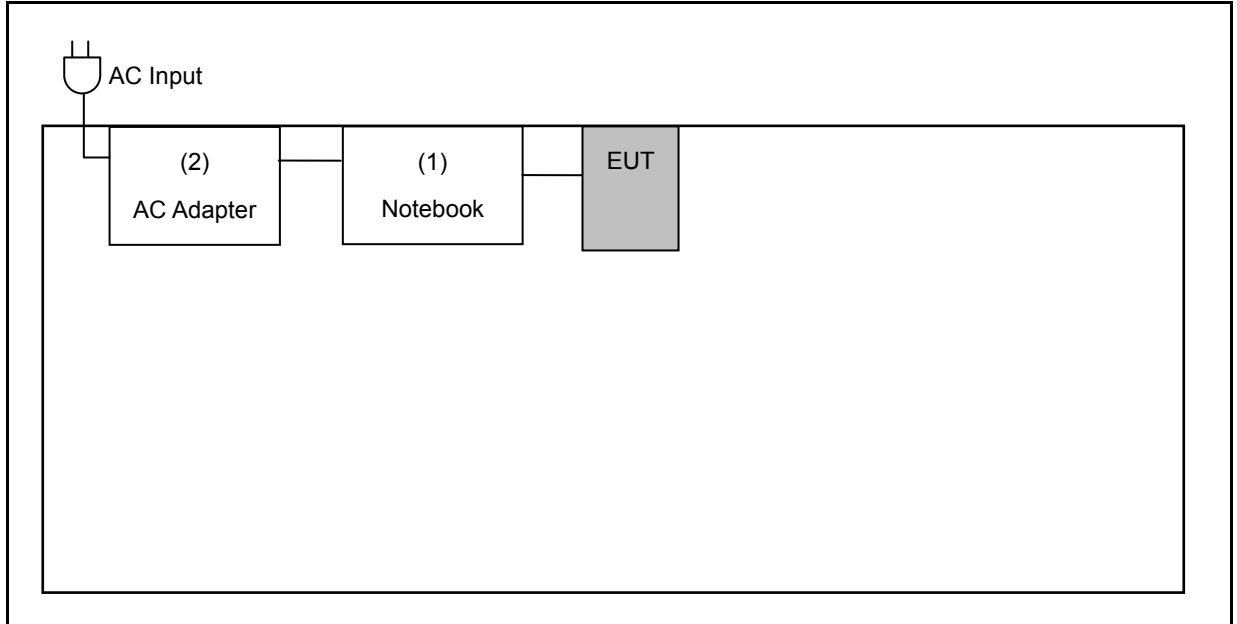


Radiated Emissions_ Below 1 GHz

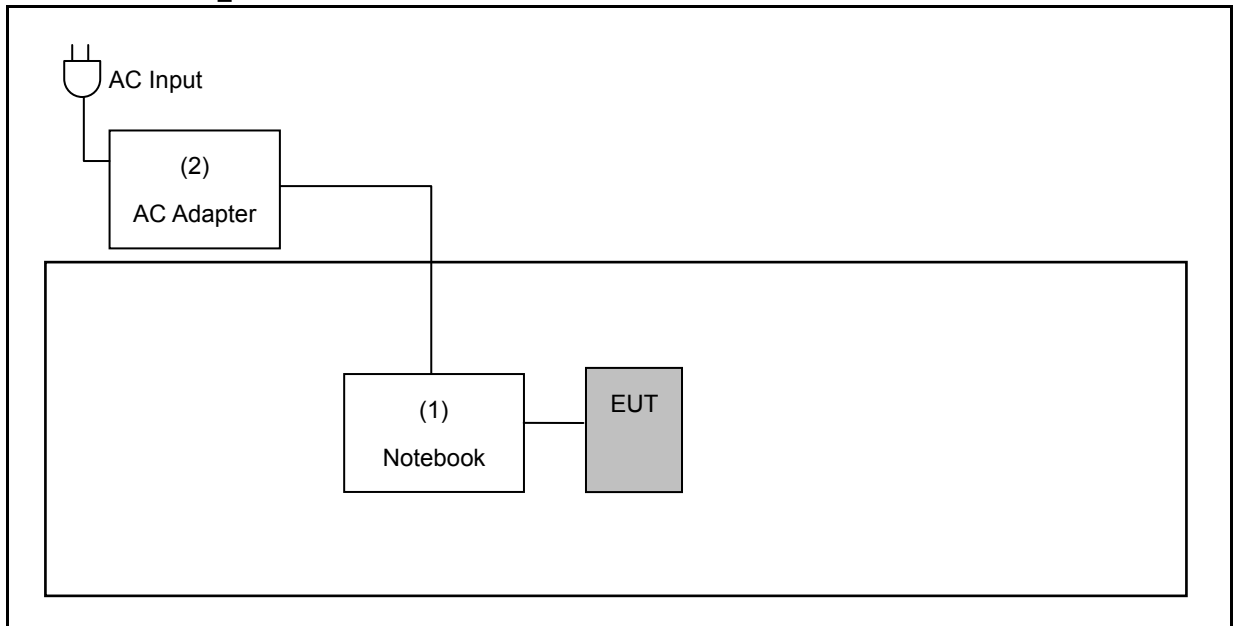



Radiated Emissions_ Above 1 GHz



Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LATITUDE E6440	48GBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 0.8 m



3.4. Test Instruments

For Conducted Emission

Test Period: Apr. 20, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2018	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2018	1 year
Spectrum Analyzer	Keysight	N9010A	MY52221312	01/14/2019	1 year
Microwave Cable	EMCI	EMC104-SM-SM13 000	170814	10/30/2018	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

For Radiated Emissions

Test Period: Apr. 21, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
EXA Signal Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/14/2019	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/14/2019	1 year
Trilog Broadband Antenna	Schwarzbeck Mess-Elektronik	VULB9168	416	10/23/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Broadband Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	9170	9170-320	08/07/2018	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/29/2019	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2019	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/30/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2019	1 year

For Conducted

Test Period: Apr. 19, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2018	1 year
LISN	R&S	ENV216	101040	04/03/2019	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/17/2018	1 year

Note: N.C.R. = No Calibration Request.



3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990


4 Measurement Procedure

4.1. Maximum Conducted Output Power Measurement

■ Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

■ Test Setup

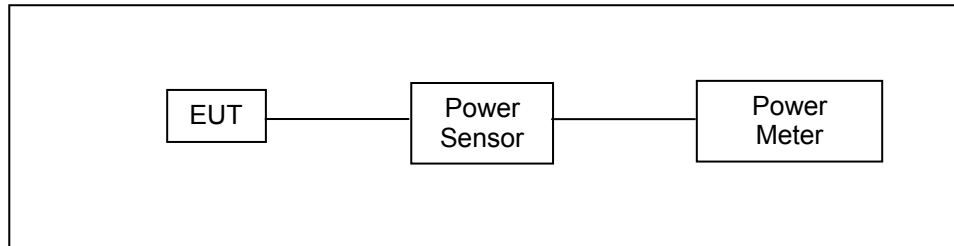

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.


Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(\text{GAIN} - 6)/3$ dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.2. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

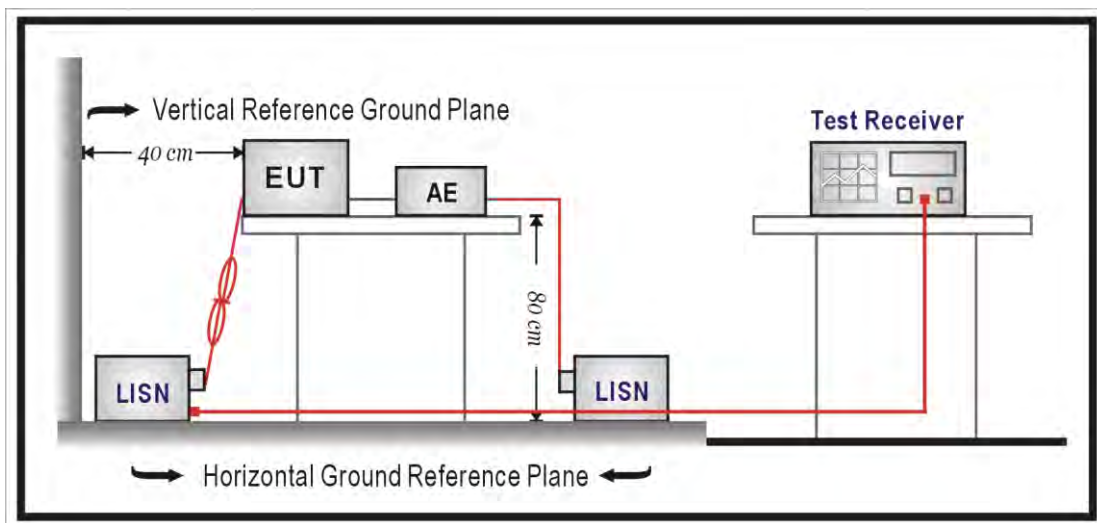

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.3. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100^{**}	3
88-216	150^{**}	3
216-960	200^{**}	3
Above 960	500	3


****** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

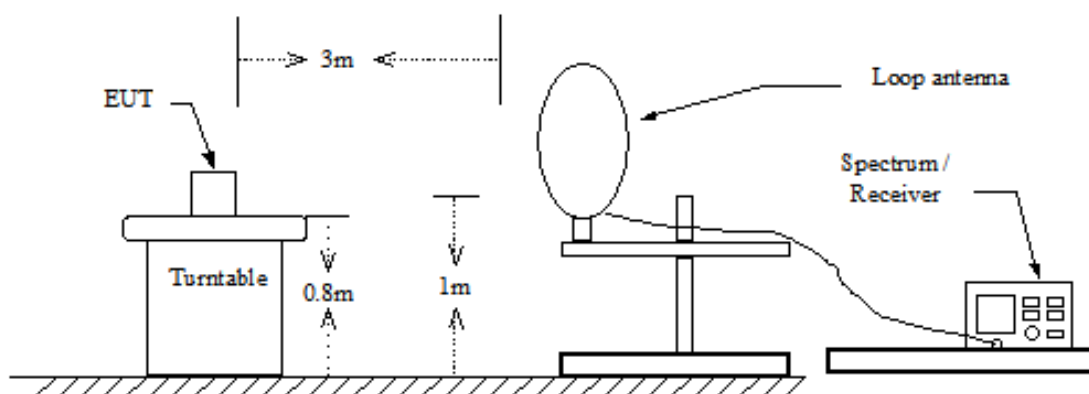

Below 1 GHz

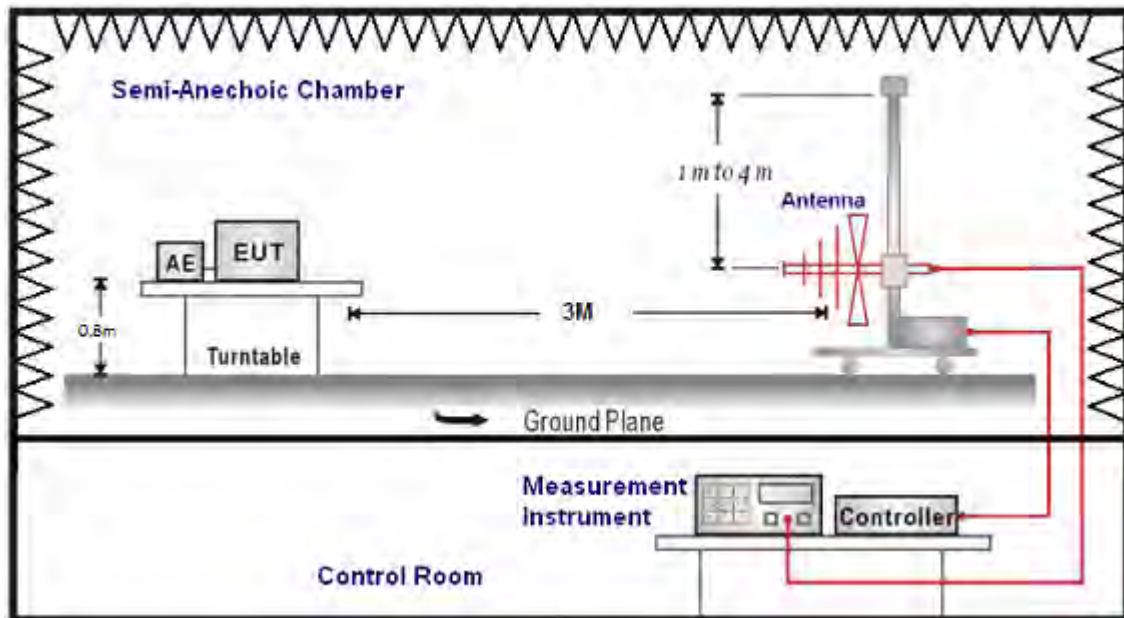

Above 1 GHz

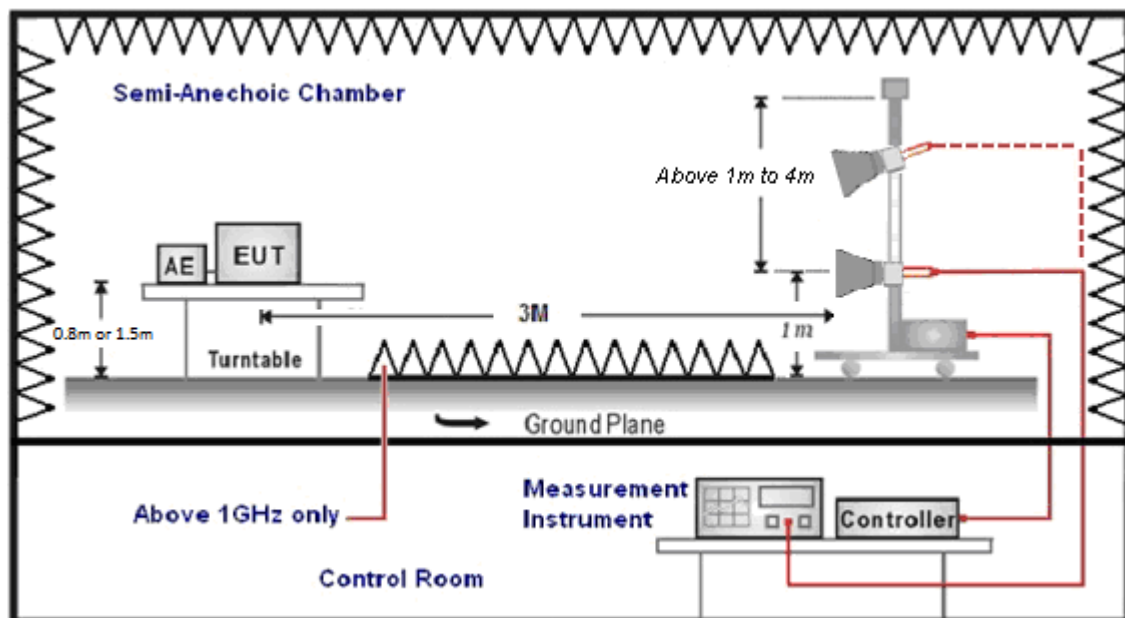

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98 % / 1/T for average measurements when Duty cycle <98 %. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

- (a) For fundamental frequency : Transmitter Output < +30 dBm
- (b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.4. 20 dB RF Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

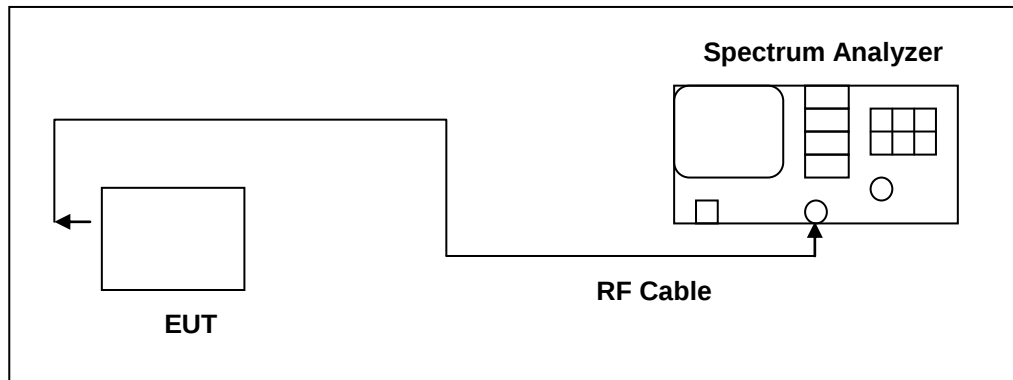

■ **Test Procedure**

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20 dB bandwidth, centered on a hopping frequency
2. RBW $\geq 1\%$ of the 20 dB span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20 dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20 dB bandwidth of the emission.

4.5. Carrier Frequency Separation Measurement

■ Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

■ Test Setup

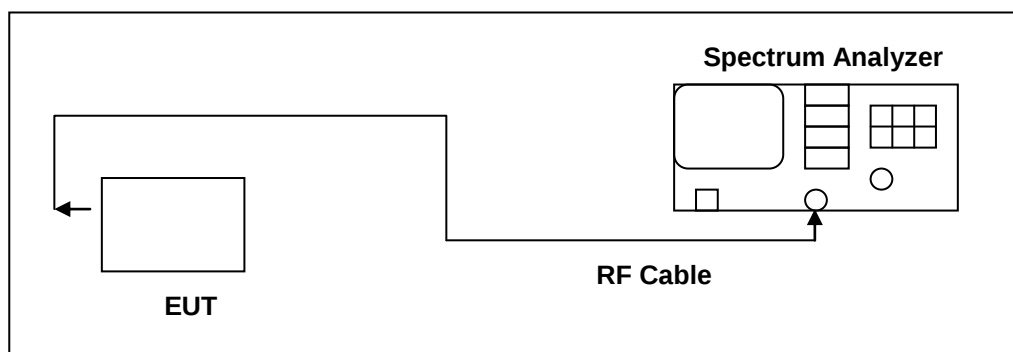

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

4.6. Number of Hopping Measurement

■ Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

■ Test Setup

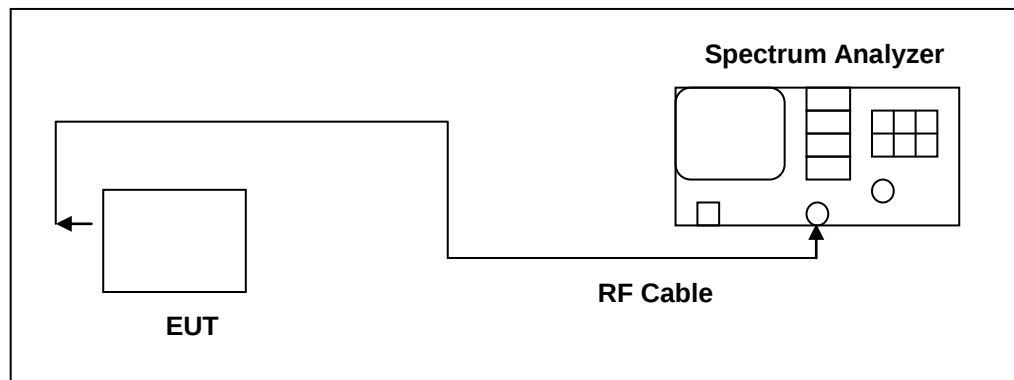

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW $\geq$ 1 % of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

4.7. Time of Occupancy (Dwell Time) Measurement

■ Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

■ Test Setup

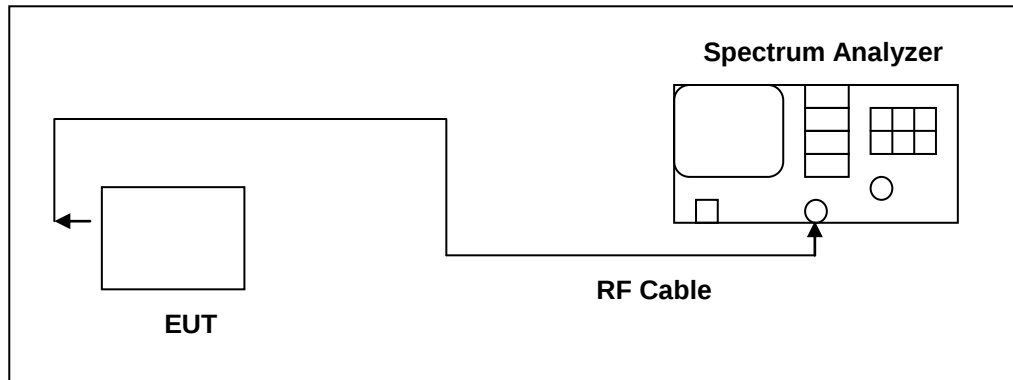

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold


The marker-delta function was used to determine the dwell time.

4.8. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

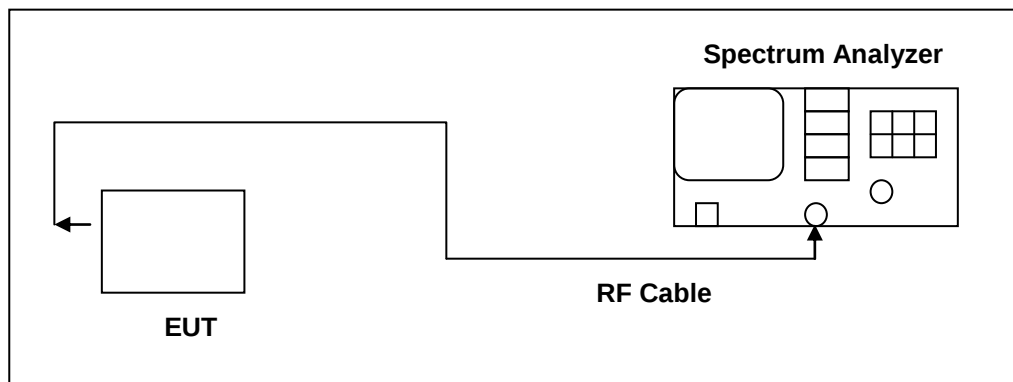

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

4.9. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

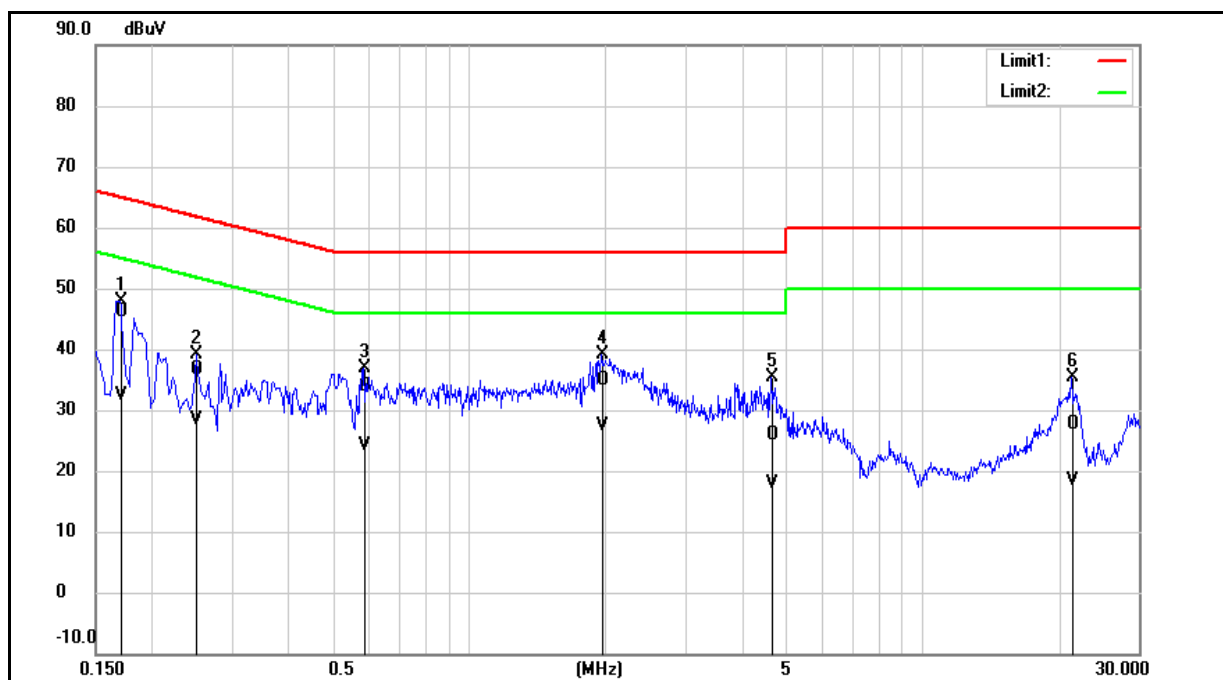


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1700	36.40	22.73	9.65	46.05	32.38	64.96	54.96	-18.91	-22.58	Pass
2	0.2500	26.95	18.70	9.65	36.60	28.35	61.76	51.76	-25.16	-23.41	Pass
3	0.5860	24.13	14.47	9.68	33.81	24.15	56.00	46.00	-22.19	-21.85	Pass
4	1.9620	25.11	17.53	9.75	34.86	27.28	56.00	46.00	-21.14	-18.72	Pass
5	4.6340	16.04	8.00	9.86	25.90	17.86	56.00	46.00	-30.10	-28.14	Pass
6	21.3020	17.24	7.99	10.40	27.64	18.39	60.00	50.00	-32.36	-31.61	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

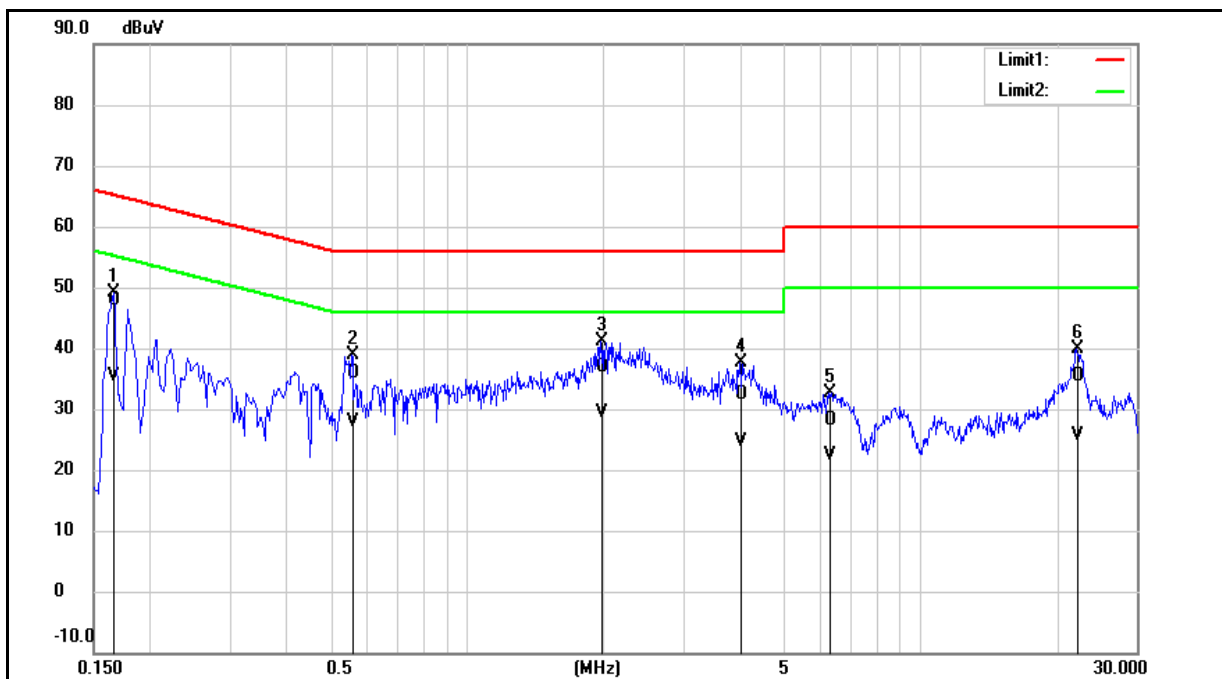

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	38.29	25.72	9.68	47.97	35.40	65.16	55.16	-17.19	-19.76	Pass
2	0.5580	26.24	18.23	9.74	35.98	27.97	56.00	46.00	-20.02	-18.03	Pass
3	1.9780	26.96	19.65	9.84	36.80	29.49	56.00	46.00	-19.20	-16.51	Pass
4	4.0020	22.59	14.71	9.91	32.50	24.62	56.00	46.00	-23.50	-21.38	Pass
5	6.3020	18.15	12.37	10.01	28.16	22.38	60.00	50.00	-31.84	-27.62	Pass
6	22.1660	24.80	15.18	10.54	35.34	25.72	60.00	50.00	-24.66	-24.28	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
			(dBm)	(W)	(dBm)	(W)	
Mode 2	2402	DH1	-5.11	0.00031	-3.83	0.00041	≤ 0.125
		DH3	-5.10	0.00031	-3.80	0.00042	≤ 0.125
		DH5	-5.08	0.00031	-3.79	0.00042	≤ 0.125
	2441	DH1	-4.43	0.00036	-3.13	0.00049	≤ 0.125
		DH3	-4.41	0.00036	-3.11	0.00049	≤ 0.125
		DH5	-4.39	0.00036	-3.09	0.00049	≤ 0.125
	2480	DH1	-3.68	0.00043	-2.38	0.00058	≤ 0.125
		DH3	-3.66	0.00043	-2.36	0.00058	≤ 0.125
		DH5	-3.65	0.00043	-2.35	0.00058	≤ 0.125
Mode 3	2402	2DH1	-6.32	0.00023	-3.26	0.00047	≤ 0.125
		2DH3	-6.31	0.00023	-3.23	0.00048	≤ 0.125
		2DH5	-6.30	0.00023	-3.22	0.00048	≤ 0.125
	2441	2DH1	-5.67	0.00027	-2.57	0.00055	≤ 0.125
		2DH3	-5.66	0.00027	-2.56	0.00055	≤ 0.125
		2DH5	-5.64	0.00027	-2.54	0.00056	≤ 0.125
	2480	2DH1	-4.94	0.00032	-1.85	0.00065	≤ 0.125
		2DH3	-4.91	0.00032	-1.82	0.00066	≤ 0.125
		2DH5	-4.90	0.00032	-1.80	0.00066	≤ 0.125

Note: The relevant measured result has the offset with cable loss already.




20 dB RF Bandwidth Measurement




Test Mode	Frequency (MHz)	Measurement Results (MHz)
Mode 2	2402	0.947
	2441	0.948
	2480	0.948
Mode 3	2402	1.310
	2441	1.311
	2480	1.309



Test Graphs

Mode 2: GFSK Continuous TX mode

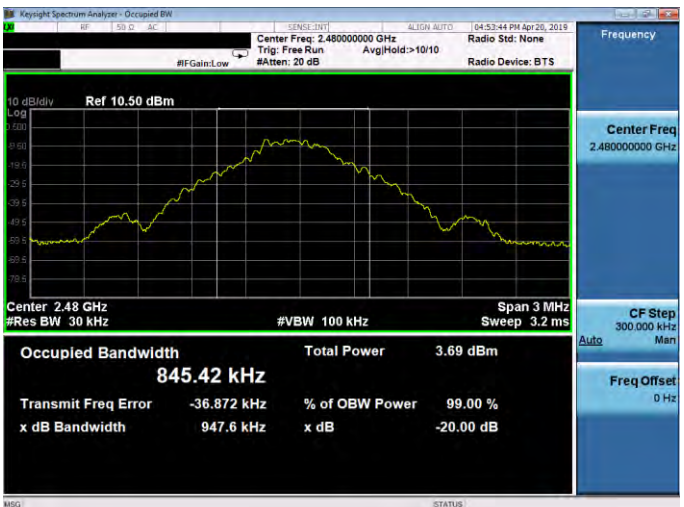2402 MHz	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 10.50 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 843.28 kHz Total Power 2.29 dBm Transmit Freq Error -36.326 kHz % of OBW Power 99.00 % x dB Bandwidth 947.4 kHz x dB -20.00 dB MSG STATUS
2441 MHz	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 10.50 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 843.80 kHz Total Power 2.91 dBm Transmit Freq Error -36.352 kHz % of OBW Power 99.00 % x dB Bandwidth 947.9 kHz x dB -20.00 dB MSG STATUS
2480 MHz	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 10.50 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 845.42 kHz Total Power 3.69 dBm Transmit Freq Error -36.872 kHz % of OBW Power 99.00 % x dB Bandwidth 947.6 kHz x dB -20.00 dB MSG STATUS

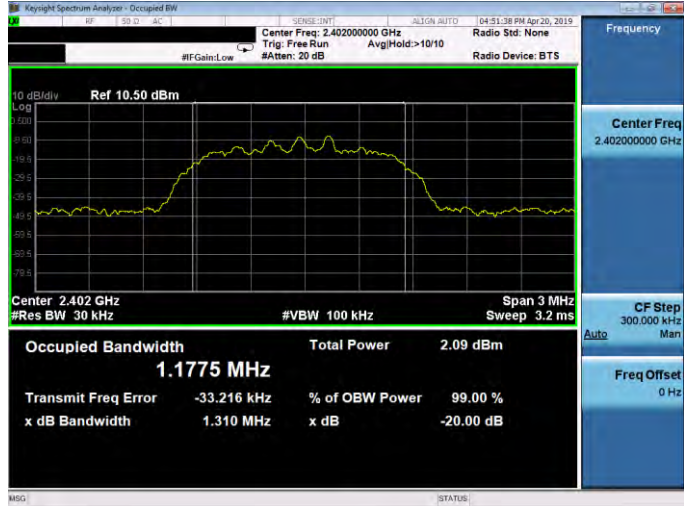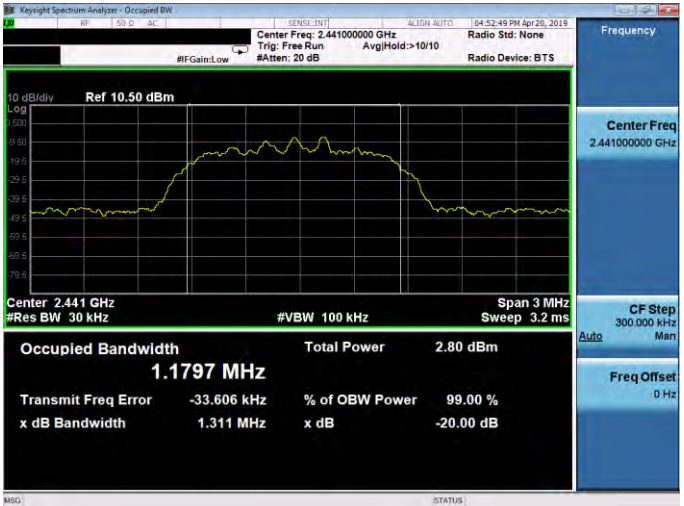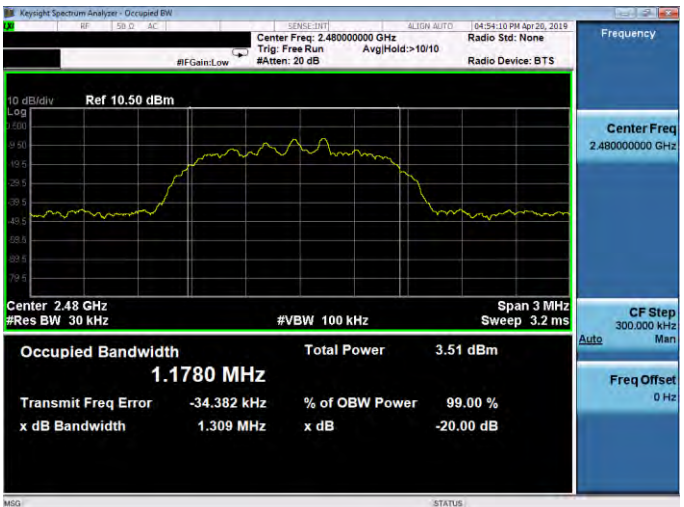Mode 3: $\pi/4$ -DQPSK Continuous TX mode	
2402 MHz	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Trig: Free Run #FGain: Low #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 10.50 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1775 MHz Total Power 2.09 dBm Transmit Freq Error -33.216 kHz % of OBW Power 99.00 % x dB Bandwidth 1.310 MHz x dB -20.00 dB Frequency Center Freq 2.40200000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2441 MHz	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Trig: Free Run #FGain: Low #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 10.50 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1797 MHz Total Power 2.80 dBm Transmit Freq Error -33.606 kHz % of OBW Power 99.00 % x dB Bandwidth 1.311 MHz x dB -20.00 dB Frequency Center Freq 2.44100000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2480 MHz	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Trig: Free Run #FGain: Low #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 10.50 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1780 MHz Total Power 3.51 dBm Transmit Freq Error -34.382 kHz % of OBW Power 99.00 % x dB Bandwidth 1.309 MHz x dB -20.00 dB Frequency Center Freq 2.48000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz



Carrier Frequency Separation Measurement

Test Mode	Frequency (MHz)	Measurement Results (MHz)	Limit (MHz)
Mode 2	2402	1.000	≥ 0.632
	2441	1.000	≥ 0.632
	2480	1.000	≥ 0.632
Mode 3	2402	1.000	≥ 0.873
	2441	1.000	≥ 0.874
	2480	1.000	≥ 0.873


Test Graphs

Mode 2: GFSK Continuous TX mode

2402






2440

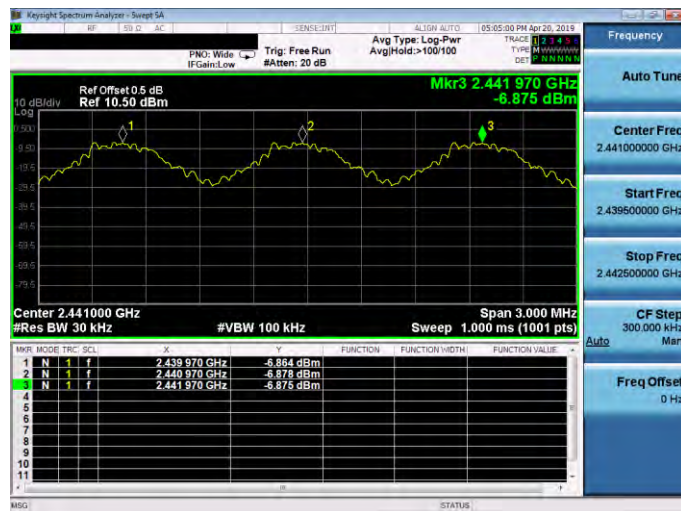

2480



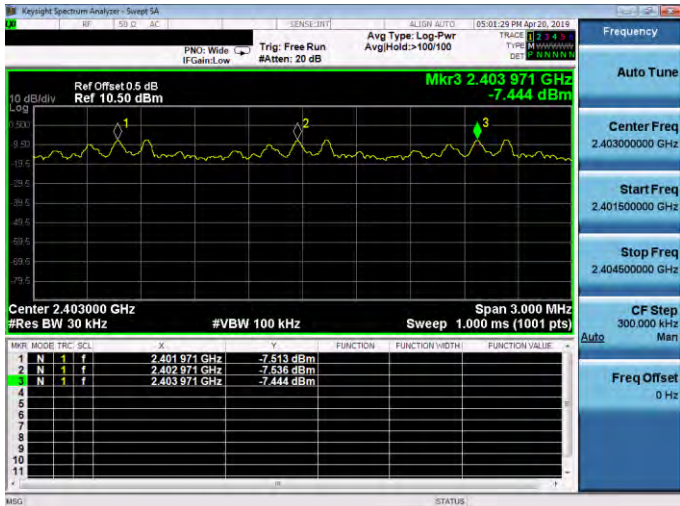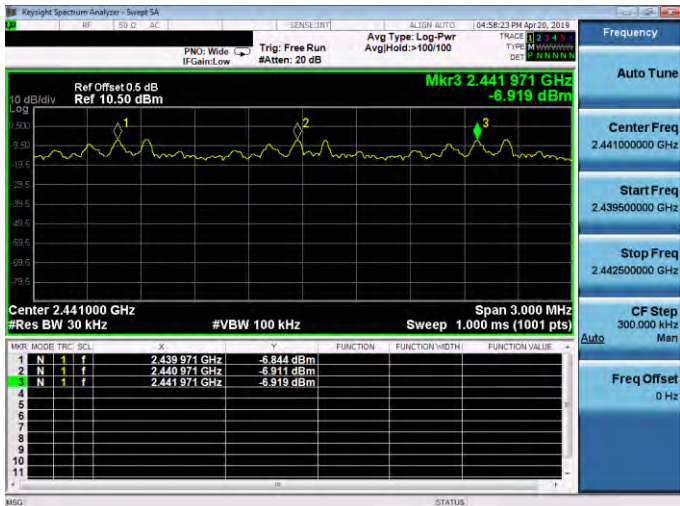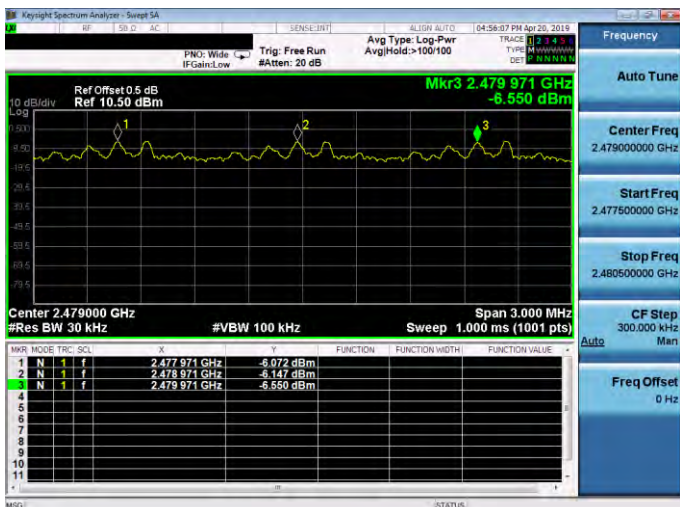

Mode 3: $\pi/4$ -DQPSK Continuous TX mode																																					
2402	 <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 971 GHz</td><td>-7.513 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402 971 GHz</td><td>-7.536 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403 971 GHz</td><td>-7.444 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 971 GHz	-7.513 dBm				2	N	1	f	2.402 971 GHz	-7.536 dBm				3	N	1	f	2.403 971 GHz	-7.444 dBm			
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.401 971 GHz	-7.513 dBm																																
2	N	1	f	2.402 971 GHz	-7.536 dBm																																
3	N	1	f	2.403 971 GHz	-7.444 dBm																																
2441	 <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 971 GHz</td><td>-6.844 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440 971 GHz</td><td>-6.911 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441 971 GHz</td><td>-6.919 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 971 GHz	-6.844 dBm				2	N	1	f	2.440 971 GHz	-6.911 dBm				3	N	1	f	2.441 971 GHz	-6.919 dBm			
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.439 971 GHz	-6.844 dBm																																
2	N	1	f	2.440 971 GHz	-6.911 dBm																																
3	N	1	f	2.441 971 GHz	-6.919 dBm																																
2480	 <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.477 971 GHz</td><td>-6.072 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.478 971 GHz</td><td>-6.147 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.479 971 GHz</td><td>-6.550 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477 971 GHz	-6.072 dBm				2	N	1	f	2.478 971 GHz	-6.147 dBm				3	N	1	f	2.479 971 GHz	-6.550 dBm			
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.477 971 GHz	-6.072 dBm																																
2	N	1	f	2.478 971 GHz	-6.147 dBm																																
3	N	1	f	2.479 971 GHz	-6.550 dBm																																



Number of Hopping Measurement

Test Mode	Frequency Range (MHz)	Measurement Results (Ch)	Limit (ch)
Mode 2	2402 - 2480	79	≥ 15
Mode 3	2402 - 2480	79	≥ 15

■ Test Graphs

Mode 2: GFSK Continuous TX mode

CH0~CH39




CH40~CH78



Mode 3: $\pi/4$ -DQPSK Continuous TX mode

CH0~CH39

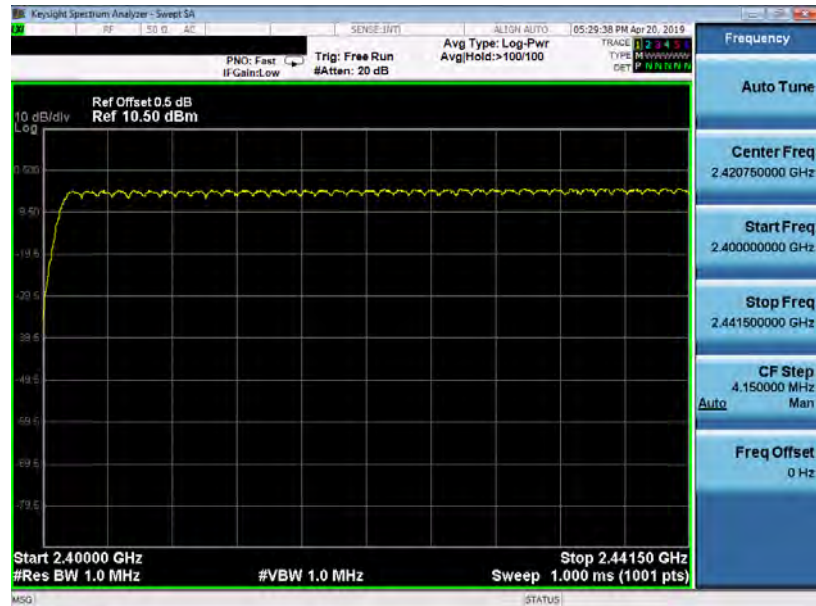

CH40~CH78



Time of Occupancy (Dwell Time) Measurement


Test Mode	Mode 2: GFSK Continuous TX mode	
DH1		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)	
The EUT Hopping Number per Sec	1600 times/sec	
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)	
Each Channel Dwell Times on Cycle(1)	31.6 * 10.13 = 320.108(times)	
Each Channel Dwell Times (2)	0.410	ms (sec)
Dwell Times on Cycle (1) * (2)	131.244	ms (sec)
LIMIT(msec)	< = 400	
DH3		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)	
The EUT Hopping Number per Sec	1600 times/sec	
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)	
Each Channel Dwell Times on Cycle(1)	31.6 * 5.1 = 161.16(times)	
Each Channel Dwell Times (2)	1.660	ms (sec)
Dwell Times on Cycle (1) * (2)	265.427	ms (sec)
LIMIT(msec)	< = 400	
DH5		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)	
The EUT Hopping Number per Sec	1600 times/sec	
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)	
Each Channel Dwell Times on Cycle(1)	31.6 * 3.37 = 106.492(times)	
Each Channel Dwell Times (2)	2.910	ms (sec)
Dwell Times on Cycle (1) * (2)	310.811	ms (sec)
LIMIT(msec)	< = 400	



Test Mode	Mode 3: $\pi/4$ -DQPSK Continuous TX mode	
2DH1		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)	
The EUT Hopping Number per Sec	1600 times/sec	
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)	
Each Channel Dwell Times on Cycle(1)	31.6 * 10.13 = 320.108(times)	
Each Channel Dwell Times (2)	0.410	ms (sec)
Dwell Times on Cycle (1) * (2)	131.244	ms (sec)
LIMIT(msec)	< = 400	
2DH3		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)	
The EUT Hopping Number per Sec	1600 times/sec	
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)	
Each Channel Dwell Times on Cycle(1)	31.6 * 5.1 = 161.16(times)	
Each Channel Dwell Times (2)	1.660	ms (sec)
Dwell Times on Cycle (1) * (2)	265.427	ms (sec)
LIMIT(msec)	< = 400	
2DH5		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)	
The EUT Hopping Number per Sec	1600 times/sec	
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)	
Each Channel Dwell Times on Cycle(1)	31.6 * 3.37 = 106.492(times)	
Each Channel Dwell Times (2)	2.910	ms (sec)
Dwell Times on Cycle (1) * (2)	310.811	ms (sec)
LIMIT(msec)	< = 400	



Test Graphs

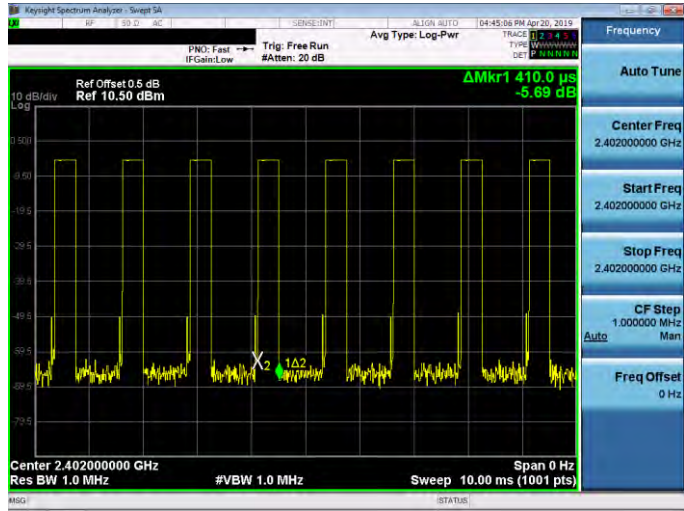Mode 2: GFSK Continuous TX mode	
DH1	 KeySight Spectrum Analyzer - Sweep SA RF 50 D AC SENSE:INT ALIGN: AUTO 04:45:06 PM Apr 20, 2019 PNO: Fast Trig: Free Run Avg Type: Log-Pwr IFGain:Low #Atten: 20 dB Ref Offset 0.5 dB Ref 10.50 dBm ΔMkr1 410.0 us -5.69 dB 10 dB/div 1.00 Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts) Span 0 Hz MSG STATUS
DH3	 KeySight Spectrum Analyzer - Sweep SA RF 50 D AC SENSE:INT ALIGN: AUTO 04:45:35 PM Apr 20, 2019 PNO: Fast Trig: Free Run Avg Type: Log-Pwr IFGain:Low #Atten: 20 dB Ref Offset 0.5 dB Ref 10.50 dBm ΔMkr1 1.660 ms -0.57 dB 10 dB/div 1.00 Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts) Span 0 Hz MSG STATUS
DH5	 KeySight Spectrum Analyzer - Sweep SA RF 50 D AC SENSE:INT ALIGN: AUTO 04:46:22 PM Apr 20, 2019 PNO: Fast Trig: Free Run Avg Type: Log-Pwr IFGain:Low #Atten: 20 dB Ref Offset 0.5 dB Ref 10.50 dBm ΔMkr1 2.910 ms -6.58 dB 10 dB/div 1.00 Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts) Span 0 Hz MSG STATUS




Mode 3: $\pi/4$ -DQPSK Continuous TX mode	
2DH1	
2DH3	
2DH5	

Out of Band Conducted Emissions Measurement


■ Test Graphs

Mode 2: GFSK Continuous TX mode


2402 MHz

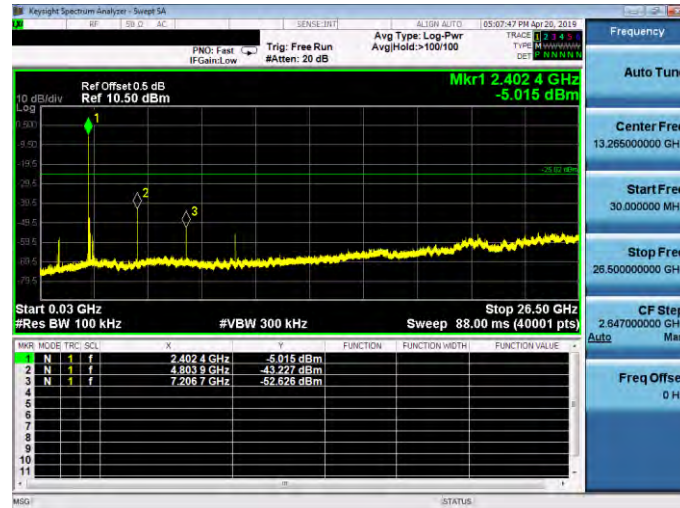

2441 MHz

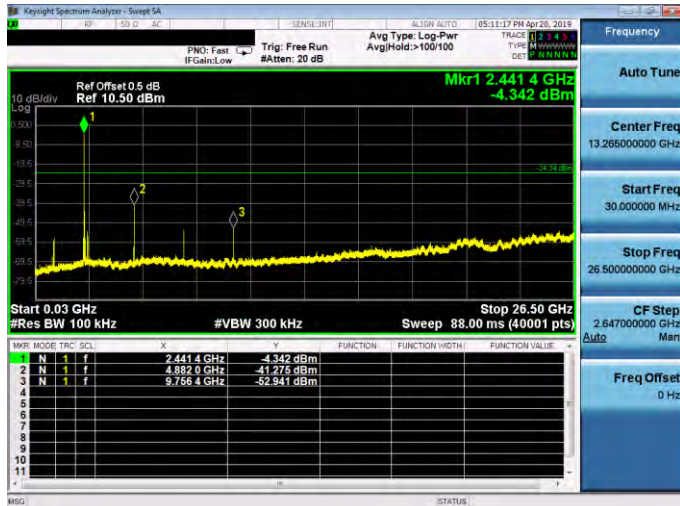

2480 MHz

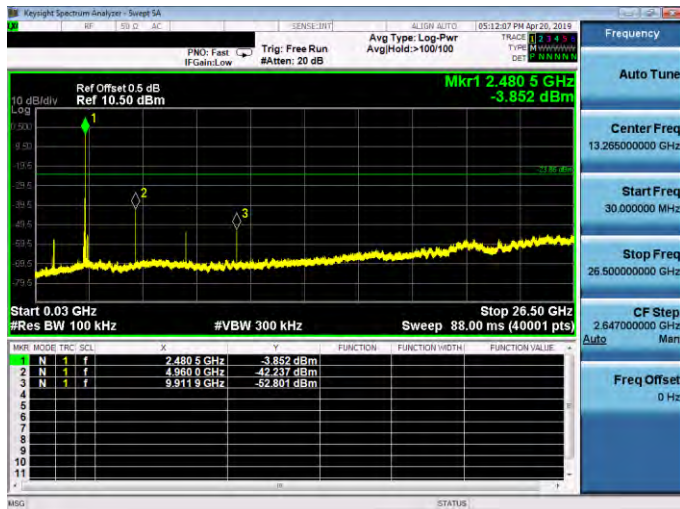





Mode 3: $\pi/4$ -DQPSK Continuous TX mode

2402 MHz	Keyight Spectrum Analyzer - Sweep SA SENSE:INT ALIGN: AUTO 05:09:08 PM Apr 20, 2019 PN0: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB Avg Type: Log-Pwr Avg Hold: >100/100 TYPE: M DET: P Ref Offset 0.5 dB Ref 10.50 dBm Mkr1 2.402 4 GHz -5.028 dBm 10 dB/div Log 130.0 125.0 120.0 115.0 110.0 105.0 100.0 95.0 90.0 85.0 80.0 75.0 Start 0.03 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 88.00 ms (40001 pts) Stop 26.50 GHz <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 4 GHz</td><td>-5.028 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.804 5 GHz</td><td>-41.816 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>9.600 2 GHz</td><td>-56.185 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS Frequency Auto Tune Center Freq 13.265000000 GHz Start Freq 30.000000 MHz Stop Freq 26.500000000 GHz CF Step 2.647000000 GHz Auto Man Freq Offset 0 Hz	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 4 GHz	-5.028 dBm				2	N	1	f	4.804 5 GHz	-41.816 dBm				3	N	1	f	9.600 2 GHz	-56.185 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.402 4 GHz	-5.028 dBm																																																																																																								
2	N	1	f	4.804 5 GHz	-41.816 dBm																																																																																																								
3	N	1	f	9.600 2 GHz	-56.185 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2441 MHz	Keyight Spectrum Analyzer - Sweep SA SENSE:INT ALIGN: AUTO 05:09:59 PM Apr 20, 2019 PN0: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB Avg Type: Log-Pwr Avg Hold: >100/100 TRACE 1 TYPE: M DET: P Ref Offset 0.5 dB Ref 10.50 dBm Mkr1 2.441 4 GHz -4.168 dBm 10 dB/div Log 130.0 125.0 120.0 115.0 110.0 105.0 100.0 95.0 90.0 85.0 80.0 75.0 Start 0.03 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 88.00 ms (40001 pts) Stop 26.50 GHz <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 4 GHz</td><td>-4.168 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.882 6 GHz</td><td>-43.766 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>9.768 4 GHz</td><td>-52.813 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS Frequency Auto Tune Center Freq 13.265000000 GHz Start Freq 30.000000 MHz Stop Freq 26.500000000 GHz CF Step 2.647000000 GHz Auto Man Freq Offset 0 Hz	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	-4.168 dBm				2	N	1	f	4.882 6 GHz	-43.766 dBm				3	N	1	f	9.768 4 GHz	-52.813 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.441 4 GHz	-4.168 dBm																																																																																																								
2	N	1	f	4.882 6 GHz	-43.766 dBm																																																																																																								
3	N	1	f	9.768 4 GHz	-52.813 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2480 MHz	Keyight Spectrum Analyzer - Sweep SA SENSE:INT ALIGN: AUTO 05:13:29 PM Apr 20, 2019 PN0: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB Avg Type: Log-Pwr Avg Hold: >100/100 TRACE 1 TYPE: M DET: P Ref Offset 0.5 dB Ref 10.50 dBm Mkr1 2.480 5 GHz -3.499 dBm 10 dB/div Log 130.0 125.0 120.0 115.0 110.0 105.0 100.0 95.0 90.0 85.0 80.0 75.0 Start 0.03 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 88.00 ms (40001 pts) Stop 26.50 GHz <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 5 GHz</td><td>-3.499 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.960 7 GHz</td><td>-42.311 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>7.440 9 GHz</td><td>-52.472 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS Frequency Auto Tune Center Freq 13.265000000 GHz Start Freq 30.000000 MHz Stop Freq 26.500000000 GHz CF Step 2.647000000 GHz Auto Man Freq Offset 0 Hz	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 5 GHz	-3.499 dBm				2	N	1	f	4.960 7 GHz	-42.311 dBm				3	N	1	f	7.440 9 GHz	-52.472 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.480 5 GHz	-3.499 dBm																																																																																																								
2	N	1	f	4.960 7 GHz	-42.311 dBm																																																																																																								
3	N	1	f	7.440 9 GHz	-52.472 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													


Mode 2: GFSK Continuous TX mode _ Un-hopping

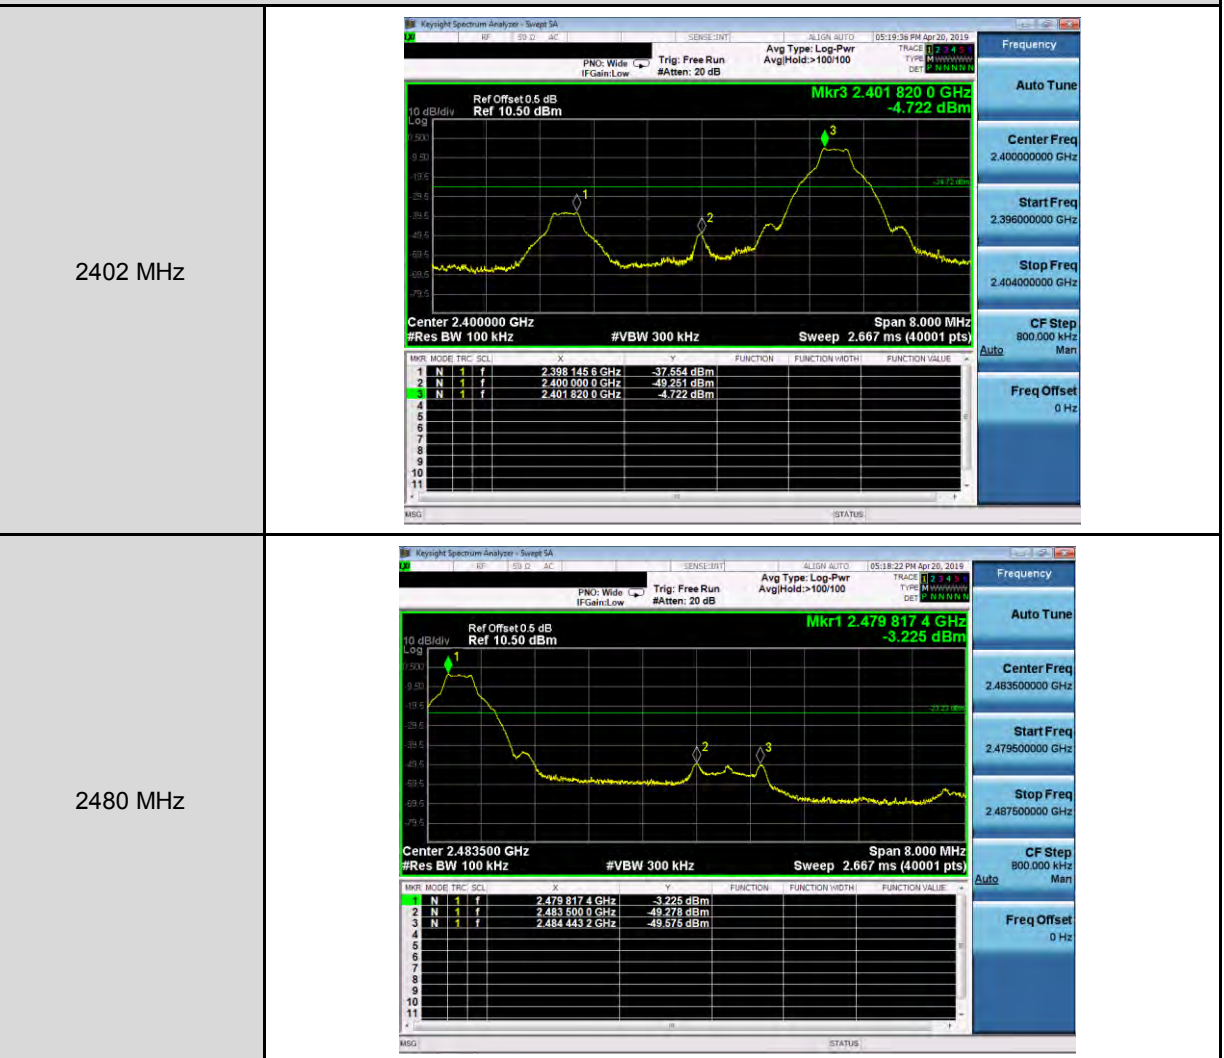


Mode 2: GFSK Continuous TX mode _ Hopping

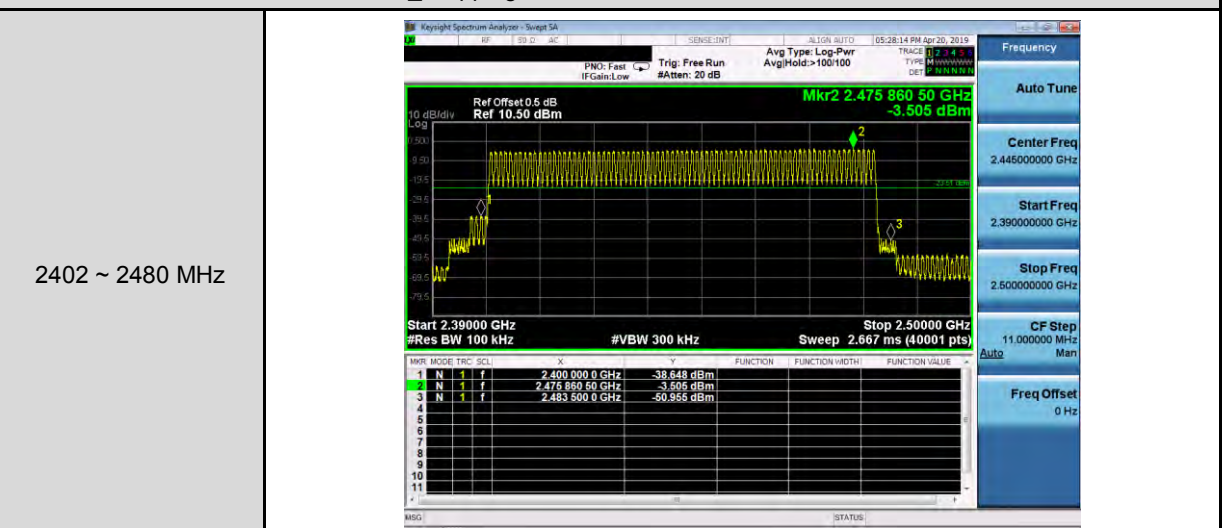

Mode 3: $\pi/4$ -DQPSK Continuous TX mode _ Un-hopping

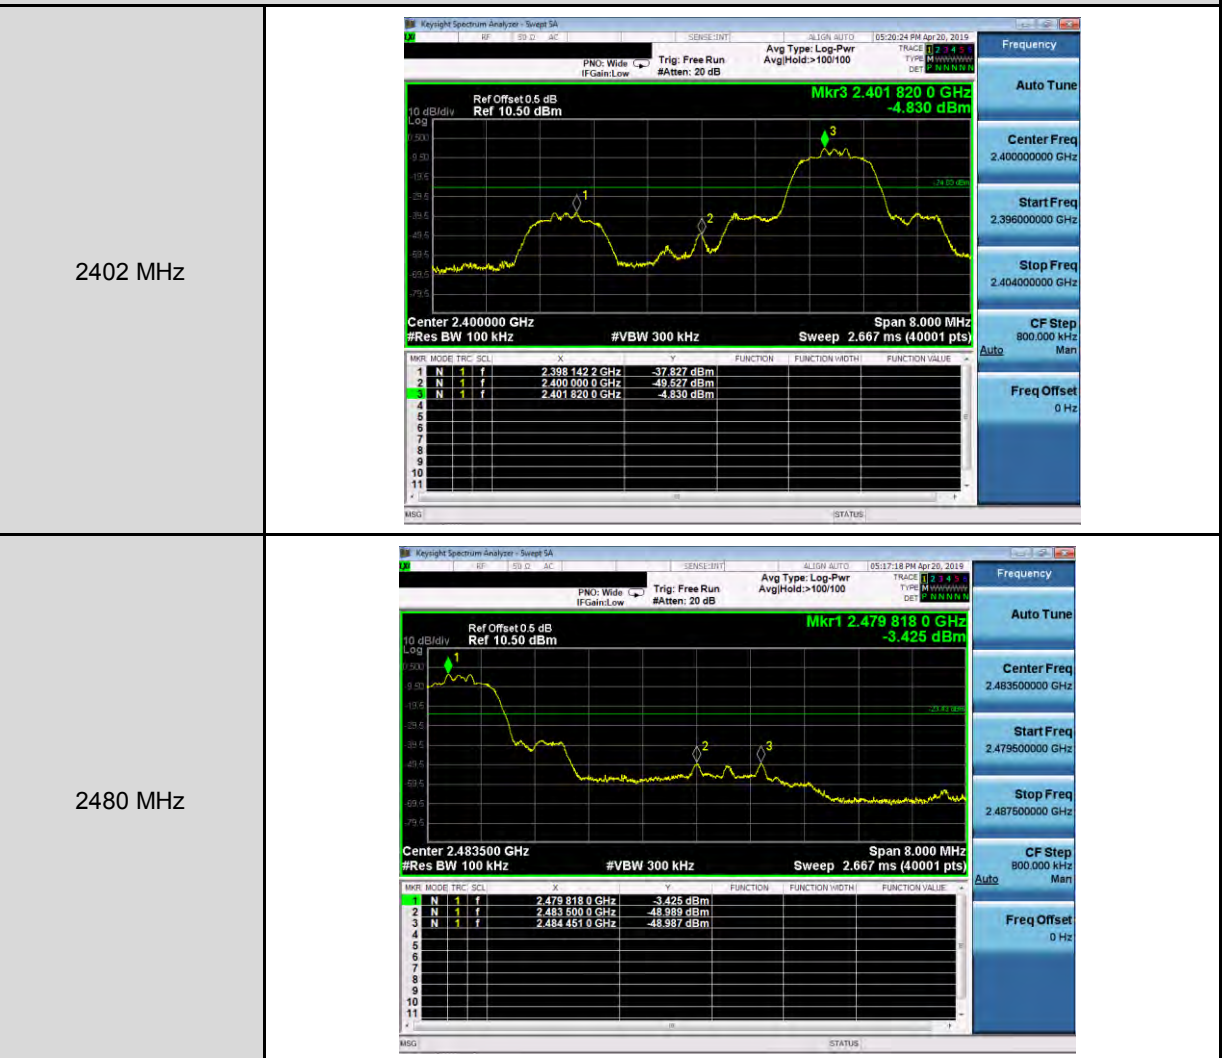

Mode 3: $\pi/4$ -DQPSK Continuous TX mode _ Hopping

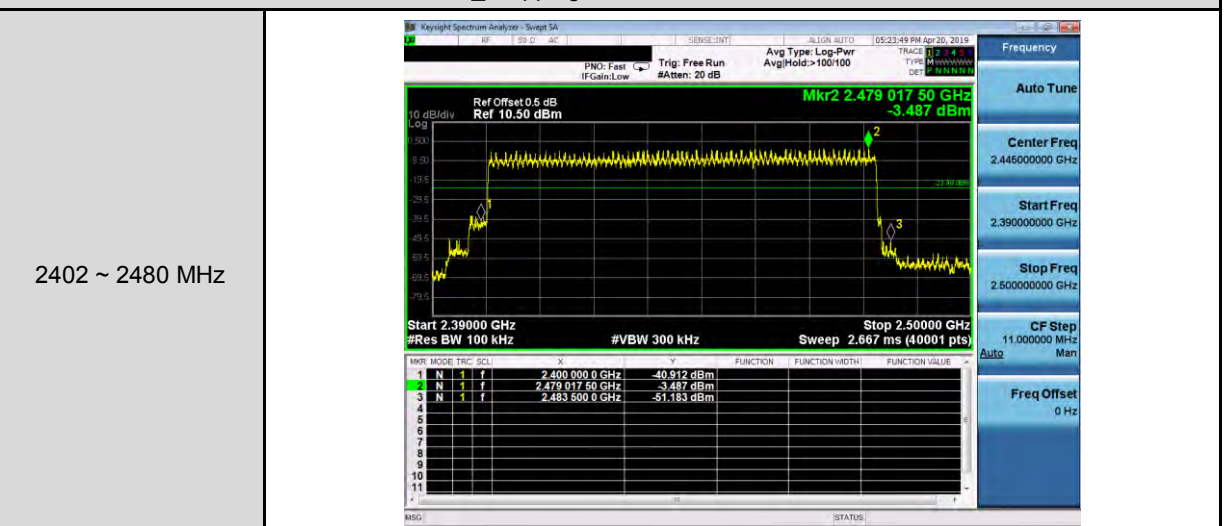

Annex C. Radiated Emission Measurement

Harmonic

Below 1 GHz

Standard:		FCC Part 15.247		Test Distance:		3 m	
Test item:		Harmonic		Power:		AC 120 V/60 Hz	
Test Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60 %RH	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
167.7400	45.64	-11.95	33.69	43.50	-9.81	QP	H
192.9600	51.28	-14.00	37.28	43.50	-6.22	QP	H
249.2200	52.51	-12.59	39.92	46.00	-6.08	QP	H
267.6500	50.89	-12.15	38.74	46.00	-7.26	QP	H
384.0500	43.73	-8.71	35.02	46.00	-10.98	QP	H
808.9100	29.20	-0.57	28.63	46.00	-17.37	QP	H
124.0900	44.86	-13.75	31.11	43.50	-12.39	QP	V
194.9000	51.40	-14.07	37.33	43.50	-6.17	QP	V
246.3100	48.04	-12.63	35.41	46.00	-10.59	QP	V
377.2600	41.87	-8.96	32.91	46.00	-13.09	QP	V
599.3900	34.92	-3.60	31.32	46.00	-14.68	QP	V
738.1000	31.60	-1.63	29.97	46.00	-16.03	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 33.69=-11.95+45.64.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

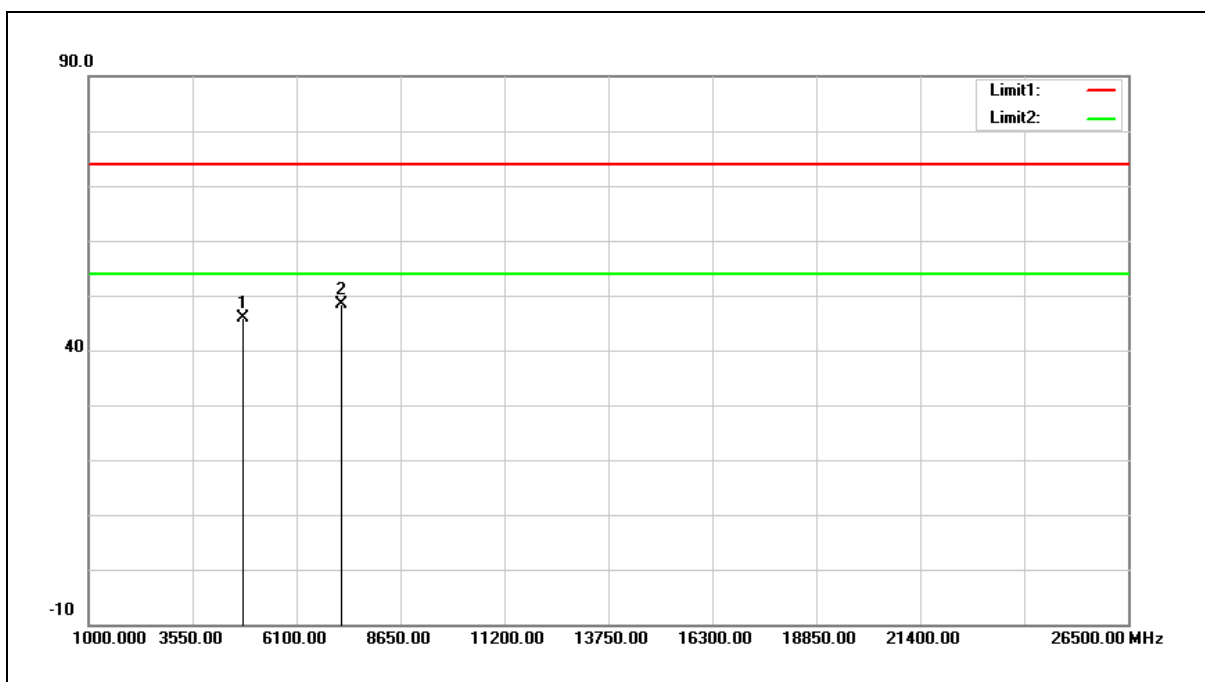

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	50.88	-5.03	45.85	74.00	-28.15	peak
2	7206.000	49.30	-0.97	48.33	74.00	-25.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 45.85=-5.03+50.88.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

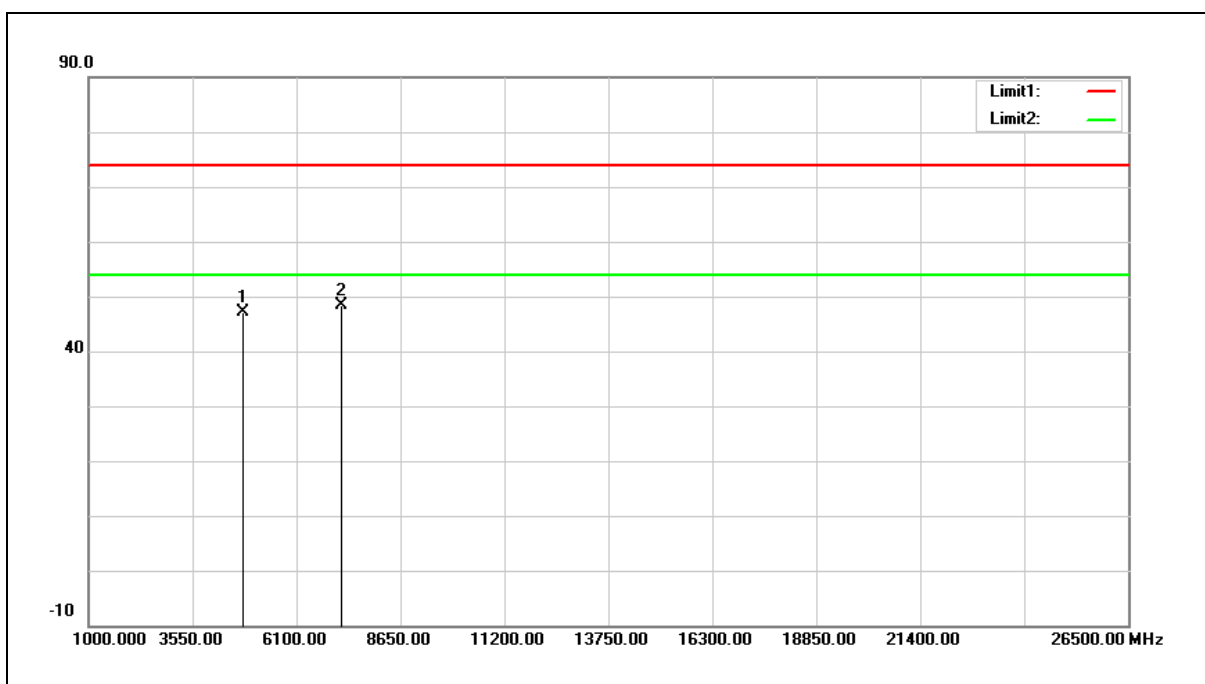

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	52.21	-5.03	47.18	74.00	-26.82	peak
2	7206.000	49.39	-0.97	48.42	74.00	-25.58	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $47.18 = -5.03 + 52.21$.

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

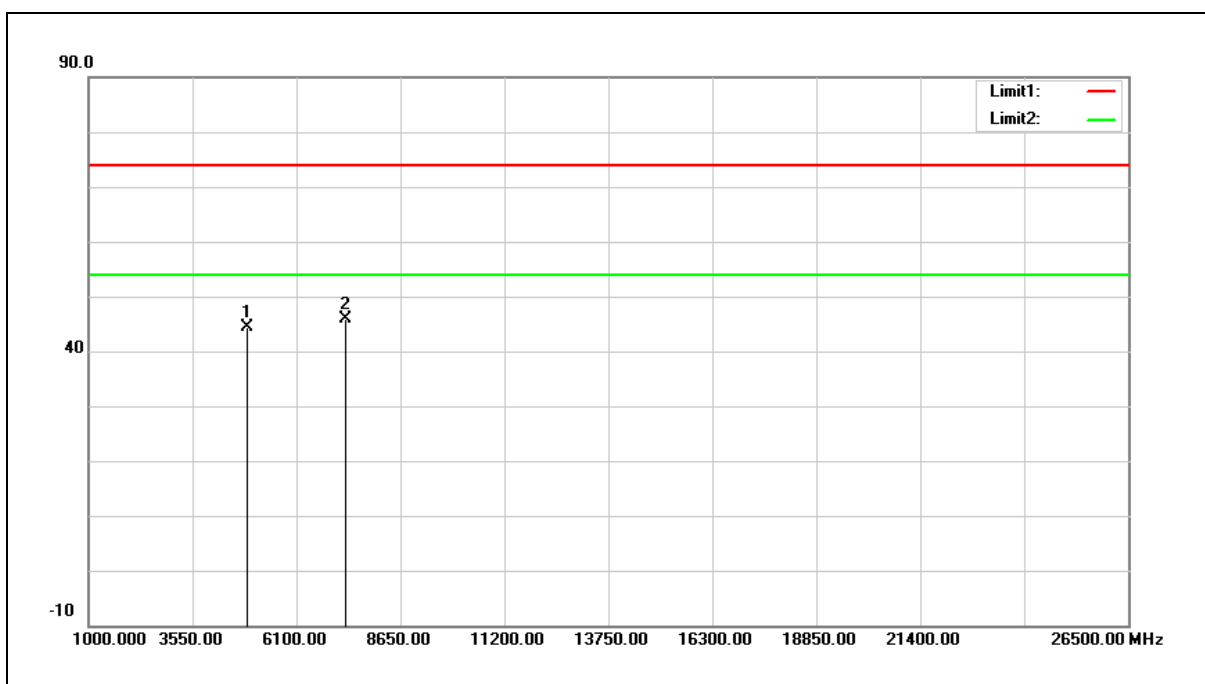

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	49.55	-5.10	44.45	74.00	-29.55	peak
2	7323.000	46.57	-0.63	45.94	74.00	-28.06	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

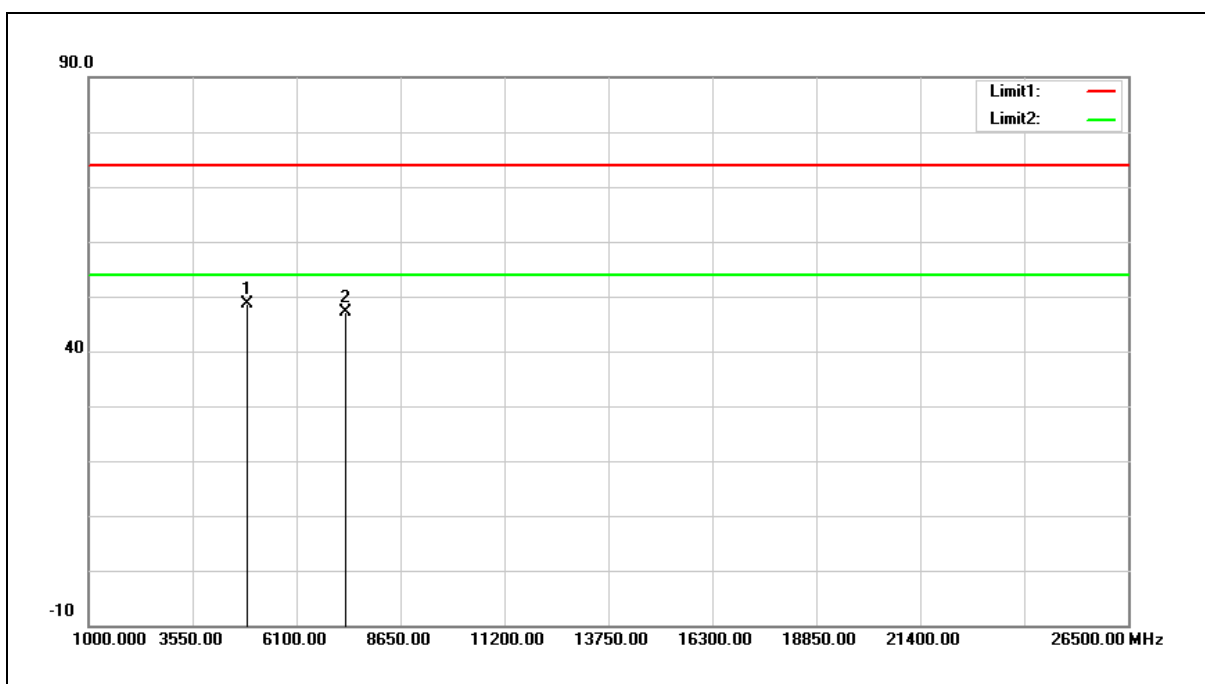

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	53.63	-5.10	48.53	74.00	-25.47	peak
2	7323.000	47.86	-0.63	47.23	74.00	-26.77	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

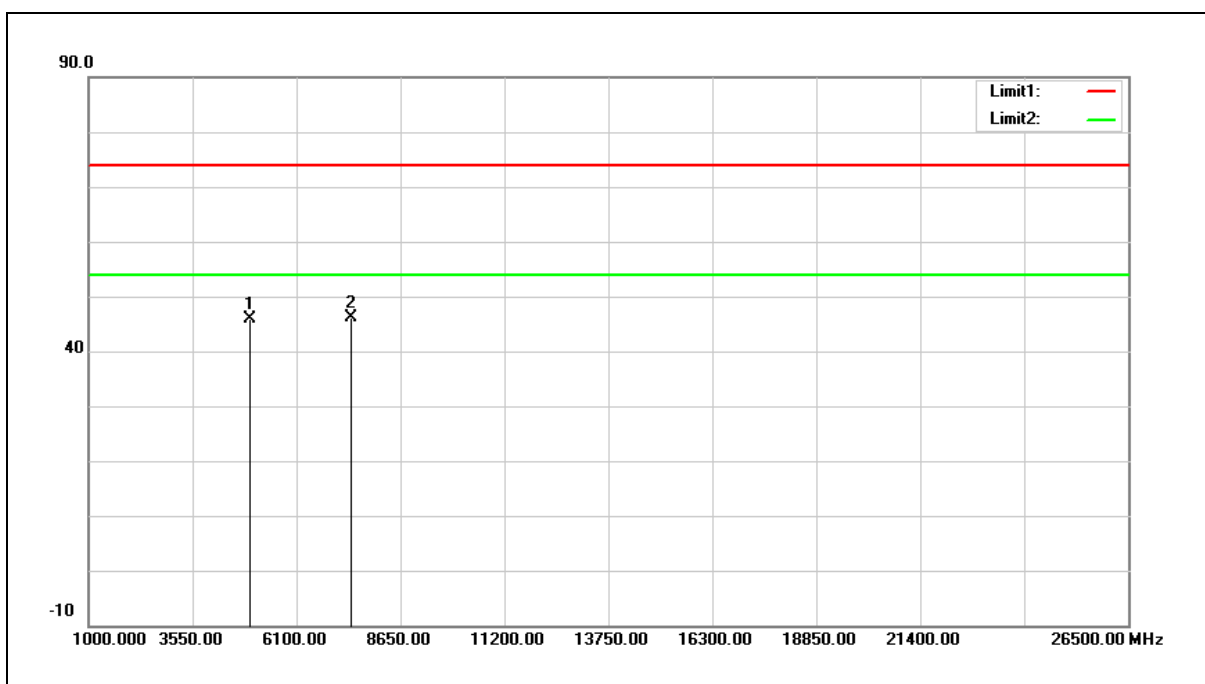

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	50.94	-5.17	45.77	74.00	-28.23	peak
2	7440.000	46.45	-0.35	46.10	74.00	-27.90	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

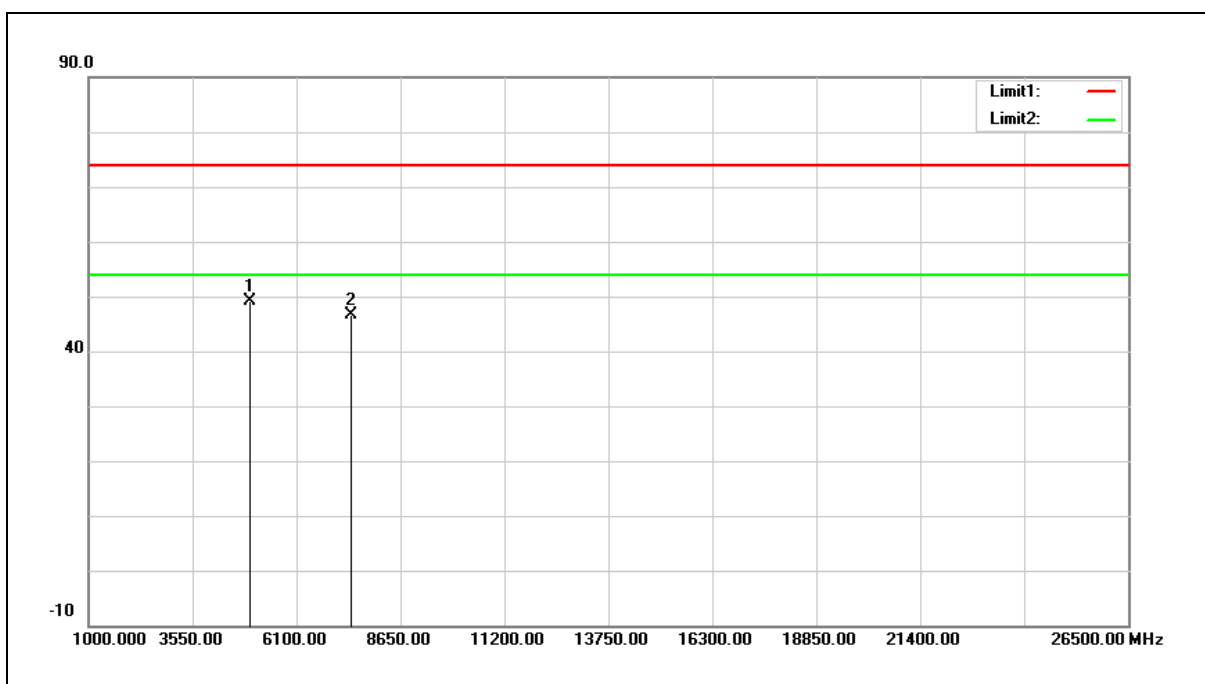


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	54.41	-5.17	49.24	74.00	-24.76	peak
2	7440.000	46.91	-0.35	46.56	74.00	-27.44	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

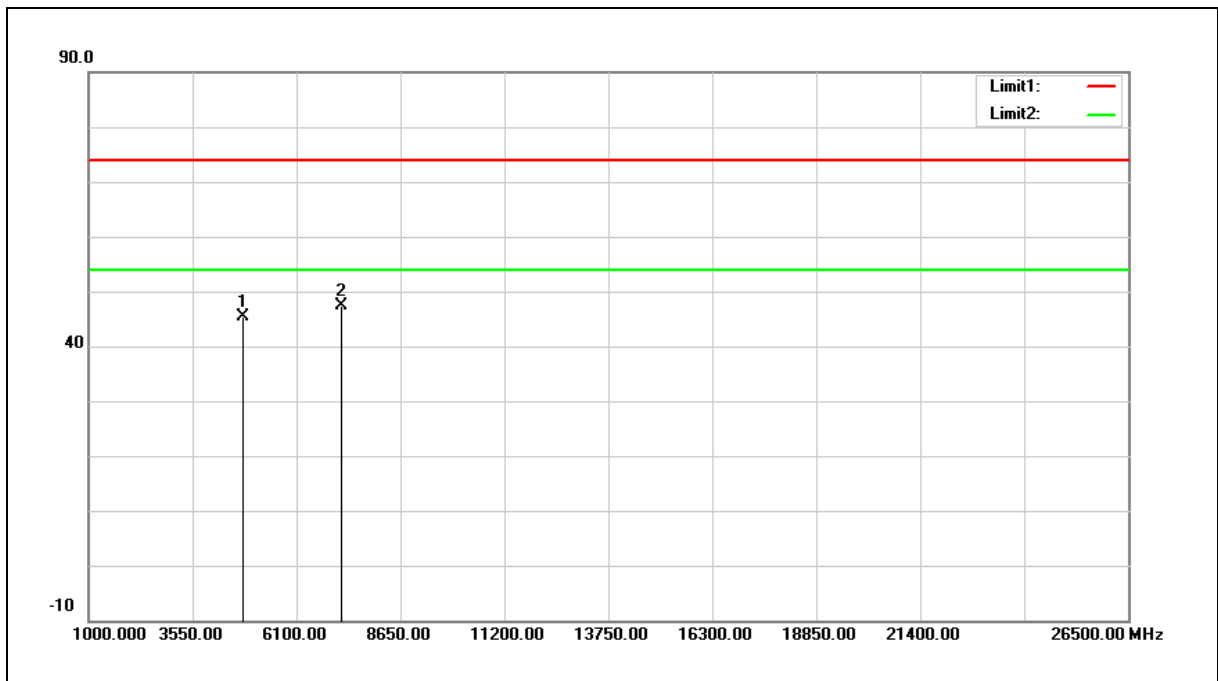

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	50.45	-5.03	45.42	74.00	-28.58	peak
2	7206.000	48.47	-0.97	47.50	74.00	-26.50	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

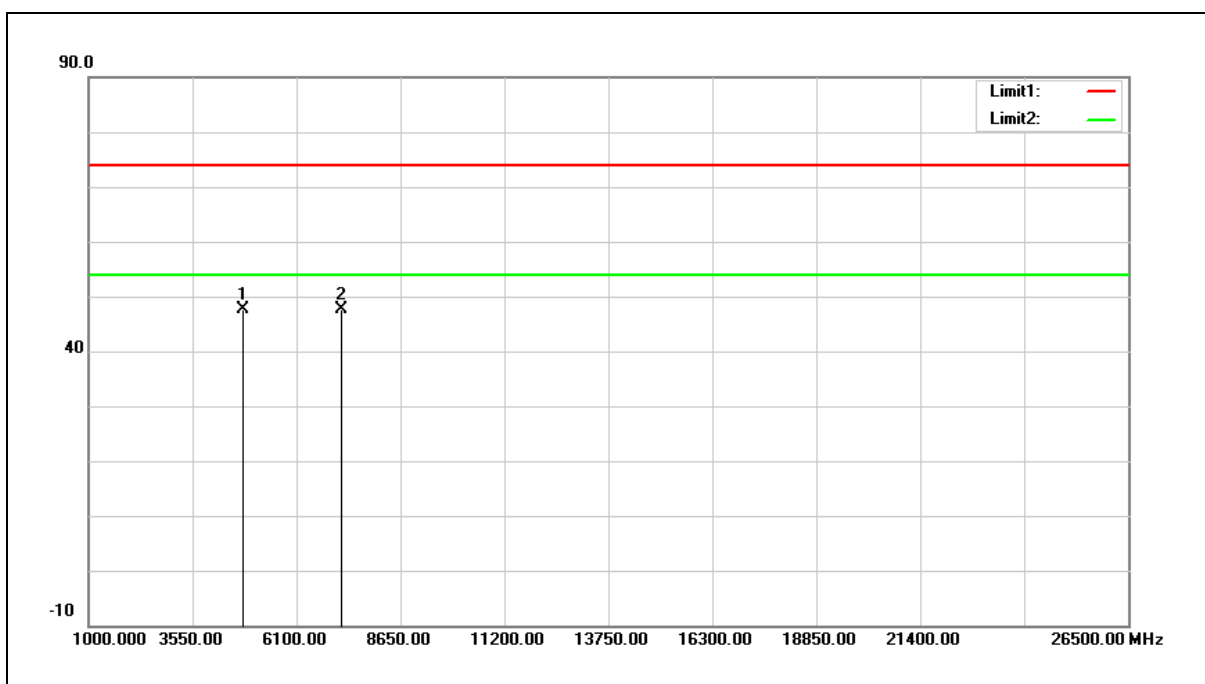

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	52.61	-5.03	47.58	74.00	-26.42	peak
2	7206.000	48.65	-0.97	47.68	74.00	-26.32	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

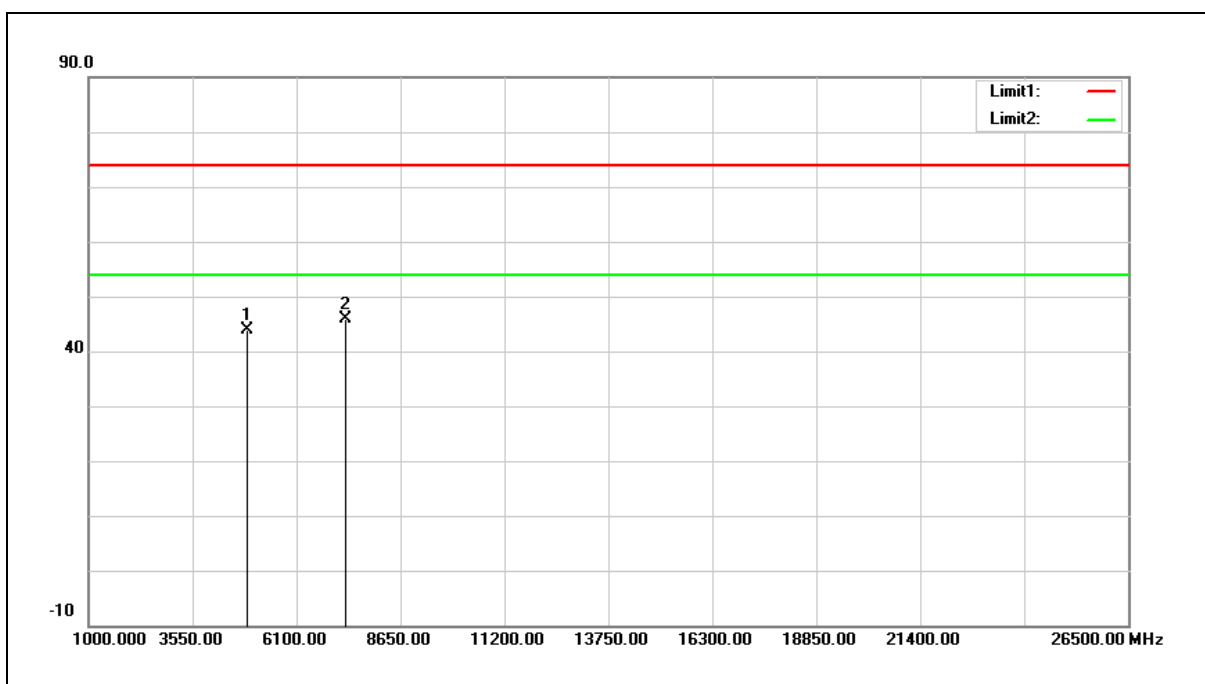


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	48.99	-5.10	43.89	74.00	-30.11	peak
2	7323.000	46.49	-0.63	45.86	74.00	-28.14	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

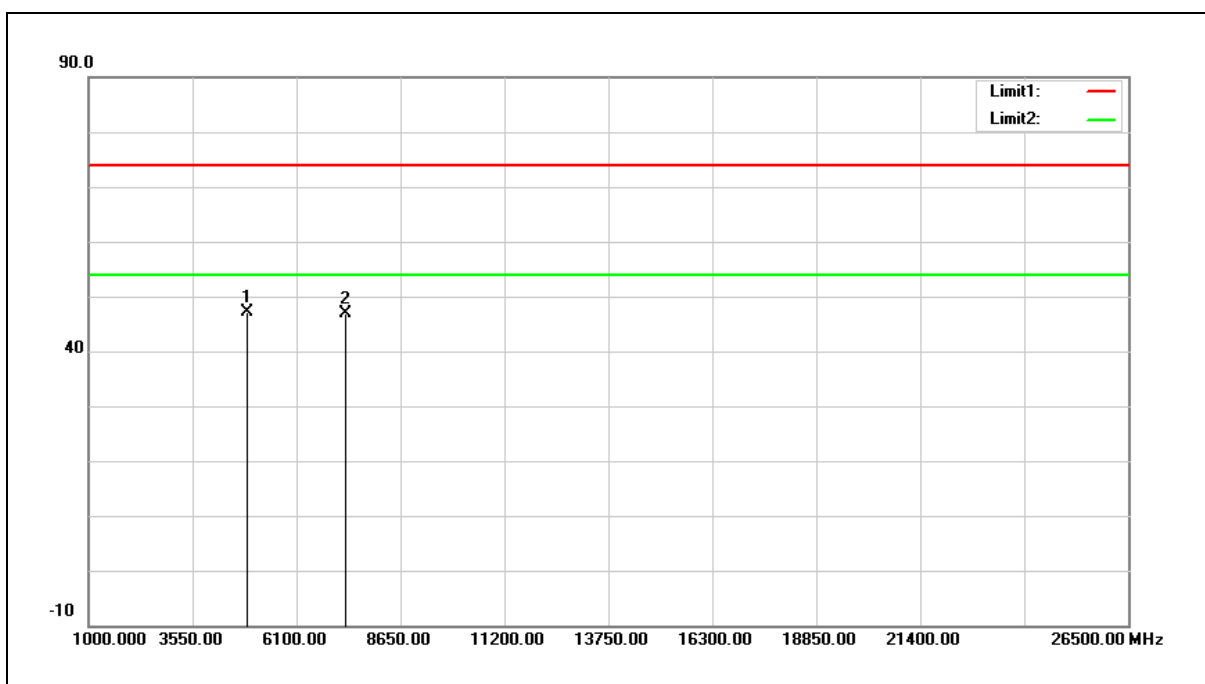

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	52.25	-5.10	47.15	74.00	-26.85	peak
2	7323.000	47.62	-0.63	46.99	74.00	-27.01	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

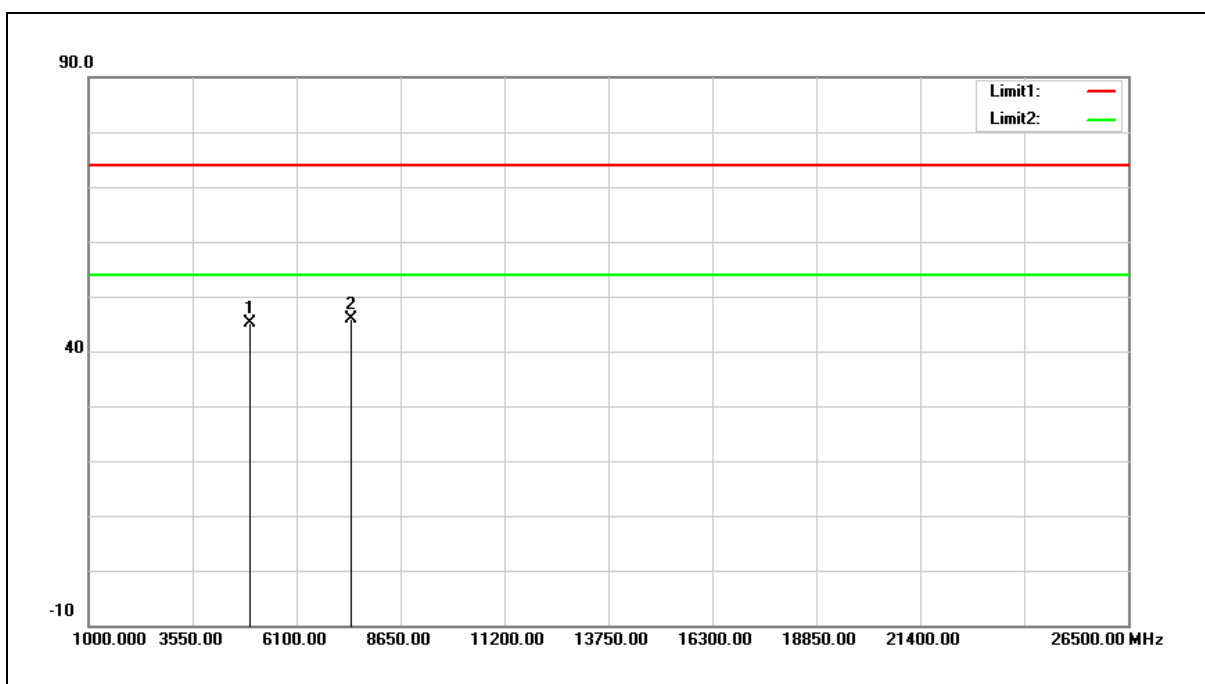

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	50.34	-5.17	45.17	74.00	-28.83	peak
2	7440.000	46.19	-0.35	45.84	74.00	-28.16	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

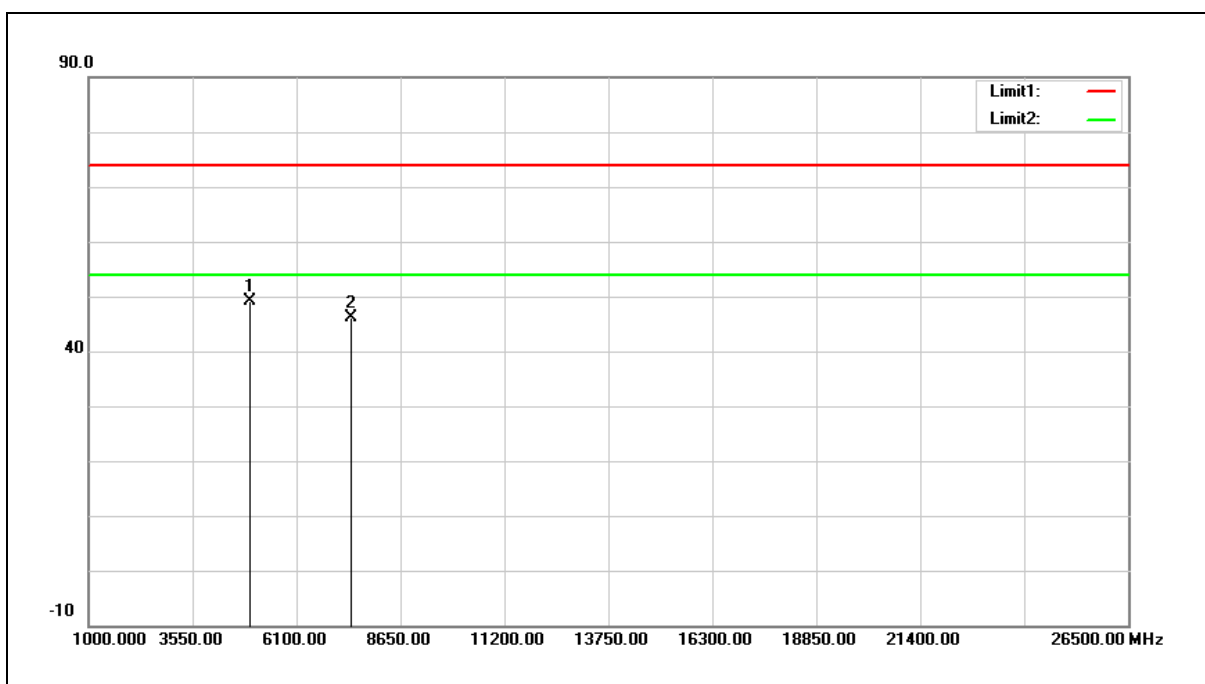

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	54.34	-5.17	49.17	74.00	-24.83	peak
2	7440.000	46.48	-0.35	46.13	74.00	-27.87	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

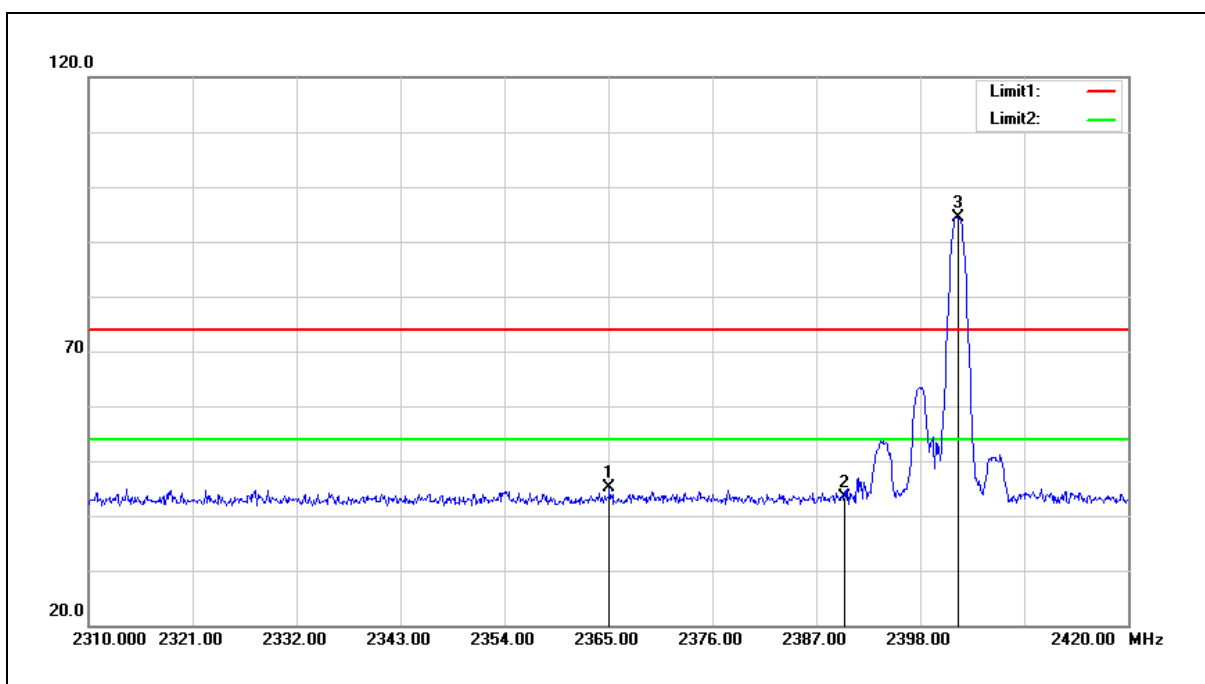

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.110	54.94	-9.86	45.08	74.00	-28.92	peak
2	2390.000	53.04	-9.78	43.26	74.00	-30.74	peak
3	2402.000	104.12	-9.75	94.37	---	---	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

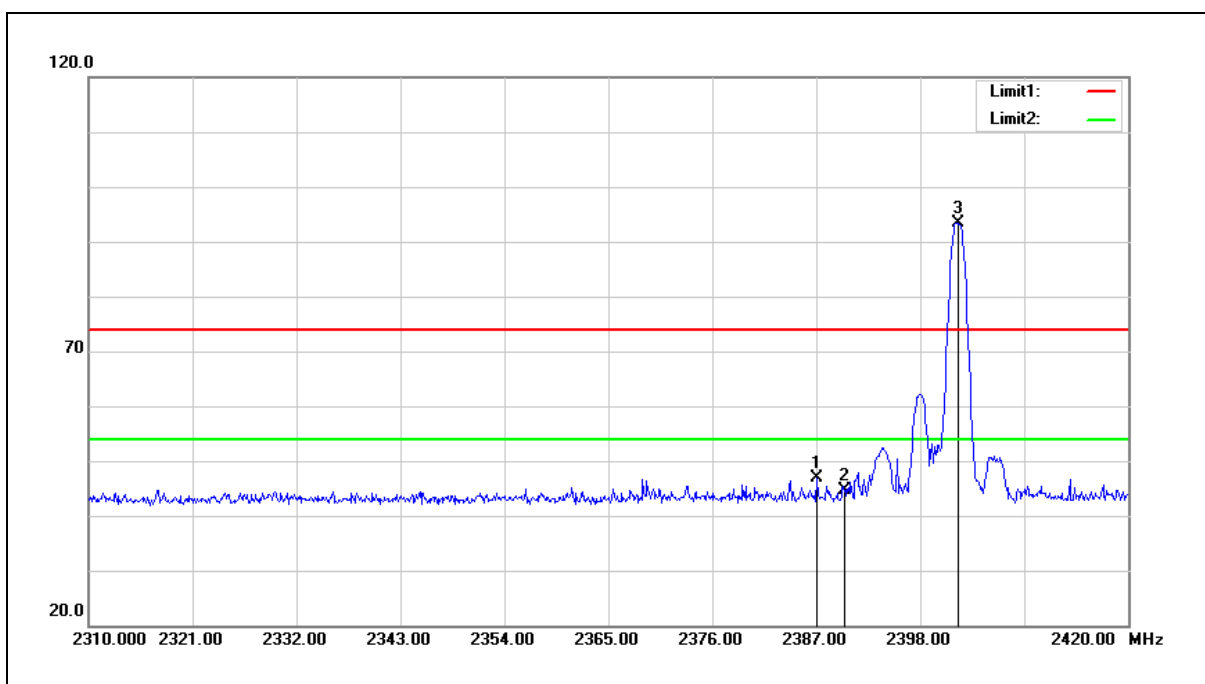

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.000	56.72	-9.79	46.93	74.00	-27.07	peak
2	2390.000	54.46	-9.78	44.68	74.00	-29.32	peak
3	2402.000	103.14	-9.75	93.39	---	---	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

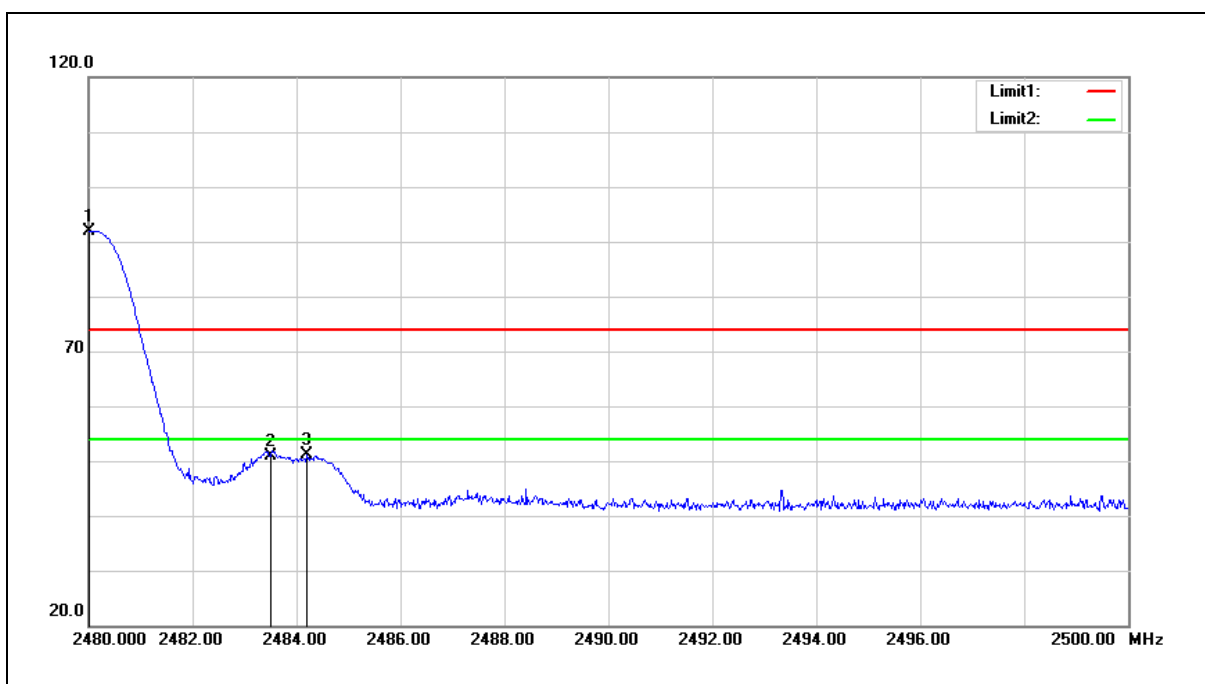

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.48	-9.58	91.90	---	---	peak
2	2483.500	60.42	-9.56	50.86	74.00	-23.14	peak
3	2484.200	60.72	-9.56	51.16	74.00	-22.84	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

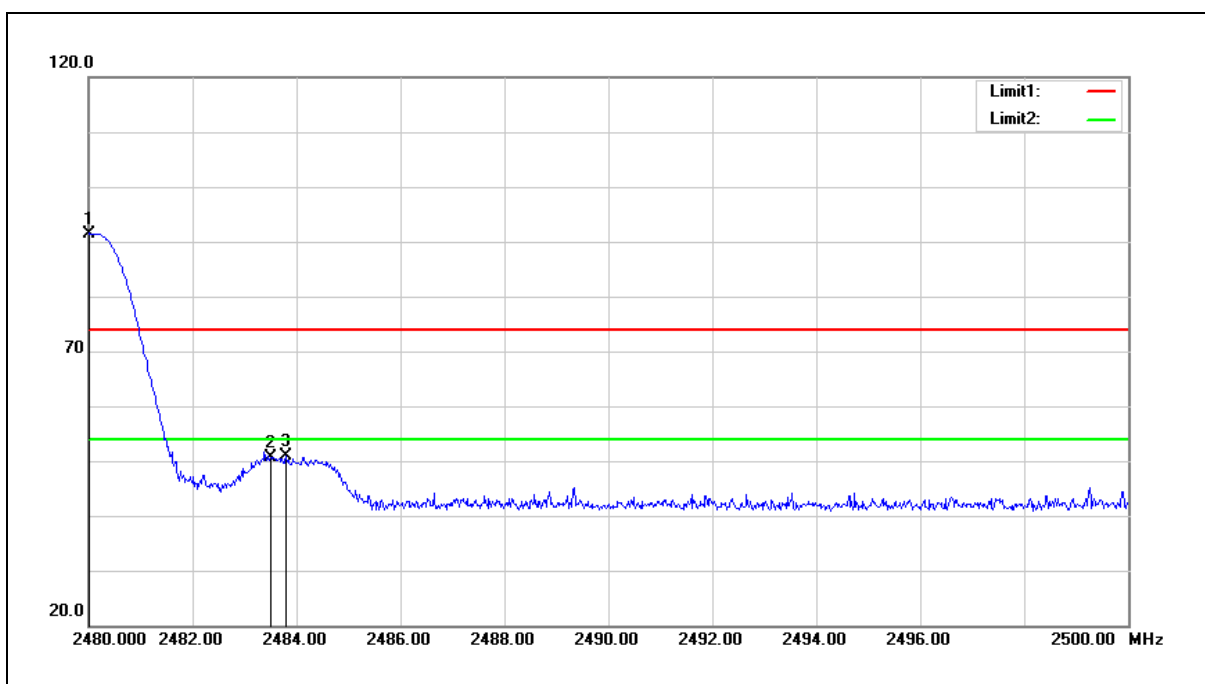

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.08	-9.58	91.50	---	---	peak
2	2483.500	60.10	-9.56	50.54	74.00	-23.46	peak
3	2483.800	60.54	-9.56	50.98	74.00	-23.02	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Frequency:	Hopping		
Ant.Polar.:	Horizontal		

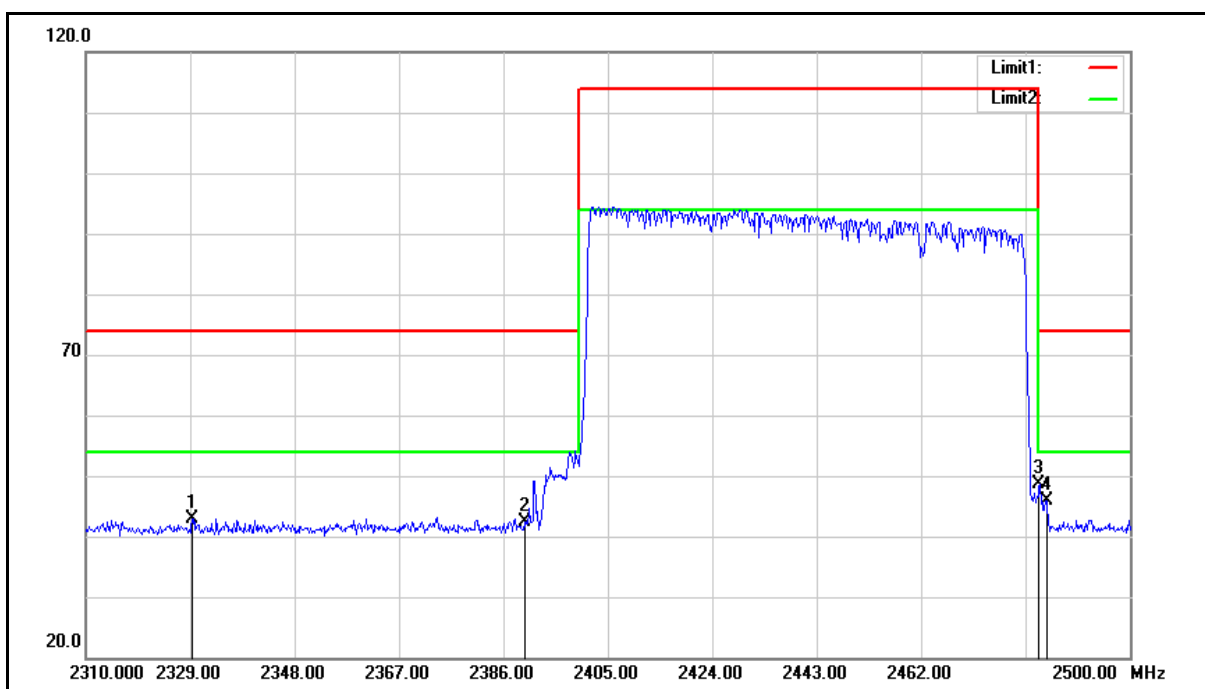

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2329.380	52.88	-9.98	42.90	74.00	-31.10	peak
2	2390.000	52.14	-9.78	42.36	74.00	-31.64	peak
3	2483.500	58.28	-9.56	48.72	74.00	-25.28	peak
4	2484.800	55.50	-9.56	45.94	74.00	-28.06	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Frequency:	Hopping		
Ant.Polar.:	Vertical		

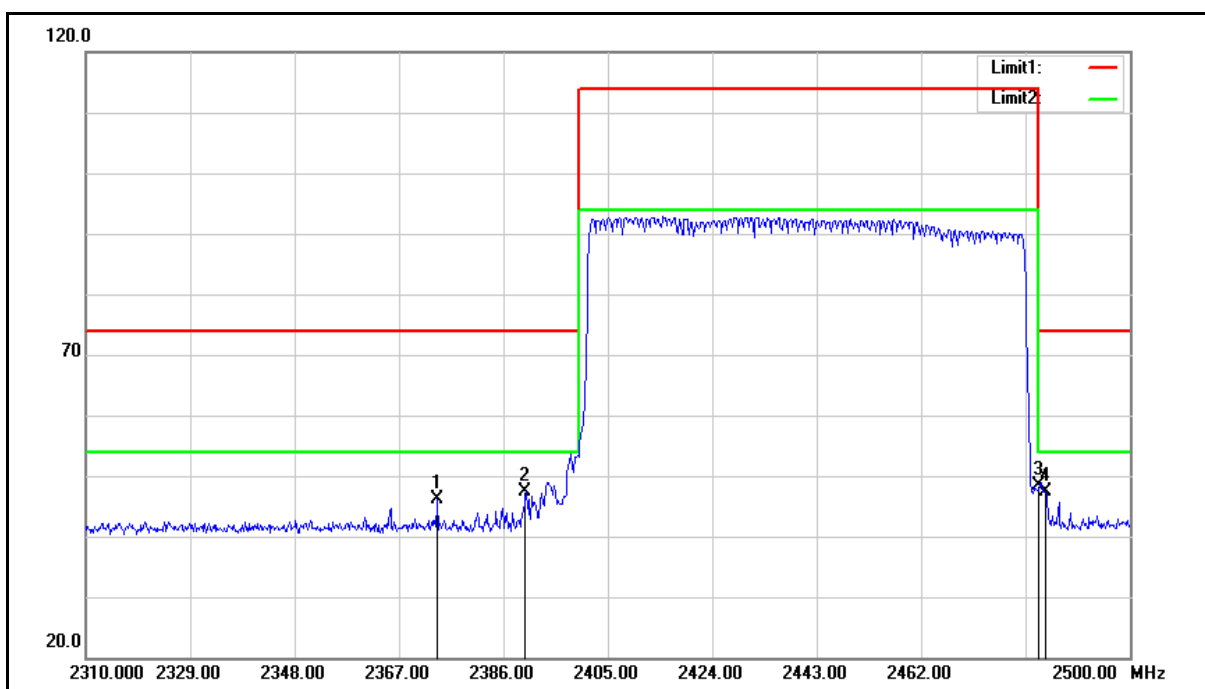

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.030	55.91	-9.83	46.08	74.00	-27.92	peak
2	2390.000	57.17	-9.78	47.39	74.00	-26.61	peak
3	2483.500	58.05	-9.56	48.49	74.00	-25.51	peak
4	2484.610	56.95	-9.56	47.39	74.00	-26.61	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

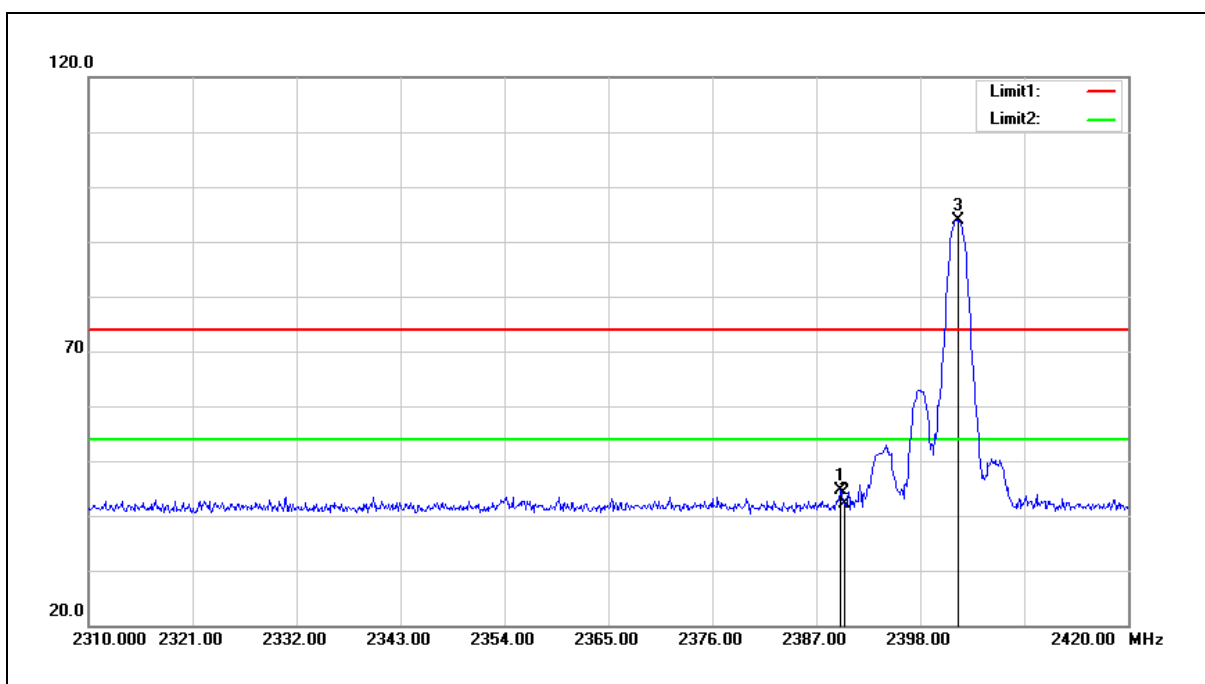

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	54.35	-9.79	44.56	74.00	-29.44	peak
2	2390.000	51.99	-9.78	42.21	74.00	-31.79	peak
3	2402.000	103.74	-9.75	93.99	---	---	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

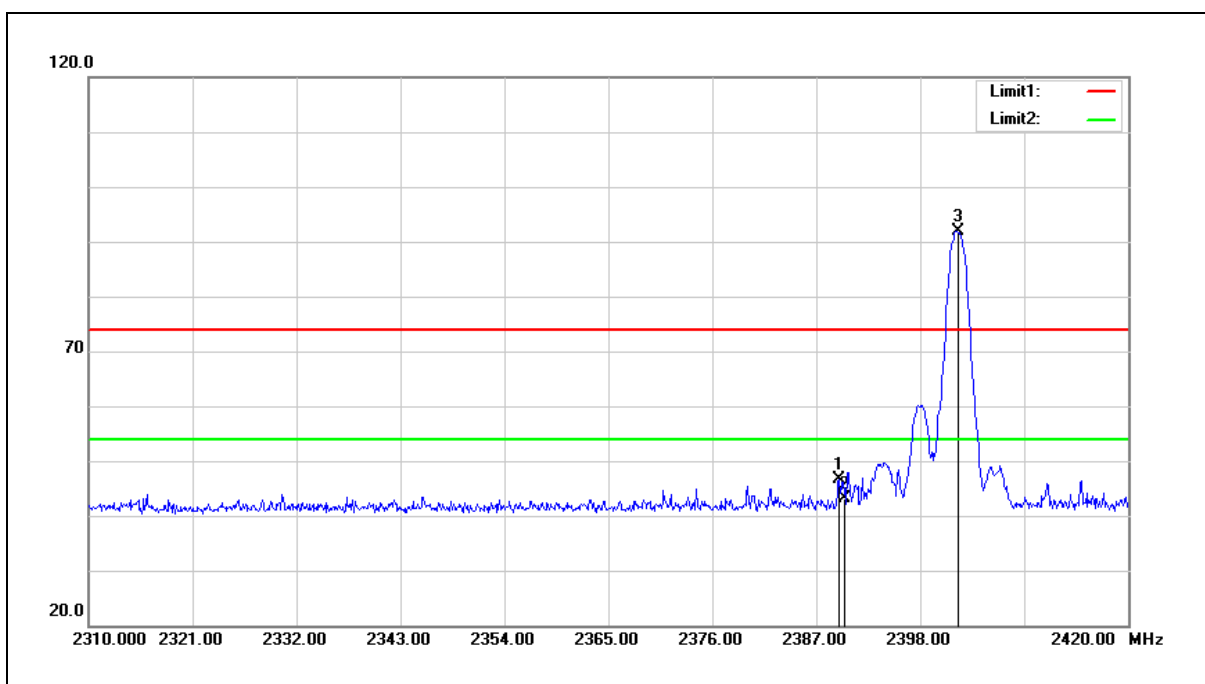


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	56.46	-9.79	46.67	74.00	-27.33	peak
2	2390.000	52.82	-9.78	43.04	74.00	-30.96	peak
3	2402.000	101.63	-9.75	91.88	---	---	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

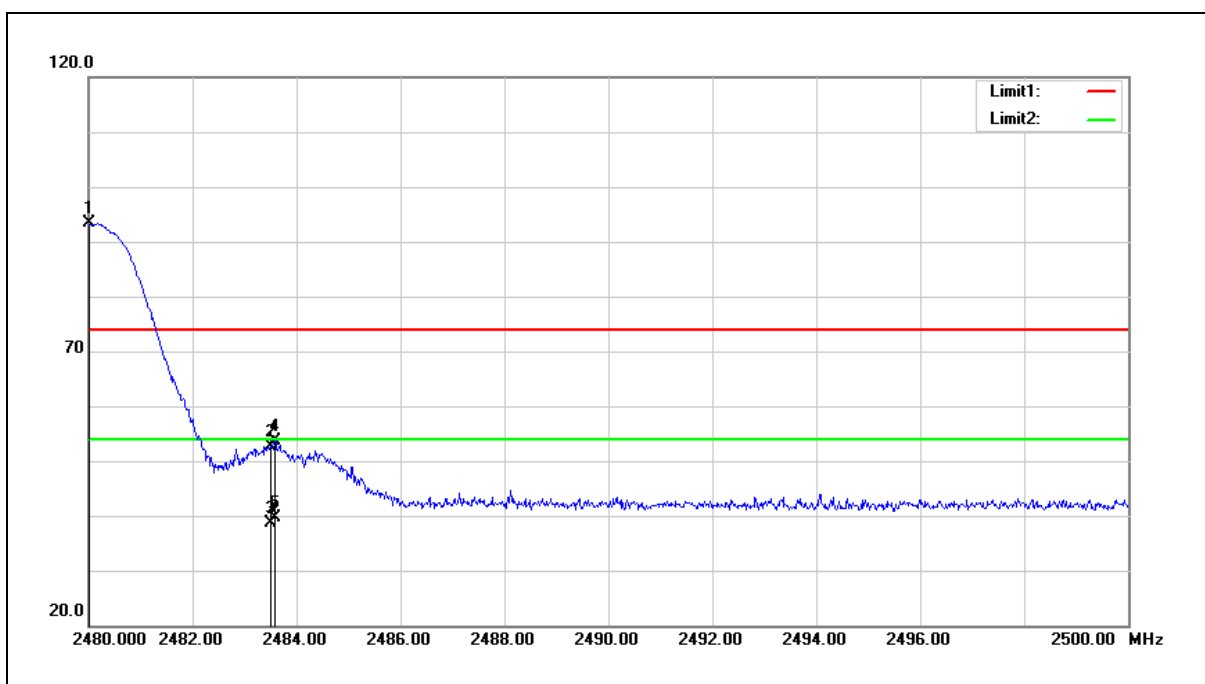

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	102.86	-9.58	93.28	---	---	peak
2	2483.500	62.21	-9.56	52.65	74.00	-21.35	peak
3	2483.500	48.15	-9.56	38.59	54.00	-15.41	AVG
4	2483.580	63.14	-9.56	53.58	74.00	-20.42	peak
5	2483.580	49.27	-9.56	39.71	54.00	-14.29	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

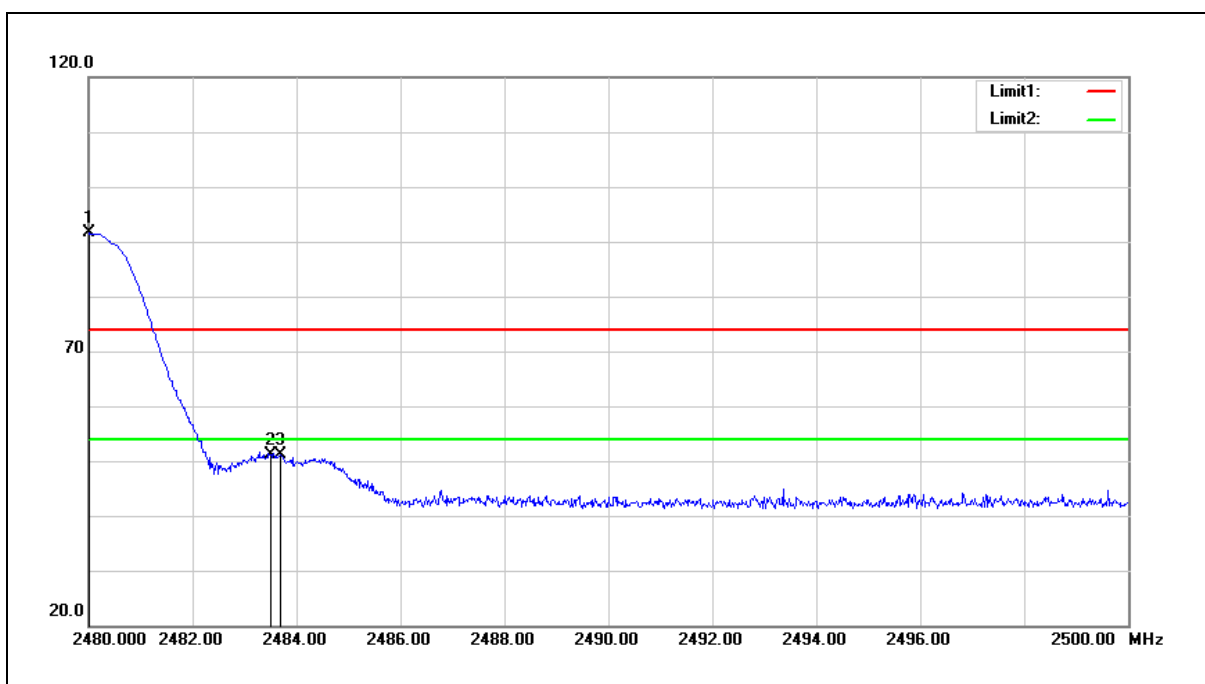

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.10	-9.58	91.52	---	---	peak
2	2483.500	60.58	-9.56	51.02	74.00	-22.98	peak
3	2483.700	60.81	-9.56	51.25	74.00	-22.75	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Test Mode:	Mode 3	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Frequency:	Hopping		
Ant.Polar.:	Horizontal		

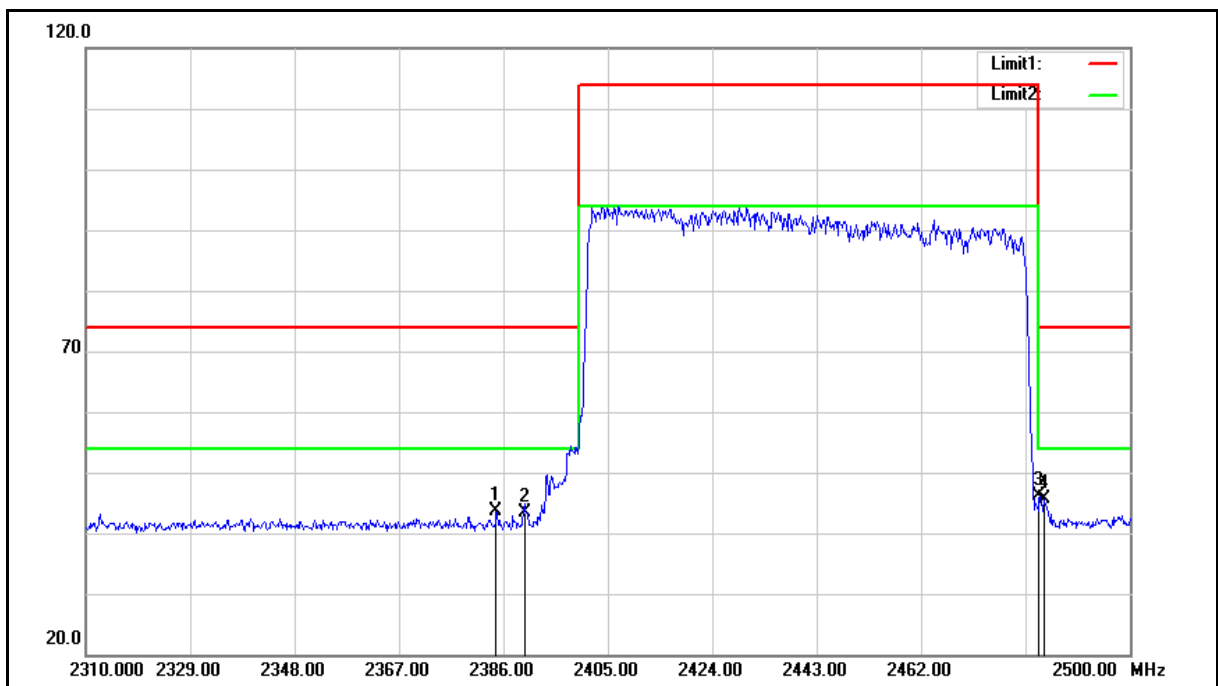

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.670	53.36	-9.80	43.56	74.00	-30.44	peak
2	2390.000	53.17	-9.78	43.39	74.00	-30.61	peak
3	2483.500	55.58	-9.56	46.02	74.00	-27.98	peak
4	2484.420	55.24	-9.56	45.68	74.00	-28.32	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.7 V
Test Mode:	Mode 3	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Frequency:	Hopping		
Ant.Polar.:	Vertical		

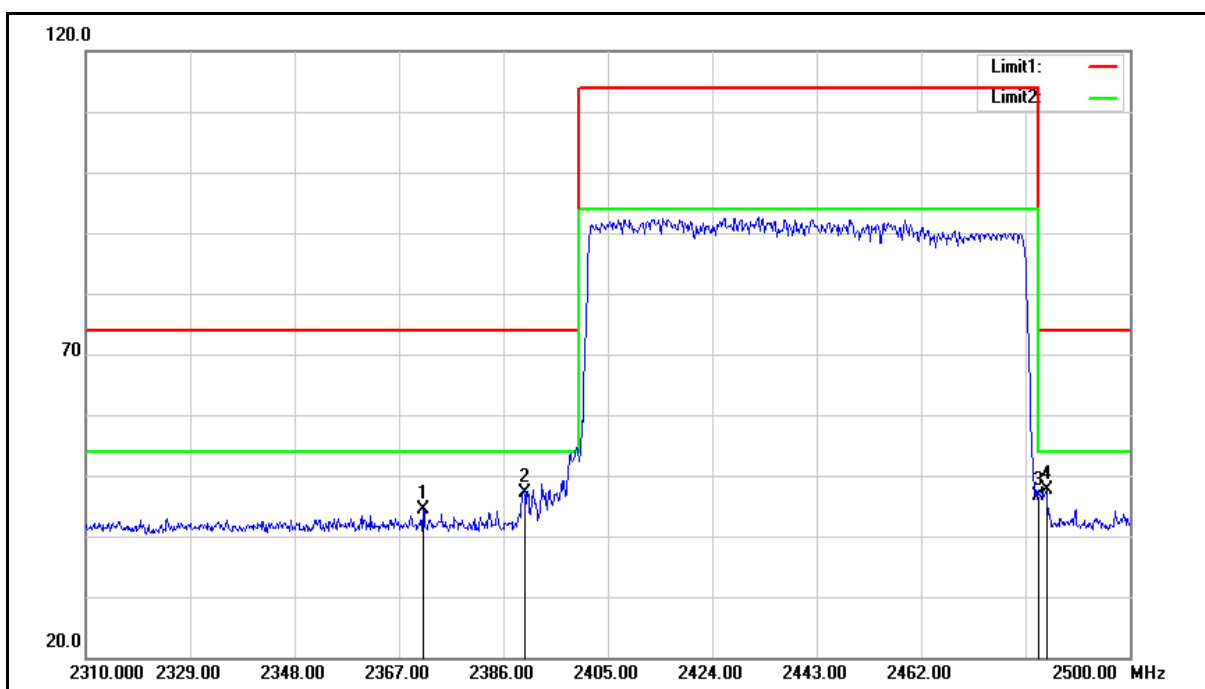

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.370	54.12	-9.84	44.28	74.00	-29.72	peak
2	2390.000	56.90	-9.78	47.12	74.00	-26.88	peak
3	2483.500	56.13	-9.56	46.57	74.00	-27.43	peak
4	2484.800	57.22	-9.56	47.66	74.00	-26.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.