CMC Centro Misure Compatibilità S.r.l.
Via della Fisica, 20
36016 Thiene (VI) – ITALY
Tel./Fax +39 0445 367702
www.cmclab.it - info@cmclab.it

ACCREDIA L'ENTE ITALIANO DI ACCREDITAMENTO
LAB N° 0168

Independent Testing Laboratory
Accredited by ACCREDIA according to UNI CEI EN ISO/IEC 17025 cert. nr. 0168

TEST REPORT
Nr. R20001001

Federal Communication Commission (FCC)

Report Reference No. .....:	R20001001
Date of issue: .....:	20.02.2020
Total number pages: .....:	28
Applicant´s name .....:	Elettronica GF S.r.l.
Address .....:	Via Ca' Bianca, 10 – 48018 Faenza (RA) – Italy
Test specification:	
Standards .....:	FCC Rules & Regulations, Title 47:2018 Part 15 paragraph(s): 209
Non-standard test method .....:	N/A
Test Report Form No. .....:	15_225CMC
Test Report Form(s) Originator ..:	CMC Centro Misure Compatibilità S.r.l.
Master TRF .....:	2020-01

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.

Test item description .....:	NFC/BLE (Gymkit) 5V RS232 board
Trademark .....:	Elettronica GF
Manufacturer .....:	Elettronica GF S.r.l.
Model / Type reference .....:	0615G
FCC ID .....:	2ARDN0615E
Rating(s) .....:	5 Vdc

Report

Tested by (name + signature) .....:	G. Gandini	.....
Approved by (name + signature) .....:	R. Beghetto	.....

CMC Centro Misure Compatibilità S.r.l.

1 Summary

1 Summary 2
2 Reference standard 3
3 List of attachments 3
4 Deviation(s) from test specification 3
5 Testing location 3
6 General description of test item(s) 5
6.1 Photos of the test item 6
7 Verdict summary section 7
8 Test conditions 9
8.1 General 9
9 Test results 10
9.1 Radiated emissions 10

CMC Centro Misure Compatibilità S.r.l.

2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2018	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

CMC Centro Misure Compatibilità S.r.l.

Testing and sampling:	
Date of receipt of test item	07.01.2020
Testing start date	11.02.2020
Testing end date	14.02.2020
Sampling procedure	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification	Adhesive label with the product number P200004
General remarks:	
This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. "(see appended table)": refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
☒ Indicates that the listed condition, standard or equipment is applicable for this report. ☐ Indicates that the listed condition, standard or equipment is not applicable for this report.	

CMC Centro Misure Compatibilità S.r.l.

6 General description of test item(s)

Description .....:	NFC/BLE (Gymkit) 5V RS232 board						
Model Number .....:	0615G						
FCC ID .....:	2ARDN0615E						
Serial Number.....:	--						
Brand name .....:	Elettronica GF						
Nominal frequency.....:	13,56 MHz						
Rated power supply.....:		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	☐	AC:	☐	☐	☐	☐	☐
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: 5 V					☐
General mounting position.....:	☐	Table top equipment					
	☐	Wall/ceiling mounted equipment					
	☒	Floor standing equipment					
	☐	Hand-held equipment					
Type of equipment.....:	☒	Transmitter unit					
	☐	Receiver unit					
Type of station .....:	☒	Fixed station					
	☐	Portable station					
	☐	Mobile station					
Operating modes .....:	No.	Operating mode of test item					
	1	TX mode, continuous transmission at 13,56 MHz					

CMC Centro Misure Compatibilità S.r.l.

6.1 Photos of the test item

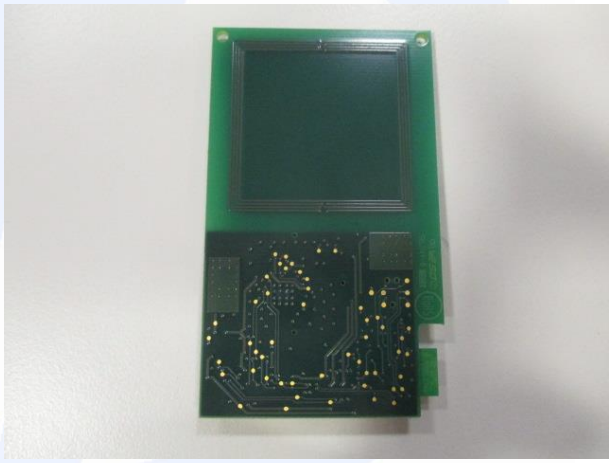

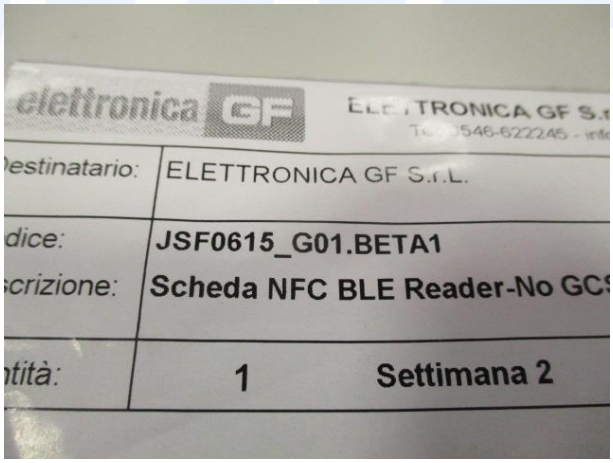

CMC Centro Misure Compatibilità S.r.l.

7 Verdict summary section

FCC Rules & Regulations, Title 47:2018 Part 15 paragraph(s): 209			
Clause	**Requirement – Test case**	**Basic standard**	**Verdict**
Part 15.209	Radiated emissions	ANSI C63.10	**P**

CMC Centro Misure Compatibilità S.r.l.

Normative references	
Reference no.	***Description***
FCC Rules and Regulation Title 47 part 15:2018	--
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

CMC Centro Misure Compatibilità S.r.l.

8 Test conditions

8.1 General

<table>
<tr><td rowspan="4">Environmental reference conditions.....:</td><td colspan="3">The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.
The climatic conditions during the tests were within the following limits:</td></tr>
<tr><td>Temperature</td><td>Humidity</td><td>Atmospheric pressure</td></tr>
<tr><td>15 °C – 35 °C</td><td>30 % - 60 %</td><td>800 hPa – 1060 hPa</td></tr>
<tr><td colspan="3">If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.</td></tr>
<tr><td>Measurement uncertainties .....:</td><td colspan="3">Attachment 1</td></tr>
</table>

CMC Centro Misure Compatibilità S.r.l.

9 Test results

9.1 Radiated emissions

Tested by ..... :	G. Gandini	
Test date ..... :	11.02.2020	
Test location (stand) ..... :	Semi-anechoic chamber (CMC A070)	
Reference standards ..... :	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description ..... :	☒	Table top equipment set-up (80 cm above the reference ground plane)
	☐	Floor standing equipment set-up (insulating material up to 12 mm thick)
	☐	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description ..... :	--	
Test method applied ..... :	☒	SAC with measurement distance [m]: 10
Supplementary information..... :	According to KDB 414788 D01 chapter 2, emissions at frequencies below 30 MHz have been evaluated on 10 m SAC test site. As demonstrated on document “Test site correlation” date 28.03.2019, results of tests on SAC10 are slightly higher than the results of tests on OATS test site (+1 dB at 10 m and +4,2 dB at 3 m). The evaluation has been performed at both 10 and 3 m distance and at both 125 kHz and 13,56 MHz frequency	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands (f < 1000 MHz)		
Frequency range (MHz)	*Test distance (m)*	*Limits [dB(µV/m)]*
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands (f ≥ 1000 MHz)			
Frequency (MHz)	*Test distance (m)*	*AV limits [dB(µV/m)]*	*Peak limits [dB(µV/m)]*
> 1000	3	54	74

CMC Centro Misure Compatibilità S.r.l.

The restricted frequency bands are listed in the following table

MHz	***MHz***	***MHz***	***GHz***
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

CMC Centro Misure Compatibilità S.r.l.

Test setup

Frequency ≤ 30 MHz

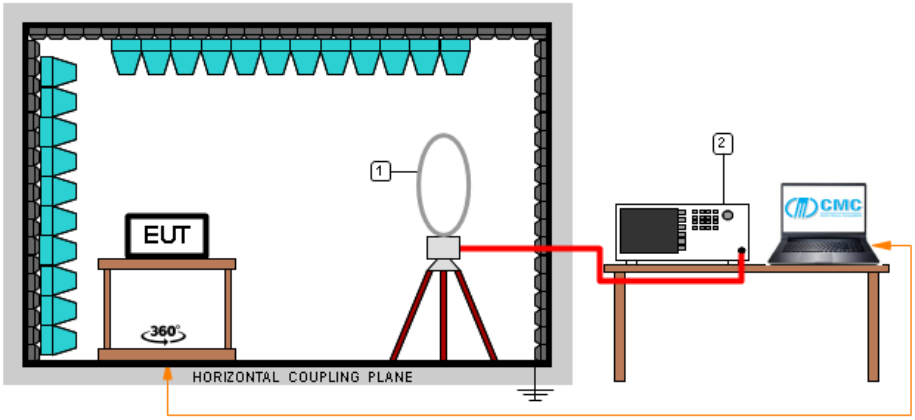

Test setup PE004_01				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Frequency ≤ 1 GHz

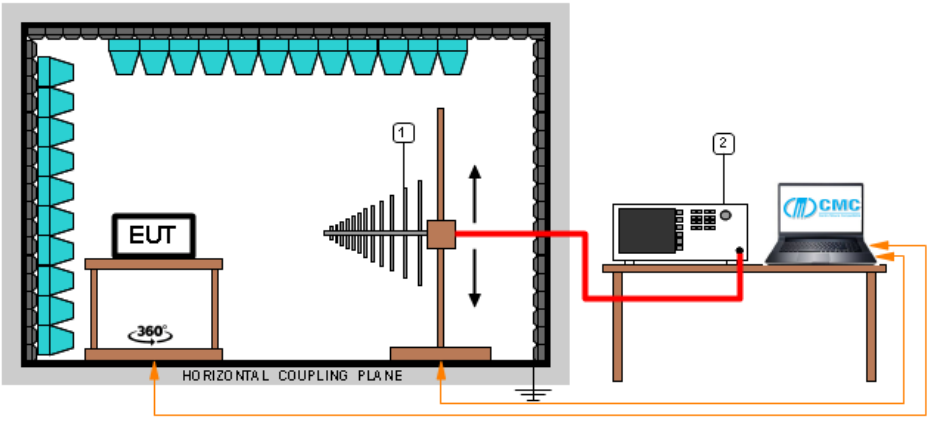

Test setup PE004_02				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03				
Nr.	*Id. Number*	*Manufacturer*	*Model*	*Description*
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

CMC Centro Misure Compatibilità S.r.l.

Result

Polarization	*Frequency Range (MHz)*	*Graphs*	*Remarks*	*Result*
V	300 – 1000	G20001001	--	P
H	300 – 1000	G20001002	--	P
H	30 – 300	G20001003	--	P
V	30 – 300	G20001004	--	P
Loop	0,009 – 30	G20001005	--	P
		G20001006		

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels.
Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor 40log(test distance/10) based on the measuring distance provided by the standard.
Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor 20log(test distance/10) based on the measuring distance provided by the standard.
Peaks above the limits are caused by the nominal transmitting frequency and its harmonics

Graphs Legend
PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X

CMC Centro Misure Compatibilità S.r.l.

Graphs

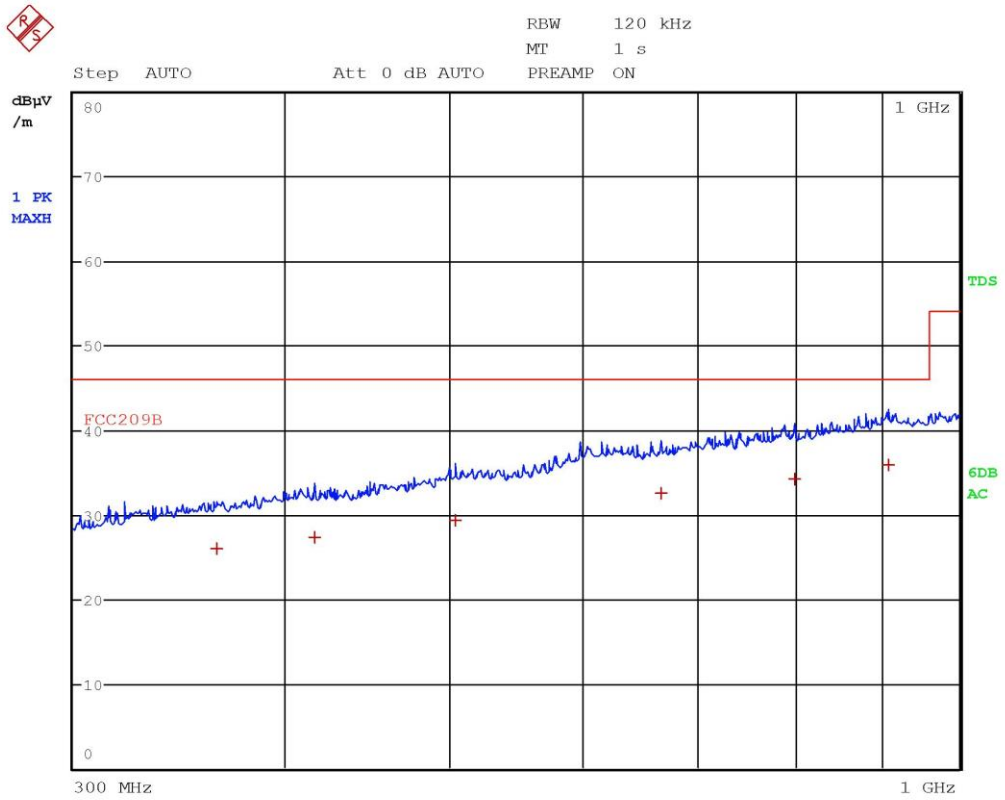

Gandini 20001001

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	364.16 MHz	25.93	-20.08
1 Quasi Peak	416.44 MHz	27.25	-18.76
1 Quasi Peak	504.56 MHz	29.38	-16.63
1 Quasi Peak	666.44 MHz	32.47	-13.54
1 Quasi Peak	800.12 MHz	34.12	-11.89
1 Quasi Peak	908.48 MHz	35.84	-10.17

Gandini 20001001

CMC Centro Misure Compatibilità S.r.l.

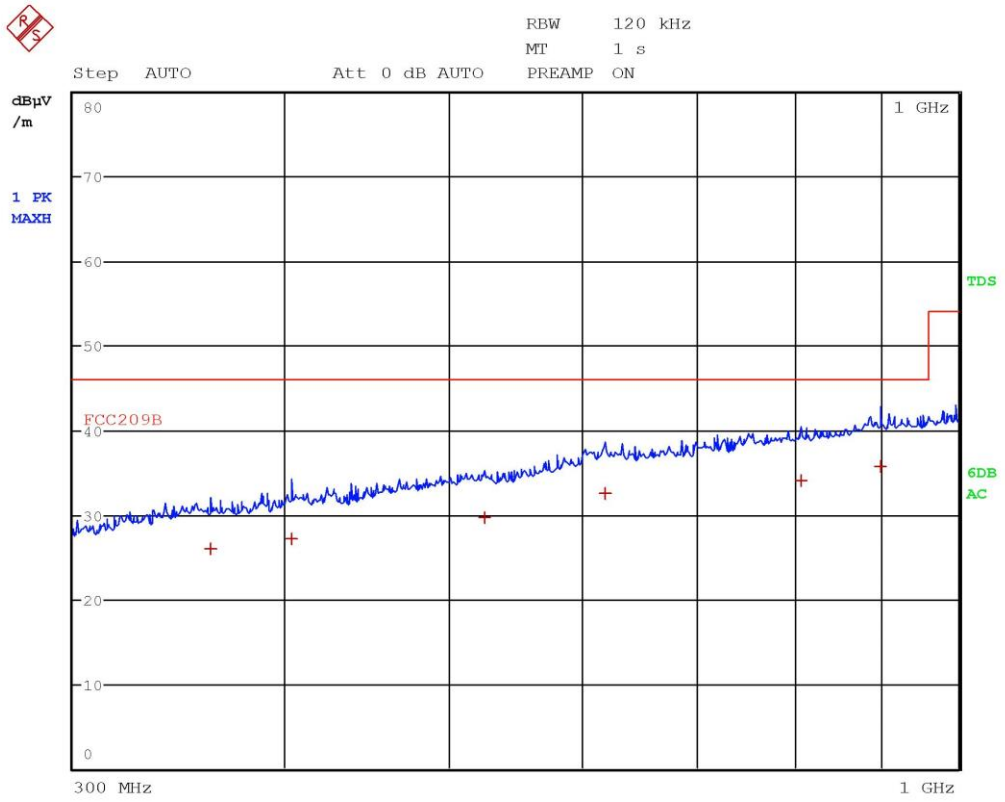

Gandini 20001002

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	361.4 MHz	26.02	-19.99
1 Quasi Peak	403.52 MHz	27.19	-18.82
1 Quasi Peak	525 MHz	29.70	-16.31
1 Quasi Peak	619 MHz	32.46	-13.55
1 Quasi Peak	807.36 MHz	34.11	-11.90
1 Quasi Peak	899.44 MHz	35.78	-10.23

Gandini 20001002

CMC Centro Misure Compatibilità S.r.l.

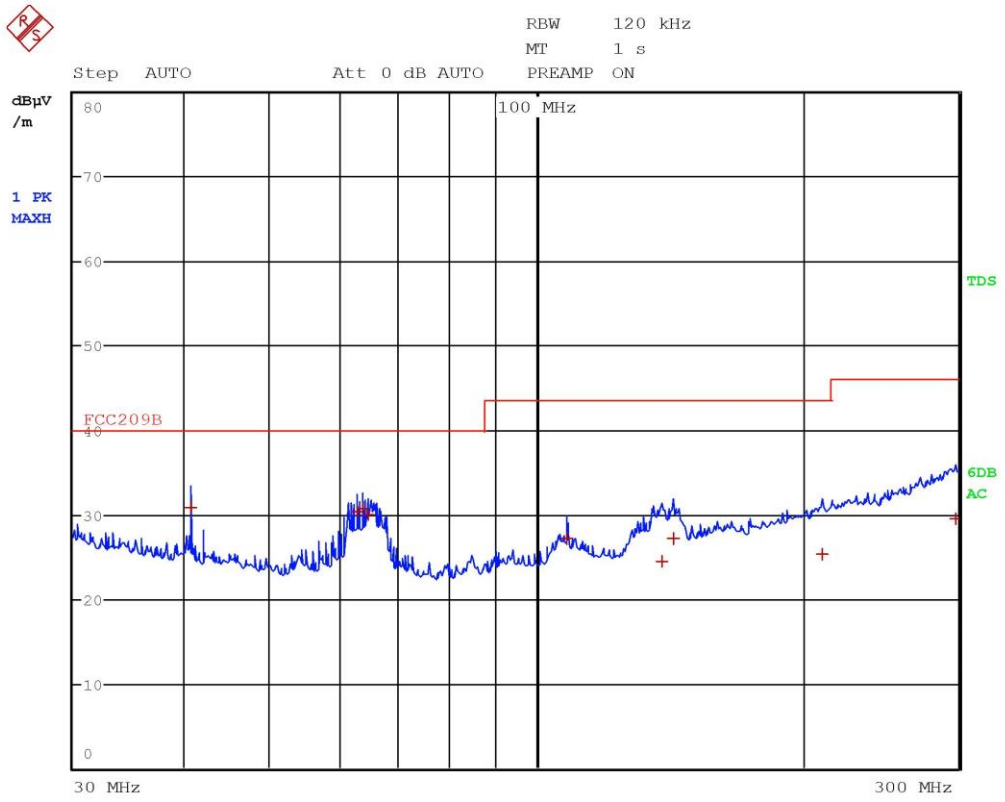

Gandini 20001002

CMC Centro Misure Compatibilità S.r.l.

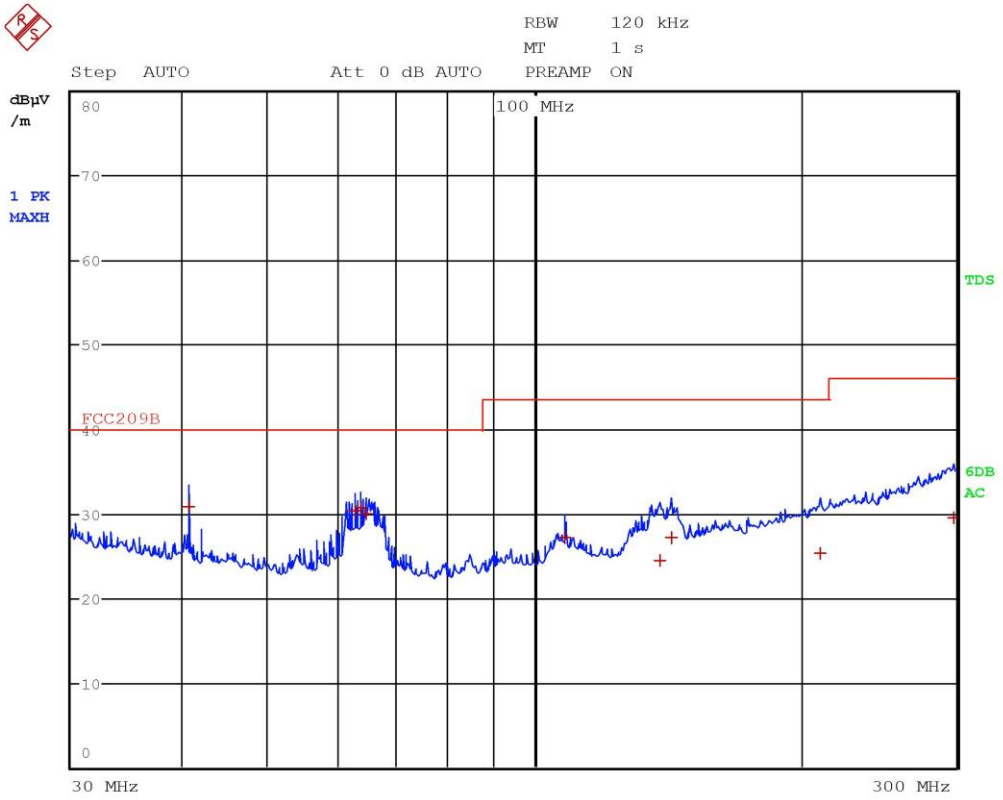

Gandini 20001004

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209B
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	40.68 MHz	30.76	-9.23
1 Quasi Peak	62.72 MHz	30.34	-9.65
1 Quasi Peak	63.68 MHz	30.70	-9.29
1 Quasi Peak	64.68 MHz	29.94	-10.05
1 Quasi Peak	108.48 MHz	27.16	-16.35
1 Quasi Peak	138.68 MHz	24.43	-19.08
1 Quasi Peak	143.04 MHz	27.10	-16.41
1 Quasi Peak	210.52 MHz	25.24	-18.27
1 Quasi Peak	297.88 MHz	29.54	-16.47

Gandini 20001004

CMC Centro Misure Compatibilità S.r.l.

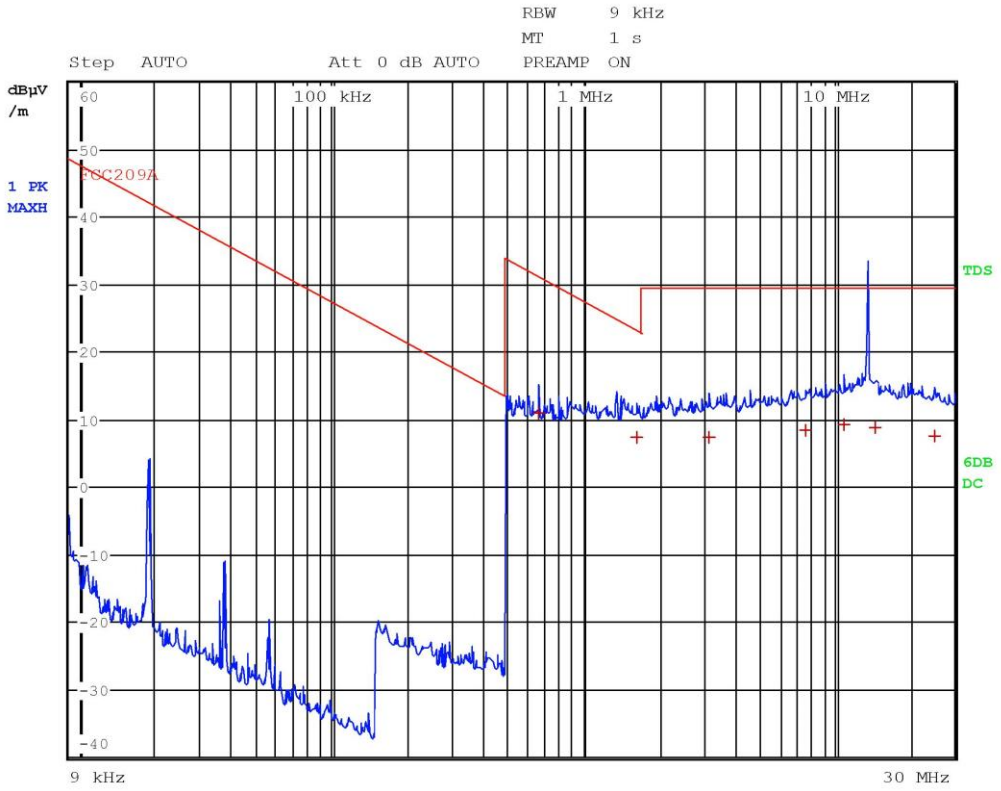

Gandini 20001005

CMC Centro Misure Compatibilità S.r.l.

PEAK FREQUENCY
4

EDIT PEAK LIST (Final Measurement Results)

Trace1:	FCC209A
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	658 kHz	10.92	-20.31
1 Quasi Peak	1.622 MHz	7.36	-16.04
1 Quasi Peak	3.154 MHz	7.28	-22.25
1 Quasi Peak	7.67 MHz	8.40	-21.13
1 Quasi Peak	10.866 MHz	9.22	-20.31
1 Quasi Peak	14.476 MHz	8.77	-20.76
1 Quasi Peak	25.1 MHz	7.62	-21.91

Gandini 20001005

CMC Centro Misure Compatibilità S.r.l.

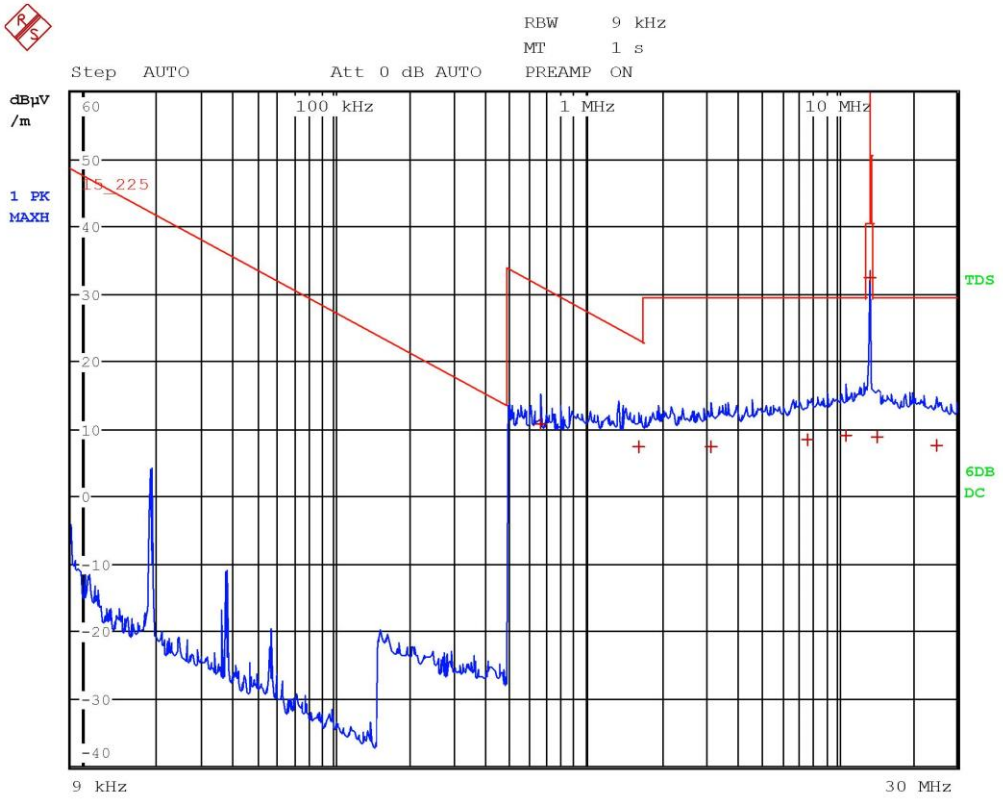

Gandini 20001006

CMC Centro Misure Compatibilità S.r.l.

EDIT PEAK LIST (Final Measurement Results)

Trace1:	15_225
Trace2:	---
Trace3:	---

TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	658 kHz	10.80	-20.43
1 Quasi Peak	1.622 MHz	7.28	-16.11
1 Quasi Peak	3.154 MHz	7.33	-22.21
1 Quasi Peak	7.67 MHz	8.32	-21.21
1 Quasi Peak	10.866 MHz	9.05	-20.48
1 Quasi Peak	13.5607948718 MHz	32.41	-51.59
1 Quasi Peak	14.476 MHz	8.75	-20.78
1 Quasi Peak	25.1 MHz	7.56	-21.97

Gandini 20001006

CMC Centro Misure Compatibilità S.r.l.

Attachment 1

Id. number	*Manufacturer*	*Model*	*Description*	*Serial number*	*Last calibration*	*Due date calibration*
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '20	January '21
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '20	January '21
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '20	January '21
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '20	January '21
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '19	November '20
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '19	November '20
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '19	November '20
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '19	November '20
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '19	November '20
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3Ghz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '19	November '20
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '19	November '22

CMC Centro Misure Compatibilità S.r.l.

Attachment 1

Measurement uncertainty

Test	*Test Setup*	*Expanded uncertainty*	*Note*
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonic current emissions test	PE006_01	10 mA + 2,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,8 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1

CMC Centro Misure Compatibilità S.r.l.

Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EiRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EiRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	< 1x10-7	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10-7	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillotary immunity test	PE113_01		2
Rev_20_01 date 16/01/2020			

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of K=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2

CMC Centro Misure Compatibilità S.r.l.

Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual)	Measurement uncertainty calculation

CMC Centro Misure Compatibilità S.r.l.