


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

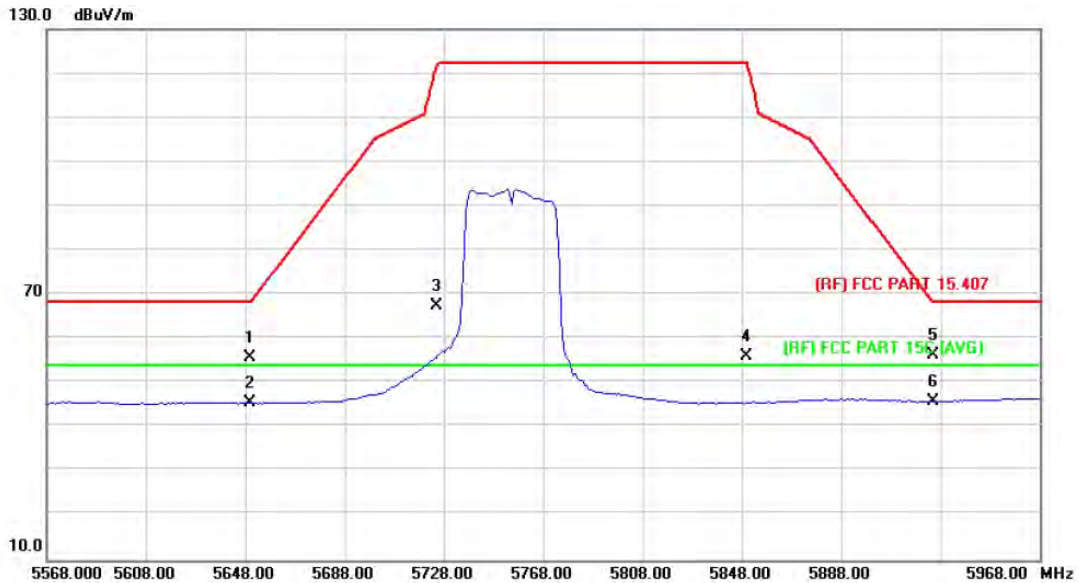


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	40.24	15.65	55.89	68.30	-12.41	peak
2		5650.000	29.86	15.65	45.51	54.00	-8.49	AVG
3		5725.000	51.52	15.88	67.40	122.30	-54.90	peak
4		5850.000	39.72	16.27	55.99	122.30	-66.31	peak
5		5925.000	39.71	16.49	56.20	68.30	-12.10	peak
6	*	5925.000	29.32	16.49	45.81	54.00	-8.19	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

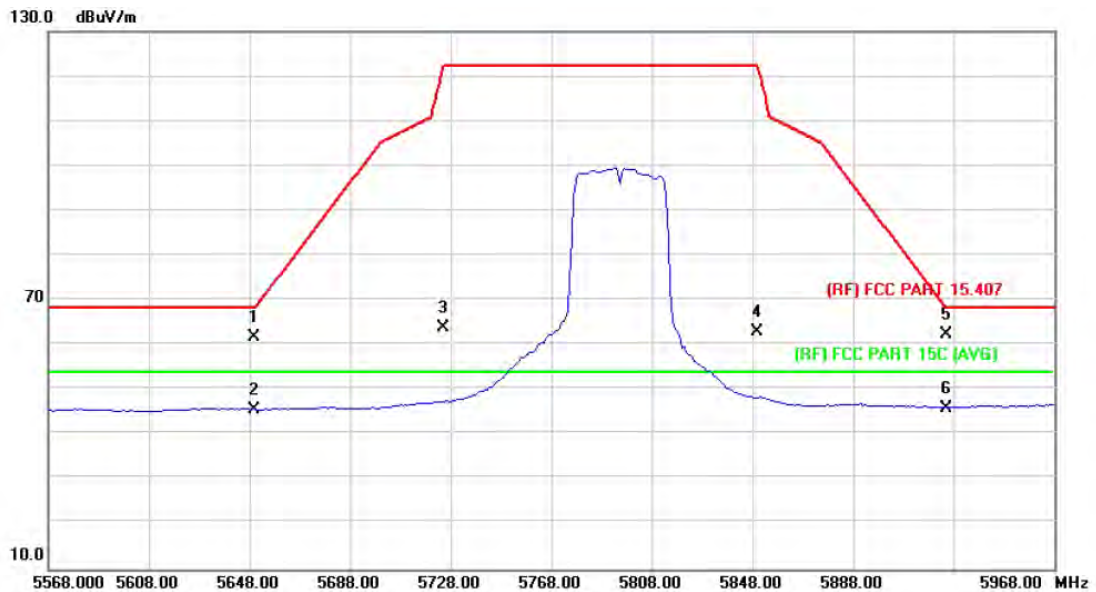


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.08	15.65	61.73	68.30	-6.57	peak
2		5650.000	29.95	15.65	45.60	54.00	-8.40	AVG
3		5725.000	47.90	15.88	63.78	122.30	-58.52	peak
4		5850.000	46.74	16.27	63.01	122.30	-59.29	peak
5	*	5925.000	45.99	16.49	62.48	68.30	-5.82	peak
6		5925.000	29.43	16.49	45.92	54.00	-8.08	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

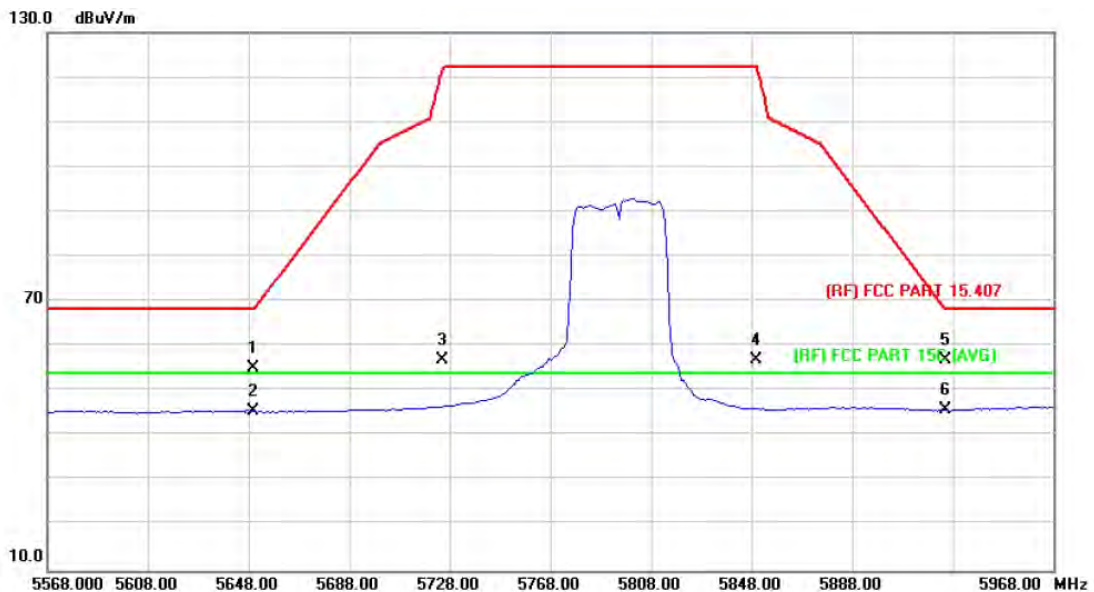


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	39.51	15.65	55.16	68.30	-13.14	peak
2		5650.000	29.80	15.65	45.45	54.00	-8.55	AVG
3		5725.000	41.04	15.88	56.92	122.30	-65.38	peak
4		5850.000	40.62	16.27	56.89	122.30	-65.41	peak
5		5925.000	40.34	16.49	56.83	68.30	-11.47	peak
6	*	5925.000	29.44	16.49	45.93	54.00	-8.07	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

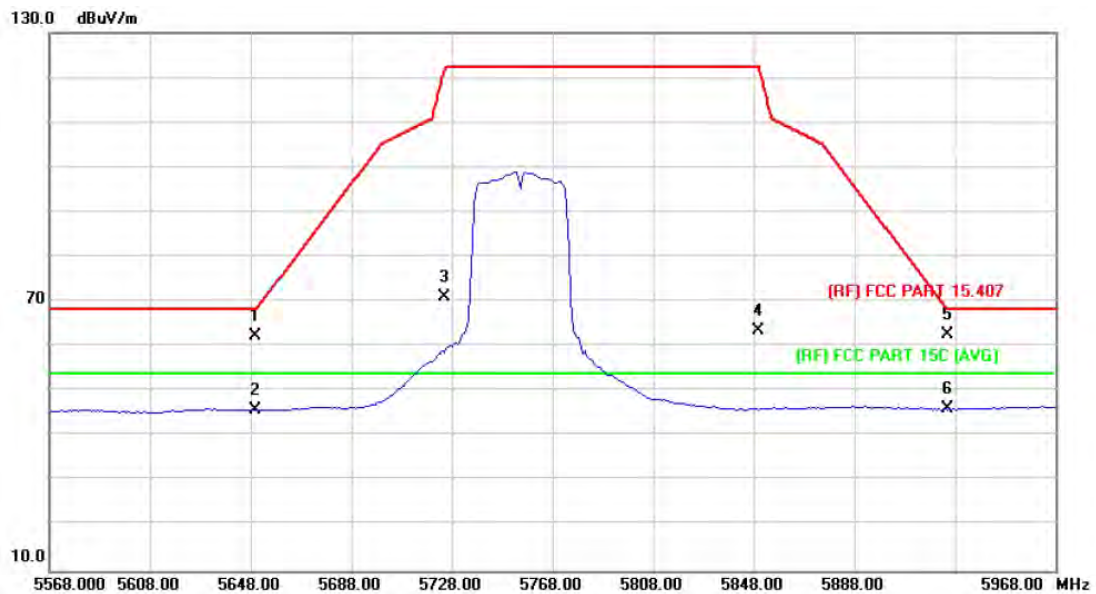


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.62	15.65	62.27	68.30	-6.03	peak
2		5650.000	30.20	15.65	45.85	54.00	-8.15	AVG
3		5725.000	55.04	15.88	70.92	122.30	-51.38	peak
4		5850.000	47.20	16.27	63.47	122.30	-58.83	peak
5	*	5925.000	46.22	16.49	62.71	68.30	-5.59	peak
6		5925.000	29.52	16.49	46.01	54.00	-7.99	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

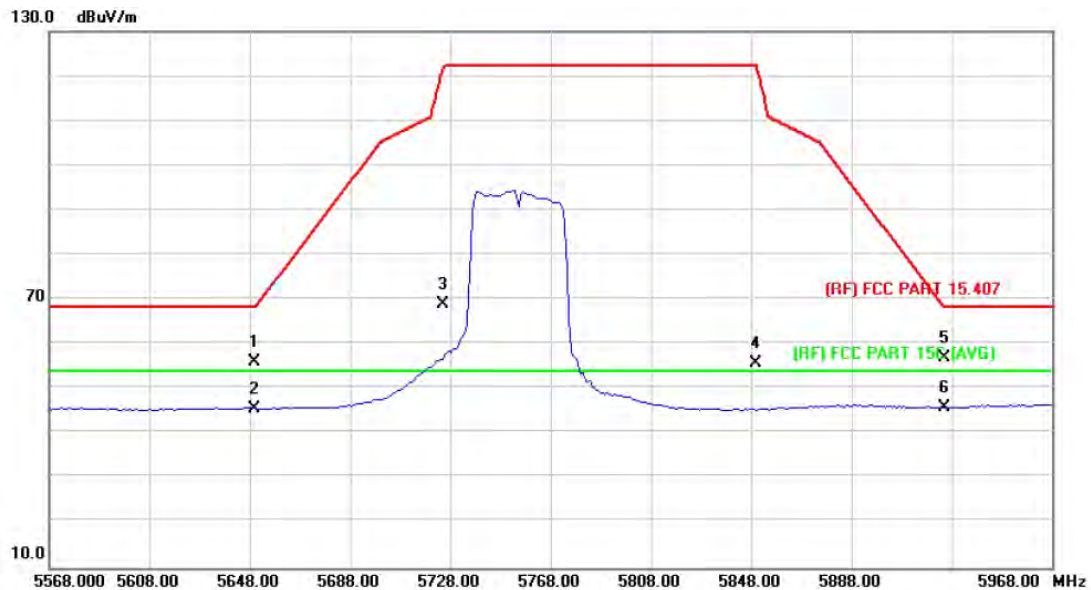


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	40.35	15.65	56.00	68.30	-12.30	peak
2		5650.000	29.89	15.65	45.54	54.00	-8.46	AVG
3		5725.000	53.14	15.88	69.02	122.30	-53.28	peak
4		5850.000	39.41	16.27	55.68	122.30	-66.62	peak
5		5925.000	40.32	16.49	56.81	68.30	-11.49	peak
6	*	5925.000	29.26	16.49	45.75	54.00	-8.25	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

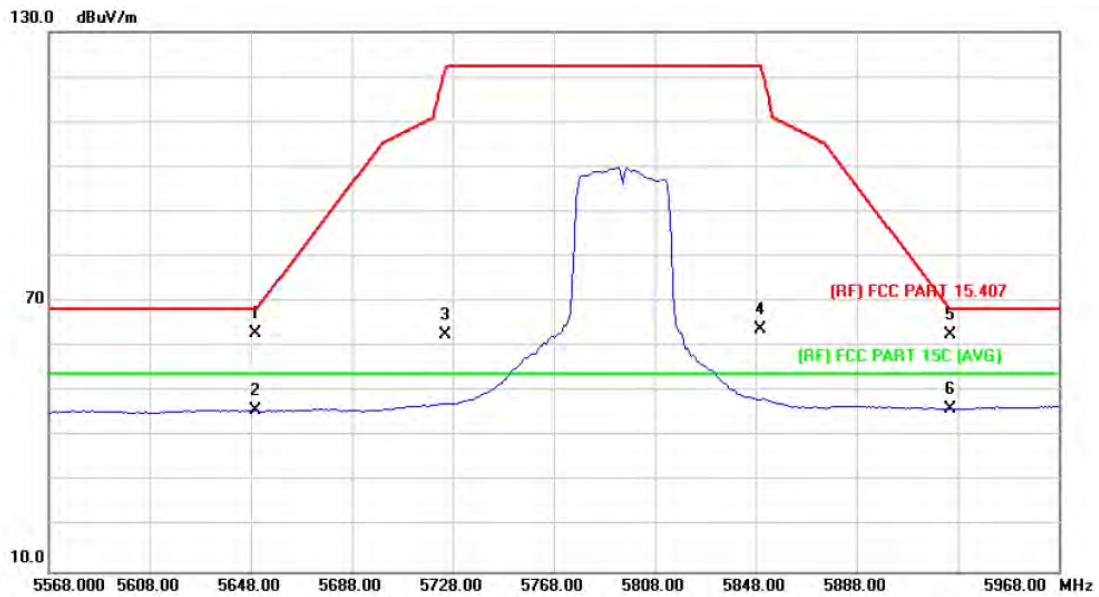


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5650.000	47.39	15.65	63.04	68.30	-5.26	peak
2		5650.000	30.21	15.65	45.86	54.00	-8.14	AVG
3		5725.000	46.65	15.88	62.53	122.30	-59.77	peak
4		5850.000	47.69	16.27	63.96	122.30	-58.34	peak
5		5925.000	46.11	16.49	62.60	68.30	-5.70	peak
6		5925.000	29.69	16.49	46.18	54.00	-7.82	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

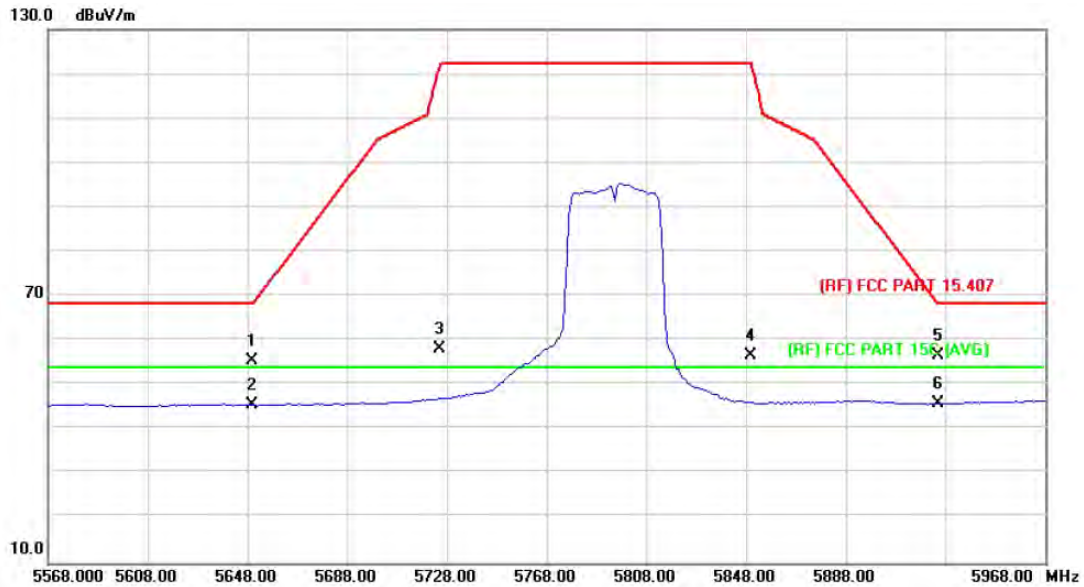


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	39.66	15.65	55.31	68.30	-12.99	peak
2		5650.000	29.99	15.65	45.64	54.00	-8.36	AVG
3		5725.000	42.16	15.88	58.04	122.30	-64.26	peak
4		5850.000	40.45	16.27	56.72	122.30	-65.58	peak
5		5925.000	40.14	16.49	56.63	68.30	-11.67	peak
6	*	5925.000	29.24	16.49	45.73	54.00	-8.27	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

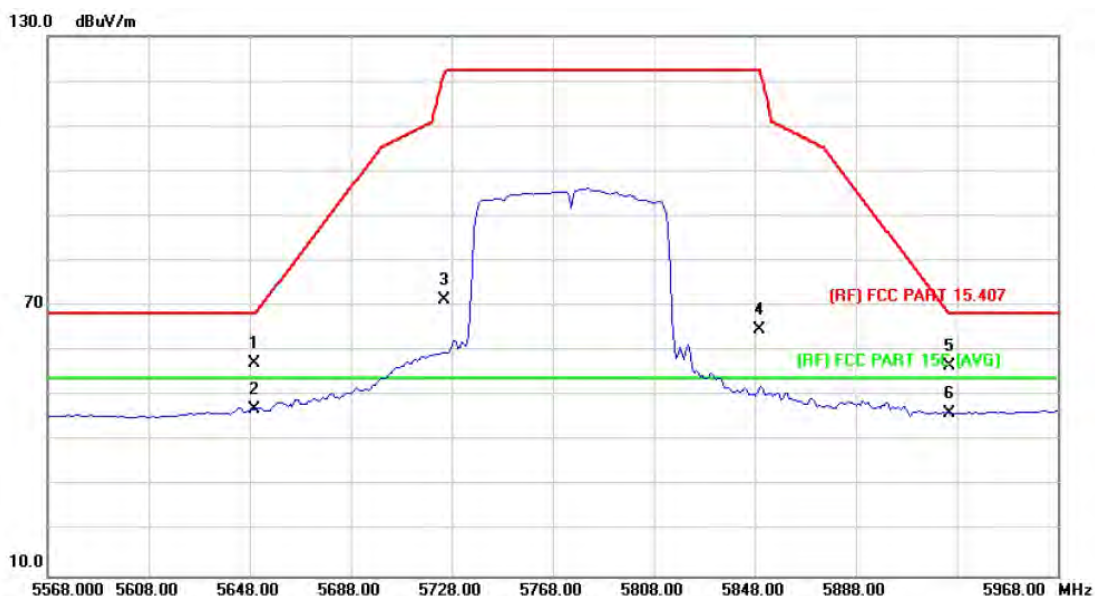


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	41.57	15.65	57.22	68.30	-11.08	peak
2	*	5650.000	31.41	15.65	47.06	54.00	-6.94	AVG
3		5725.000	55.47	15.88	71.35	122.30	-50.95	peak
4		5850.000	48.49	16.27	64.76	122.30	-57.54	peak
5		5925.000	40.18	16.49	56.67	68.30	-11.63	peak
6		5925.000	29.67	16.49	46.16	54.00	-7.84	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

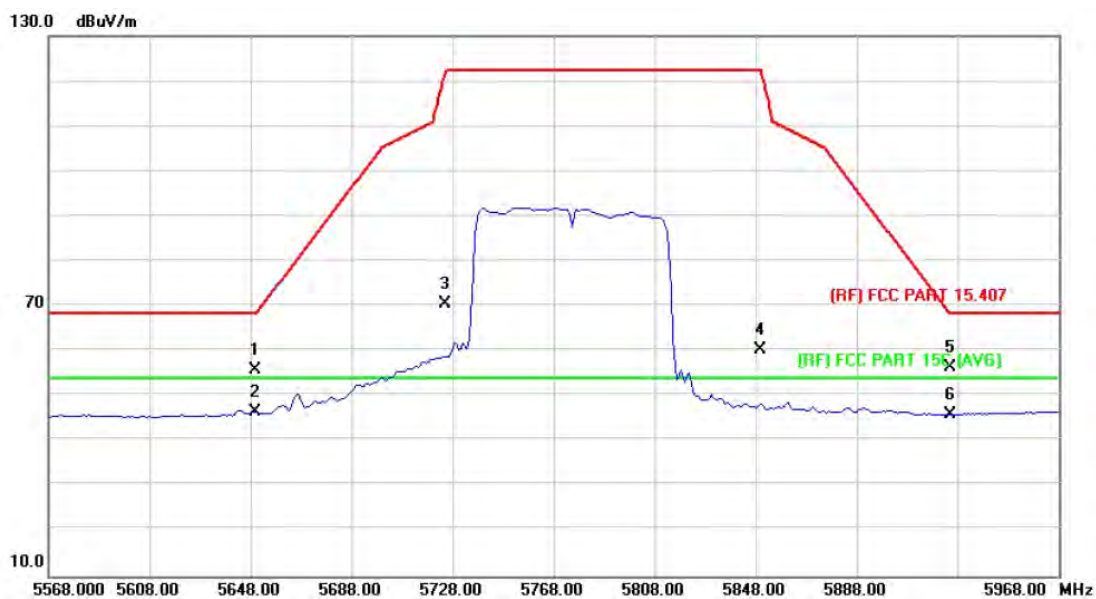

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	40.08	15.65	55.73	68.30	-12.57	peak
2	*	5650.000	30.75	15.65	46.40	54.00	-7.60	AVG
3		5725.000	54.68	15.88	70.56	122.30	-51.74	peak
4		5850.000	44.05	16.27	60.32	122.30	-61.98	peak
5		5925.000	39.85	16.49	56.34	68.30	-11.96	peak
6		5925.000	29.30	16.49	45.79	54.00	-8.21	AVG

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Attachment D--Bandwidth Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-1) Antenna 0		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.78	16.575
40	5200	19.65	16.534
48	5240	19.63	16.515


802.11a Mode

Antenna 0---5180 MHz

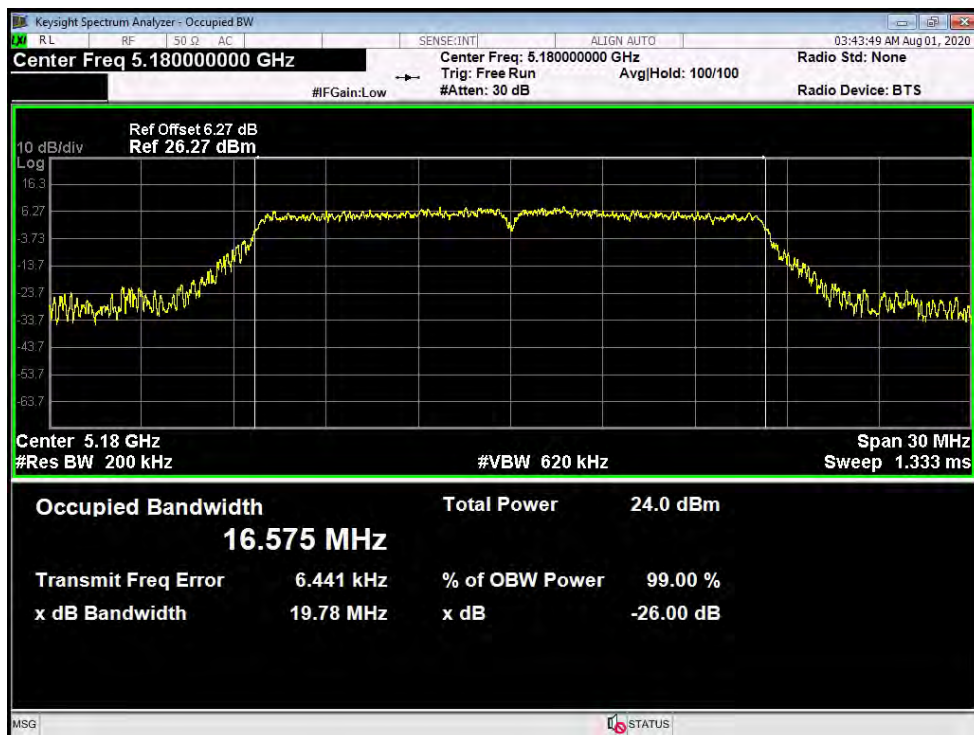


802.11a Mode

Antenna 0---5200 MHz

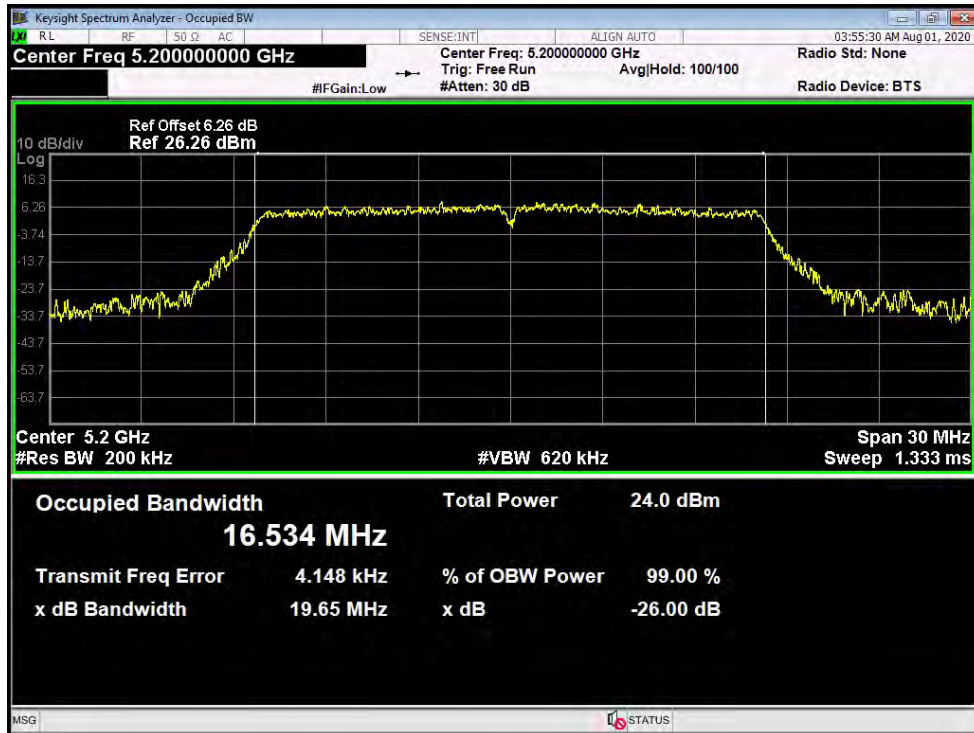

802.11a Mode


Antenna 0---5240 MHz

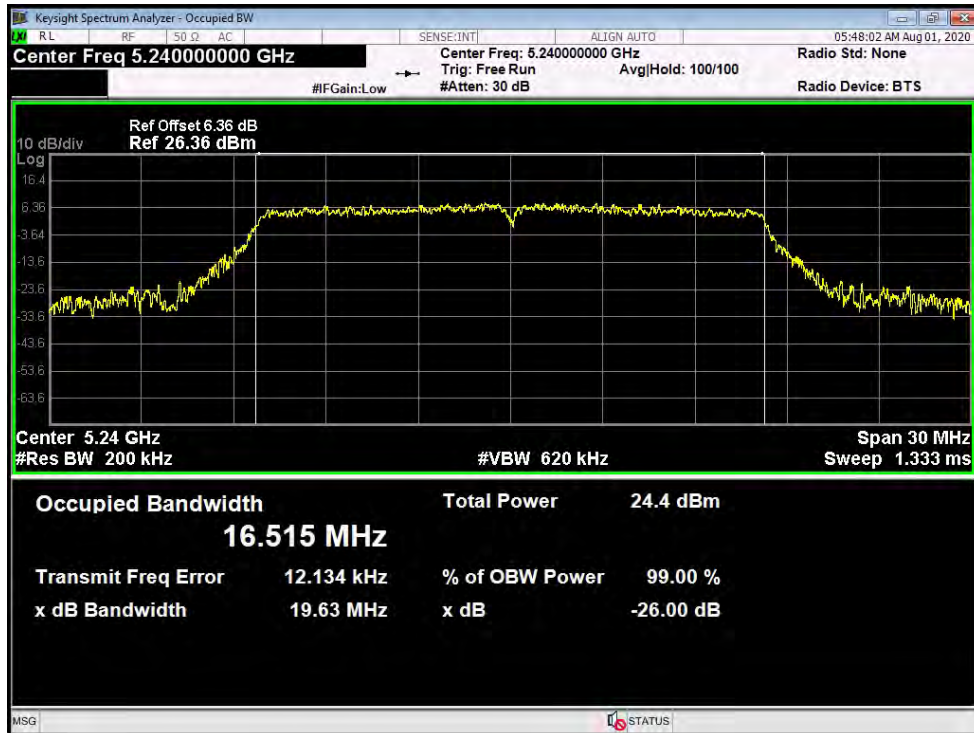

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-1) Antenna 1		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.23	16.567
40	5200	19.40	16.565
48	5240	19.60	16.556


802.11a Mode

Antenna 1---5180 MHz

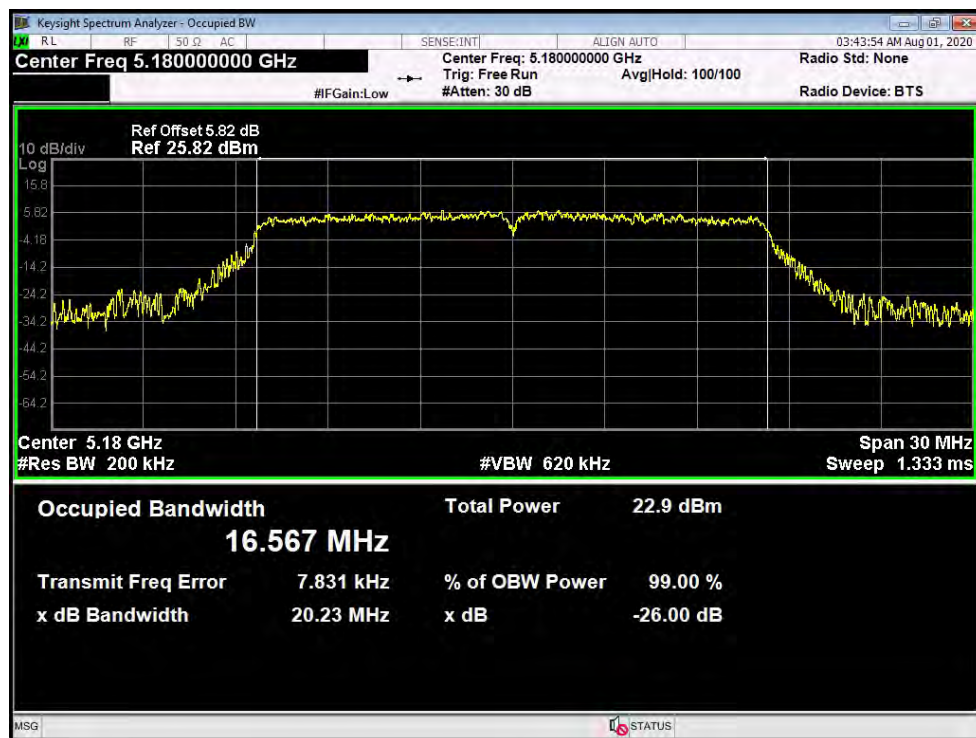


802.11a Mode


Antenna 1---5200 MHz

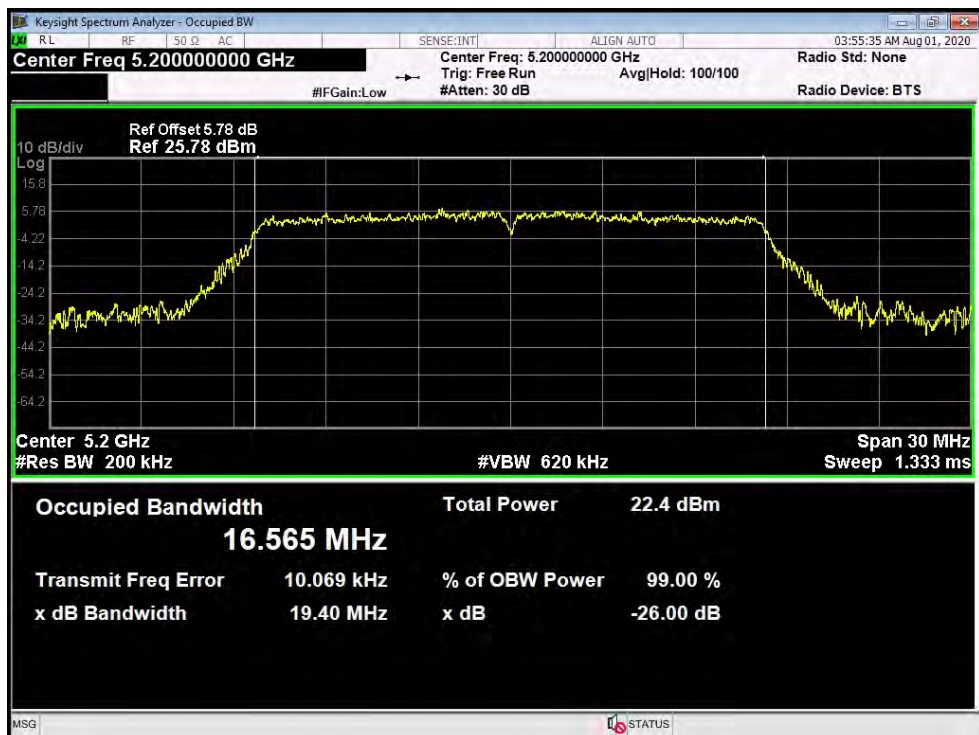

802.11a Mode


Antenna 1---5240 MHz

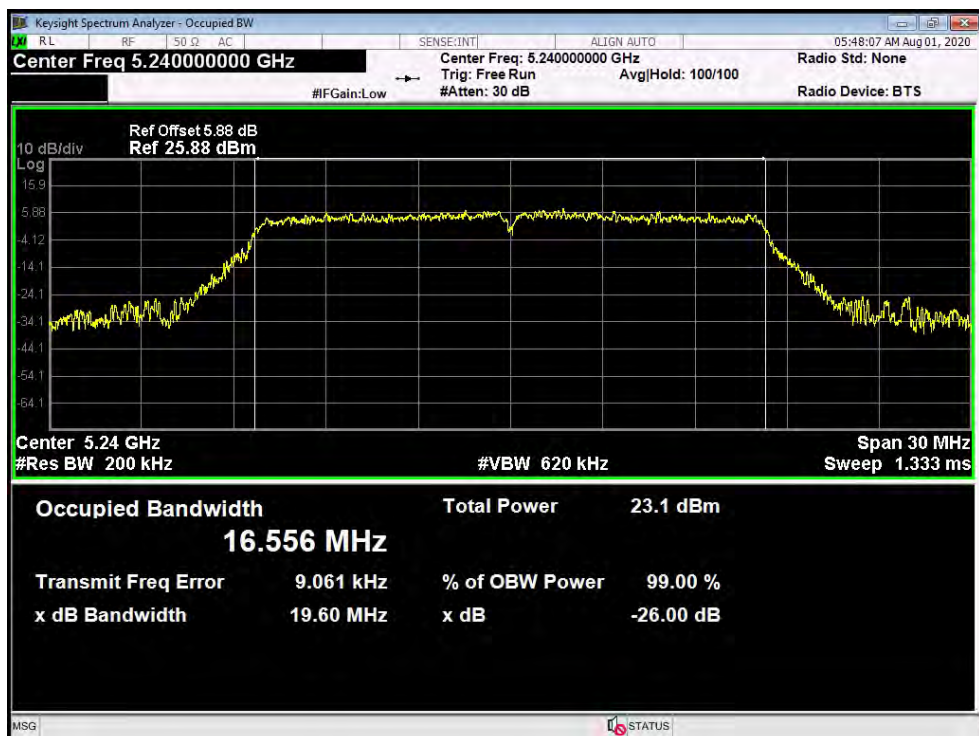

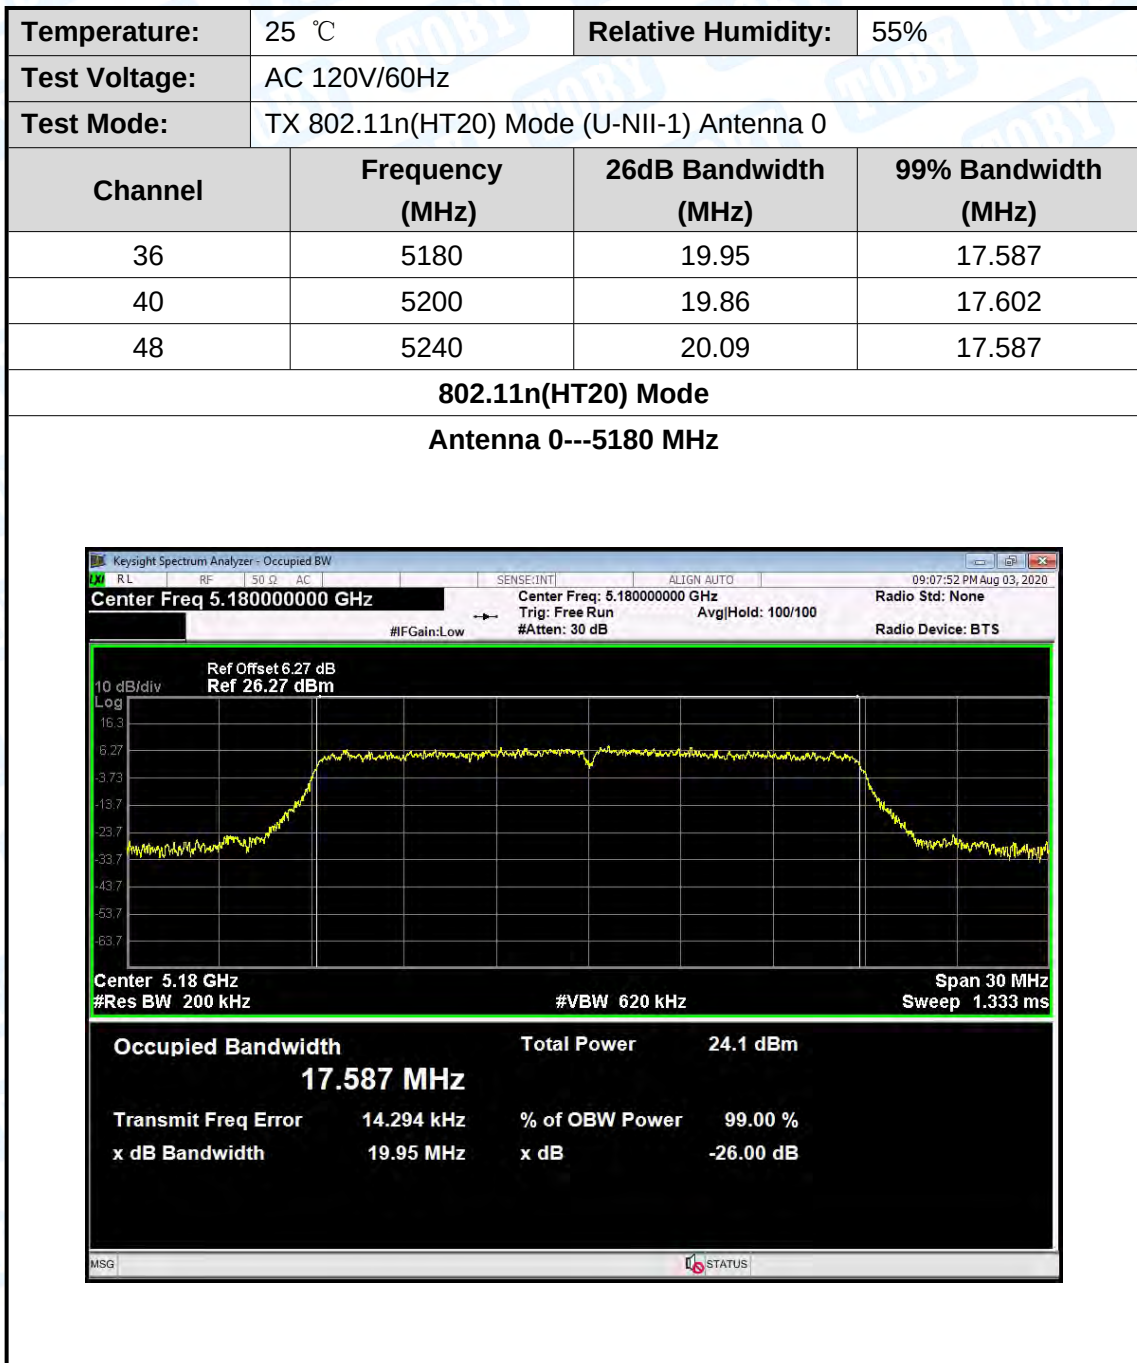


802.11n(HT20) Mode

Antenna 0---5200 MHz

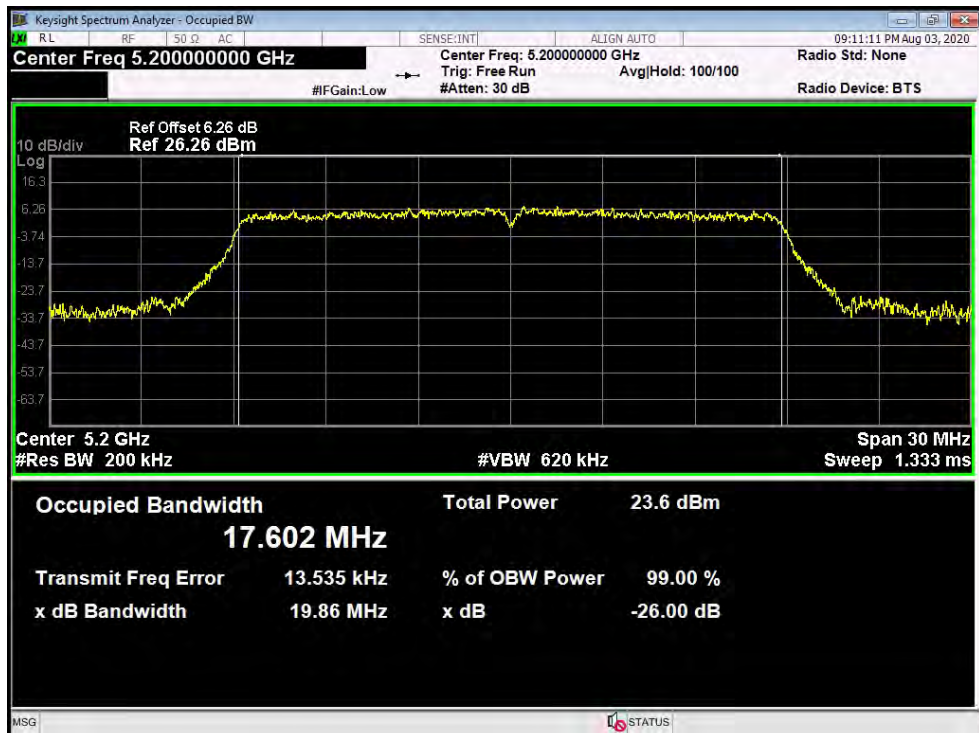

802.11n(HT20) Mode

Antenna 0---5240 MHz

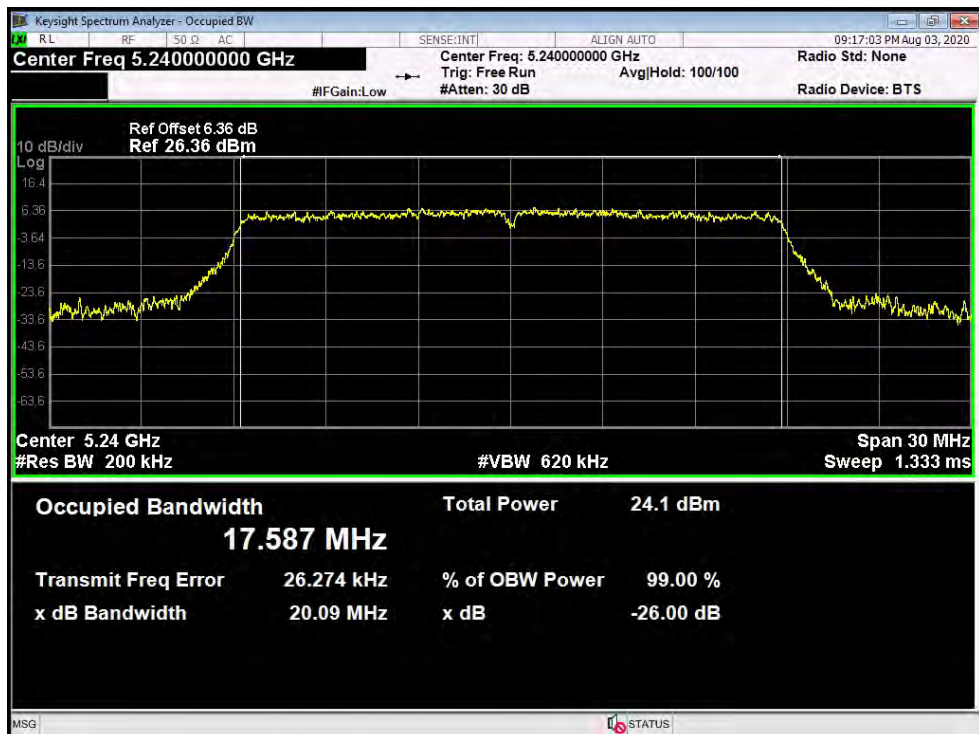

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1) Antenna 1		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.88	17.597
40	5200	20.00	17.612
48	5240	20.11	17.588

802.11n(HT20) Mode			
Antenna 1---5180 MHz			

The screenshot shows a Keysight Spectrum Analyzer interface. The main display is a frequency spectrum plot with a yellow signal trace. The center frequency is 5.180000000 GHz. The occupied bandwidth is 17.597 MHz. The total power is 22.9 dBm. The transmit frequency error is 14.560 kHz. The x dB bandwidth is 19.88 MHz. The % of OBW power is 99.00%. The x dB is -26.00 dB. The span is 30 MHz. The sweep is 1.333 ms. The resolution bandwidth is 200 kHz. The video bandwidth is 620 kHz. The reference offset is 5.82 dB. The reference level is 25.82 dBm. The radio device is BTS. The radio standard is None. The average hold is 100/100. The trigger is Free Run. The attenuation is 30 dB. The sense is INT. The align is AUTO. The time is 09:07:58 PM Aug 03, 2020.

Center Freq 5.180000000 GHz	Center Freq: 5.180000000 GHz	Radio Std: None
#IFGain: Low	Trig: Free Run	Avg/Hold: 100/100
	#Atten: 30 dB	Radio Device: BTS

Ref Offset 5.82 dB
Ref 25.82 dBm

10 dB/div
Log

Center 5.18 GHz
#Res BW 200 kHz

#VBW 620 kHz


Span 30 MHz
Sweep 1.333 ms

Occupied Bandwidth	Total Power	22.9 dBm
17.597 MHz		
Transmit Freq Error	14.560 kHz	% of OBW Power
x dB Bandwidth	19.88 MHz	x dB
		-26.00 dB

MSG STATUS


802.11n(HT20) Mode


Antenna 1---5200 MHz

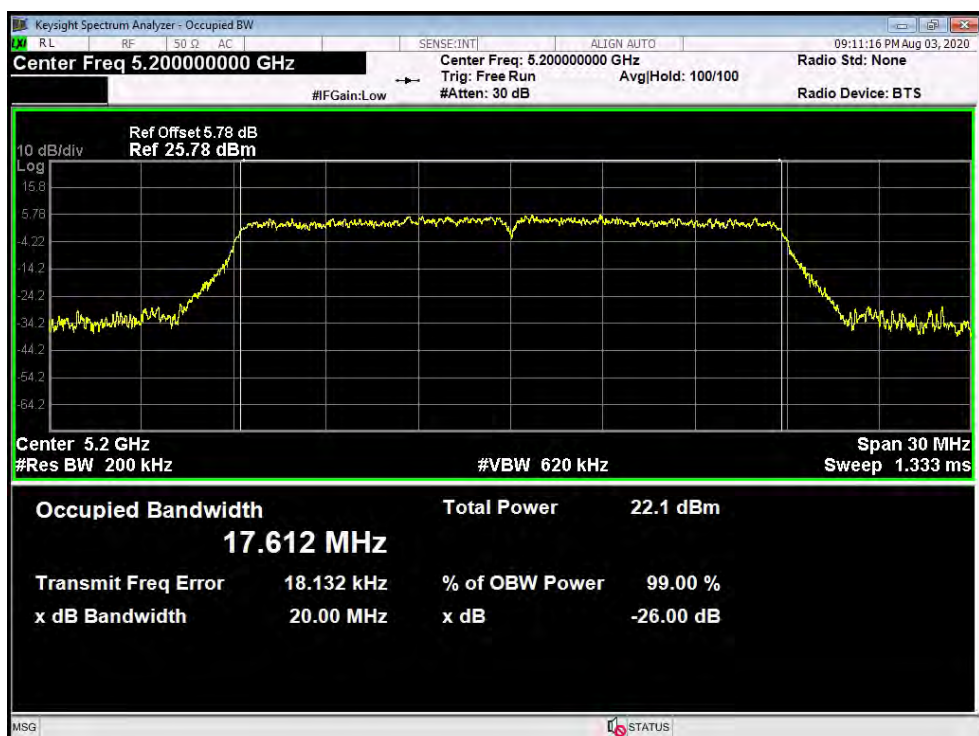

802.11n(HT20) Mode


Antenna 1---5240 MHz

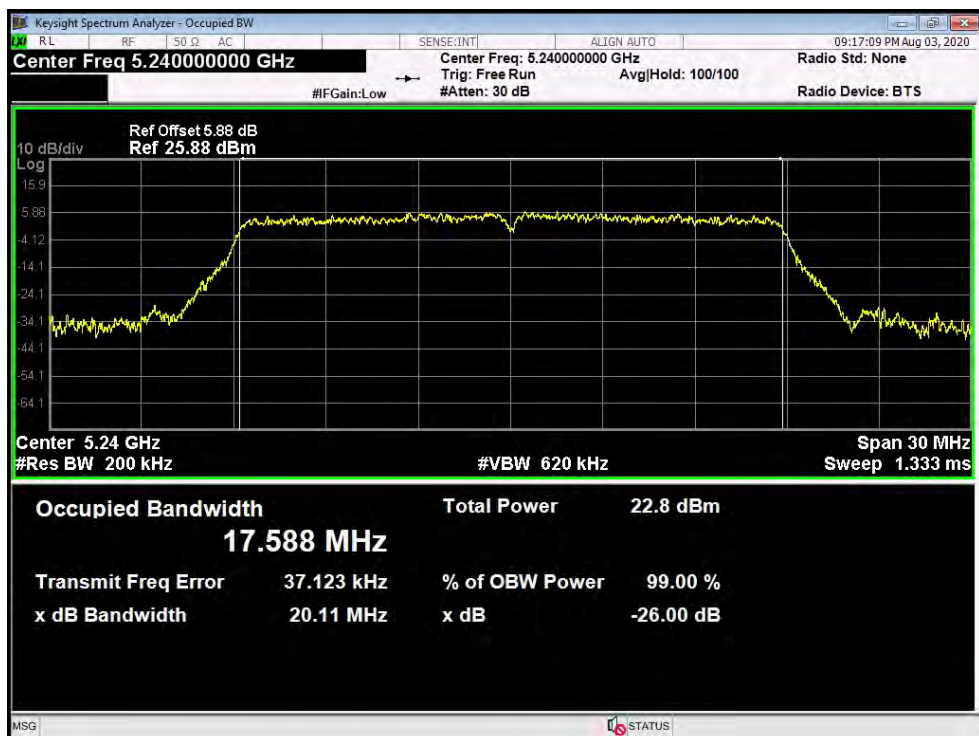

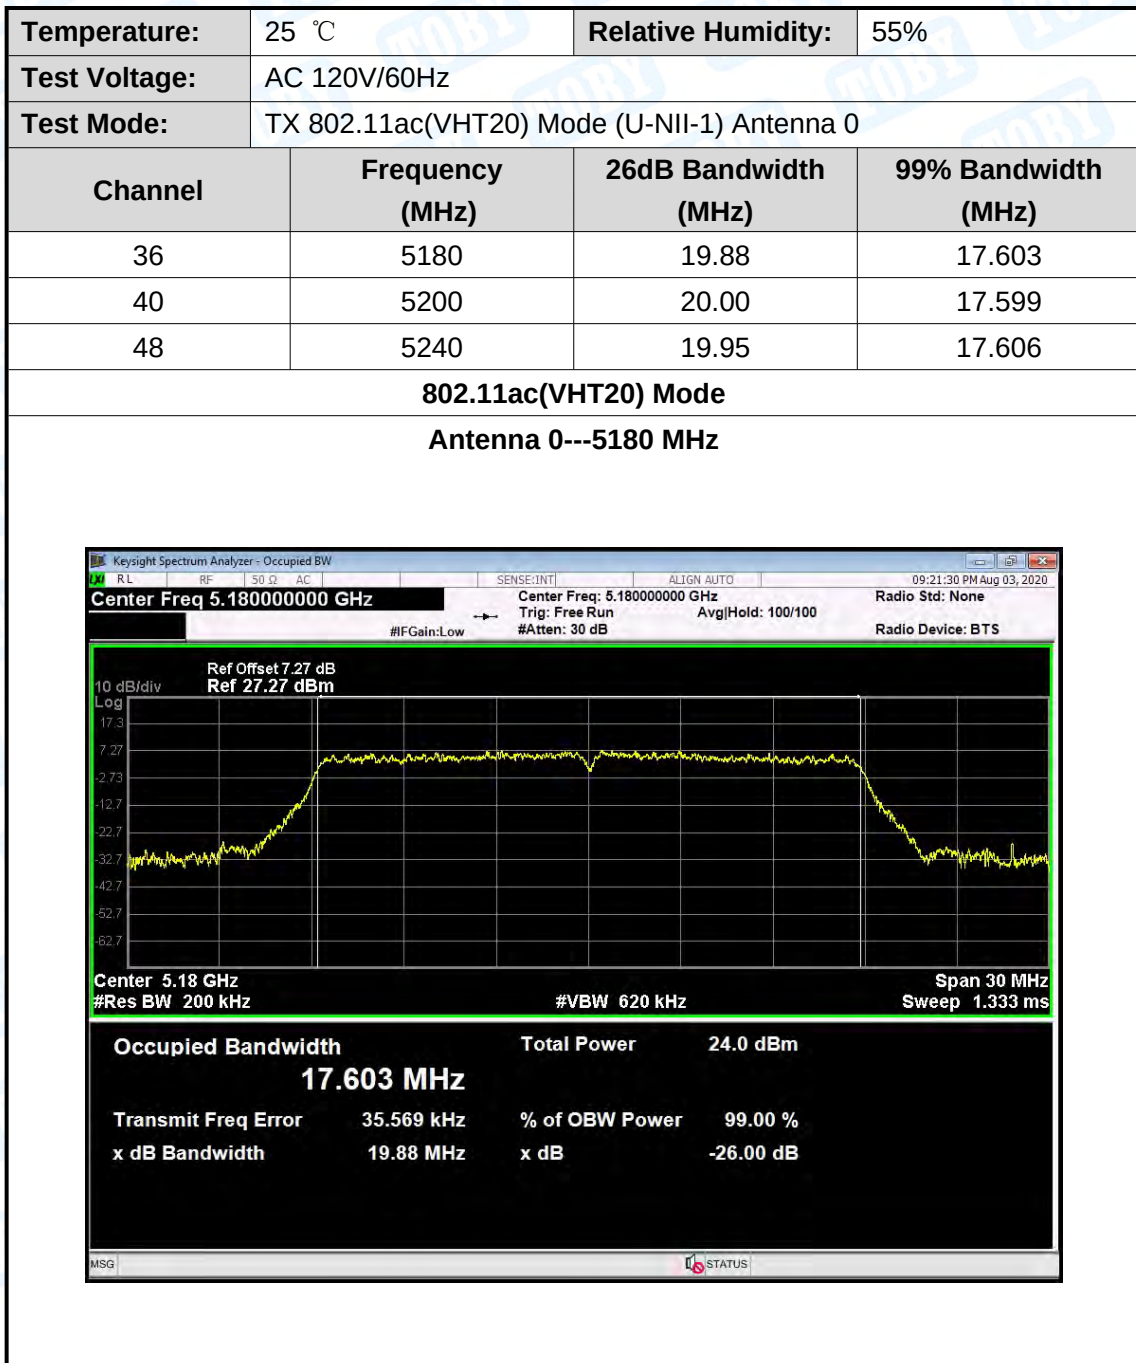


802.11ac(VHT20) Mode


Antenna 0---5200 MHz

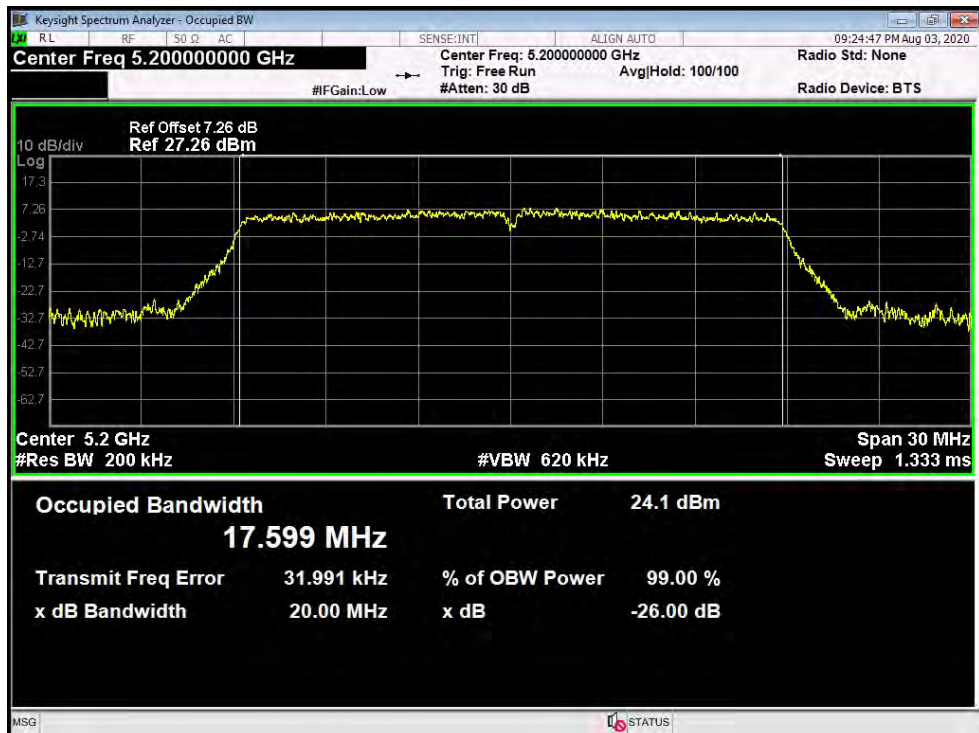

802.11ac(VHT20) Mode


Antenna 0---5240 MHz

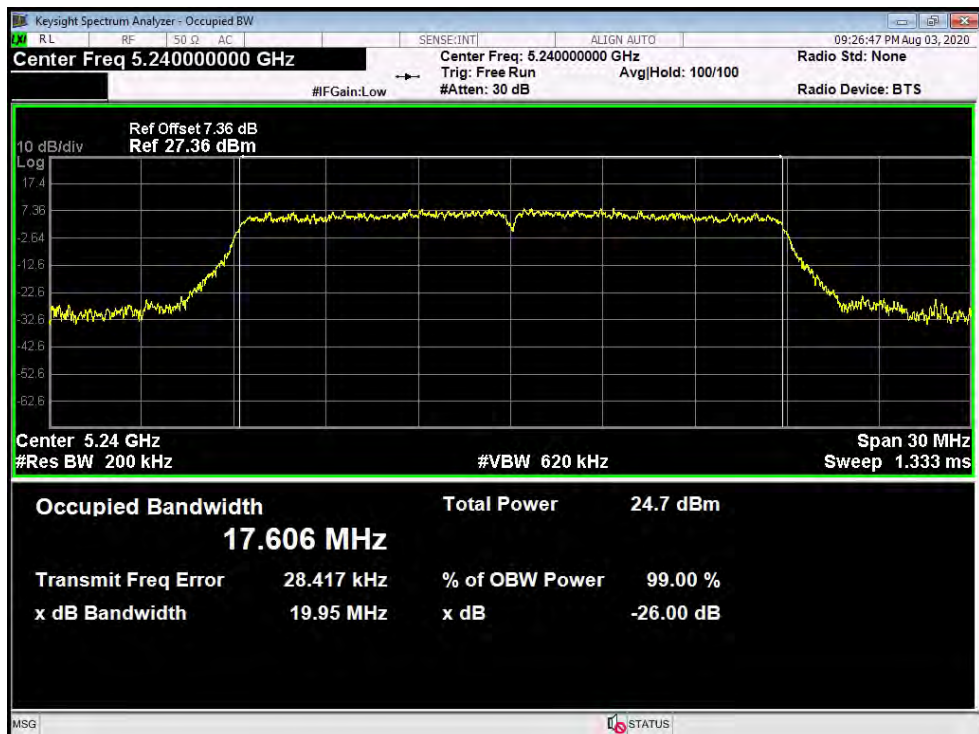

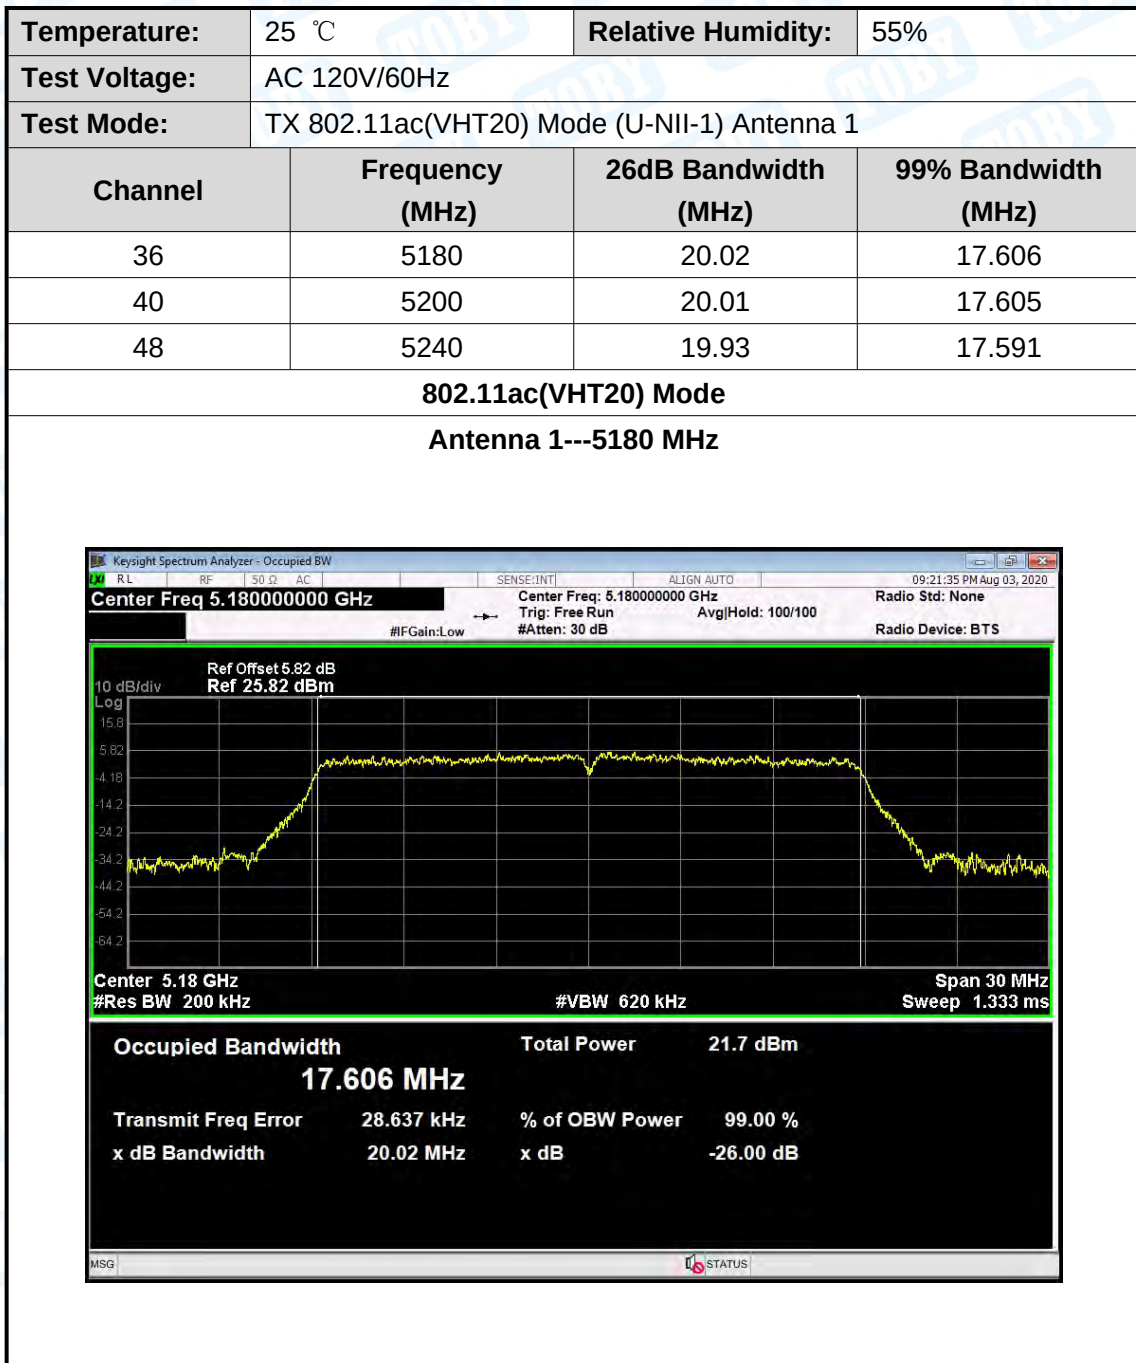


802.11ac(VHT20) Mode

Antenna 1---5200 MHz

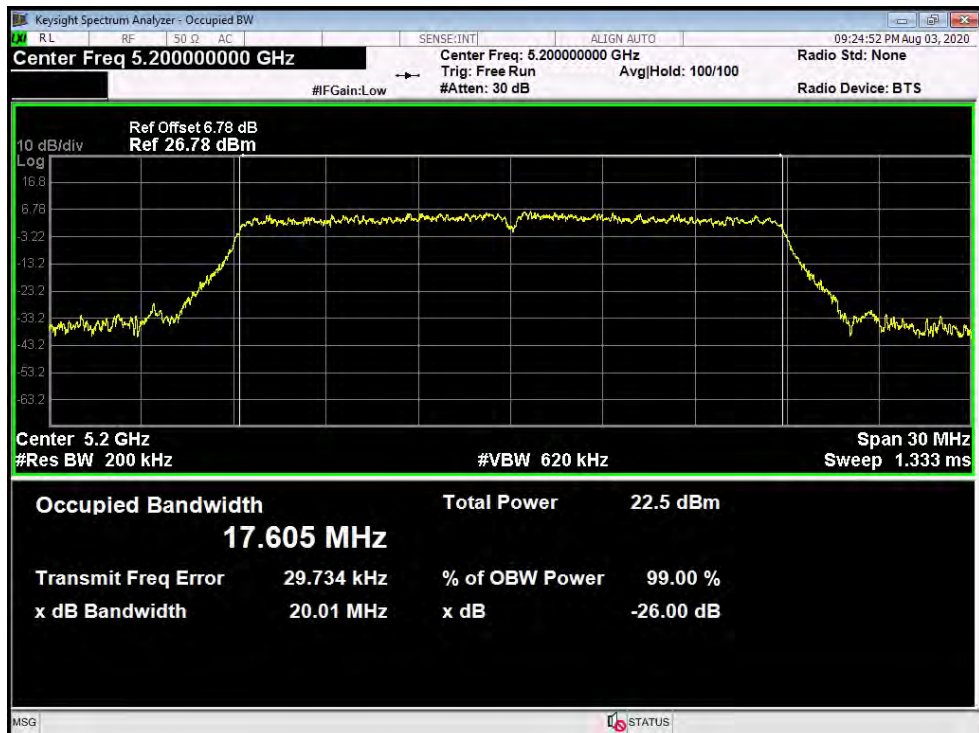

802.11ac(VHT20) Mode


Antenna 1---5240 MHz

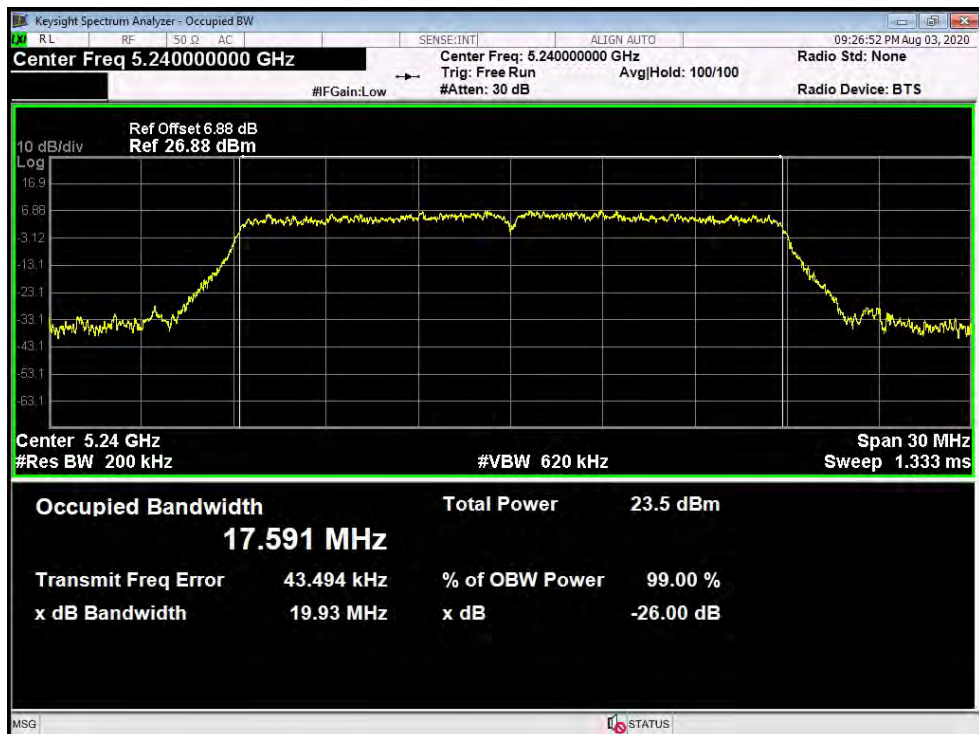


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-1) Antenna 0		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.47	36.026
46	5230	40.64	36.015

802.11N(HT40) Mode

Antenna 0---5190 MHz

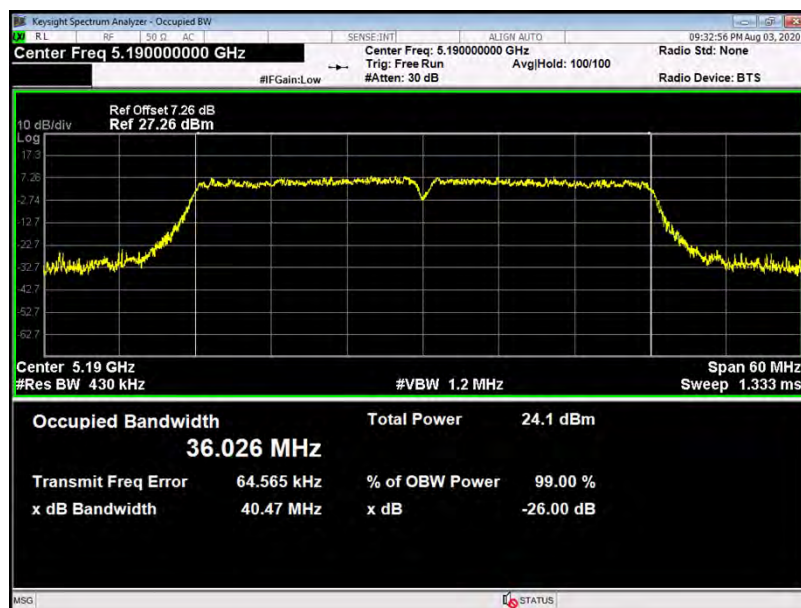


Antenna 0---5230 MHz

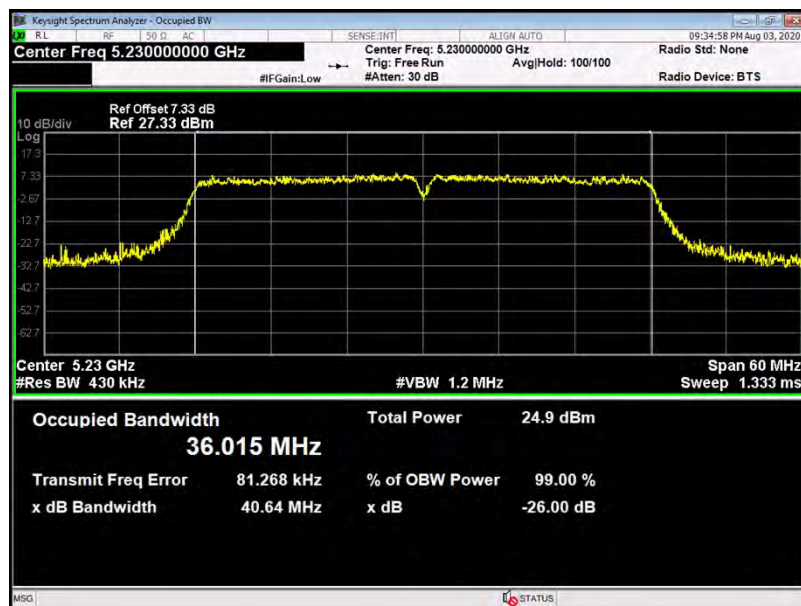


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-1) Antenna 1		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.78	36.044
46	5230	40.49	35.996

802.11N(HT40) Mode


Antenna 1---5190 MHz

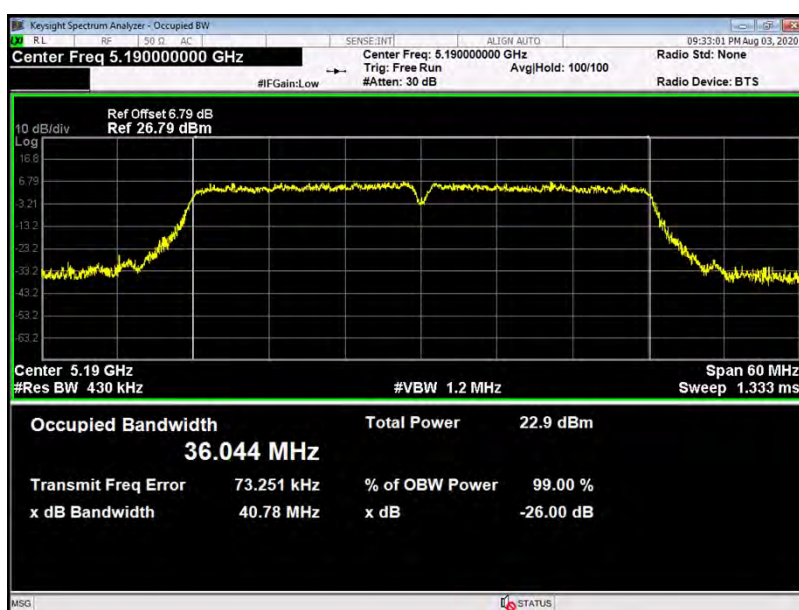


Antenna 1---5230 MHz

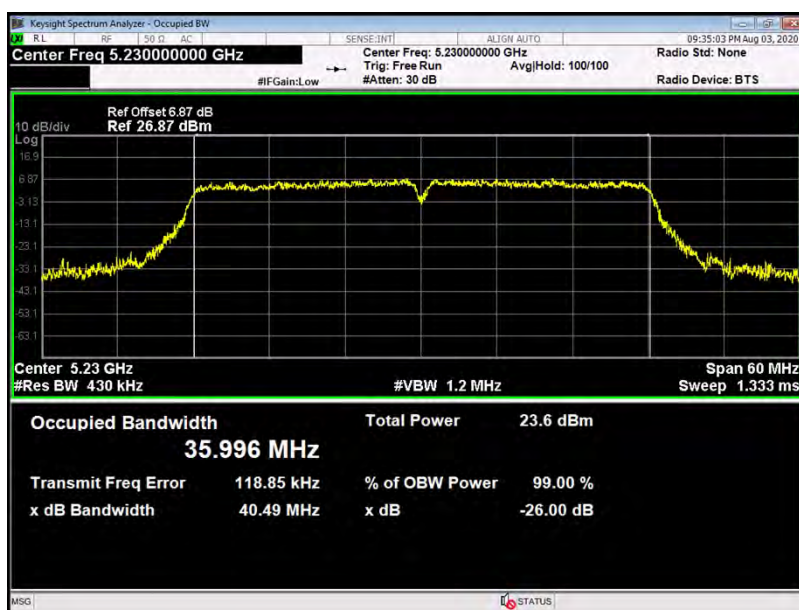

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-1) Antenna 0		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.51	36.019
46	5230	39.84	36.014

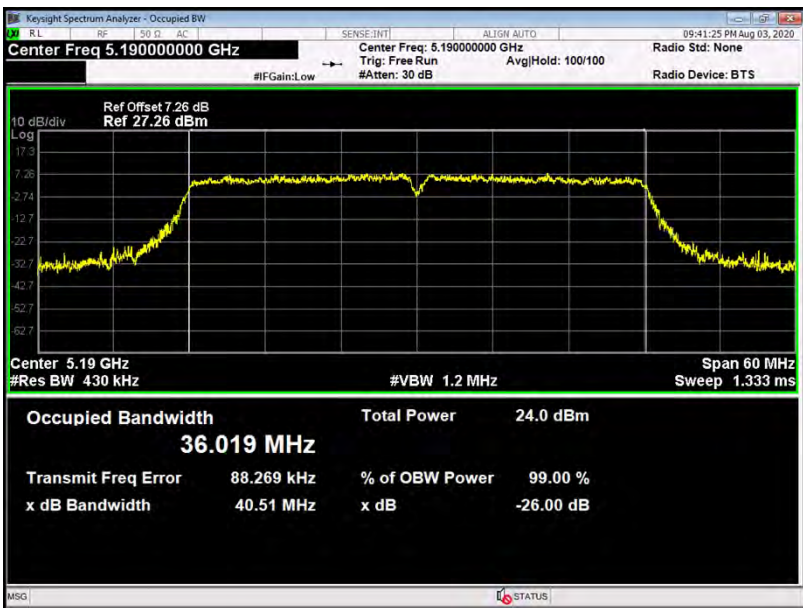
802.11ac(VHT40) Mode			
Antenna 0---5190 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.190000000 GHz Center Freq: 5.190000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.26 dB Ref 27.26 dBm 10 dB/div Log Center 5.19 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1.333 ms Occupied Bandwidth 36.019 MHz Total Power 24.0 dBm Transmit Freq Error 88.269 kHz % of OBW Power 99.00 % x dB Bandwidth 40.51 MHz x dB -26.00 dB			

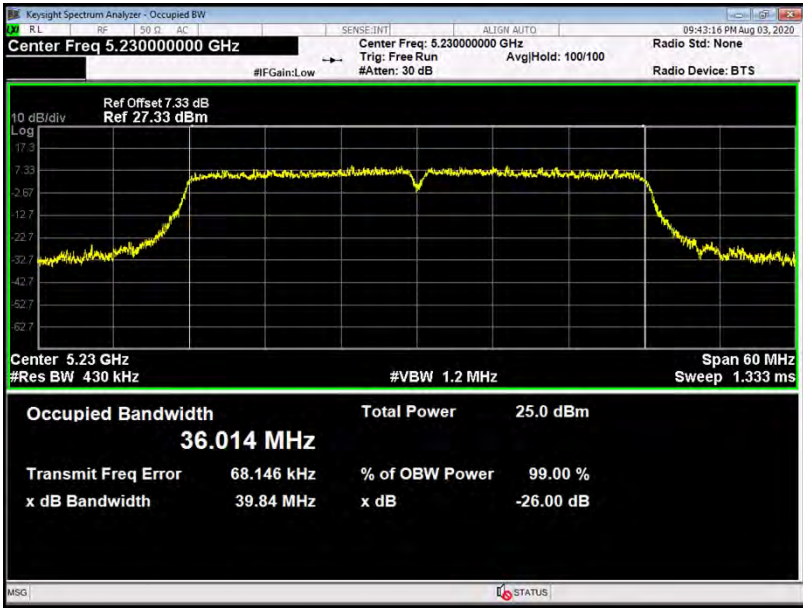Antenna 0---5230 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.230000000 GHz Center Freq: 5.230000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.33 dB Ref 27.33 dBm 10 dB/div Log Center 5.23 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1.333 ms Occupied Bandwidth 36.014 MHz Total Power 25.0 dBm Transmit Freq Error 68.146 kHz % of OBW Power 99.00 % x dB Bandwidth 39.84 MHz x dB -26.00 dB			


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-1) Antenna 1		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.90	36.019
46	5230	39.60	35.937


802.11ac(VHT40) Mode

Antenna 1---5190 MHz

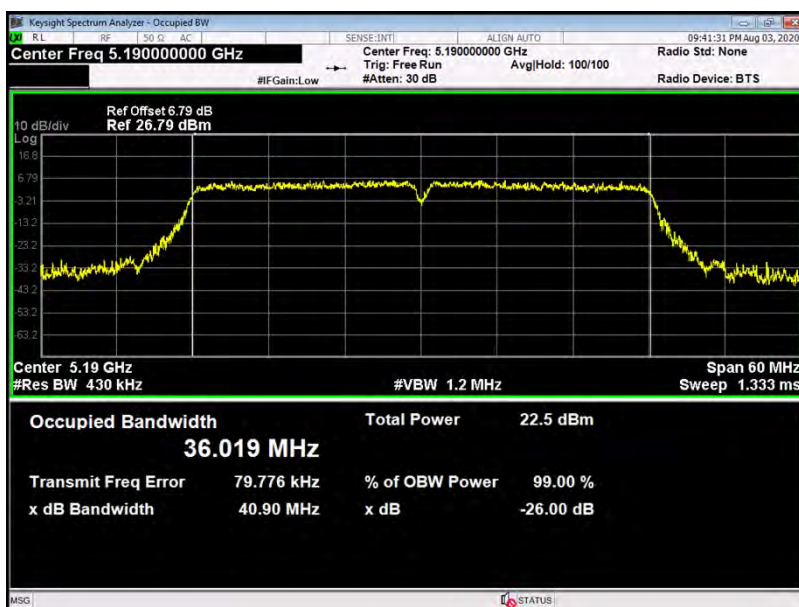

Antenna 1---5230 MHz

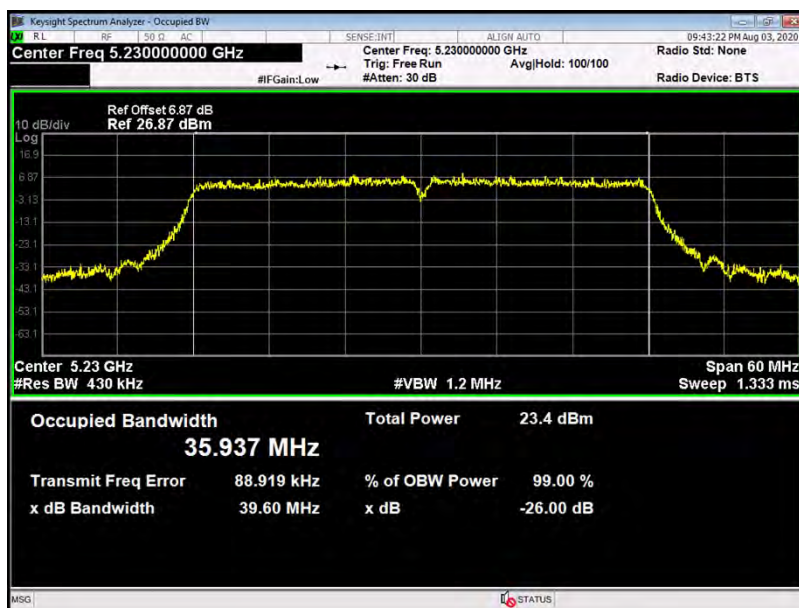

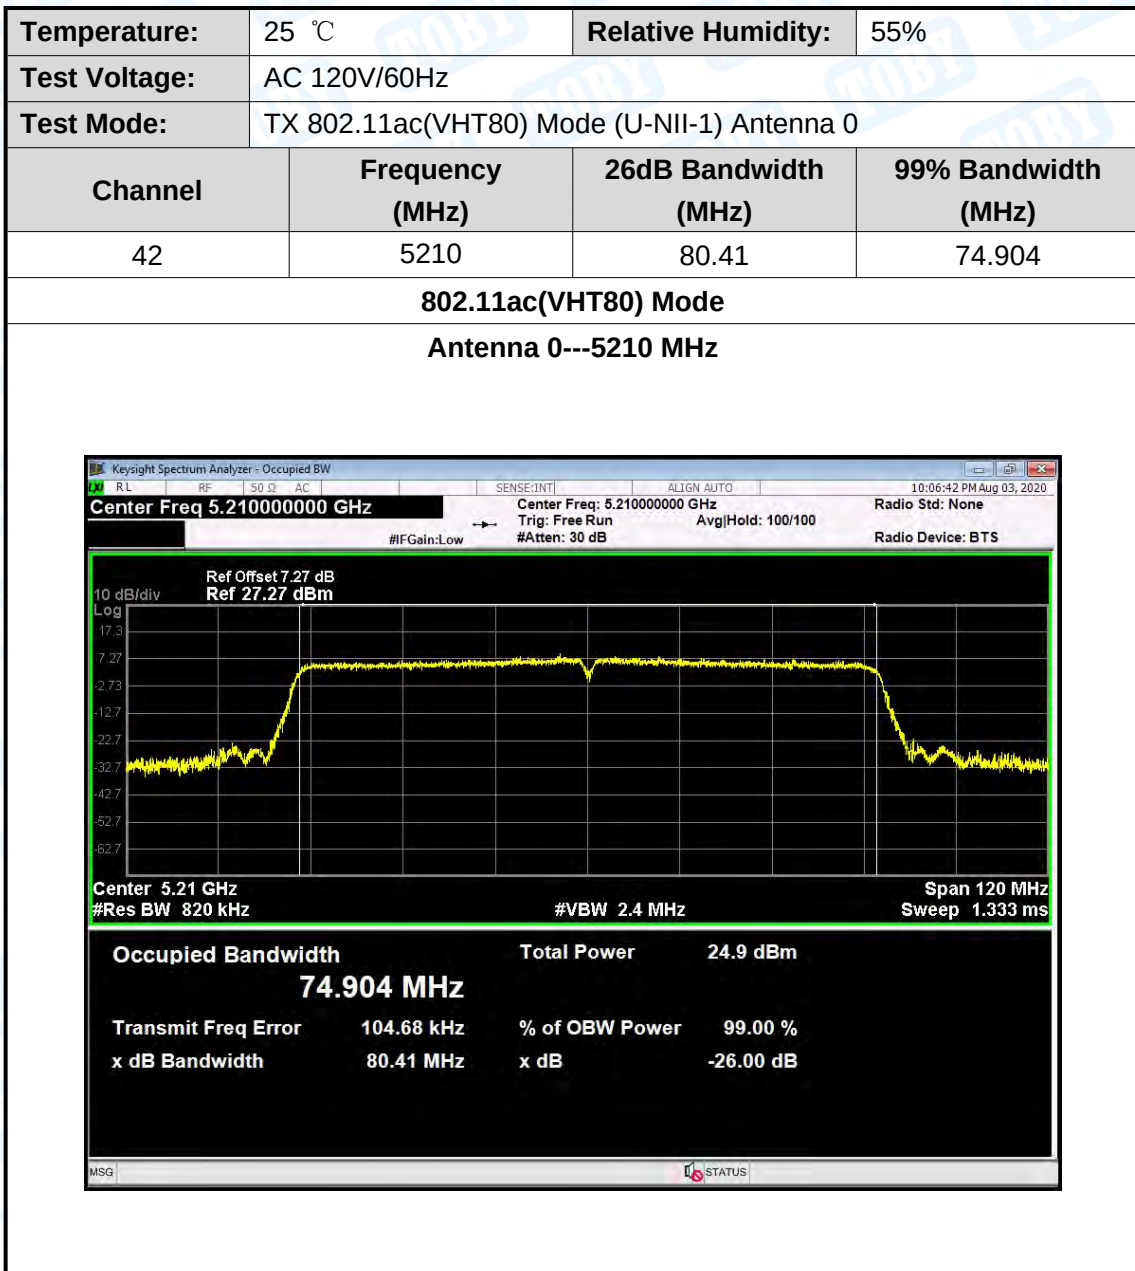





Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-3) Antenna 0		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	16.49	16.567
157	5785	16.54	16.536
165	5825	16.50	16.754

802.11a Mode

Antenna 0---5745 MHz-6dB Bandwidth

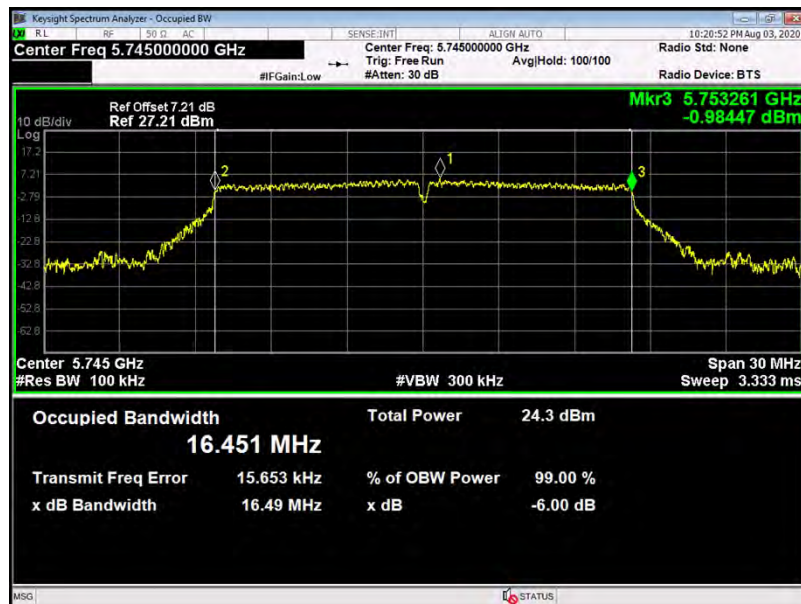


Antenna 0---5745 MHz-99%Bandwidth

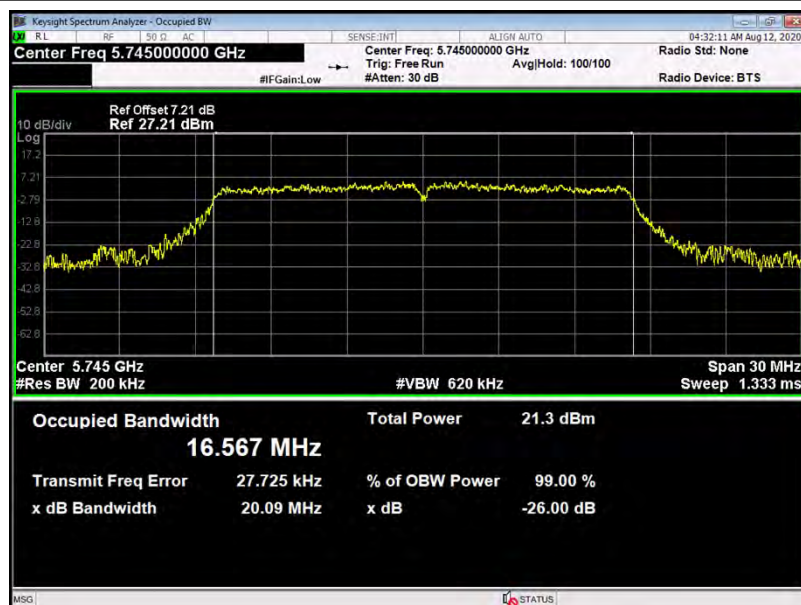


802.11a Mode

Antenna 0---5785 MHz-6dB Bandwidth

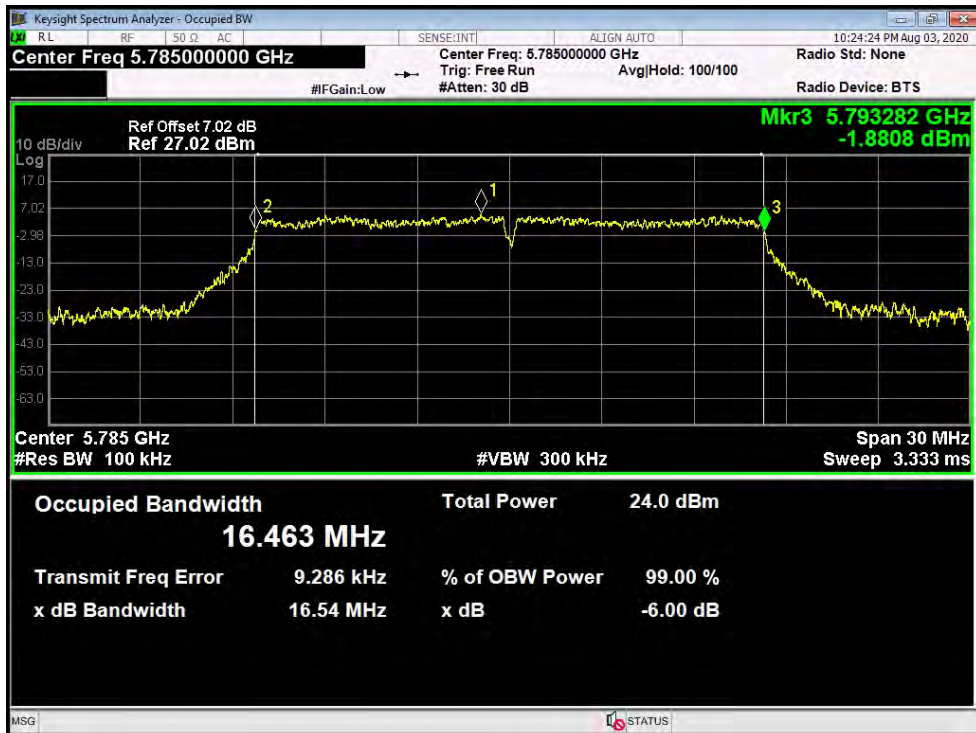


Antenna 0---5785 MHz-99%Bandwidth

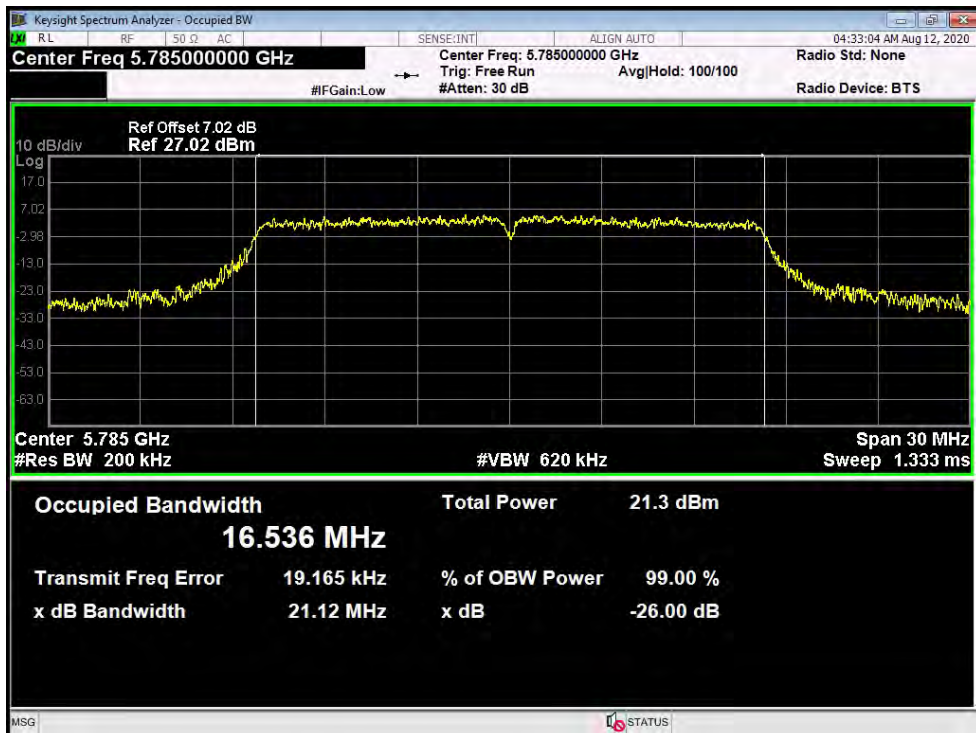


802.11a Mode

Antenna 0---5825 MHz-6dB Bandwidth

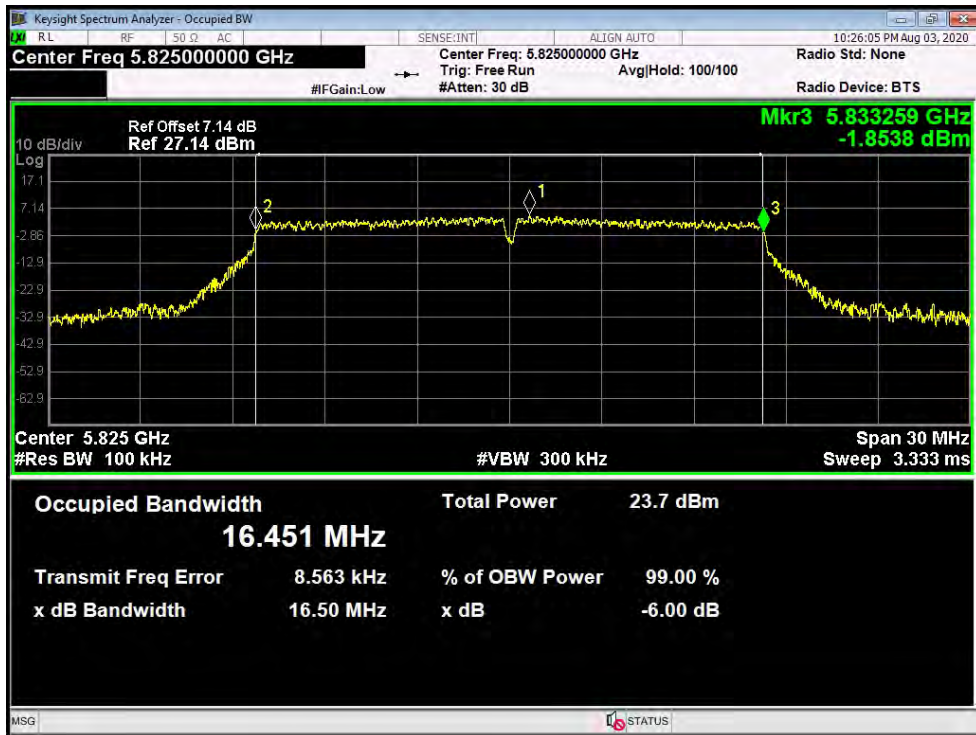


Antenna 0---5825 MHz-99%Bandwidth

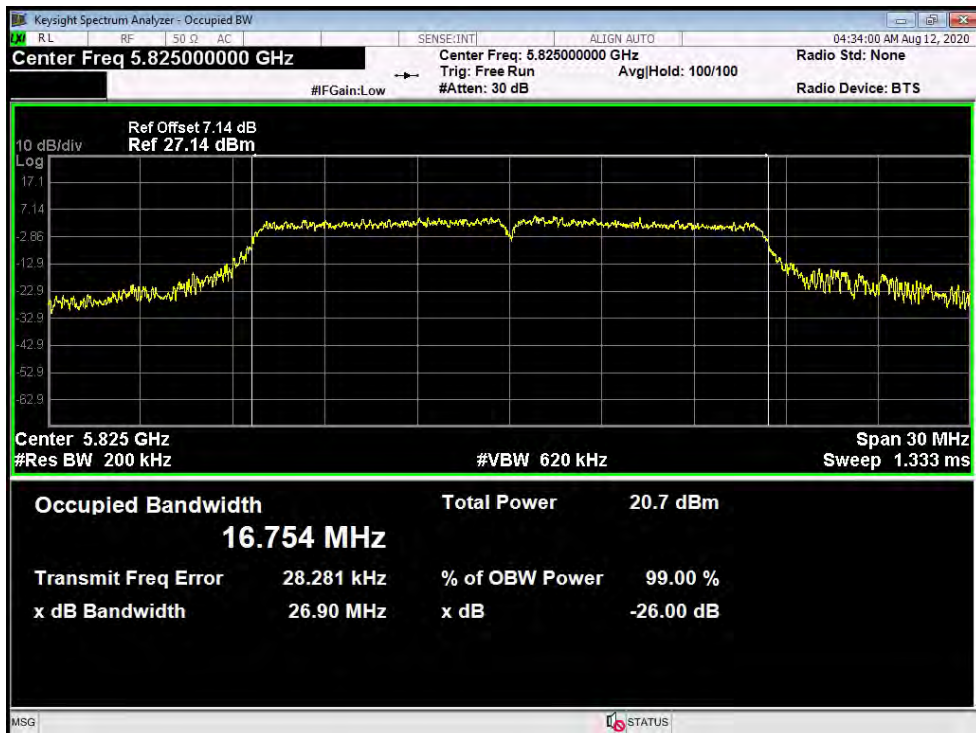


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-3) Antenna 1		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	16.51	16.535
157	5785	16.50	16.538
165	5825	16.48	16.632

802.11a Mode

Antenna 1---5745 MHz-6dB Bandwidth

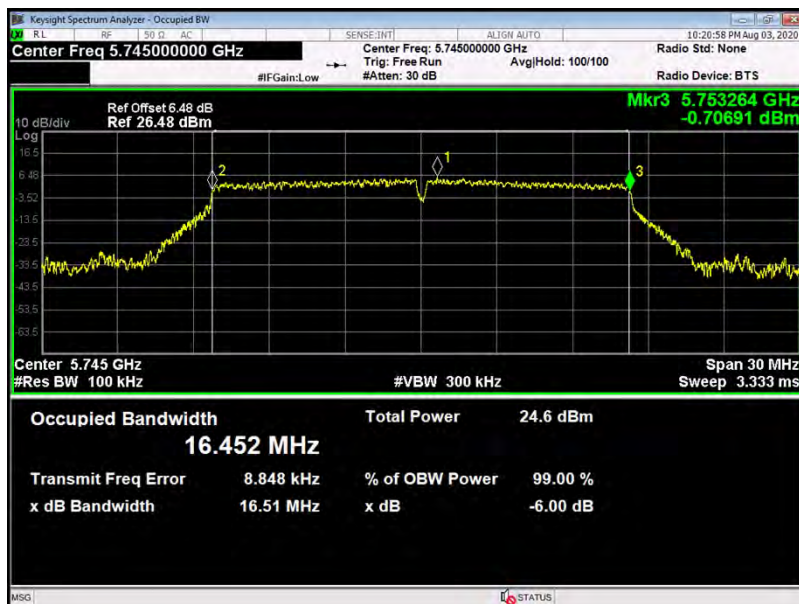


Antenna 1---5745 MHz-99%Bandwidth

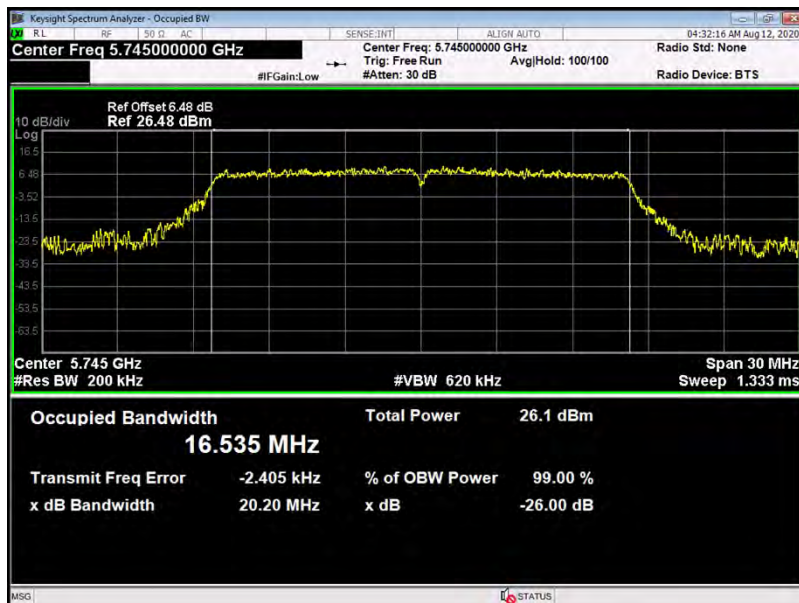


802.11a Mode

Antenna 1---5785 MHz-6dB Bandwidth

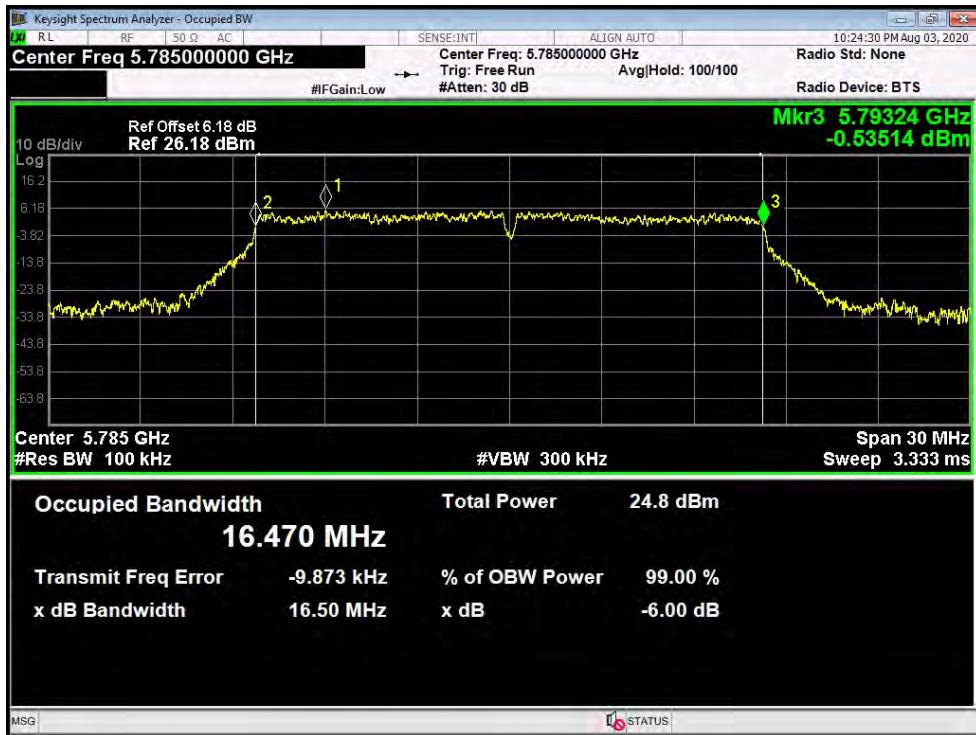


Antenna 1---5785 MHz-99%Bandwidth

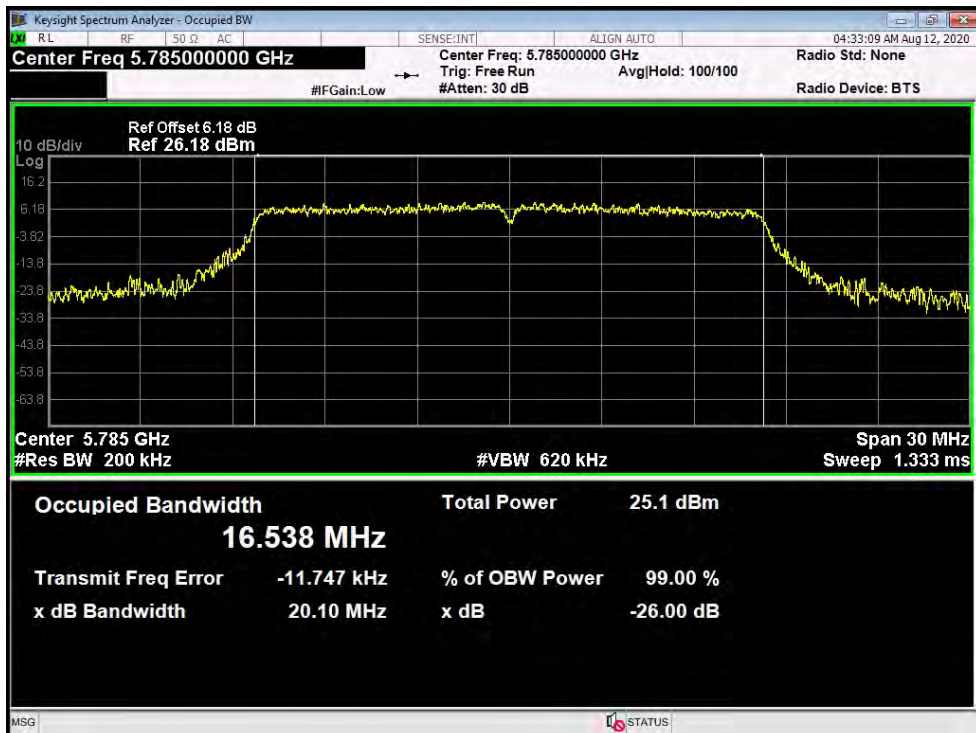


802.11a Mode

Antenna 1--- 5825 MHz-6dB Bandwidth

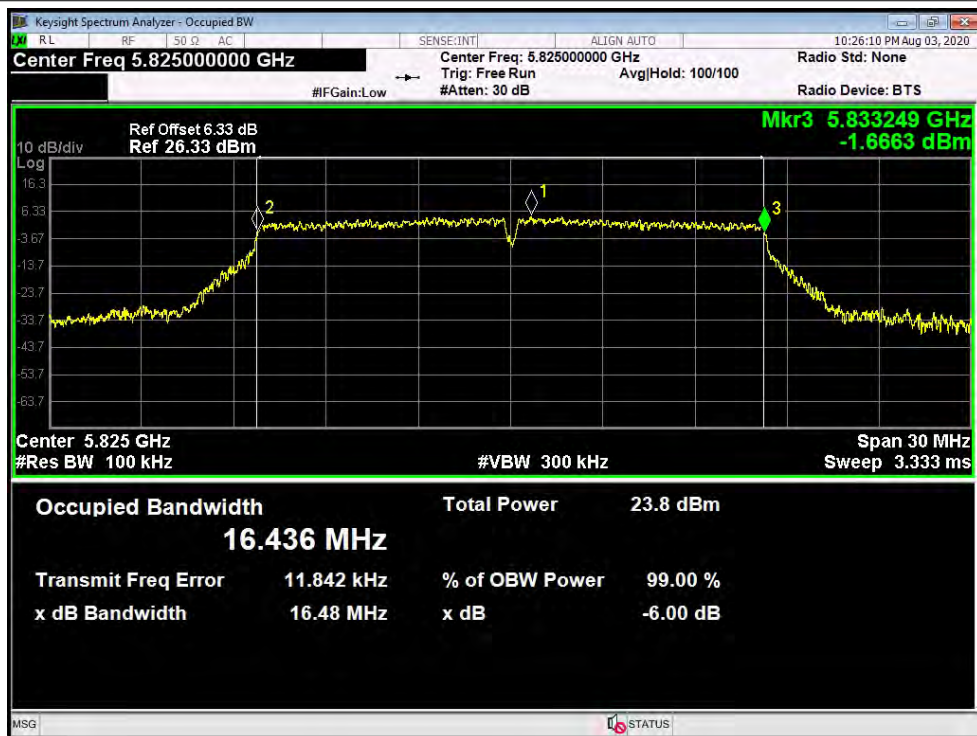

Antenna 1--- 5825 MHz-99%Bandwidth

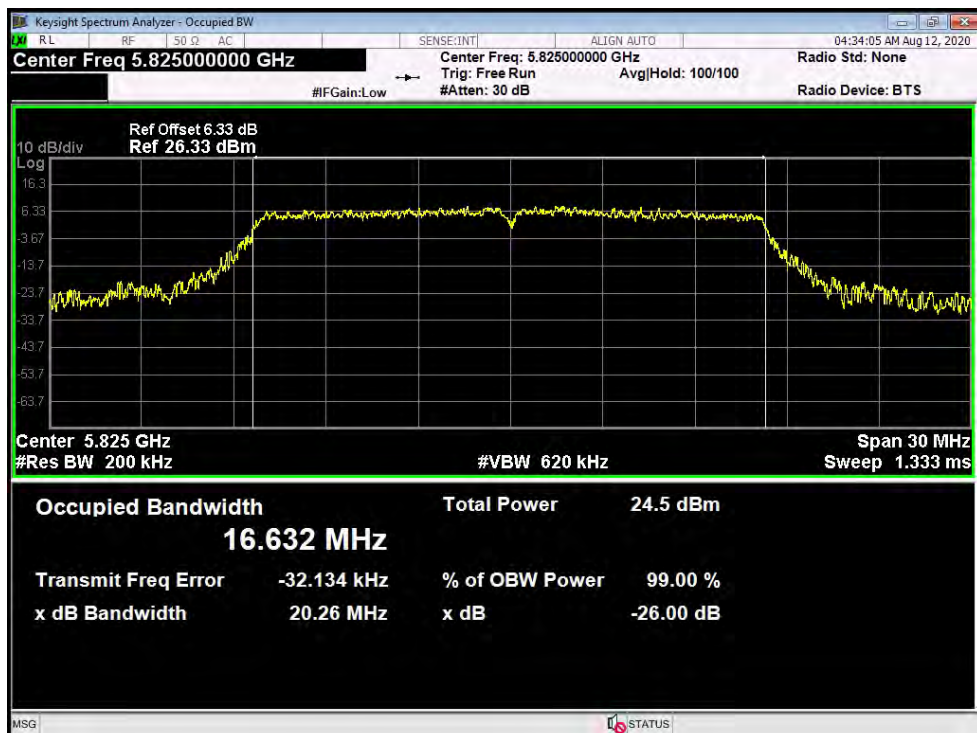


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-3) Antenna 0		


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	16.54	17.611
157	5785	17.62	17.621
165	5825	17.65	17.626

802.11n(HT20) Mode

Antenna 0---5745 MHz-6dB Bandwidth

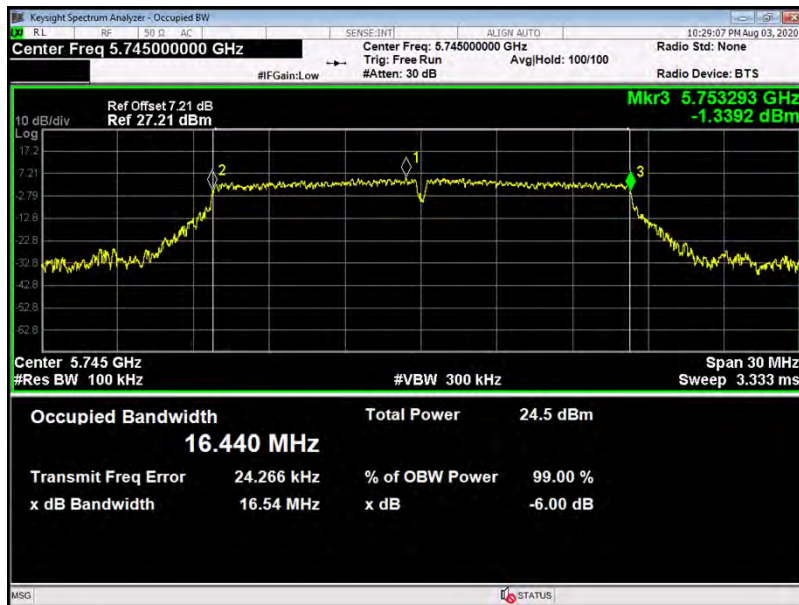


Antenna 0---5745 MHz-99%Bandwidth

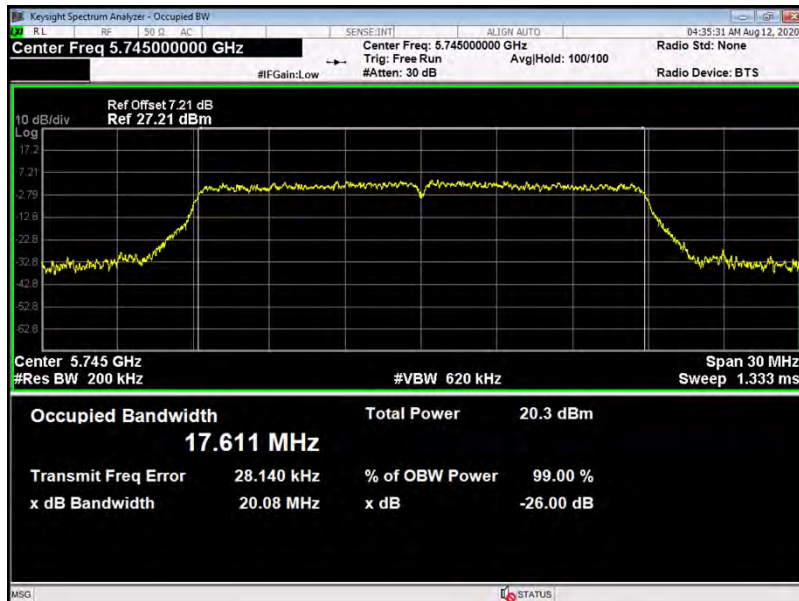


802.11n(HT20) Mode

Antenna 0---5785 MHz-6dB Bandwidth

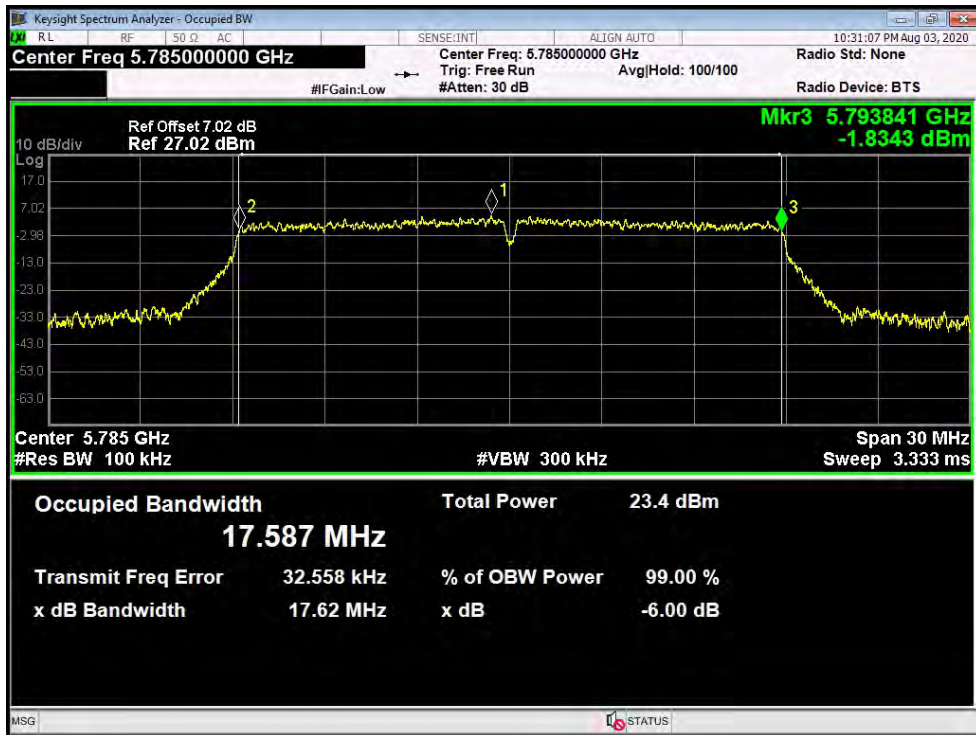


Antenna 0---5785 MHz-99%Bandwidth

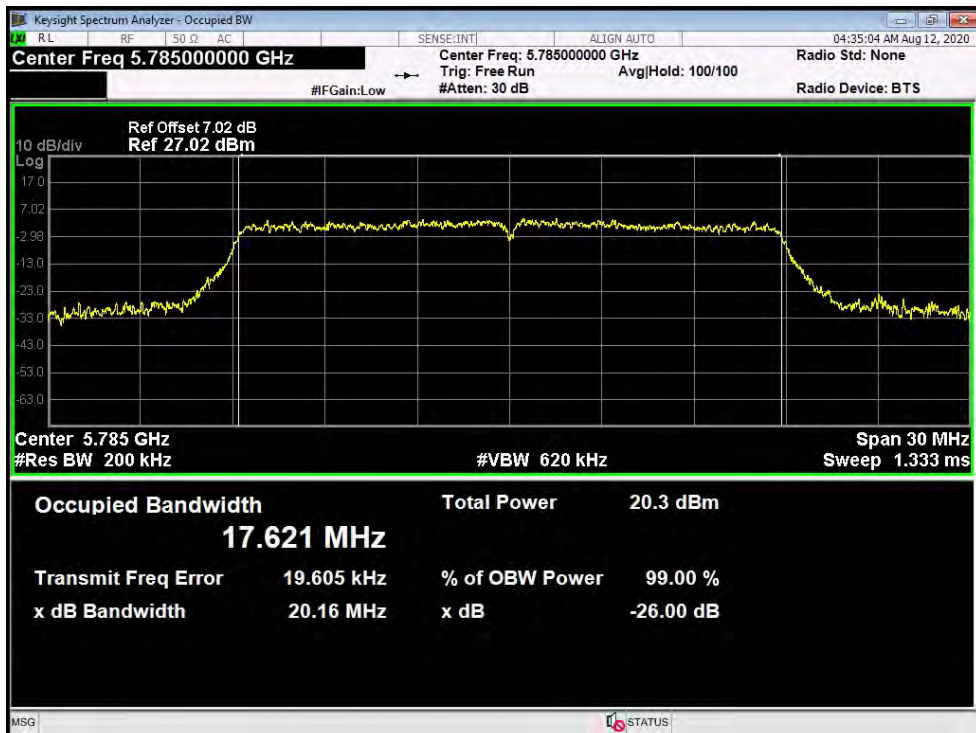


802.11n(HT20) Mode

Antenna 0---5825 MHz-6dB Bandwidth

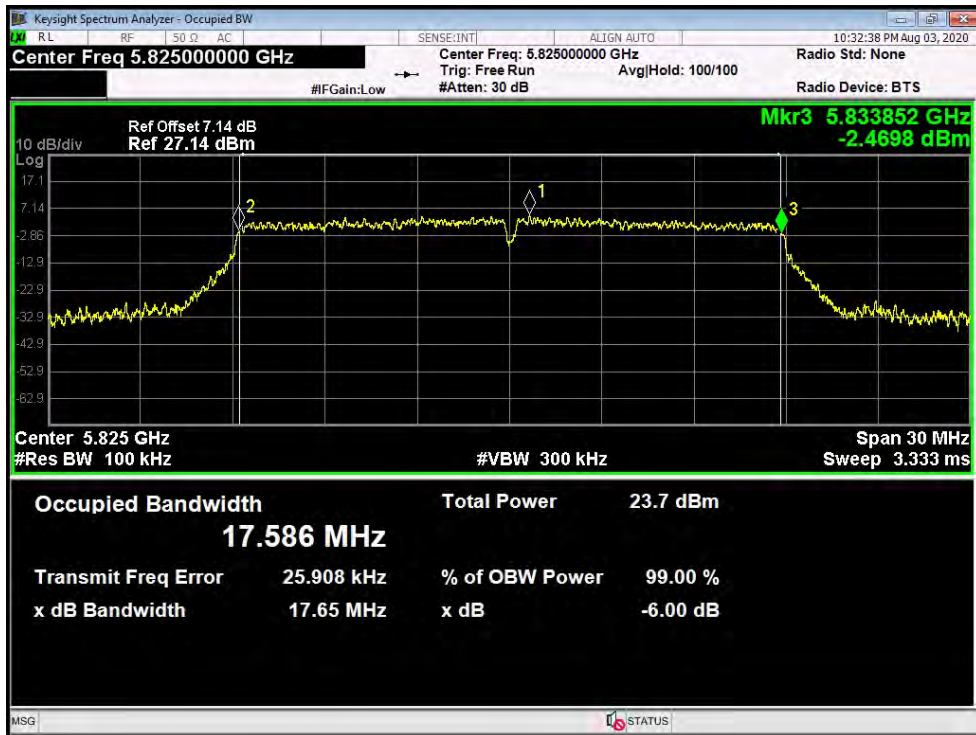

Antenna 0---5825 MHz-99%Bandwidth

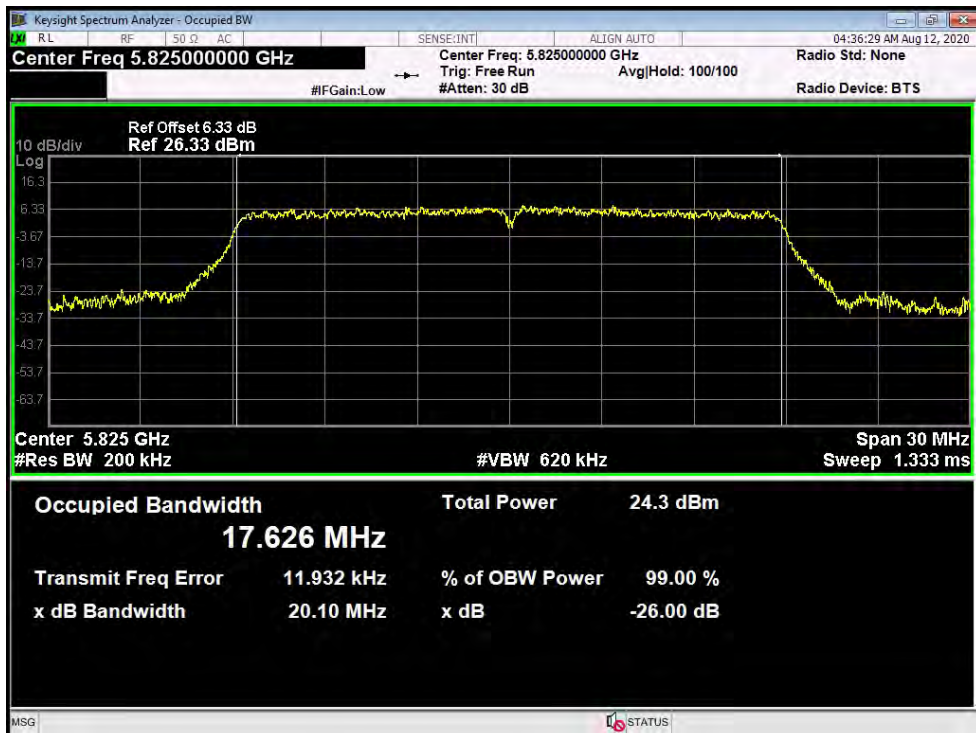

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-3) Antenna 1		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	16.44	17.604
157	5785	17.63	17.621
165	5825	17.62	17.679

802.11n(HT20) Mode			
Antenna 1---5745 MHz-6dB Bandwidth			

Keysight Spectrum Analyzer - Occupied BW

Center Freq 5.745000000 GHz

Ref Offset 6.48 dB
Ref 26.48 dBm

Mkr3 5.753233 GHz
-0.013224 dBm

Center 5.745 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 30 MHz
Sweep 3.333 ms

Occupied Bandwidth 16.425 MHz

Total Power 24.9 dBm

Transmit Freq Error 11.803 kHz

% of OBW Power 99.00 %

x dB Bandwidth 16.44 MHz

x dB -6.00 dB

Antenna 1---5745 MHz-99%Bandwidth			
-----------------------------------	--	--	--

Keysight Spectrum Analyzer - Occupied BW

Center Freq 5.745000000 GHz

Ref Offset 6.48 dB
Ref 26.48 dBm

Center 5.745 GHz
#Res BW 200 kHz
#VBW 620 kHz
Span 30 MHz
Sweep 1.333 ms

Occupied Bandwidth 17.604 MHz

Total Power 25.1 dBm

Transmit Freq Error 7.802 kHz


% of OBW Power 99.00 %

x dB Bandwidth 20.05 MHz


x dB -26.00 dB

802.11n(HT20) Mode

Antenna 1---5785 MHz-6dB Bandwidth

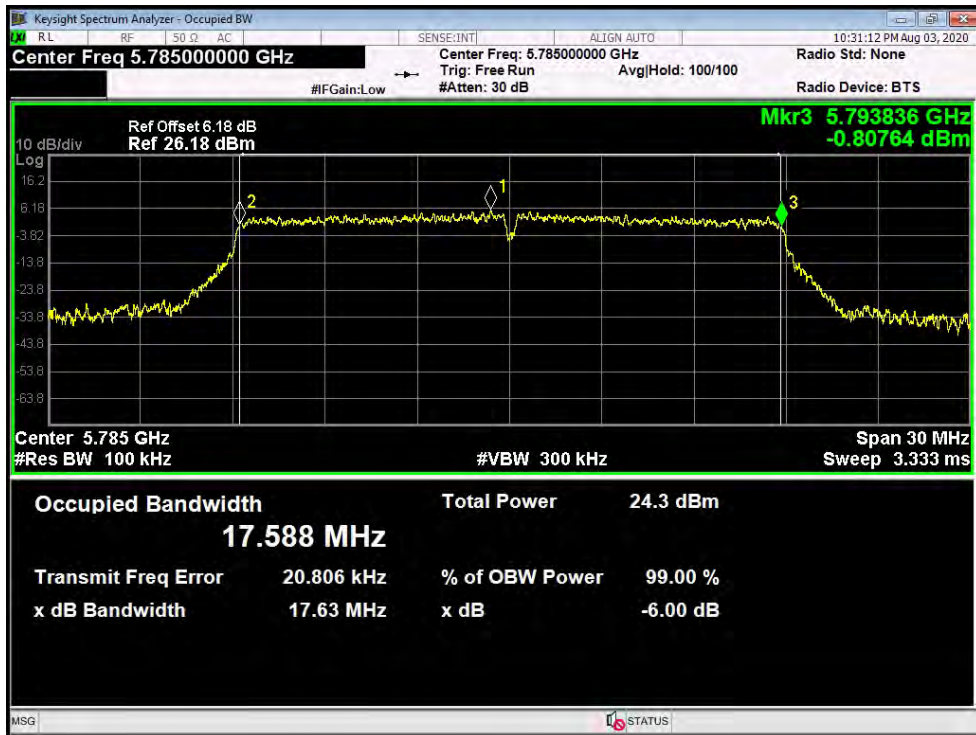


Antenna 1---5785 MHz-99%Bandwidth

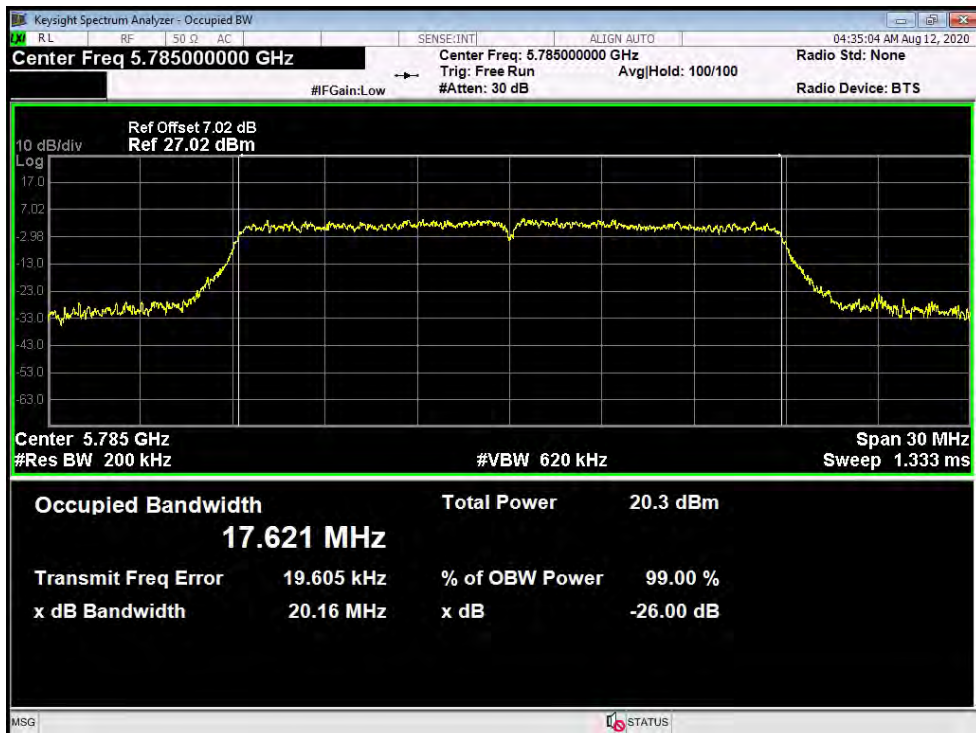


802.11n(HT20) Mode

Antenna 1---5825 MHz-6dB Bandwidth

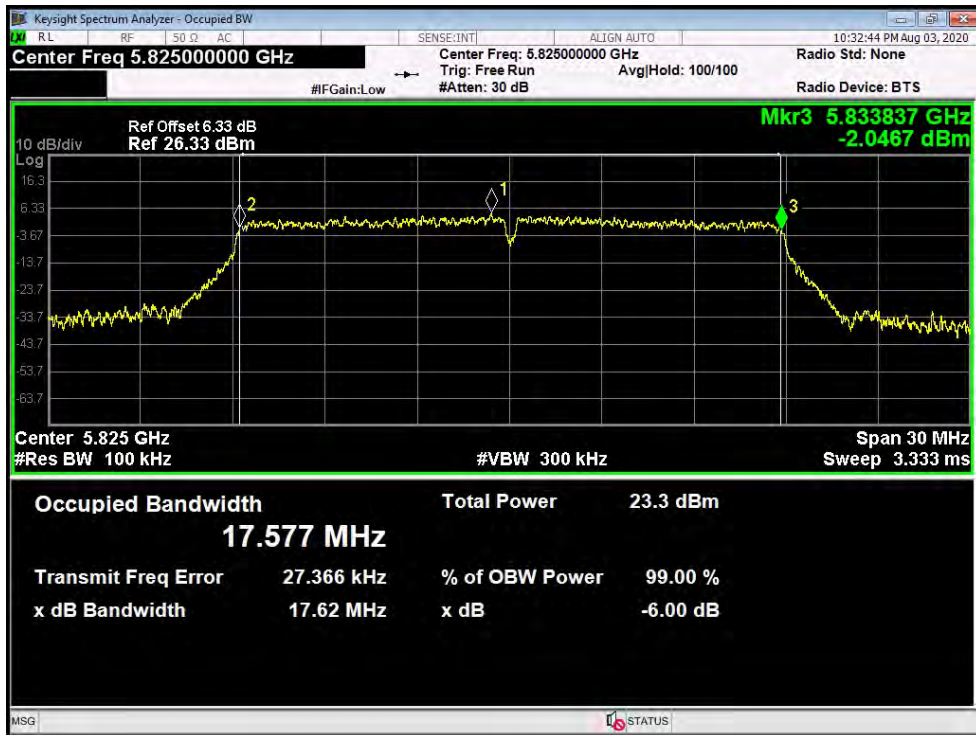


Antenna 1---5825 MHz-99%Bandwidth

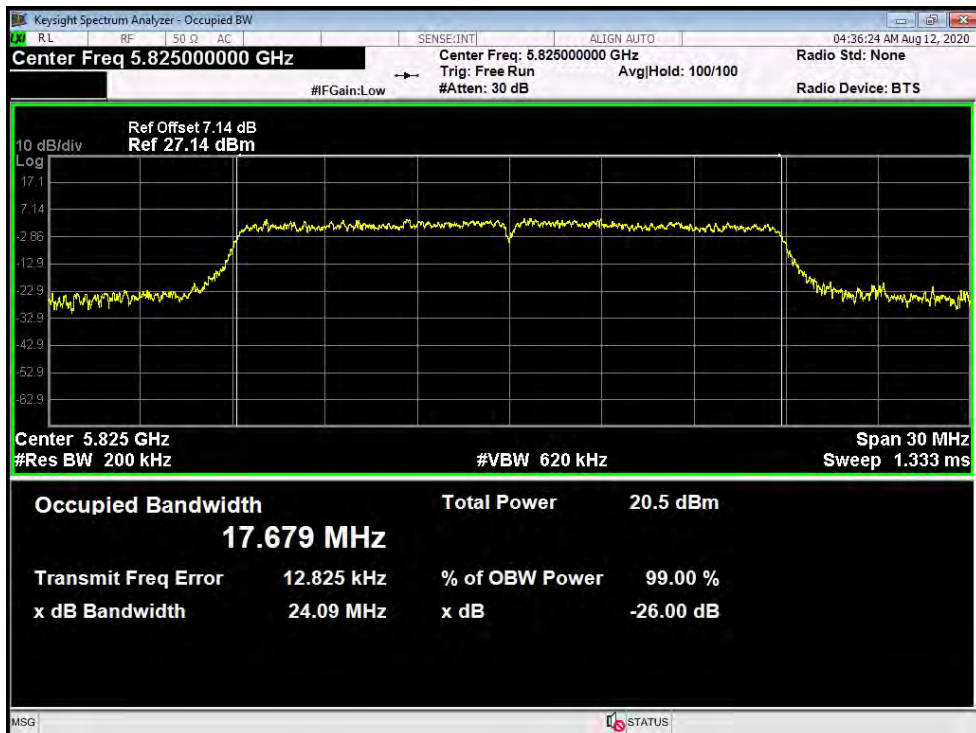


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-3) Antenna 0		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	17.61	17.602
157	5785	17.72	17.631
165	5825	17.69	17.658

802.11ac(VHT20) Mode

Antenna 0---5745 MHz-6dB Bandwidth

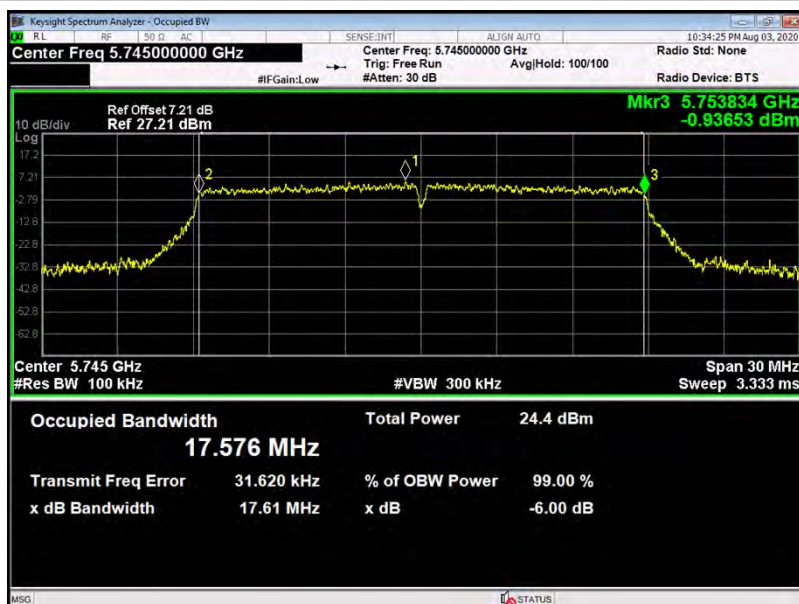


Antenna 0---5745 MHz-99%Bandwidth

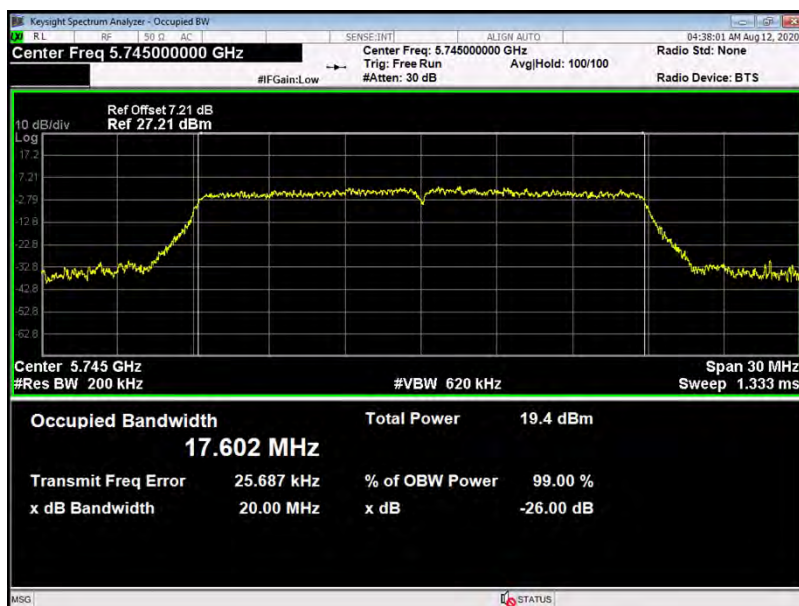


802.11ac(VHT20) Mode

Antenna 0---5785 MHz-6dB Bandwidth

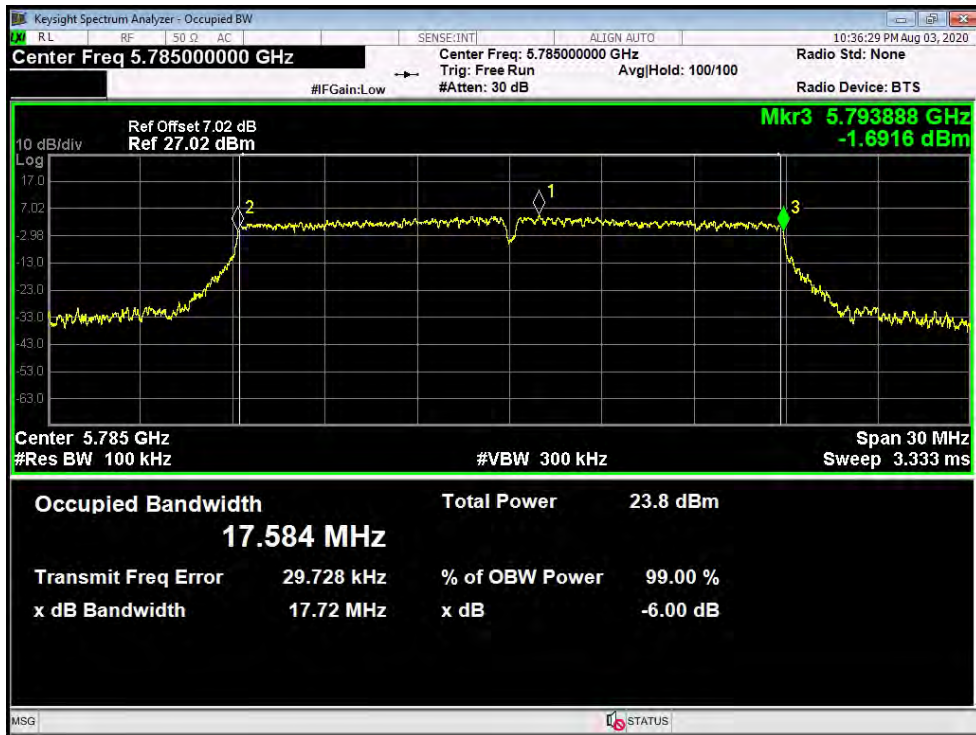


Antenna 0---5785 MHz-99% Bandwidth

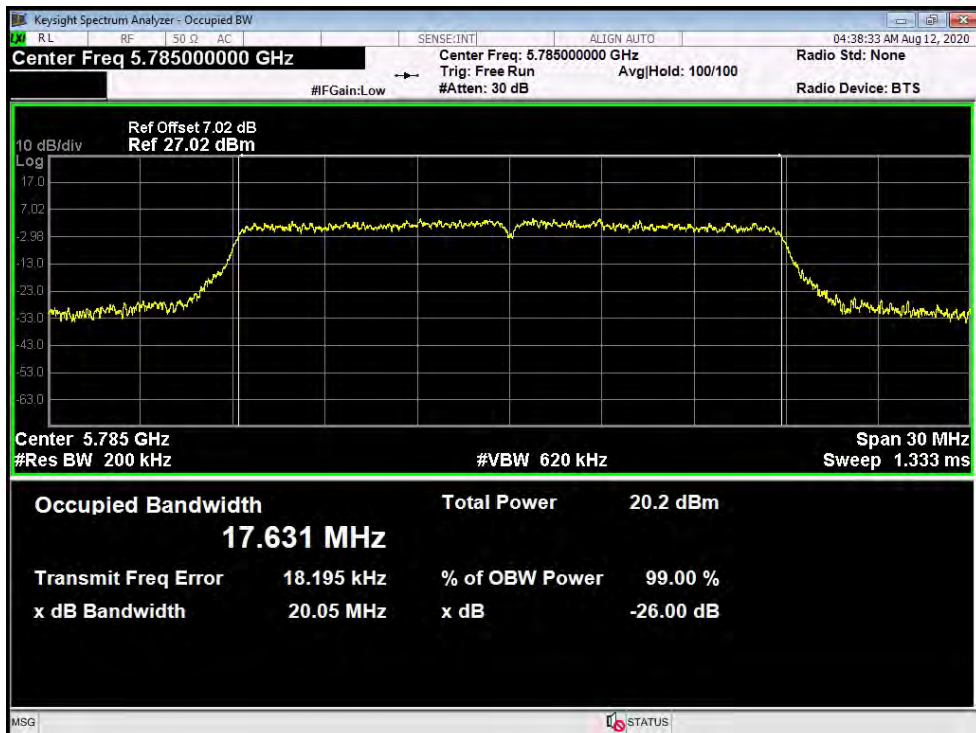


802.11ac(VHT20) Mode

Antenna 0---5825 MHz-6dB Bandwidth

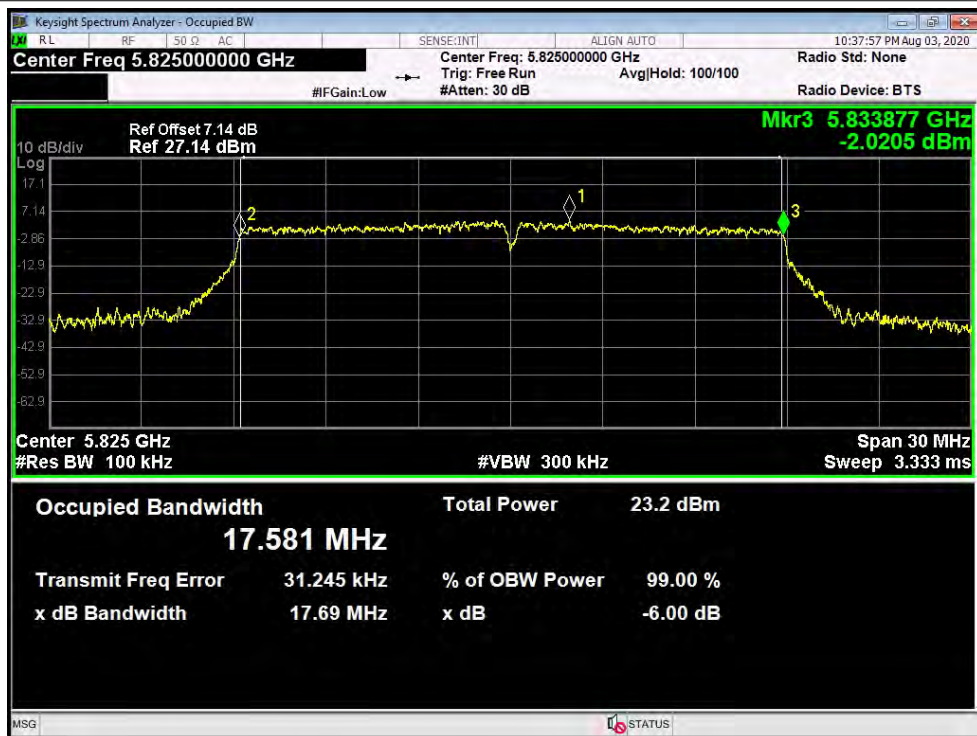


Antenna 0---5825 MHz-99%Bandwidth

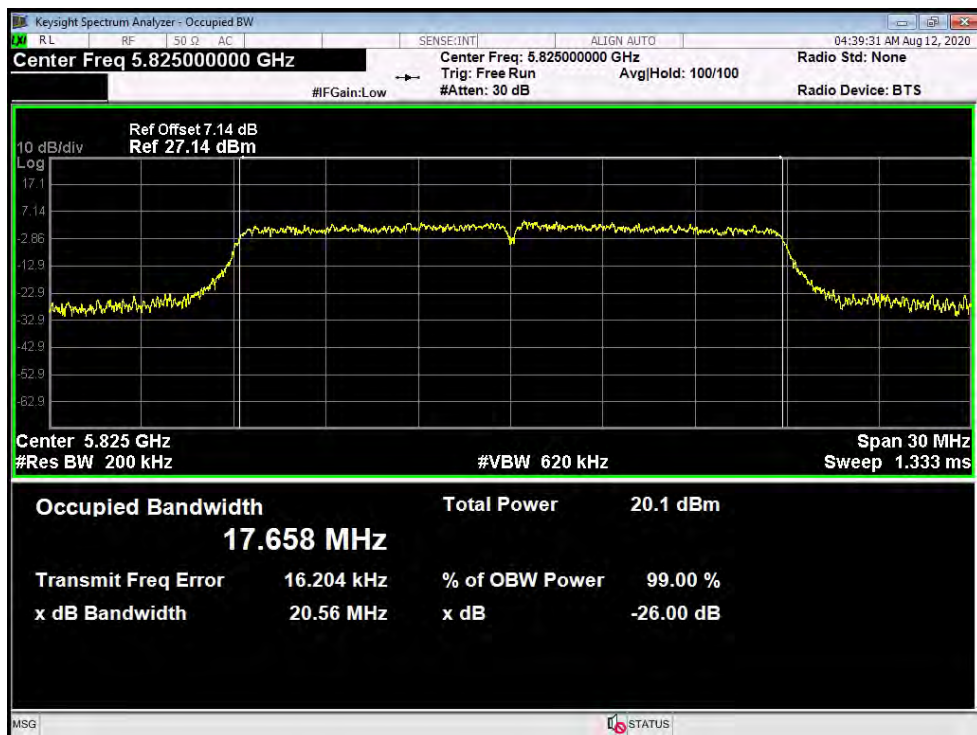


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-3) Antenna 1		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	17.63	17.597
157	5785	17.70	17.595
165	5825	17.71	17.614

802.11ac(VHT20) Mode

Antenna 1---5745 MHz-6dB Bandwidth

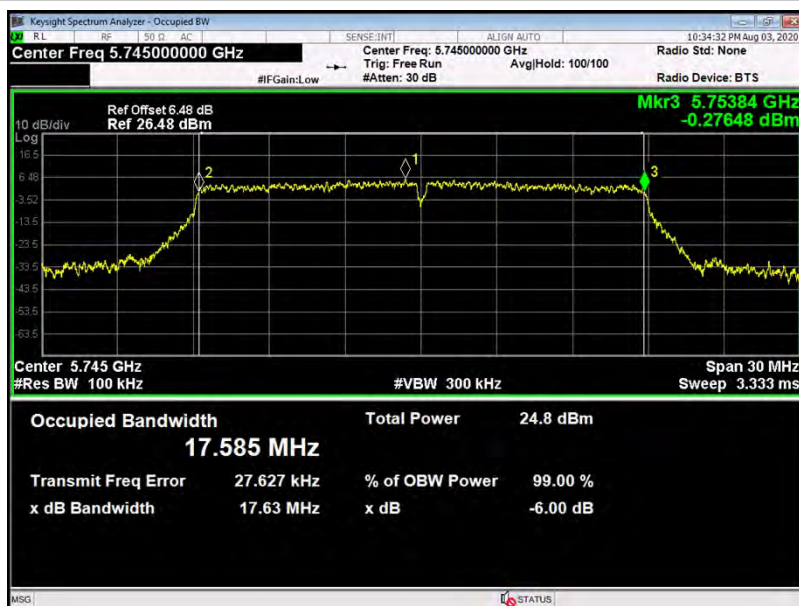


Antenna 1---5745 MHz-99%Bandwidth

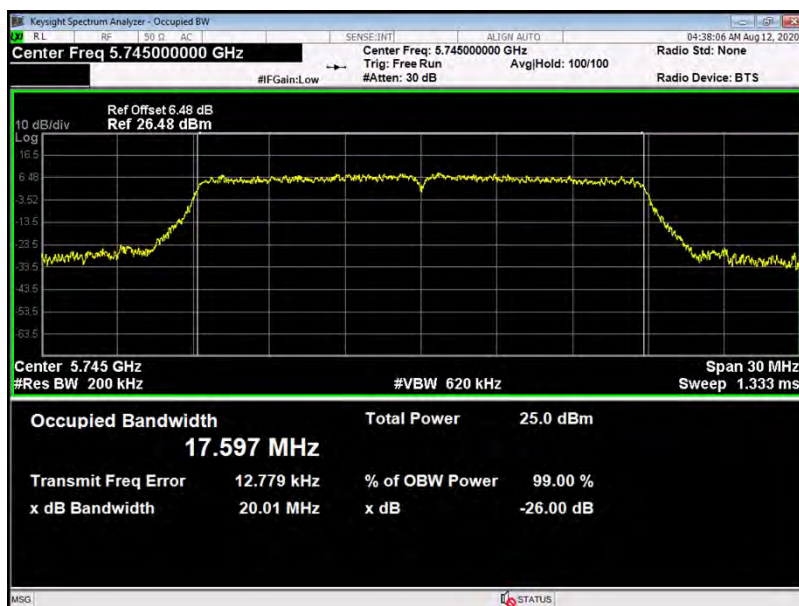


802.11ac(VHT20) Mode

Antenna 1---5785 MHz-6dB Bandwidth

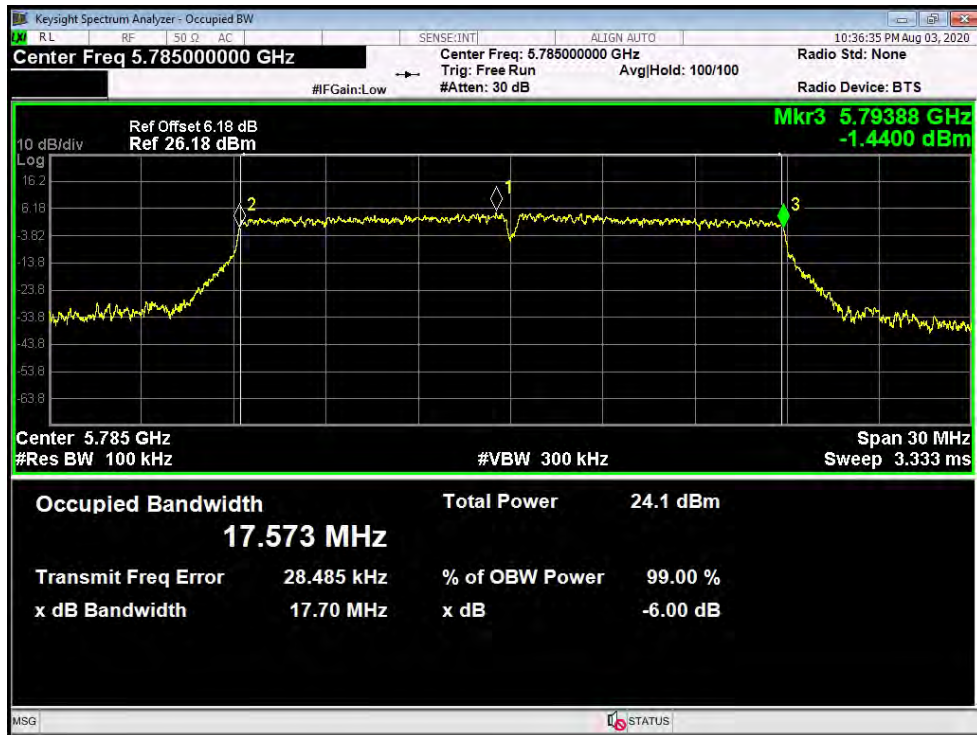


Antenna 1---5785 MHz-99%Bandwidth

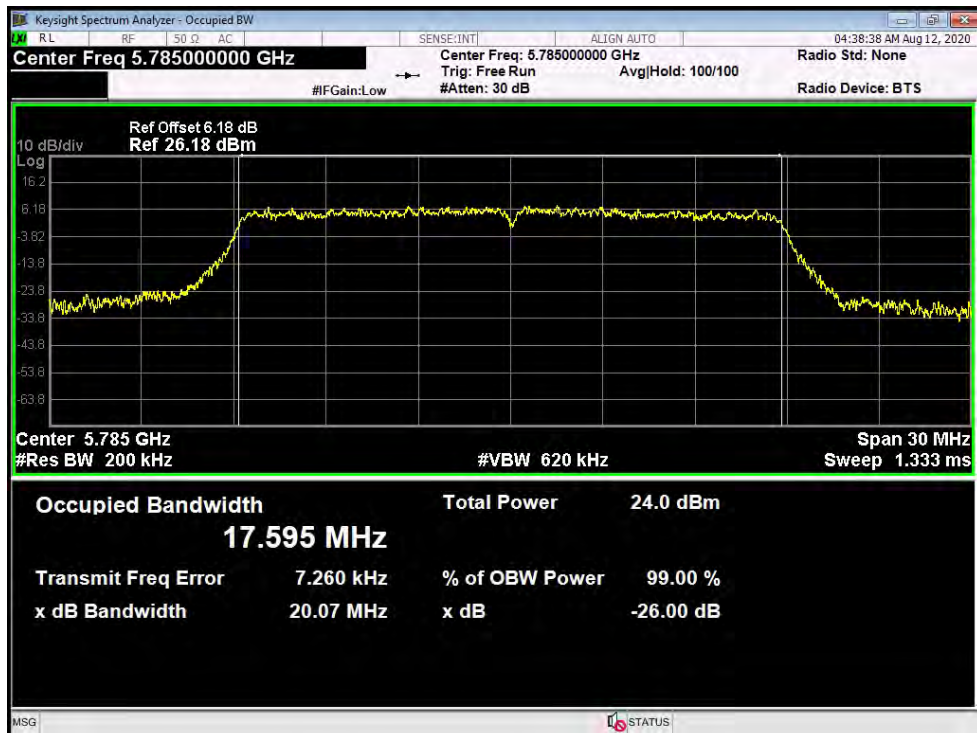


802.11ac(VHT20) Mode

Antenna 1---5825 MHz-6dB Bandwidth

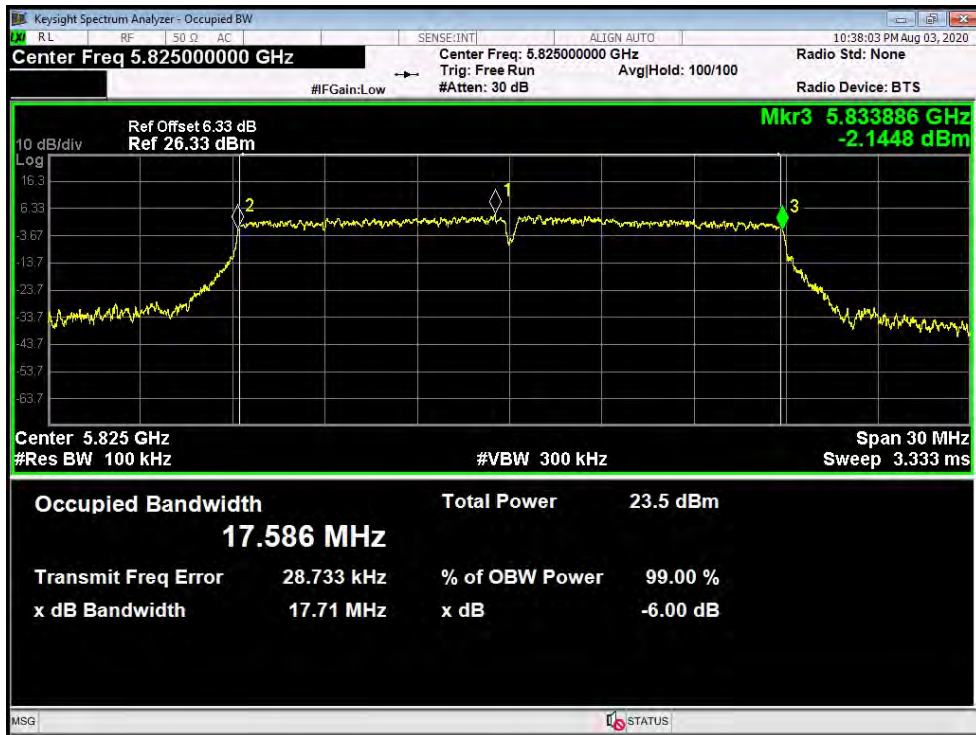


Antenna 1---5825 MHz-99% Bandwidth

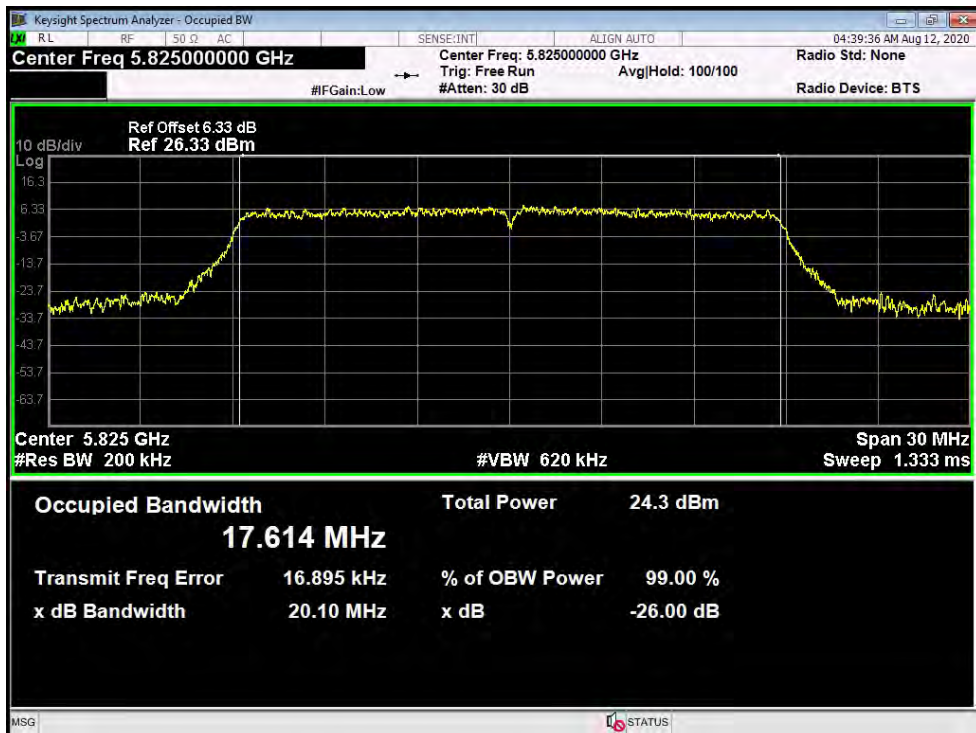


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-3) Antenna 0		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
151	5755	36.35	36.033
159	5795	36.35	36.030

802.11n(HT40) Mode

Antenna 0---5755 MHz-6dB Bandwidth

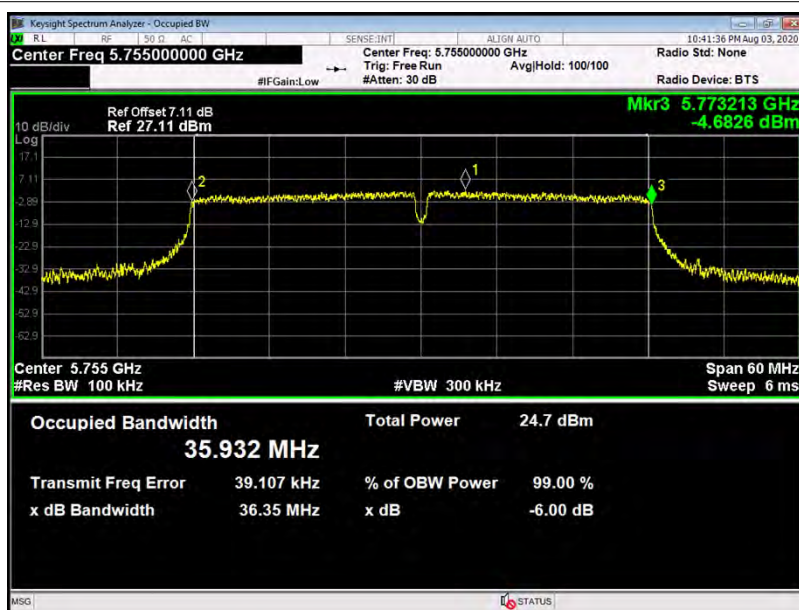


Antenna 0---5755 MHz-99%Bandwidth

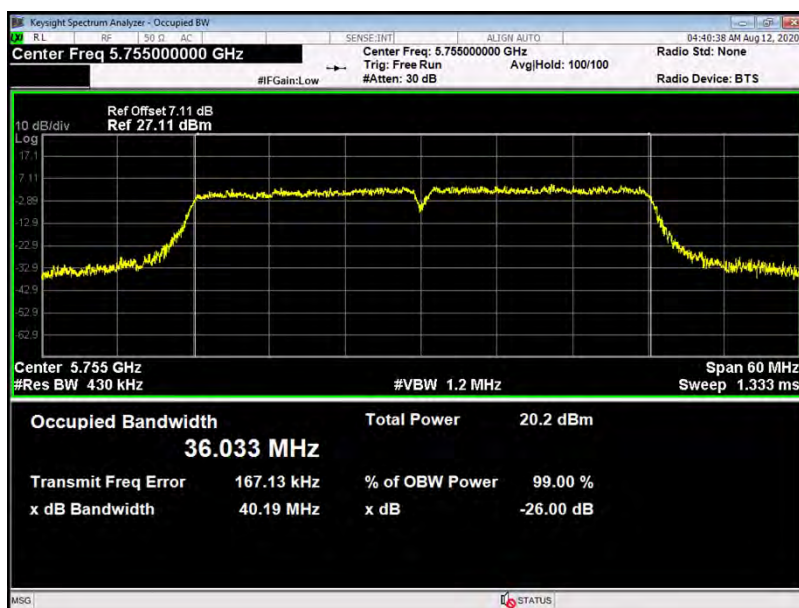

802.11n(HT40) Mode

Antenna 0---5795 MHz-6dB Bandwidth

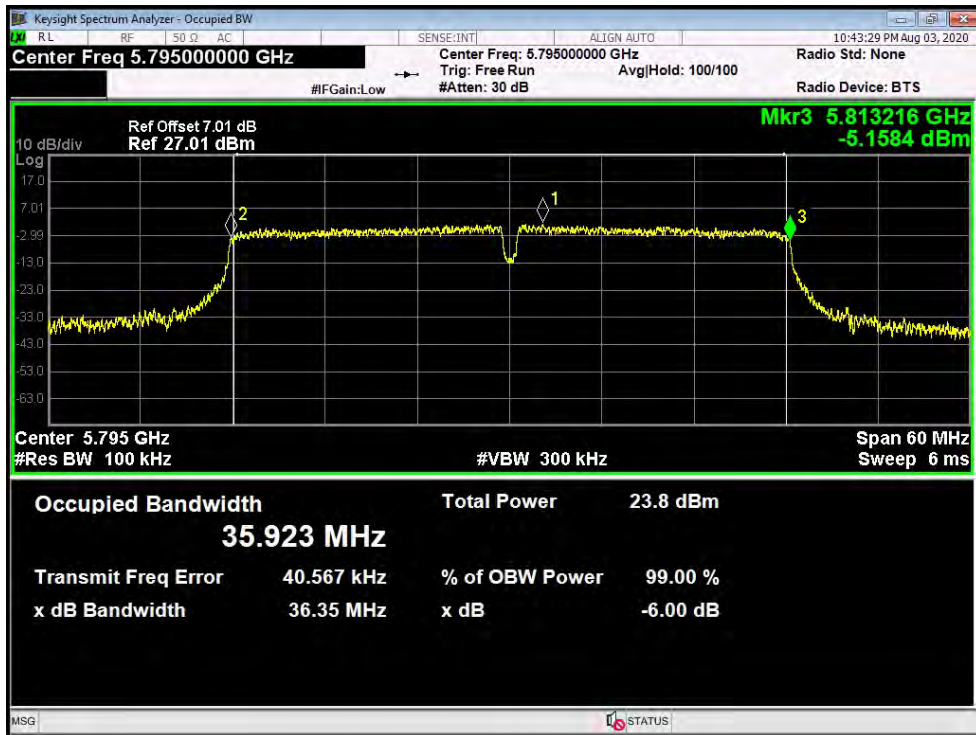

Antenna 0---5795 MHz-99%Bandwidth

