FCC Test Report

Report No.	:	**1812C60174212501**
Applicant	:	**Loctek Ergonomic Technology Corp.**
Address	:	**588 Qihang South Road, Binhai Industrial Zone Yinzhou District, Ningbo Zhejiang, China**
Product Name	:	**Elevating table**
Report Date	:	**2026-05-20**

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Contents

1. General Information 5
1.1. Client Information 5
1.2. Description of Device (EUT) 5
1.3. Auxiliary Equipment Used During Test 6
1.4. Description of Test Modes 6
1.5. Description Of Test Setup 7
1.6. Test Equipment List 8
1.7. Measurement Uncertainty 9
1.8. Description of Test Facility 9
1.9. Disclaimer 9
2. Summary of Test Results 10
3. Conducted Emission Test 11
3.1. Test Standard and Limit 11
3.2. Test Setup 11
3.3. Test Procedure 11
3.4. Test Data 11
4. Radiation Spurious Emission 14
4.1. Test Standard and Limit 14
4.2. Test Setup 14
4.3. Test Procedure 15
4.4. Test Data 15
5. 20dB Occupy Bandwidth Test 20
5.1. Test Standard and Limit 20
5.2. Test Setup 20
5.3. Test Procedure 20
5.4. Test Data 20
6. Antenna Requirement 22
6.1. Test Standard and Requirement 22
6.2. Antenna Connected Construction 22
APPENDIX I -- TEST SETUP PHOTOGRAPH 23
APPENDIX II -- EXTERNAL PHOTOGRAPH 23
APPENDIX III -- INTERNAL PHOTOGRAPH 23

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

TEST REPORT

Applicant	:	Loctek Ergonomic Technology Corp.
Manufacturer	:	Loctek Ergonomic Technology Corp.
Product Name	:	Elevating table
Model No.	:	DEL19-1568-DP
Trade Mark	:	Flexispot
Rating(s)	:	Input: DC 29V Output: DC24V, 4A Wireless Charging: 15W. Max.

Test Standard(s)	**:**	**47 CFR Part 15 Subpart C**
Test Method(s)	**:**	**ANSI C63.10-2020+Cor.1-2023**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15 Subpart C requirements.
This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt	2026-03-30
Date of Test	2026-03-30 to 2026-04-10
Prepared By	Yuki Long (Yuki Long)
Approved & Authorized Signer	Hugo Chen (Hugo Chen)

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-05-20

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

1. General Information

1.1. Client Information

Applicant	:	Loctek Ergonomic Technology Corp.
Address	:	588 Qihang South Road, Binhai Industrial Zone Yinzhou District, Ningbo Zhejiang, China
Manufacturer	:	Loctek Ergonomic Technology Corp.
Address	:	588 Qihang South Road, Binhai Industrial Zone Yinzhou District, Ningbo Zhejiang, China
Factory	:	Dongguan Good Luck Furniture Industrial Co.,Ltd
Address	:	101 Room No. 65 Qingxi Street Qingxi Town.DongGuan CIty. GuangDong. China. Zip 523661

1.2. Description of Device (EUT)

Product Name	:	Elevating table
Model No.	:	DEL19-1568-DP
Trade Mark	:	Flexispot
Test Power Supply	:	AC 120V/60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	Manufacturer: Shenzhen Green Power Electronic Technology Co.,Ltd. Model: GRP-60W290020-C Input: 100-240V~, 50/60Hz, 1.5A Output: 29V⎓2A, 58W
RF Specification		
Operation Frequency	:	111-205kHz
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Apple Phone	Apple	iPhone 12	DNPDJC7T0DYF
Wireless charging load	Shenzhen Ouju Technology Co., Ltd.	CD2577	/

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Modes	Descriptions
TM1	Adapter+WPT Mode (15W light load)
TM2	Adapter+WPT Mode (15W half load)
TM3	Adapter+WPT Mode (15W full load)
TM4	Adapter+WPT Mode (10W light load)
TM5	Adapter+WPT Mode (10W half load)
TM6	Adapter+WPT Mode (10W full load)
TM7	Adapter+WPT Mode (7.5W light load)
TM8	Adapter+WPT Mode (7.5W half load)
TM9	Adapter+WPT Mode (7.5W full load)
TM10	Adapter+WPT Mode (5W light load)
TM11	Adapter+WPT Mode (5W half load)
TM12	Adapter+WPT Mode (5W full load)
TM13	Standby Mode
Remarks: The above test modes correspond to simulated load conditions. This product was also tested with mobile phones. TM1 corresponds to the mobile phone with 1% battery load; TM8 corresponds to 50% battery load; TM12 corresponds to 99% battery load. The worst-case mode in this report is TM1, which is the 1% battery load condition of the mobile phone load.	

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

1.5. Description Of Test Setup

CE

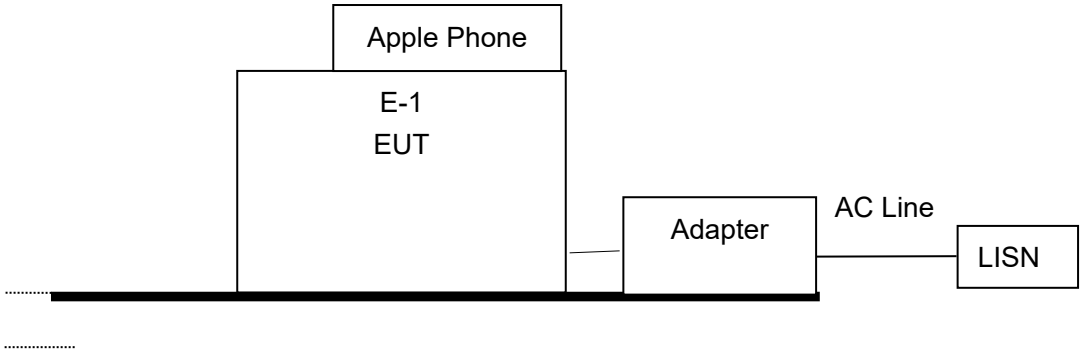

RE

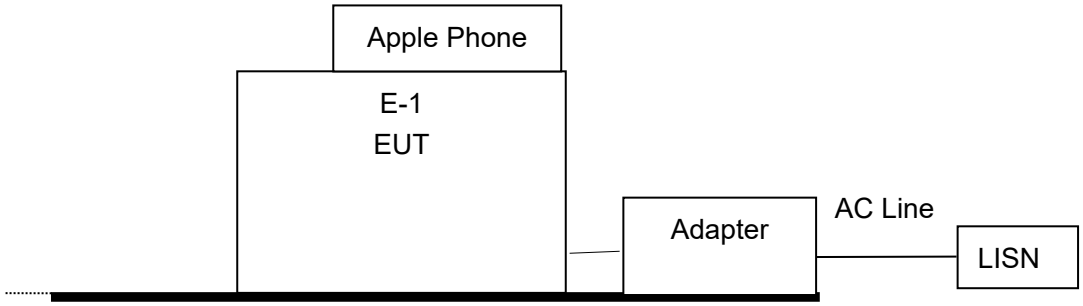

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	2025-09-05	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	2025-12-30	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	2025-12-30	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	2025-12-30	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	2025-09-05	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	2025-12-30	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	2025-10-27	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	2025-10-26	3 Year
9.	Loop Antenna(9K-30M)	Schwarzbeck	FMZB1519B	2025-09-05	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	2024-01-22	3 Year
11.	Pre-amplifier	SONOMA	310N	2025-12-30	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	2025-09-05	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	2025-12-29	1 Year
15.	Signal Generator	Agilent	E4421B	2025-12-29	1 Year
16.	DC Power Supply	IVYTECH	IV3605	2025-09-05	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	2025-10-10	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	2025-12-29	1 Year

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	2.8dB
Occupied Bandwidth	552Hz
Radiated spurious emissions (Below 30MHz)	3.14dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.94dB; Vertical: 4.34dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS
15.215(c)	20dB Occupy Bandwidth	PASS

Note: N/A" denotes test is not applicable in this Test Report

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

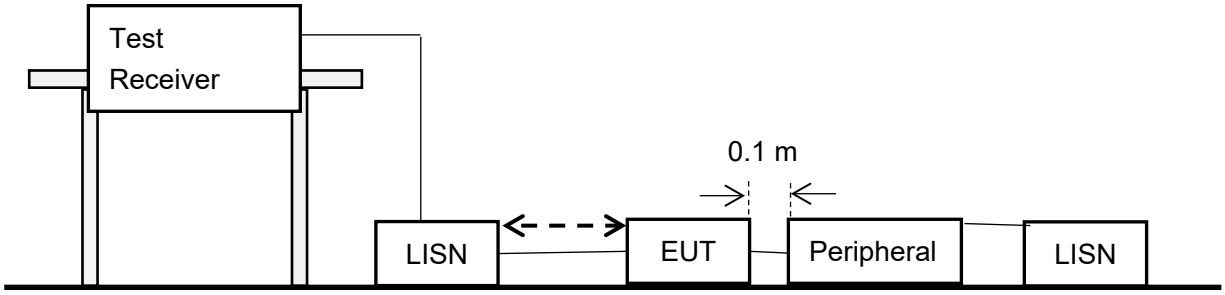

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020+Cor.1-2023 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.
Please to see the following pages.

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Conducted Emission Test Data

Test Site: 1# Shielded Room

Operating Condition: TM1

Test Specification: AC 120V/60Hz for adapter

Comment: Live Line

Temp.(℃)/Hum.(%RH): 23.4℃/53%RH

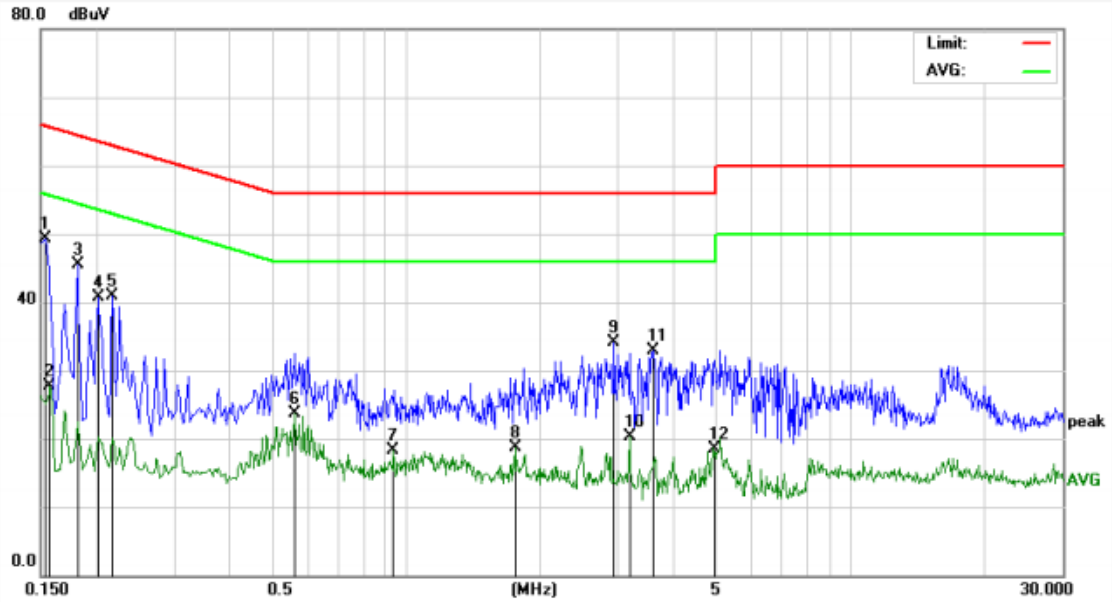

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	31.29	18.08	49.37	65.78	-16.41	QP	
2	0.1580	9.66	18.08	27.74	55.56	-27.82	AVG	
3	0.1819	27.36	18.08	45.44	64.39	-18.95	QP	
4	0.2020	22.69	18.08	40.77	63.52	-22.75	QP	
5	0.2180	22.81	18.09	40.90	62.89	-21.99	QP	
6	0.5620	5.55	18.11	23.66	46.00	-22.34	AVG	
7	0.9380	0.26	18.11	18.37	46.00	-27.63	AVG	
8	1.7620	0.67	18.08	18.75	46.00	-27.25	AVG	
9	2.9420	15.97	18.05	34.02	56.00	-21.98	QP	
10	3.1820	2.24	18.04	20.28	46.00	-25.72	AVG	
11	3.5900	14.78	18.04	32.82	56.00	-23.18	QP	
12	4.9060	0.59	18.01	18.60	46.00	-27.40	AVG	

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Conducted Emission Test Data

Test Site: 1# Shielded Room

Operating Condition: TM1

Test Specification: AC 120V/60Hz for adapter

Comment: Neutral Line

Temp.(℃)/Hum.(%RH): 23.4℃/53%RH

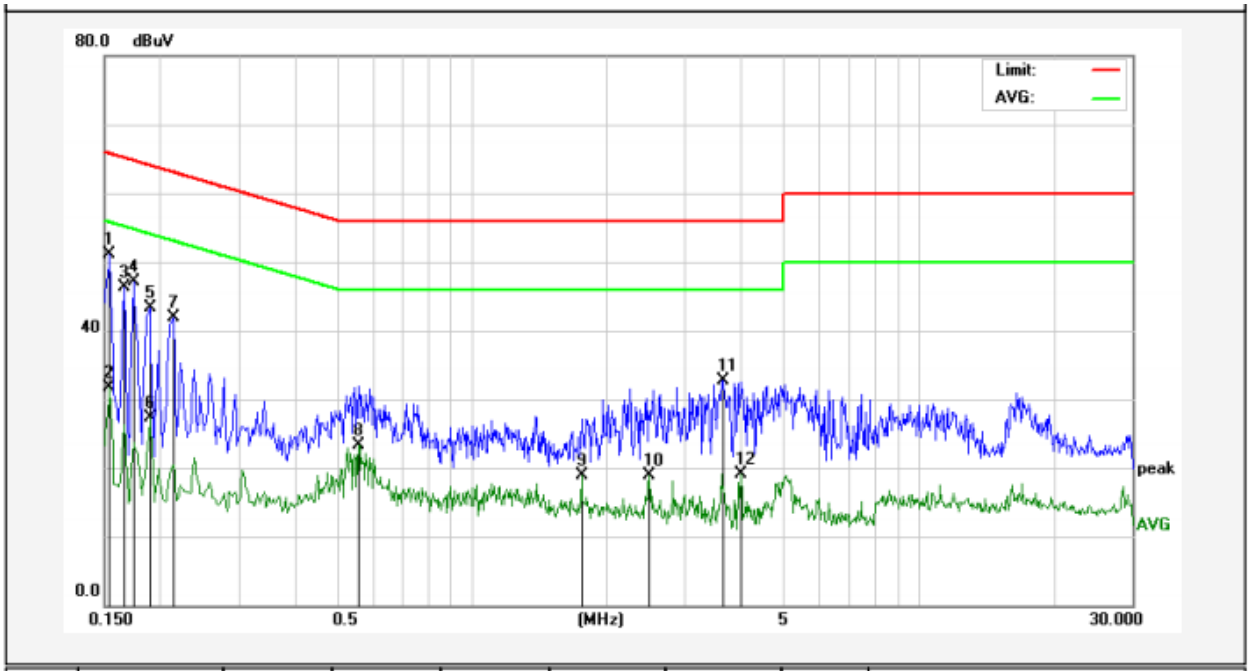

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	32.97	18.08	51.05	65.78	-14.73	QP	
2	0.1539	13.56	18.08	31.64	55.78	-24.14	AVG	
3	0.1660	28.13	18.08	46.21	65.15	-18.94	QP	
4	0.1740	29.05	18.08	47.13	64.76	-17.63	QP	
5	0.1900	25.22	18.08	43.30	64.03	-20.73	QP	
6	0.1900	9.19	18.08	27.27	54.03	-26.76	AVG	
7	0.2140	23.73	18.09	41.82	63.04	-21.22	QP	
8	0.5580	5.25	18.12	23.37	46.00	-22.63	AVG	
9	1.7580	0.78	18.08	18.86	46.00	-27.14	AVG	
10	2.4900	0.84	18.06	18.90	46.00	-27.10	AVG	
11	3.6500	14.73	18.04	32.77	56.00	-23.23	QP	
12	3.9900	1.10	18.02	19.12	46.00	-26.88	AVG	

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:
(1)The lower limit shall apply at the transition frequency.
(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

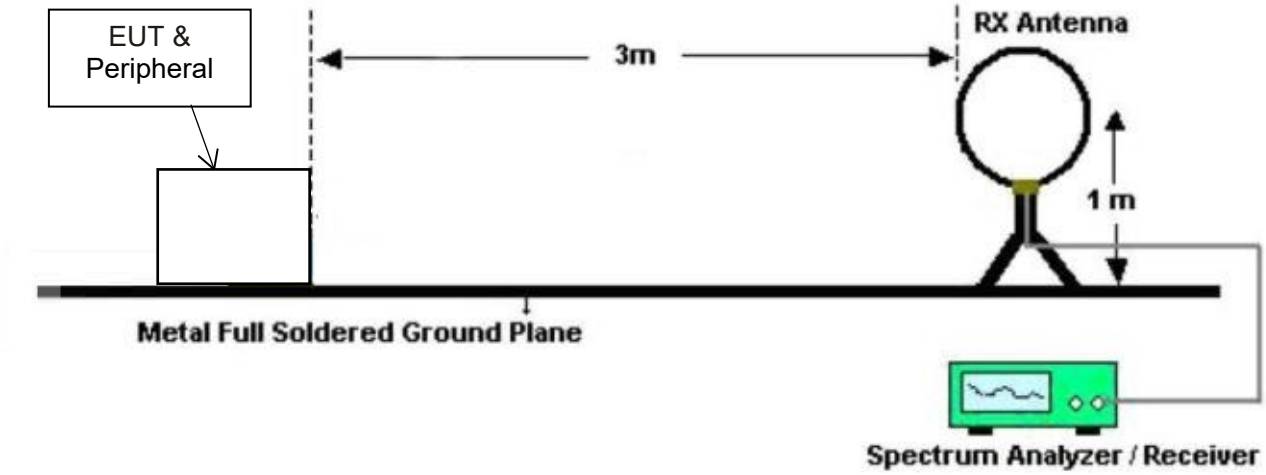

Figure 1. Below 30MHz

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

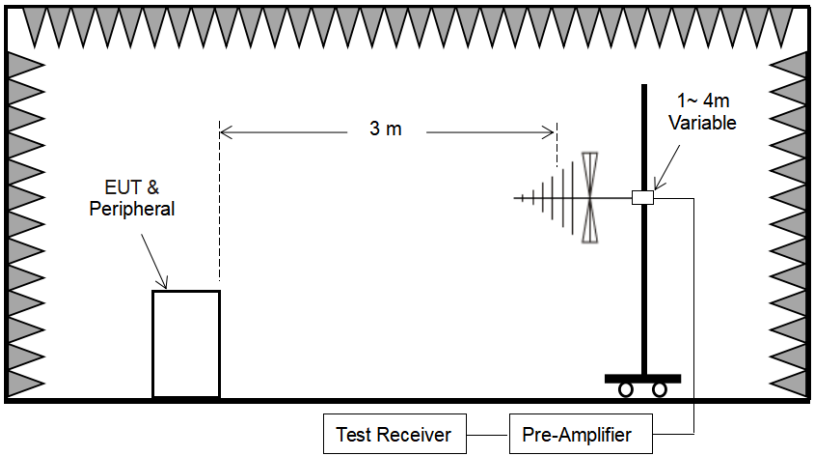

Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable.
The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:
RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:
RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:
RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Test Results (Between 9KHz – 150KHz)

Test Mode:	TM1
Distance:	3m
Power Source:	AC 120V/60Hz for adapter
Polarization:	Coplane
Temp.(℃)/Hum.(%RH):	24.2℃/55%RH

Fundamental

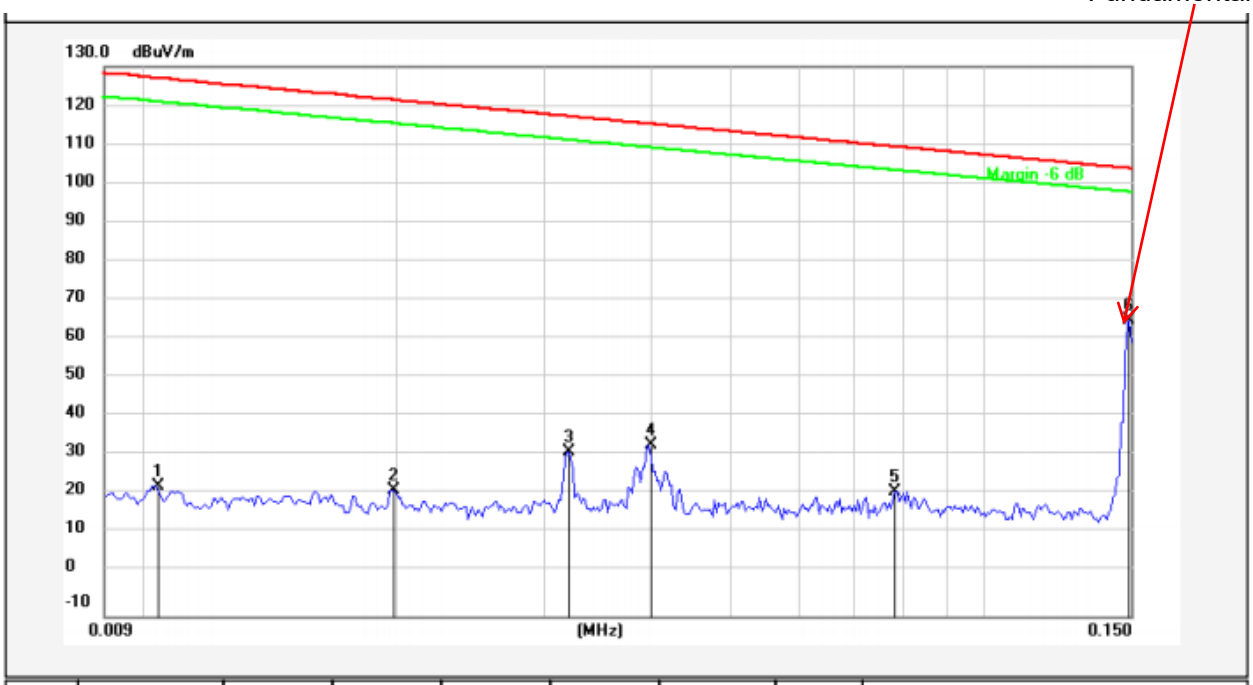

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	0.0104	3.07	20.07	23.14	127.06	-103.92	Peak	
2	0.0199	1.82	20.29	22.11	121.46	-99.35	Peak	
3	0.0321	11.42	20.56	31.98	117.33	-85.35	Peak	
4	0.0400	13.11	20.43	33.54	115.43	-81.89	Peak	
5	0.0785	1.46	20.36	21.82	109.61	-87.79	Peak	
6	0.1491	44.97	20.33	65.30	104.07	-38.77	Peak	

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Test Results (Between 0.15MHz – 30MHz)

Test Mode:	TM1
Distance:	3m
Power Source:	AC 120V/60Hz for adapter
Polarization:	Coplane
Temp.(℃)/Hum.(%RH):	25.4℃/55%RH

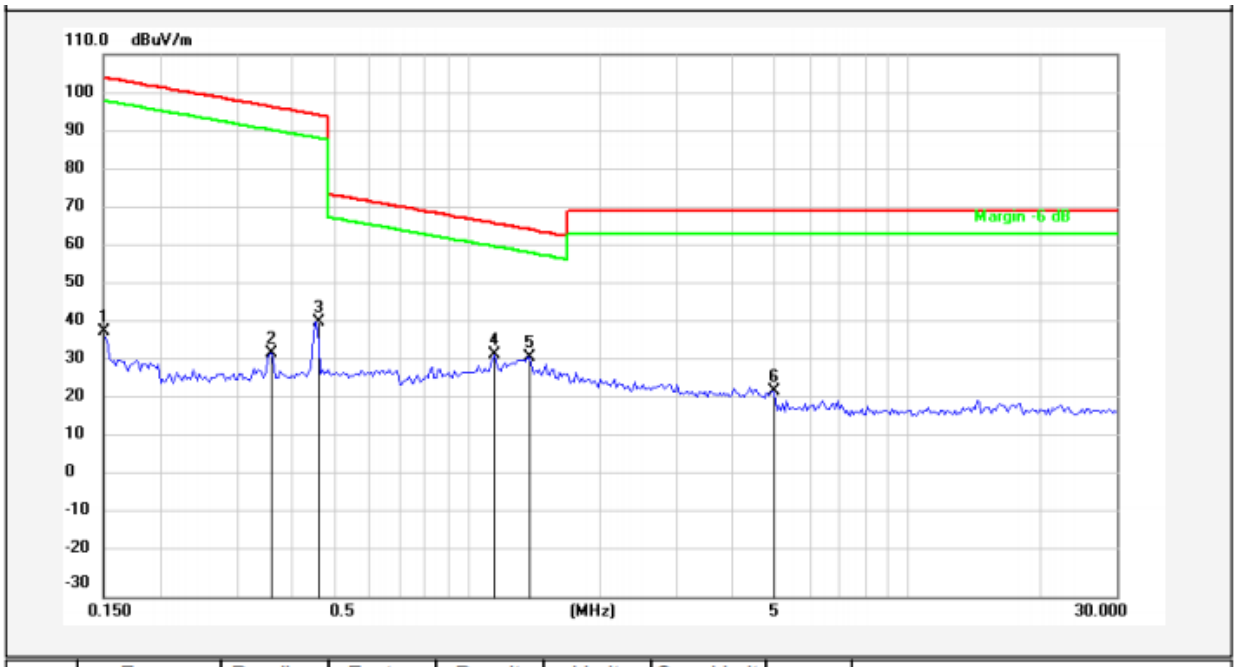

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	0.1500	18.10	20.33	38.43	104.02	-65.59	Peak	
2	0.3577	12.45	20.28	32.73	96.52	-63.79	Peak	
3	0.4564	20.49	20.27	40.76	94.41	-53.65	Peak	
4	1.1595	12.12	20.26	32.38	66.34	-33.96	Peak	
5	1.3884	11.54	20.27	31.81	64.78	-32.97	Peak	
6	4.9519	2.70	20.41	23.11	69.50	-46.39	Peak	

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Test Results (Between 30MHz –1000 MHz)

Test Mode:	TM1
Distance:	3m
Power Source:	AC 120V/60Hz for adapter
Polarization:	Horizontal
Temp.(℃)/Hum.(%RH):	24.9℃/50%RH

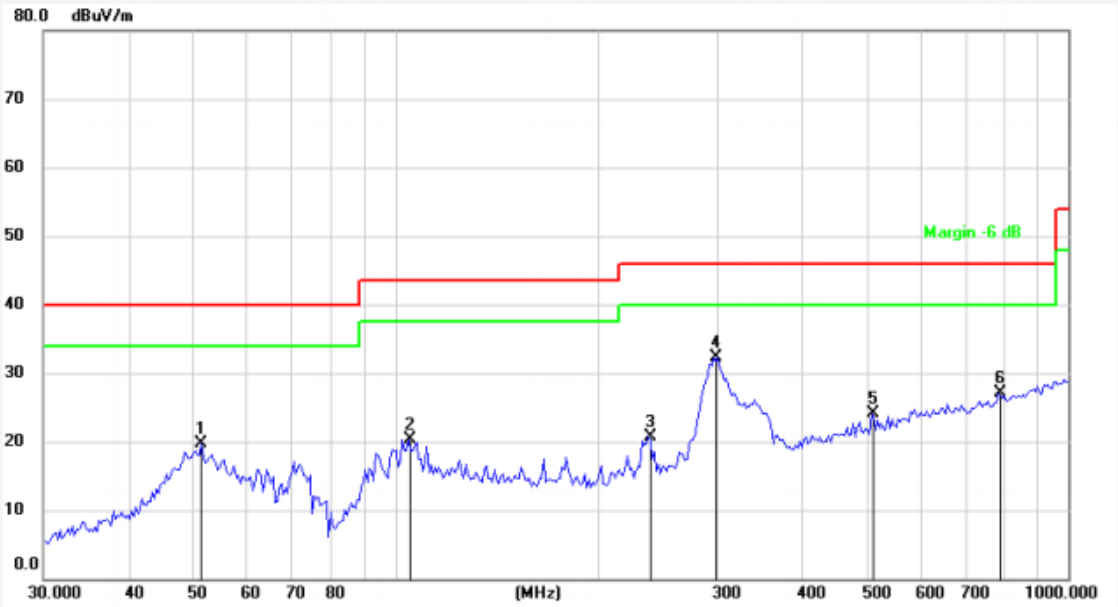

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	51.4807	33.79	-14.04	19.75	40.00	-20.25	QP	
2	104.5361	38.11	-17.84	20.27	43.50	-23.23	QP	
3	237.4760	37.69	-16.94	20.75	46.00	-25.25	QP	
4	297.2241	47.64	-15.34	32.30	46.00	-13.70	QP	
5	510.0436	35.15	-11.04	24.11	46.00	-21.89	QP	
6	787.8513	34.03	-7.02	27.01	46.00	-18.99	QP	

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Test Mode: TM1
Distance: 3m
Power Source: AC 120V/60Hz for adapter
Polarization: Vertical
Temp.(℃)/Hum.(%RH): 24.9℃/50%RH

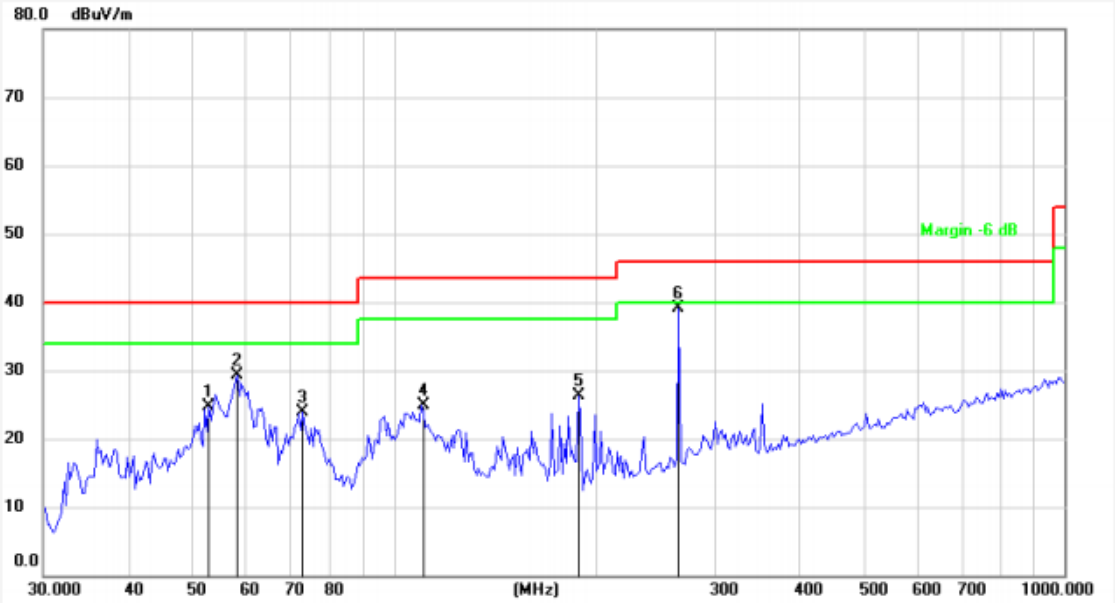

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	52.9453	39.41	-14.71	24.70	40.00	-15.30	QP	
2	58.4074	46.43	-17.20	29.23	40.00	-10.77	QP	
3	73.1025	45.76	-21.91	23.85	40.00	-16.15	QP	
4	109.7960	43.47	-18.52	24.95	43.50	-18.55	QP	
5	188.4124	45.13	-18.92	26.21	43.50	-17.29	QP	
6	265.6757	55.27	-16.08	39.19	46.00	-6.81	QP	

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

5. 20dB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.215(c)
Test Limit	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.2. Test Setup



5.3. Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=1%-5%OBW, VBW≥3*RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.4. Test Data

Temperature:	24.9 °C	Humidity:	50 %	Atmospheric Pressure:	101 kPa

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

Freq. (MHz)	Bandwidth (kHz)	Results
0.1491	0.7381	PASS

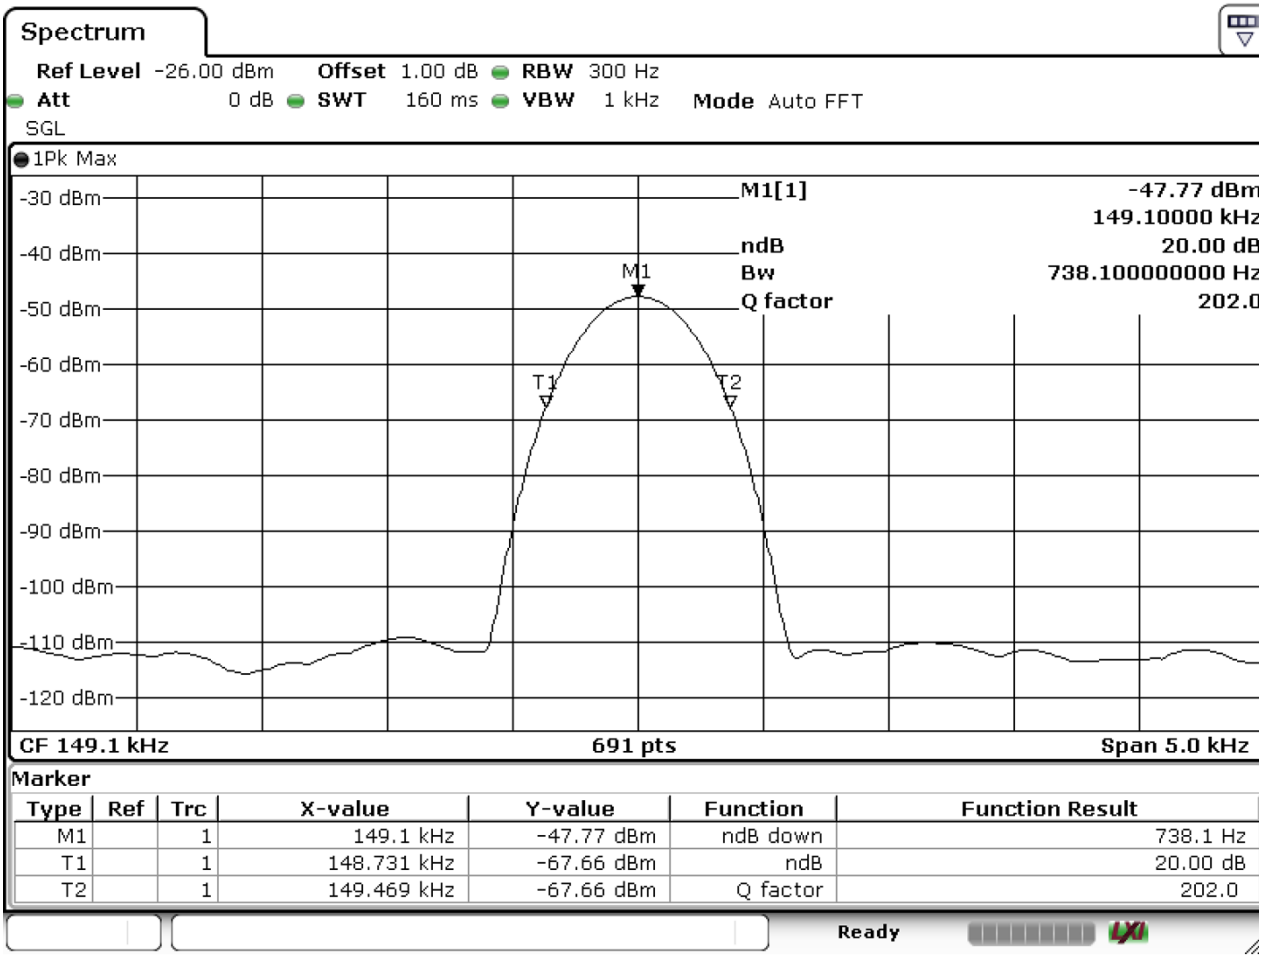

Note: The measured signal is Cw-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300Hz to perfomm the occupied bandwidth test.

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached. It complies with the standard requirement.

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

---------- End of Report ----------

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.
Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com