FCC TEST REPORT

FCC PART 15 SUBPART C 15.249

Test report

On Behalf of

Tai Kee Industrial Company Limited

For

2 PLAY ARCADE MACHINE LRG(B-B)

Model No.: 8063

FCC ID: 2ARNX8063

Prepared for :	**Tai Kee Industrial Company Limited** **Rm 7-8, 9/F., Blk B, Delya Ind. Centre, 7 Shek Pai Tau Road, Tuen Mun, N.T., Hong Kong.**
Prepared By :	**Shenzhen HUAK Testing Technology Co., Ltd.** **1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China**

Date of Test:	**Oct. 29, 2018 ~ Nov. 02, 2018**
Date of Report:	**Nov. 02, 2018**
Report Number:	**HK1810301407E**

TEST RESULT CERTIFICATION

Applicant's name.....	Tai Kee Industrial Company Limited
Address	Rm 7-8, 9/F., Blk B, Delya Ind. Centre, 7 Shek Pai Tau Road, Tuen Mun, N.T., Hong Kong.
Manufacture's Name	Tai Kee Industrial Company Limited
Address	Rm 7-8, 9/F., Blk B, Delya Ind. Centre, 7 Shek Pai Tau Road, Tuen Mun, N.T., Hong Kong.
Product description	
Trade Mark:	N/A
Product name	2 PLAY ARCADE MACHINE LRG(B-B)
Model and/or type reference .	8063
Series Models	OR-2PLAYARCL
Declaration of Difference	Series model are identical with EUT except model number
Standards	FCC Rules and Regulations Part 15 Subpart C Section 15.249 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:	
Date (s) of performance of tests.....:	Oct. 29, 2018 to Nov. 02, 2018
Date of Issue.....:	Nov. 02, 2018
Test Result.....:	**Pass**

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)

Table of Contents **Page**

1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. RADIATED EMISSION	8
3.1. MEASUREMENT PROCEDURE	8
3.2. TEST SETUP	10
3.3. TEST RESULT	11
4. BAND EDGE EMISSION	17
4.1. MEASUREMENT PROCEDURE	17
4.2 TEST SETUP	17
4.3 RADIATED TEST RESULT	17
5. BANDWIDTH	22
5.1. MEASUREMENT PROCEDURE	22
5.2. TEST SETUP	22
5.3. TEST RESULT	23
6. PHOTOGRAPH OF TEST	25
7. PHOTOGRAPH OF EUT	26

1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249&15.209	Band Edges Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	N/A

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Operation Frequency	2420-2465MHz
Field Strength(3m)	89.33dBuV/m(Average)@3m
Modulation	GFSK
Number of channels	16
Test Channels	2420MHz, 2443MHz, 2465MHz
Hardware Version	DRSDW-01
Software Version	V1.0
Antenna Designation	Fixed antenna
Antenna Gain	0dBi
Power Supply	DC 3V by battery

Channel List

Channel Number	Frequency	Channel Number	Frequency
1	2420MHz	9	2443MHz
2	2423MHz	10	2446MHz
3	2425MHz	11	2449MHz
4	2428MHz	12	2452MHz
5	2431MHz	13	2455MHz
6	2434MHz	14	2458MHz
7	2437MHz	15	2461MHz
8	2440MHz	16	2465MHz

2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX

Note:
1. Only the data of the worst case recorded in the test report.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during Radiation and Above1GHz Radiation testing:

EUT

2.4 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schewarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2017	N/A
14.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year

3. RADIATED EMISSION

3.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 3MHz/10MHz for Peak, 3MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

Test limit for Standard FCC15.249

Fundamental Frequency	**Field Strength of Fundamental (millivolts/meter)**	**Field Strength of Harmonics (microvolts/meter)**
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Test limit for Standard FCC 15.209

Frequency (MHz)	**Distance Meters**	**Field Strengths Limit**	
		μ V/m	**dB(μV)/m**
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark: (1) Emission level dBμ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

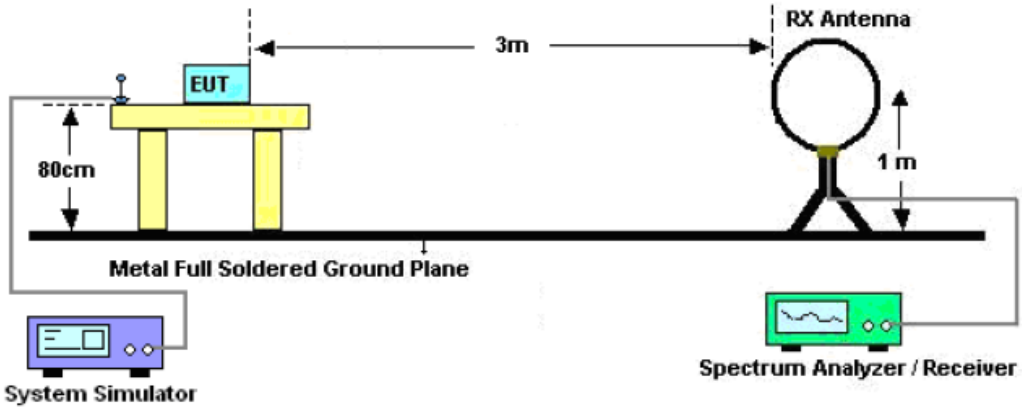

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

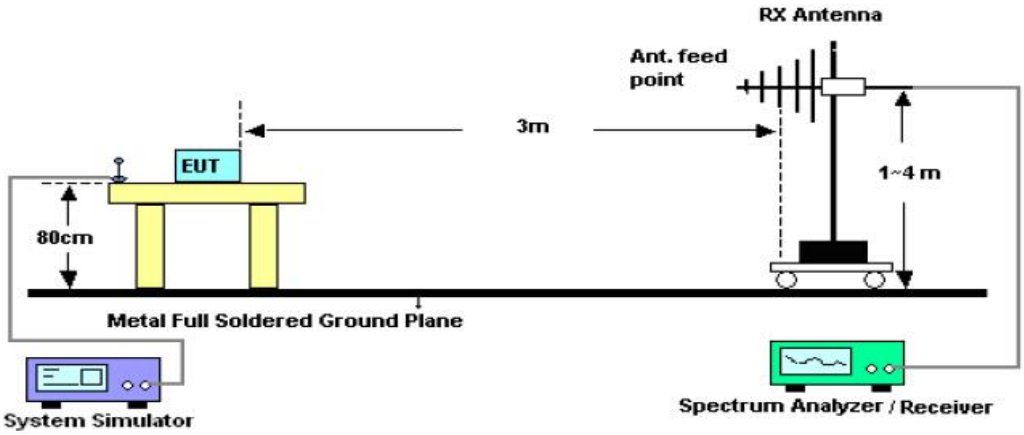

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

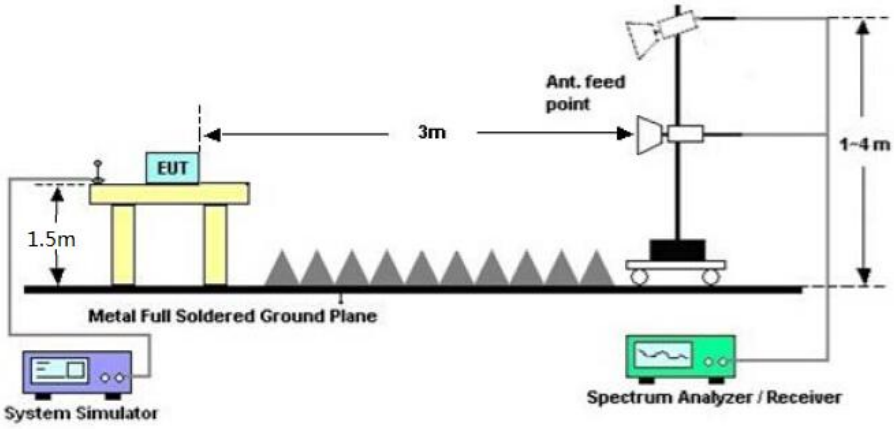

3.3. TEST RESULT

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ-Horizontal

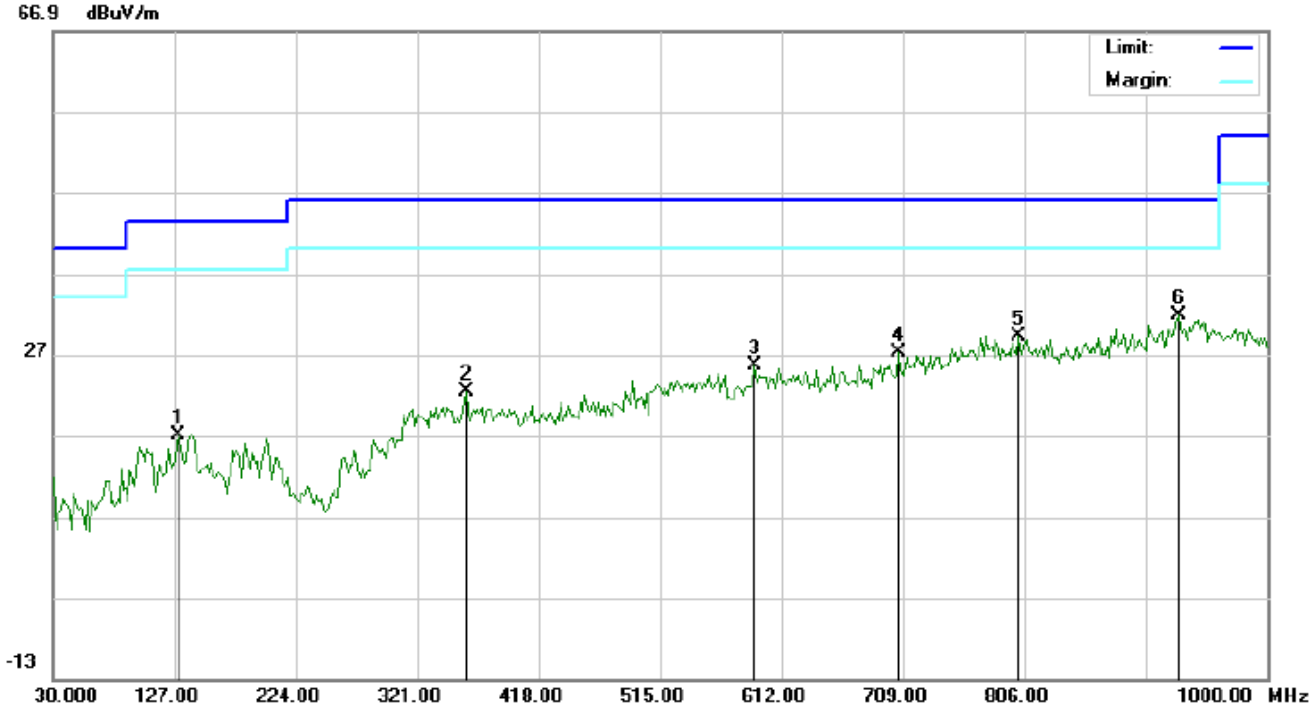

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		130.2332	6.33	10.64	16.97	43.50	-26.53	peak	
2		359.7999	3.54	18.80	22.34	46.00	-23.66	peak	
3		590.9832	2.05	23.50	25.55	46.00	-20.45	peak	
4		705.7667	1.91	25.38	27.29	46.00	-18.71	peak	
5		801.1499	1.88	27.32	29.20	46.00	-16.80	peak	
6	*	928.8666	2.39	29.41	31.80	46.00	-14.20	peak	

RADIATED EMISSION BELOW 1GHZ-Vertical

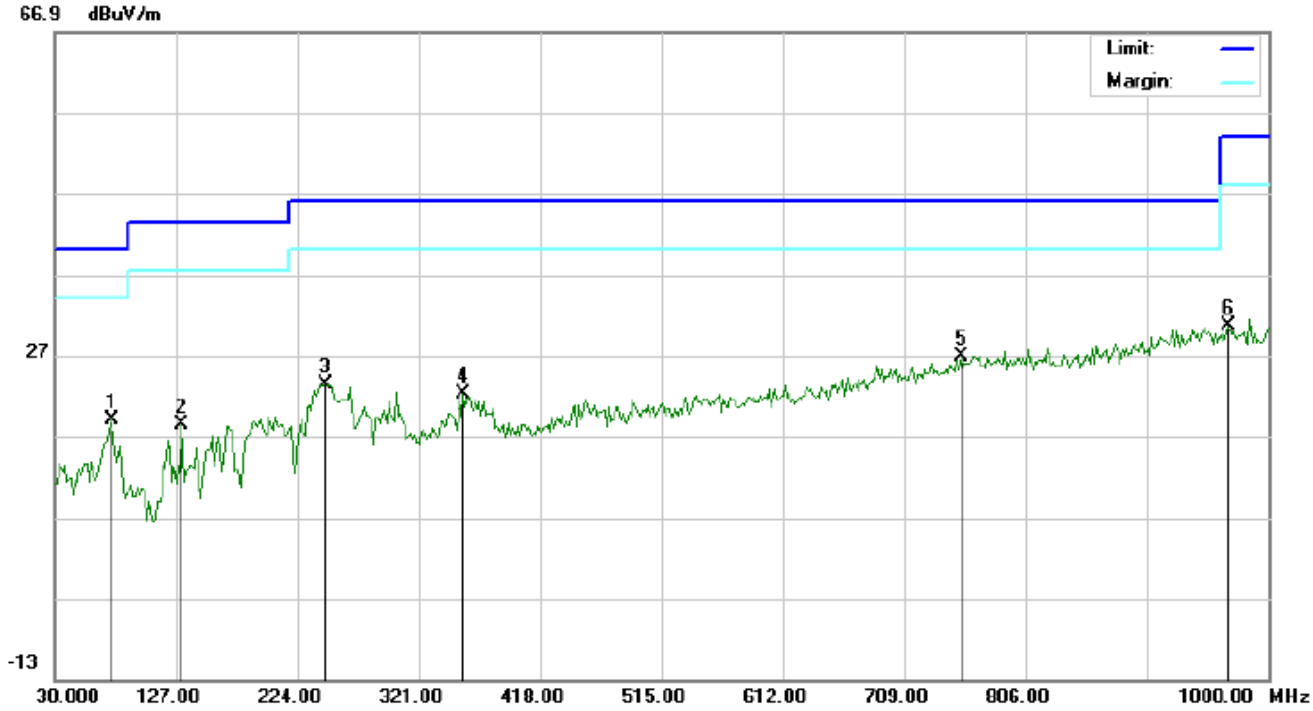

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		75.2667	16.13	2.96	19.09	40.00	-20.91	peak	
2		131.8498	6.65	11.80	18.45	43.50	-25.05	peak	
3		246.6331	9.76	13.57	23.33	46.00	-22.67	peak	
4		356.5667	3.35	18.78	22.13	46.00	-23.87	peak	
5	*	754.2667	0.09	26.69	26.78	46.00	-19.22	peak	
6		967.6666	0.72	29.83	30.55	54.00	-23.45	peak	

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

3. The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

RADIATED EMISSION ABOVE 1GHZ

Field strength of fundamental emission

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name.：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage：	DC 5V
Test Mode ：	Mode 1/2/3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2420.021	101.75	-9.61	92.14	114.00	-21.86	peak
2420.021	98.94	-9.61	89.33	94.00	-4.67	AVG
2443.021	101.46	-9.61	91.85	114.00	-22.15	peak
2443.021	98.35	-9.61	88.74	94.00	-5.26	AVG
2465.021	101.03	-9.61	91.42	114.00	-22.58	peak
2465.021	97.97	-9.61	88.36	94.00	-5.64	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 1/2/3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2420.021	101.27	-9.61	91.66	114.00	-22.34	peak
2420.021	97.86	-9.61	88.25	94.00	-5.75	AVG
2443.021	100.84	-9.61	91.23	114.00	-22.77	peak
2443.021	97.75	-9.61	88.14	94.00	-5.86	AVG
2465.021	99.49	-9.61	89.88	114.00	-24.12	peak
2465.021	97.03	-9.61	87.42	94.00	-6.58	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Field strength of spurious emission

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name.：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage：	DC 5V
Test Mode ：	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4840.042	44.78	3.76	48.54	74.00	-25.46	peak
4840.042	42.76	3.76	46.52	54.00	-7.48	AVG
7260.063	37.16	8.17	45.33	74.00	-28.67	peak
7260.063	34.68	8.17	42.85	54.00	-11.15	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4840.042	44.38	3.76	48.14	74.00	-25.86	peak
4840.042	42.28	3.76	46.04	54.00	-7.96	AVG
7260.063	36.61	8.17	44.78	74.00	-29.22	peak
7260.063	33.95	8.17	42.12	54.00	-11.88	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name.：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage：	DC 5V
Test Mode ：	Mode 2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4886.042	45.77	3.78	49.55	74.00	-24.45	peak
4886.042	43.26	3.78	47.04	54.00	-6.96	AVG
7329.063	37.10	8.23	45.33	74.00	-28.67	peak
7329.063	34.42	8.23	42.65	54.00	-11.35	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4886.042	44.76	3.78	48.54	74.00	-25.46	peak
4886.042	42.34	3.78	46.12	54.00	-7.88	AVG
7329.063	36.42	8.23	44.65	74.00	-29.35	peak
7329.063	33.68	8.23	41.91	54.00	-12.09	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name.：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage：	DC 5V
Test Mode ：	Mode 3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4930.042	46.04	3.81	49.85	74.00	-24.15	peak
4930.042	42.44	3.81	46.25	54.00	-7.75	AVG
7395.063	37.07	8.27	45.34	74.00	-28.66	peak
7395.063	34.12	8.27	42.39	54.00	-11.61	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4930.042	44.35	3.81	48.16	74.00	-25.84	peak
4930.042	41.55	3.81	45.36	54.00	-8.64	AVG
7395.063	36.68	8.27	44.95	74.00	-29.05	peak
7395.063	33.77	8.27	42.04	54.00	-11.96	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.
Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
The “Factor” value can be calculated automatically by software of measurement system.

4. BAND EDGE EMISSION

4.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz , Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1kHz), Sweep=AUTO
3. Other procedures refer to clause 3.1.

4.2 TEST SETUP

RADIATED EMISSION TEST SETUP

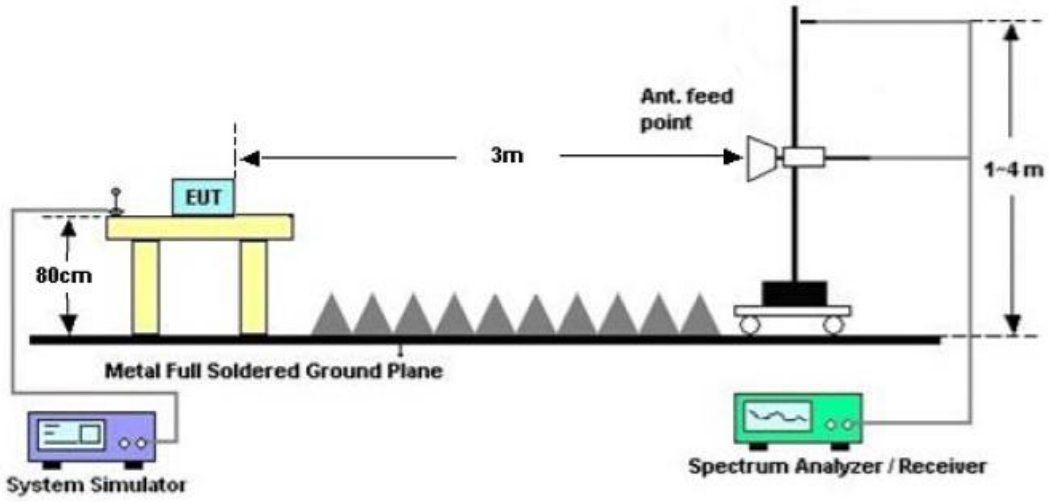

4.3 RADIATED TEST RESULT

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the “Input Correction” of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μV) to represent the Amplitude. Use the F dB(μV/m) to represent the Field Strength. So A=F.

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 1	Polarization :	Horizontal

PK Value

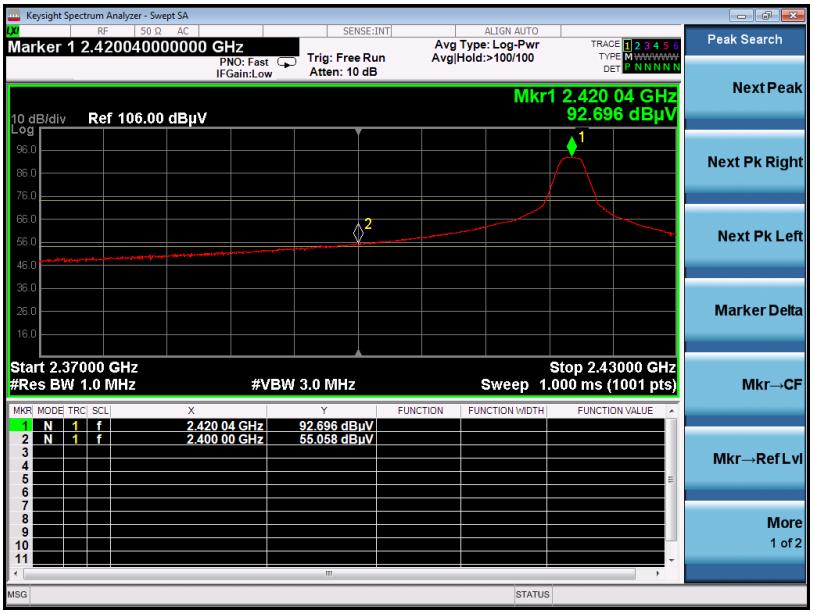

AV Value

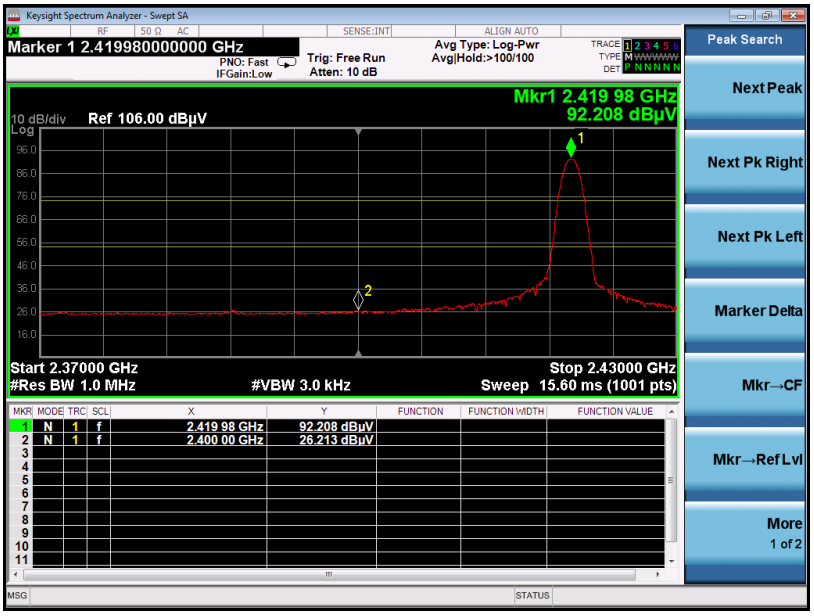

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 1	Polarization :	Vertical

PK Value

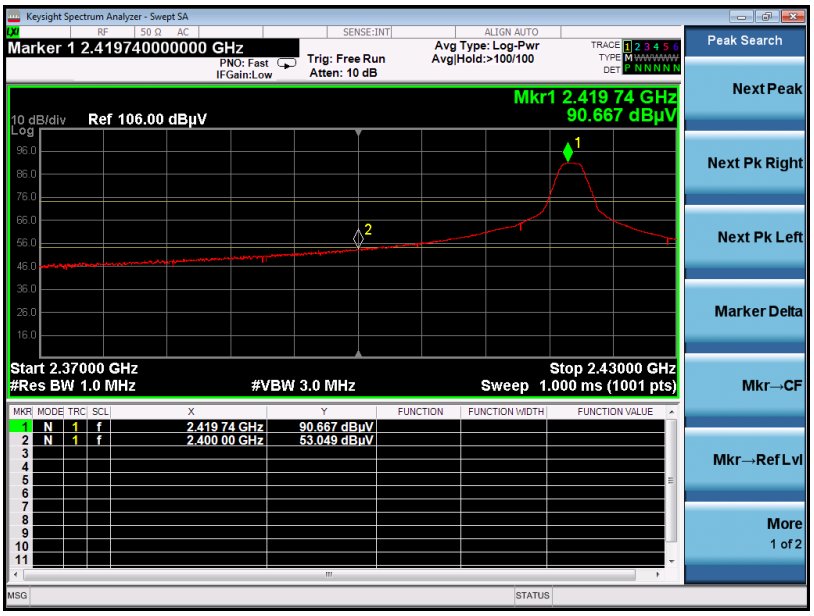

AV Value

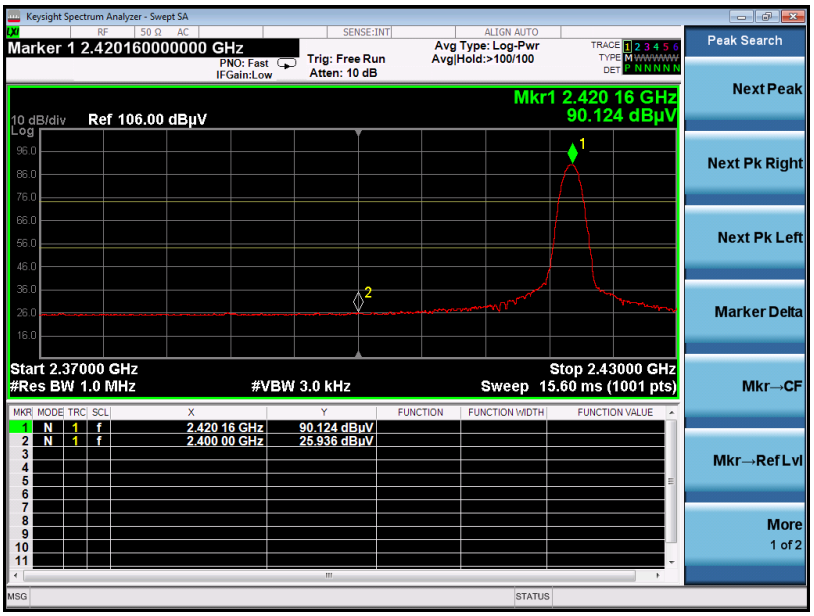

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 3	Polarization :	Horizontal

PK Value

AV Value

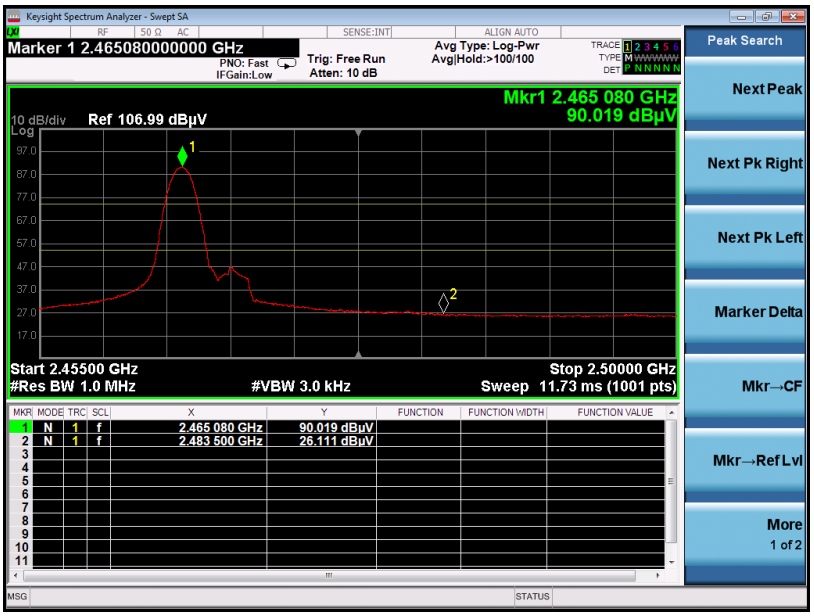

EUT：	2 PLAY ARCADE MACHINE LRG(B-B)	Model Name. ：	8063
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 5V
Test Mode ：	Mode 3	Polarization :	Vertical

PK Value

AV Value

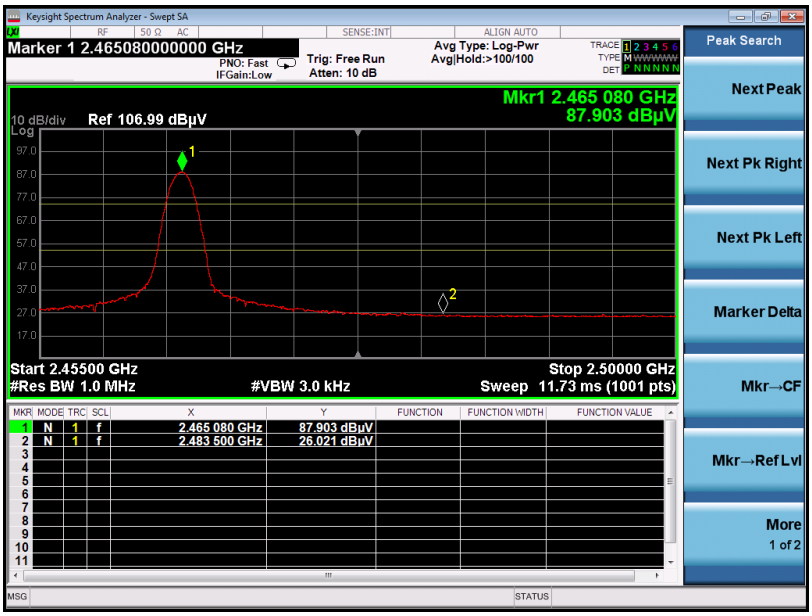

5. BANDWIDTH

5.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2, Set the EUT Work on the operation frequency individually.
3. Set Span = approximately 2 to 5 times the OBW, centered on a hoping channel
   The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately 3* RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

5.2. TEST SETUP

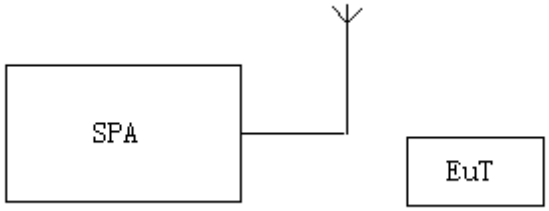

5.3. TEST RESULT

TEST ITEM	-20dB BANDWIDTH
TEST MODE	Mode1, Mode 2, Mode 3

Channel	MHz	Criteria
Low Channel	2.649	PASS
Middle Channel	2.691	PASS
High Channel	2.751	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

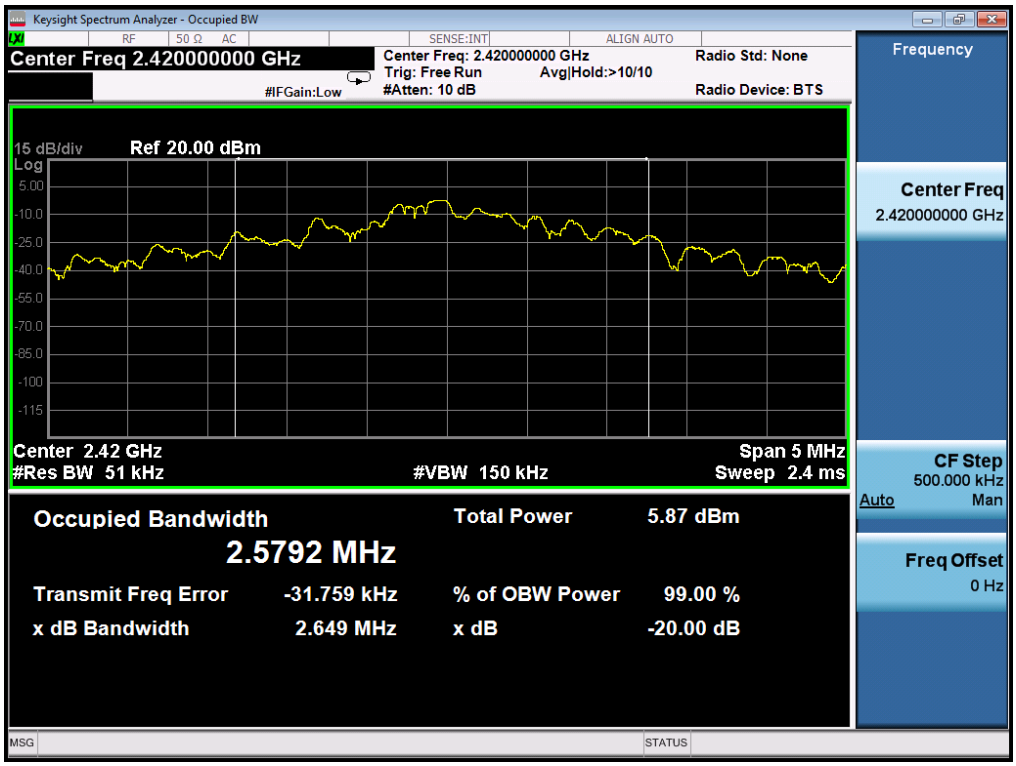

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

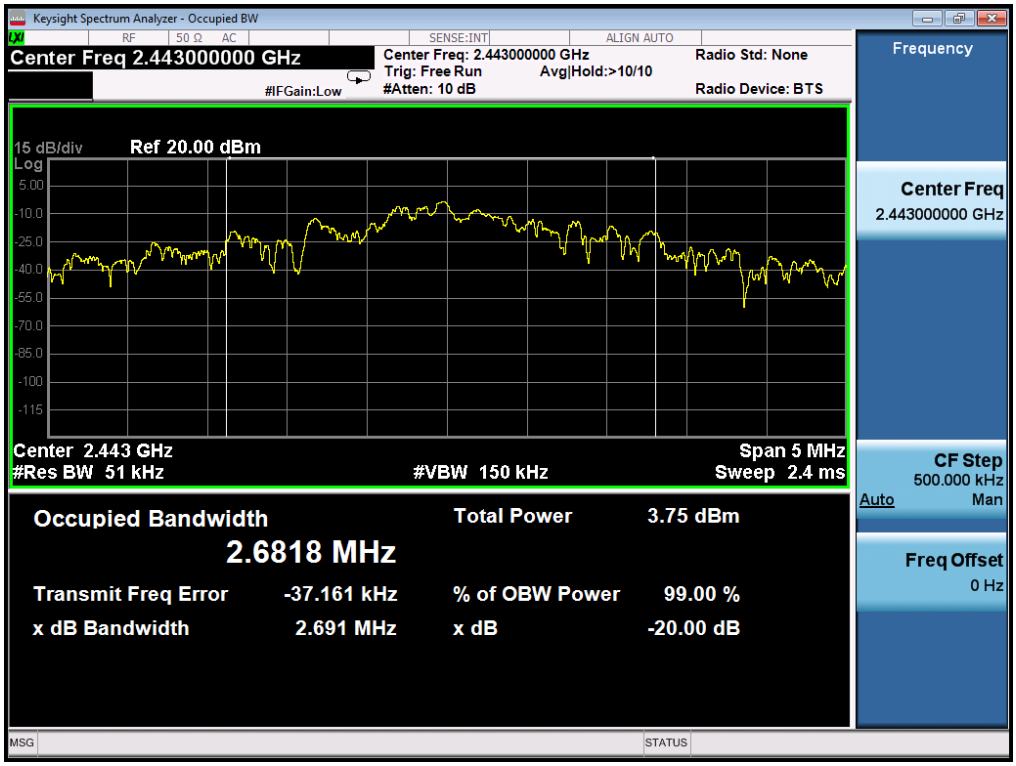

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

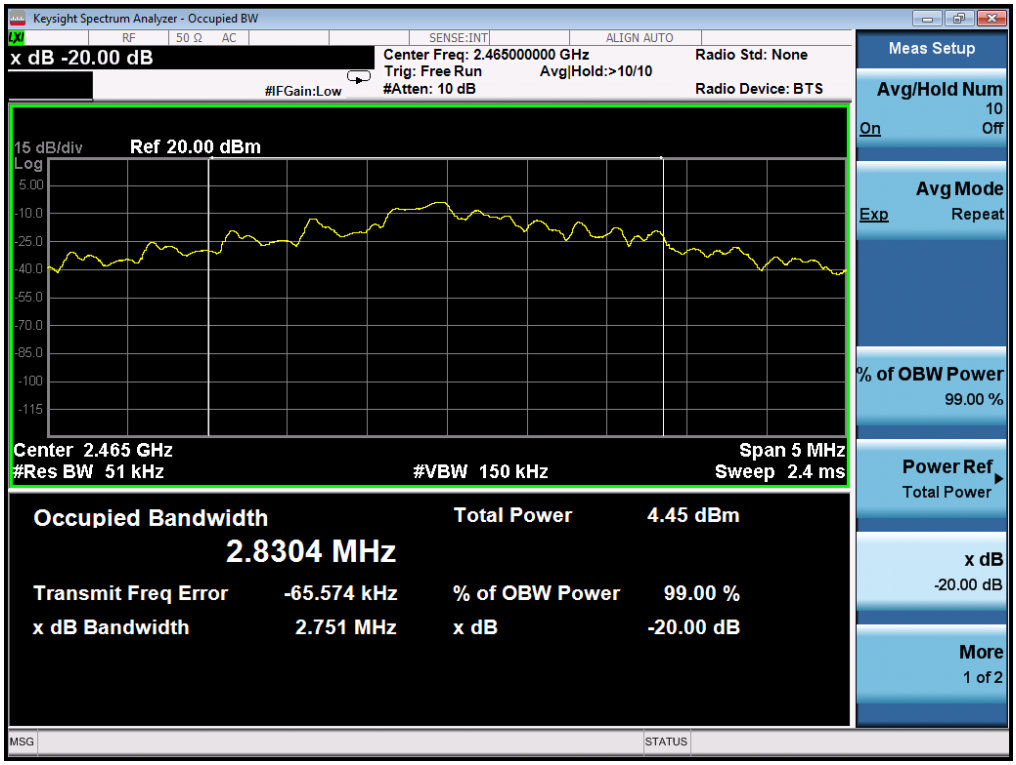

6. PHOTOGRAPH OF TEST

Radiated Emission

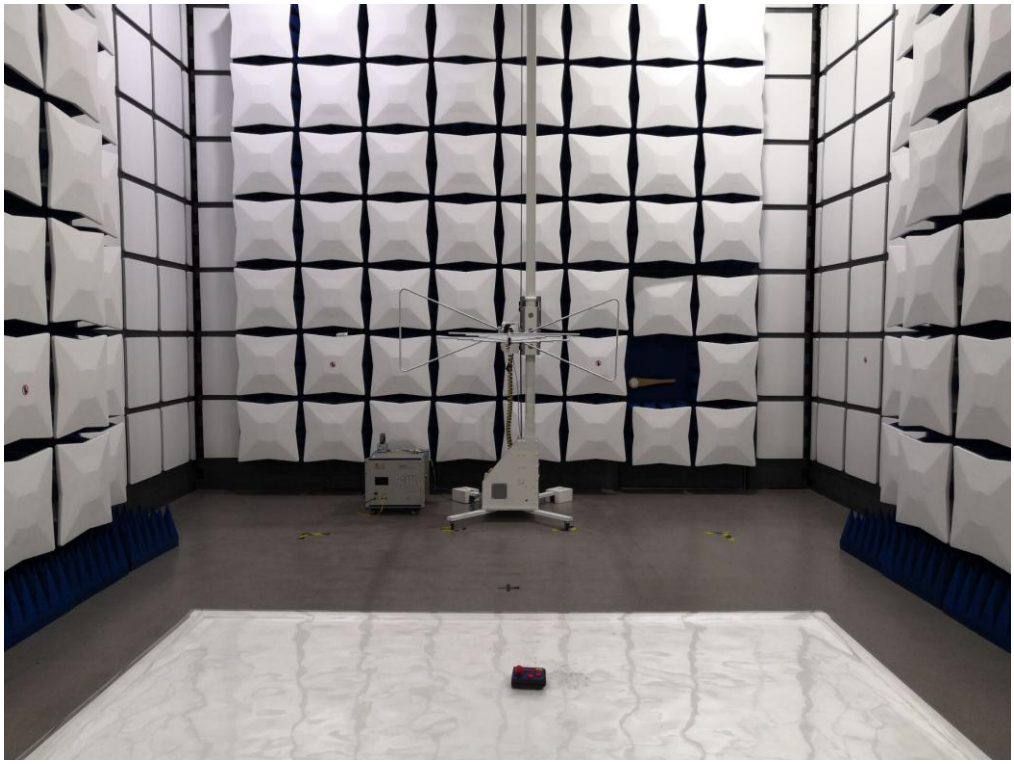

7. PHOTOGRAPH OF EUT

ALL VIEW OF EUT

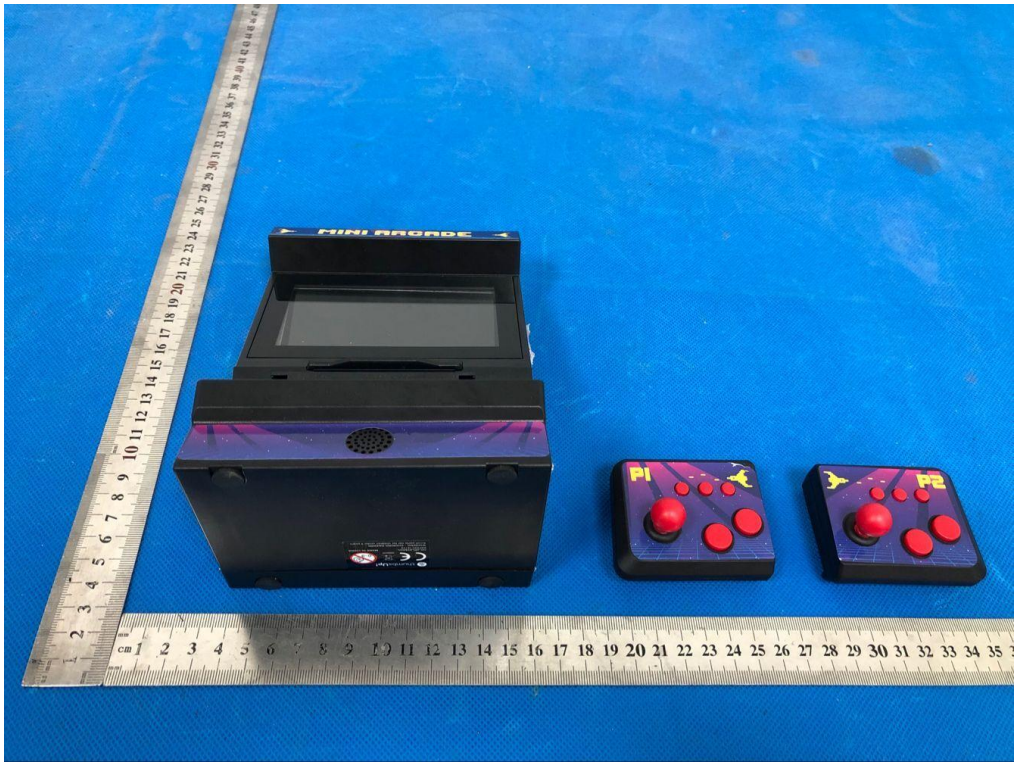

TOP VIEW OF EUT

BOTTOM VIEW OF EUT

FRONT VIEW OF EUT

BACK VIEW OF EUT

LEFT VIEW OF EUT

RIGHT VIEW OF EUT

OPEN VIEW OF EUT

INTERNAL VIEW OF EUT-1

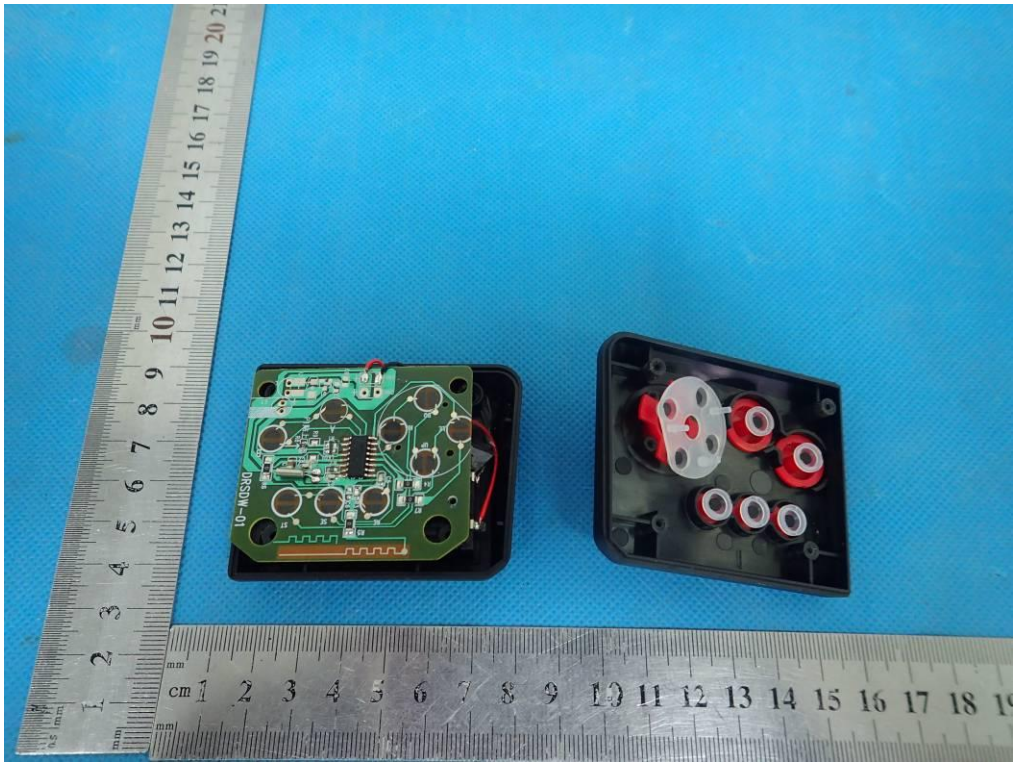

INTERNAL VIEW OF EUT-2

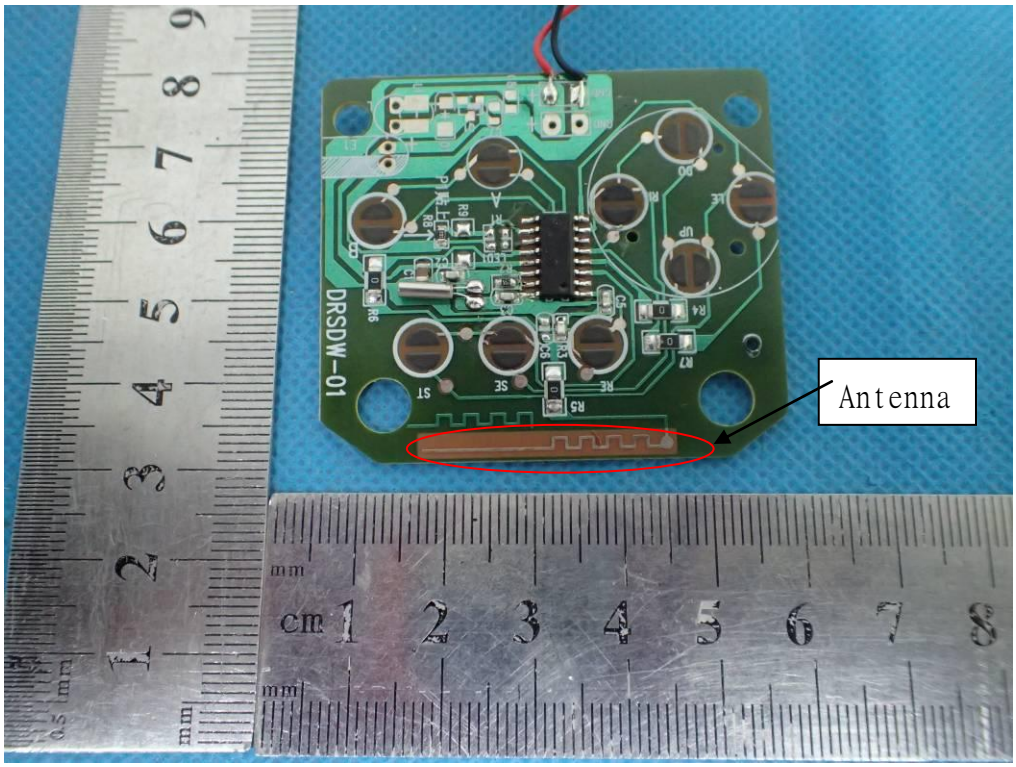

INTERNAL VIEW OF EUT-3

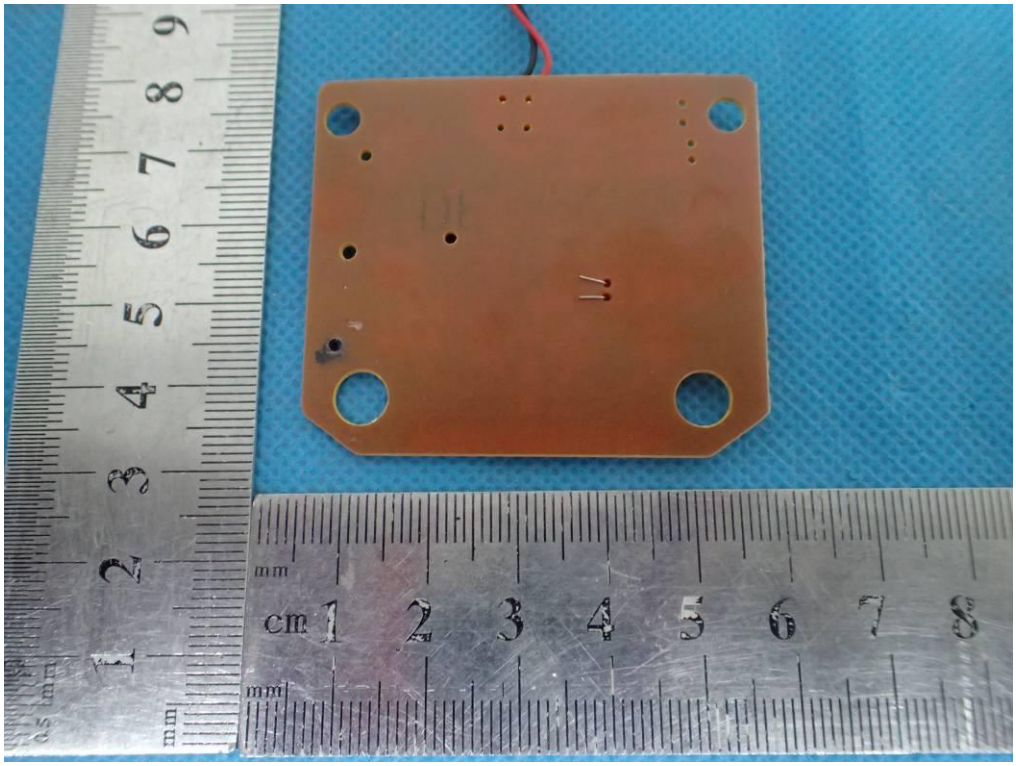

----END OF REPORT----